ff

process design review · 574 steps · generated by CarbonEDA v0 on 2026-11-09 20:07 EST

498.1

kgCO2e per wafer start

338.0
EPW energy · 68%

38.3
MPW materials · 8%

121.8
GPW gases · 24%

wafer 300 mm · yield 1 · carbon intensity 0.43 kgCO2e/kWh · facility overhead 0.4 x tool energy
EPW 338.0 = tool 241.4 + facility overhead 96.6 kgCO2e (561 + 225 kWh)

flow technologies/logic/ff/ff_final.csv
layout technologies/logic/ff/ff_layout.gds
structure images from the spx run of 2026-11-09 02:49:45

CarbonEDA parameters

config/carbon_config.yaml and materials.yaml as used for every number in this report

EPW energy

(tool + 0.4 x tool facility overhead) x 0.43 kgCO2e/kWh

process area	kWh / step	steps
RIE	1.33	127
Ion_implantation	1.33	4
Diffusion	1.33	23
Metallization	2	39
Wet_etch	0.28	34
Wafer_clean	0.28	68
Resist	0.28	47
CMP	0.28	24
CVD	1.09	158
EUV	3.25	14
ArF-i	0.36	19
ArF	0.33	3
KrF	0.33	14

GPW process gases

kg x (1 - utilization) x (1 - abatement) x GWP, plus byproducts kg/kg x (1 - abatement) x GWP; defaults: utilization 1.0, abatement 0.9

area	gas	g / step	upstream*	utilization	abatement	byproducts (kg per kg gas)
CVD	NF3	2.54	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
RIE	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
RIE	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05

* kgCO2e per kg of gas made, counted in MPW

GWP (kgCO2e per kg, 100-yr) and abatement of every gas emitted

gas	GWP	abatement
CF4	7390	0.89
C2F6	12200	0.95
C4F6	0	0.98
C4F8	10300	0.98
CHF3	14800	0.98

gas	GWP	abatement
CH2F2	675	0.98
CH3F	116	0.98
NF3	17200	0.95
SF6	22800	0.95

MPW materials

blanket film over a 300 mm wafer: thickness x area x density x GWP; the wafer itself 26000 gCO2e (300 mm); yield 1

material	g/cm³	gCO2e/g
Resist	0.97	4.2
TiN	5.21	43.98
W	19.3	75.81
Ti	4.5	47.63
TaN	13.7	25.82

material	g/cm³	gCO2e/g
Cu	8.96	6.09
Co	8.9	44.5

Step #20: Wafer

substrate · Wafer

26	26	5.2%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



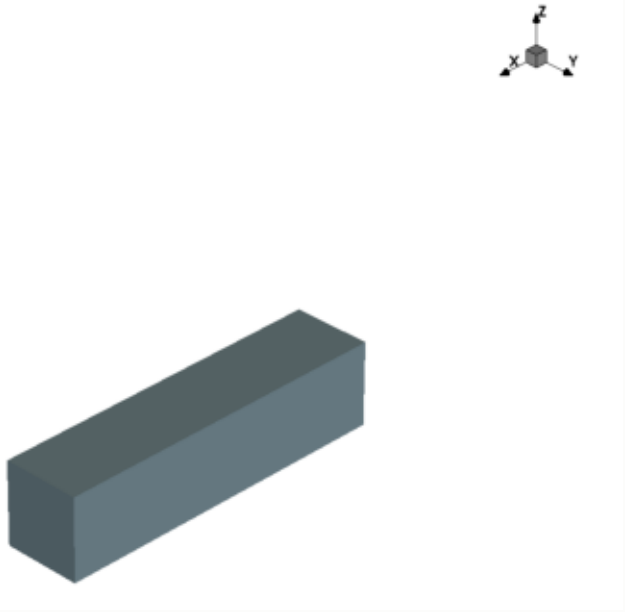

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	26 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

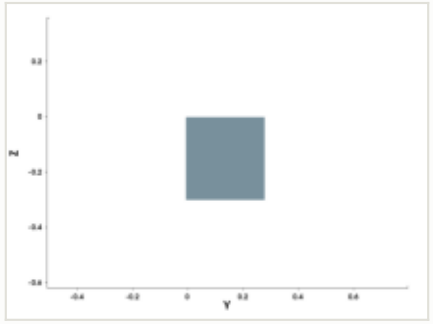

y cut at 0.211 µm

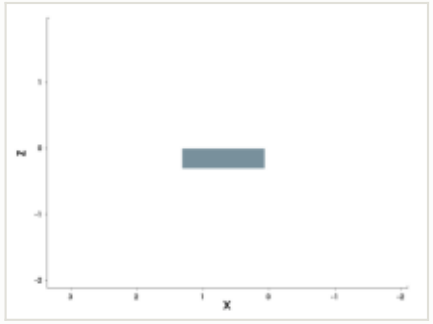

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

Step #40: CVD

depo_isotropic · CVD

1.31	27.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

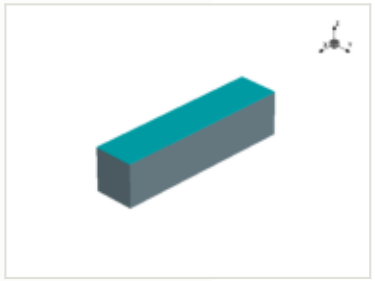

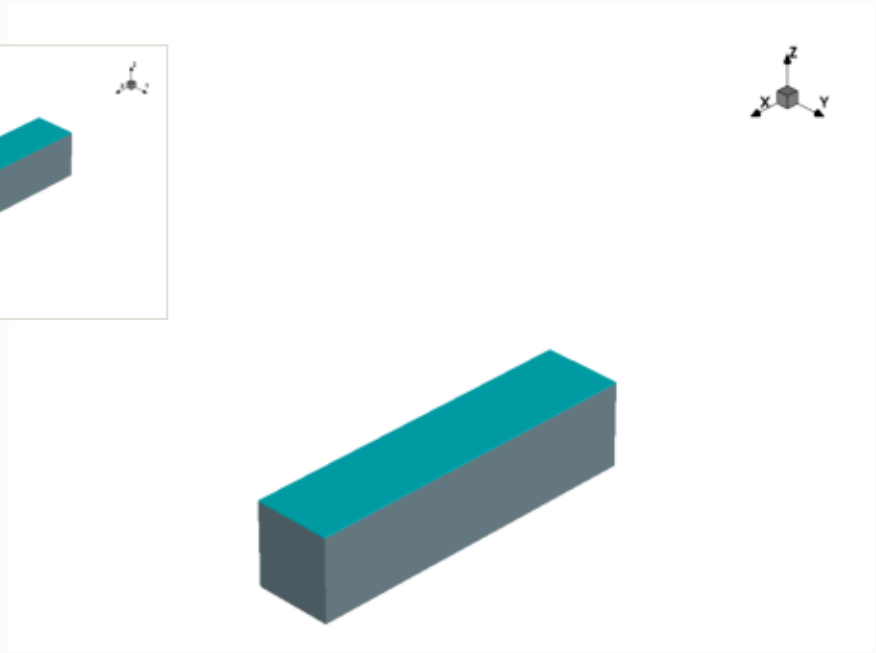

this step

process area	CVD
material	—
thickness	0.0035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

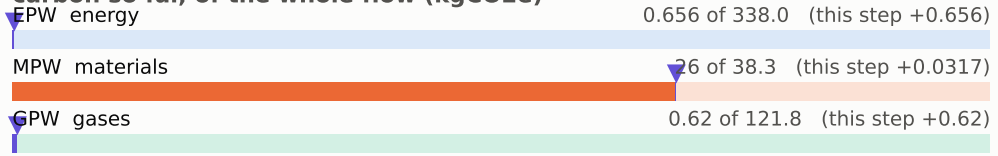

embodied carbon up to each step (kgCO2e per wafer)

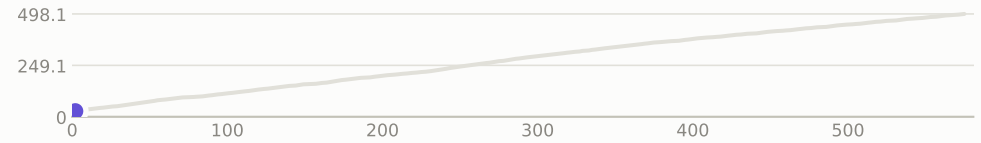

x cut at 0.677 µm

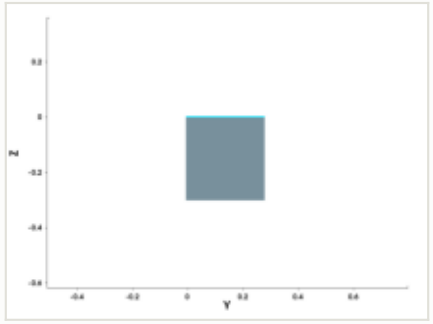

y cut at 0.211 µm

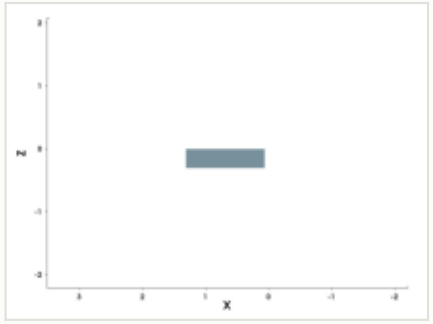

mask for this step

no mask for this step

steps by process area

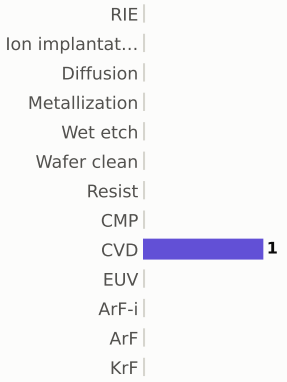

materials deposited (g)



gases emitted (g)

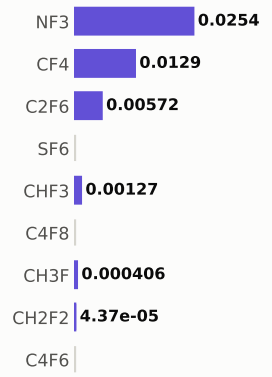

Step #50: CVD

depo_isotropic · CVD

1.31	28.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

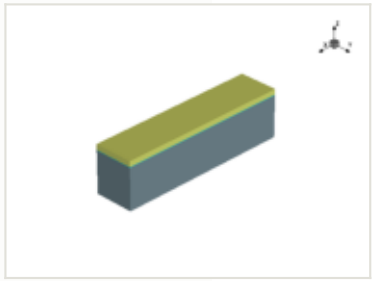

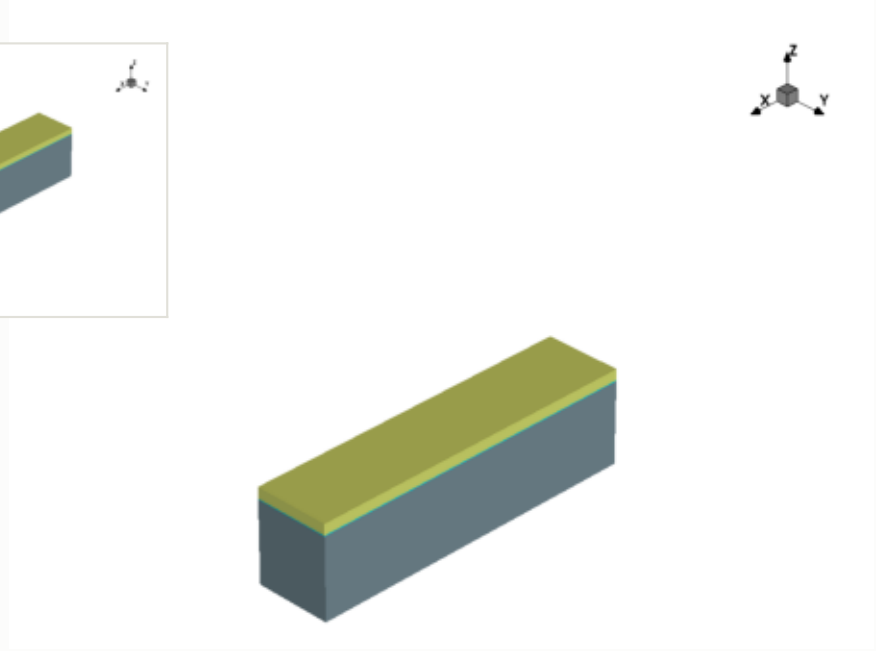

x cut at 0.677 µm

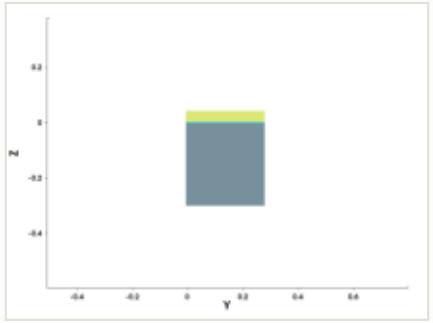

y cut at 0.211 µm

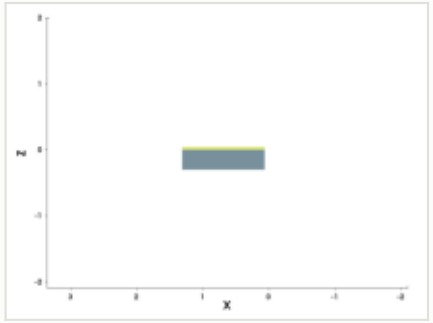

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

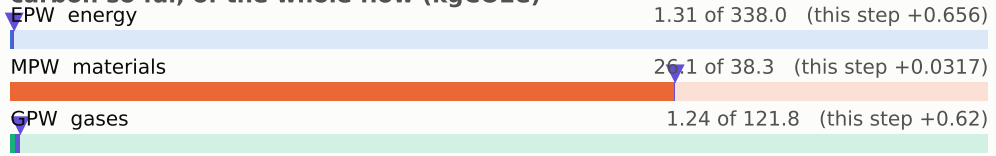

embodied carbon up to each step (kgCO2e per wafer)

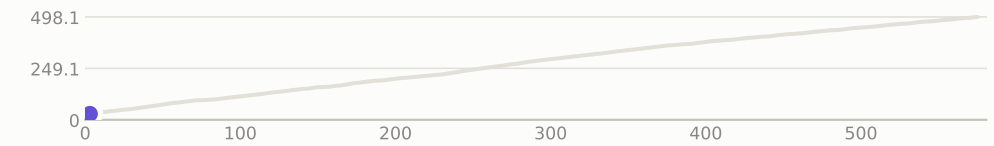

steps by process area

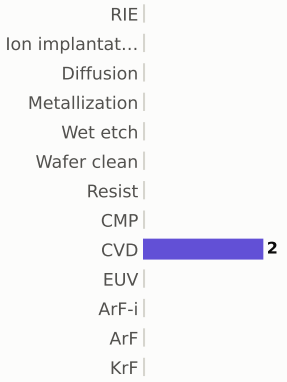

materials deposited (g)



gases emitted (g)

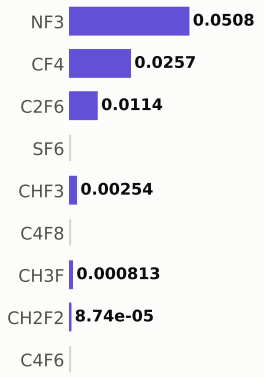

Step #60: CVD

depo_isotropic · CVD

1.31	29.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

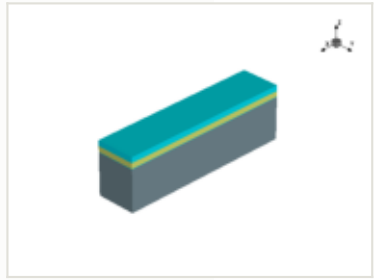

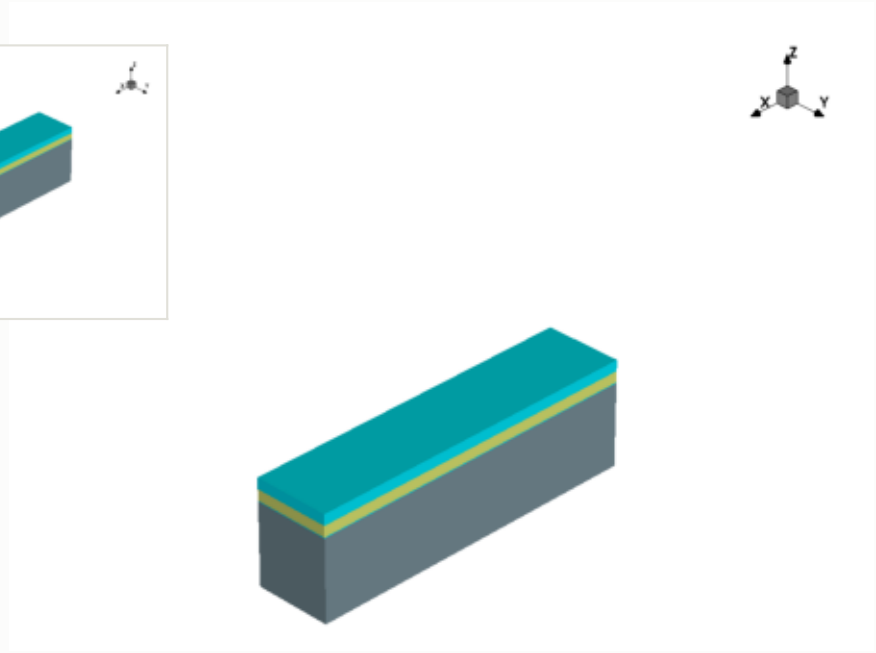

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

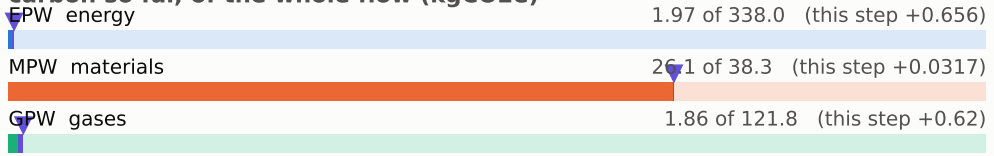

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

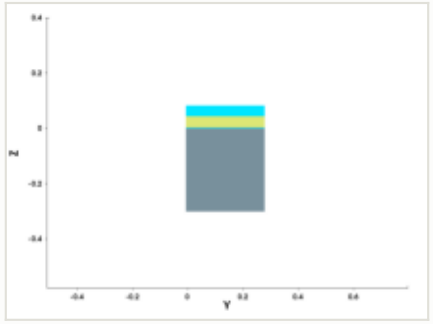

y cut at 0.211 µm

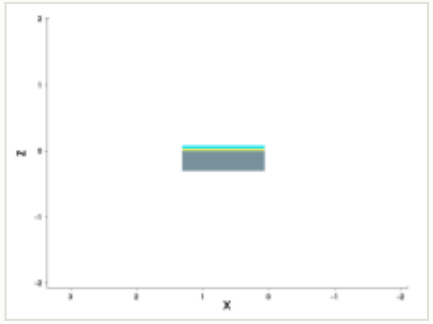

mask for this step

no mask for this step

steps by process area

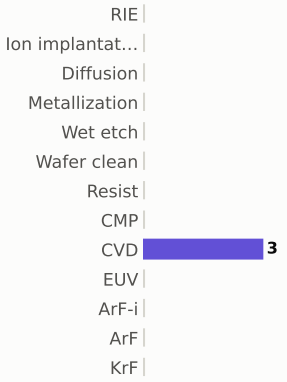

materials deposited (g)

gases emitted (g)



Step #70: CVD

depo_isotropic · CVD

1.31	31.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

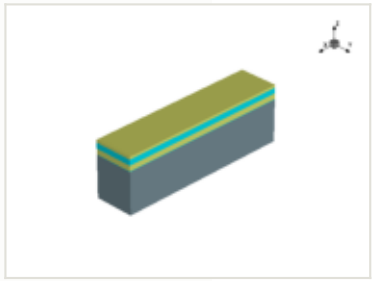

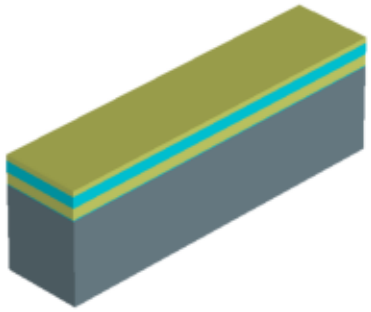

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

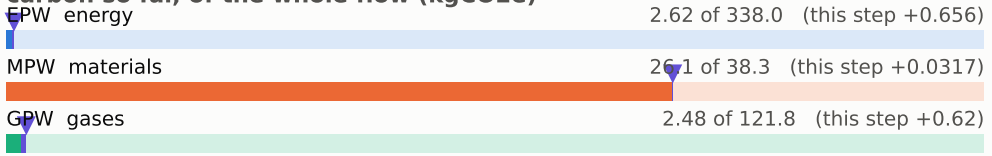

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

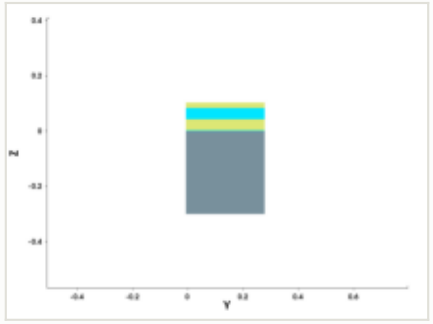

y cut at 0.211 µm

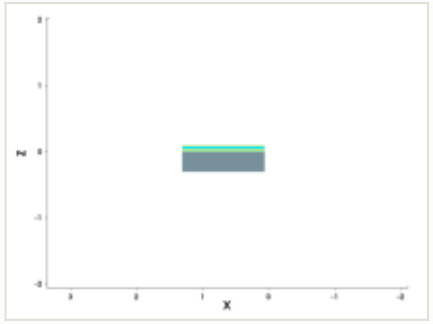

mask for this step

no mask for this step

steps by process area

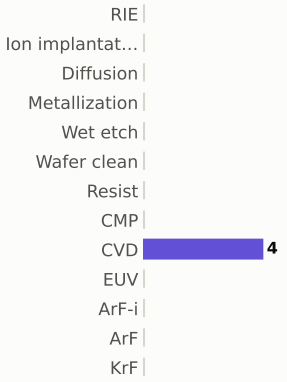

materials deposited (g)

gases emitted (g)

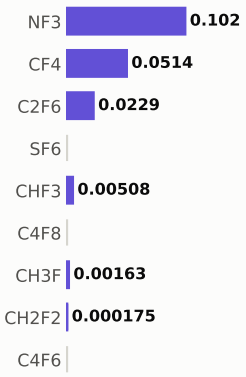

Step #80: CVD

depo_isotropic · CVD

1.31	32.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

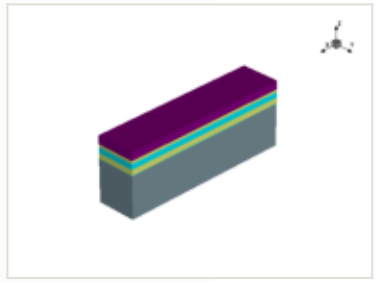

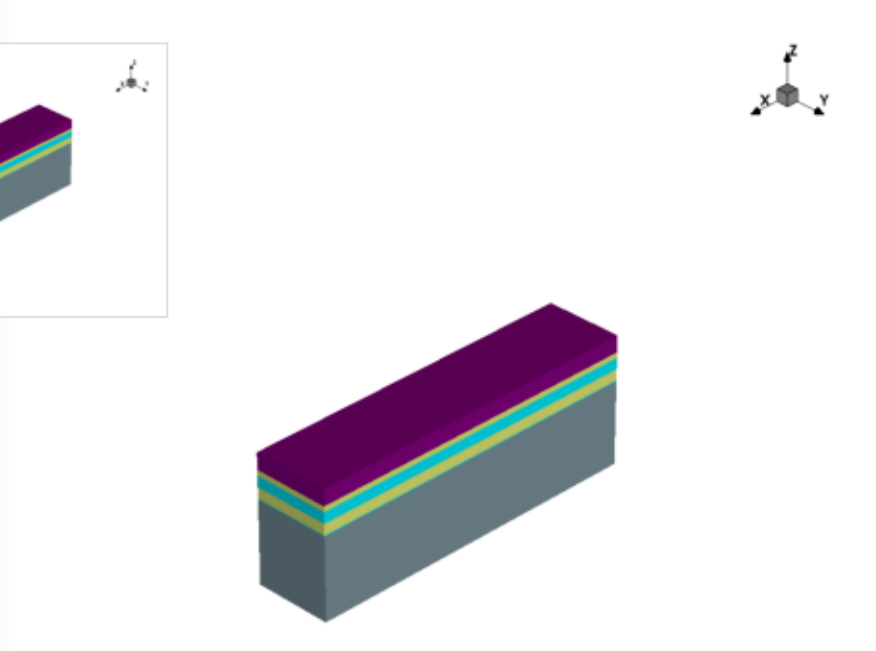

this step

process area	CVD
material	—
thickness	0.06 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

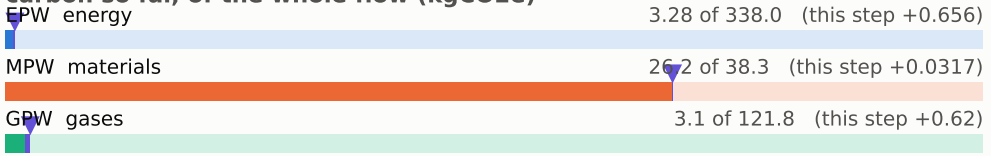

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

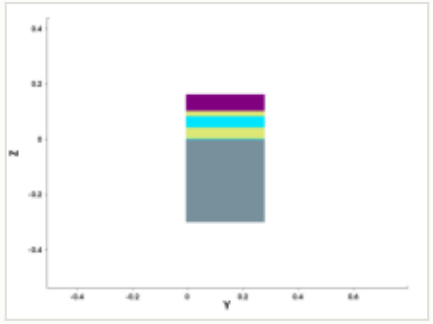

y cut at 0.211 µm

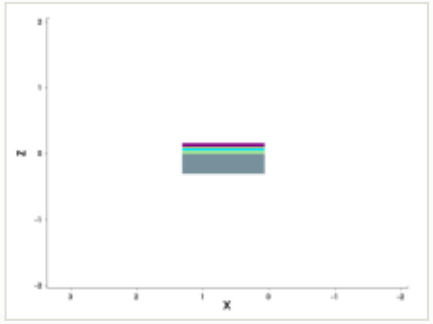

mask for this step

no mask for this step

steps by process area

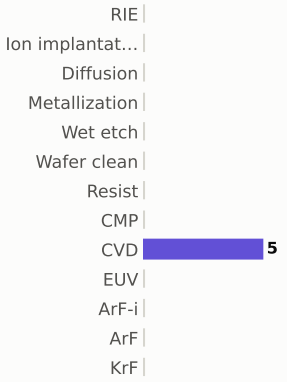

materials deposited (g)

gases emitted (g)

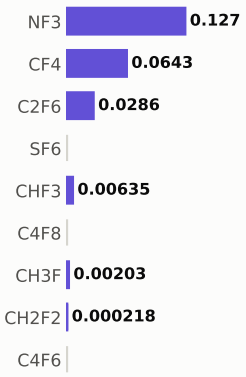

Step #90: CVD

depo_fill · CVD

1.31	33.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

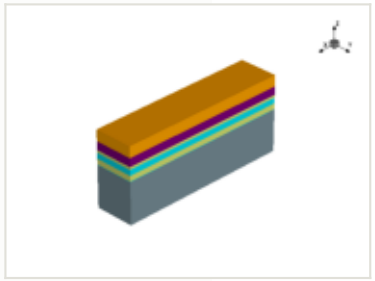

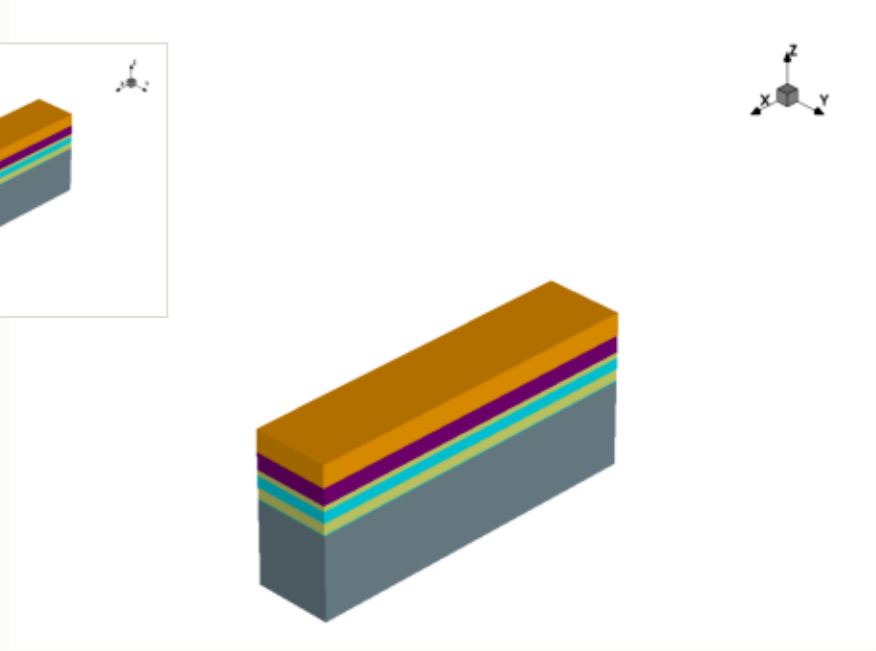

this step

process area	CVD
material	—
thickness	0.08 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

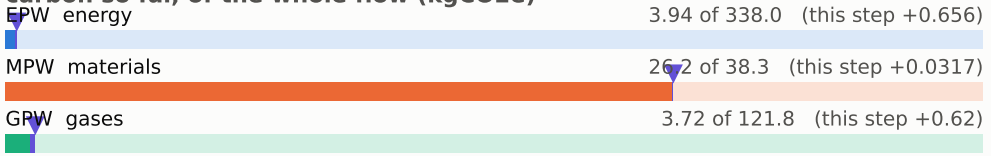

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

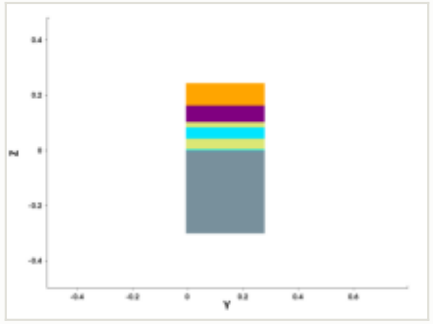

y cut at 0.211 µm

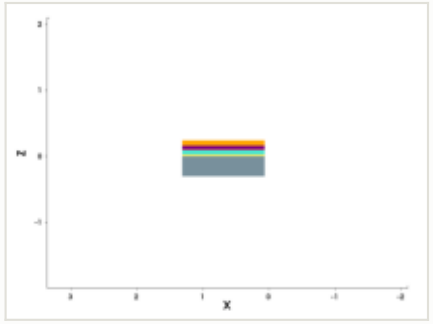

mask for this step

no mask for this step

steps by process area

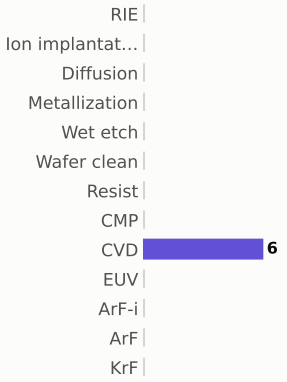

materials deposited (g)

gases emitted (g)

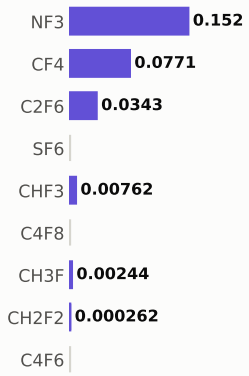

Step #100: CVD

depo_isotropic · CVD

1.31	35.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

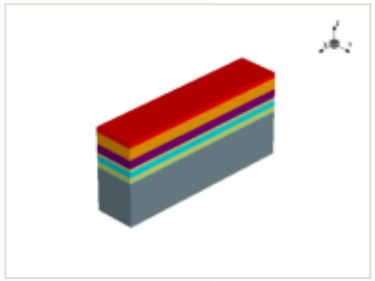

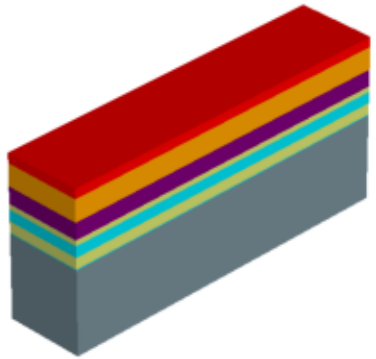

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

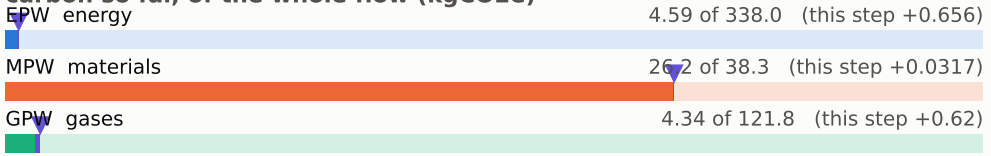

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

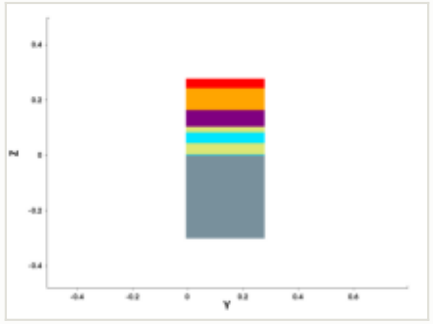

y cut at 0.211 µm

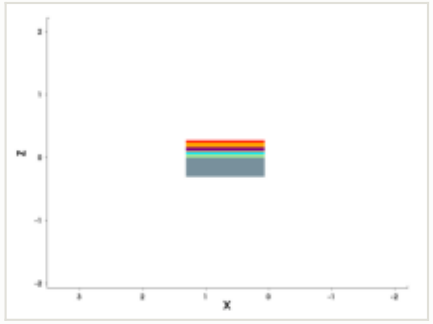

mask for this step

no mask for this step

steps by process area

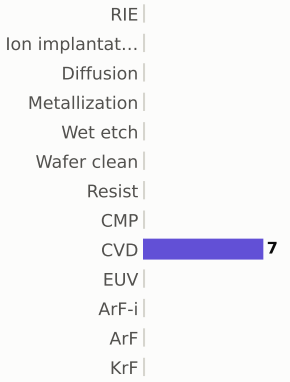

materials deposited (g)

gases emitted (g)



Step #110: ArF-i

litho_patterning · ArF-i

0.217	35.4	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

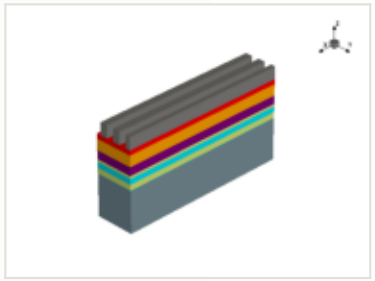

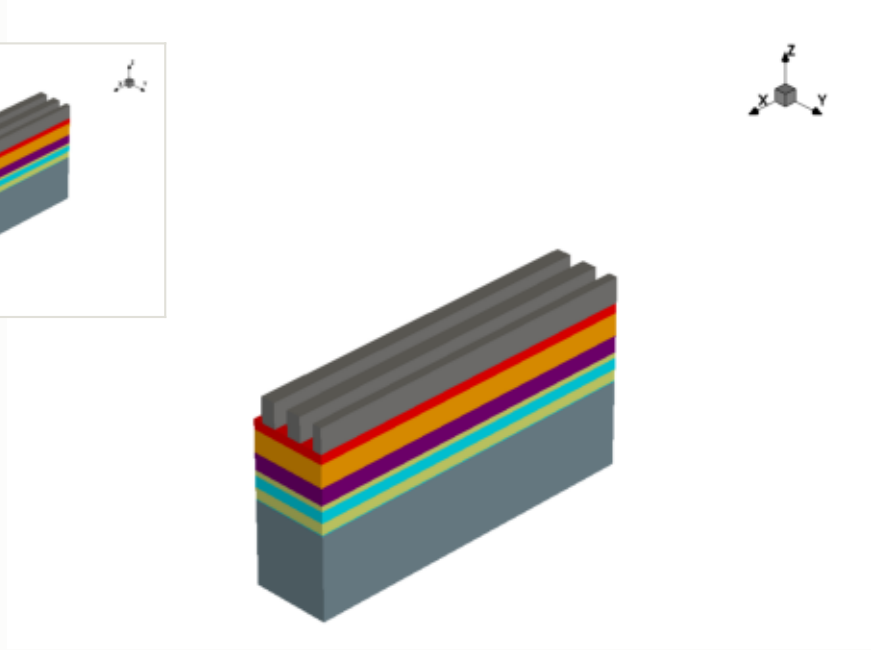

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

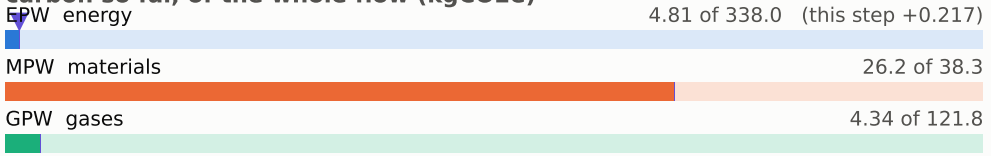

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

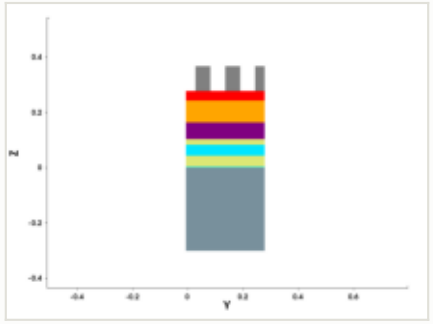

y cut at 0.211 µm

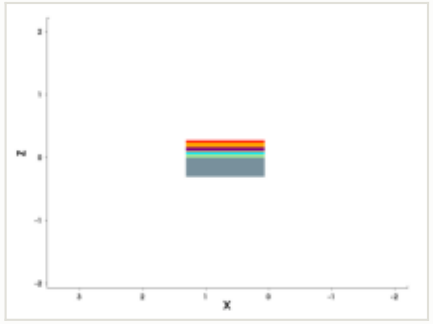

mask: layer 501:0, positive (GDSII)



steps by process area

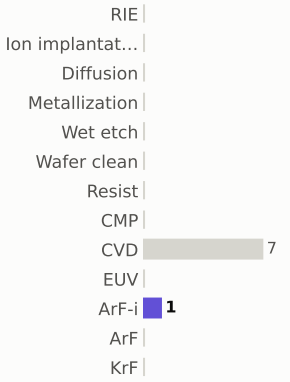

materials deposited (g)

gases emitted (g)

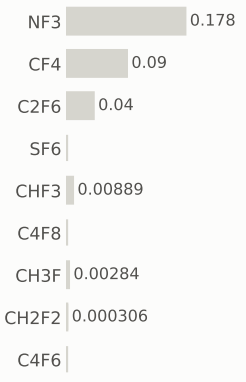

Step #120: Wet_etch

etch_isotropic · Wet_etch

0.169	35.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

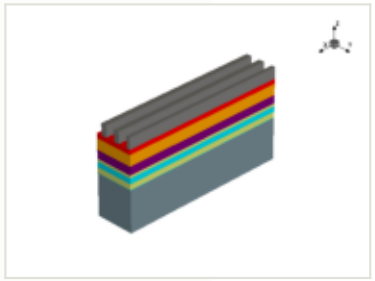

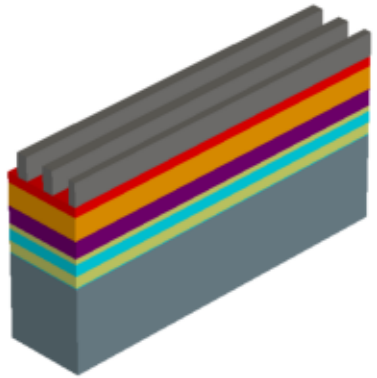

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

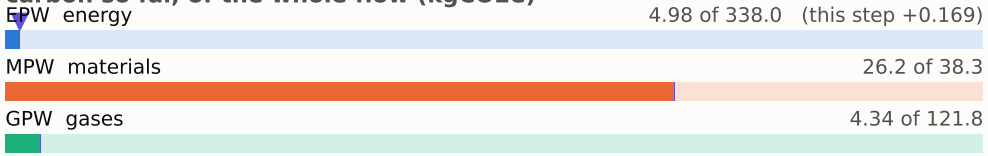

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

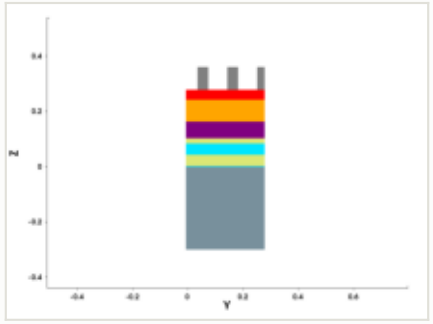

y cut at 0.211 µm

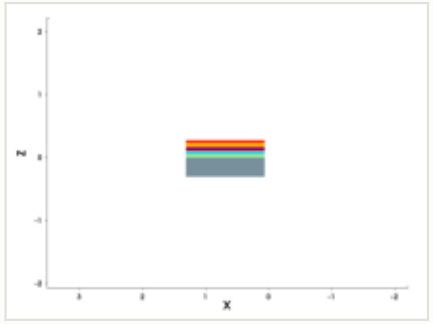

mask for this step

no mask for this step

steps by process area

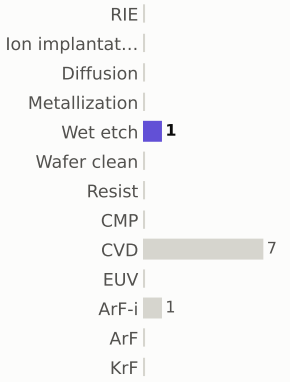

materials deposited (g)

gases emitted (g)

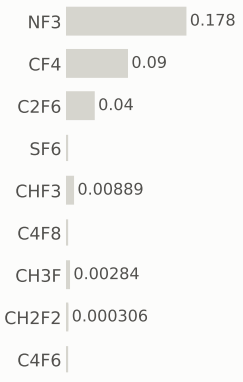

Step #130: RIE

etch_anisotropic · RIE

1.04	36.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

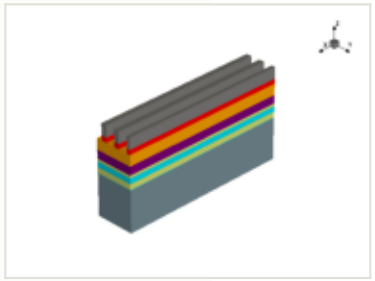

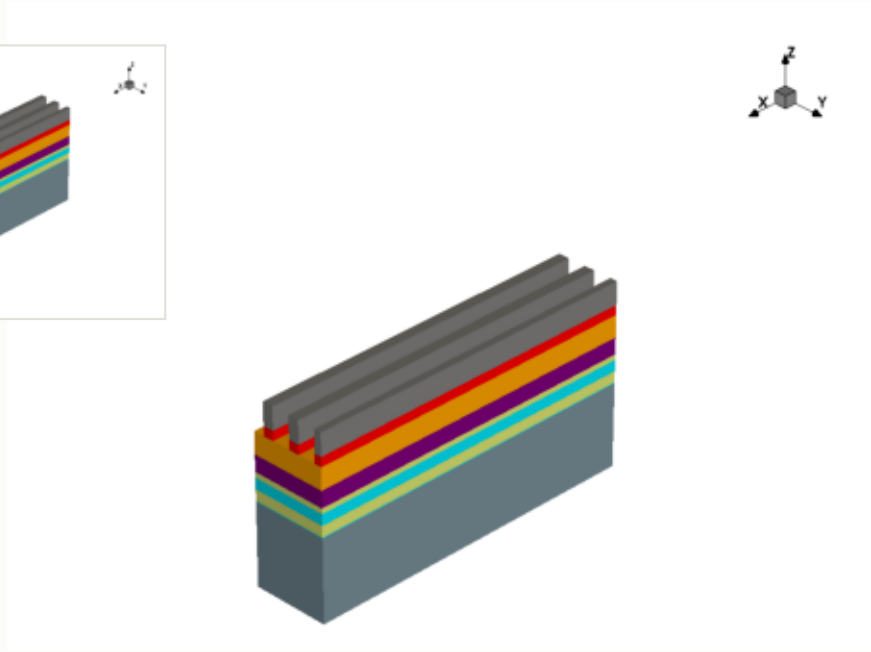

x cut at 0.677 µm

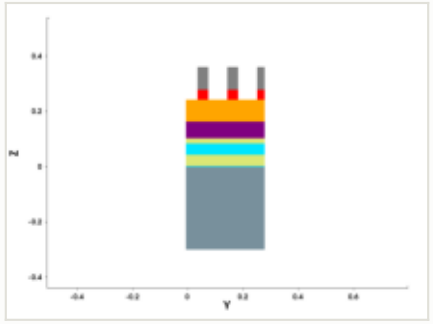

y cut at 0.211 µm

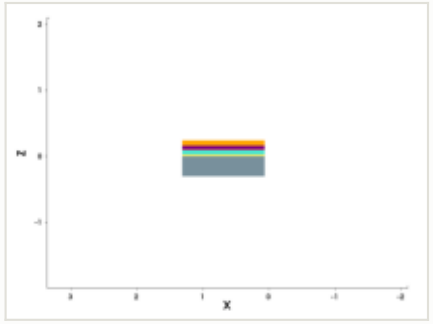

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

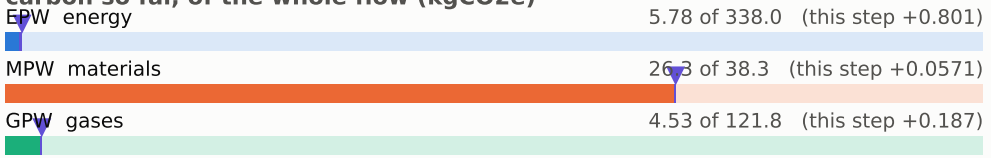

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

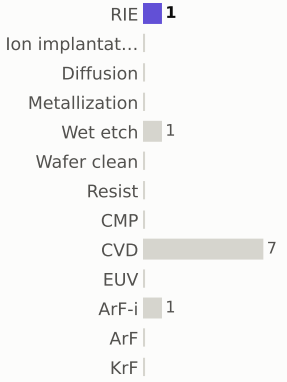

materials deposited (g)

gases emitted (g)

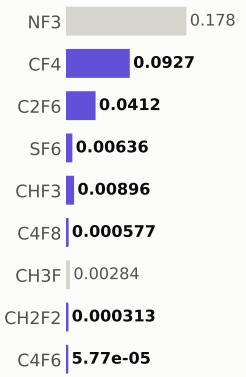

Step #140: RIE

etch_anisotropic · RIE

1.04	37.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

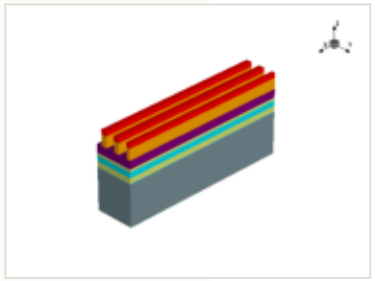

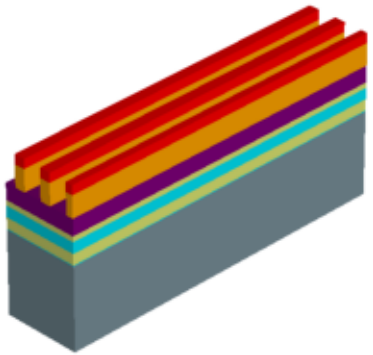

x cut at 0.677 µm

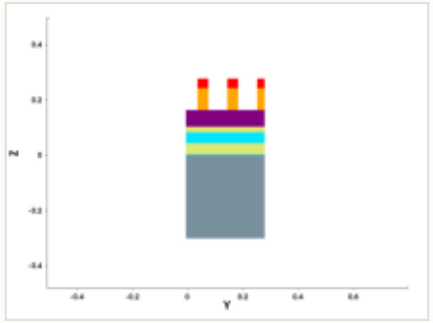

y cut at 0.211 µm

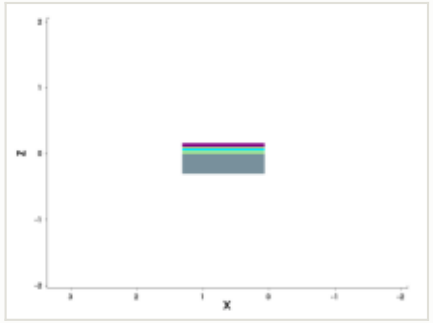

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

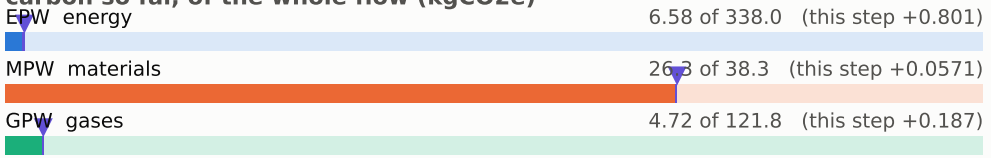

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

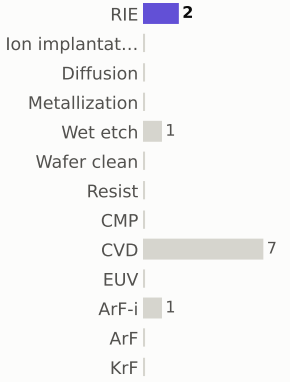

materials deposited (g)

gases emitted (g)

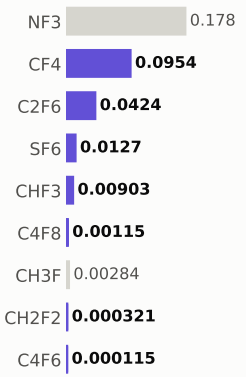

Step #150: CVD

depo_ellipsoidal · CVD

1.31	38.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

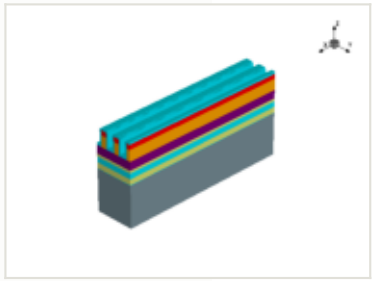

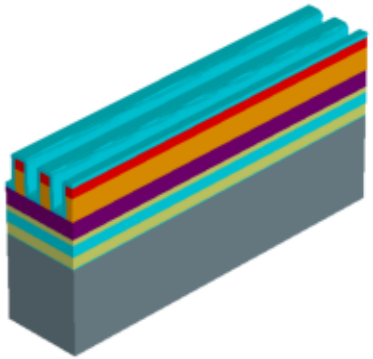

this step

process area	CVD
material	—
thickness	0.015 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

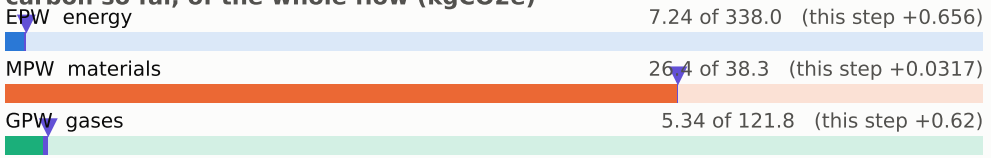

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

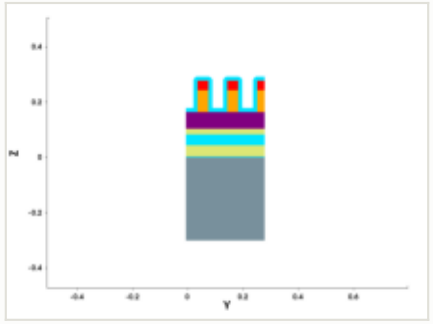

y cut at 0.211 µm

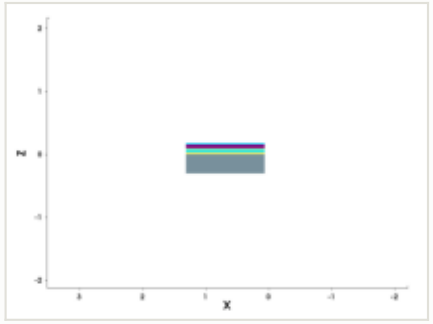

mask for this step

no mask for this step

steps by process area

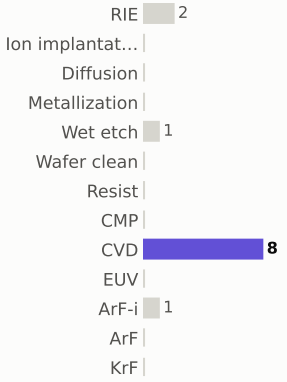

materials deposited (g)

gases emitted (g)

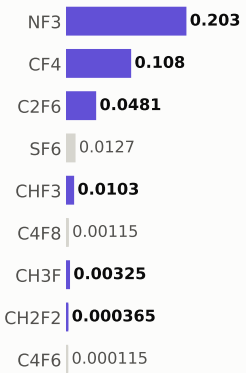

Step #160: RIE

etch_ellipsoidal · RIE

1.04	40	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

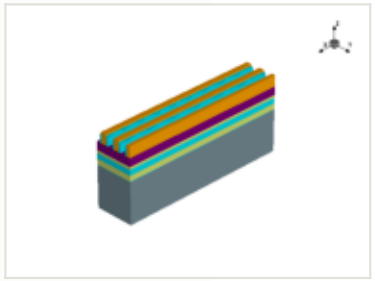

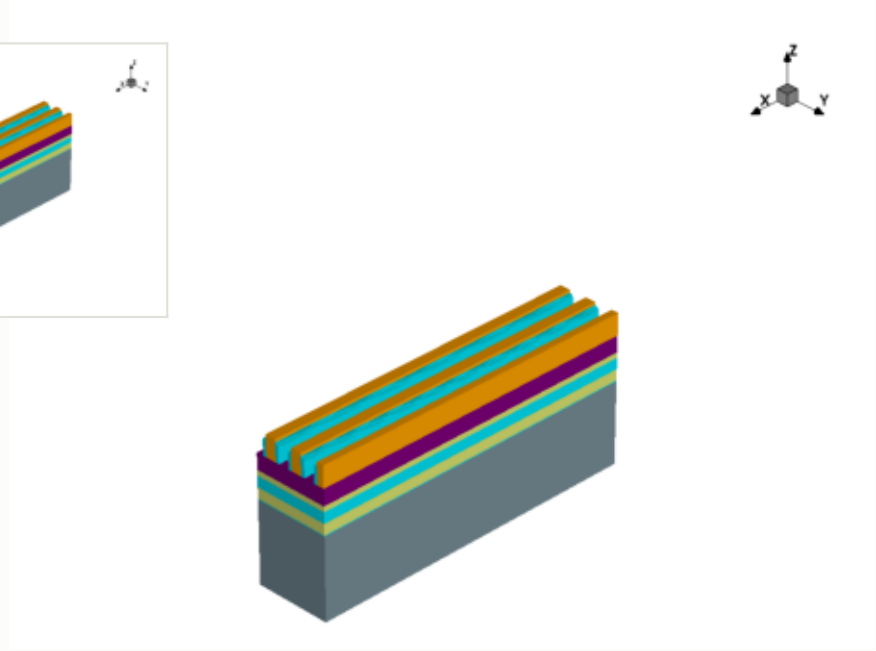

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

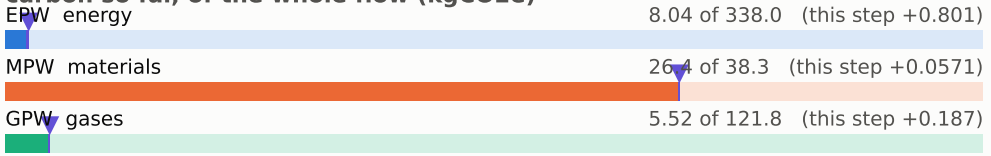

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

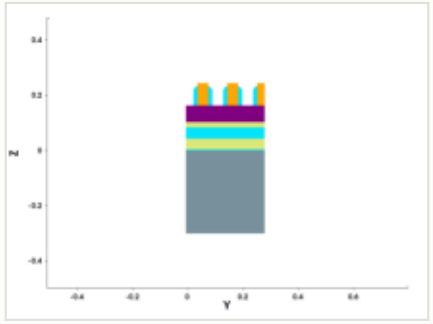

y cut at 0.211 µm

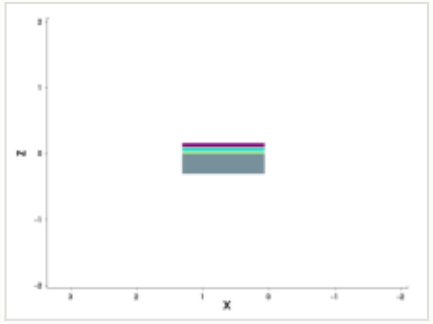

mask for this step

no mask for this step

steps by process area

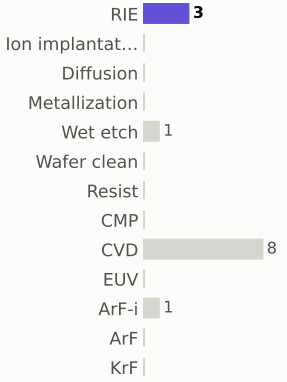

materials deposited (g)

gases emitted (g)

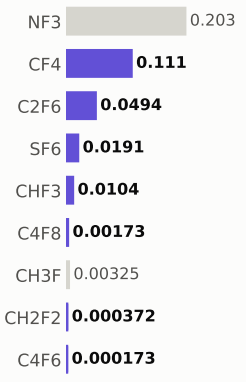

Step #170: Wet_etch

etch_isotropic · Wet_etch

0.169	40.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

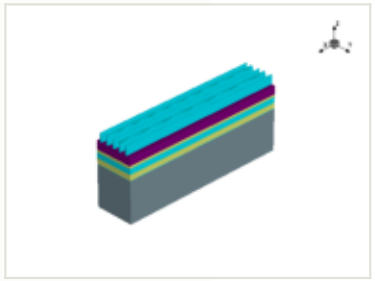

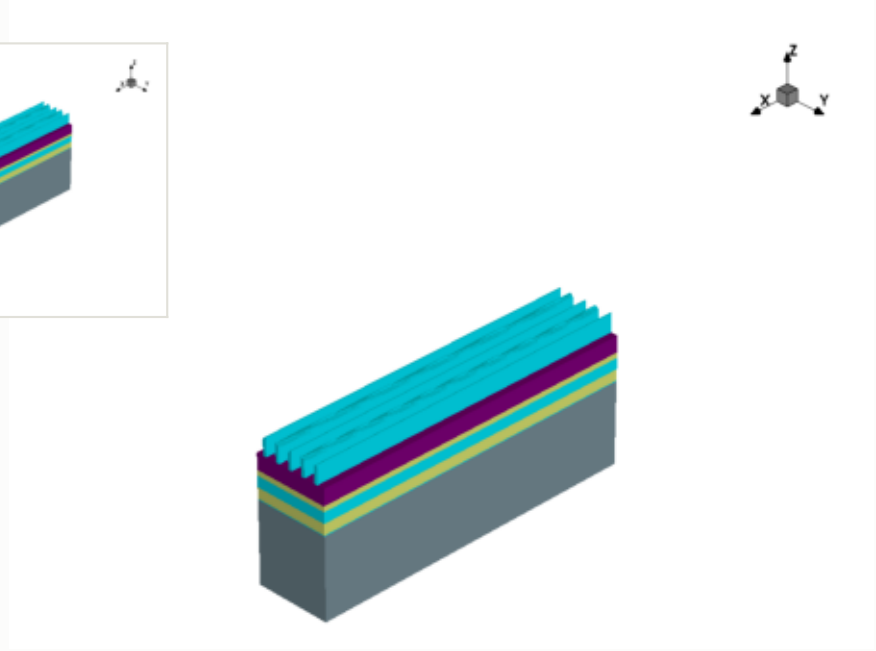

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

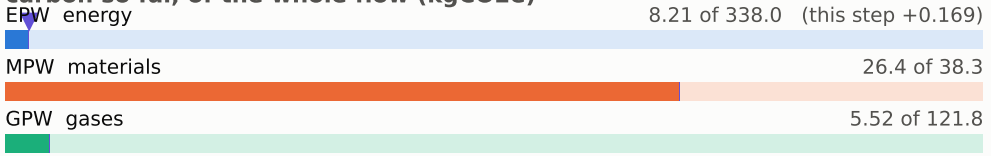

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

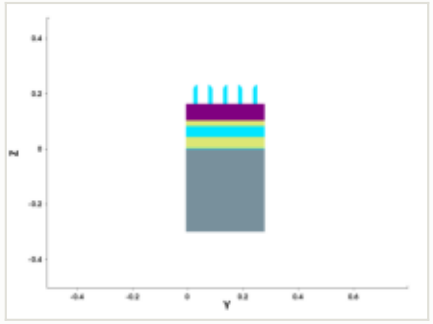

y cut at 0.211 µm

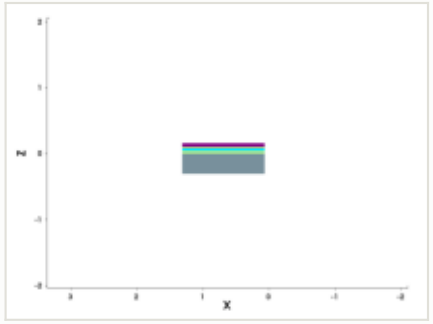

mask for this step

no mask for this step

steps by process area

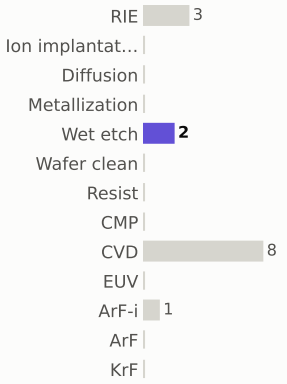

materials deposited (g)

gases emitted (g)

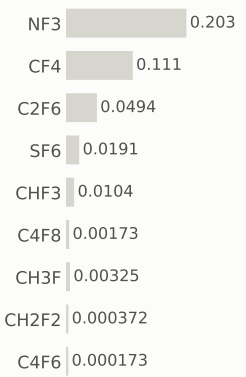

Step #180: CVD

depo_fill · CVD

1.31	41.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

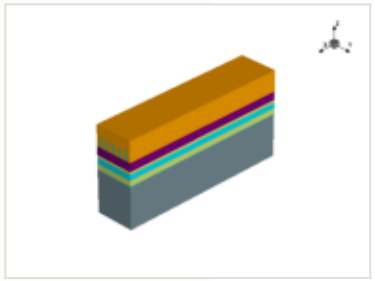

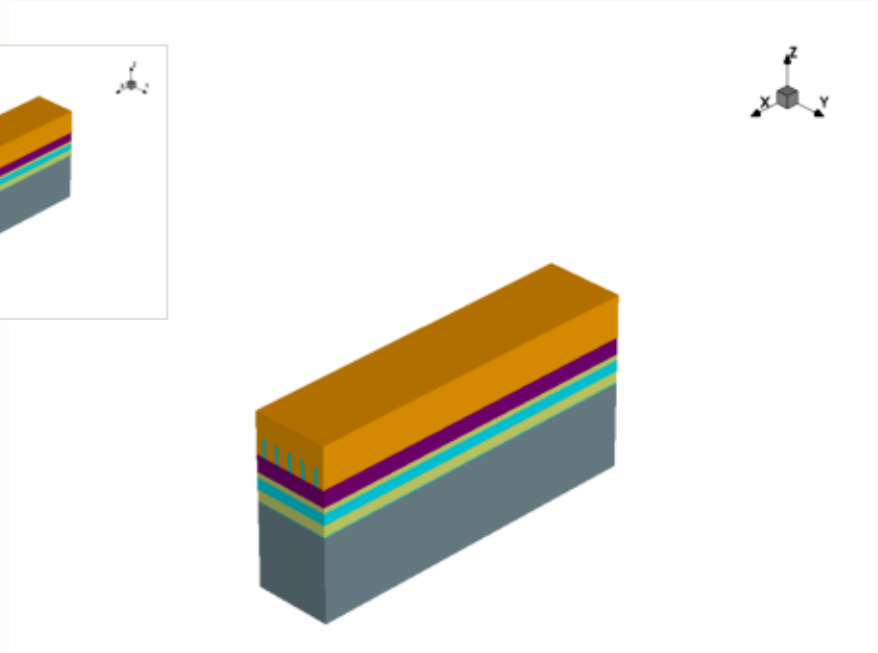

this step

process area	CVD
material	—
thickness	0.08 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

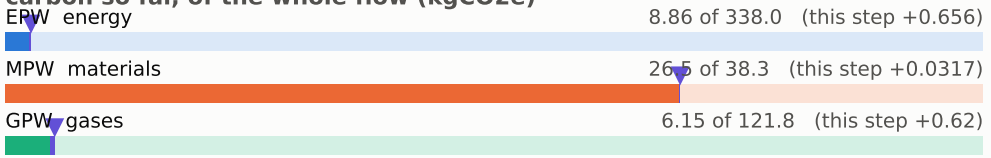

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

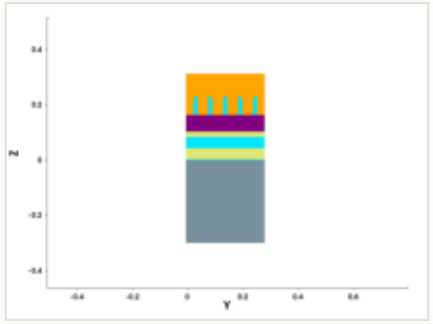

y cut at 0.211 µm

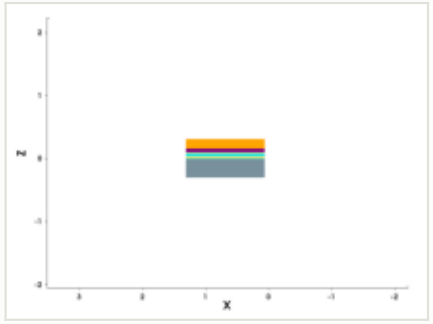

mask for this step

no mask for this step

steps by process area

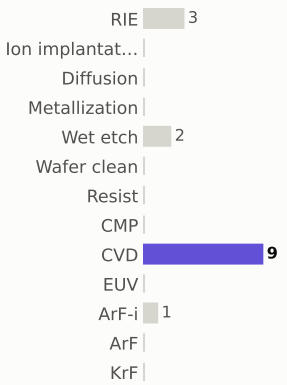

materials deposited (g)

gases emitted (g)

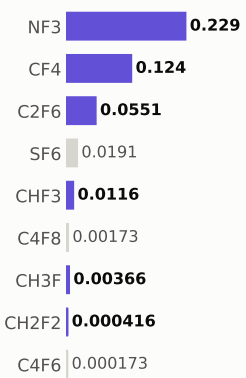

Step #190: CVD

depo_isotropic · CVD

1.31	42.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

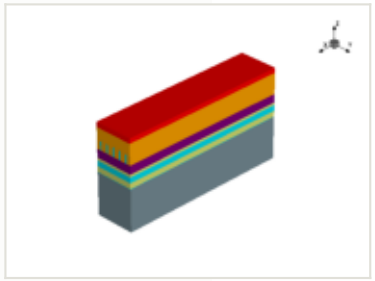

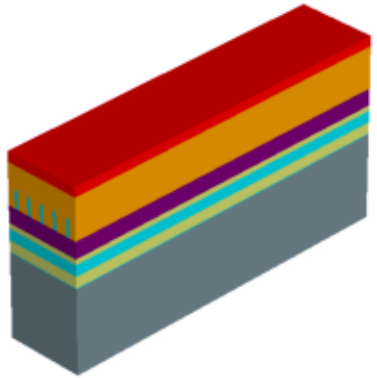

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

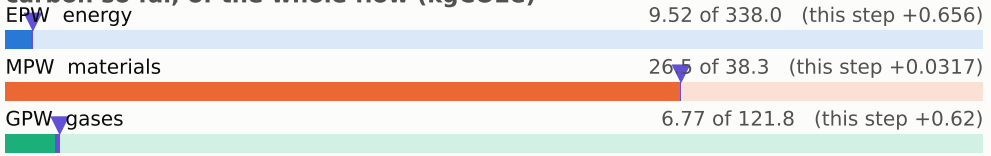

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

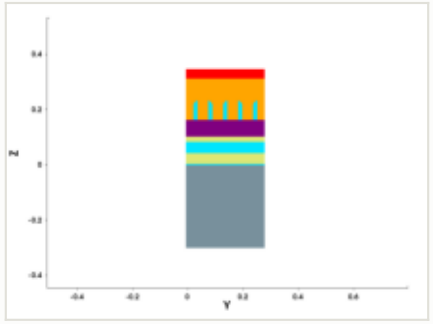

y cut at 0.211 µm

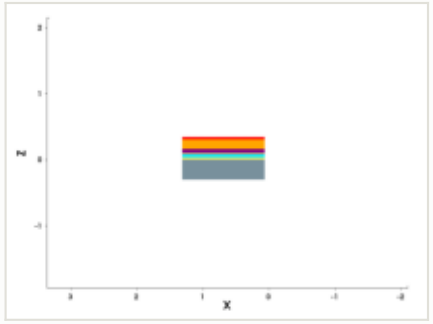

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

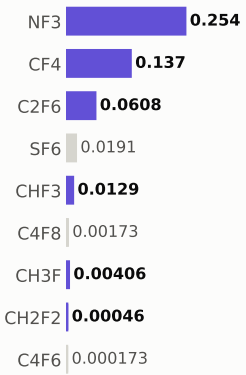

Step #200: ArF-i

litho_patterning · ArF-i

0.217	43	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

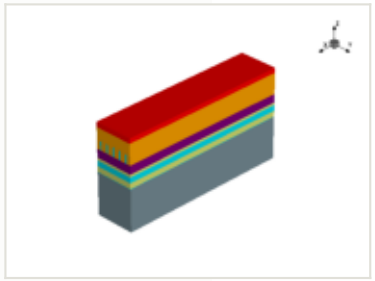

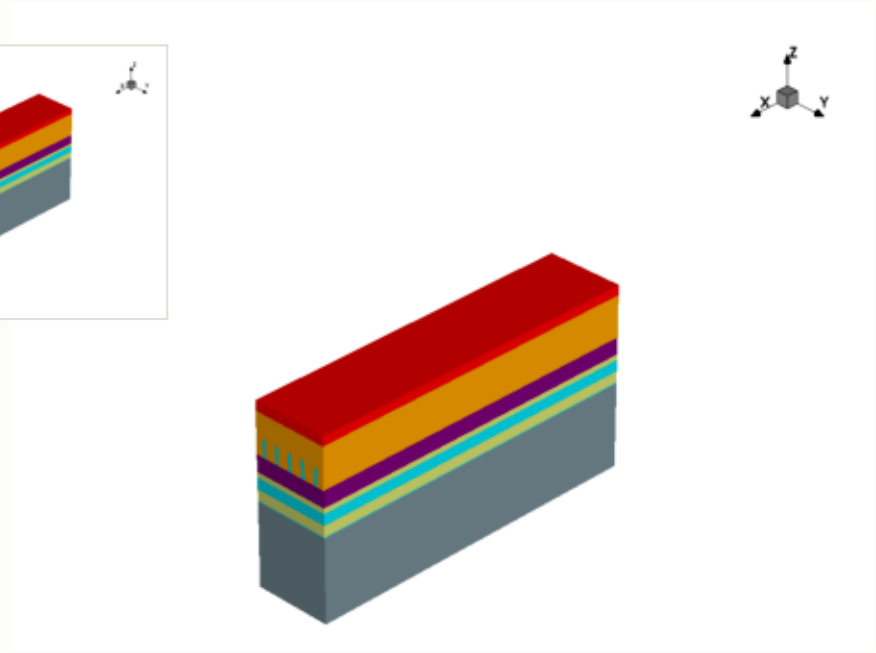

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

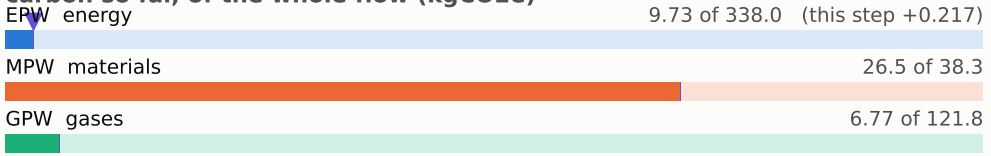

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

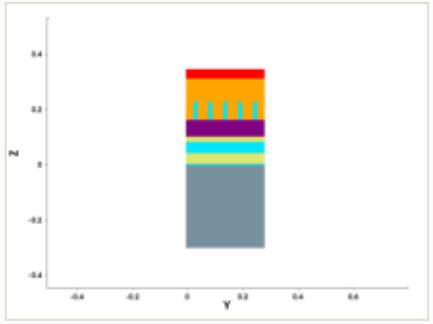

y cut at 0.211 µm

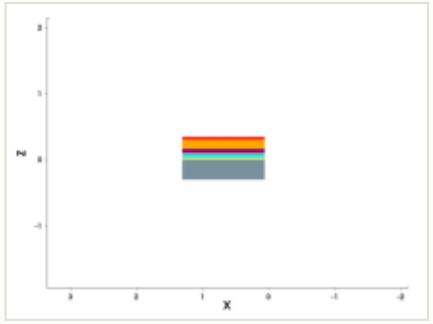

mask for this step

no mask for this step

steps by process area

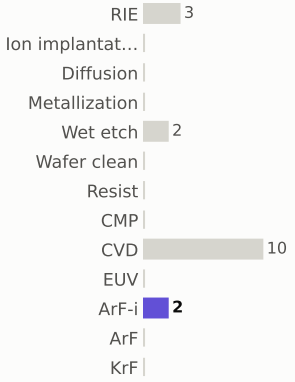

materials deposited (g)

gases emitted (g)

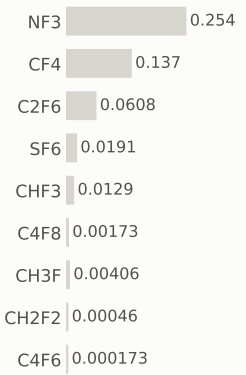

Step #210: Wet_etch

etch_isotropic · Wet_etch

0.169	43.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

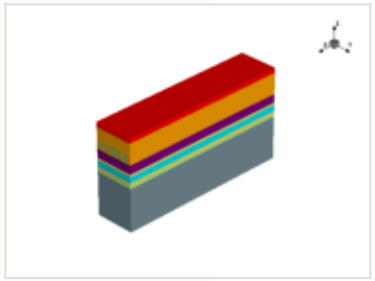

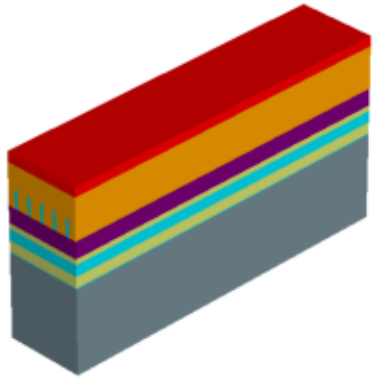

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

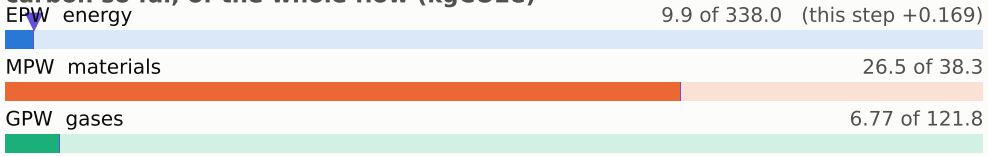

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

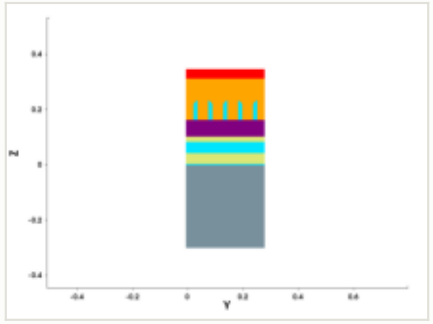

y cut at 0.211 µm

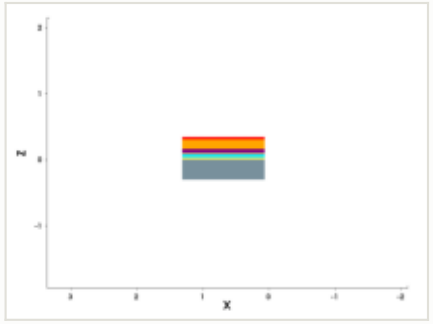

mask for this step

no mask for this step

steps by process area

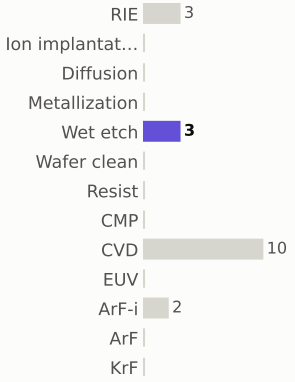

materials deposited (g)

gases emitted (g)

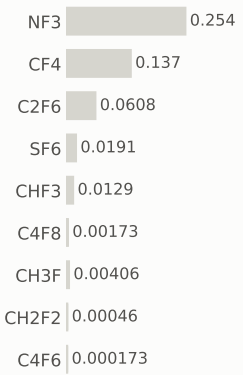

Step #220: RIE

etch_anisotropic · RIE

1.04	44.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

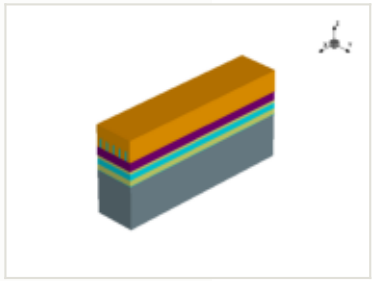

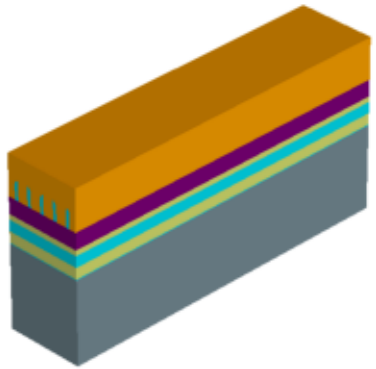

x cut at 0.677 µm

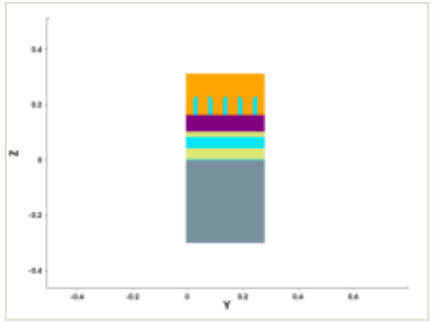

y cut at 0.211 µm

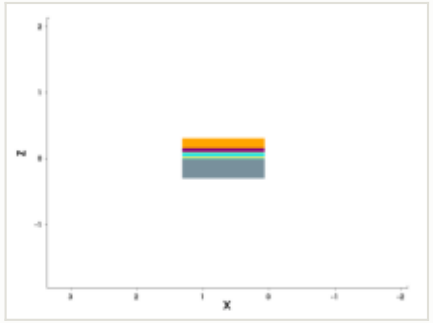

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

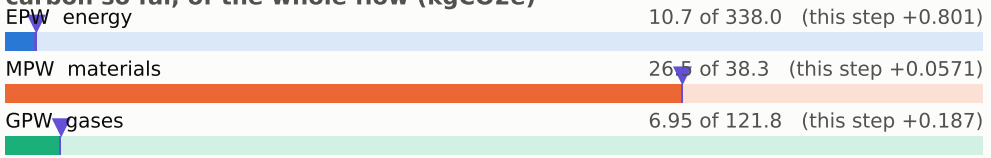

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

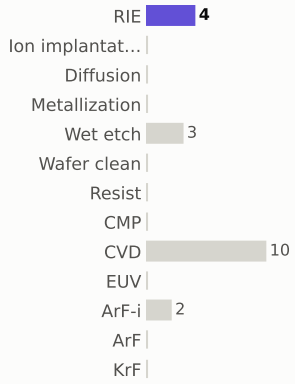

materials deposited (g)

gases emitted (g)

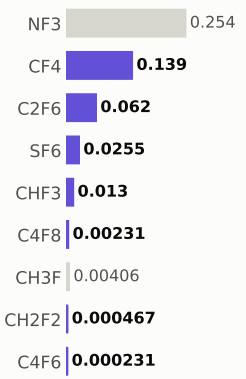

Step #230: RIE

etch_anisotropic · RIE

1.04	45.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

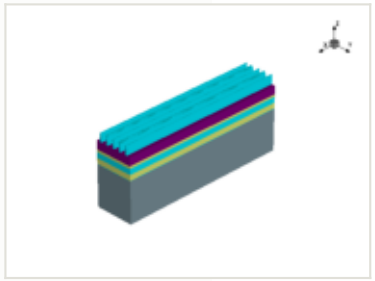

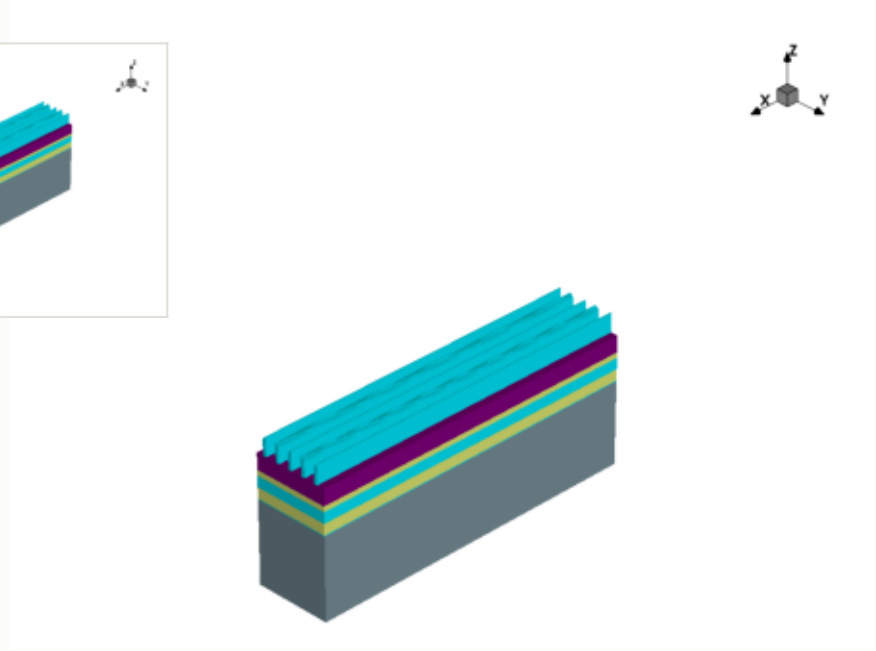

x cut at 0.677 µm

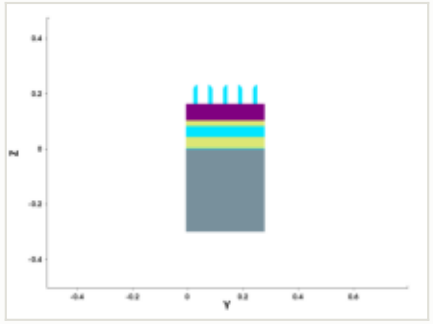

y cut at 0.211 µm

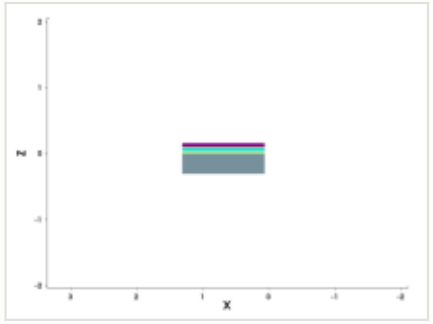

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

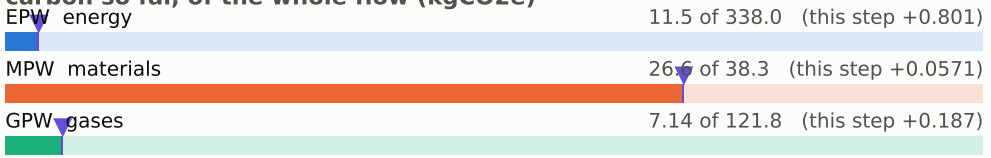

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

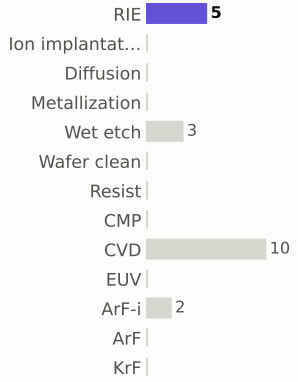

materials deposited (g)

gases emitted (g)

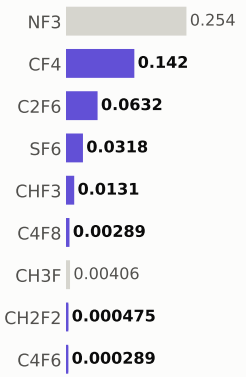

Step #240: RIE

etch_anisotropic · RIE

1.04	46.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

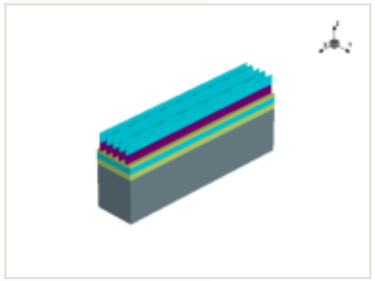

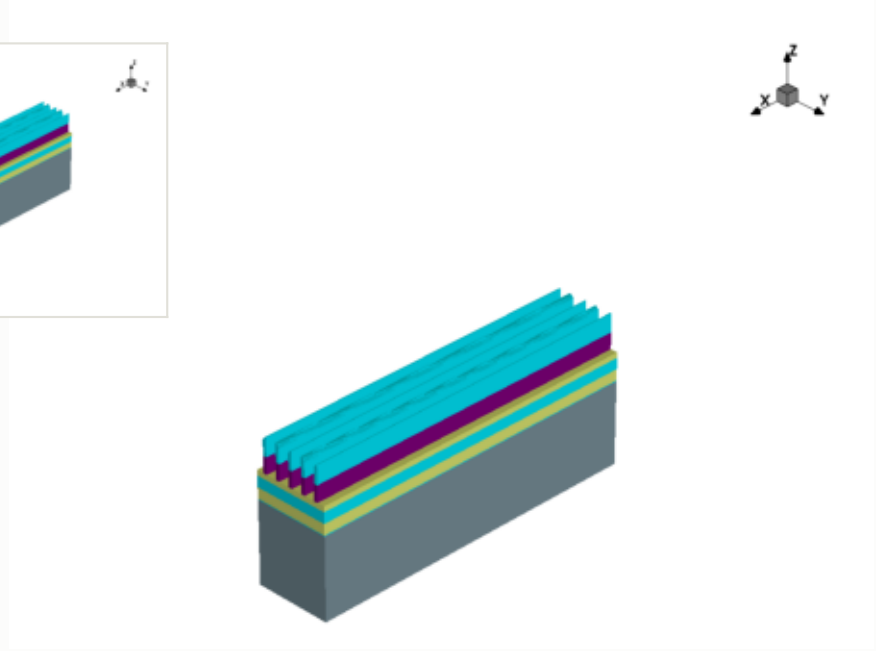

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

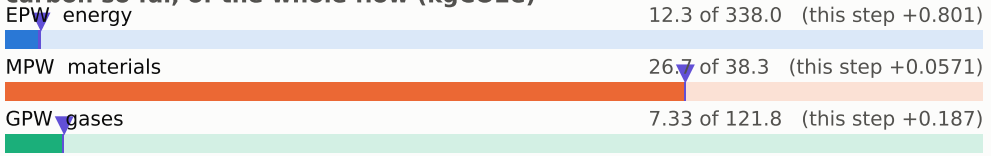

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

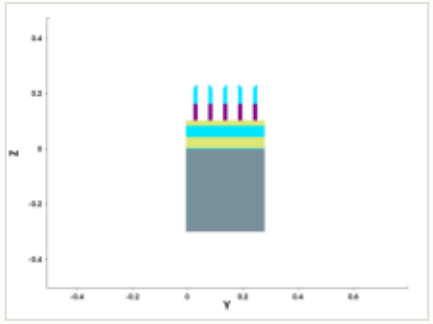

y cut at 0.211 µm

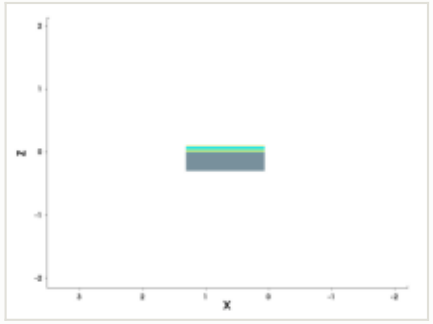

mask for this step

no mask for this step

steps by process area

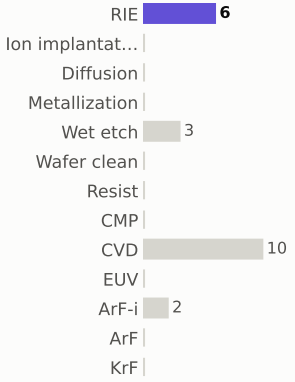

materials deposited (g)

gases emitted (g)

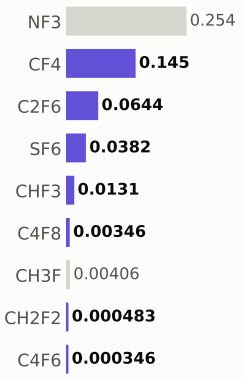

Step #250: RIE

etch_anisotropic · RIE

1.04	47.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

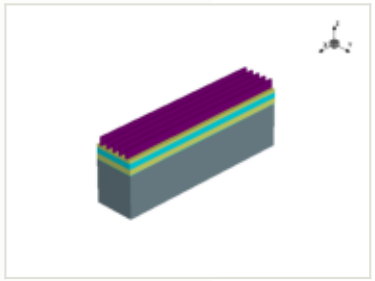

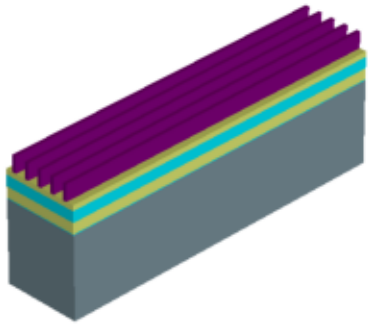

x cut at 0.677 µm

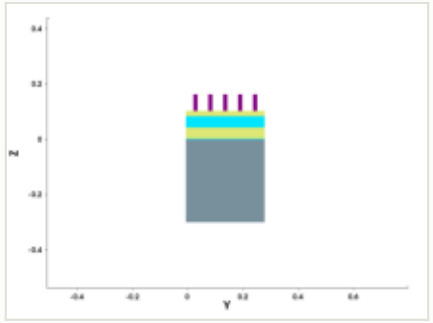

y cut at 0.211 µm

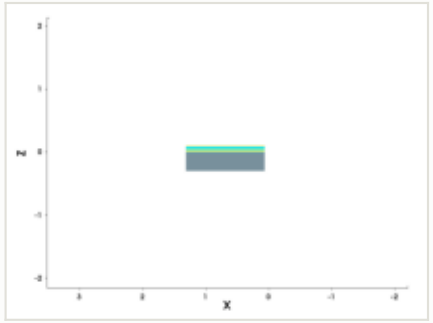

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

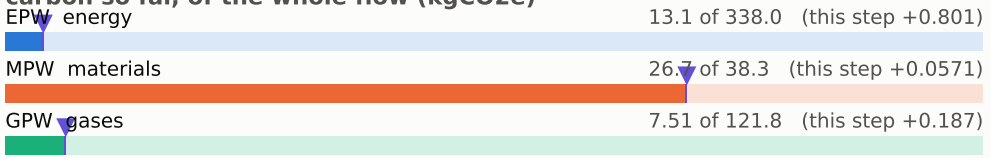

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

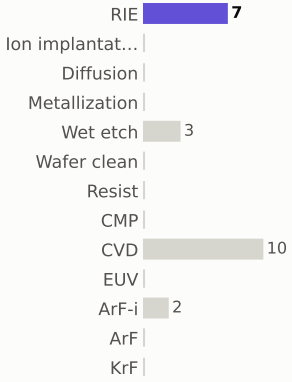

materials deposited (g)

gases emitted (g)

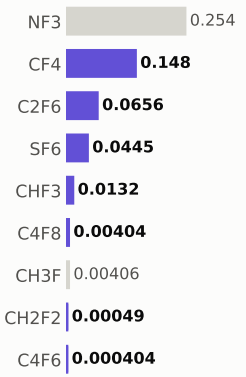

Step #260: Resist

etch_strip · Resist

0.169	47.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

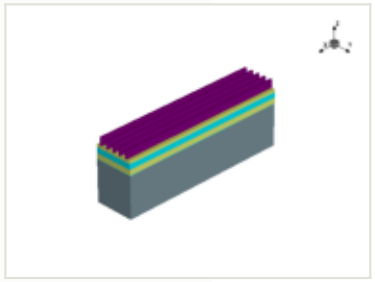

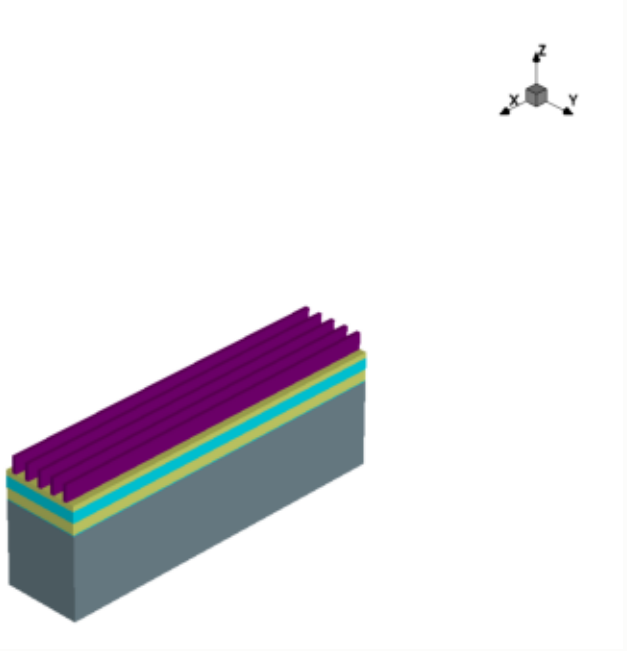

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

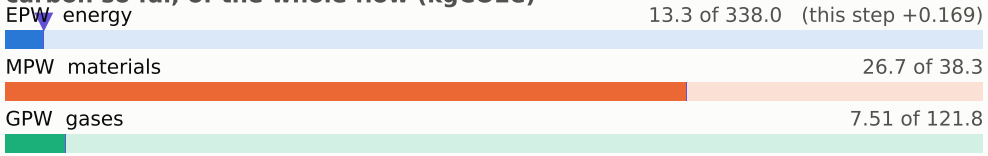

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

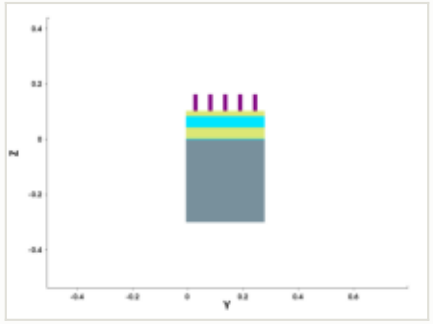

y cut at 0.211 µm

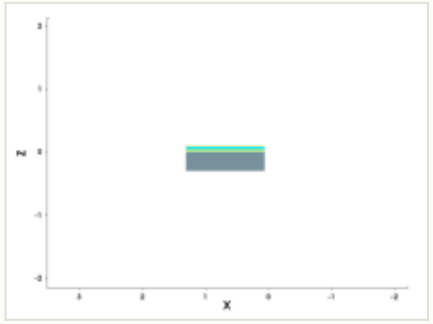

mask for this step

no mask for this step

steps by process area

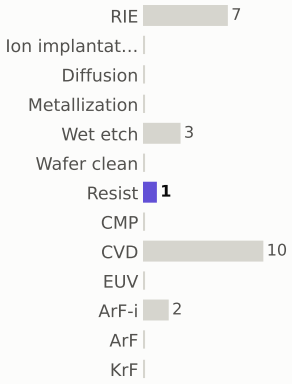

materials deposited (g)

gases emitted (g)

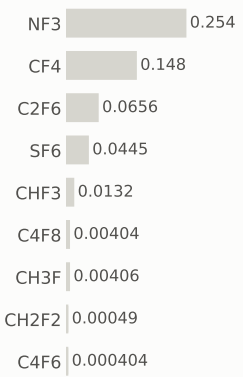

Step #270: CVD

depo_isotropic · CVD

1.31	48.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

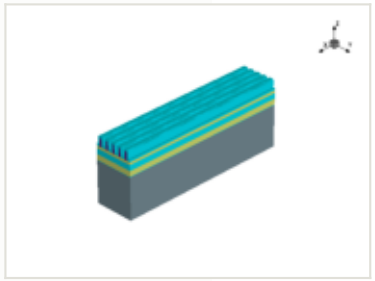

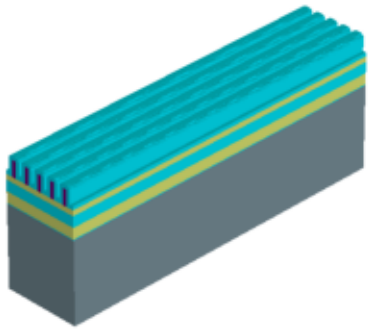

this step

process area	CVD
material	—
thickness	0.014 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

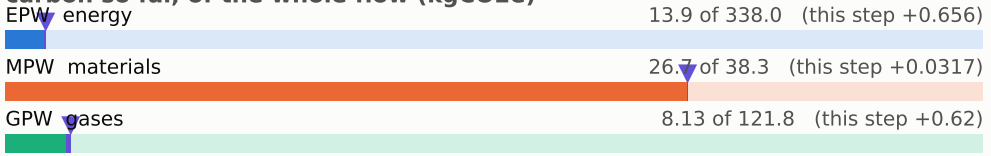

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

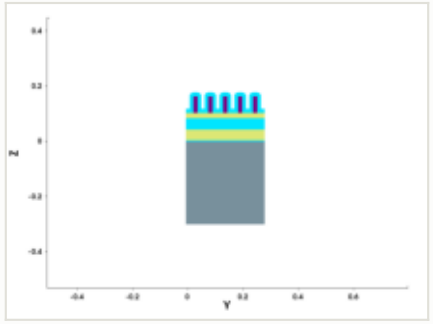

y cut at 0.211 µm

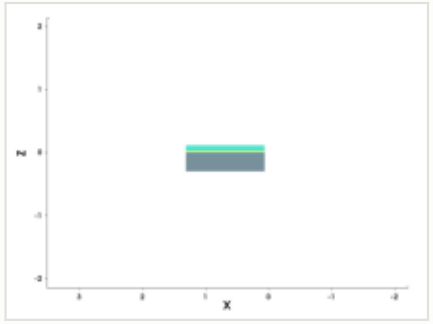

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

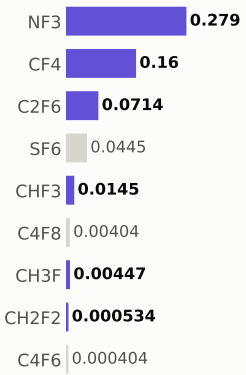

Step #280: RIE

etch_anisotropic · RIE

1.04	49.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

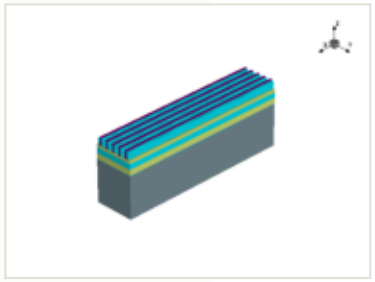

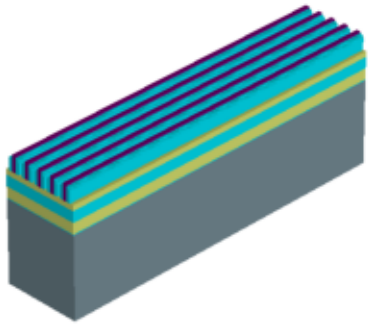

x cut at 0.677 µm

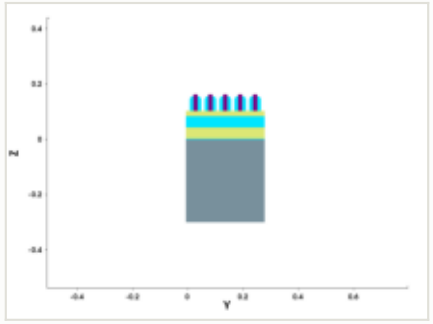

y cut at 0.211 µm

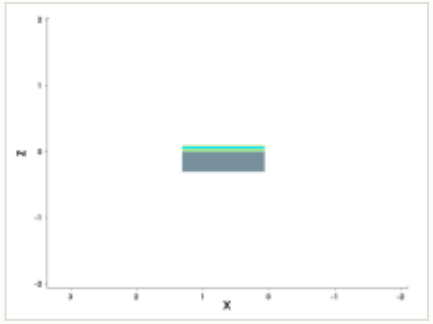

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

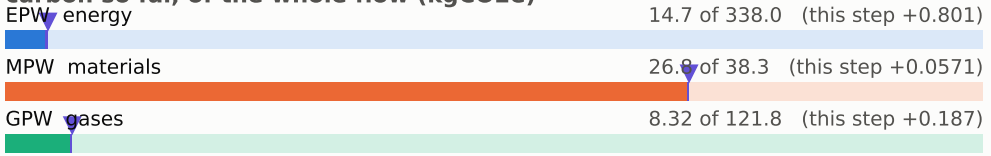

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

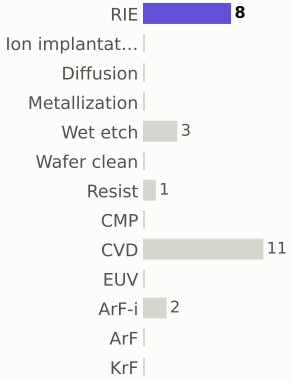

materials deposited (g)

gases emitted (g)

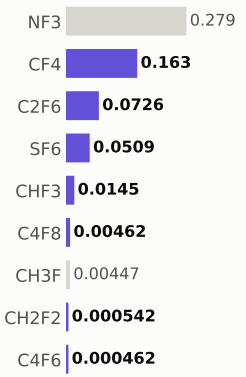

Step #290: Wet_etch

etch_isotropic · Wet_etch

0.169	50	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

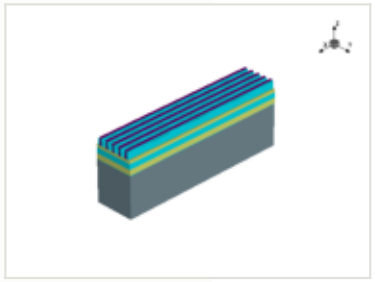

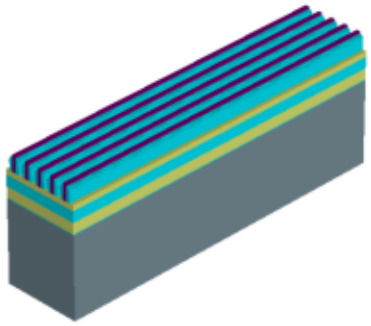

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

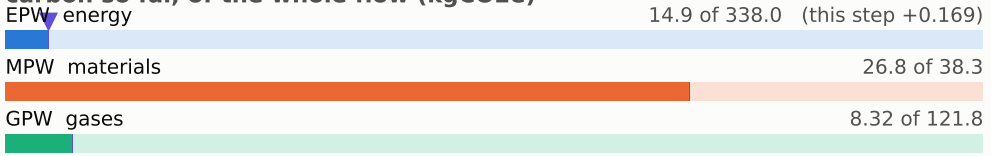

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

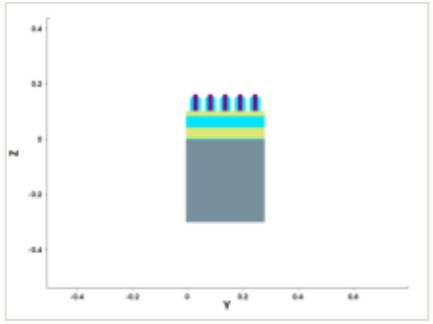

y cut at 0.211 µm

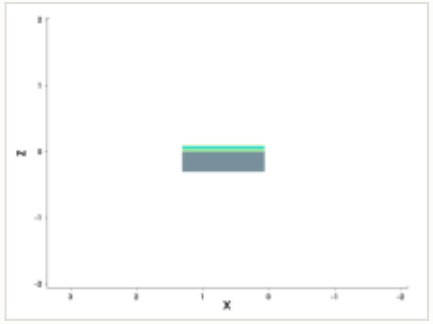

mask for this step

no mask for this step

steps by process area

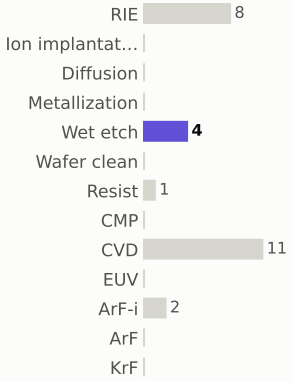

materials deposited (g)



gases emitted (g)

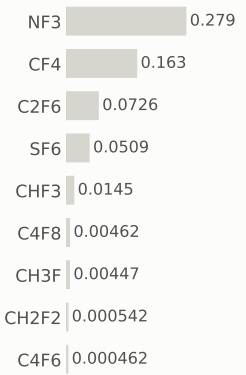

Step #300: Wet_etch

etch_isotropic · Wet_etch

0.169	50.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

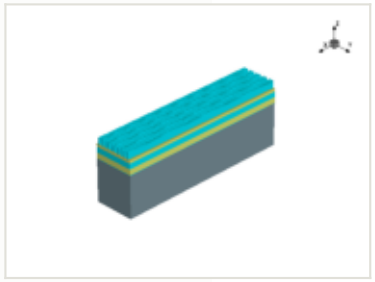

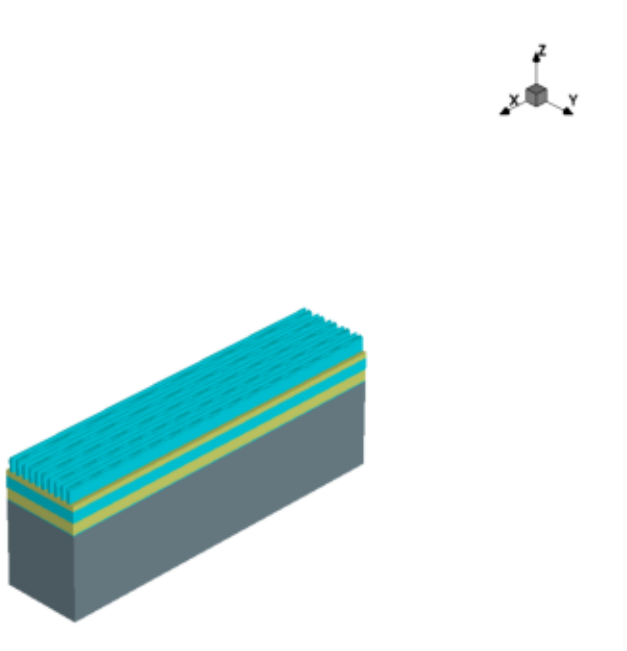

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

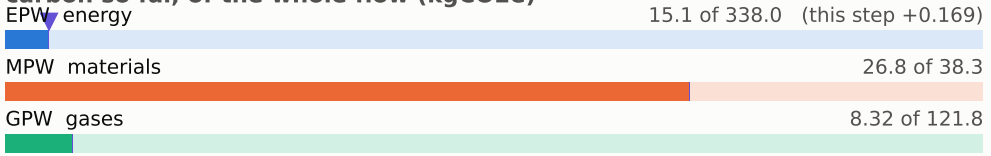

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

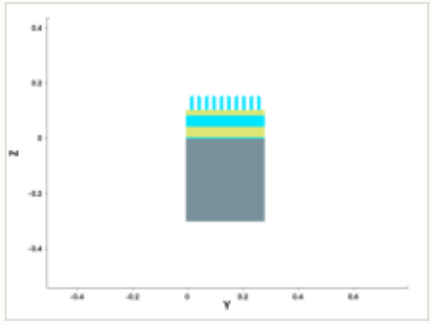

y cut at 0.211 µm

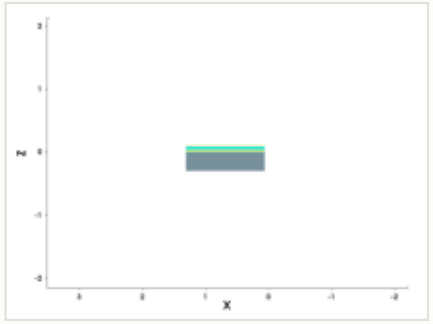

mask for this step

no mask for this step

steps by process area

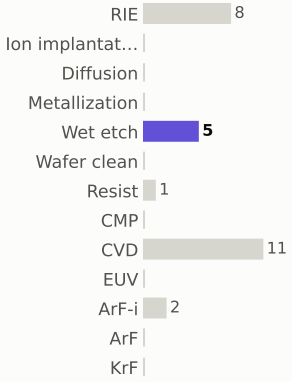

materials deposited (g)



gases emitted (g)

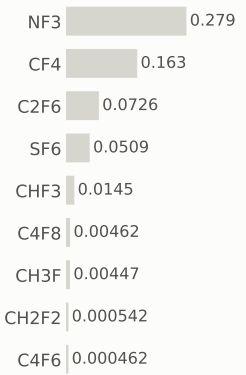

Step #310: RIE

etch_anisotropic · RIE

1.04	51.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

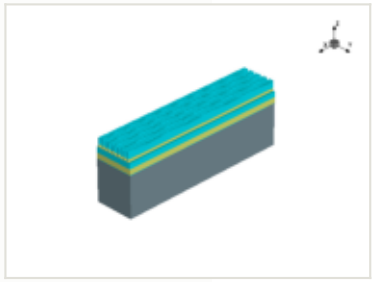

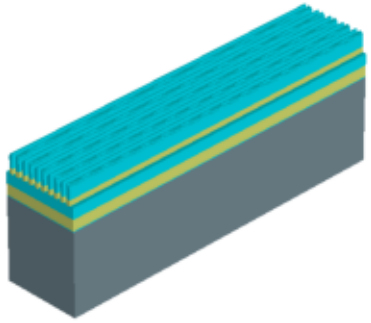

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

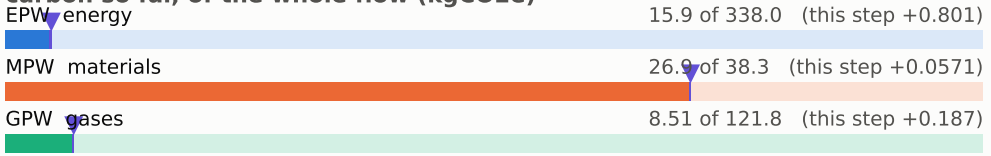

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

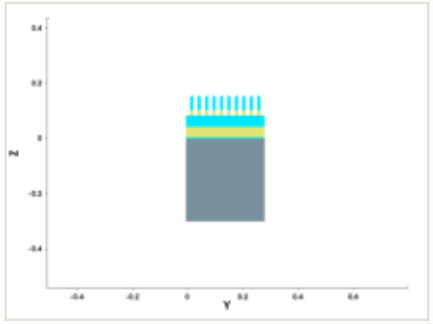

y cut at 0.211 µm

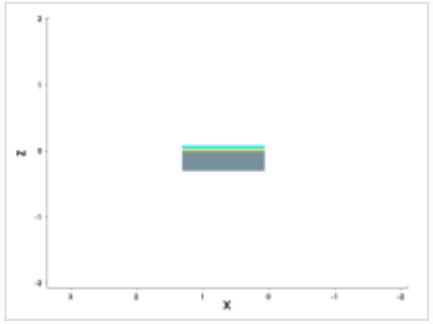

mask for this step

no mask for this step

steps by process area

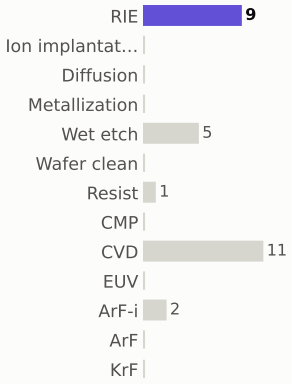

materials deposited (g)

gases emitted (g)

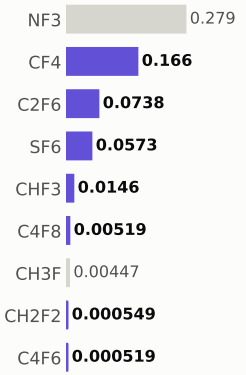

Step #320: RIE

etch_anisotropic · RIE

1.04	52.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

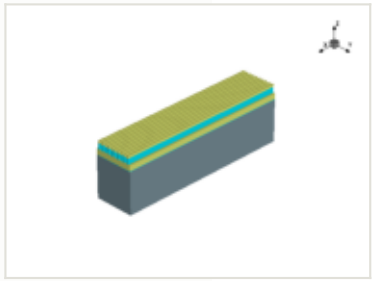

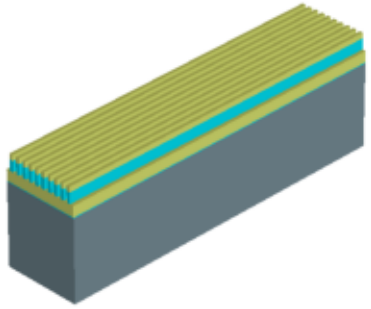

x cut at 0.677 µm

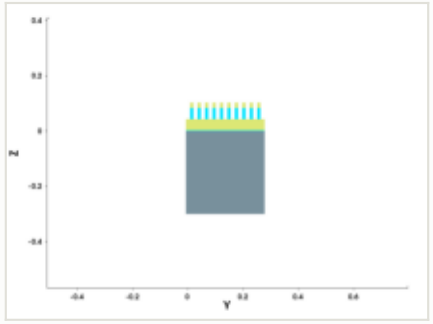

y cut at 0.211 µm

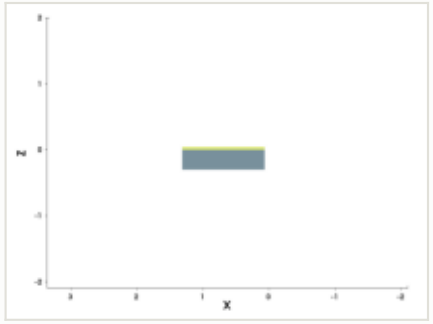

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

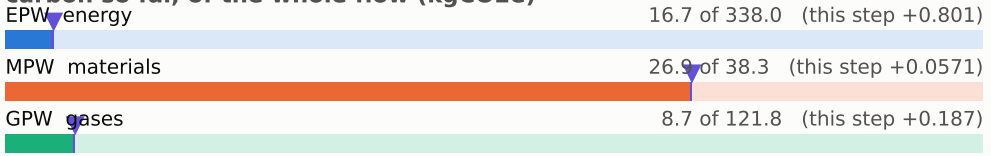

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

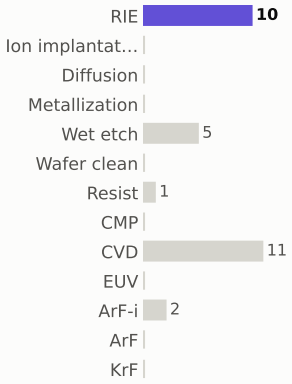

materials deposited (g)

gases emitted (g)

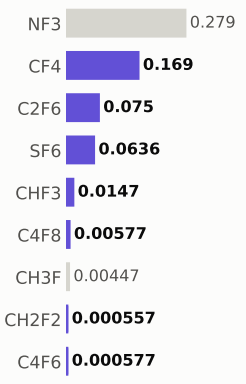

Step #330: RIE

etch_anisotropic · RIE

1.04	53.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

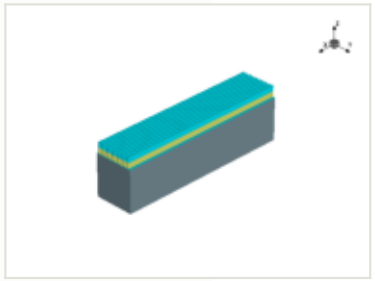

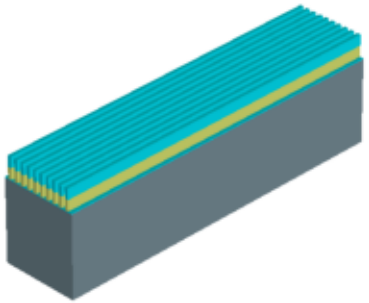

x cut at 0.677 µm

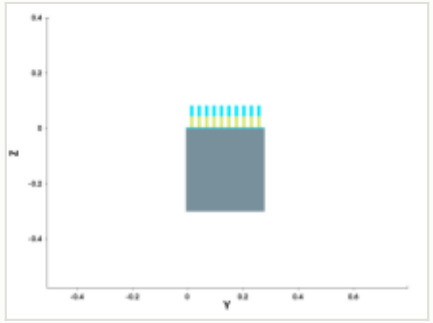

y cut at 0.211 µm

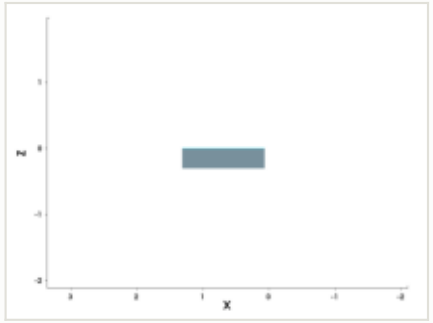

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

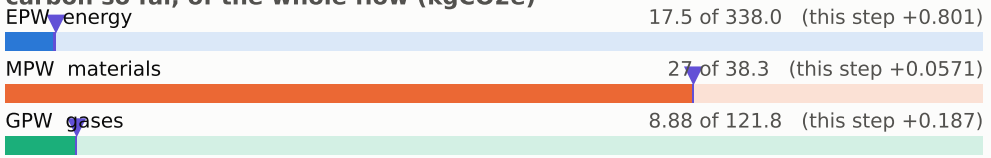

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

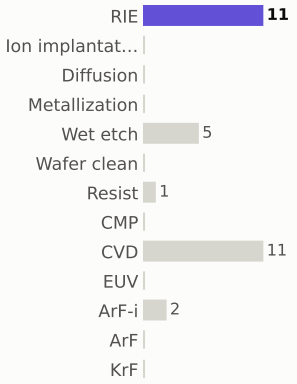

materials deposited (g)

gases emitted (g)

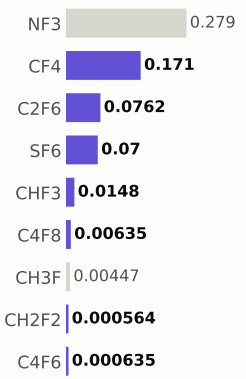

Step #340: CVD

depo_fill · CVD

1.31	54.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

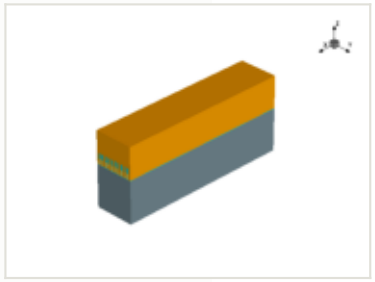

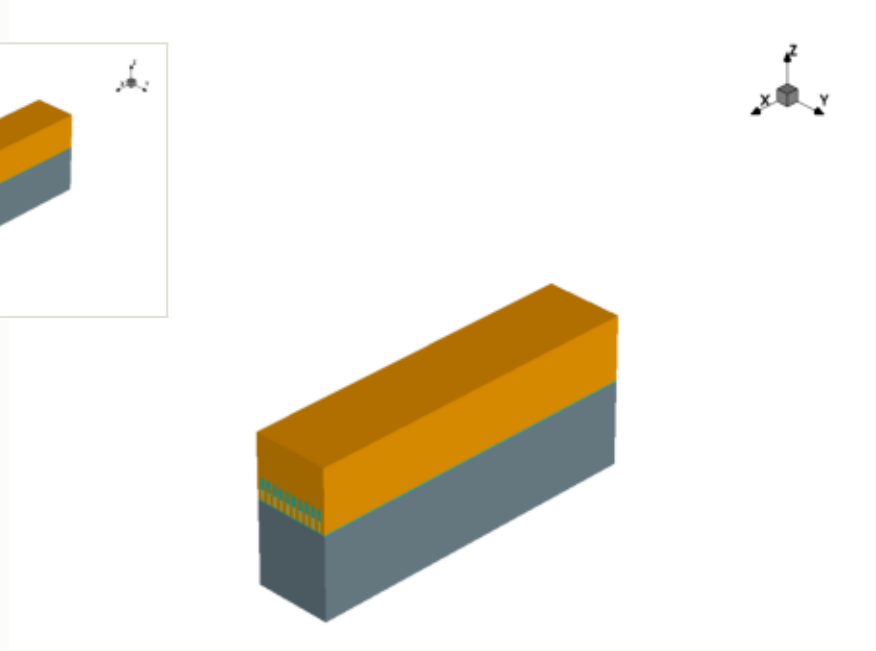

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

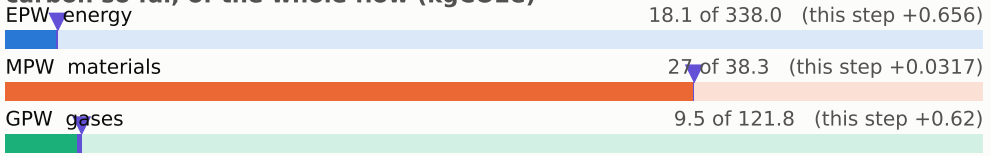

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

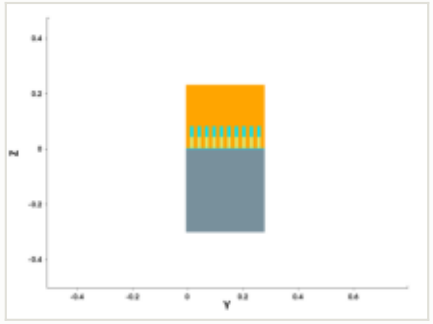

y cut at 0.211 µm

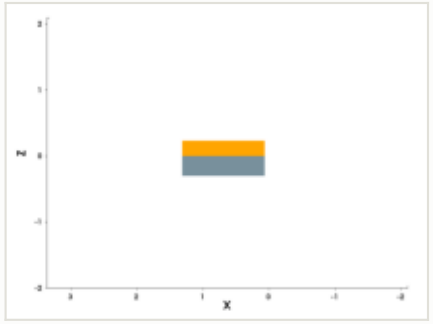

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

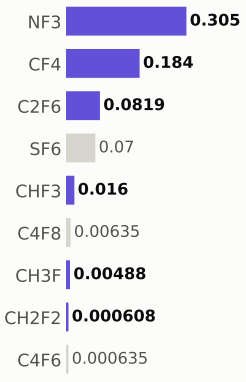

Step #350: CVD

depo_isotropic · CVD

1.31	55.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

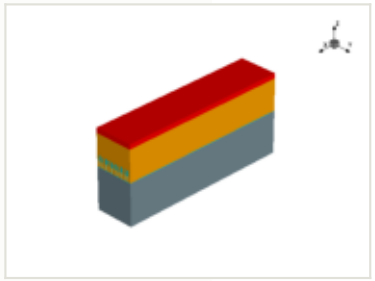

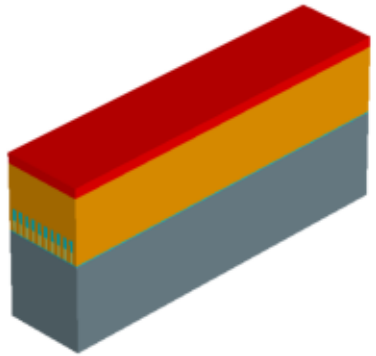

x cut at 0.677 µm

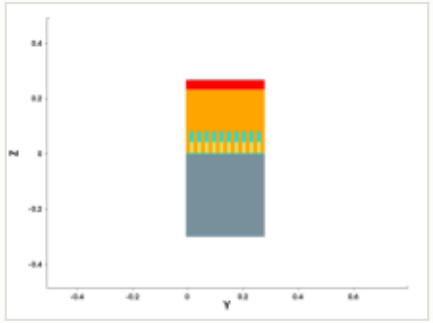

y cut at 0.211 µm

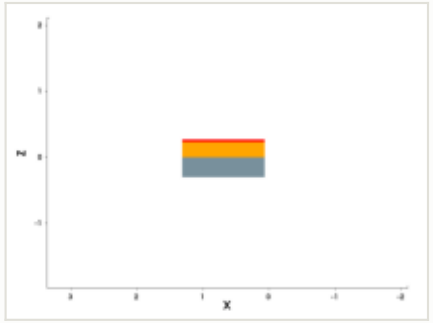

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

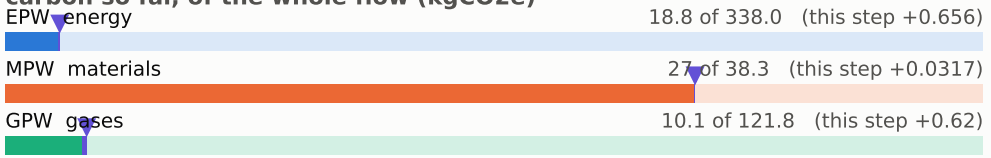

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

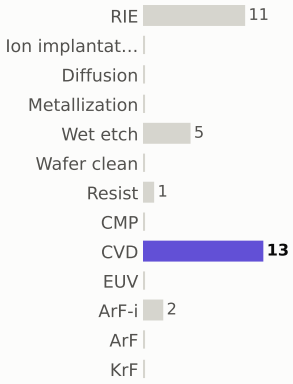

materials deposited (g)



gases emitted (g)

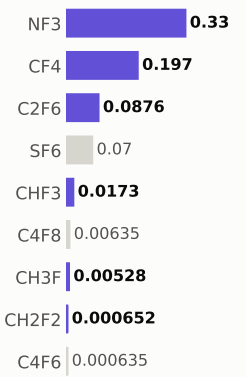

Step #360: EUV

litho_patterning · EUV

1.96	57.9	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

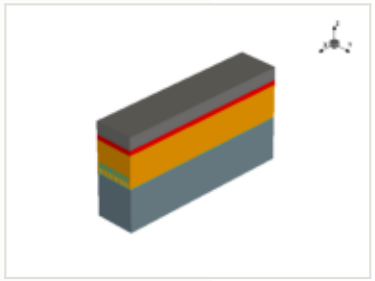

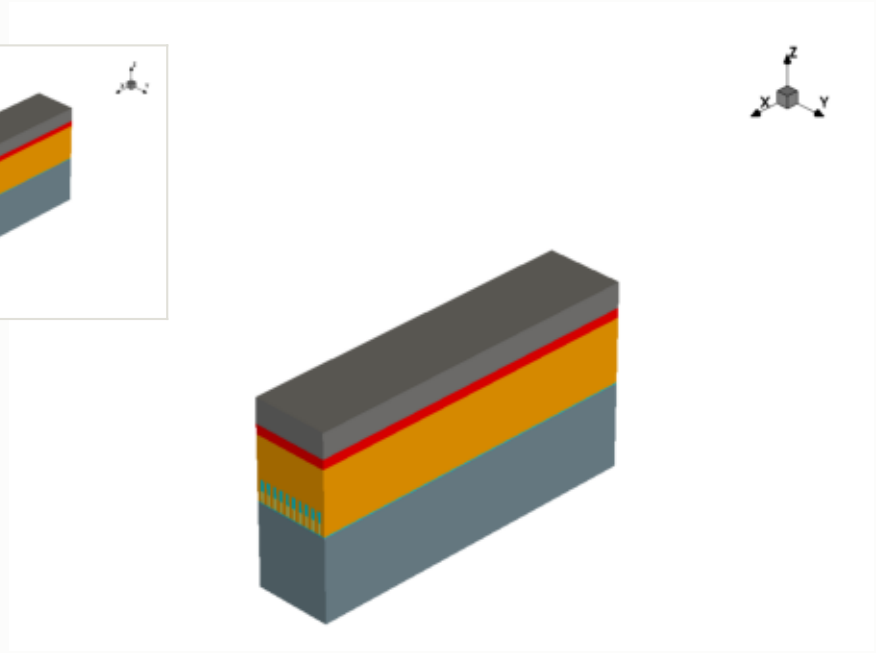

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

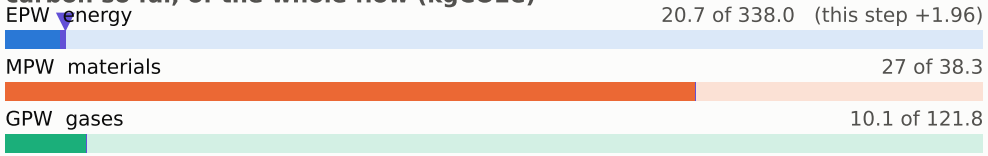

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

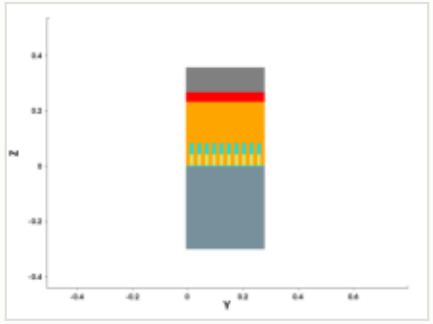

y cut at 0.211 µm

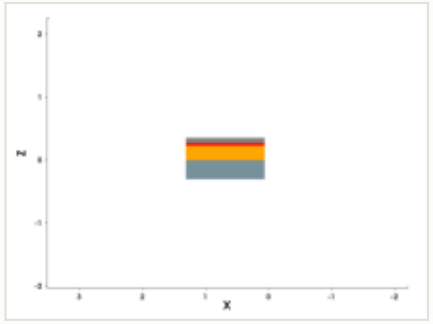

mask for this step

no mask for this step

steps by process area

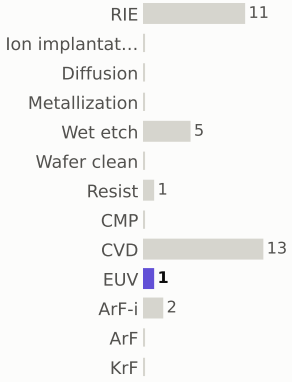

materials deposited (g)

gases emitted (g)

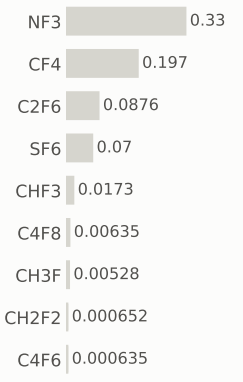

Step #370: RIE

etch_anisotropic · RIE

1.04	58.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

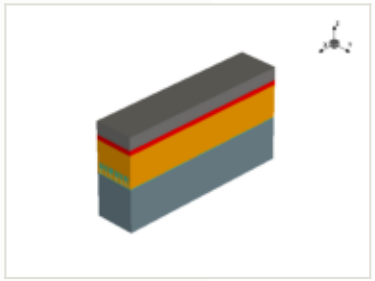

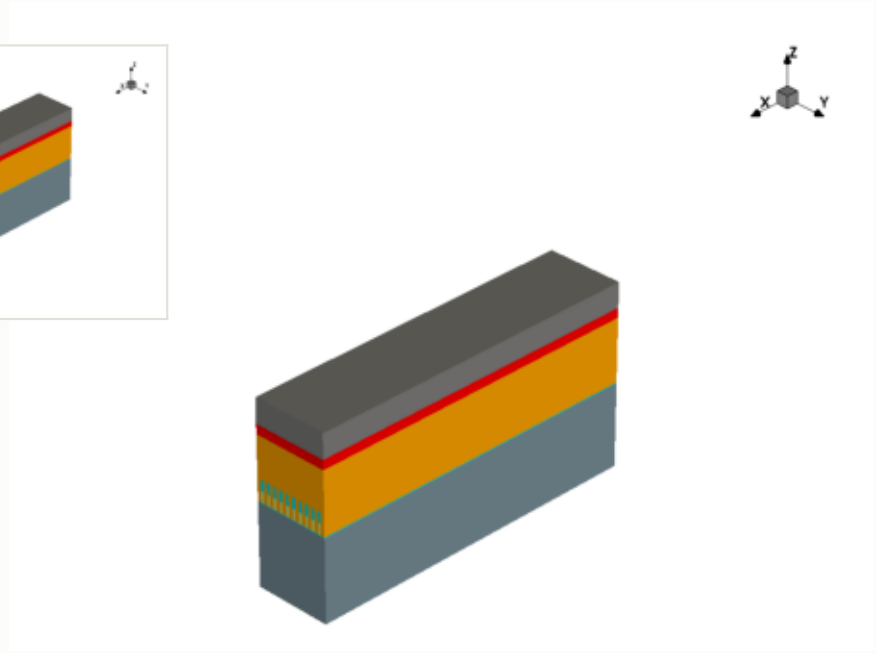

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

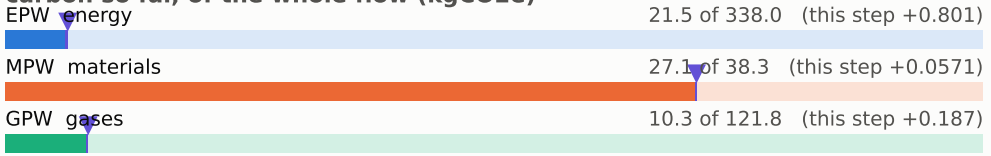

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

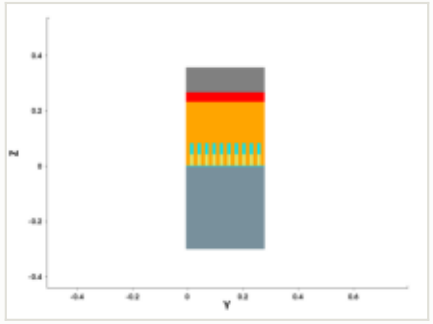

y cut at 0.211 µm

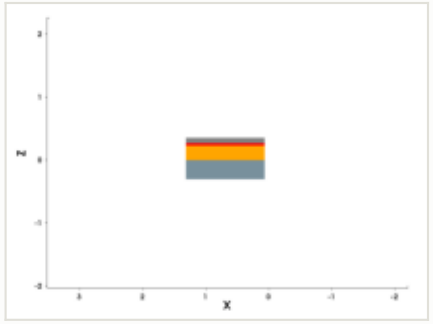

mask for this step

no mask for this step

steps by process area

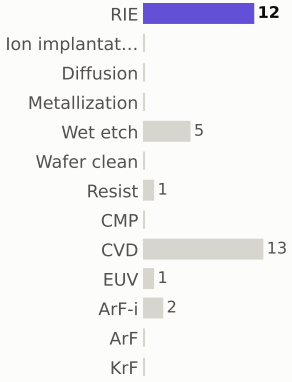

materials deposited (g)

gases emitted (g)

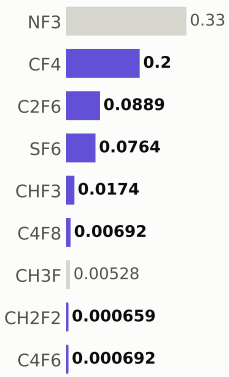

Step #380: RIE

etch_anisotropic · RIE

1.04	60	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

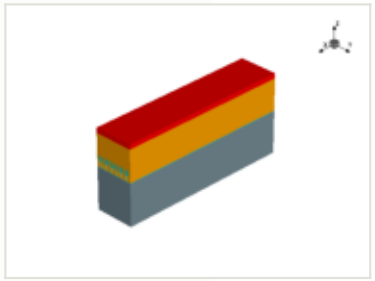

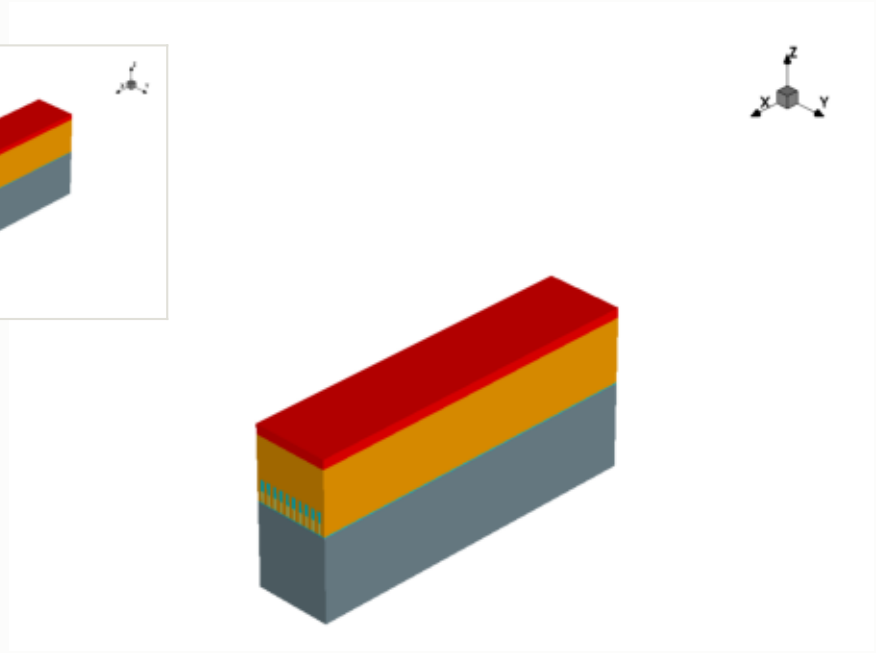

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

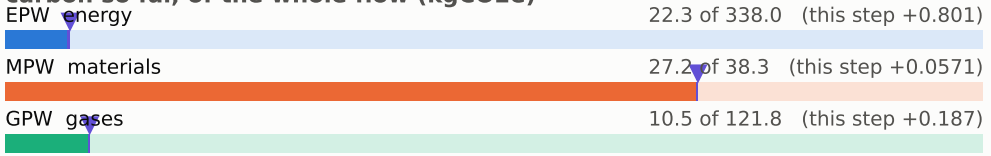

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

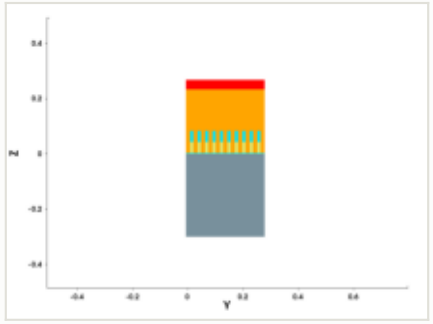

y cut at 0.211 µm

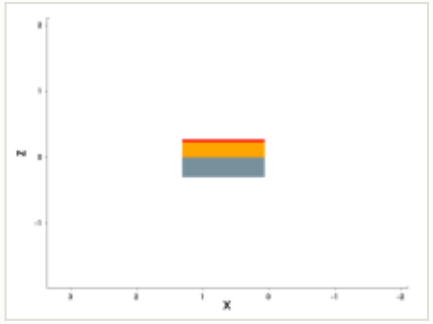

mask for this step

no mask for this step

steps by process area

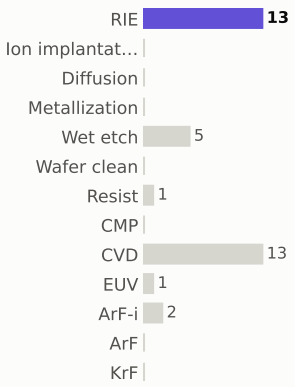

materials deposited (g)

gases emitted (g)

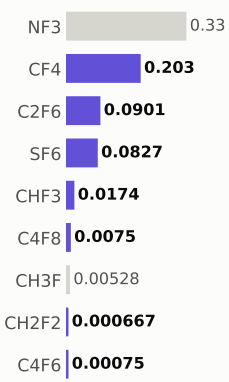

Step #390: RIE

etch_anisotropic · RIE

1.04	61	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

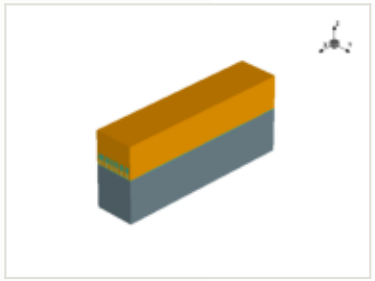

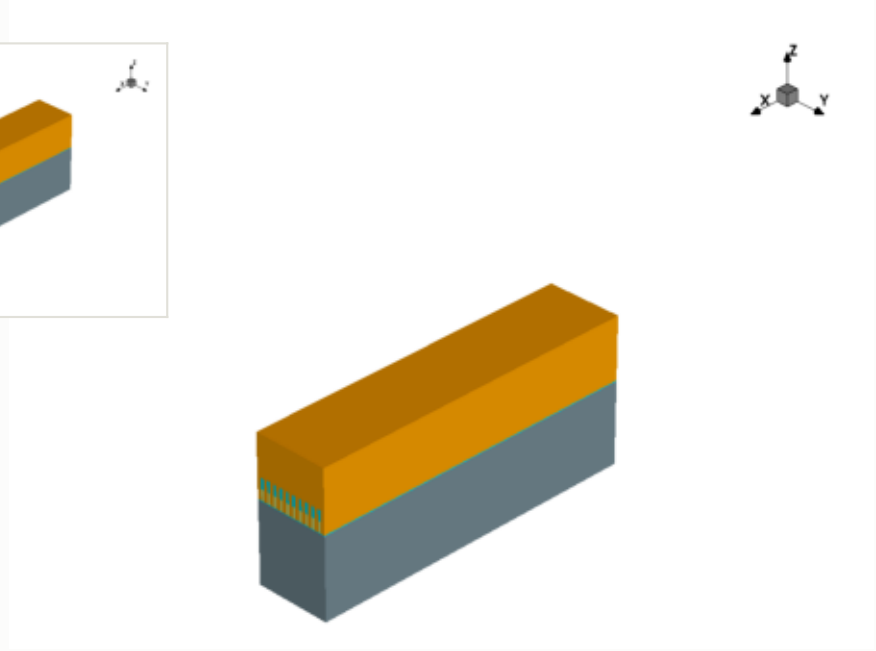

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

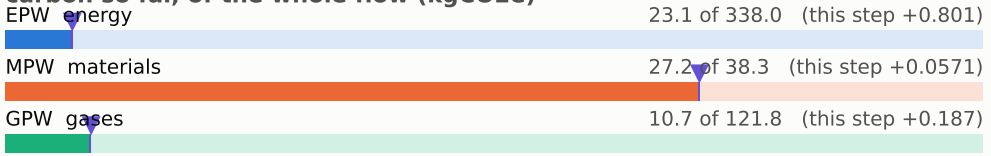

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

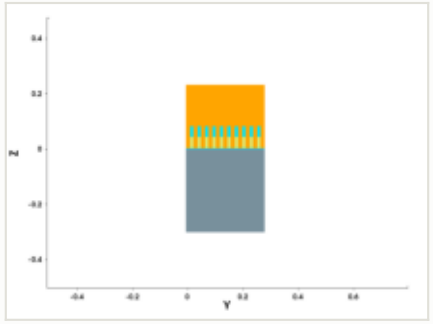

y cut at 0.211 µm

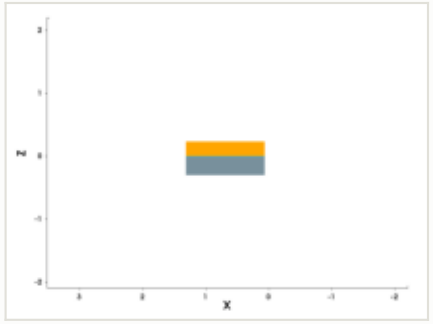

mask for this step

no mask for this step

steps by process area

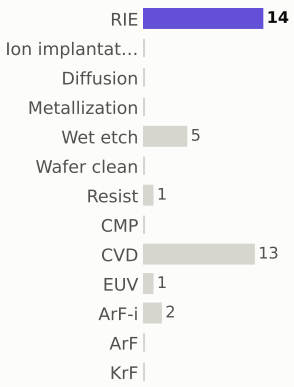

materials deposited (g)

gases emitted (g)

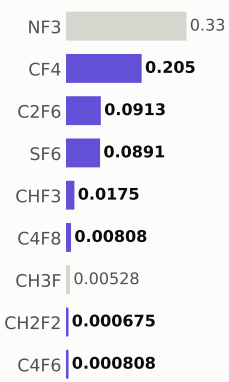

Step #400: RIE

etch_anisotropic · RIE

1.04	62.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

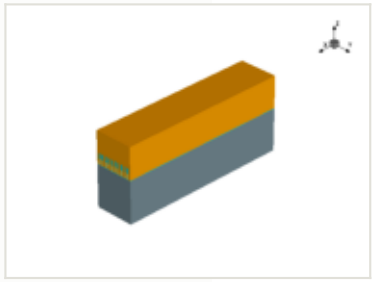

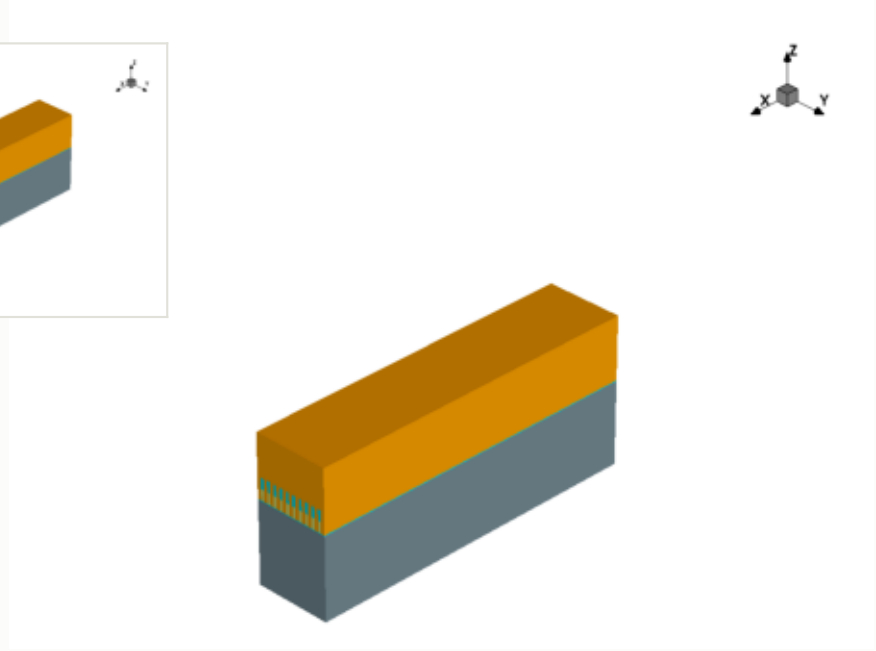

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

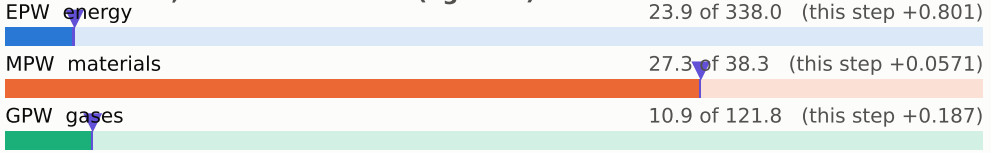

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

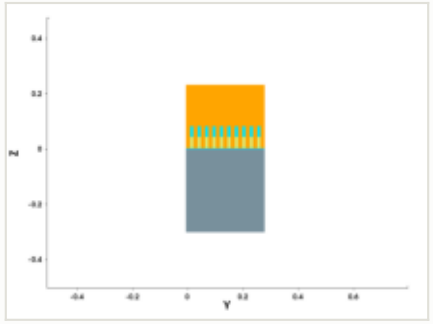

y cut at 0.211 µm

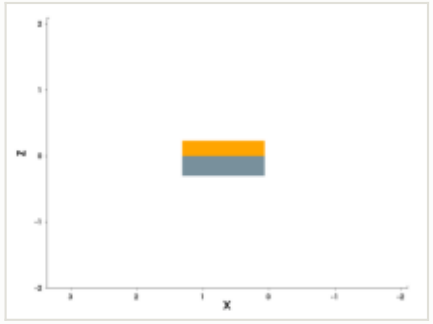

mask for this step

no mask for this step

steps by process area

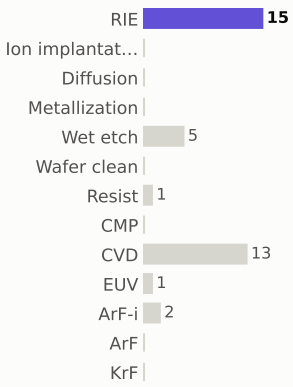

materials deposited (g)

gases emitted (g)

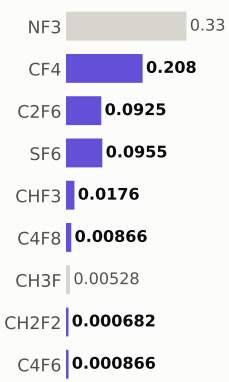

Step #410: Resist

etch_strip · Resist

0.169	62.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

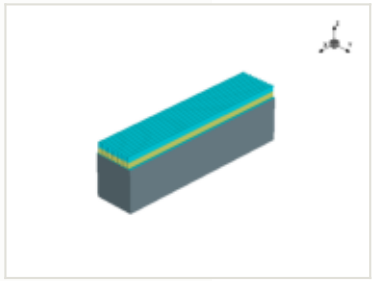

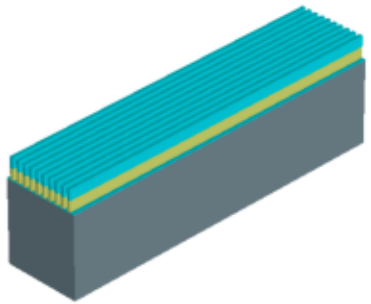

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

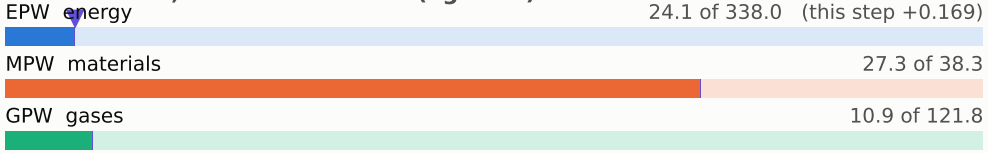

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

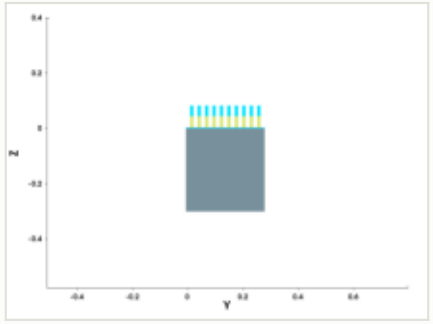

y cut at 0.211 µm

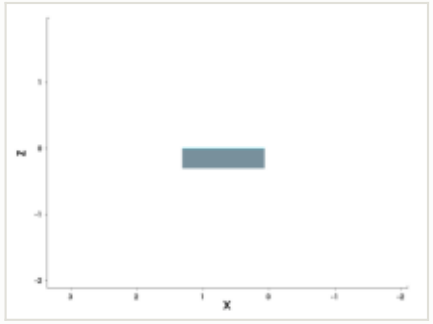

mask for this step

no mask for this step

steps by process area

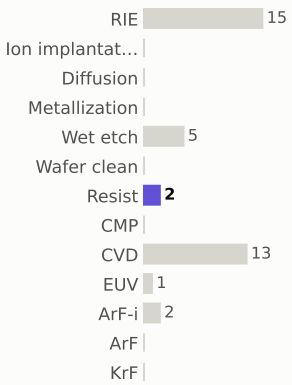

materials deposited (g)

gases emitted (g)

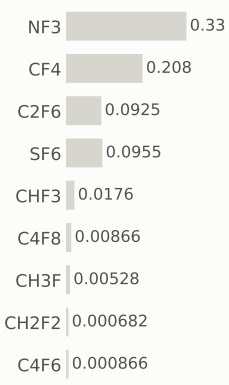

Step #420: RIE

etch_anisotropic · RIE

1.04	63.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

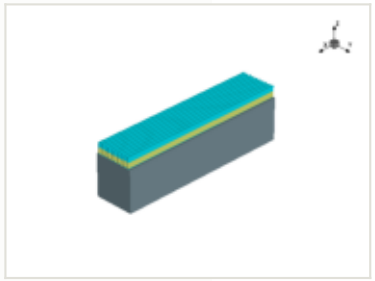

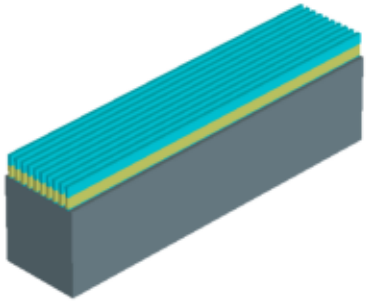

x cut at 0.677 µm

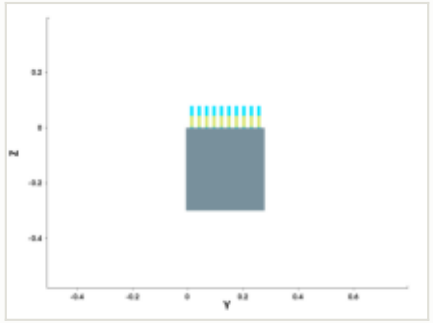

y cut at 0.211 µm

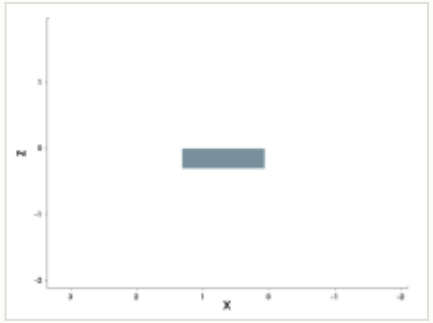

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

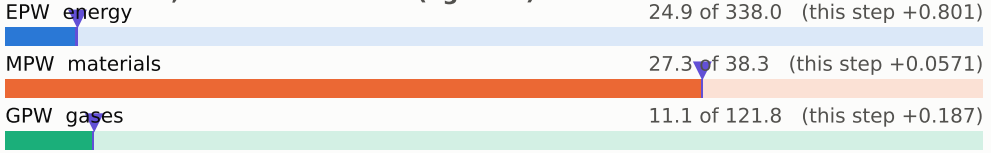

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

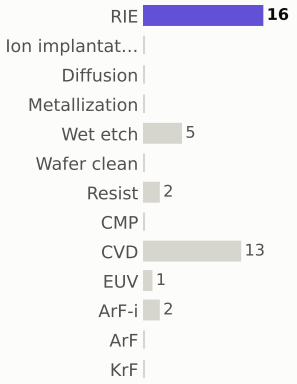

materials deposited (g)

gases emitted (g)

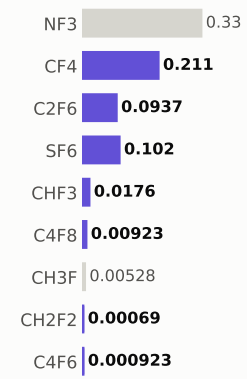

Step #430: RIE

etch_unified · RIE

1.04	64.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

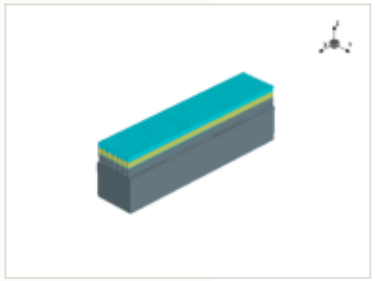

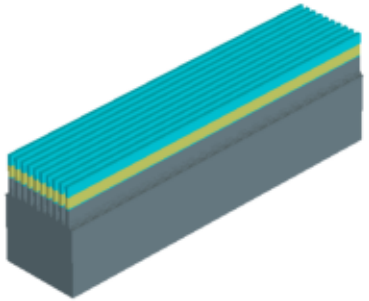

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

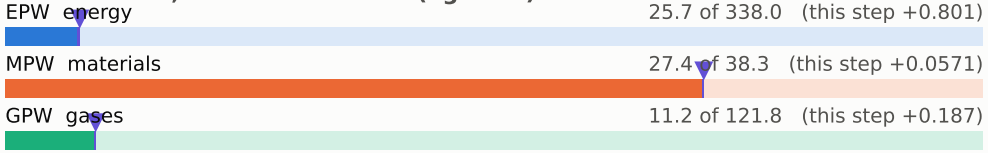

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

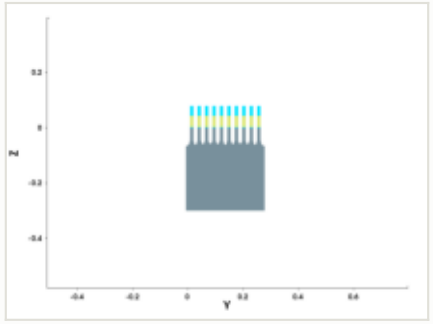

y cut at 0.211 µm

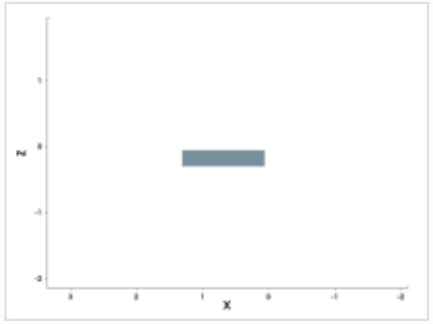

mask for this step

no mask for this step

steps by process area

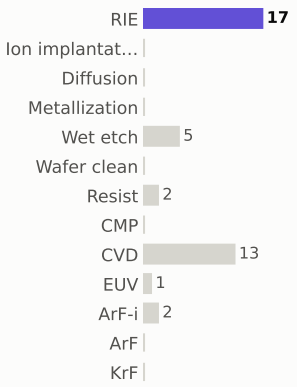

materials deposited (g)

gases emitted (g)

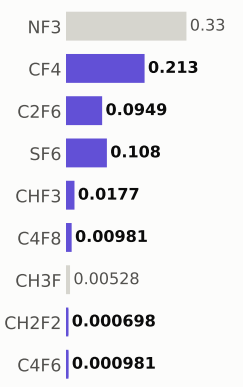

Step #440: RIE

etch_unified · RIE

1.04	65.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

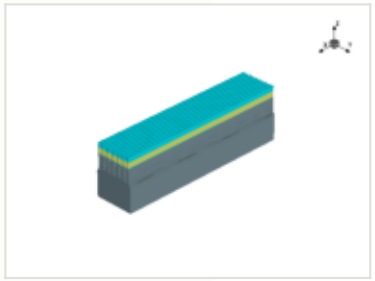

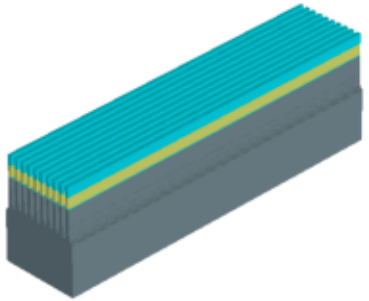

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

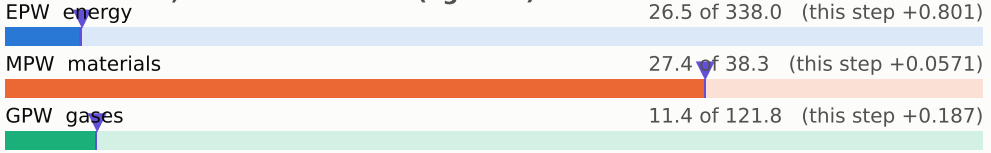

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

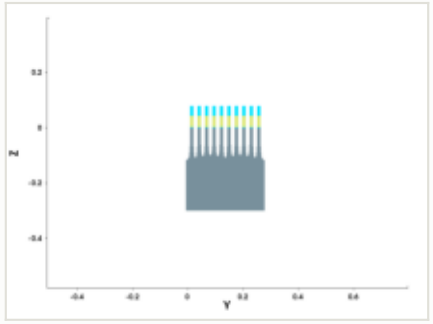

y cut at 0.211 µm

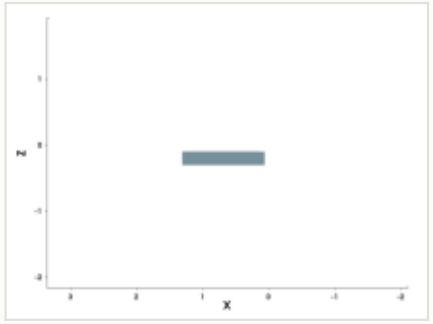

mask for this step

no mask for this step

steps by process area

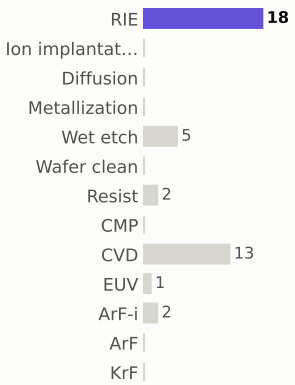

materials deposited (g)

gases emitted (g)

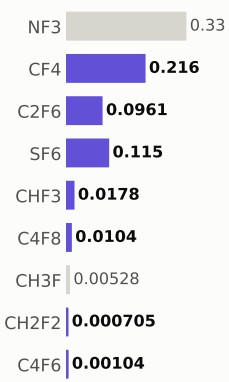

Step #450: Resist

etch_strip · Resist

0.169	65.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

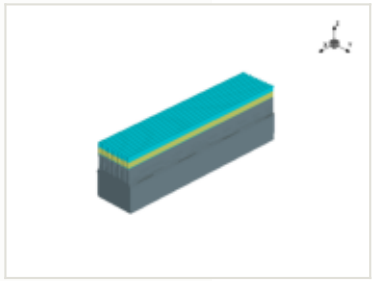

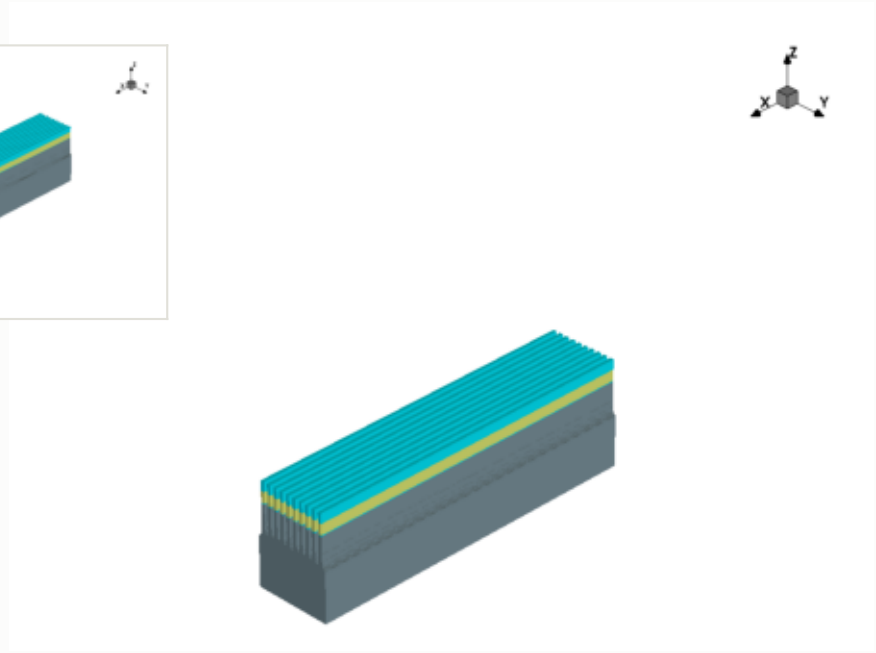

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

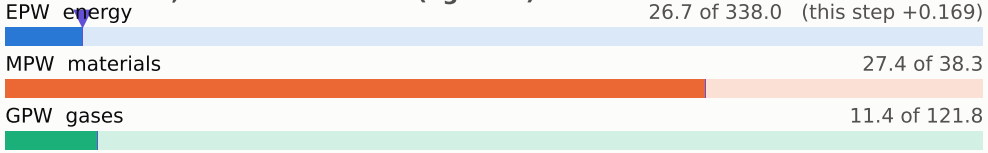

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

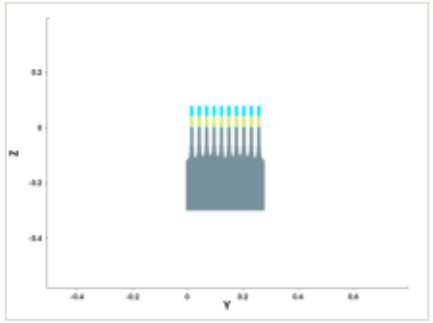

y cut at 0.211 µm

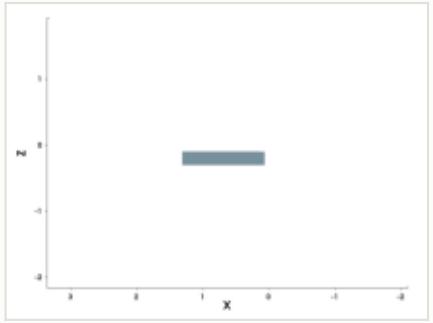

mask for this step

no mask for this step

steps by process area

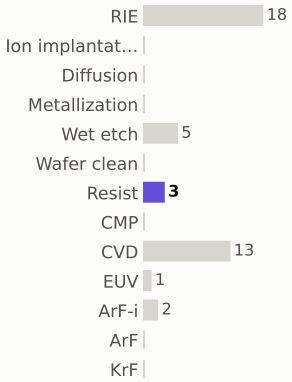

materials deposited (g)

gases emitted (g)

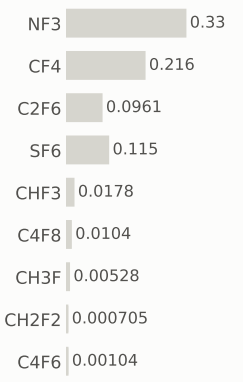

Step #460: CVD

depo_fill · CVD

1.31	66.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

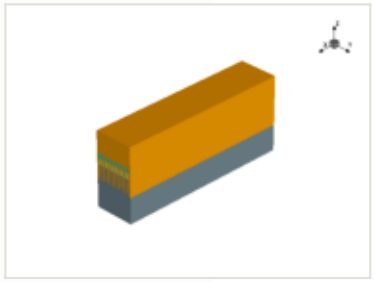

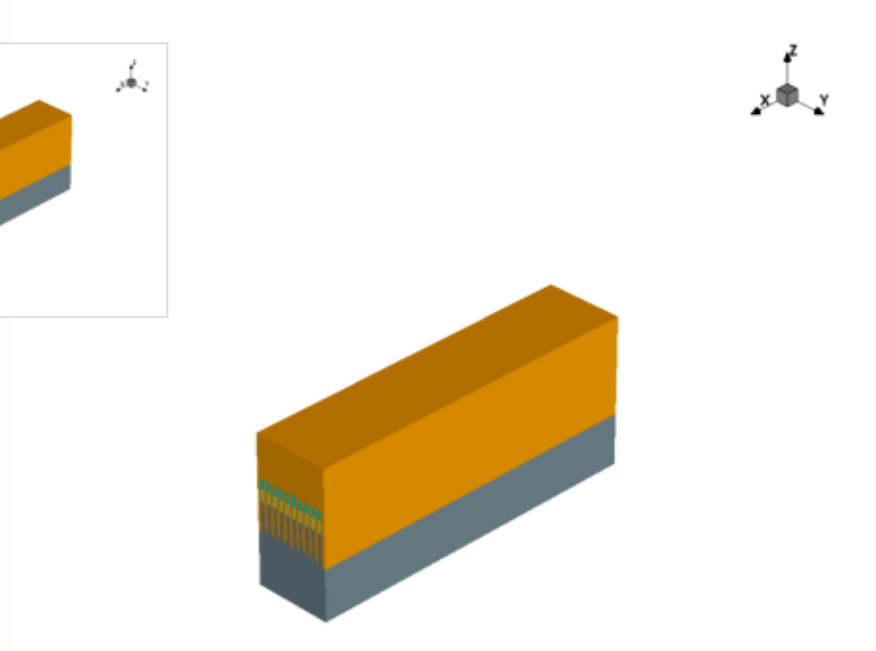

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

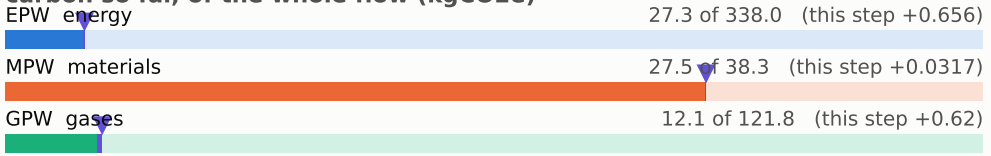

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

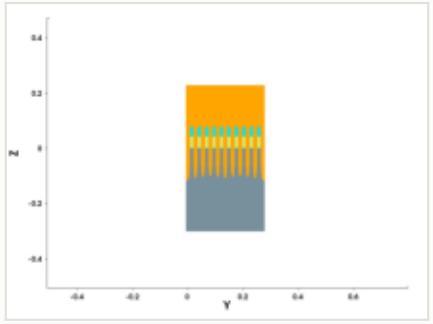

y cut at 0.211 µm

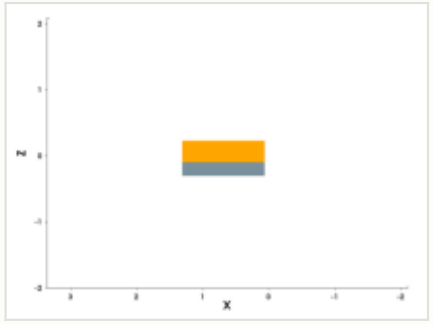

mask for this step

no mask for this step

steps by process area

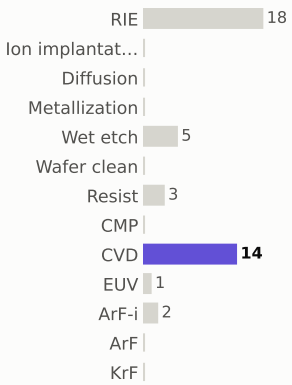

materials deposited (g)

gases emitted (g)

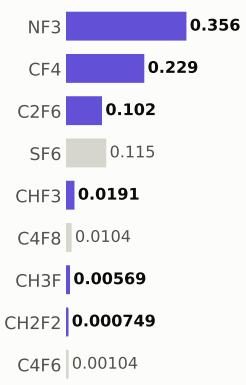

Step #470: CVD

depo_isotropic · CVD

1.31	68.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

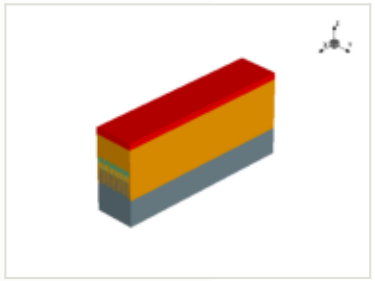

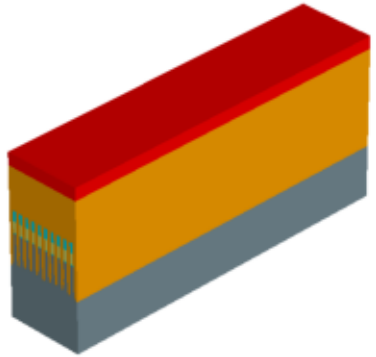

this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

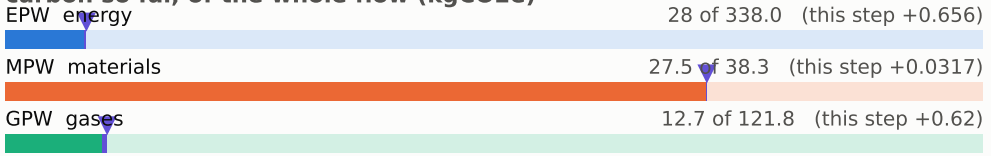

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

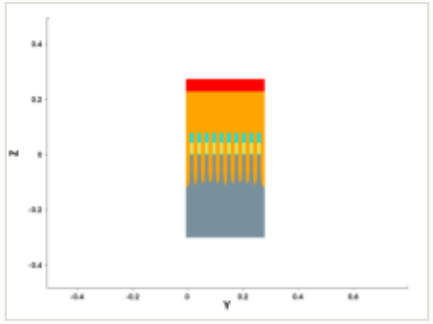

y cut at 0.211 µm

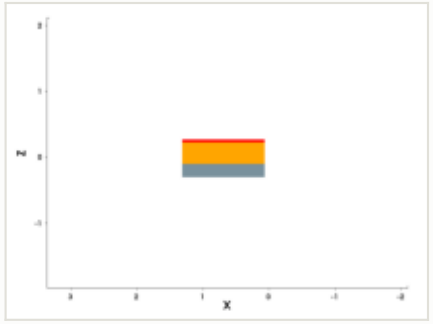

mask for this step

no mask for this step

steps by process area

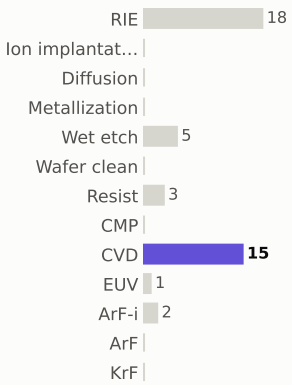

materials deposited (g)

gases emitted (g)

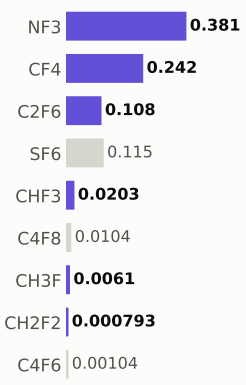

Step #480: EUV

litho_patterning · EUV

1.96	70.1	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

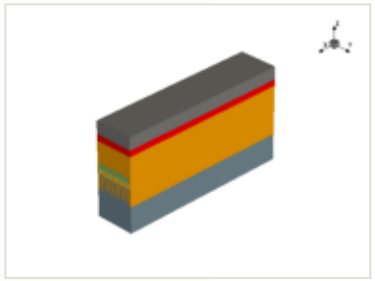

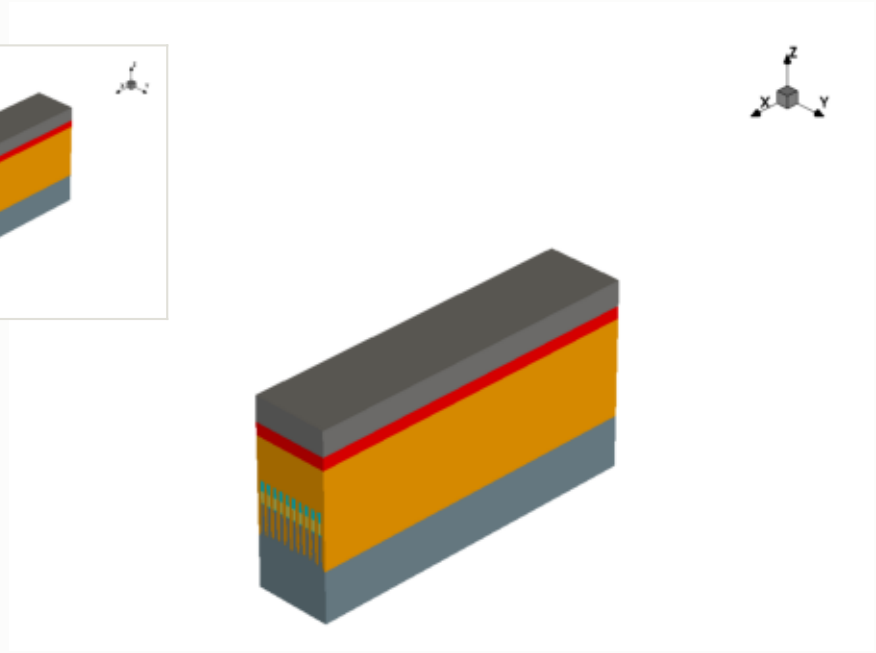

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

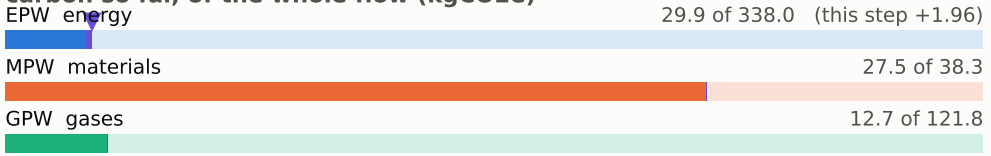

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

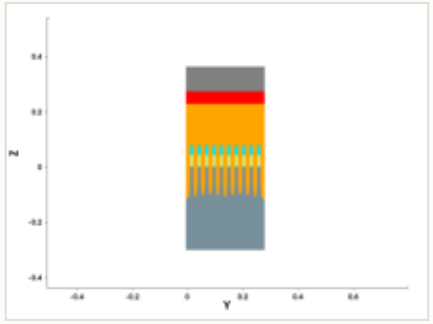

y cut at 0.211 µm

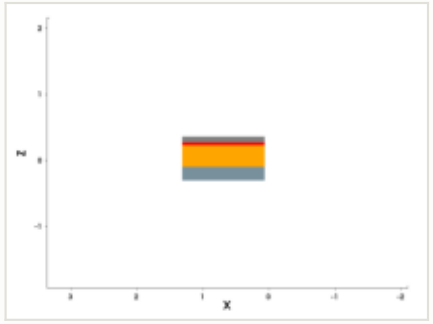

mask for this step

no mask for this step

steps by process area

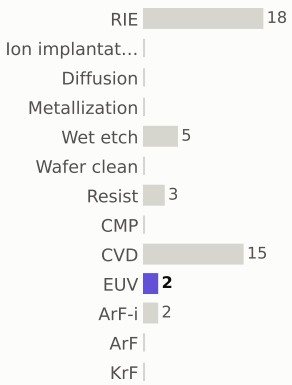

materials deposited (g)

gases emitted (g)

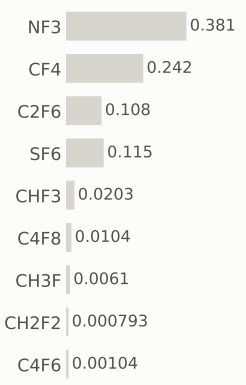

Step #490: RIE

etch_anisotropic · RIE

1.04	71.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

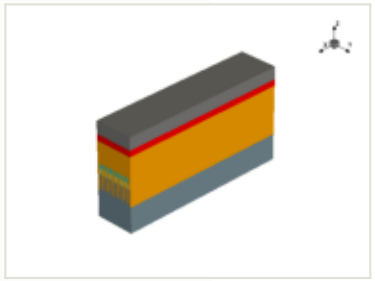

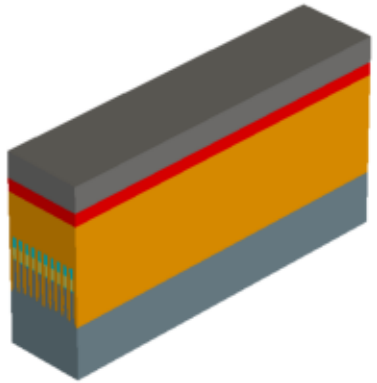

x cut at 0.677 µm

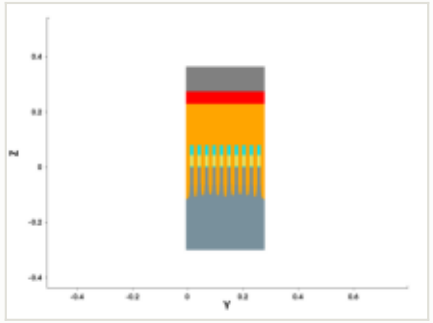

y cut at 0.211 µm

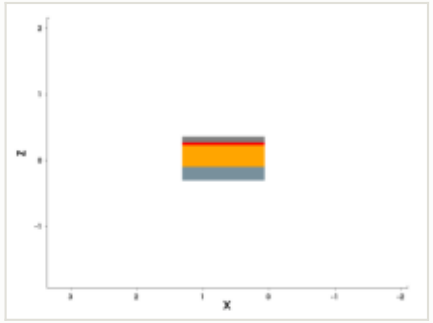

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

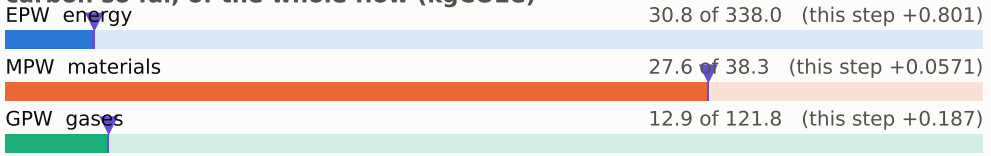

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)

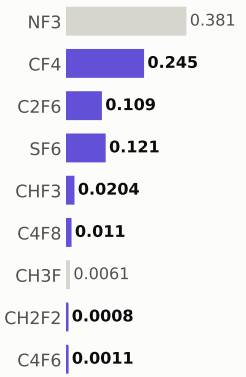

Step #500: RIE

etch_anisotropic · RIE

1.04	72.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

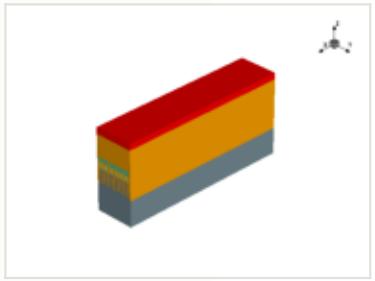

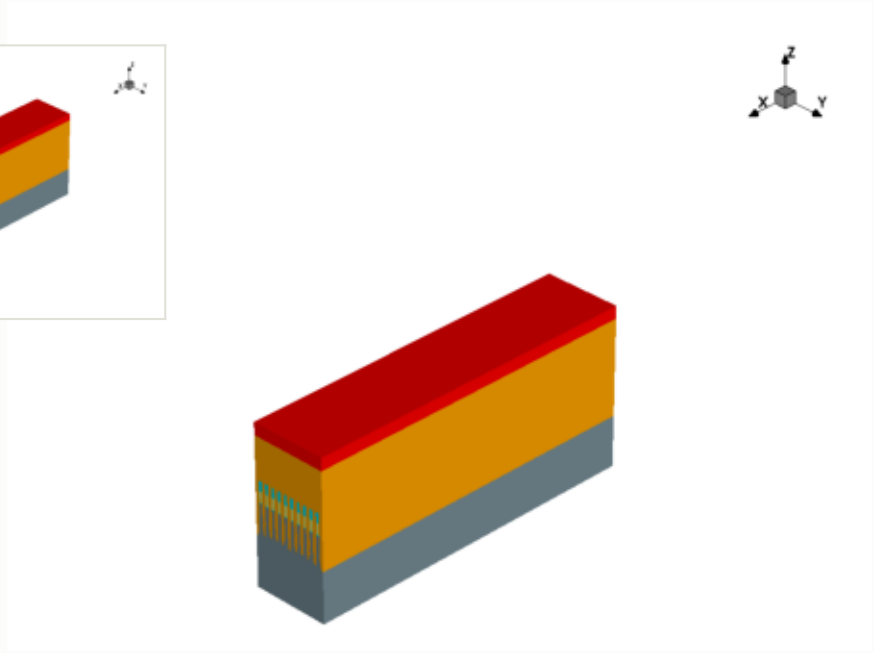

x cut at 0.677 µm

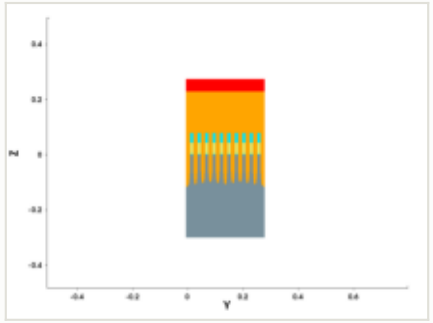

y cut at 0.211 µm

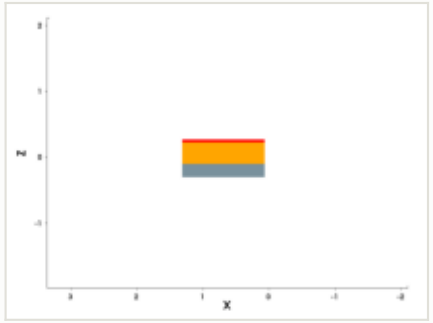

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

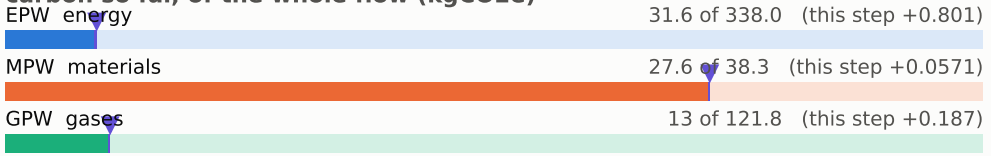

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

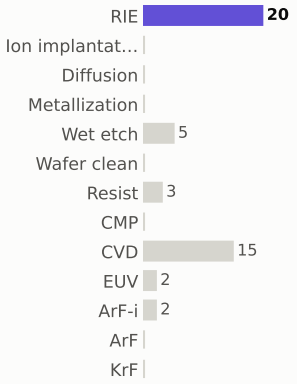

materials deposited (g)

gases emitted (g)

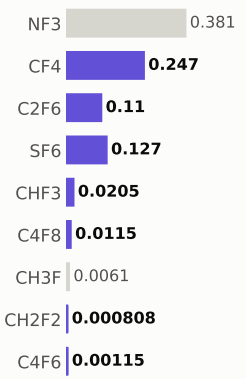

Step #510: RIE

etch_anisotropic · RIE

1.04	73.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

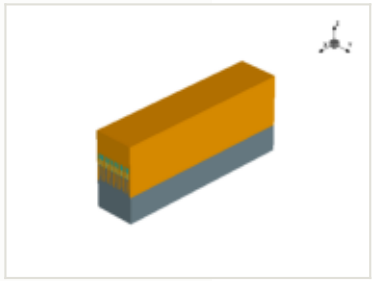

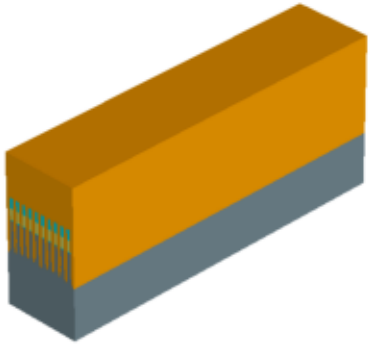

x cut at 0.677 µm

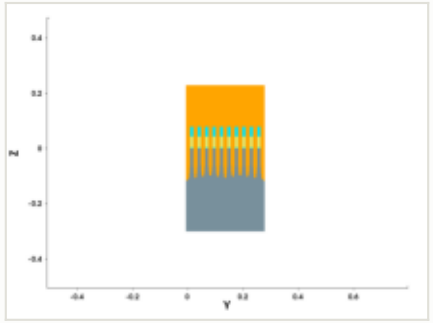

y cut at 0.211 µm

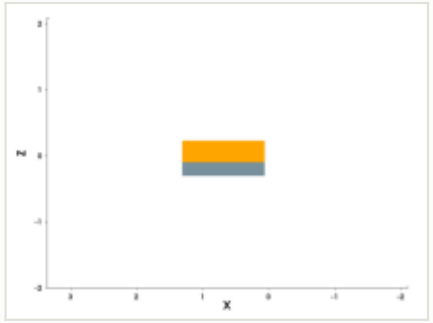

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

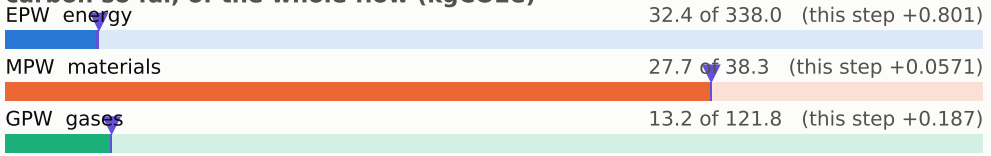

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

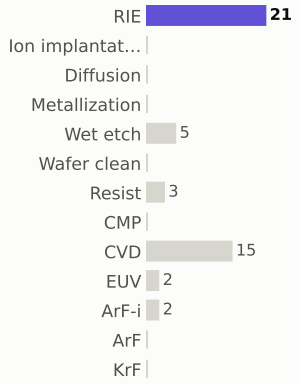

materials deposited (g)

gases emitted (g)

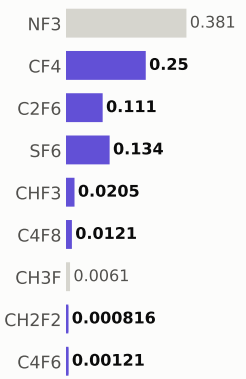

Step #520: RIE

etch_microloading · RIE

1.04	74.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

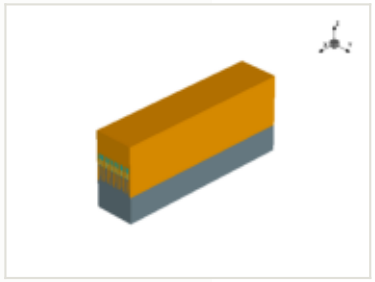

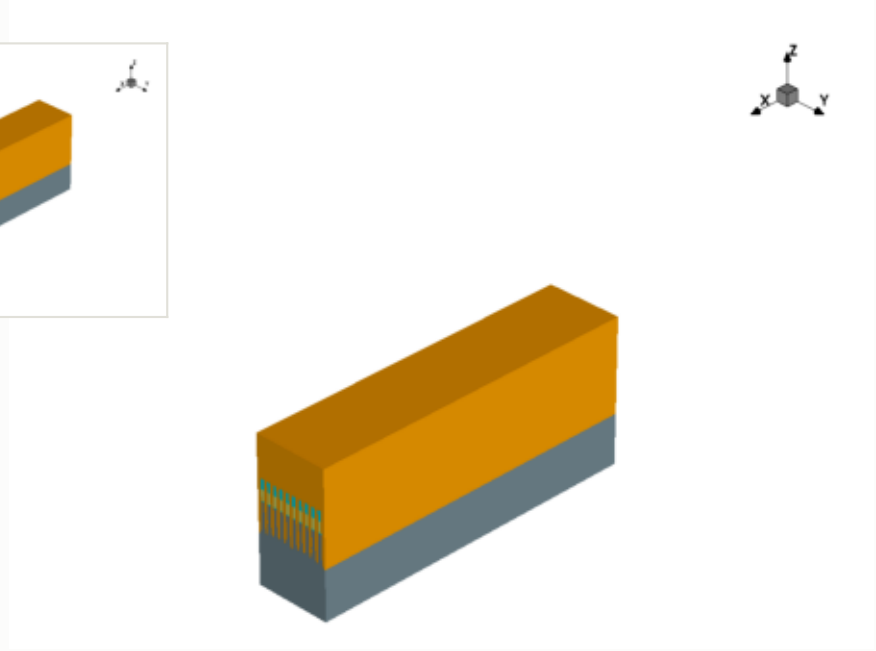

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

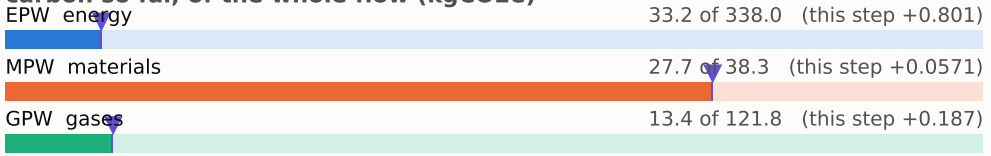

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

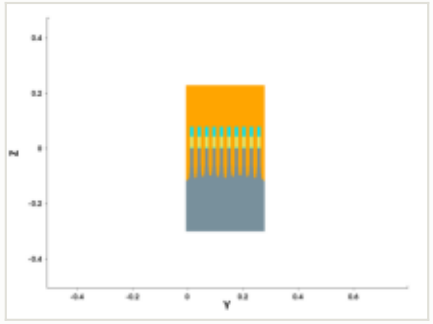

y cut at 0.211 µm

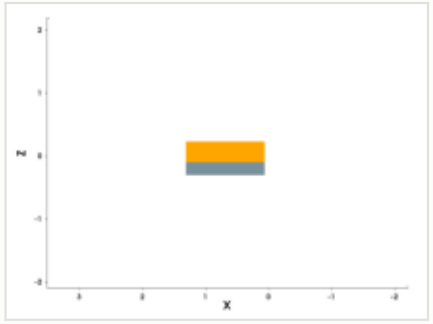

mask for this step

no mask for this step

steps by process area

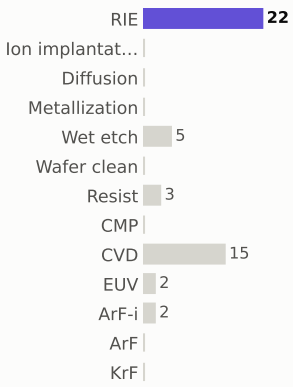

materials deposited (g)

gases emitted (g)

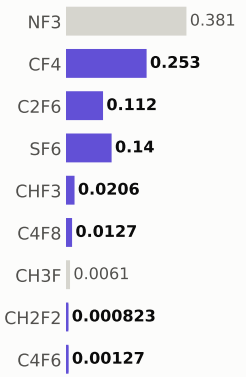

Step #530: Resist

etch_strip · Resist

0.169	74.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

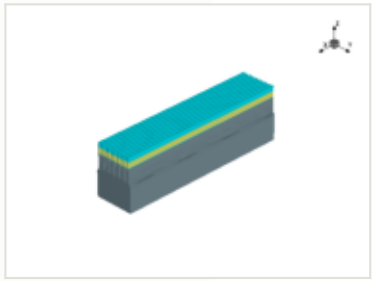

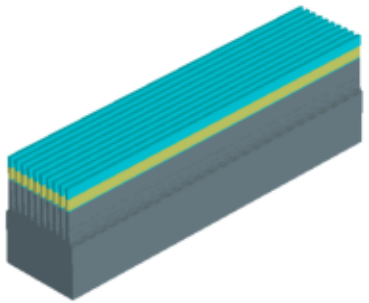

x cut at 0.677 µm

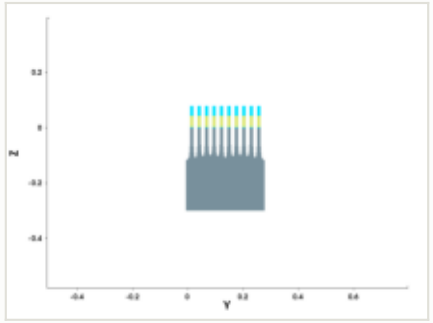

y cut at 0.211 µm

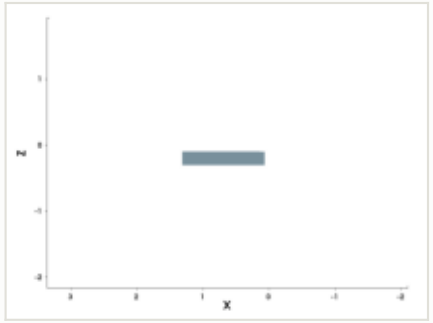

mask for this step

no mask for this step

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

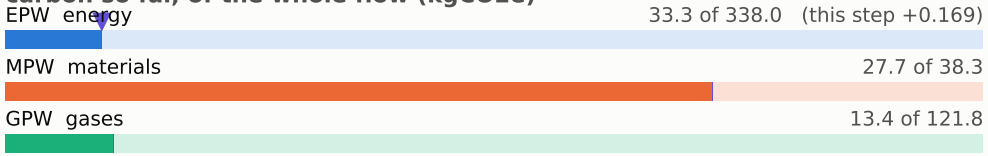

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

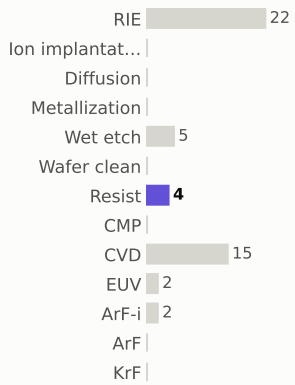

materials deposited (g)

gases emitted (g)

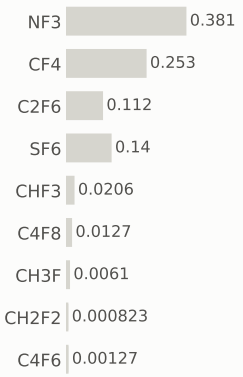

Step #540: CVD

depo_fill · CVD

1.31	75.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

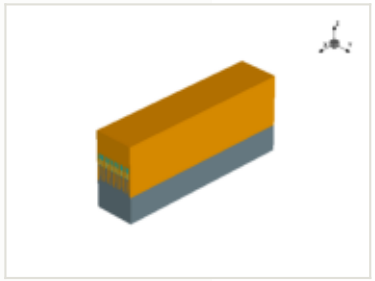

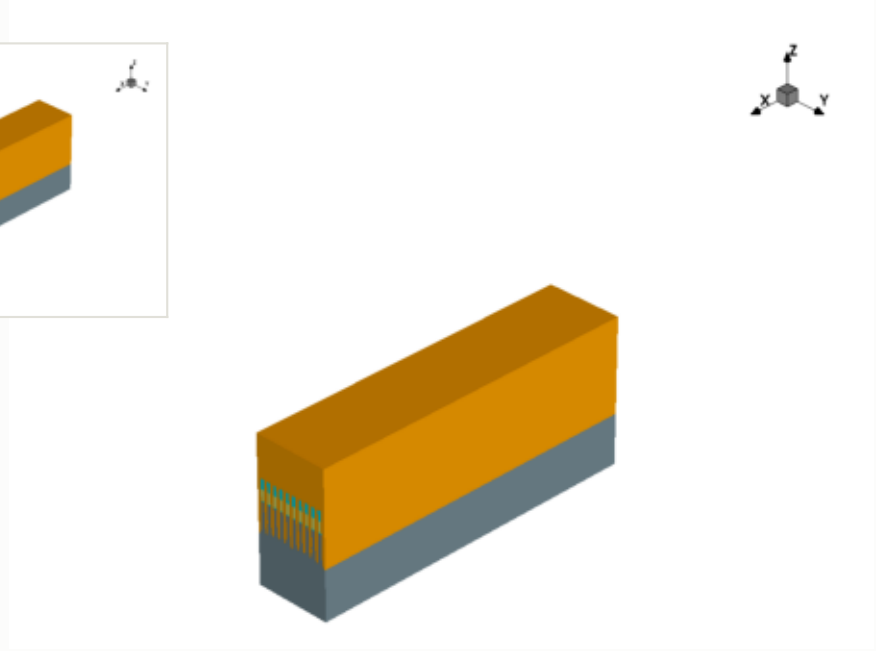

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

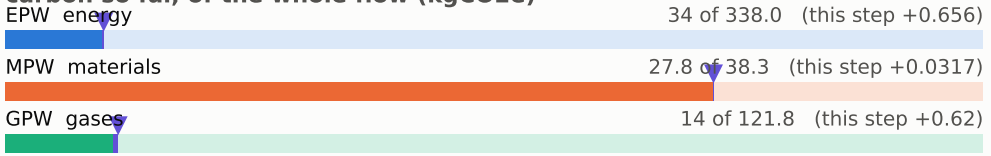

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

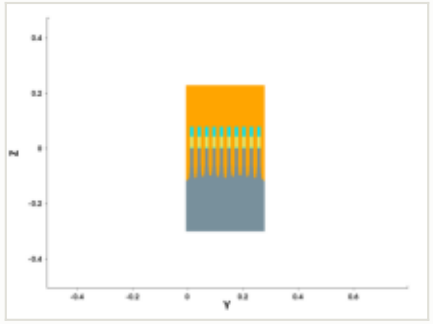

y cut at 0.211 µm

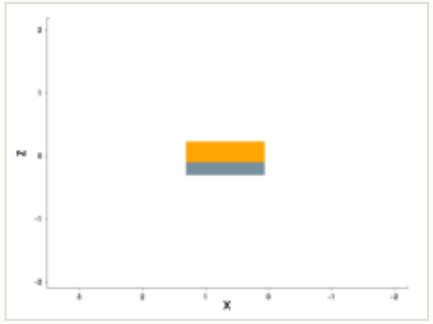

mask for this step

no mask for this step

steps by process area

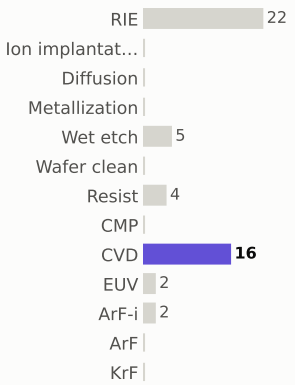

materials deposited (g)

gases emitted (g)



Step #550: CVD

depo_isotropic · CVD

1.31	77.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

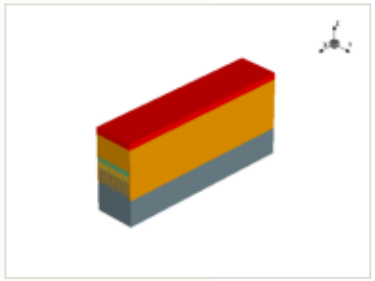

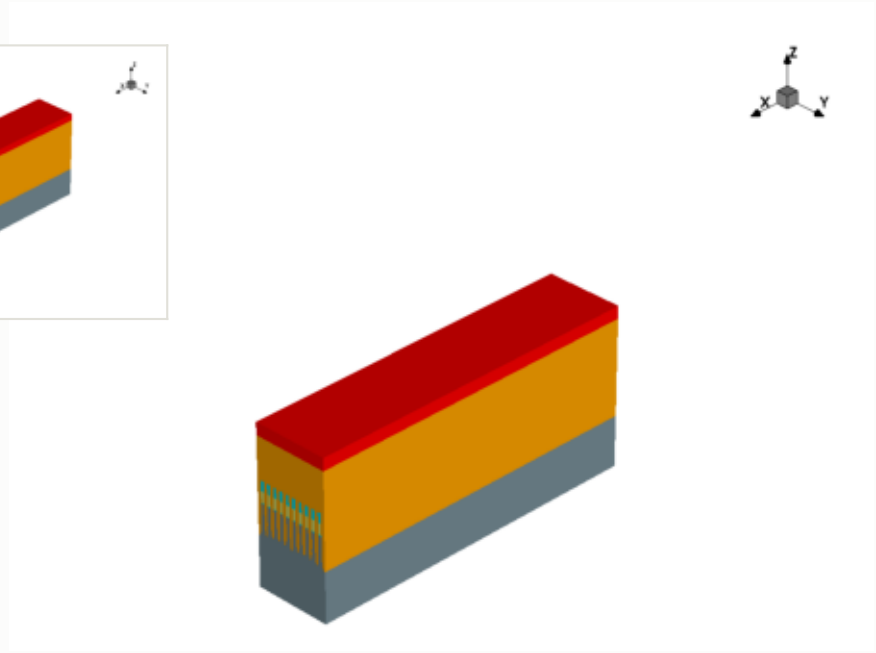

this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

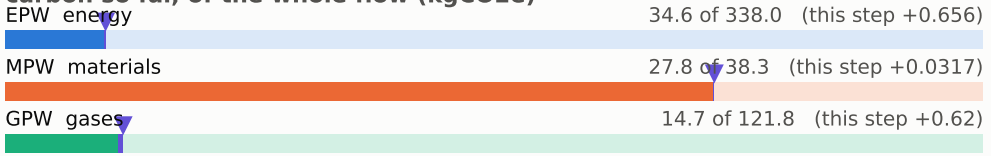

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

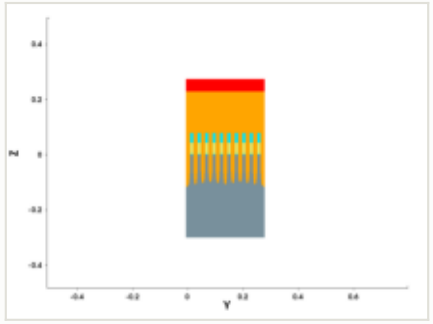

y cut at 0.211 µm

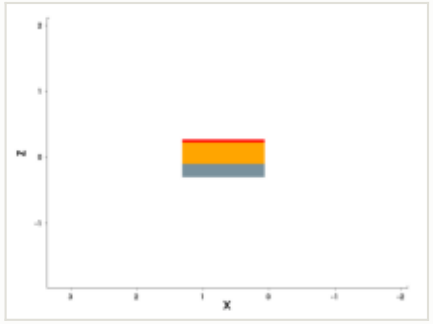

mask for this step

no mask for this step

steps by process area

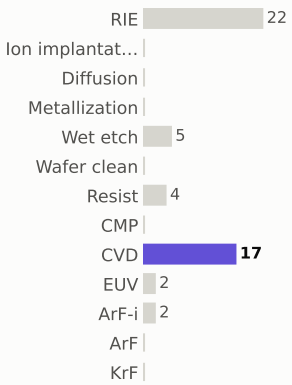

materials deposited (g)

gases emitted (g)

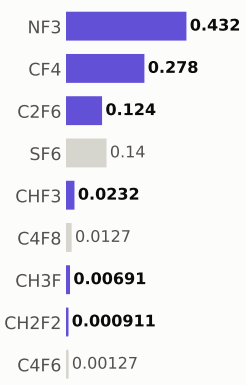

Step #560: EUV

litho_patterning · EUV

1.96	79	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

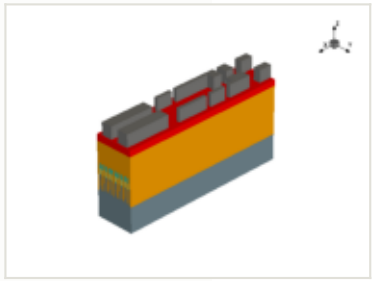

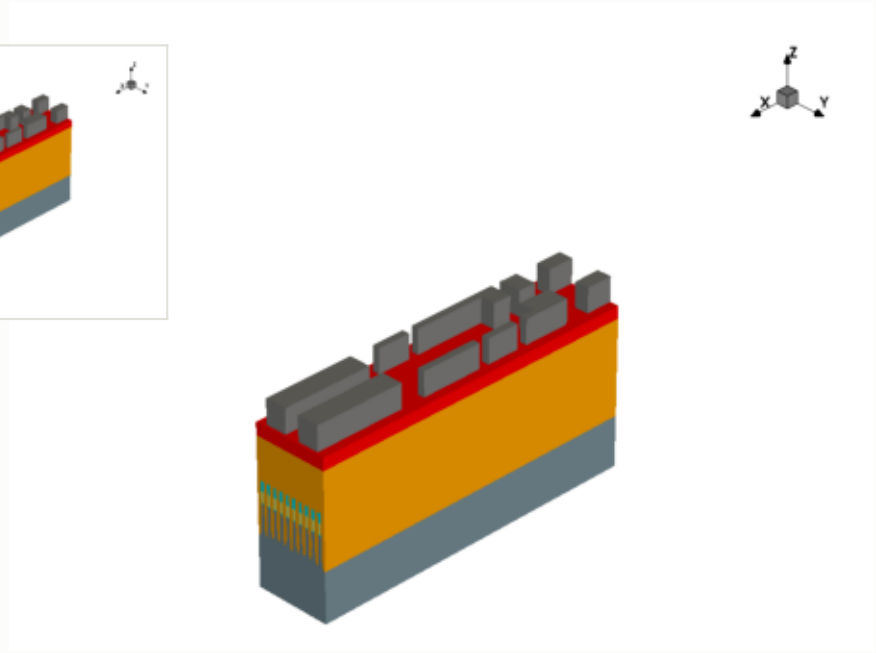

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

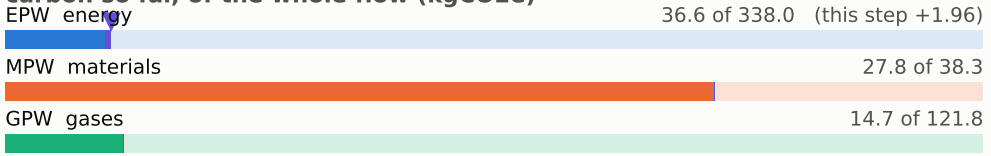

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

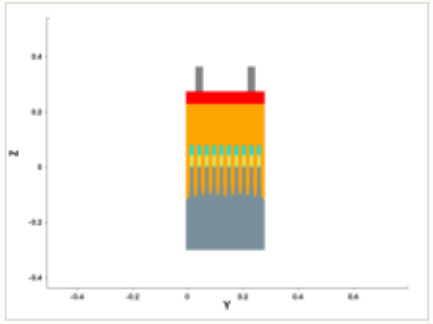

y cut at 0.211 µm

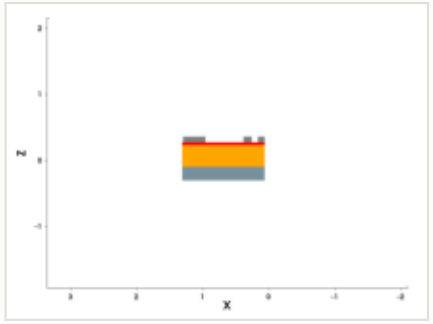

mask: layer 11:0, positive (GDSII)

steps by process area

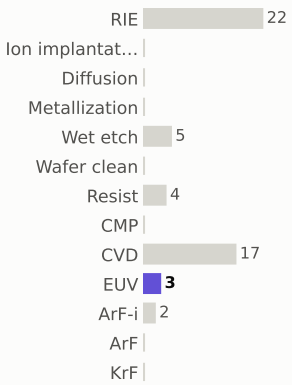

materials deposited (g)

gases emitted (g)

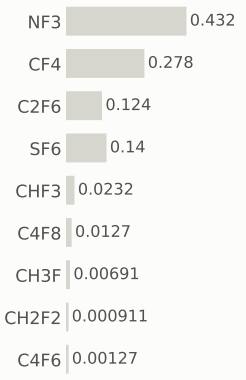

Step #570: RIE

etch_anisotropic · RIE

1.04	80.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

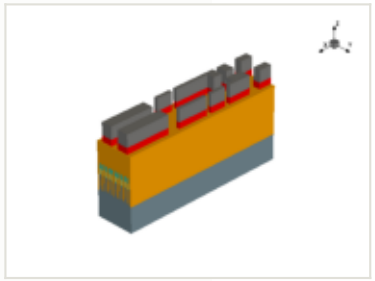

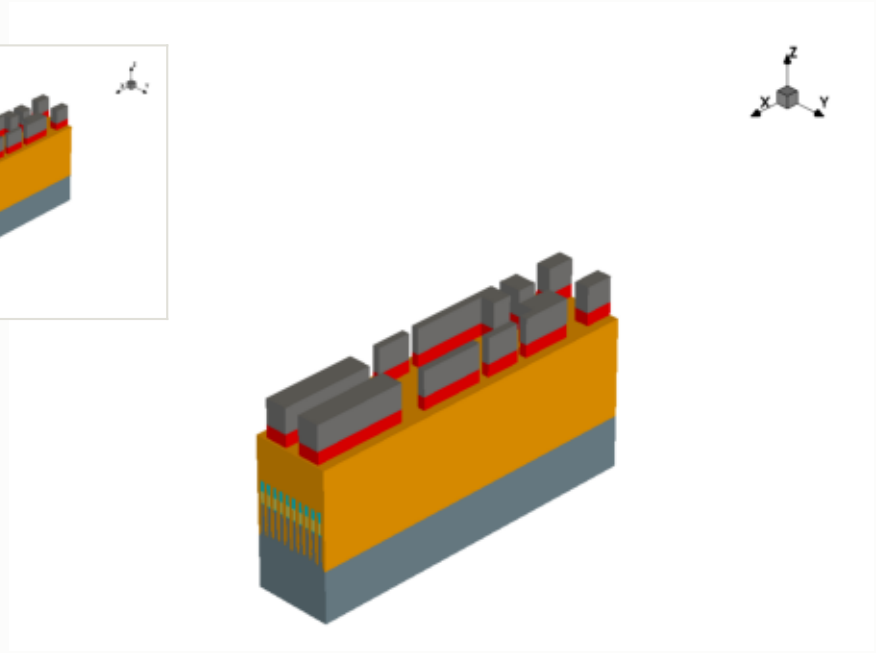

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

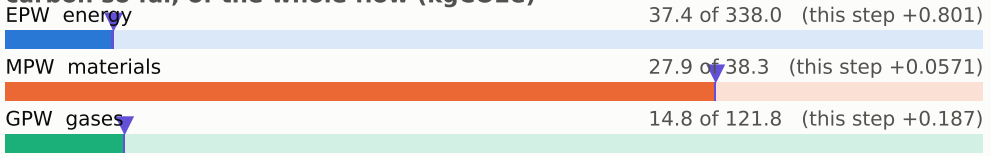

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

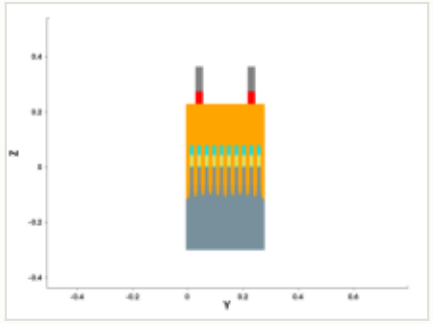

y cut at 0.211 µm

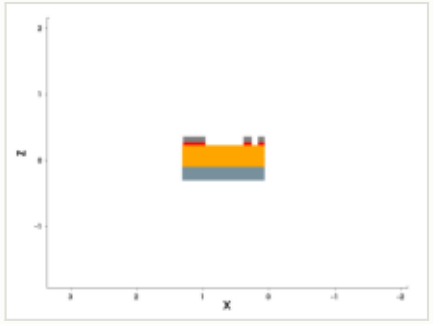

mask for this step

no mask for this step

steps by process area

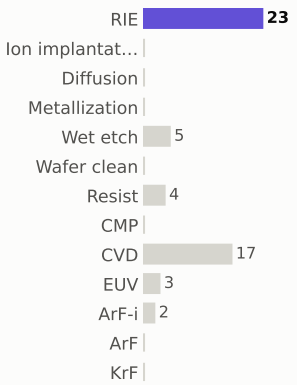

materials deposited (g)

gases emitted (g)

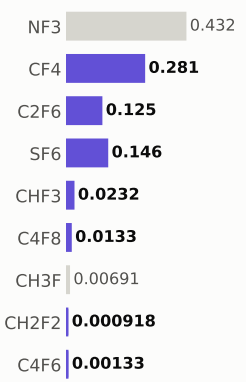

Step #580: RIE

etch_anisotropic · RIE

1.04	81.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

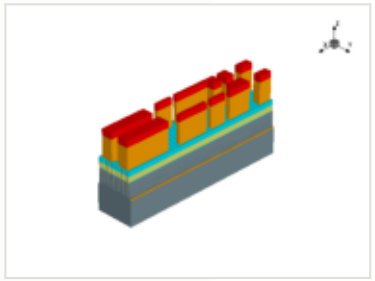

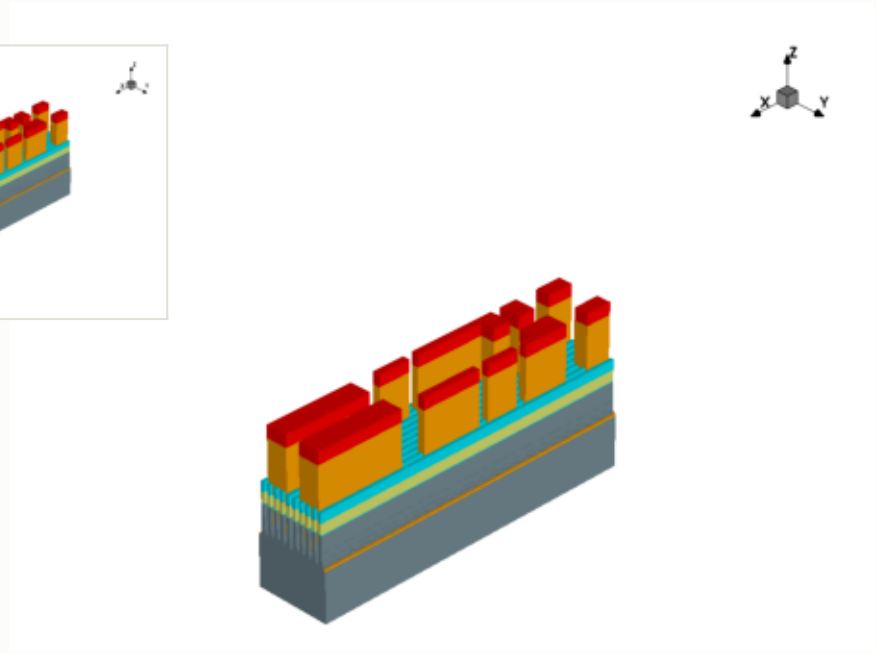

x cut at 0.677 µm

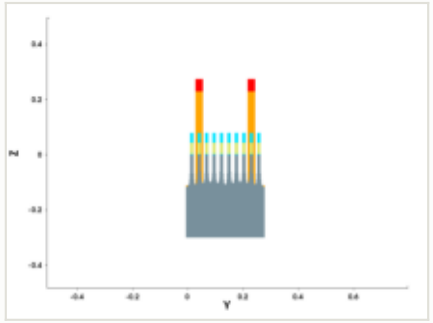

y cut at 0.211 µm

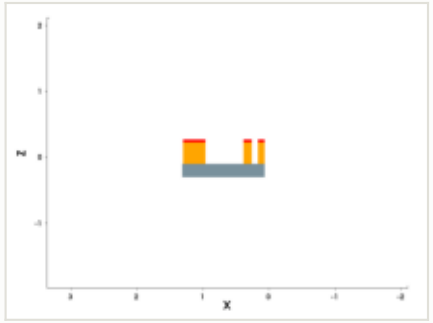

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

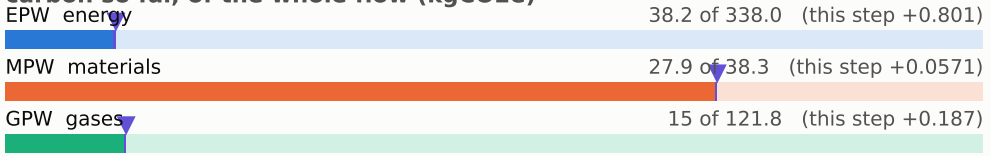

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

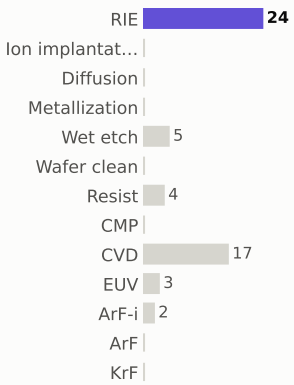

materials deposited (g)

gases emitted (g)

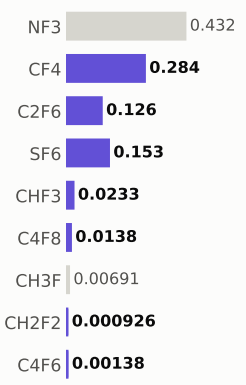

Step #590: Wet_etch

etch_isotropic · Wet_etch

0.169	81.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

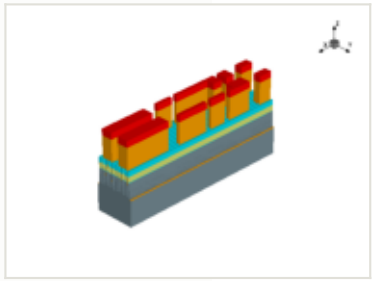

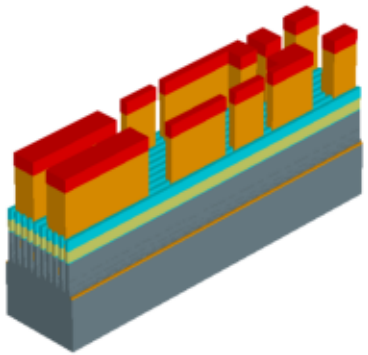

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

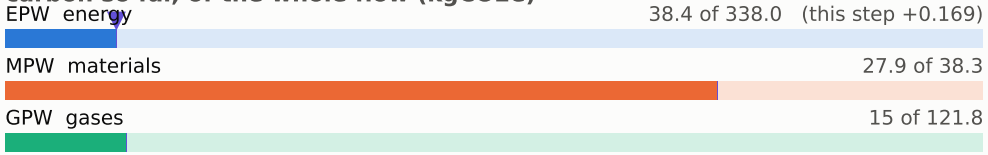

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

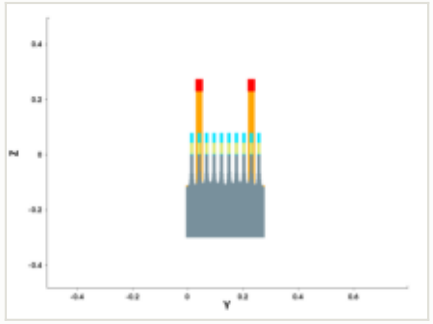

y cut at 0.211 µm

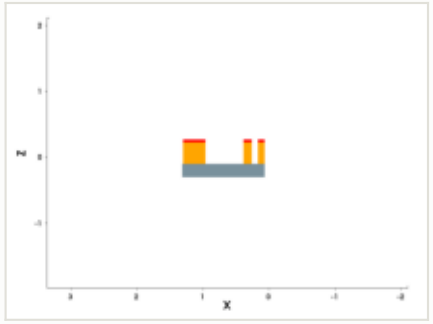

mask for this step

no mask for this step

steps by process area

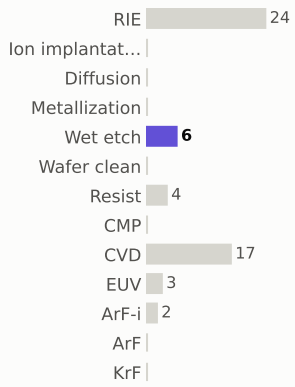

materials deposited (g)

gases emitted (g)

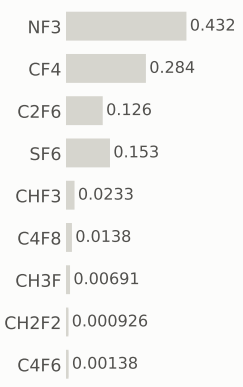

Step #600: RIE

etch_anisotropic · RIE

1.04	82.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

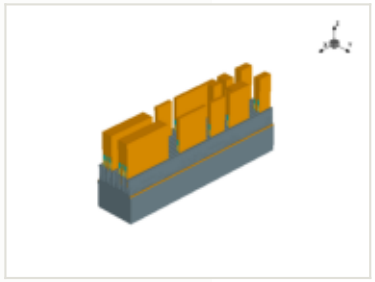

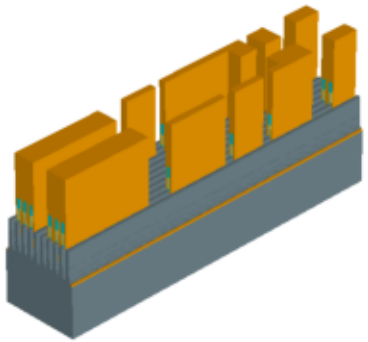

x cut at 0.677 µm

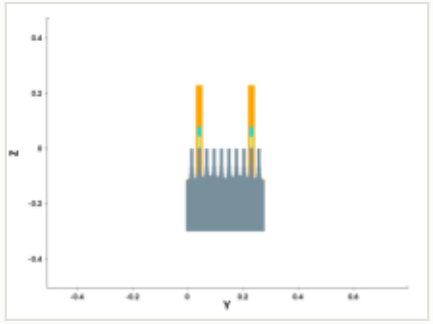

y cut at 0.211 µm

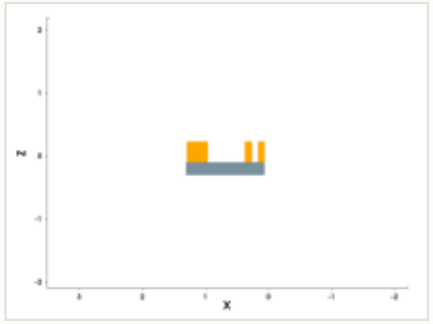

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

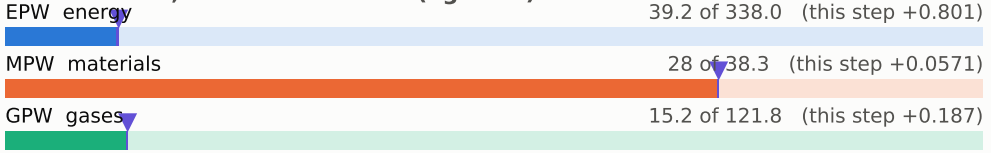

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

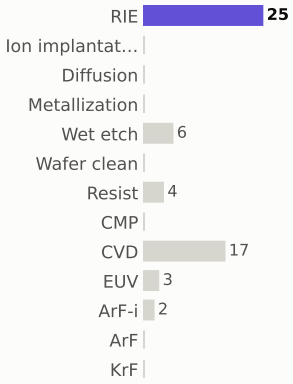

materials deposited (g)

gases emitted (g)

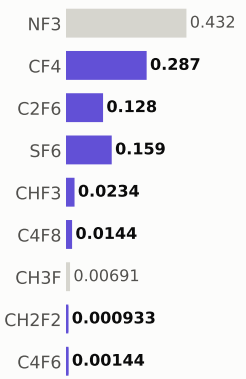

Step #610: Wet_etch

etch_isotropic · Wet_etch

0.169	82.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

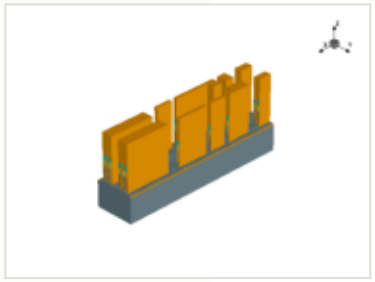

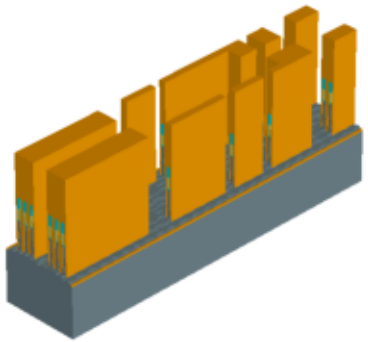

x cut at 0.677 µm

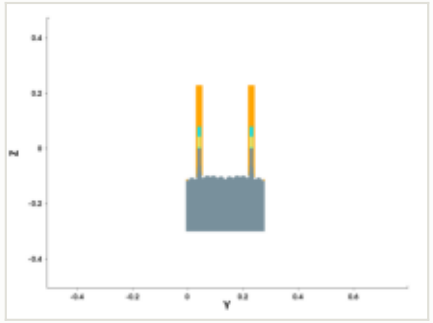

y cut at 0.211 µm

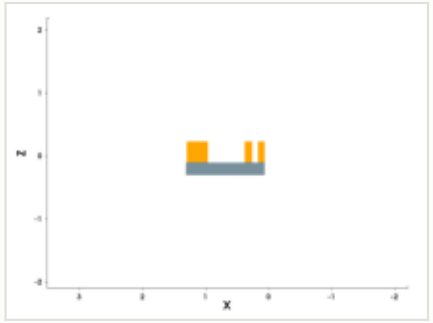

mask for this step

no mask for this step

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

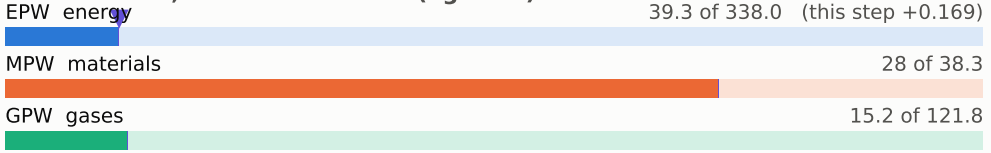

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

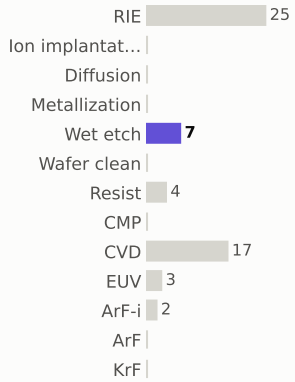

materials deposited (g)

gases emitted (g)

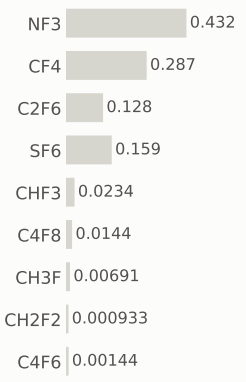

Step #620: RIE

etch_anisotropic · RIE

1.04	83.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

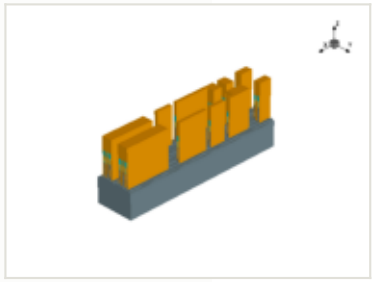

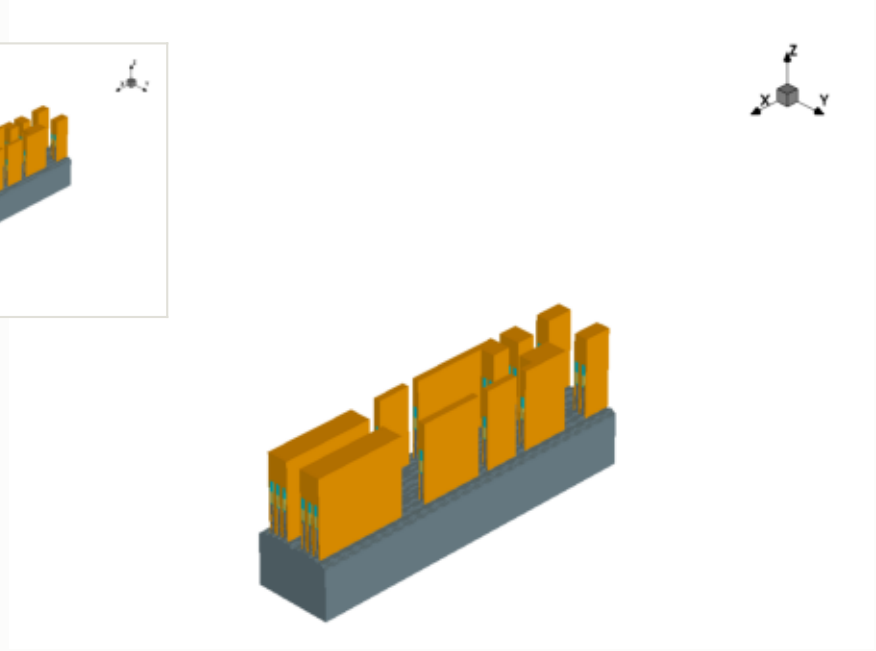

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

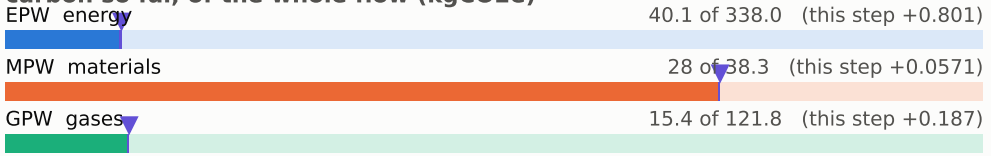

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

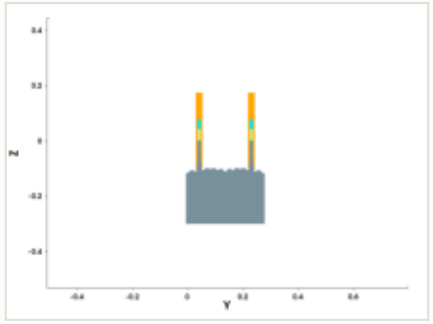

y cut at 0.211 µm

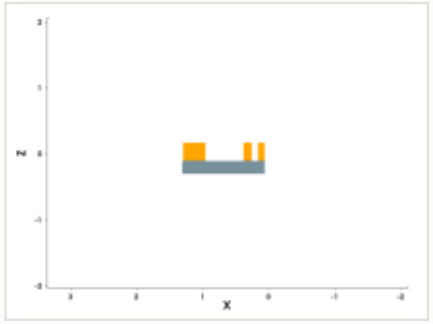

mask for this step

no mask for this step

steps by process area

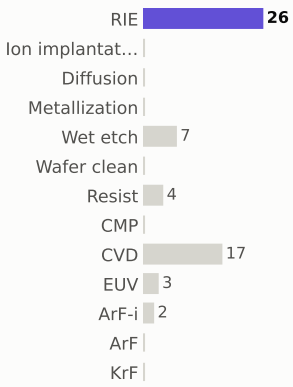

materials deposited (g)

gases emitted (g)

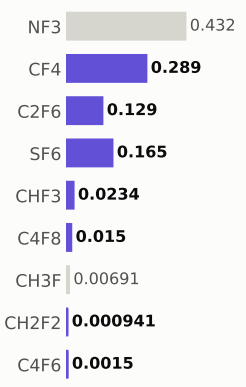

Step #630: RIE

etch_unified · RIE

1.04	84.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

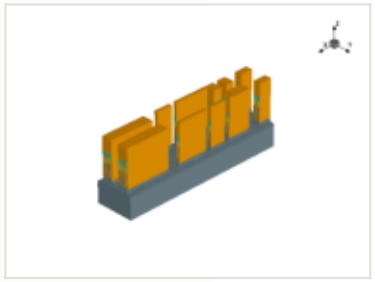

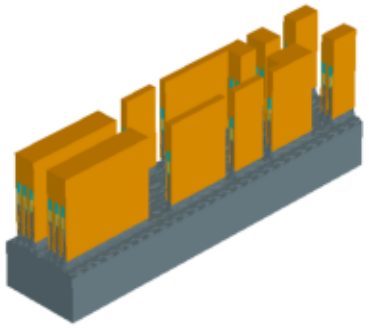

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

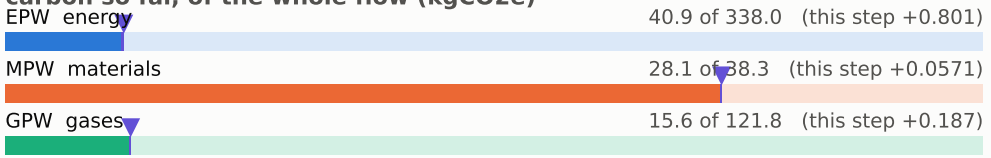

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

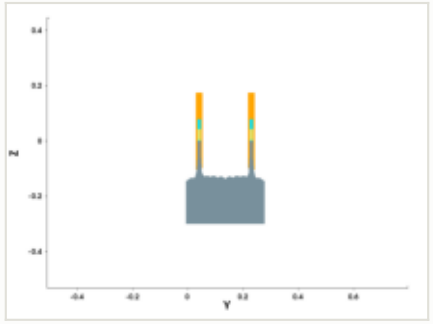

y cut at 0.211 µm

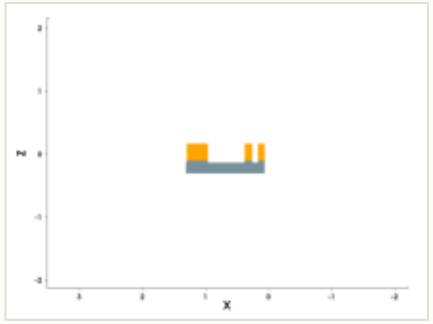

mask for this step

no mask for this step

steps by process area

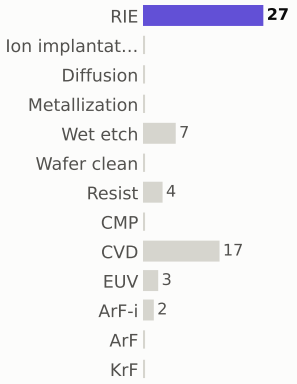

materials deposited (g)

gases emitted (g)

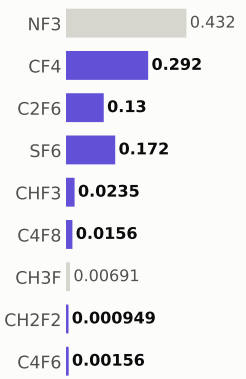

Step #640: Resist

etch_strip · Resist

0.169	84.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

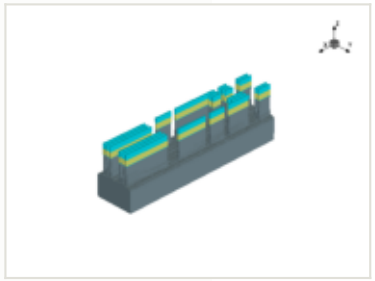



x cut at 0.677 µm

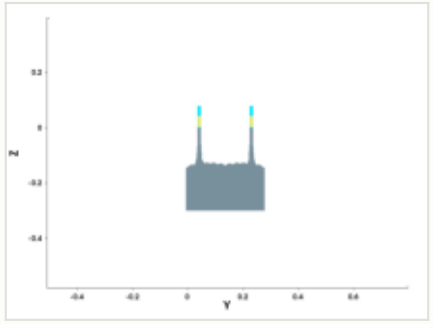

y cut at 0.211 µm

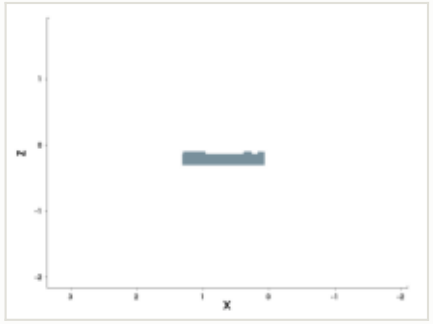

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

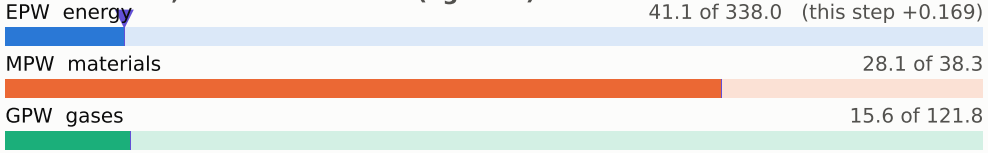

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

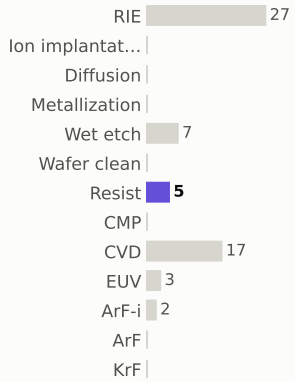

materials deposited (g)

gases emitted (g)

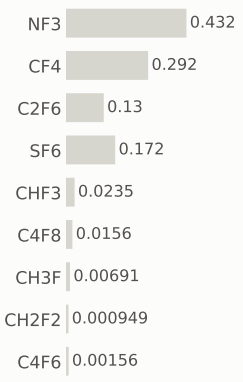

Step #650: RIE

etch_ellipsoidal · RIE

1.04	85.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

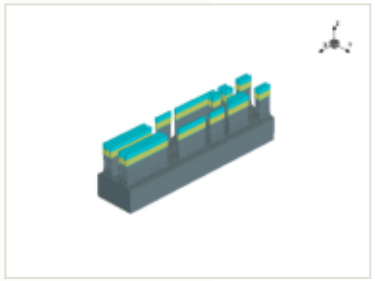

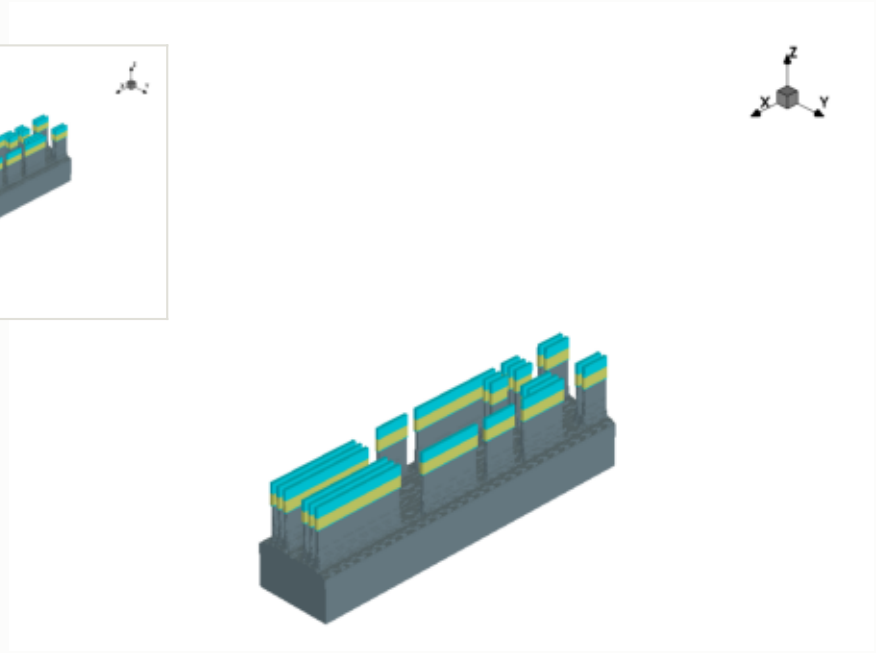

x cut at 0.677 µm

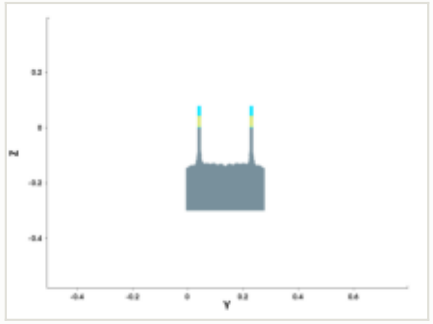

y cut at 0.211 µm

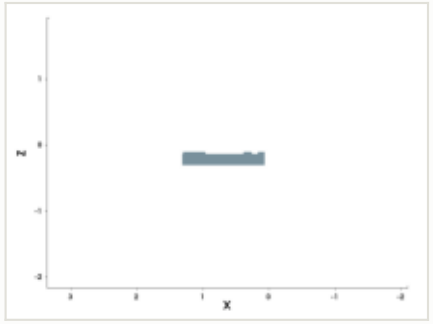

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

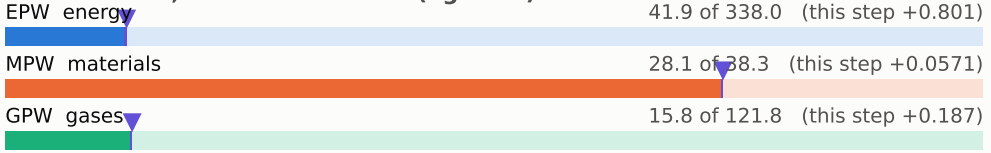

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)

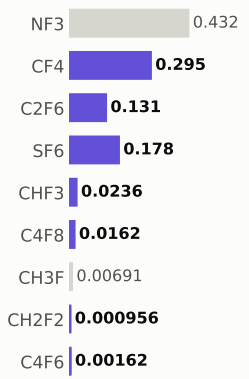

Step #660: CVD

depo_isotropic · CVD

1.31	87.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

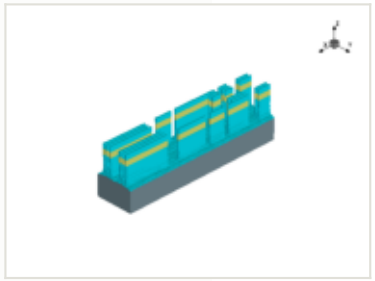



x cut at 0.677 µm

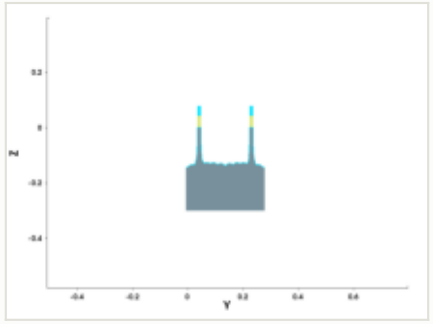

y cut at 0.211 µm

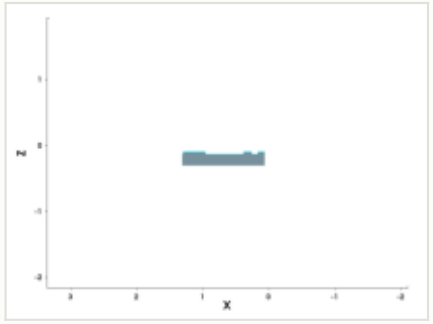

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0023 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 42.6 of 338.0 (this step +0.656)

MPW materials — 28.2 of 28.3 (this step +0.0317)

GPW gases — 16.4 of 121.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

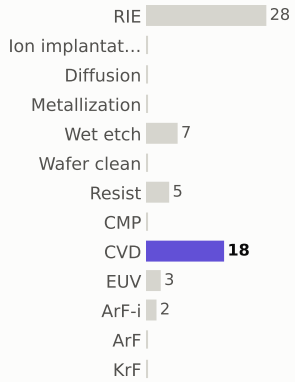

materials deposited (g)

gases emitted (g)

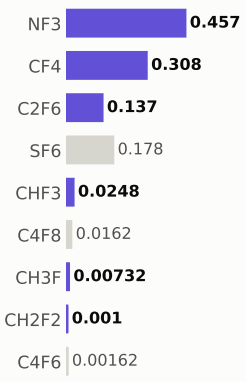

Step #670: CVD

depo_isotropic · CVD

1.31	88.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

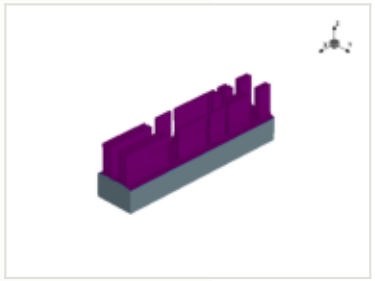

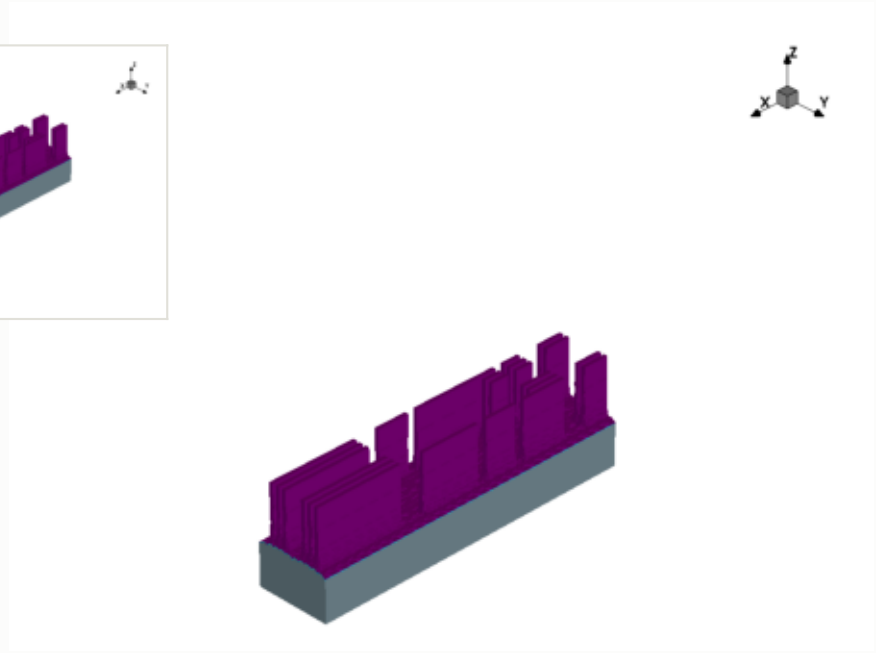

x cut at 0.677 µm

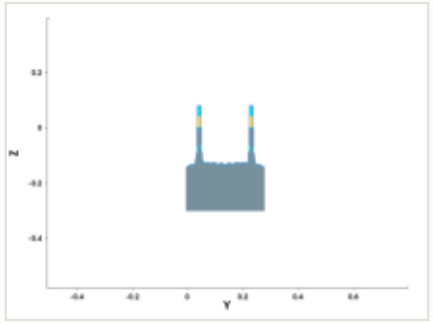

y cut at 0.211 µm

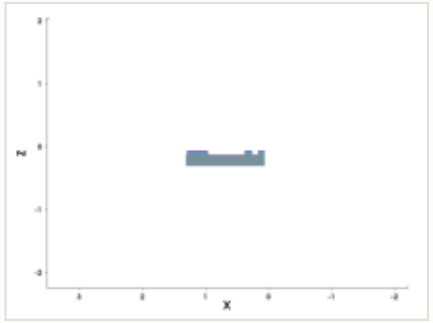

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0015 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

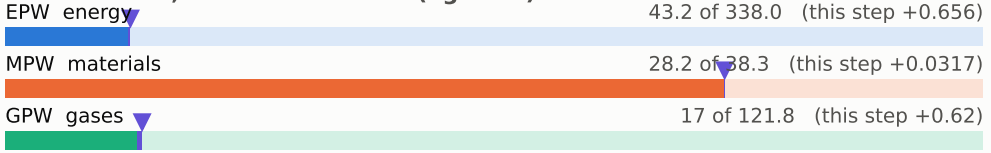

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

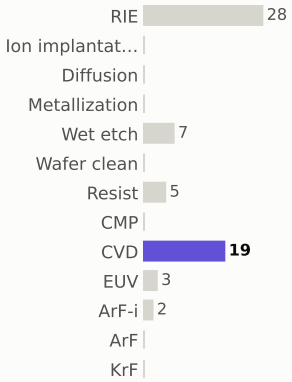

materials deposited (g)

gases emitted (g)

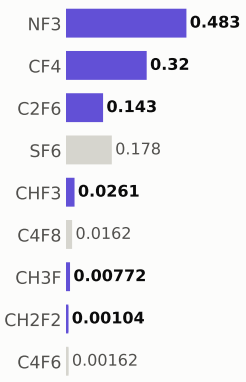

Step #680: Wet_etch

etch_isotropic · Wet_etch

0.169	88.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

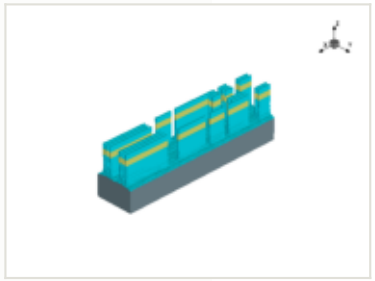



x cut at 0.677 µm

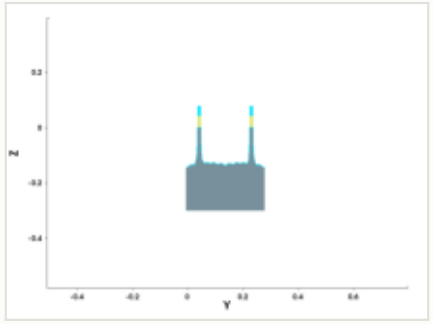

y cut at 0.211 µm

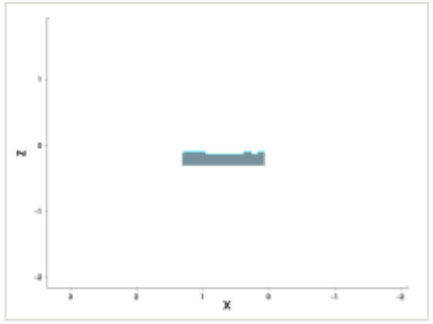

mask for this step

no mask for this step

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

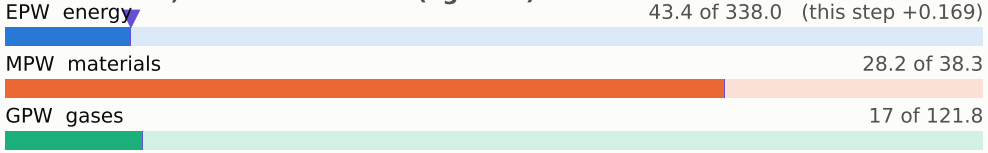

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

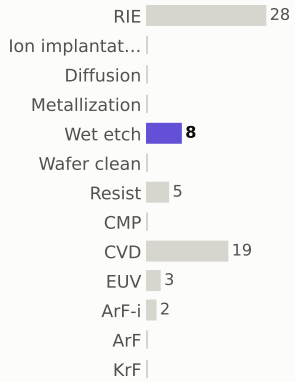

materials deposited (g)

gases emitted (g)

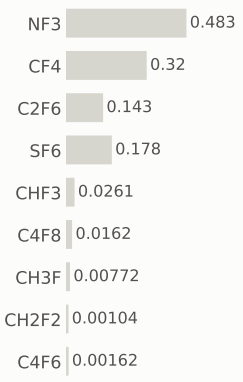

Step #690: CVD

depo_isotropic · CVD

1.31	89.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

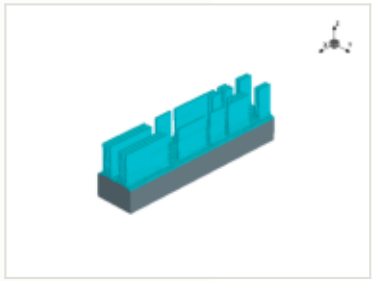



x cut at 0.677 µm

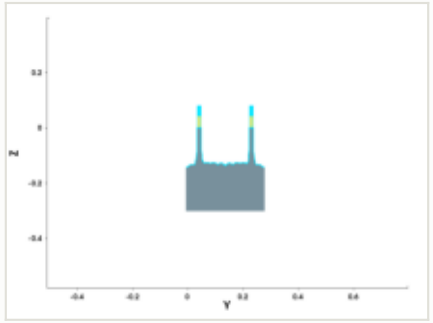

y cut at 0.211 µm

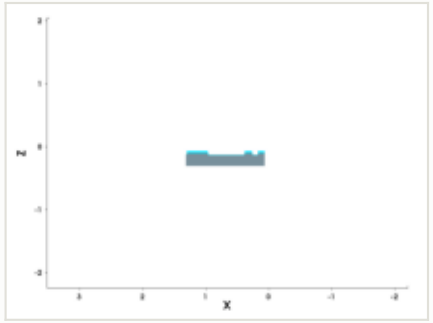

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0015 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

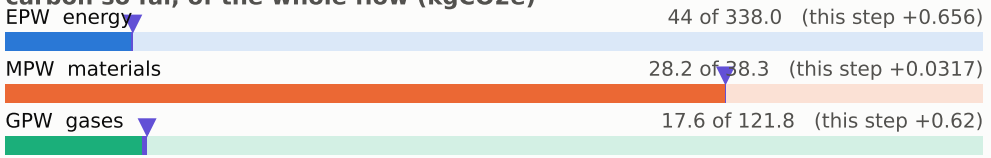

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

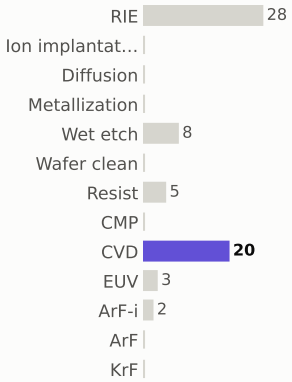

materials deposited (g)

gases emitted (g)

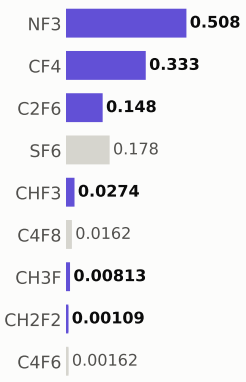

Step #700: CVD

depo_fill · CVD

1.31	91.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

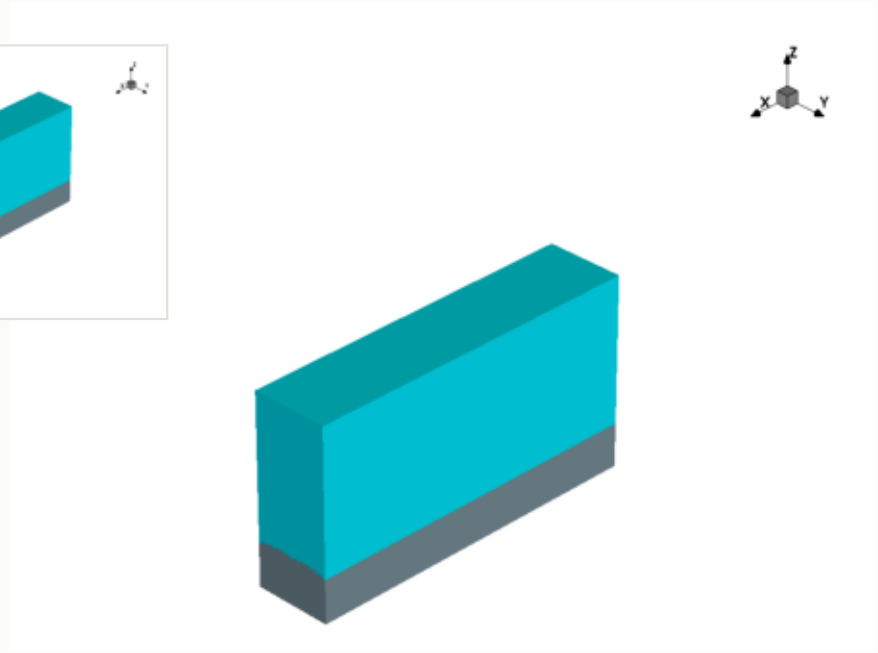

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

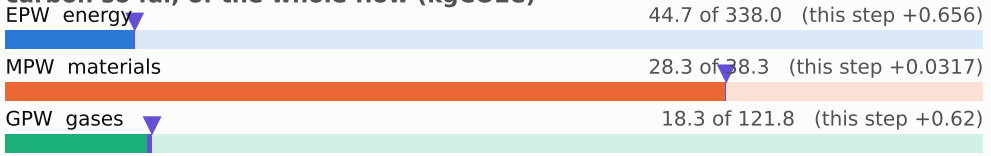

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

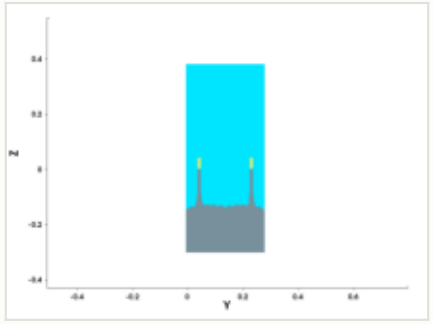

y cut at 0.211 µm

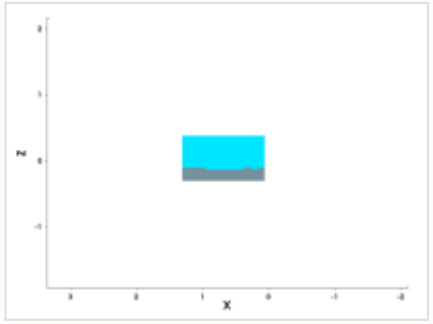

mask for this step

no mask for this step

steps by process area

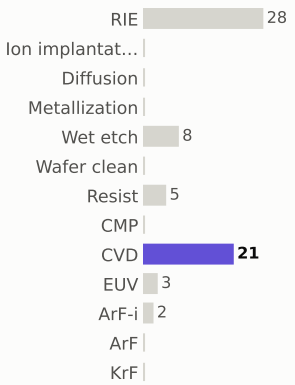

materials deposited (g)

gases emitted (g)

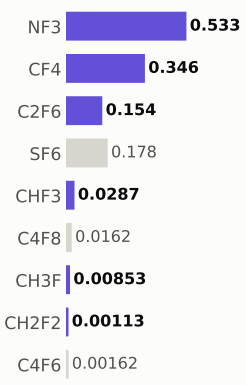

Step #710: CVD

depo_isotropic · CVD

1.31	92.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

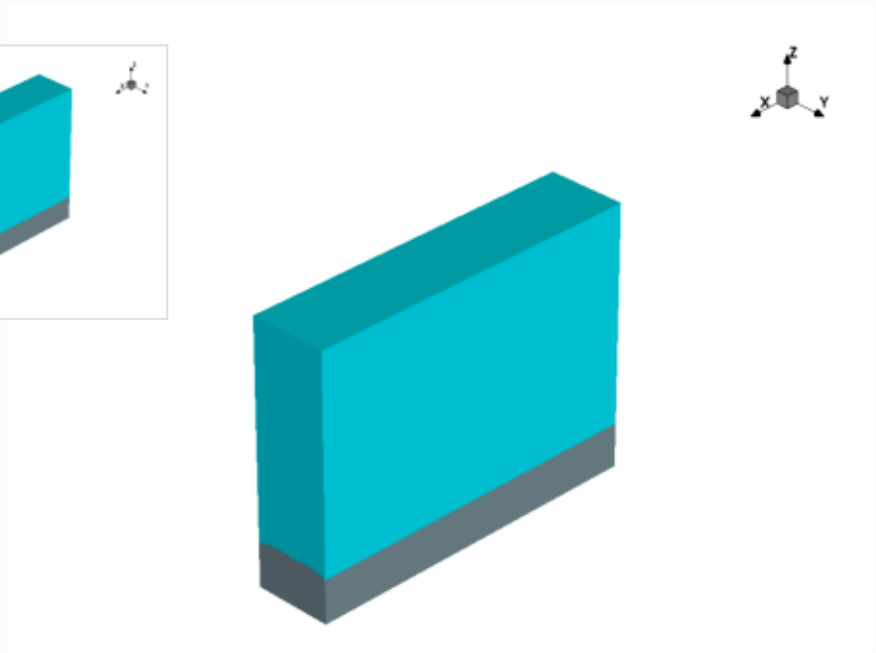

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

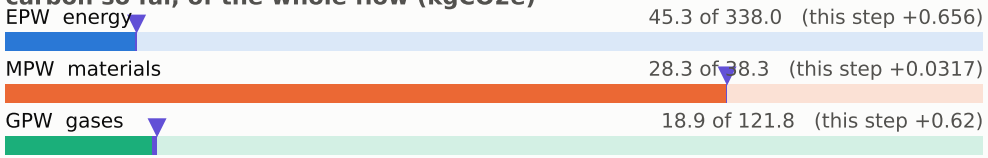

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

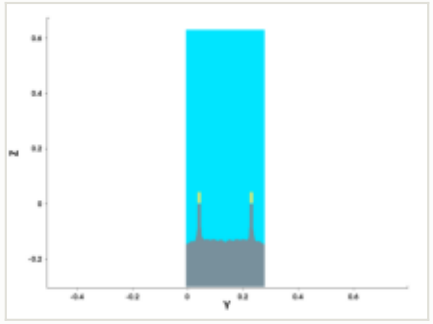

y cut at 0.211 µm

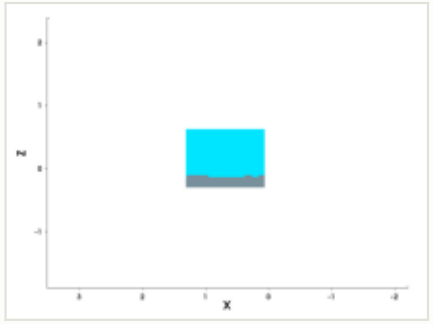

mask for this step

no mask for this step

steps by process area

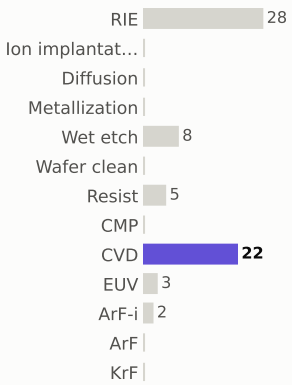

materials deposited (g)

gases emitted (g)



Step #720: CMP

etch_cmp · CMP

0.169	92.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

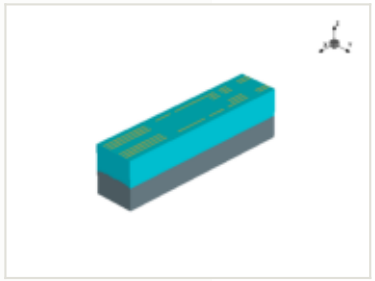

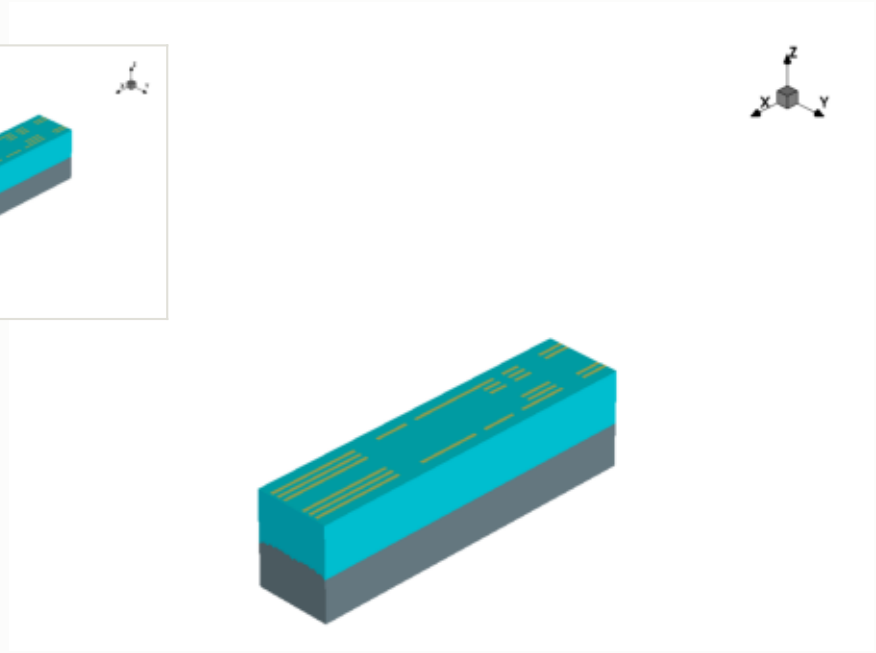

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

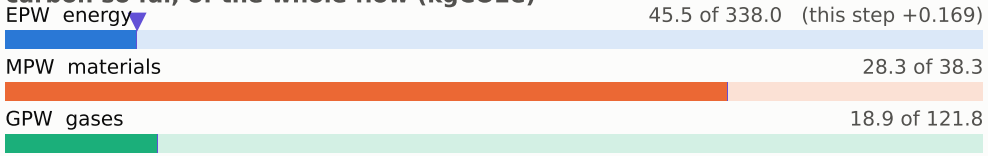

embodied carbon up to each step (kgCO2e per wafer)

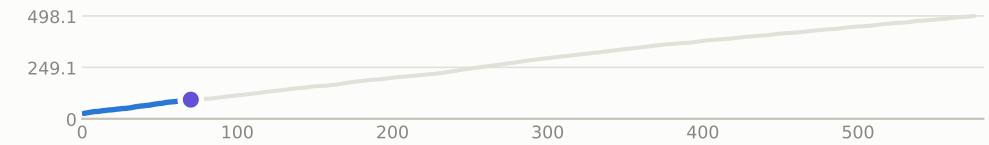

x cut at 0.677 µm

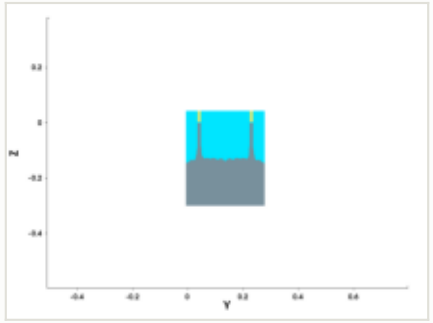

y cut at 0.211 µm

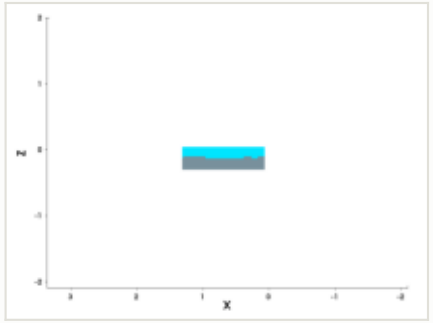

mask for this step

no mask for this step

steps by process area

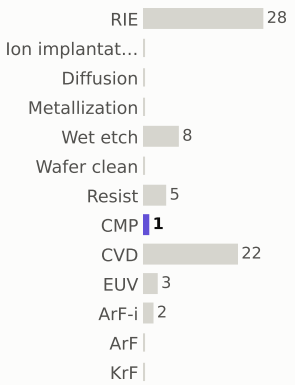

materials deposited (g)

gases emitted (g)

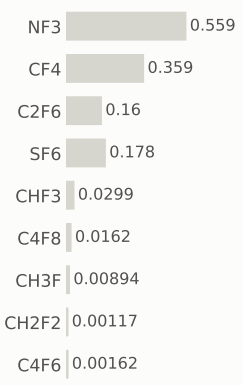

Step #730: RIE

etch_anisotropic · RIE

1.04	93.7	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

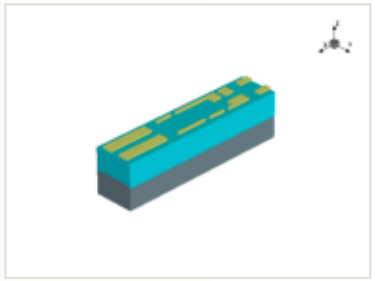

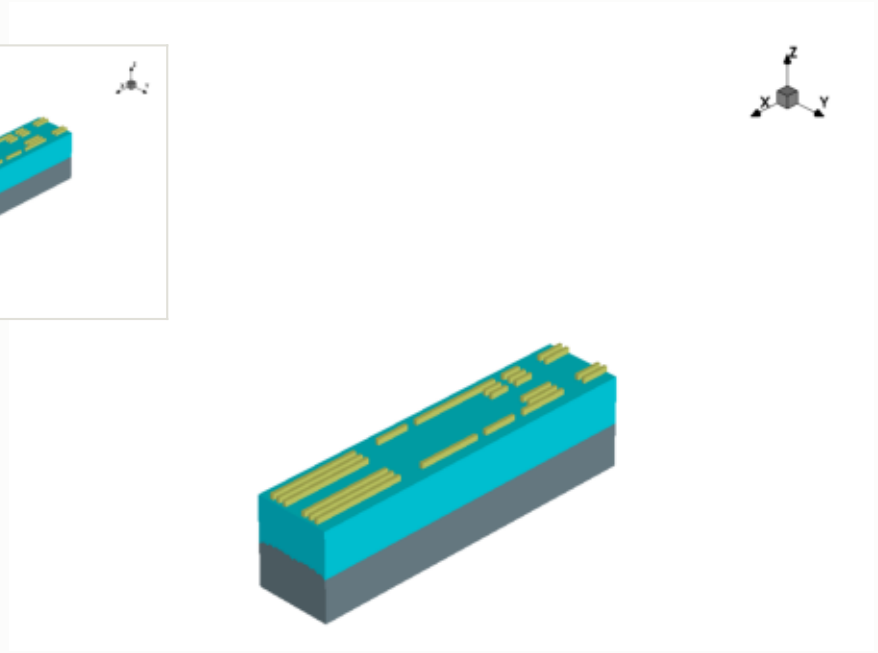

x cut at 0.677 µm

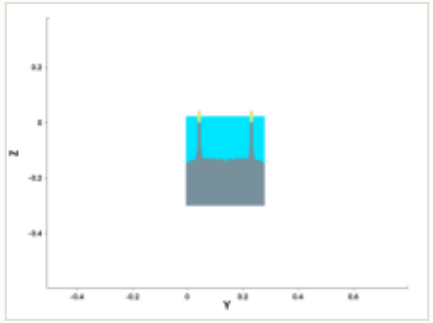

y cut at 0.211 µm

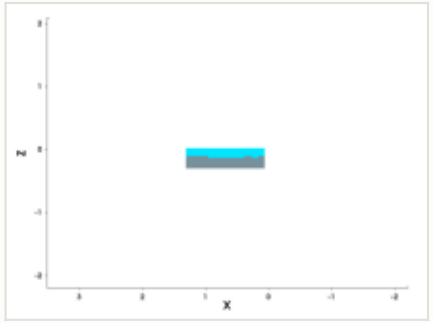

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

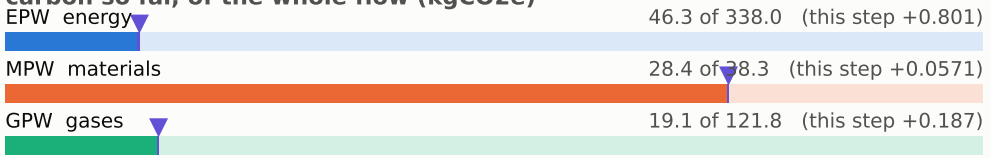

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)

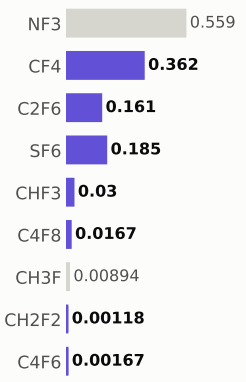

Step #740: Wet_etch

etch_isotropic · Wet_etch

0.169	93.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

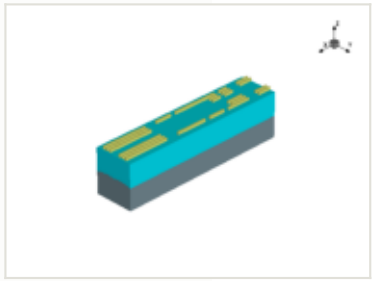

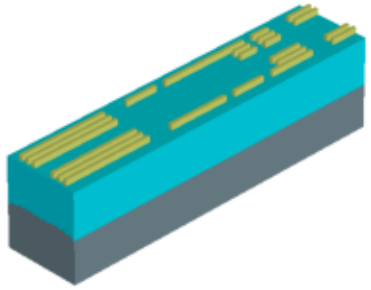

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

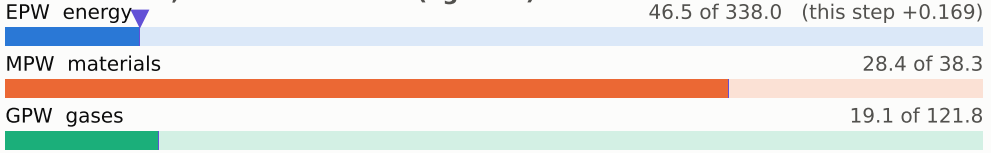

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

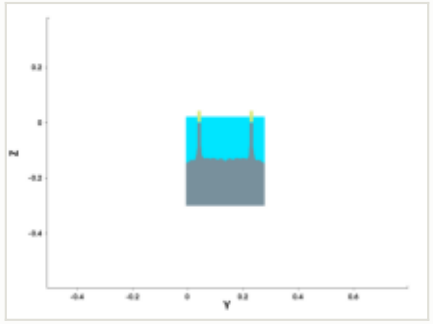

y cut at 0.211 µm

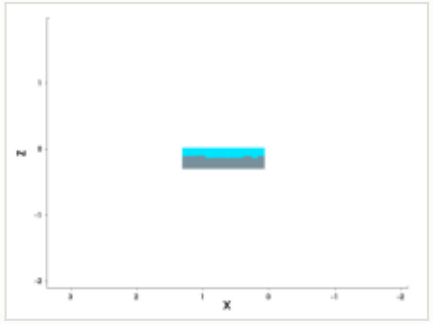

mask for this step

no mask for this step

steps by process area

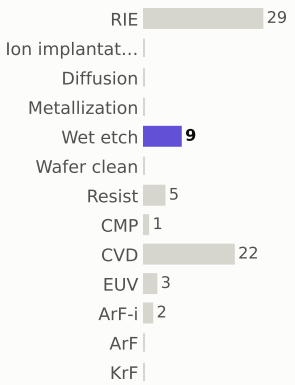

materials deposited (g)

gases emitted (g)

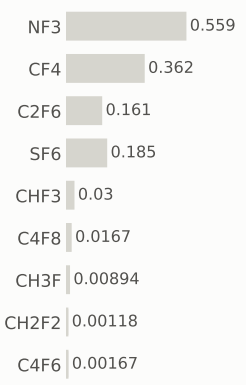

Step #750: RIE

etch_microloading · RIE

1.04	95	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

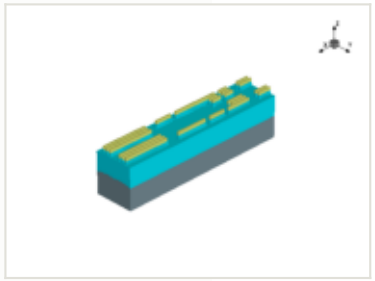

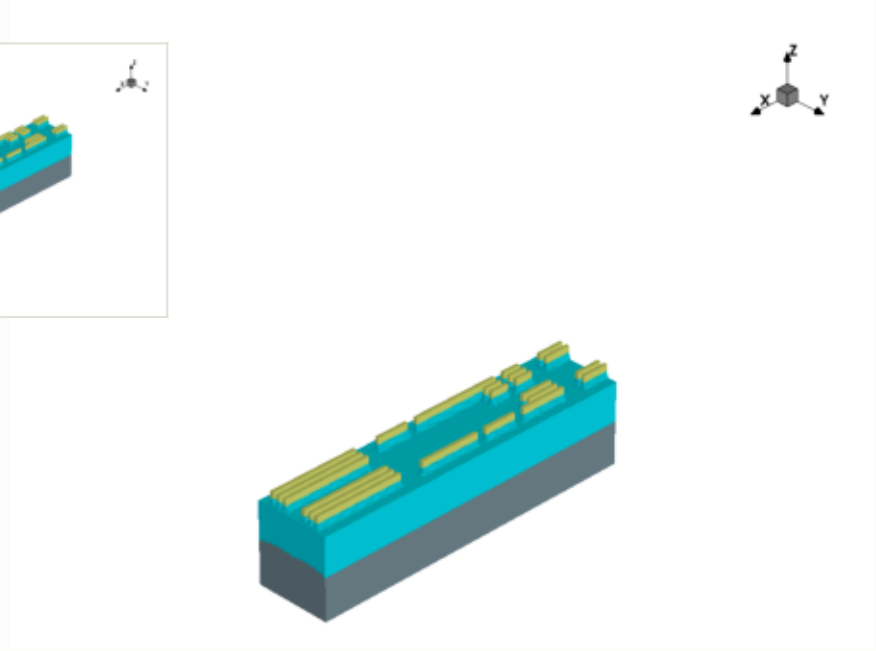

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

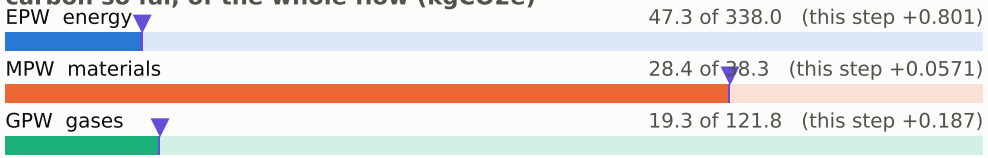

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

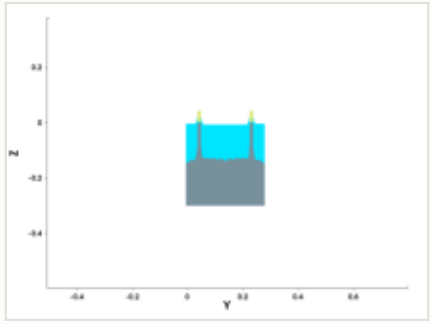

y cut at 0.211 µm

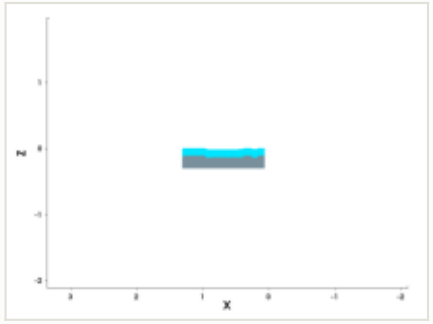

mask for this step

no mask for this step

steps by process area

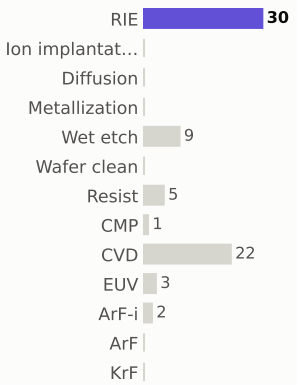

materials deposited (g)

gases emitted (g)

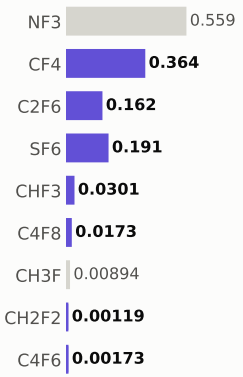

Step #760: Wet_etch

etch_strip · Wet_etch

0.169	95.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

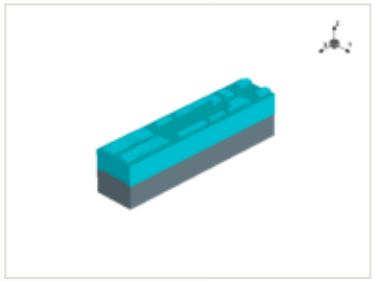

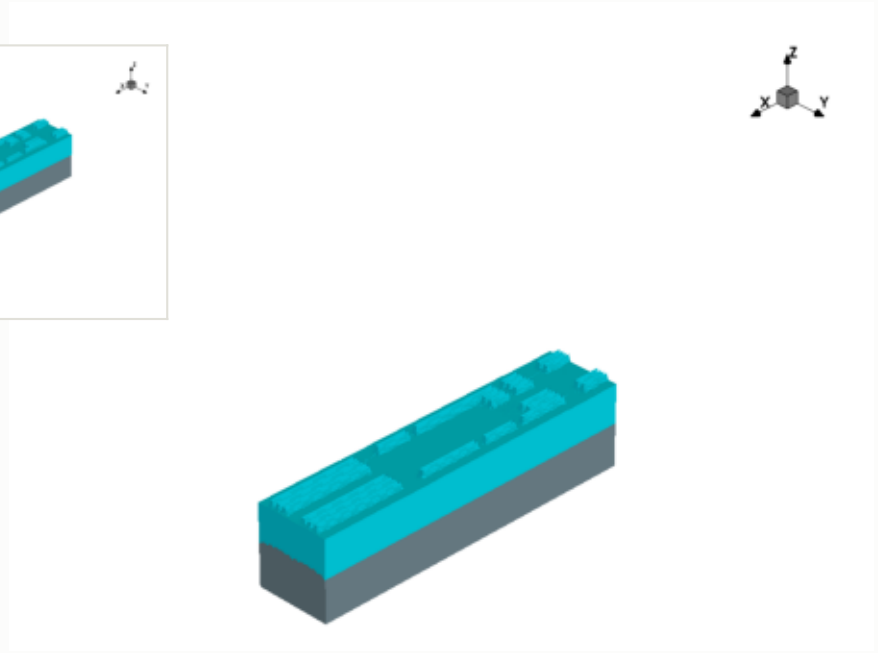

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

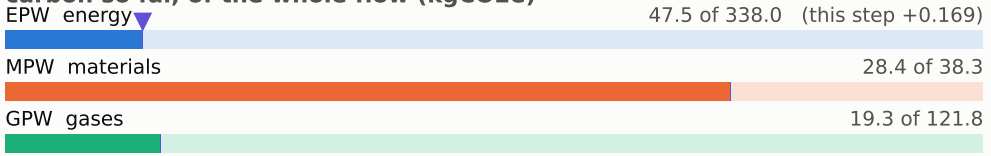

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

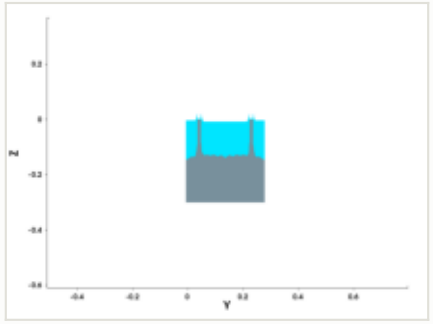

y cut at 0.211 µm

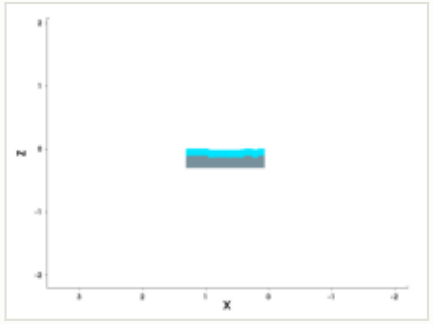

mask for this step

no mask for this step

steps by process area

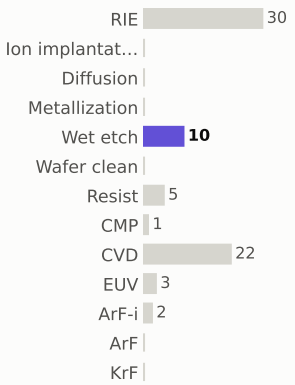

materials deposited (g)



gases emitted (g)

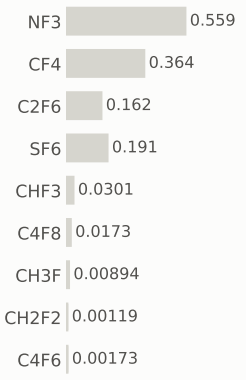

Step #770: KrF

litho_patterning · KrF

0.199	95.3	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

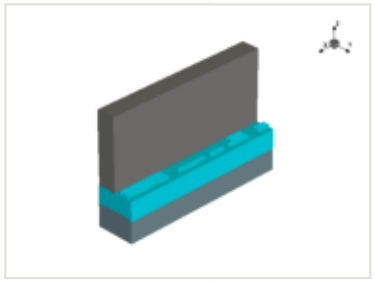

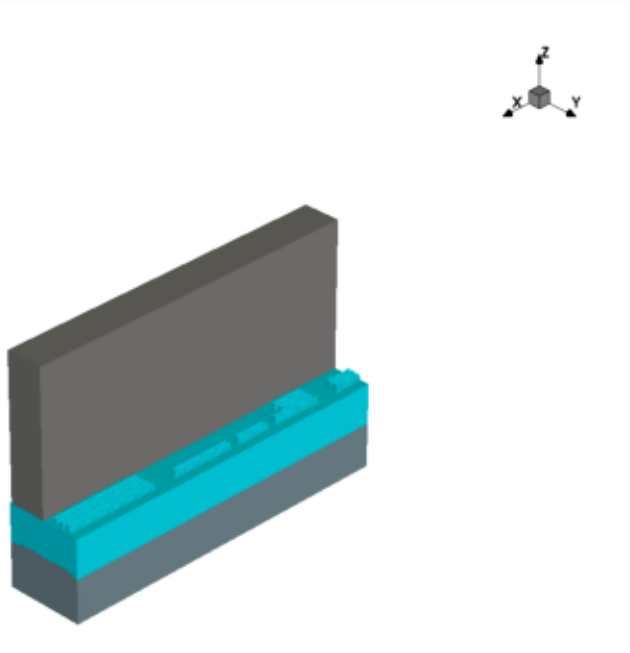

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

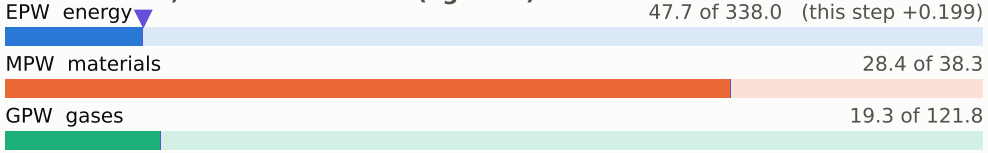

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

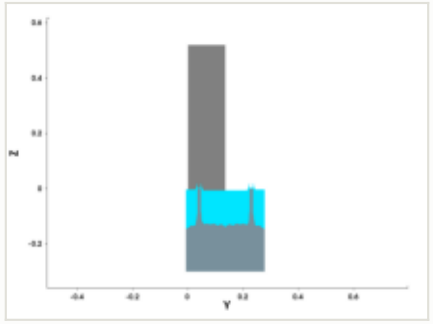

y cut at 0.211 µm

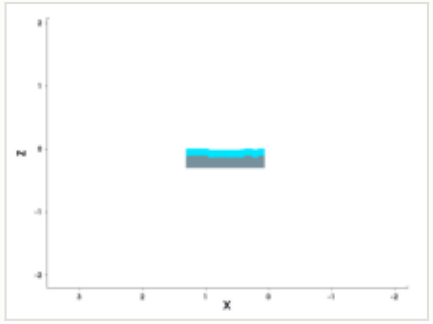

mask: layer 12:0, positive (GDSII)

steps by process area

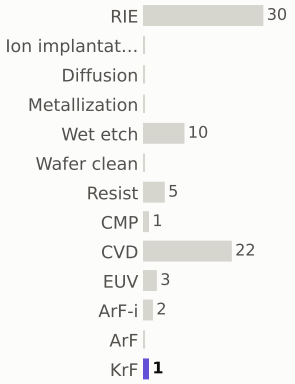

materials deposited (g)

gases emitted (g)

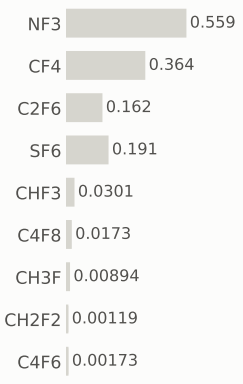

Step #780: Resist

etch_strip · Resist

0.169	95.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

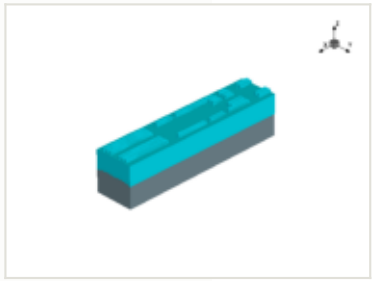

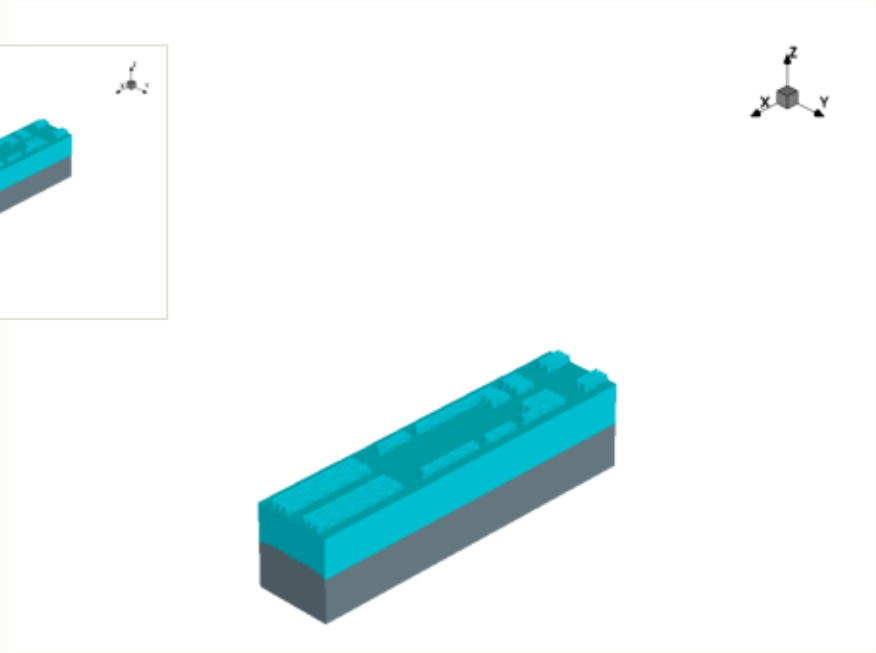

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

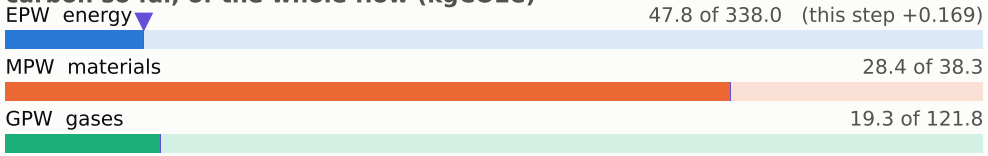

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

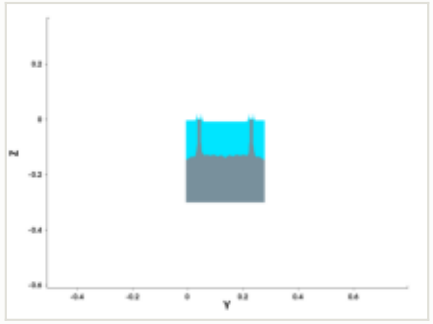

y cut at 0.211 µm

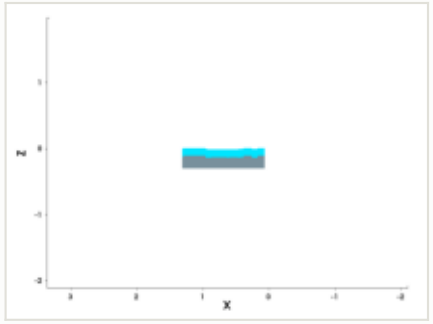

mask for this step

no mask for this step

steps by process area

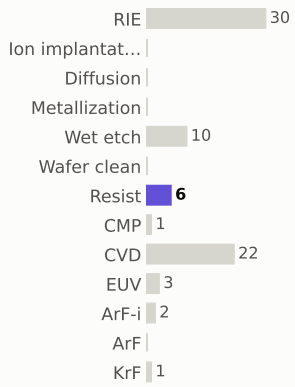

materials deposited (g)



gases emitted (g)

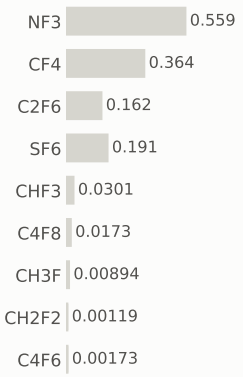

Step #790: KrF

litho_patterning · KrF

0.199	95.7	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

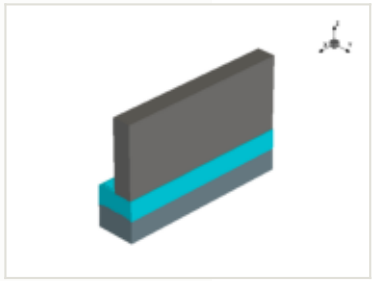

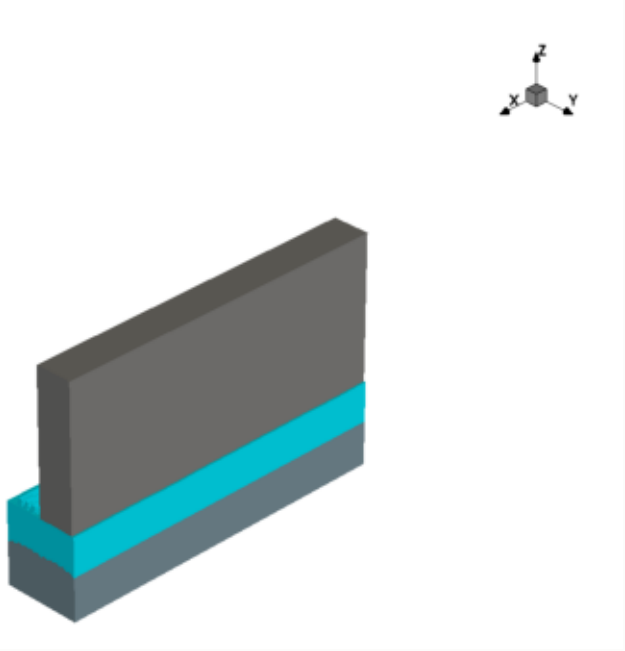

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

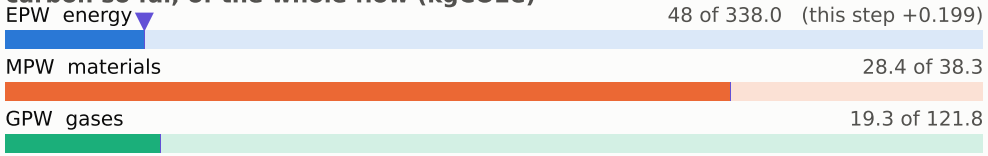

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

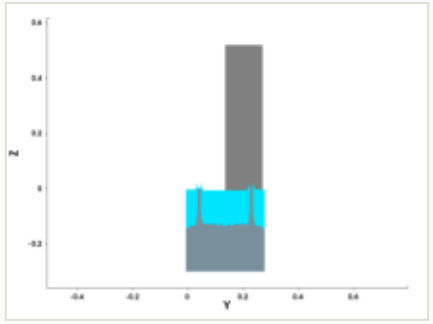

y cut at 0.211 µm

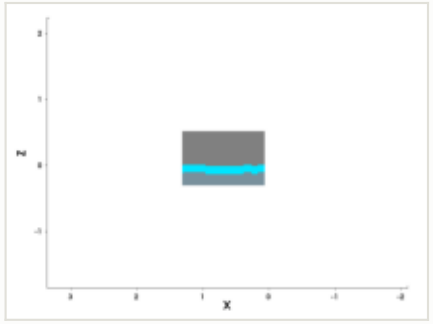

mask: layer 1:0, positive (GDSII)

steps by process area

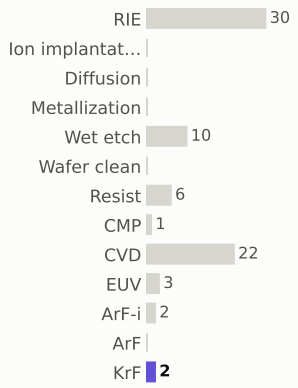

materials deposited (g)

gases emitted (g)

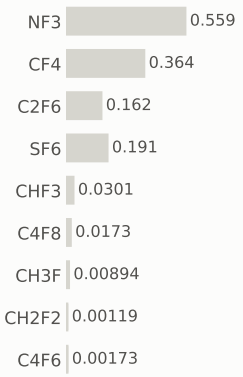

Step #800: Resist

etch_strip · Resist

0.169	95.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

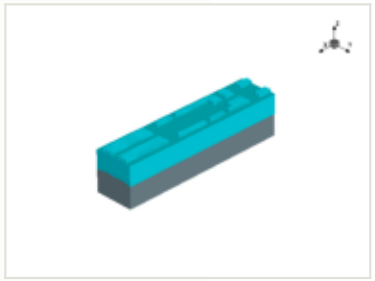

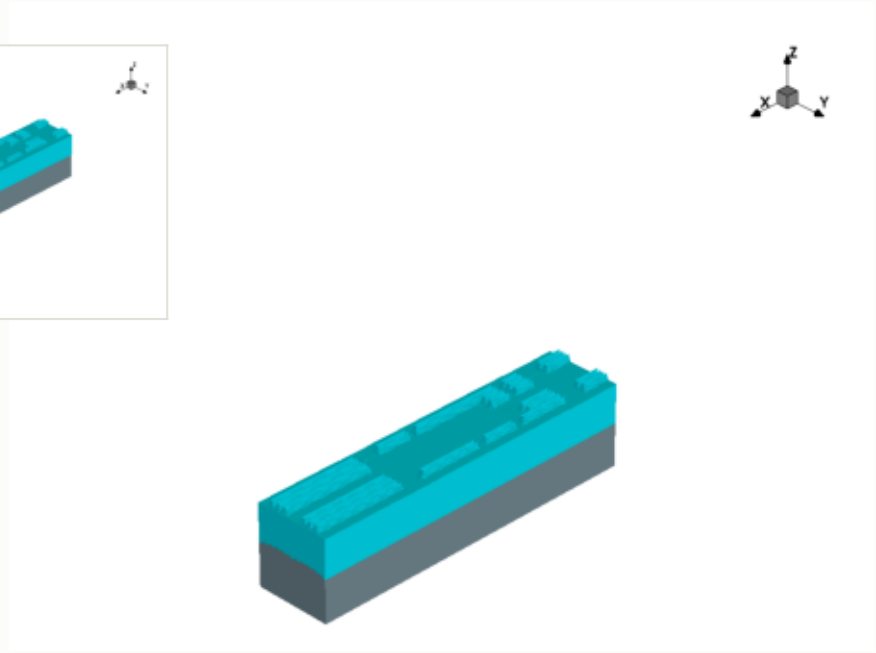

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

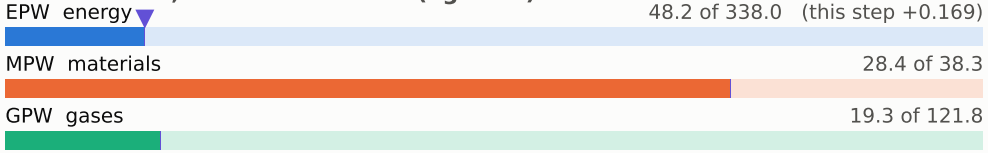

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

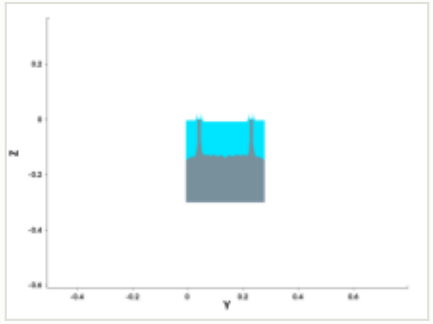

y cut at 0.211 µm

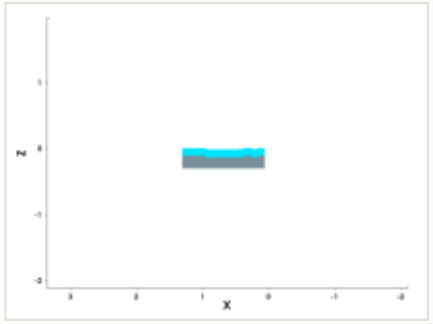

mask for this step

no mask for this step

steps by process area

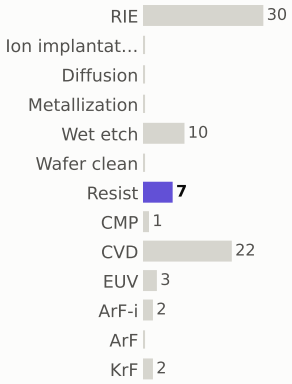

materials deposited (g)

gases emitted (g)

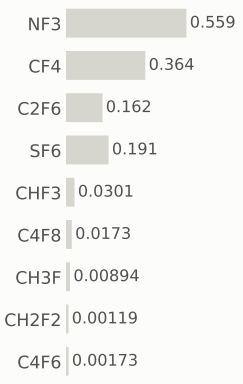

Step #810: RIE

etch_microloading · RIE

1.04	96.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

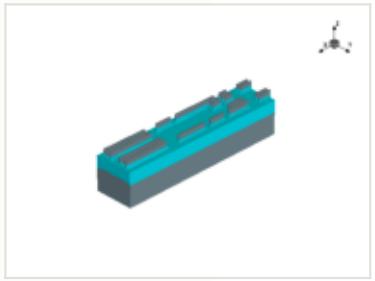

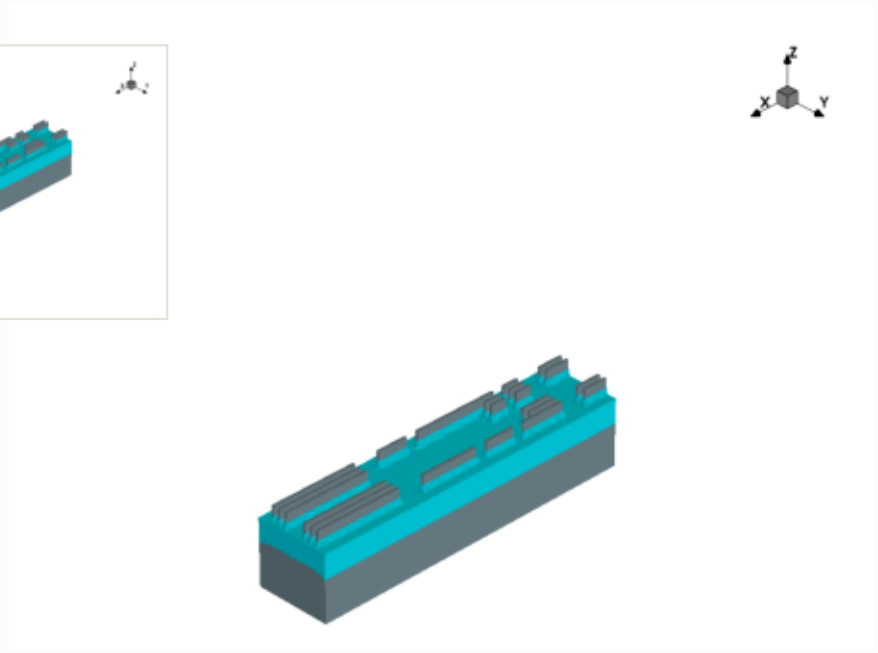

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

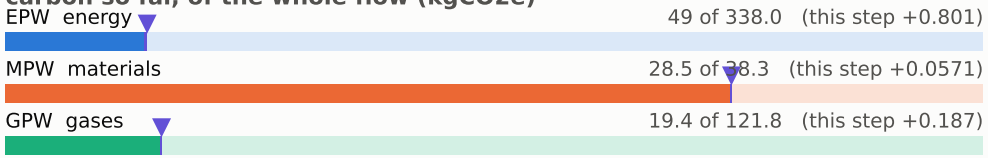

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

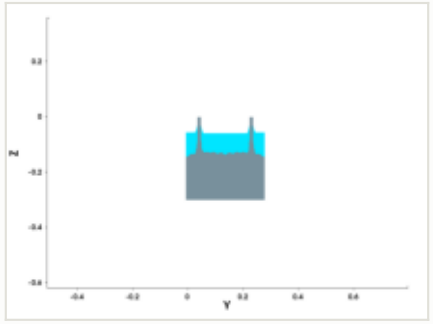

y cut at 0.211 µm

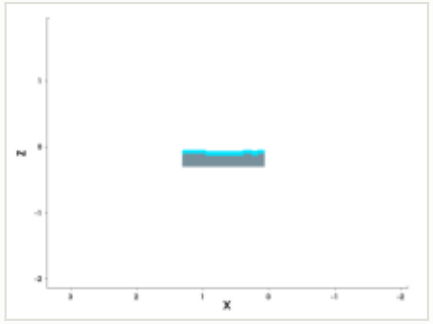

mask for this step

no mask for this step

steps by process area

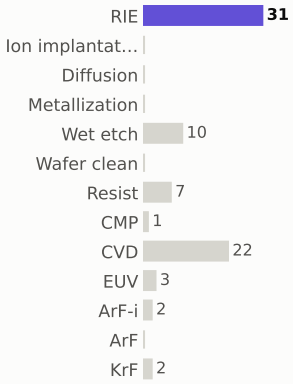

materials deposited (g)

gases emitted (g)

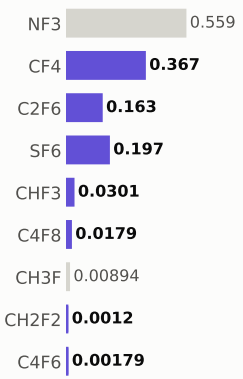

Step #820: Wet_etch

etch_isotropic · Wet_etch

0.169	97.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

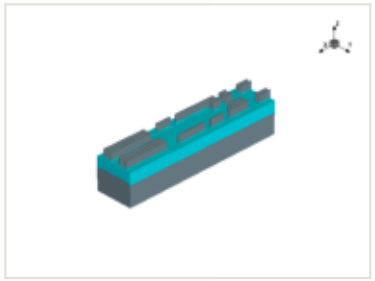

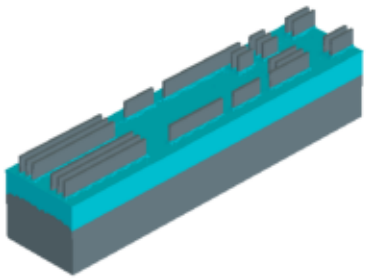

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

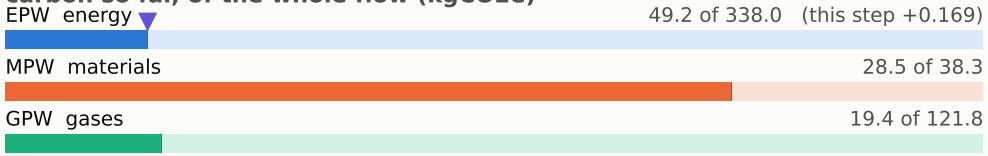

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

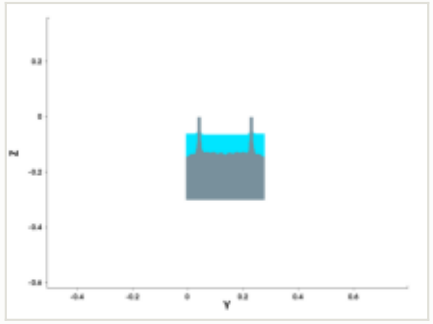

y cut at 0.211 µm

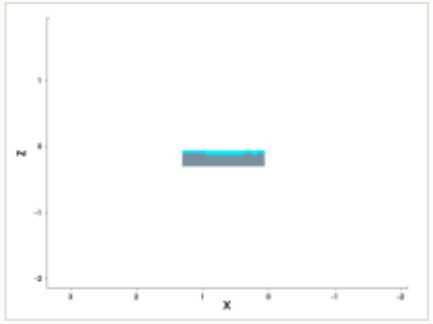

mask for this step

no mask for this step

steps by process area

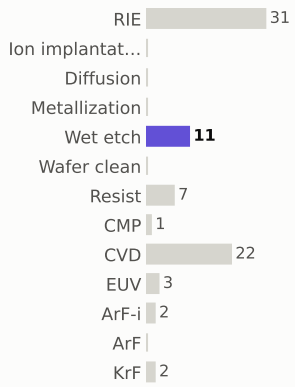

materials deposited (g)

gases emitted (g)

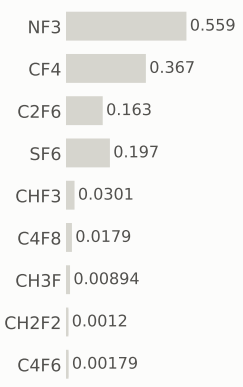

Step #830: Wet_etch

etch_isotropic · Wet_etch

0.169	97.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

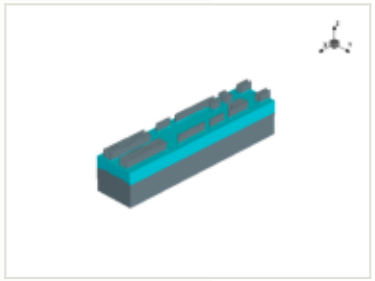

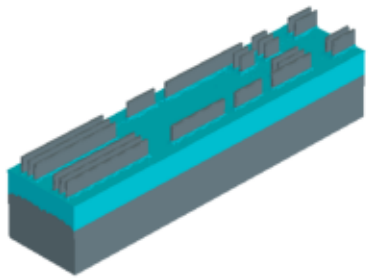

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

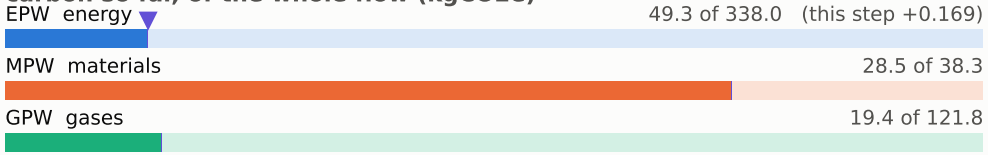

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

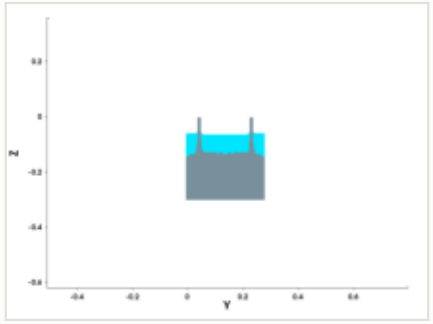

y cut at 0.211 µm

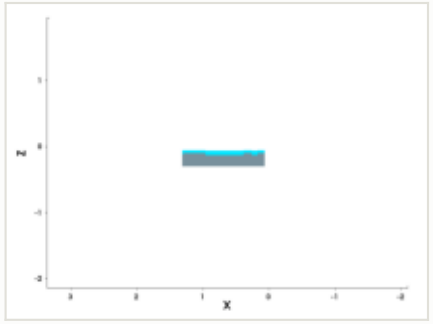

mask for this step

no mask for this step

steps by process area

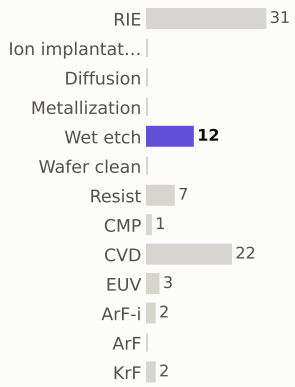

materials deposited (g)

gases emitted (g)

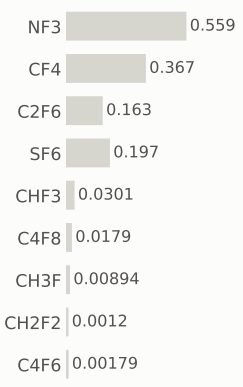

Step #840: CVD

depo_isotropic · CVD

1.31	98.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

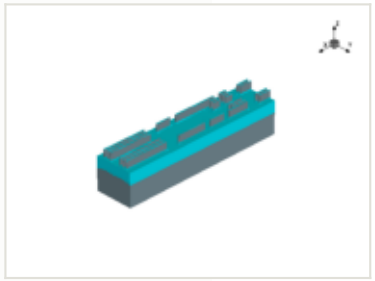

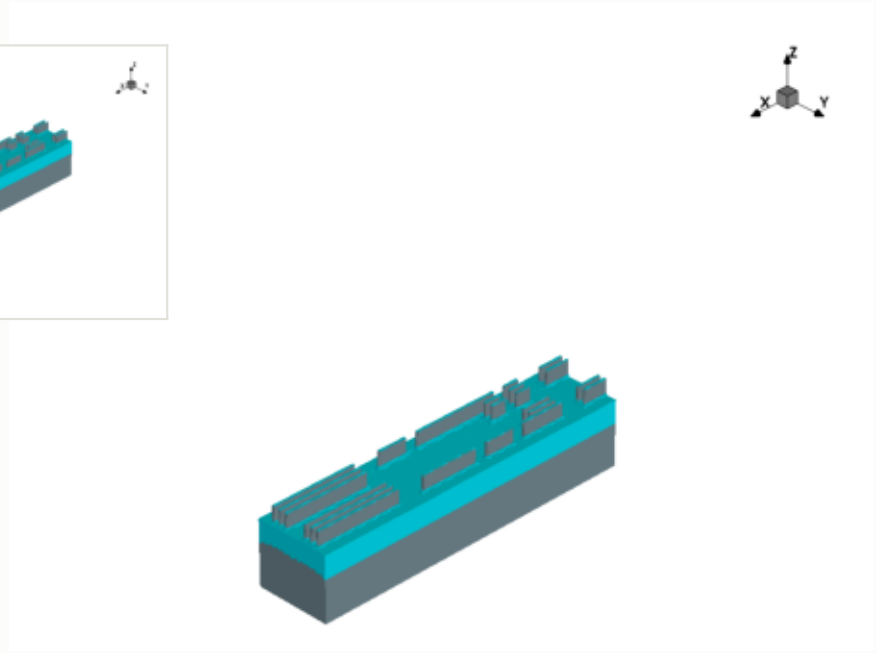

x cut at 0.677 µm

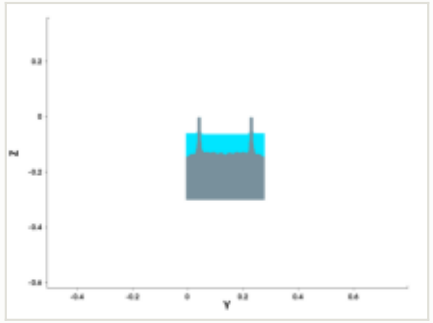

y cut at 0.211 µm

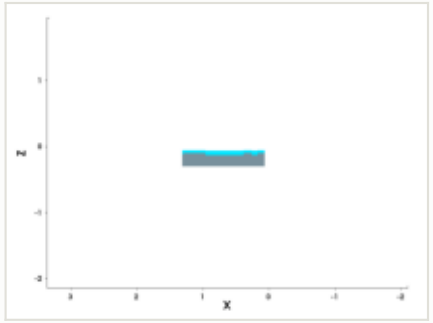

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

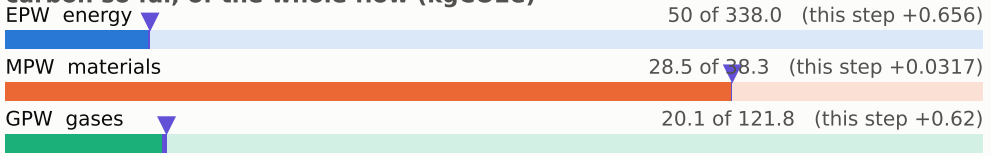

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

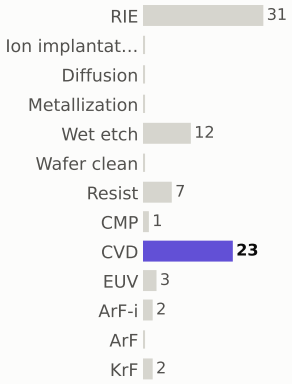

materials deposited (g)

gases emitted (g)

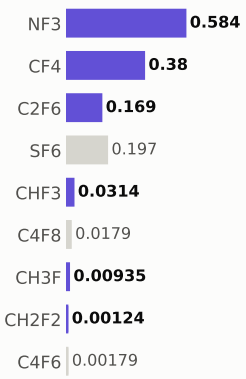

Step #850: Wet_etch

etch_isotropic · Wet_etch

0.169	98.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

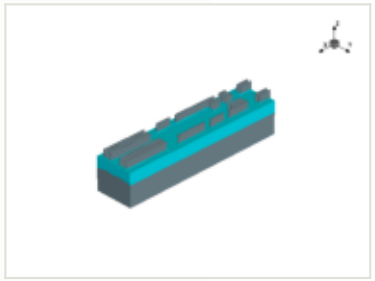

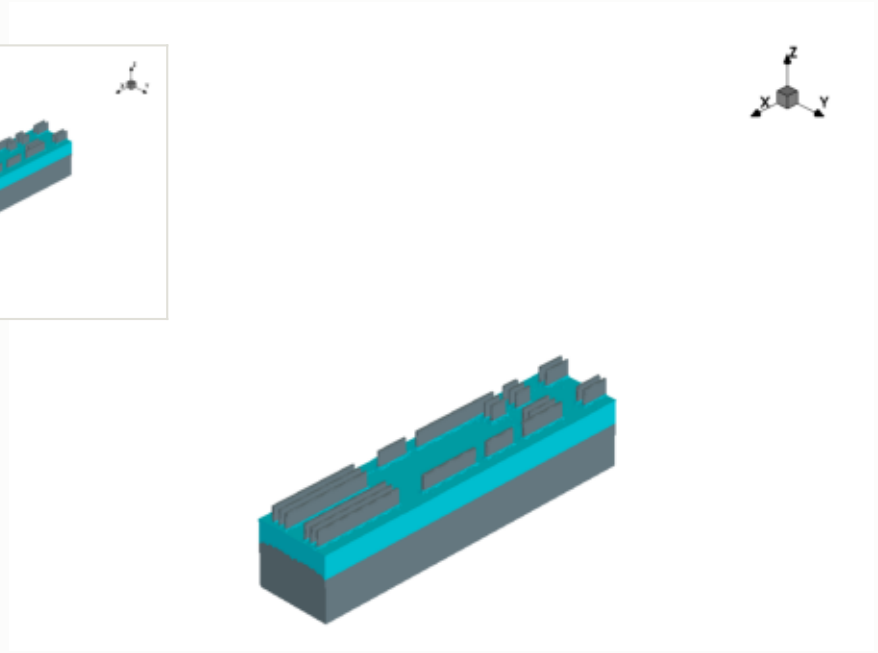

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

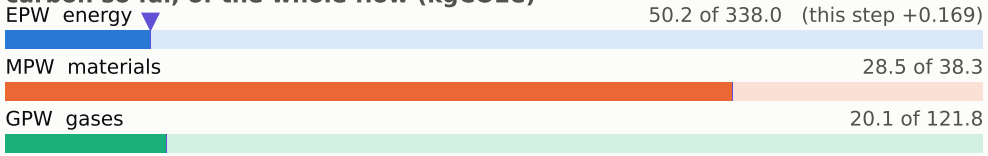

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

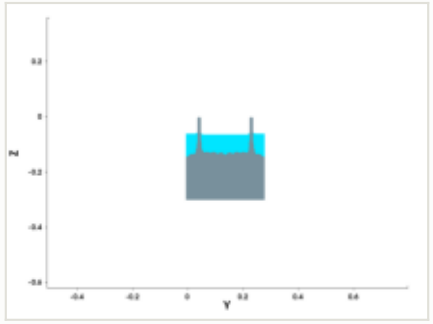

y cut at 0.211 µm

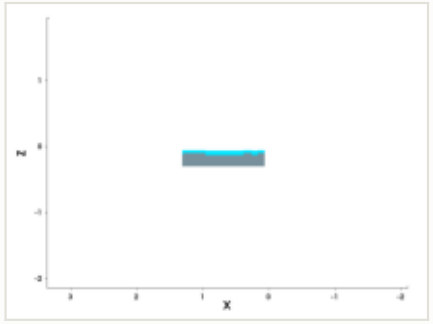

mask for this step

no mask for this step

steps by process area

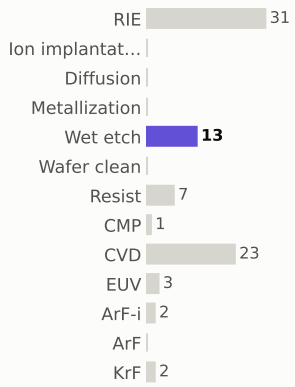

materials deposited (g)



gases emitted (g)

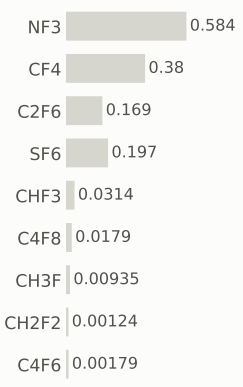

Step #870: Wet_etch

etch_isotropic · Wet_etch

0.169	98.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

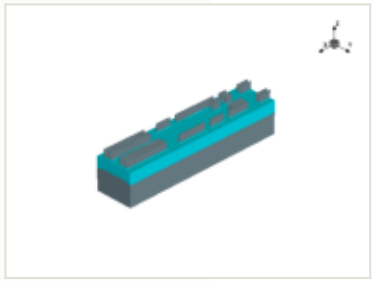

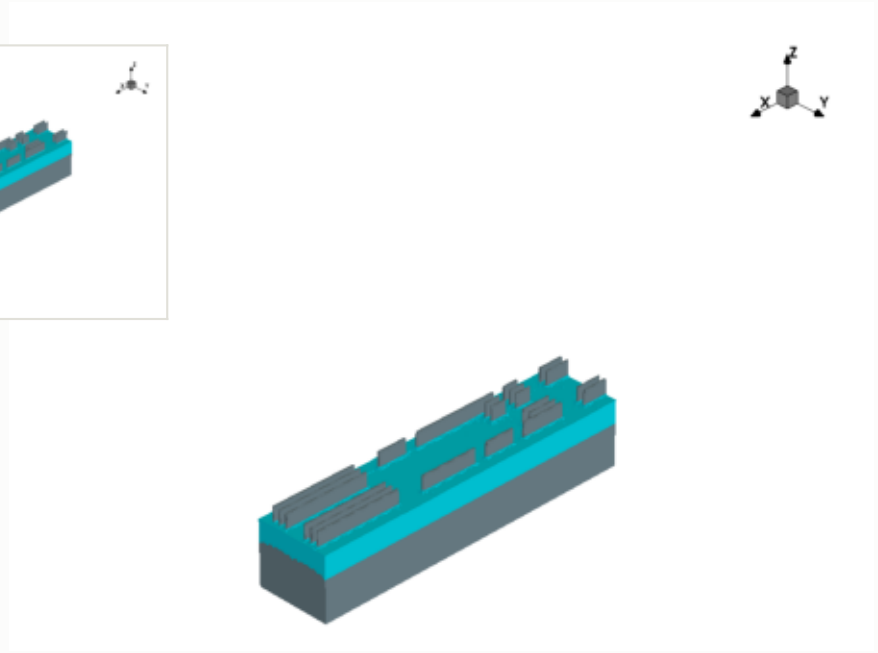

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

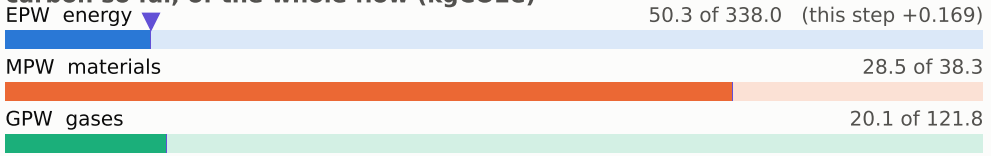

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

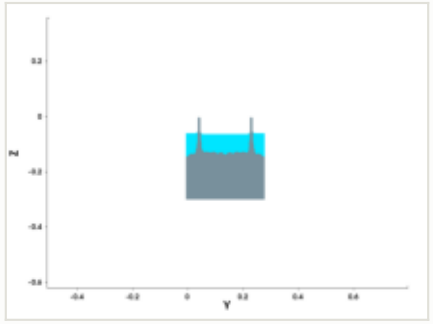

y cut at 0.211 µm

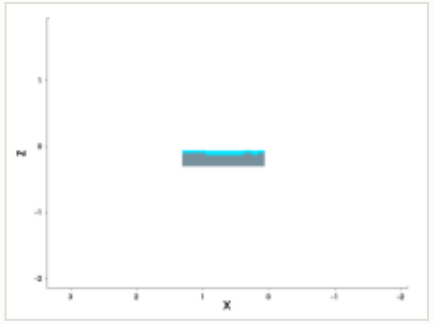

mask for this step

no mask for this step

steps by process area

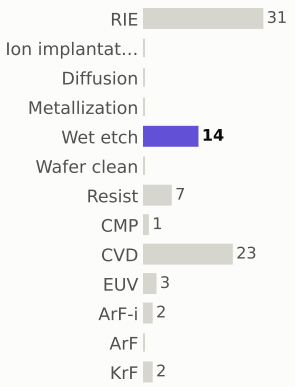

materials deposited (g)

gases emitted (g)

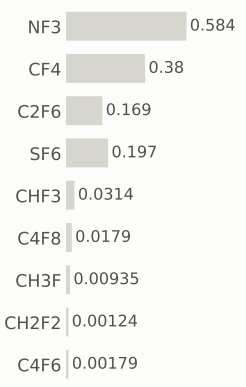

Step #880: CVD

depo_isotropic · CVD

1.31	100.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

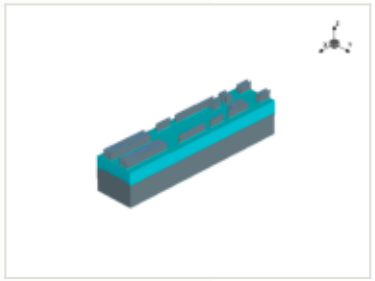

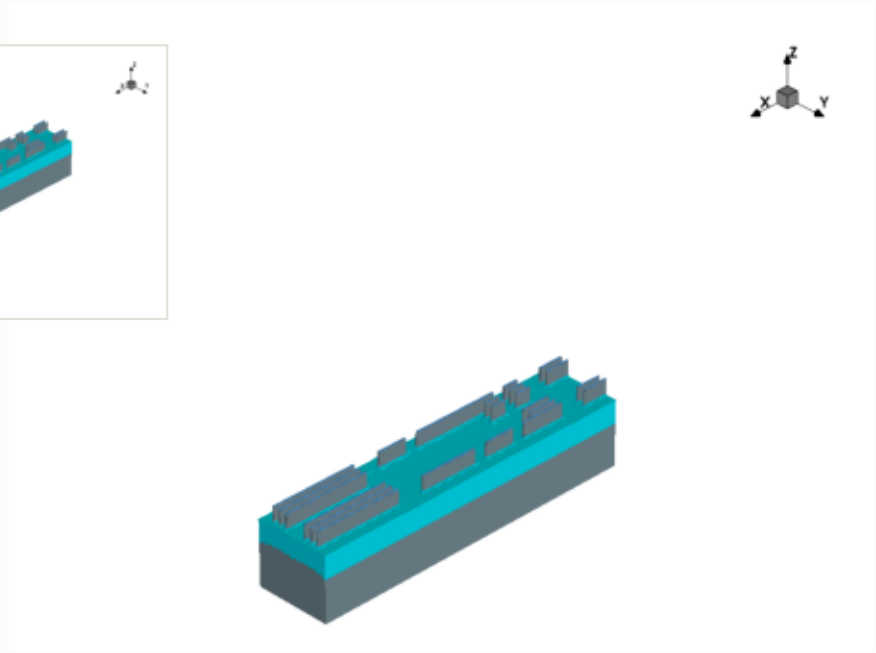

x cut at 0.677 µm

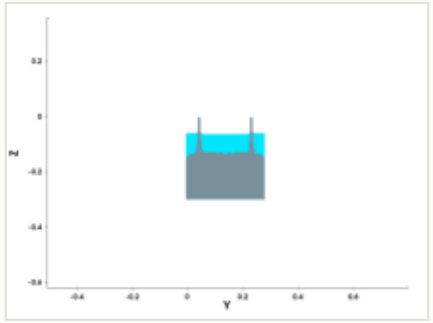

y cut at 0.211 µm

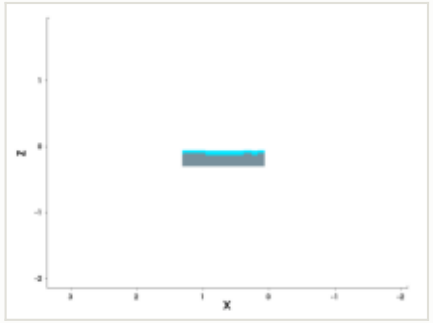

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.00035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

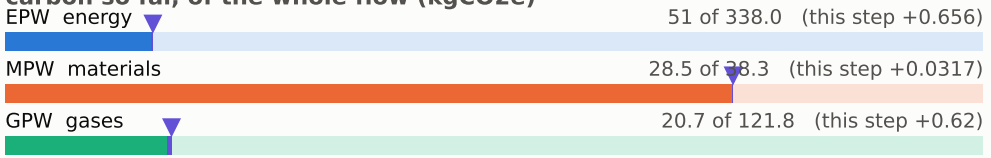

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

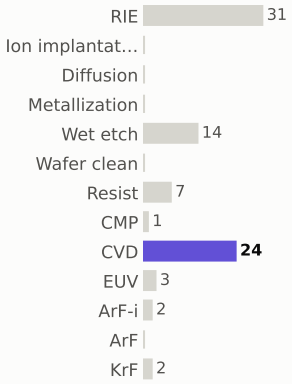

materials deposited (g)



gases emitted (g)

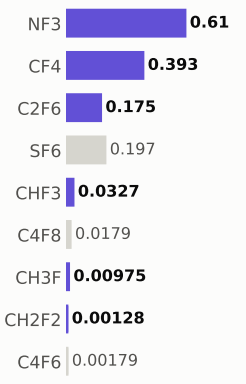

Step #890: CVD

depo_isotropic · CVD

1.31	101.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

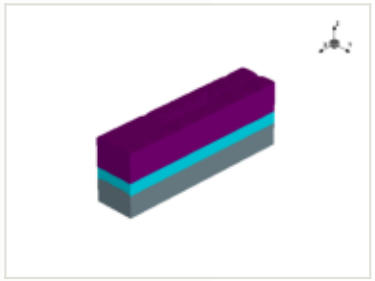

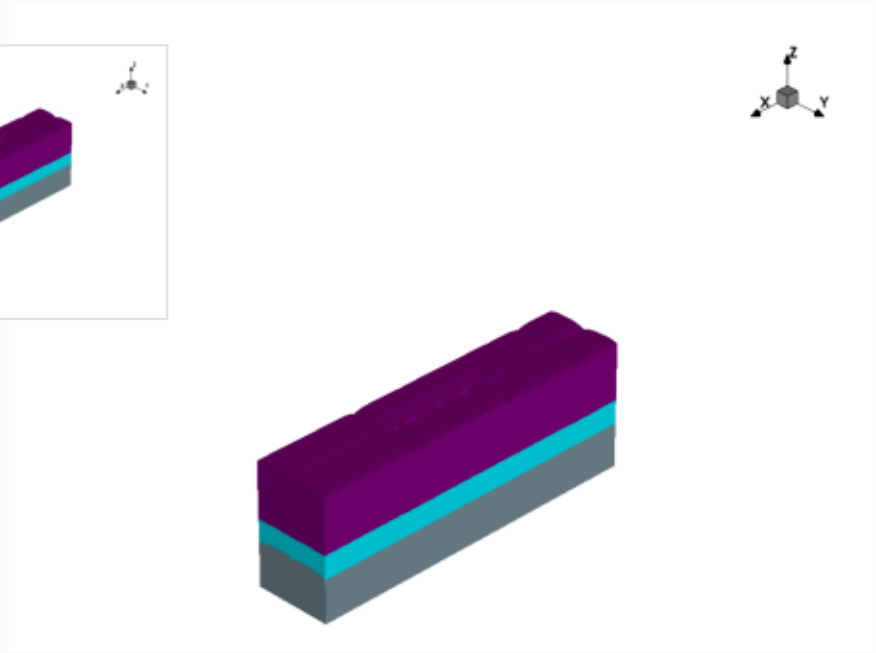

x cut at 0.677 µm

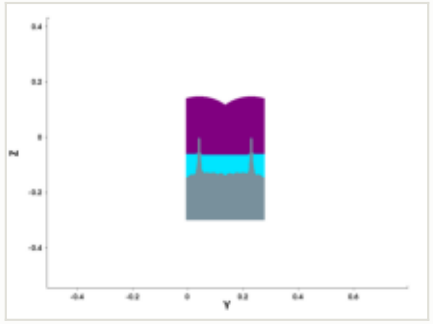

y cut at 0.211 µm

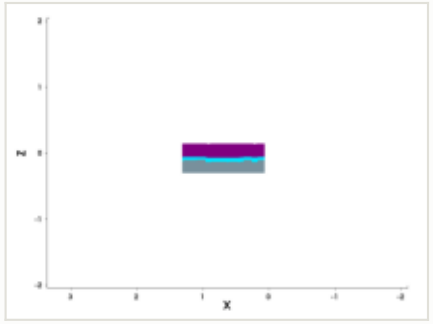

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

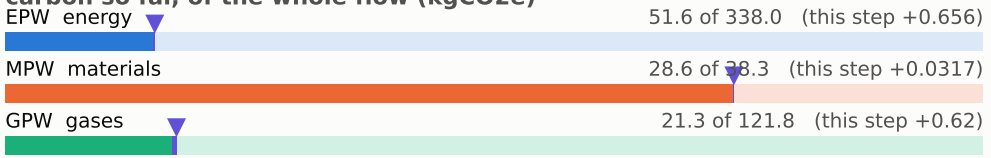

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

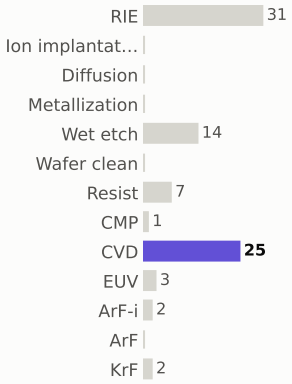

materials deposited (g)



gases emitted (g)

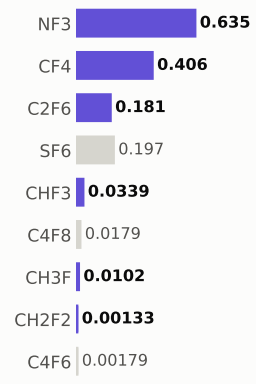

Step #900: CMP

etch_cmp · CMP

0.169	101.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

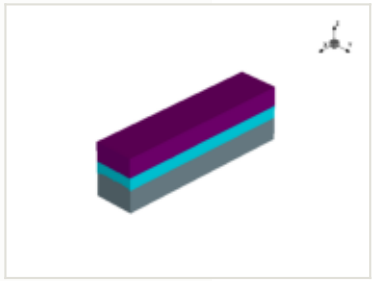

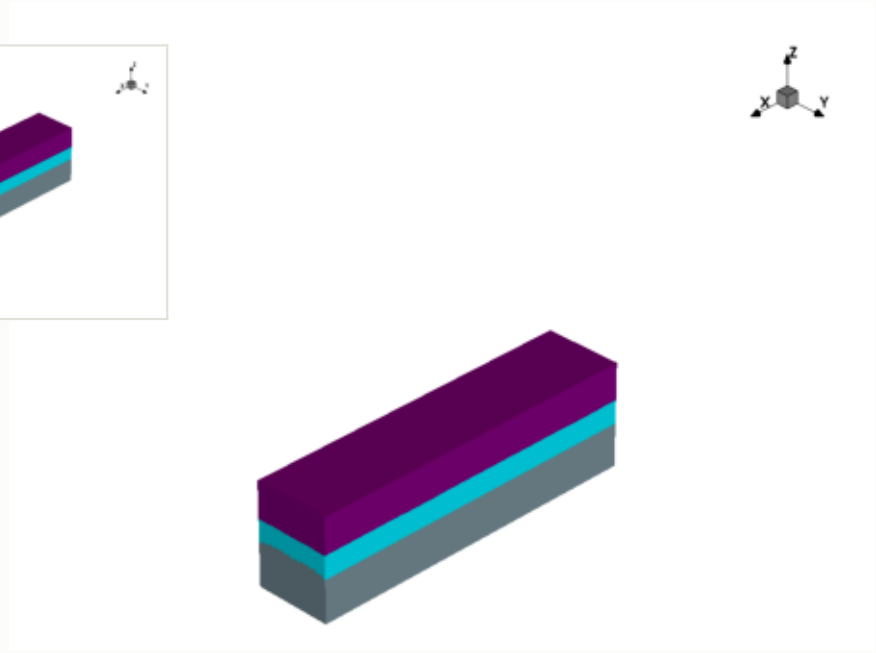

x cut at 0.677 µm

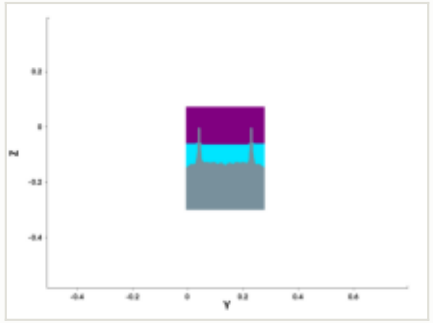

y cut at 0.211 µm

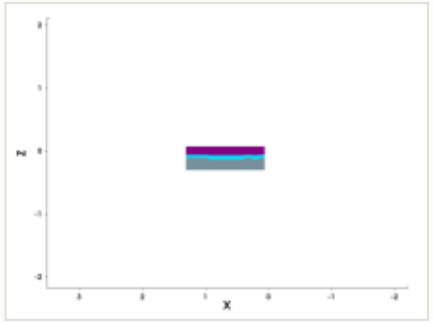

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GPW	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

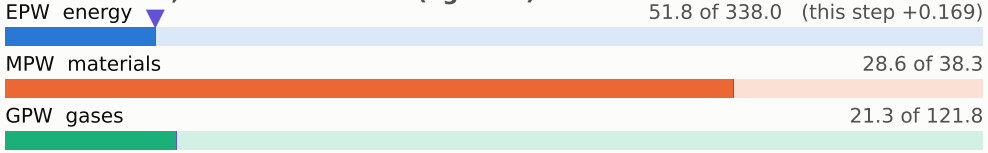

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

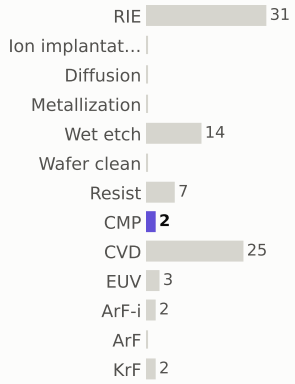

materials deposited (g)



gases emitted (g)

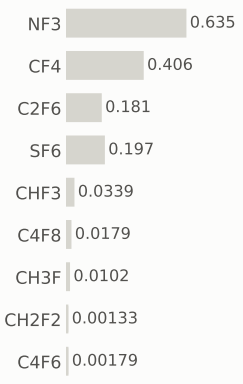

Step #910: CVD

depo_isotropic · CVD

1.31	103.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

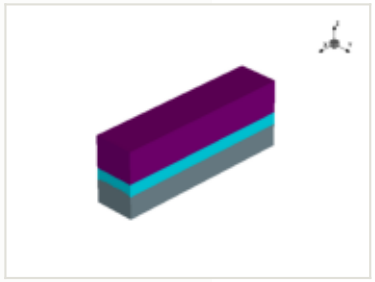

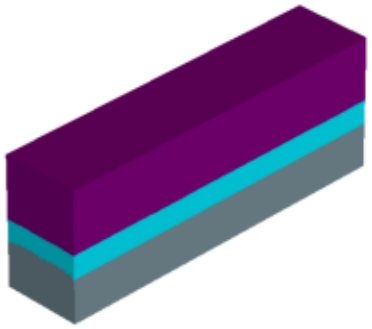

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.09 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

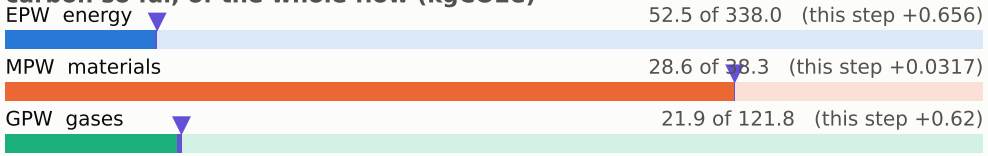

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

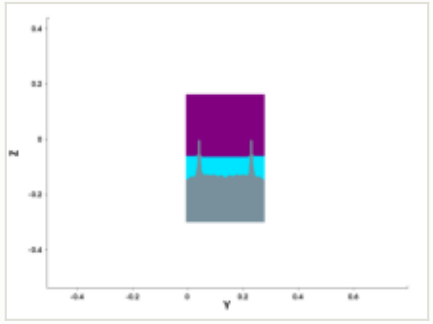

y cut at 0.211 µm

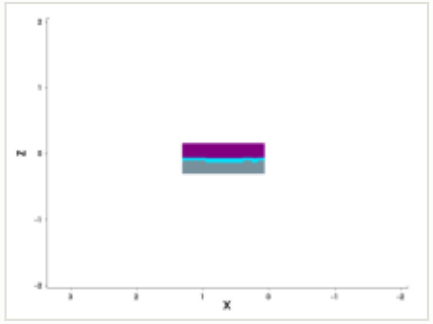

mask for this step

no mask for this step

steps by process area

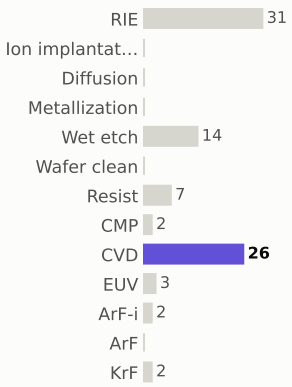

materials deposited (g)

gases emitted (g)

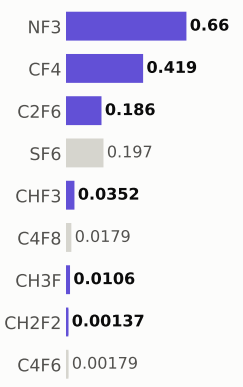

Step #920: CMP

etch_cmp · CMP

0.169	103.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

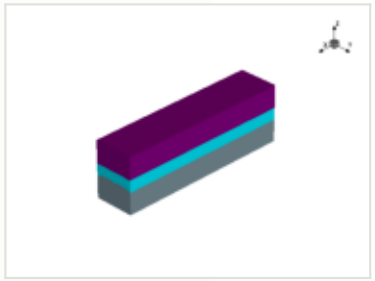

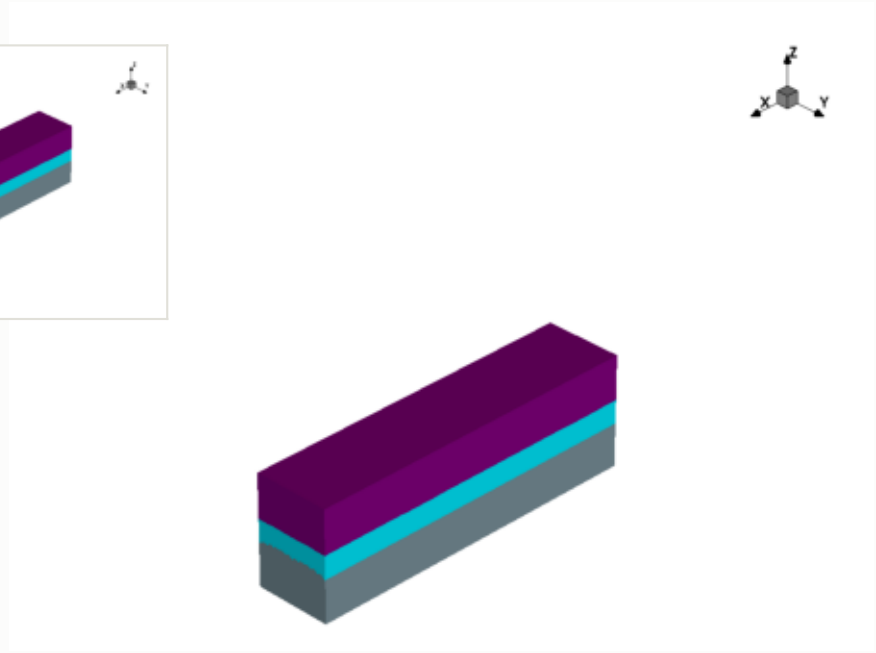

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

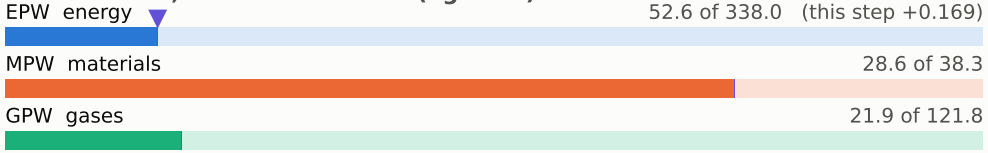

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

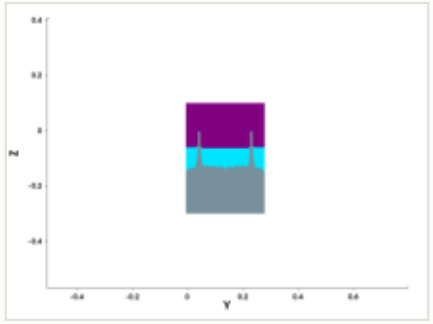

y cut at 0.211 µm

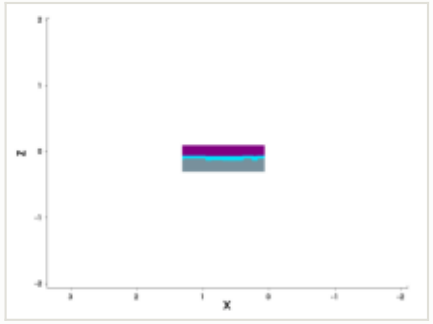

mask for this step

no mask for this step

steps by process area

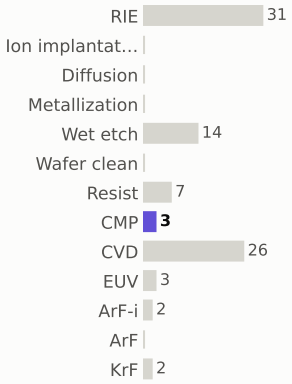

materials deposited (g)

gases emitted (g)

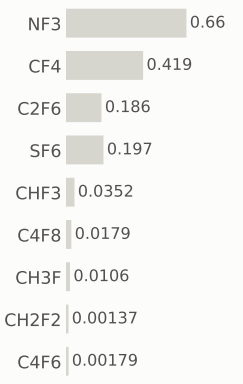

Step #930: CVD

depo_isotropic · CVD

1.31	104.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

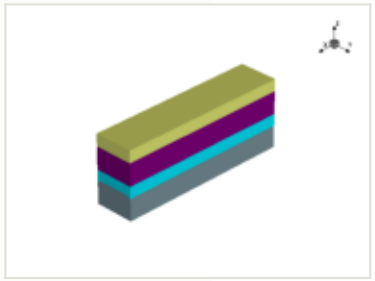

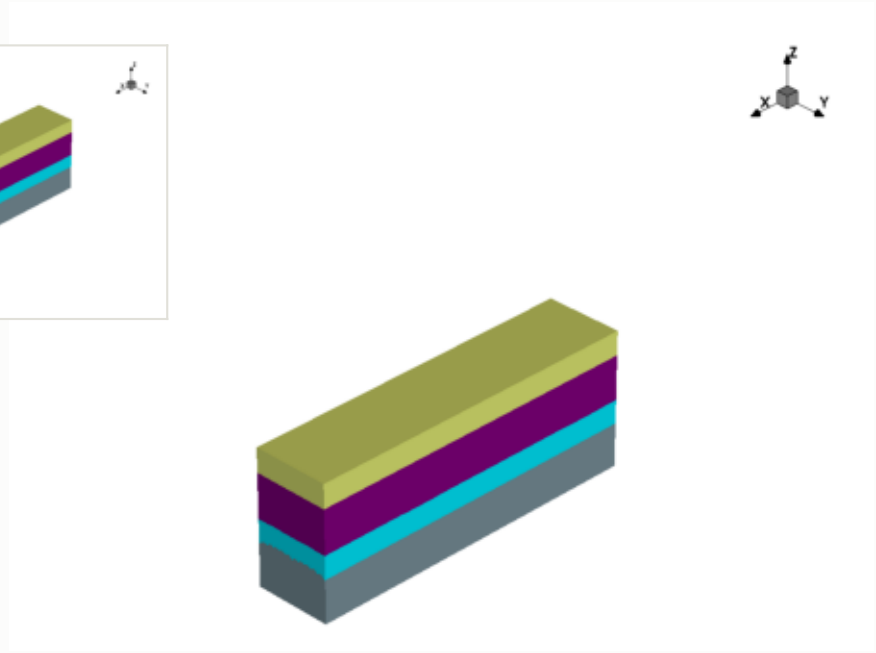

this step

process area	CVD
material	—
thickness	0.087 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

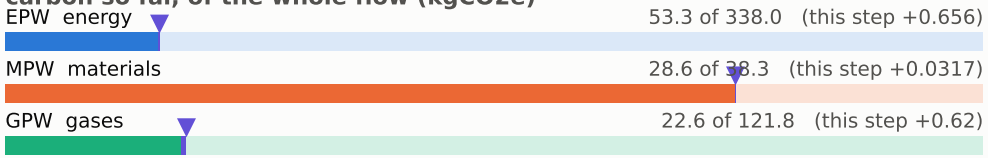

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

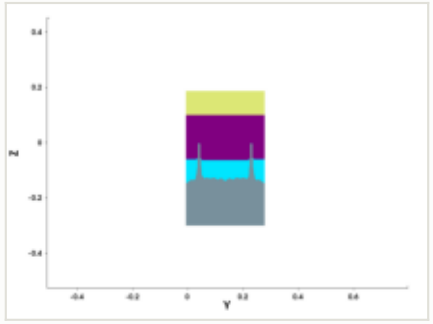

y cut at 0.211 µm

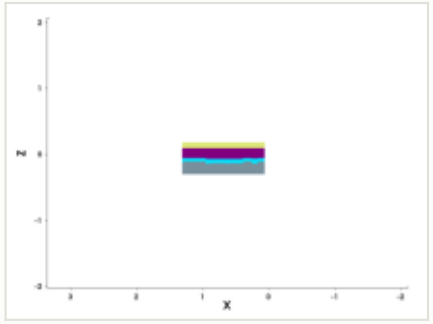

mask for this step

no mask for this step

steps by process area

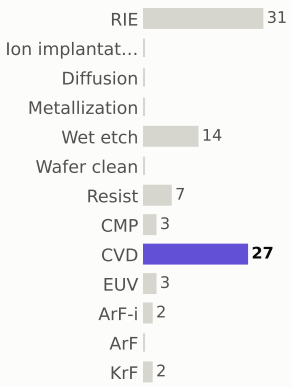

materials deposited (g)

gases emitted (g)

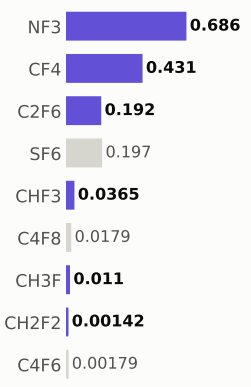

Step #940: CVD

depo_isotropic · CVD

1.31	105.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

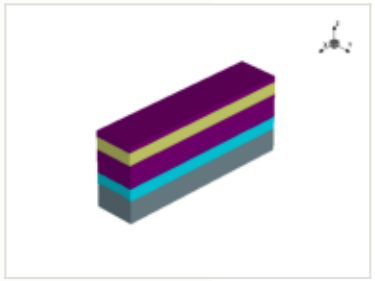

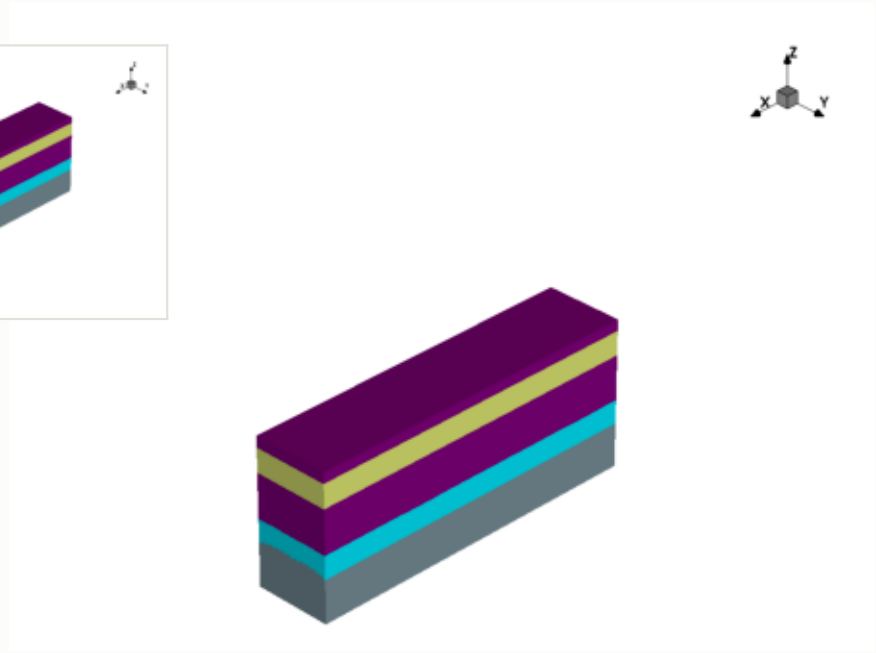

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

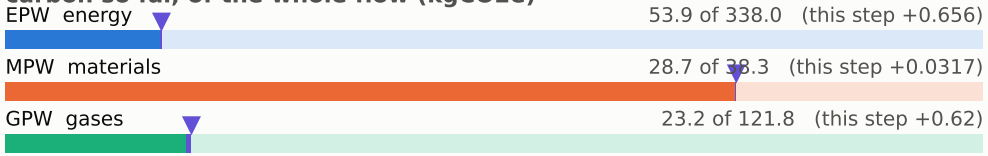

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

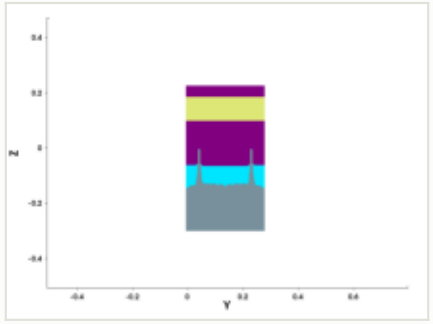

y cut at 0.211 µm

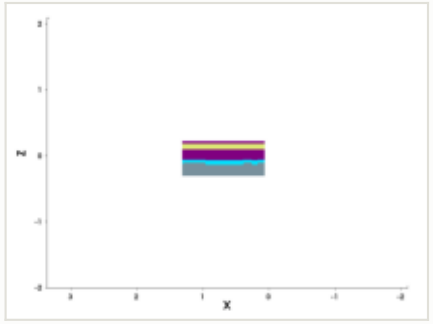

mask for this step

no mask for this step

steps by process area

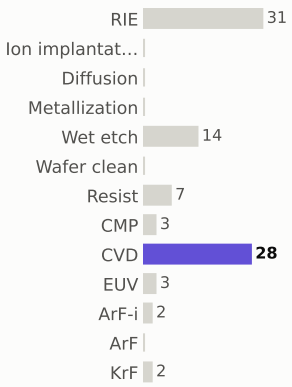

materials deposited (g)



gases emitted (g)

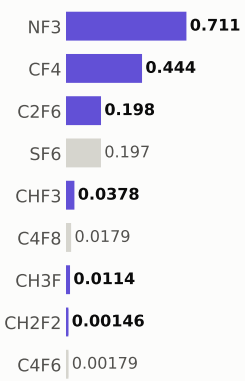

Step #950: CVD

depo_fill · CVD

1.31	107.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

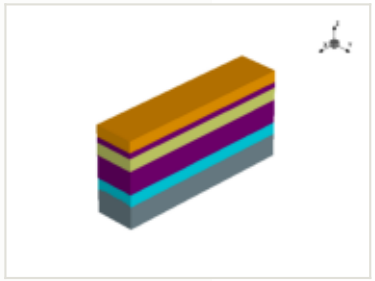

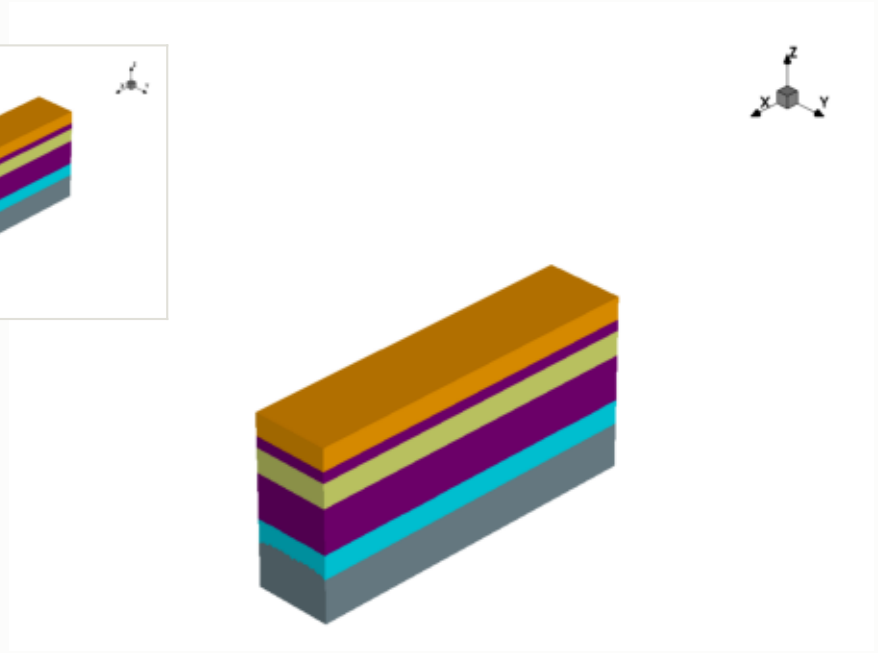

this step

process area	CVD
material	—
thickness	0.08 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

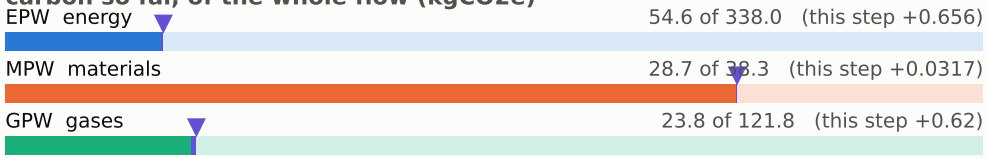

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

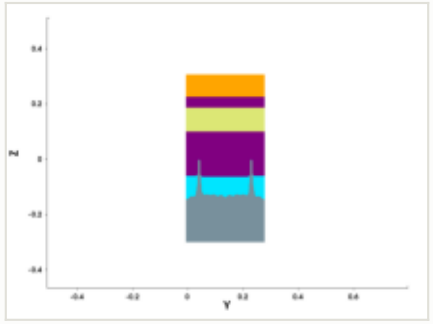

y cut at 0.211 µm

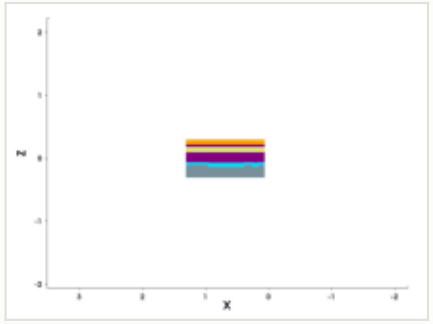

mask for this step

no mask for this step

steps by process area

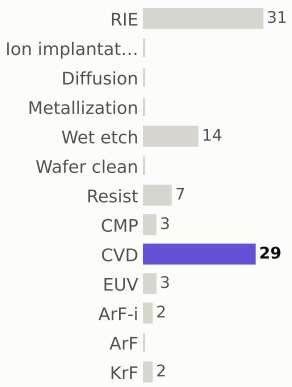

materials deposited (g)

gases emitted (g)

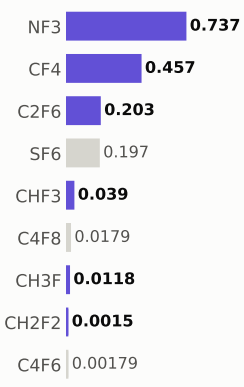

Step #960: CVD

depo_isotropic · CVD

1.31	108.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

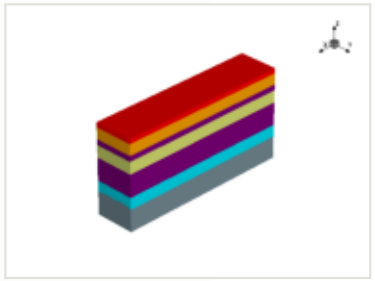

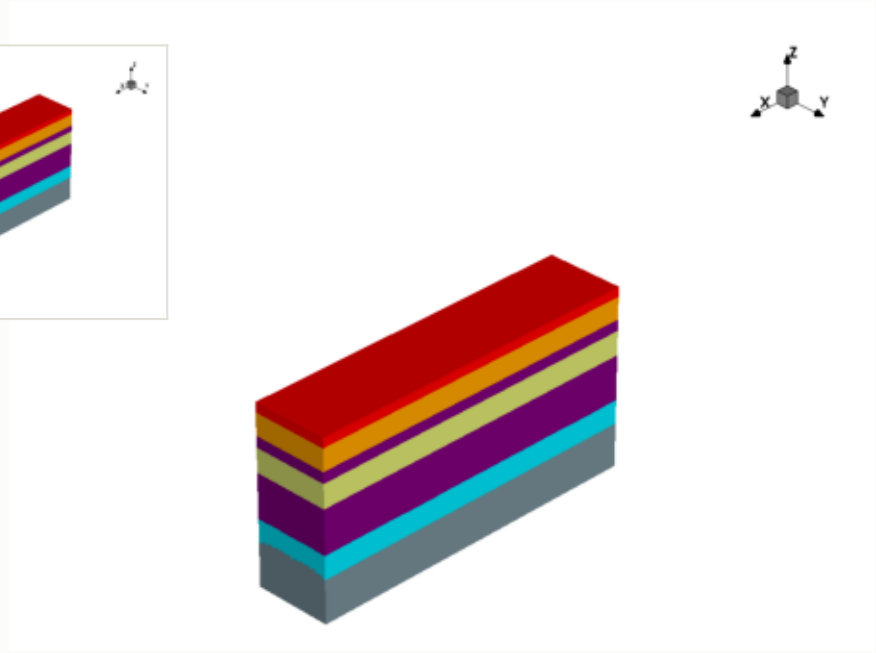

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

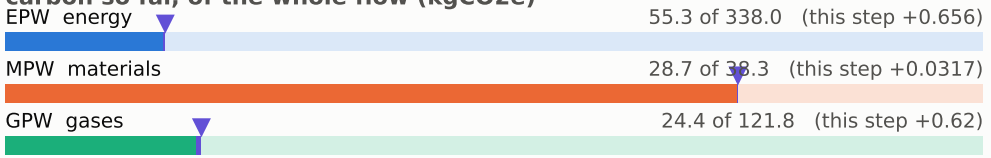

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

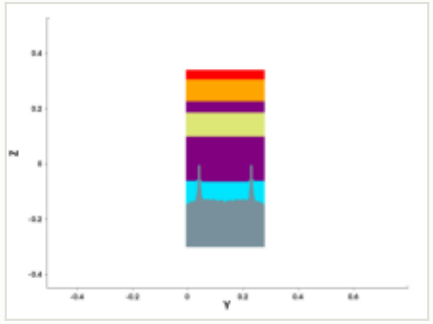

y cut at 0.211 µm

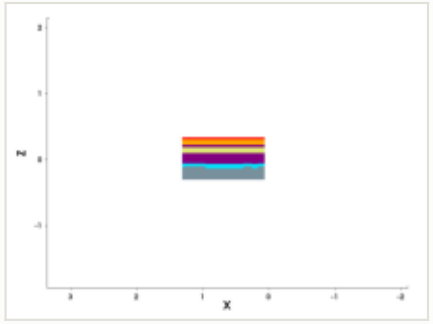

mask for this step

no mask for this step

steps by process area

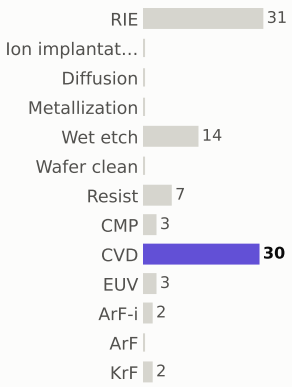

materials deposited (g)



gases emitted (g)

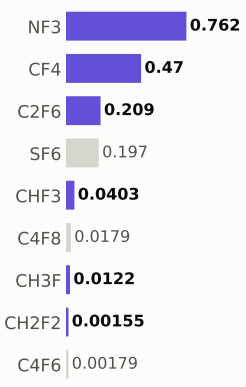

Step #970: ArF-i

litho_patterning · ArF-i

0.217	108.6	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

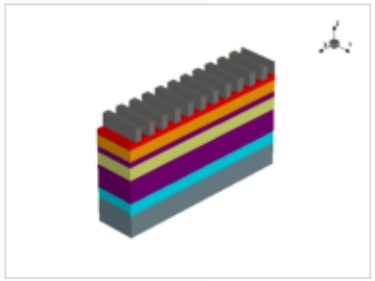

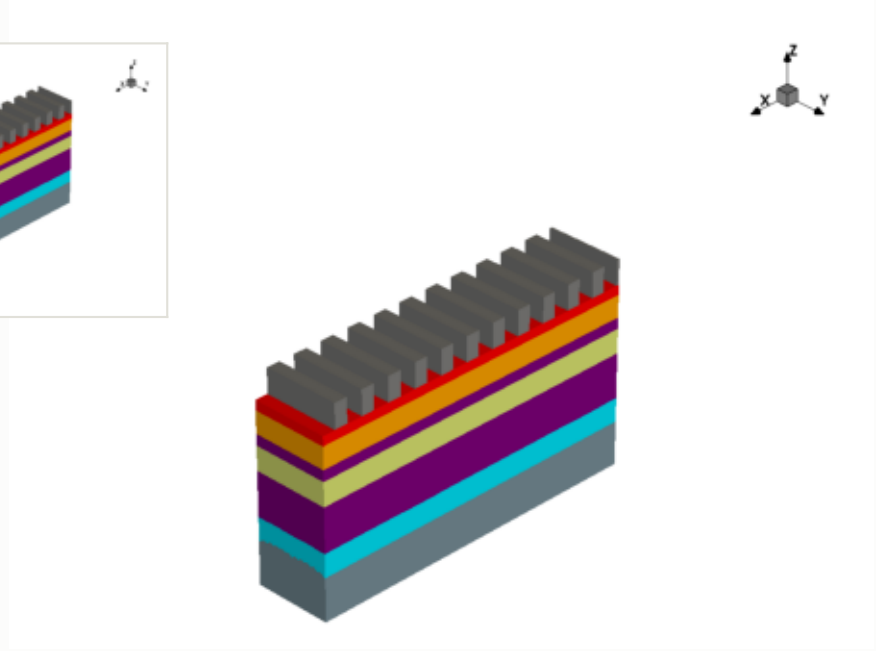

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

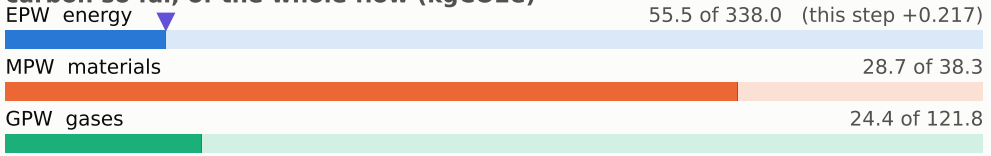

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

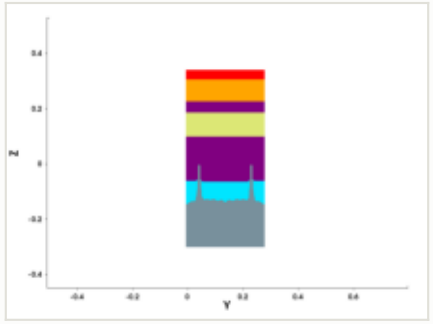

y cut at 0.211 µm

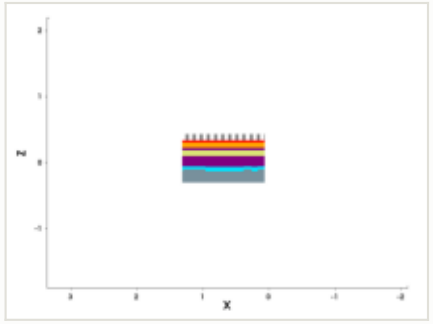

mask: layer 400:0, positive (GDSII)

steps by process area

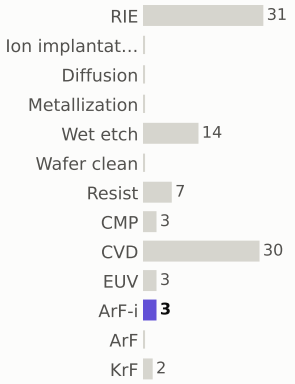

materials deposited (g)

gases emitted (g)

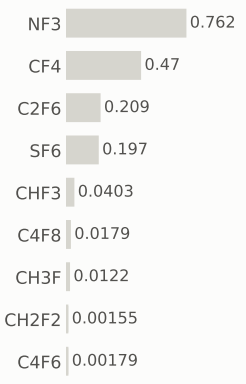

Step #980: Wet_etch

etch_isotropic · Wet_etch

0.169	108.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

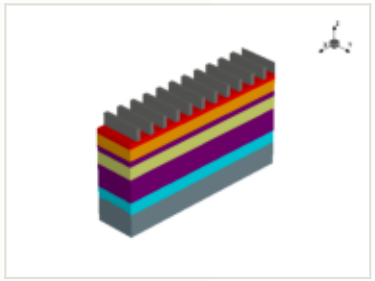

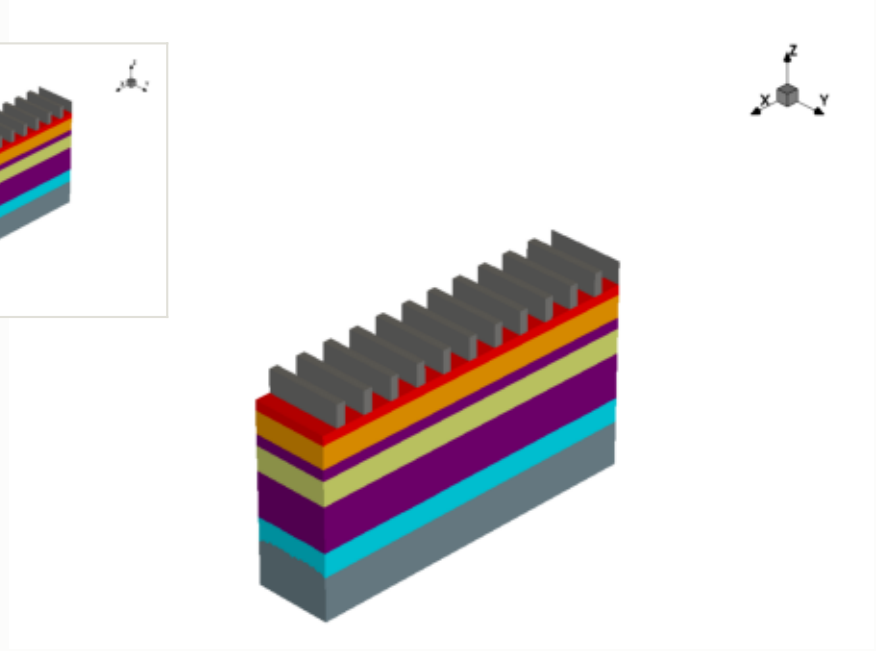

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

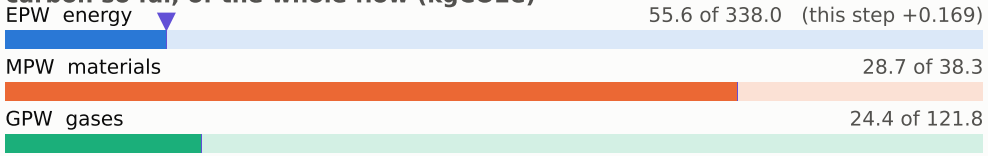

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

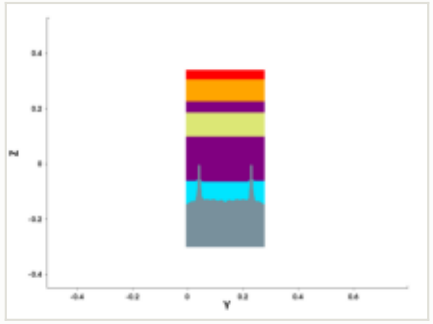

y cut at 0.211 µm

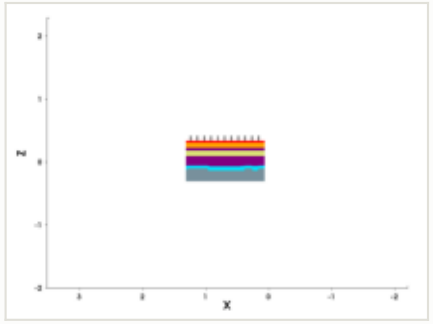

mask for this step

no mask for this step

steps by process area

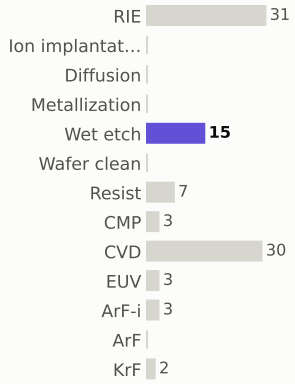

materials deposited (g)

gases emitted (g)

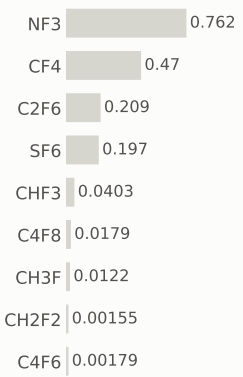

Step #990: RIE

etch_anisotropic · RIE

1.04	109.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

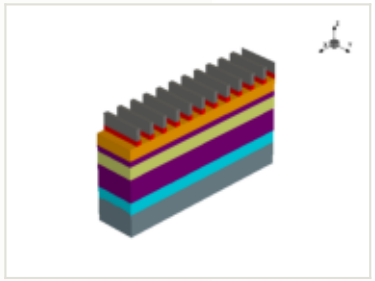

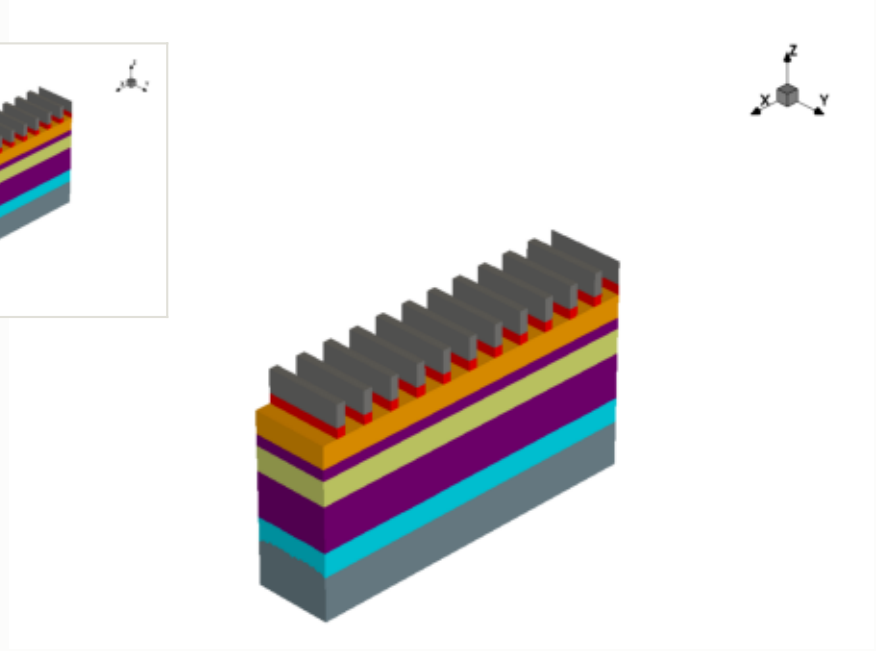

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

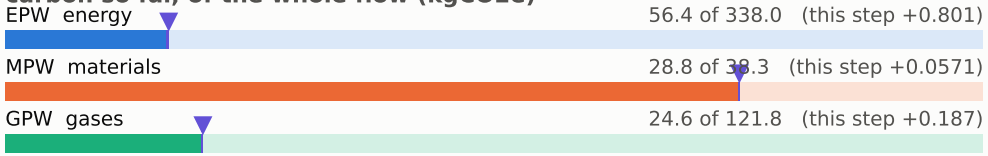

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

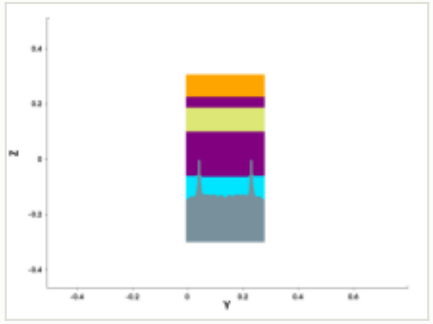

y cut at 0.211 µm

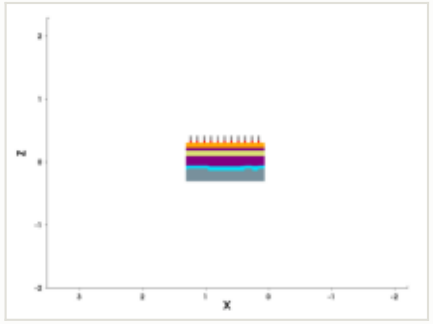

mask for this step

no mask for this step

steps by process area

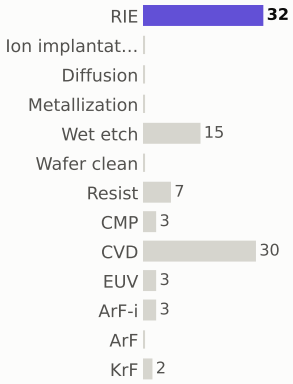

materials deposited (g)

gases emitted (g)

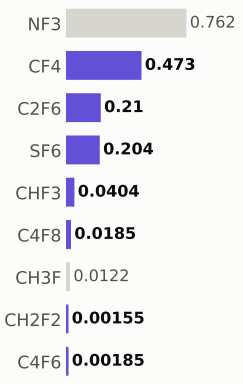

Step #1000: RIE

etch_anisotropic · RIE

1.04	110.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

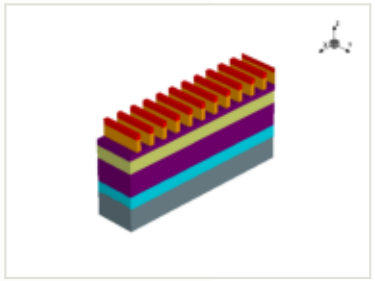

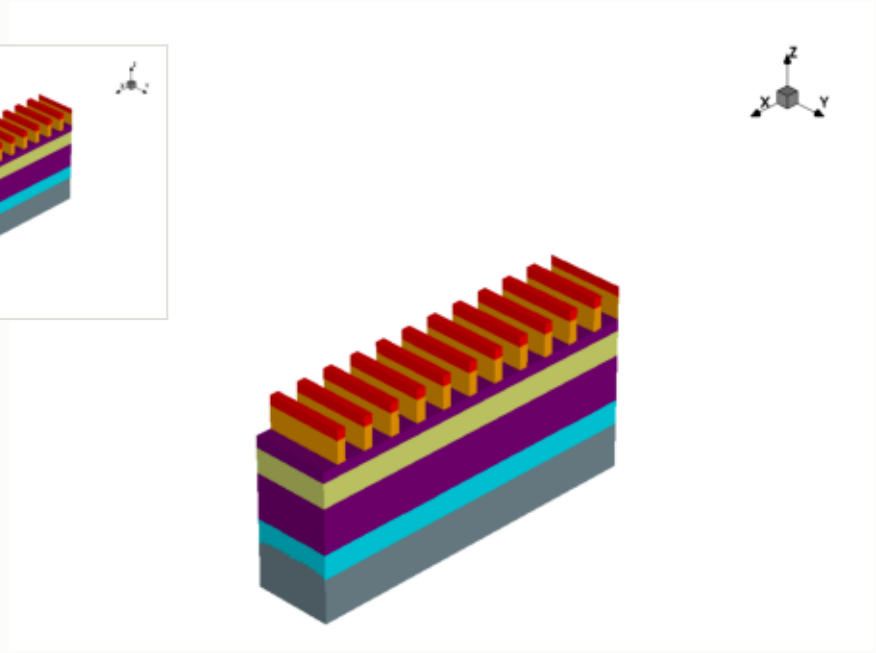

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

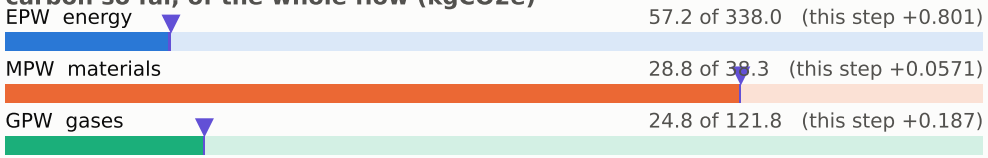

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

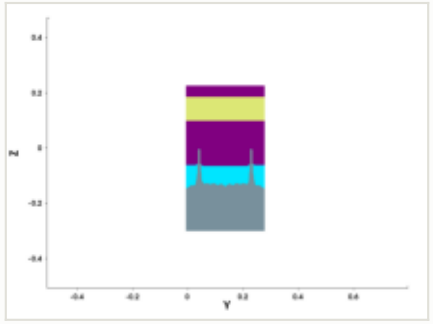

y cut at 0.211 µm

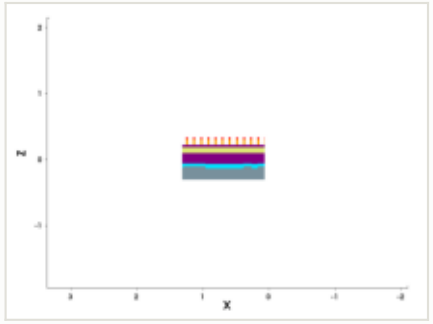

mask for this step

no mask for this step

steps by process area

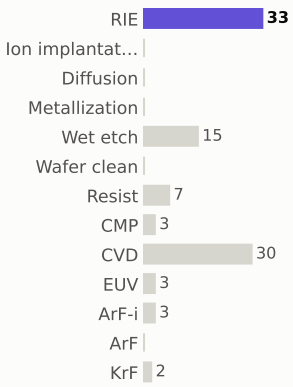

materials deposited (g)

gases emitted (g)

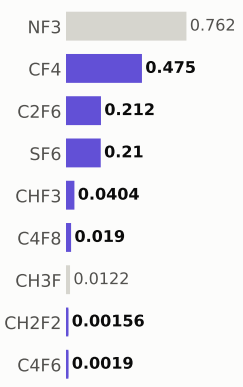

Step #1010: RIE

etch_anisotropic · RIE

1.04	111.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

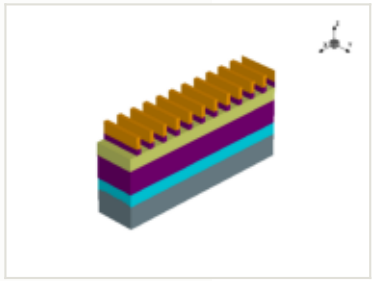

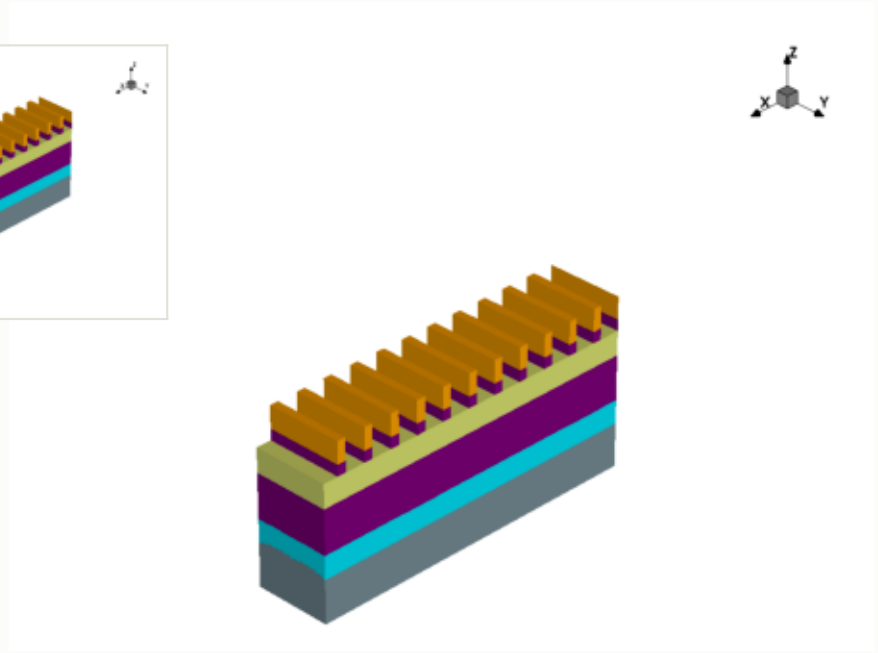

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

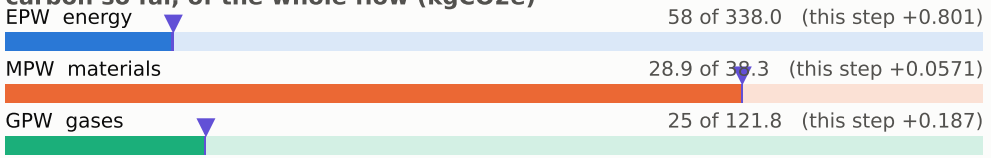

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

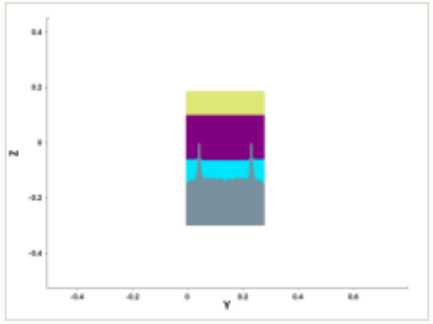

y cut at 0.211 µm

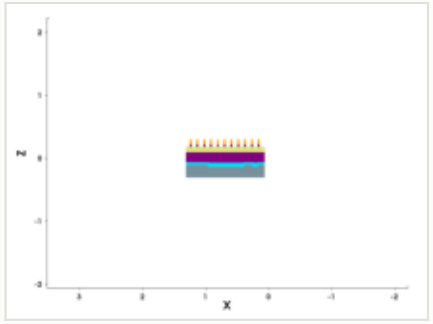

mask for this step

no mask for this step

steps by process area

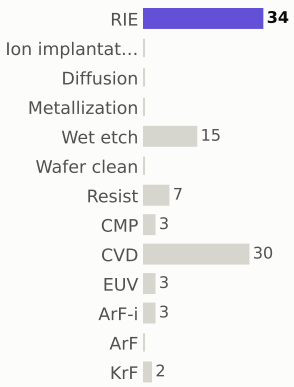

materials deposited (g)

gases emitted (g)

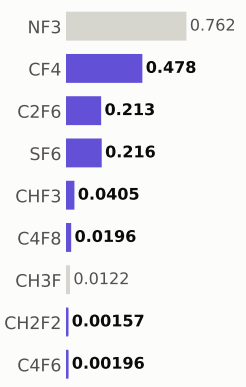

Step #1020: Resist

etch_strip · Resist

0.169	112.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

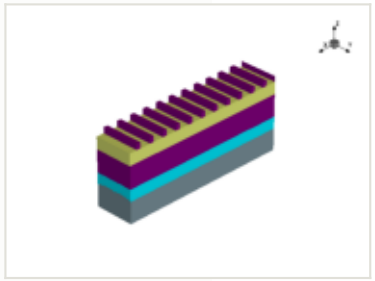

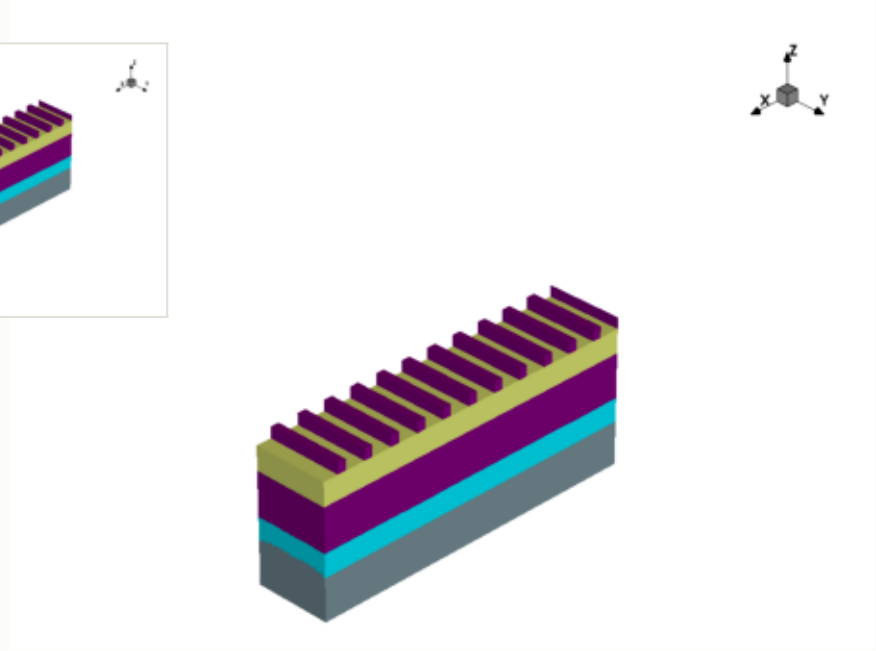

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

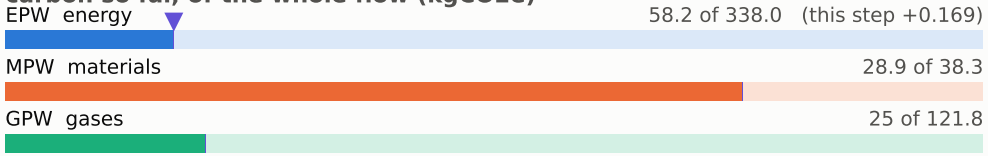

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

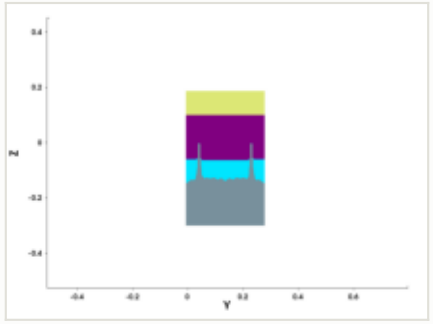

y cut at 0.211 µm

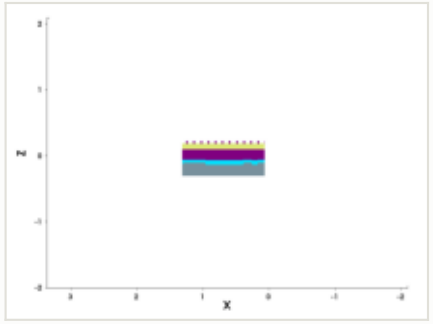

mask for this step

no mask for this step

steps by process area

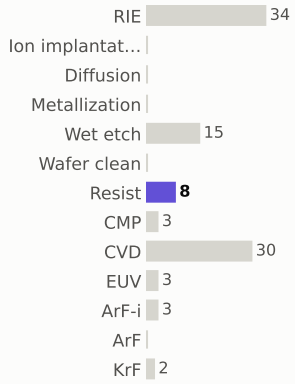

materials deposited (g)

gases emitted (g)

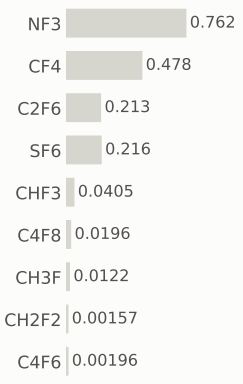

Step #1030: CVD

depo_isotropic · CVD

1.31	113.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

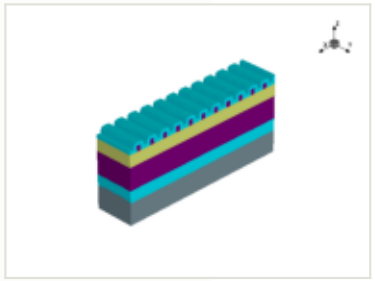

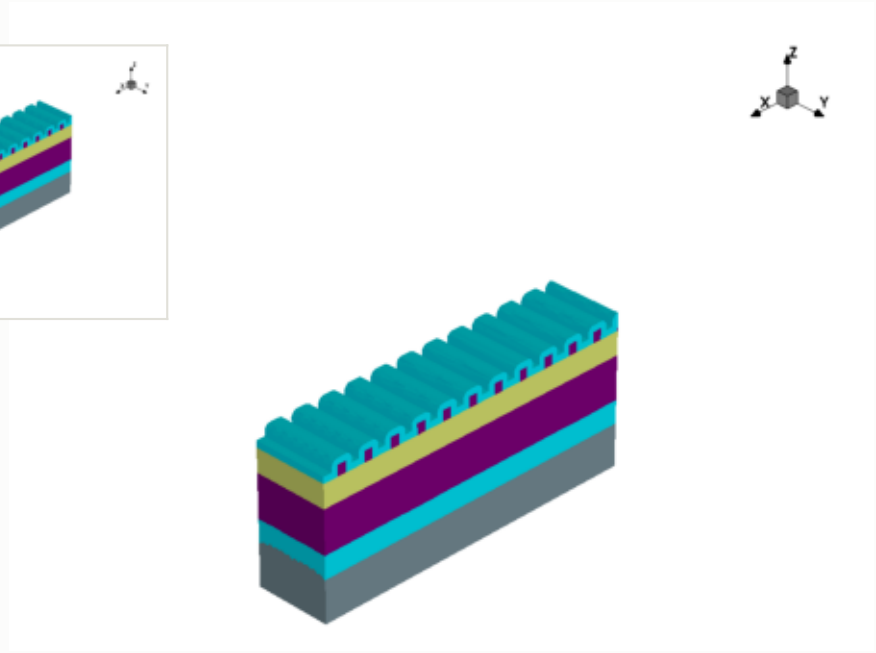

x cut at 0.677 µm

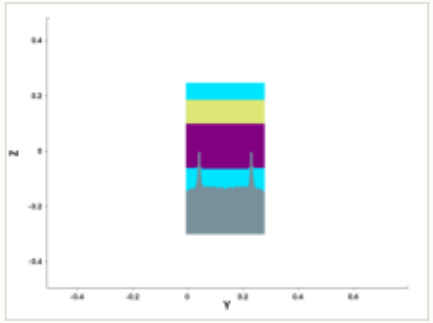

y cut at 0.211 µm

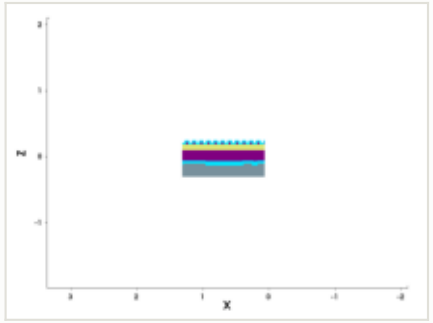

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.024 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 58.9 of 338.0 (this step +0.656)

MPW materials — 28.9 of 38.3 (this step +0.0317)

GPW gases — 25.6 of 121.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

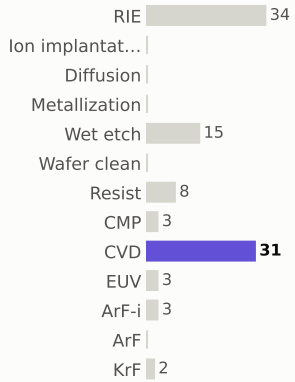

materials deposited (g)



gases emitted (g)

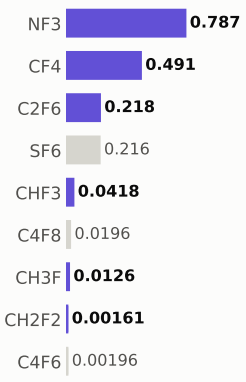

Step #1040: RIE

etch_anisotropic · RIE

1.04	114.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

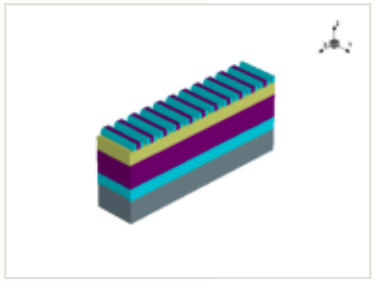

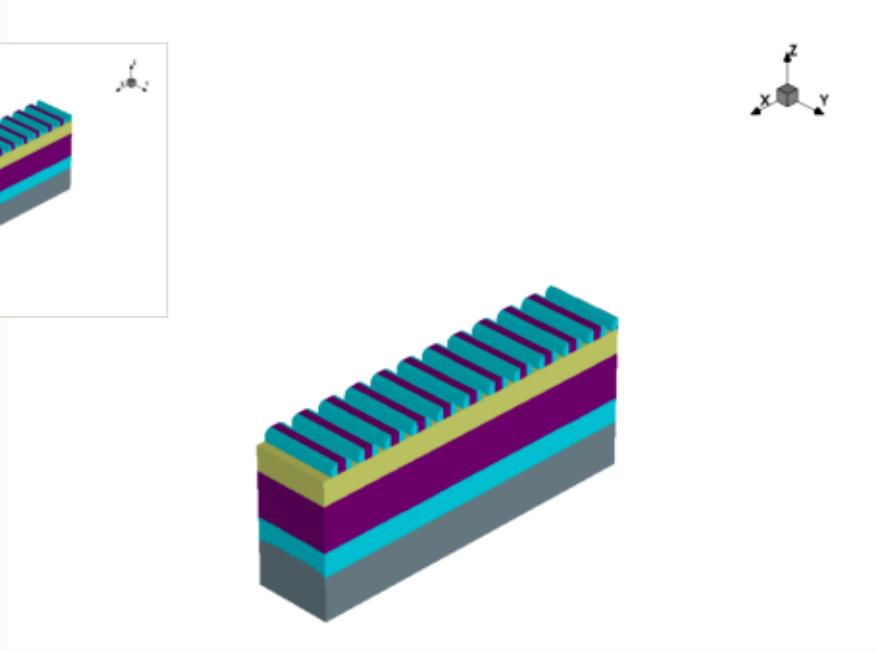

x cut at 0.677 µm

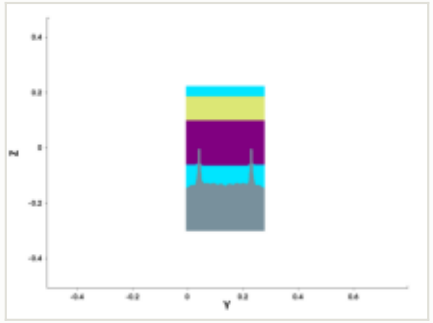

y cut at 0.211 µm

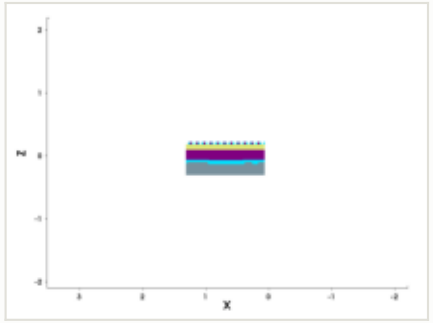

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

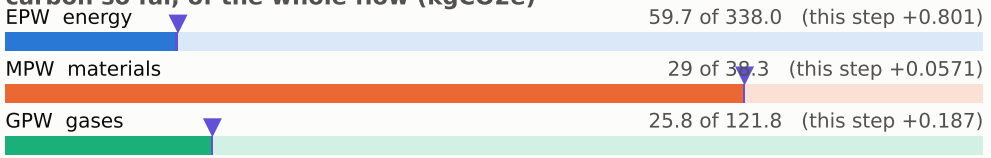

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

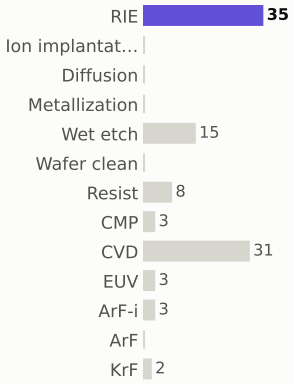

materials deposited (g)



gases emitted (g)

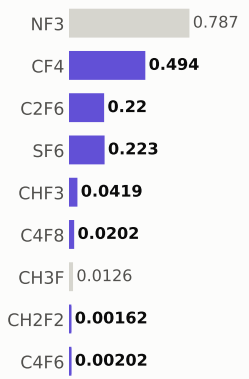

Step #1050: Wet_etch

etch_isotropic · Wet_etch

0.169	114.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

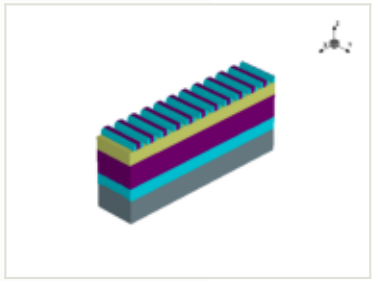

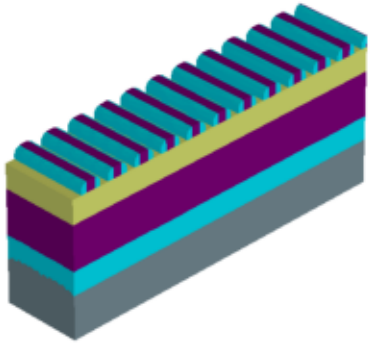

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

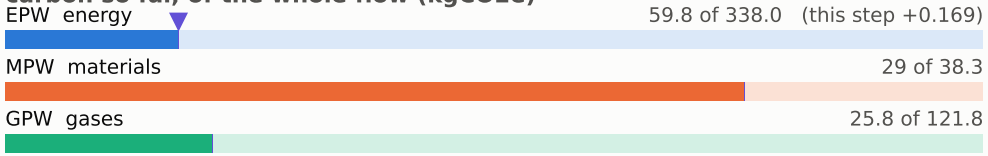

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

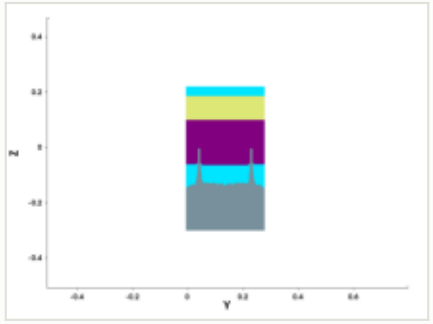

y cut at 0.211 µm

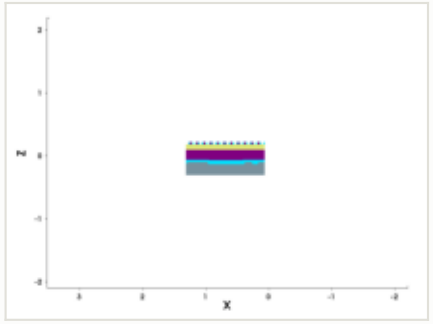

mask for this step

no mask for this step

steps by process area

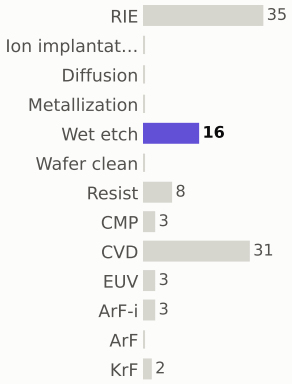

materials deposited (g)

gases emitted (g)

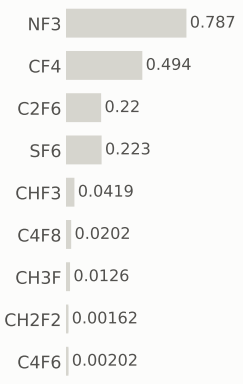

Step #1060: RIE

etch_anisotropic · RIE

1.04	115.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

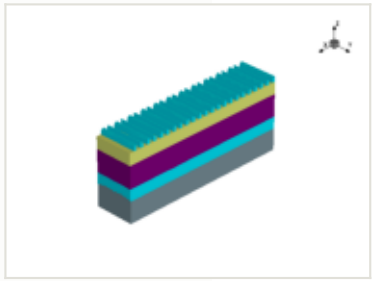

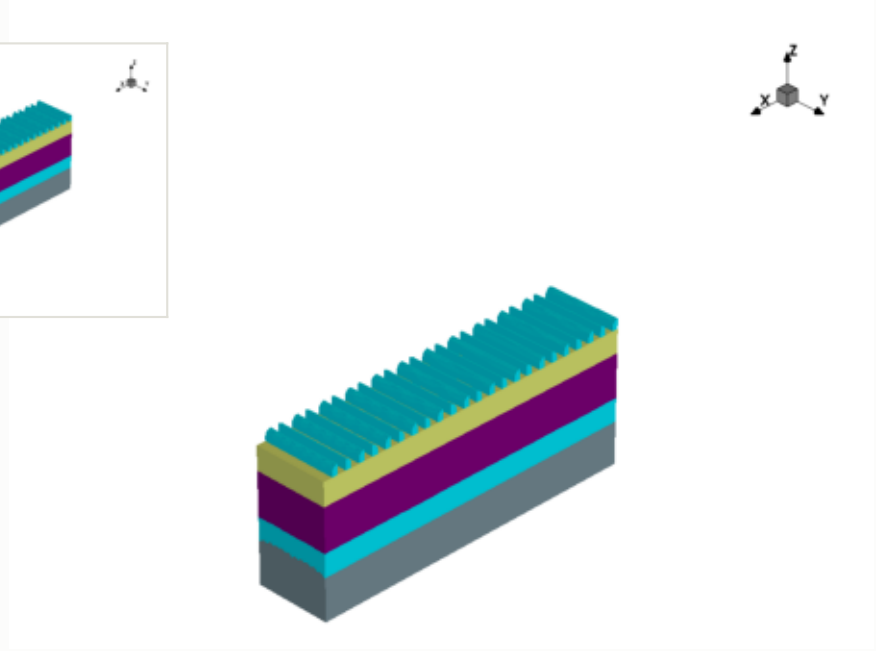

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

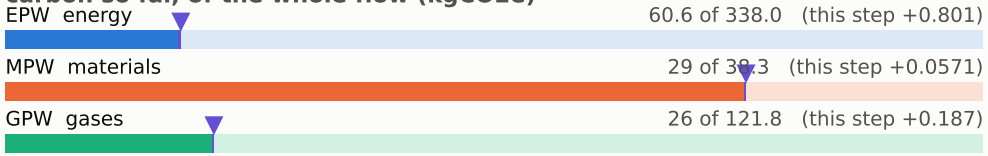

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

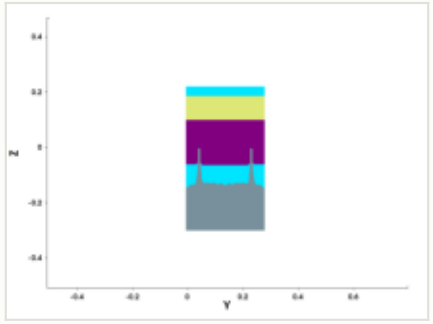

y cut at 0.211 µm

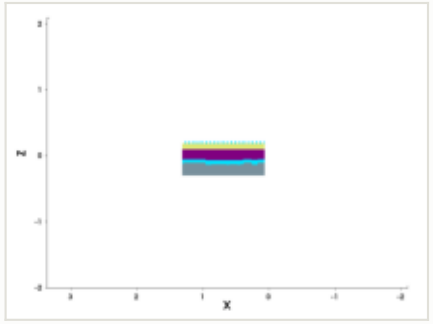

mask for this step

no mask for this step

steps by process area

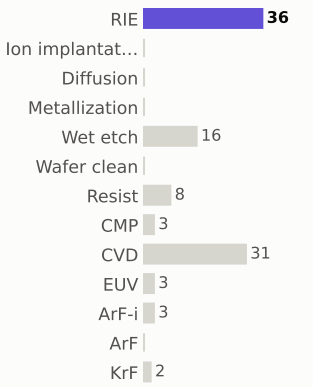

materials deposited (g)

gases emitted (g)

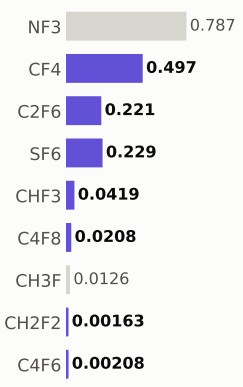

Step #1070: CVD

depo_fill · CVD

1.31	116.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

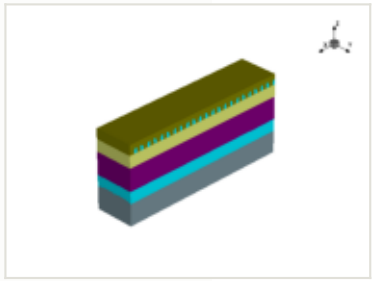

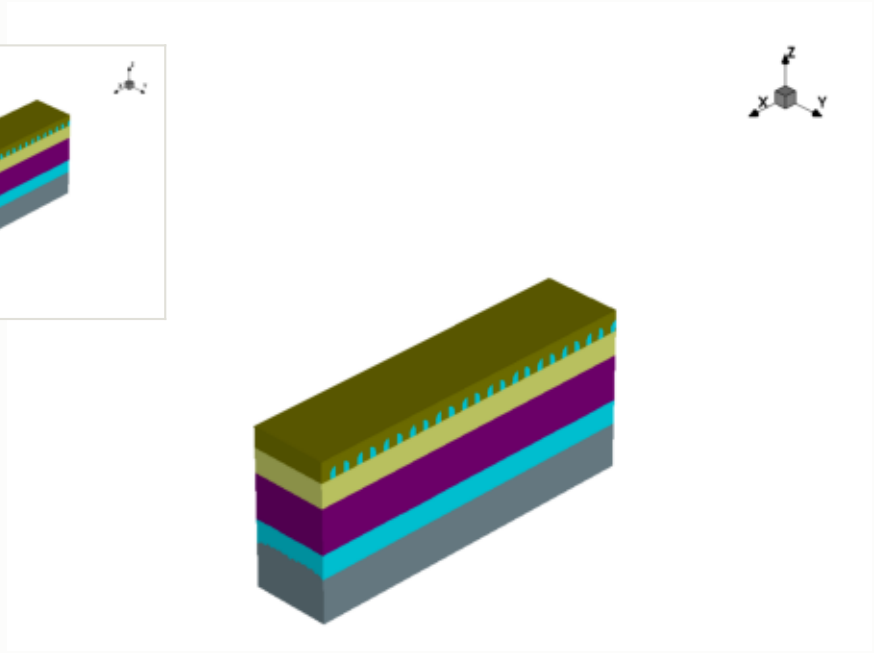

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

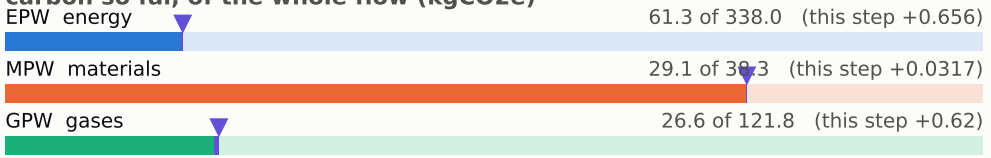

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

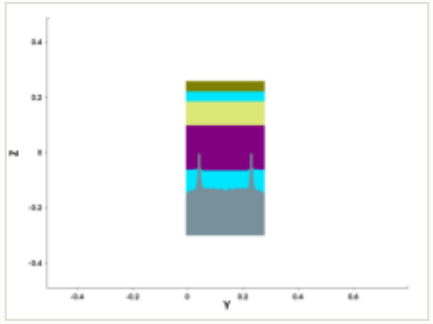

y cut at 0.211 µm

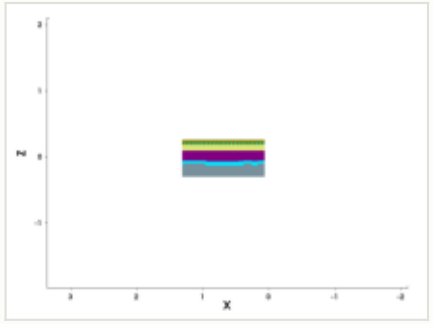

mask for this step

no mask for this step

steps by process area

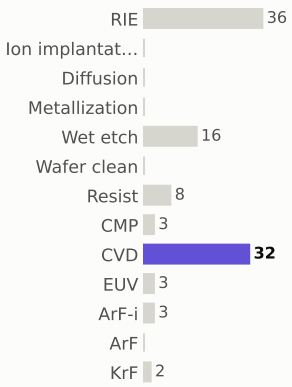

materials deposited (g)



gases emitted (g)

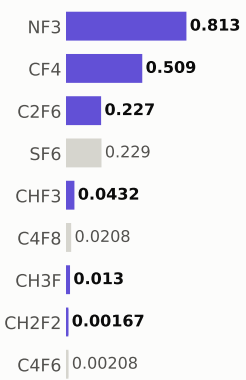

Step #1080: CVD

depo_fill · CVD

1.31	118.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

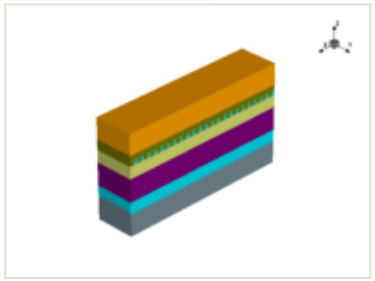

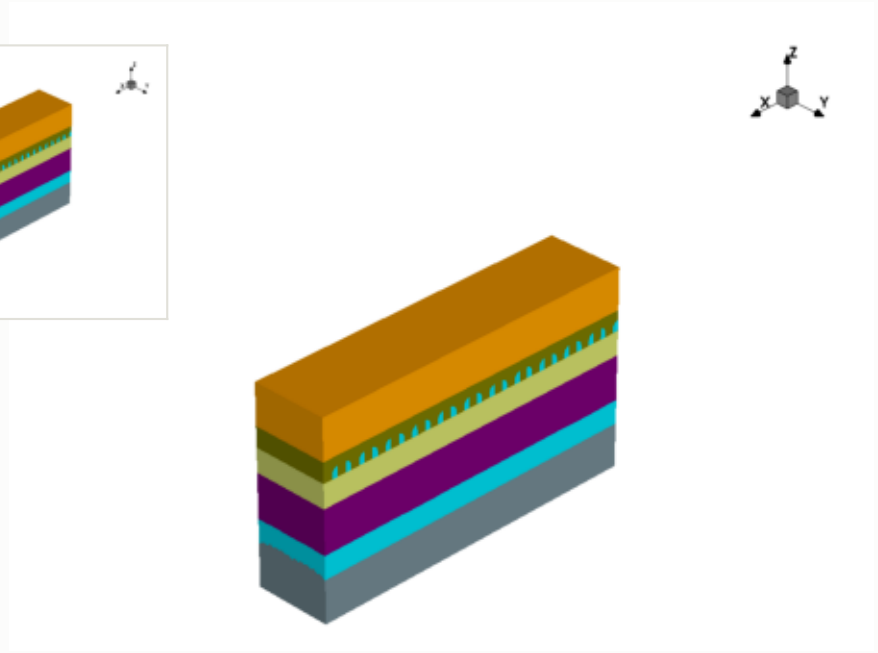

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

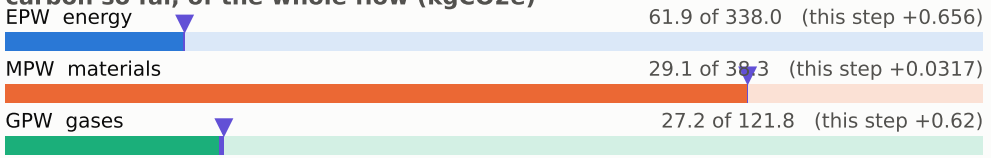

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

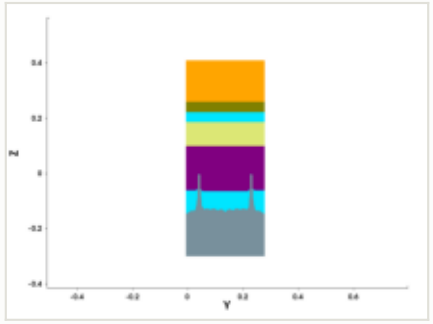

y cut at 0.211 µm

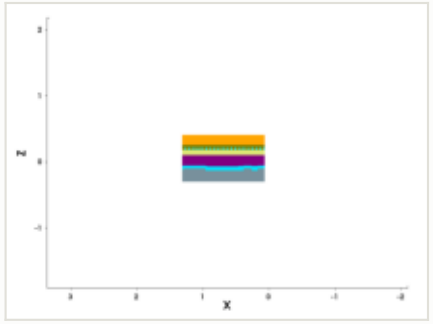

mask for this step

no mask for this step

steps by process area

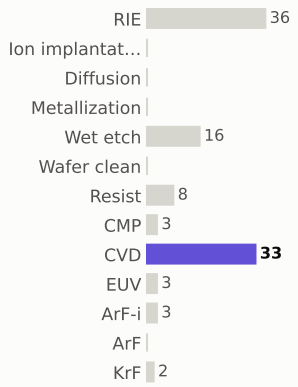

materials deposited (g)

gases emitted (g)

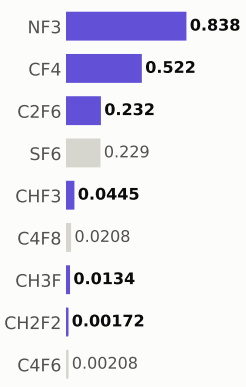

Step #1090: KrF

litho_patterning · KrF

0.199	118.5	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

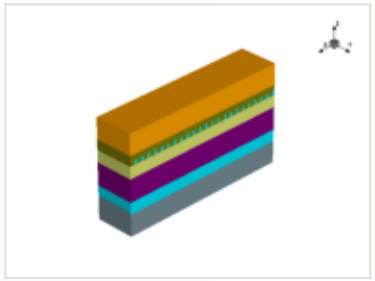

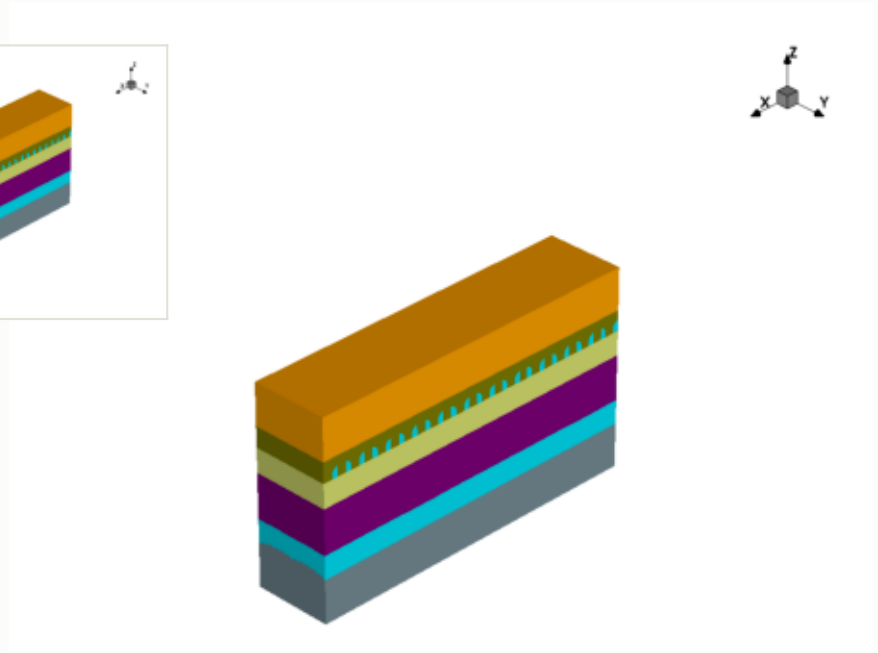

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

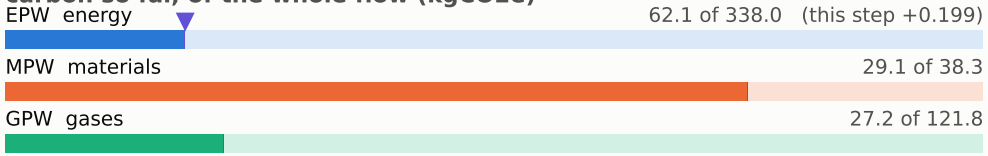

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

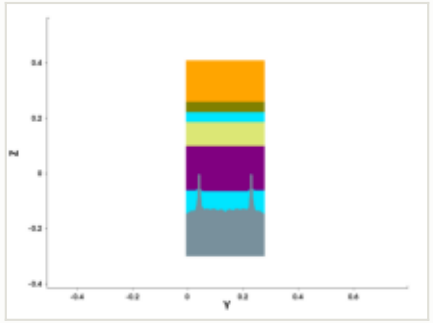

y cut at 0.211 µm

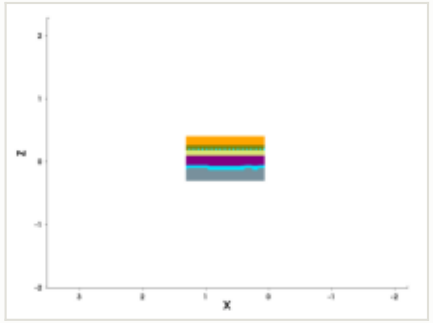

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1100: RIE

etch_anisotropic · RIE

1.04	119.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

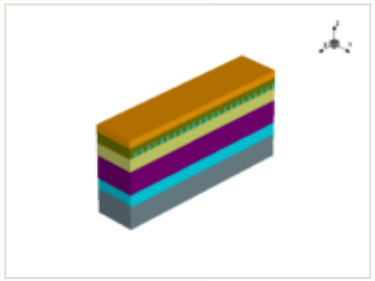

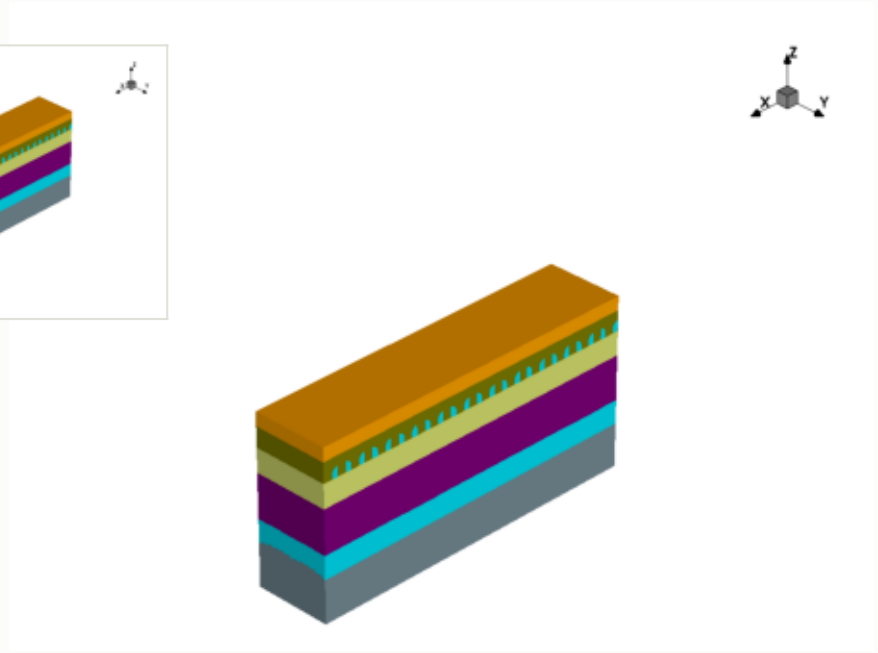

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

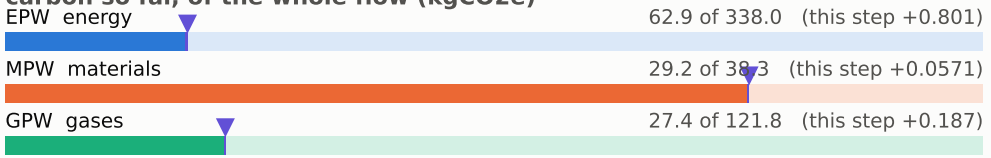

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

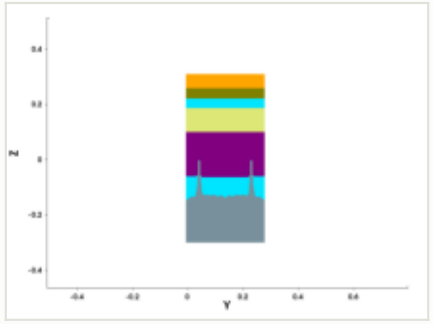

y cut at 0.211 µm

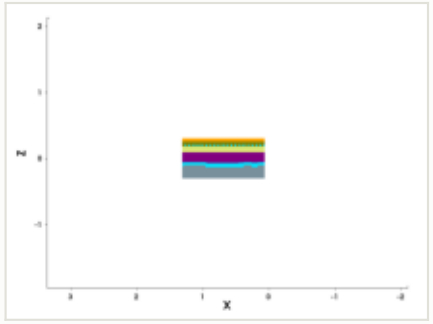

mask for this step

no mask for this step

steps by process area

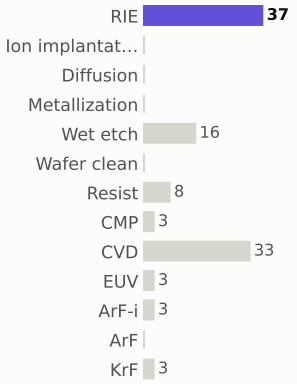

materials deposited (g)

gases emitted (g)



Step #1110: RIE

etch_anisotropic · RIE

1.04	120.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

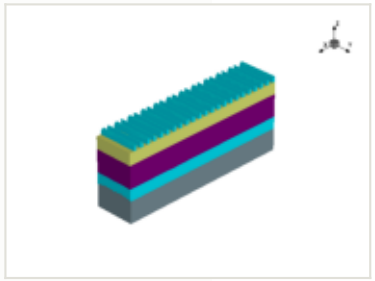

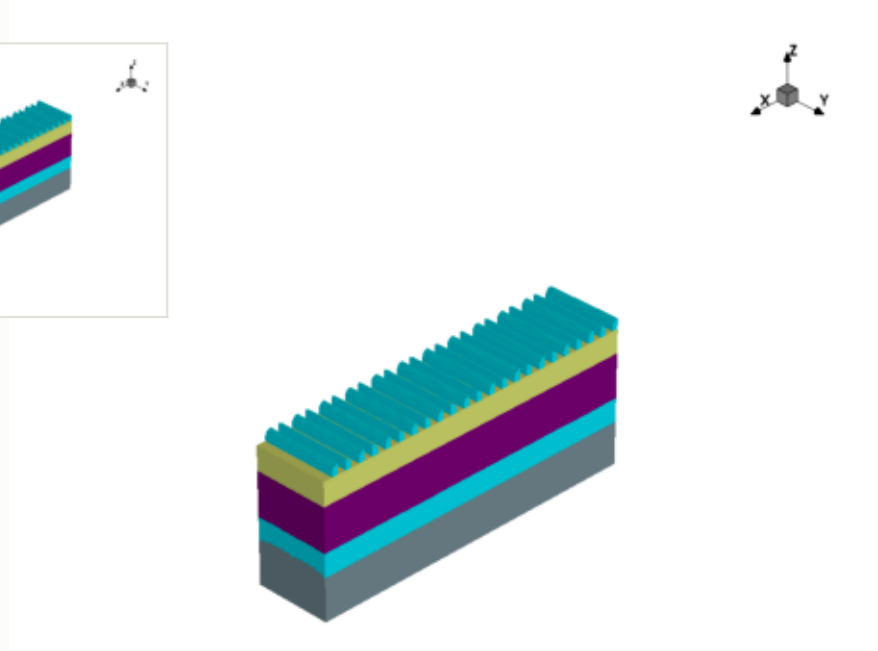

x cut at 0.677 µm

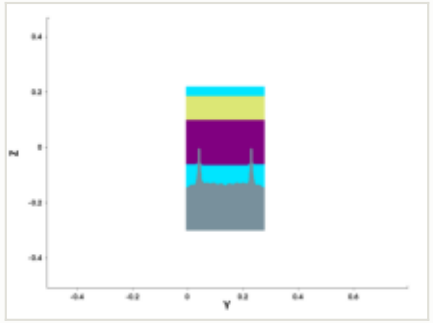

y cut at 0.211 µm

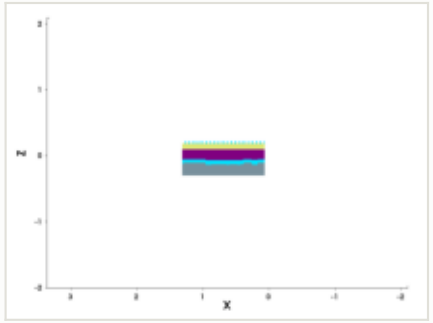

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

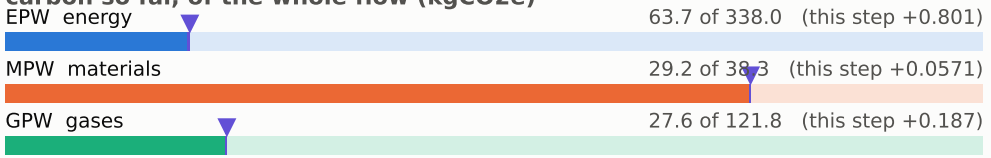

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #1120: RIE

etch_anisotropic · RIE

1.04	121.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

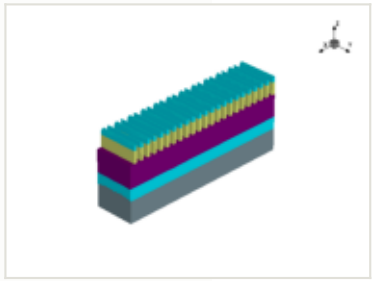

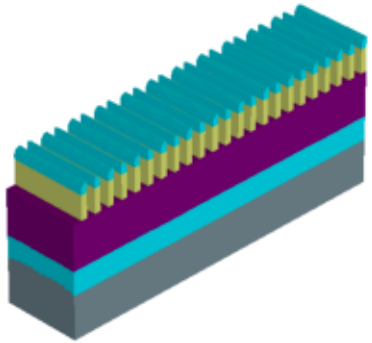

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

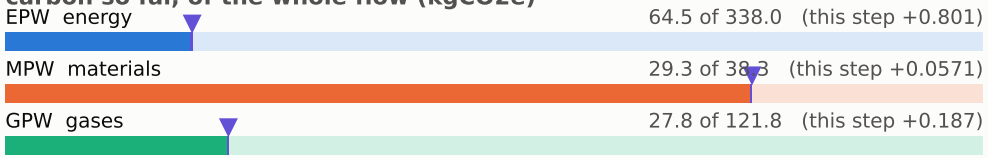

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

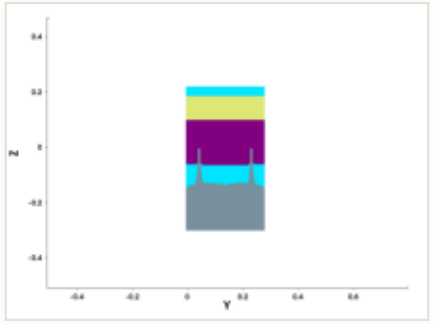

y cut at 0.211 µm

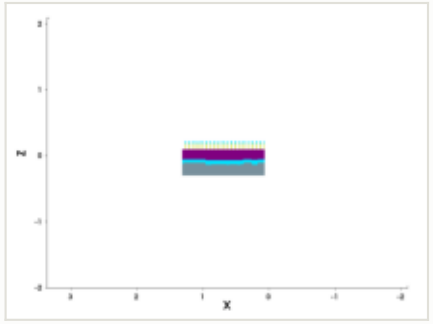

mask for this step

no mask for this step

steps by process area

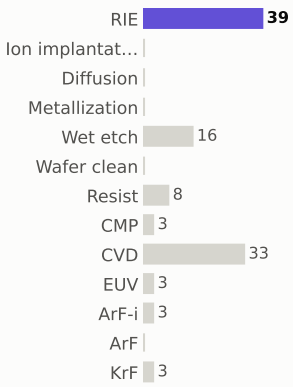

materials deposited (g)

gases emitted (g)



Step #1130: Resist

etch_strip · Resist

0.169	121.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

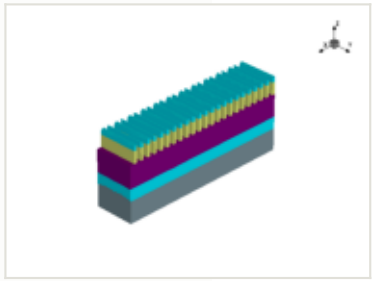

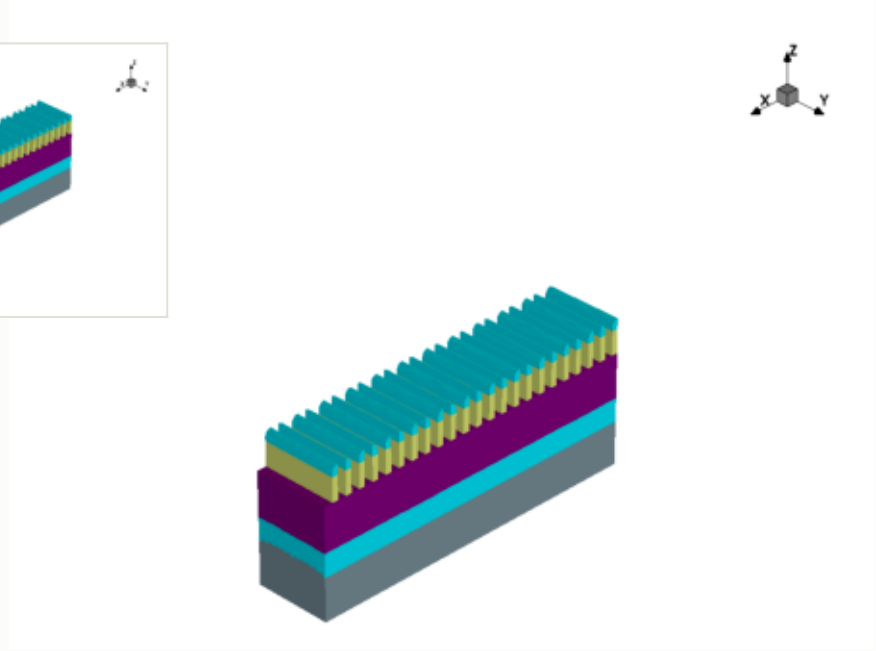

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

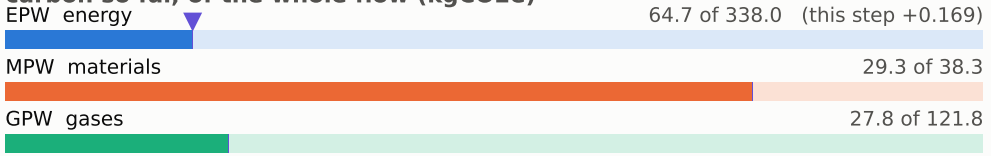

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

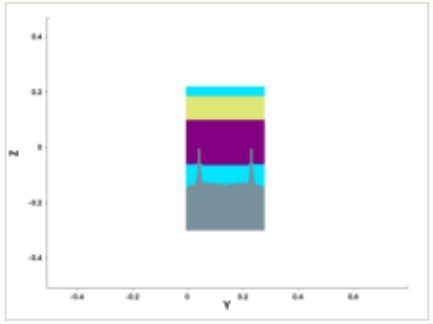

y cut at 0.211 µm

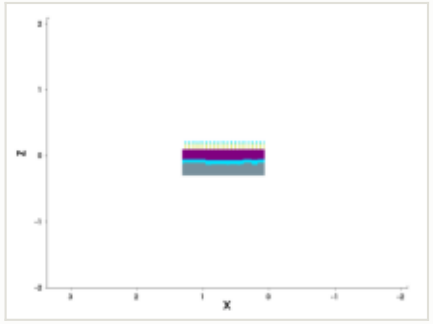

mask for this step

no mask for this step

steps by process area

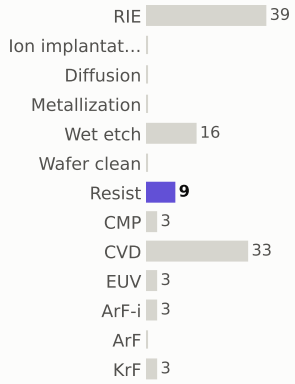

materials deposited (g)



gases emitted (g)

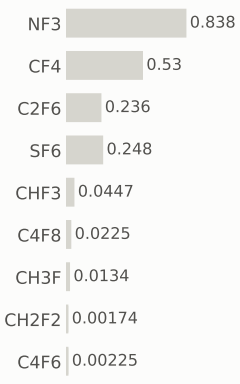

Step #1140: RIE

etch_anisotropic · RIE

1.04	122.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

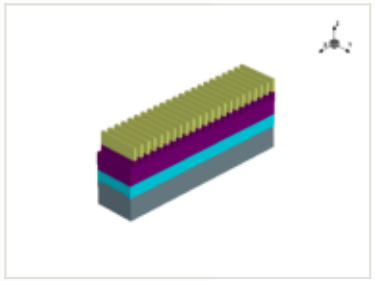

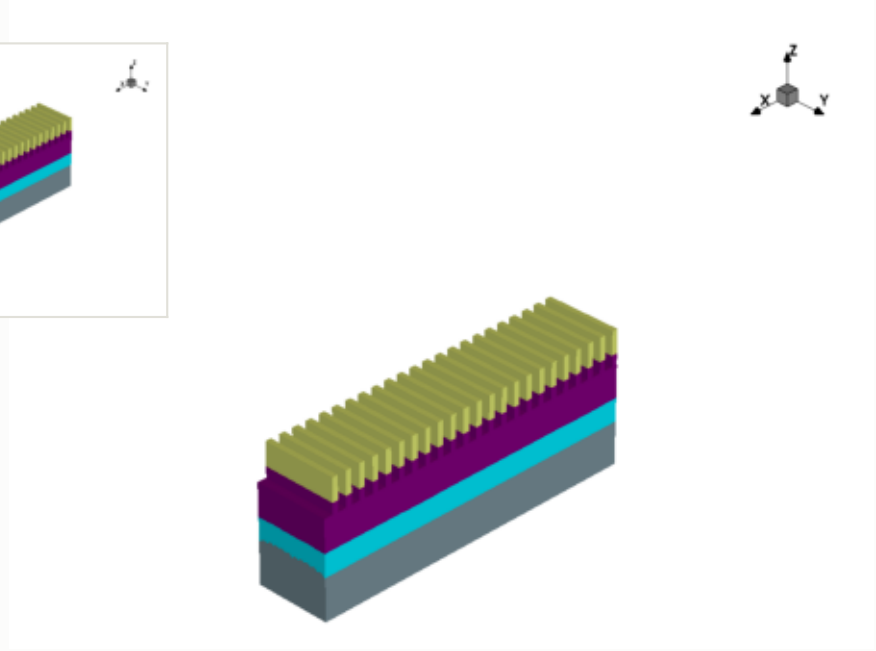

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

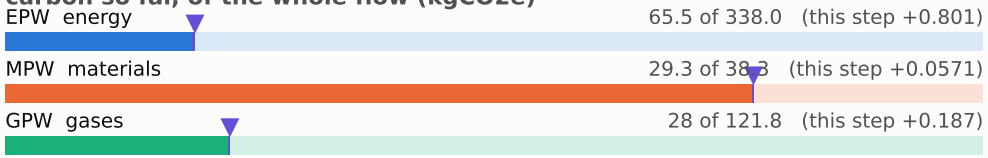

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

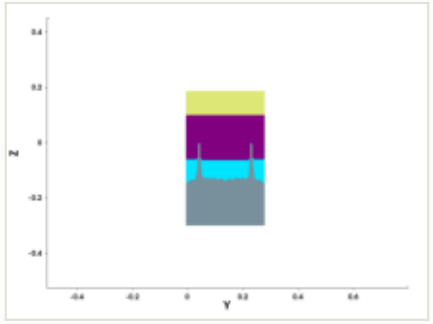

y cut at 0.211 µm

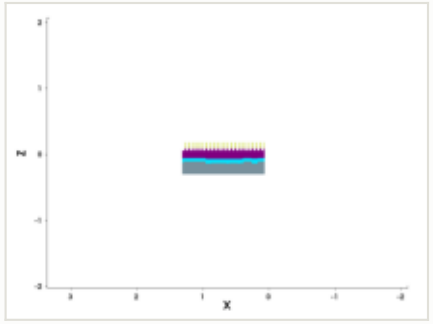

mask for this step

no mask for this step

steps by process area

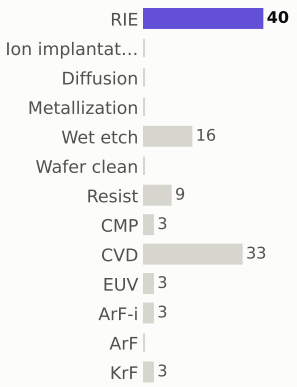

materials deposited (g)

gases emitted (g)



Step #1150: RIE

etch_unified · RIE

1.04	123.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

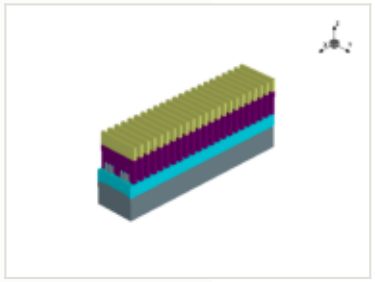

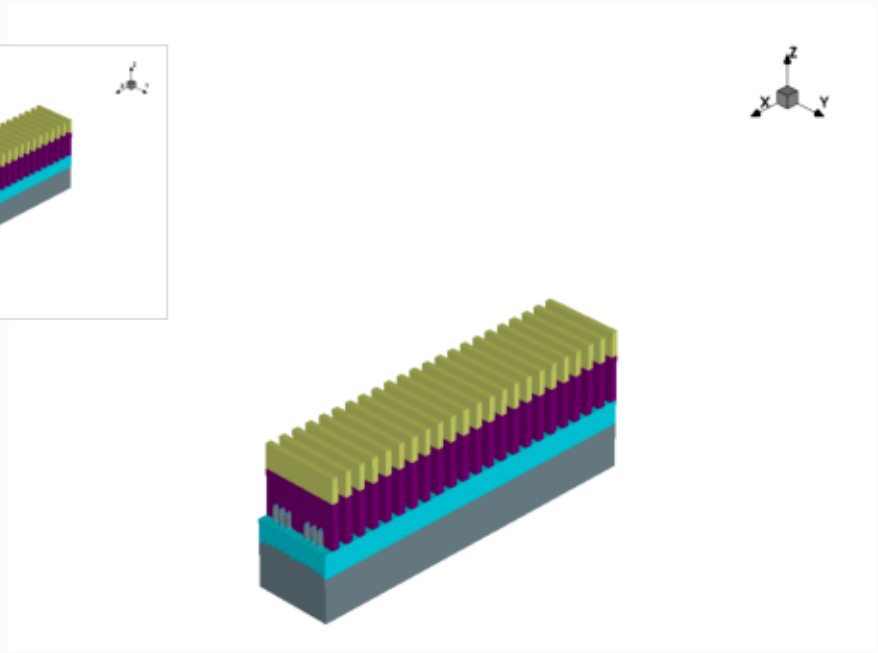

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

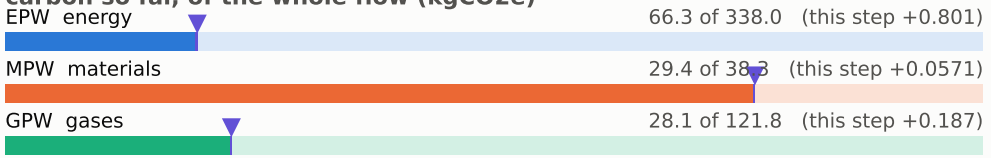

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

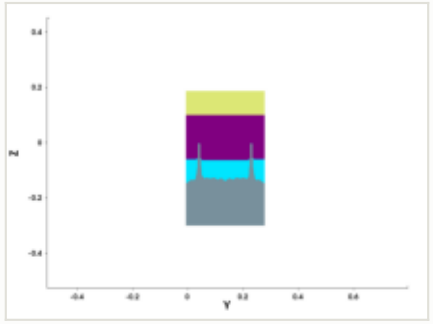

y cut at 0.211 µm

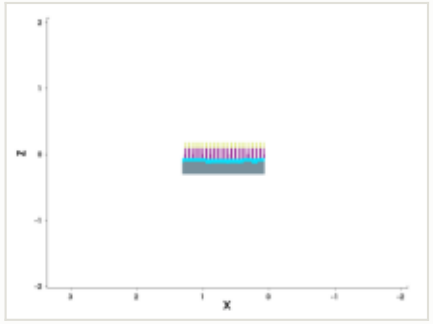

mask for this step

no mask for this step

steps by process area

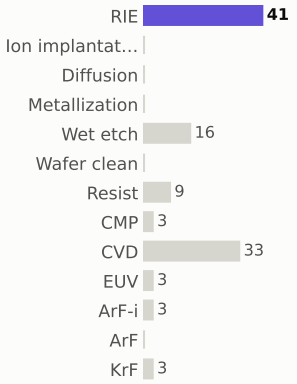

materials deposited (g)

gases emitted (g)



Step #1160: Wet_etch

etch_isotropic · Wet_etch

0.169	124.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

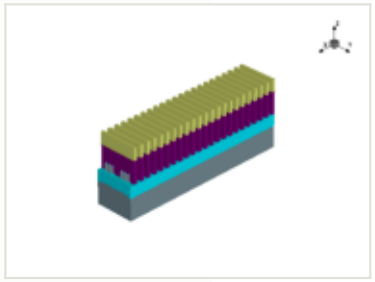

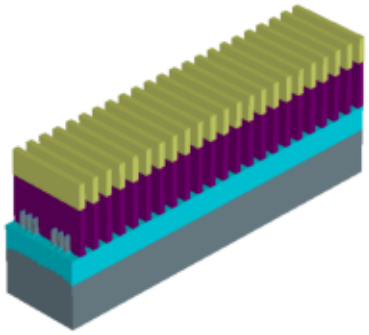

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

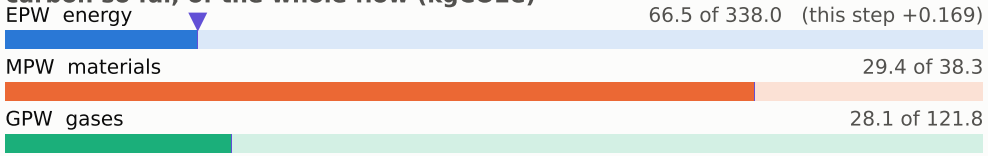

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

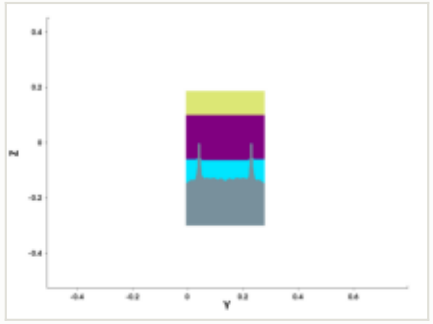

y cut at 0.211 µm

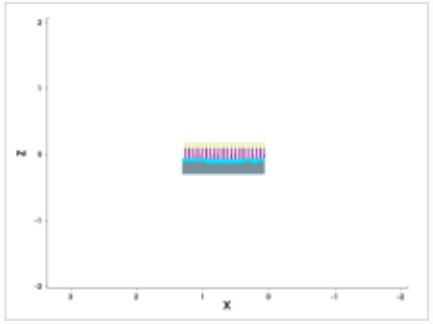

mask for this step

no mask for this step

steps by process area

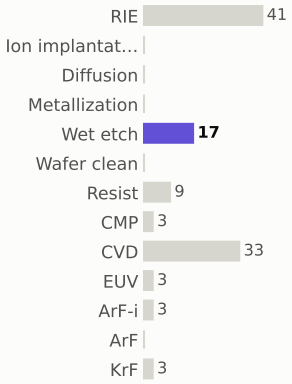

materials deposited (g)



gases emitted (g)



Step #1170: CVD

depo_isotropic · CVD

1.31	125.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

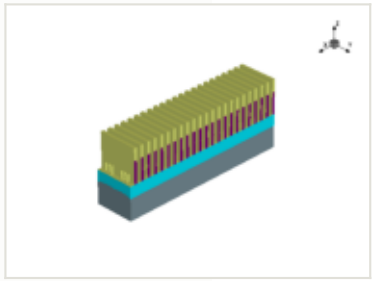

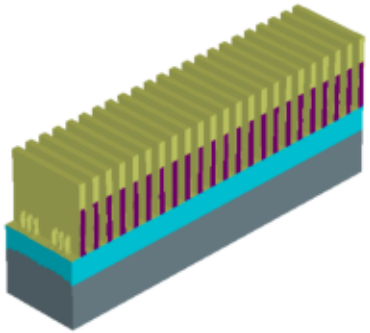

x cut at 0.677 µm

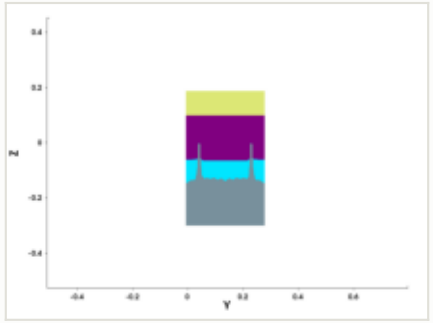

y cut at 0.211 µm

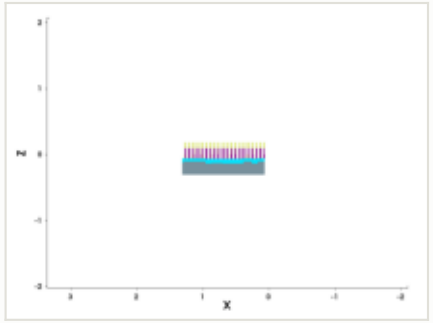

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

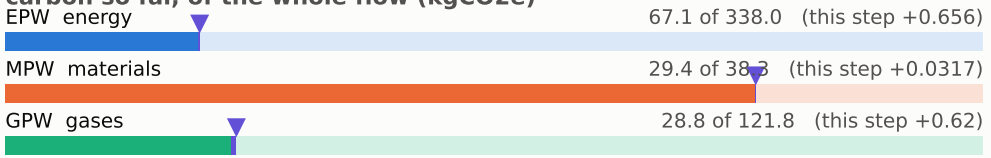

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

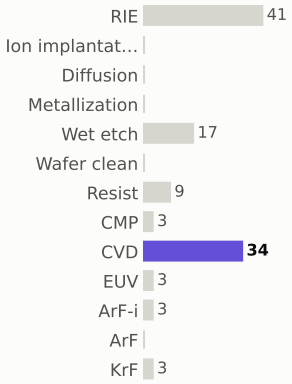

materials deposited (g)

gases emitted (g)



Step #1180: CVD

depo_isotropic · CVD

1.31	126.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

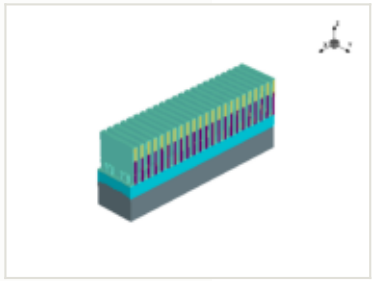

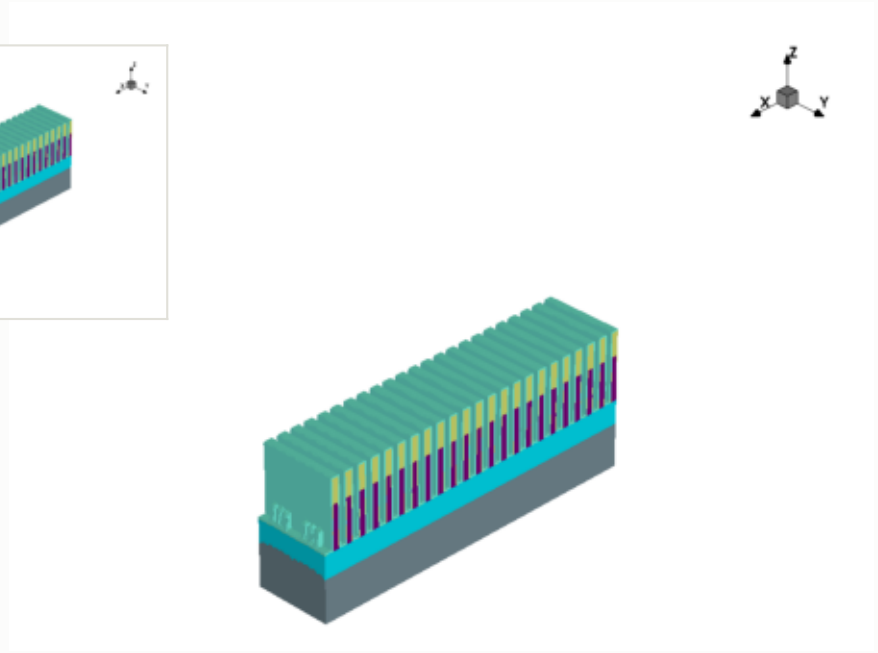

x cut at 0.677 µm

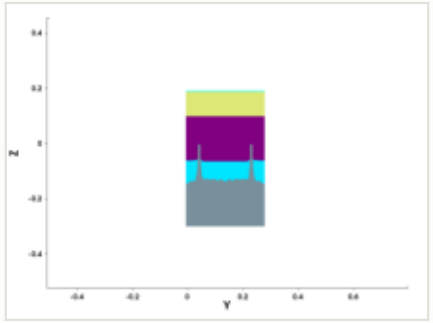

y cut at 0.211 µm

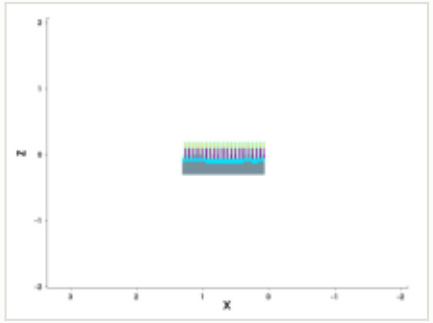

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 67.8 of 338.0 (this step +0.656)

MPW materials — 29.5 of 38.3 (this step +0.0317)

GPW gases — 29.4 of 121.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

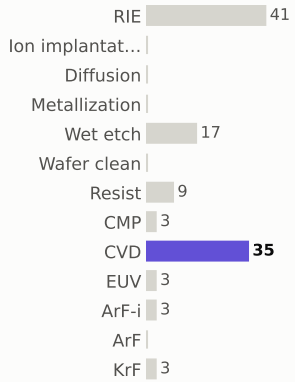

materials deposited (g)

gases emitted (g)



Step #1190: CVD

depo_isotropic · CVD

1.31	127.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

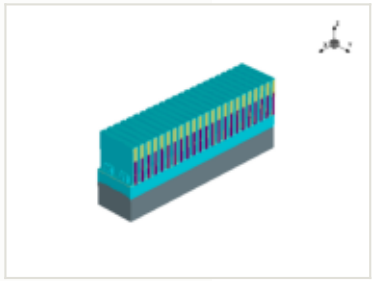



x cut at 0.677 µm

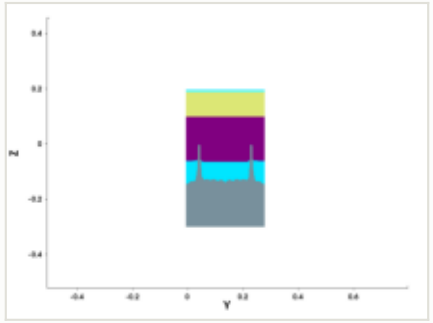

y cut at 0.211 µm

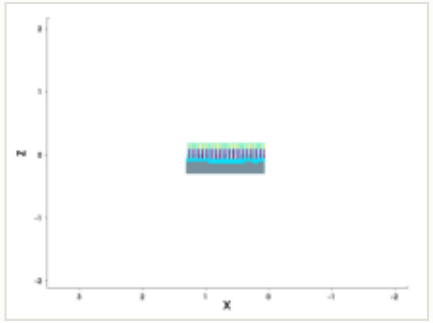

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 68.5 of 338.0 (this step +0.656)

MPW materials — 29.5 of 38.3 (this step +0.0317)

GPW gases — 30 of 121.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)

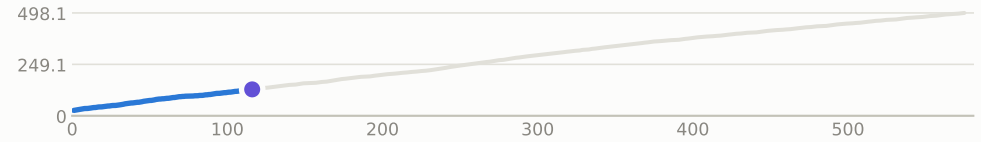

steps by process area

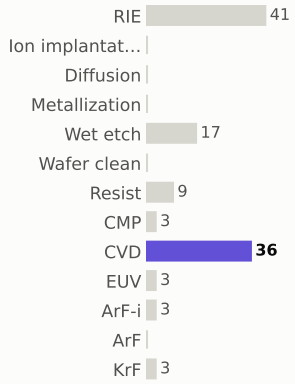

materials deposited (g)



gases emitted (g)



Step #1200: CVD

depo_fill · CVD

1.31	129.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

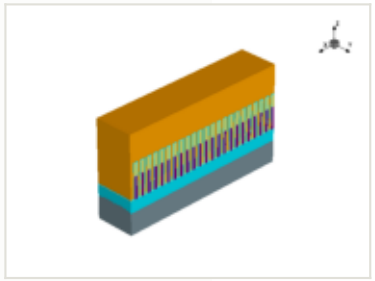

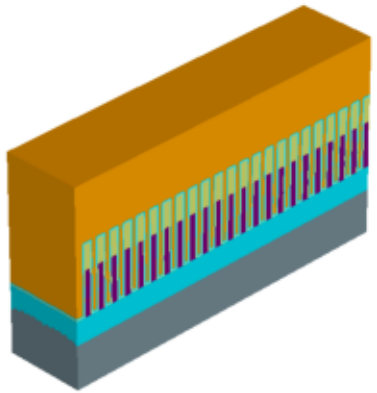

this step

process area	CVD
material	—
thickness	0.2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

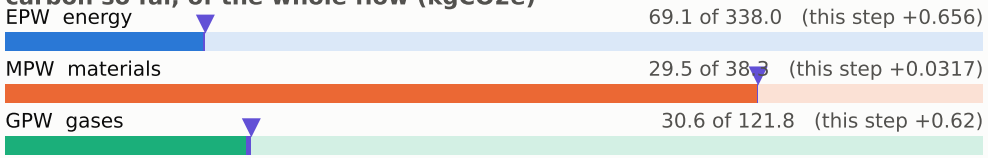

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

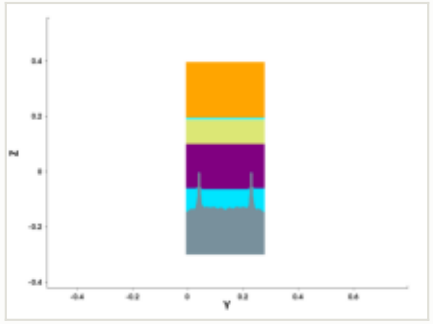

y cut at 0.211 µm

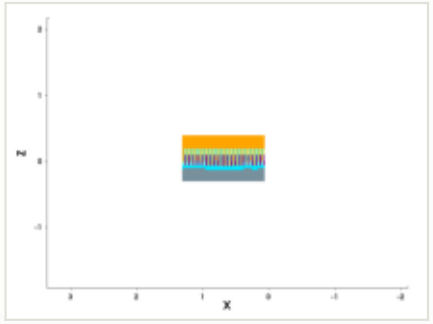

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1210: CVD

depo_isotropic · CVD

1.31	130.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

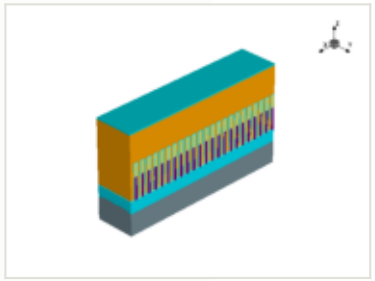

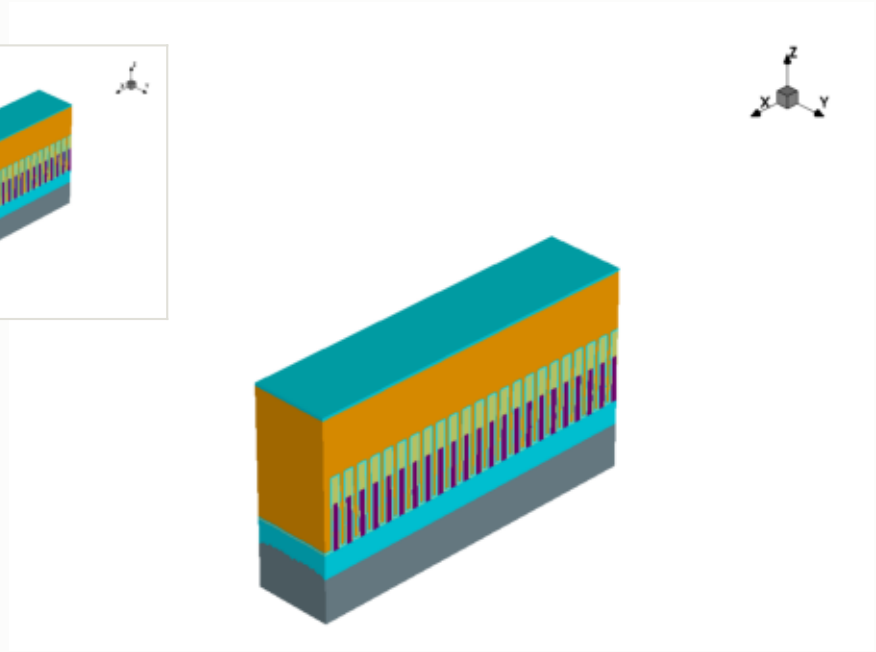

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

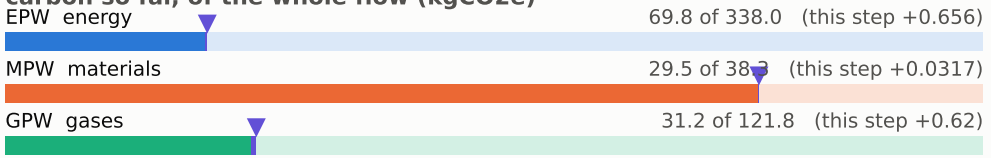

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

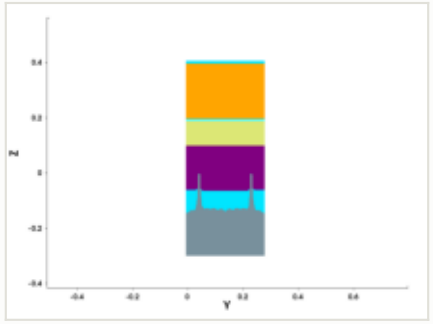

y cut at 0.211 µm

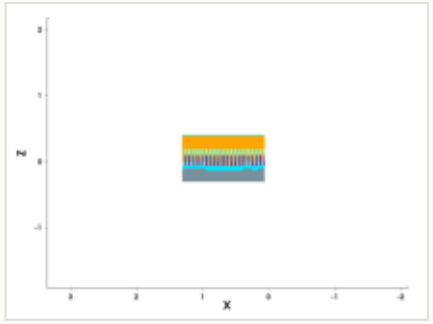

mask for this step

no mask for this step

steps by process area

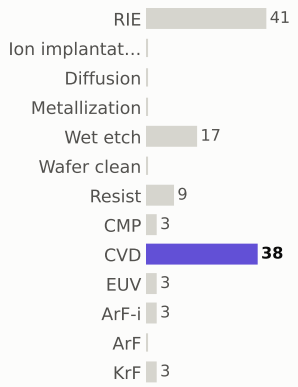

materials deposited (g)

gases emitted (g)



Step #1220: KrF

litho_patterning · KrF

0.199	130.8	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

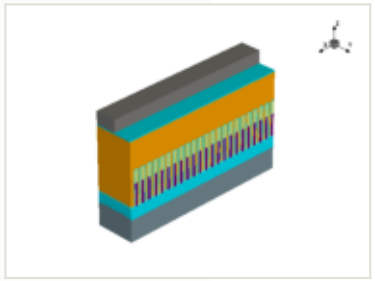

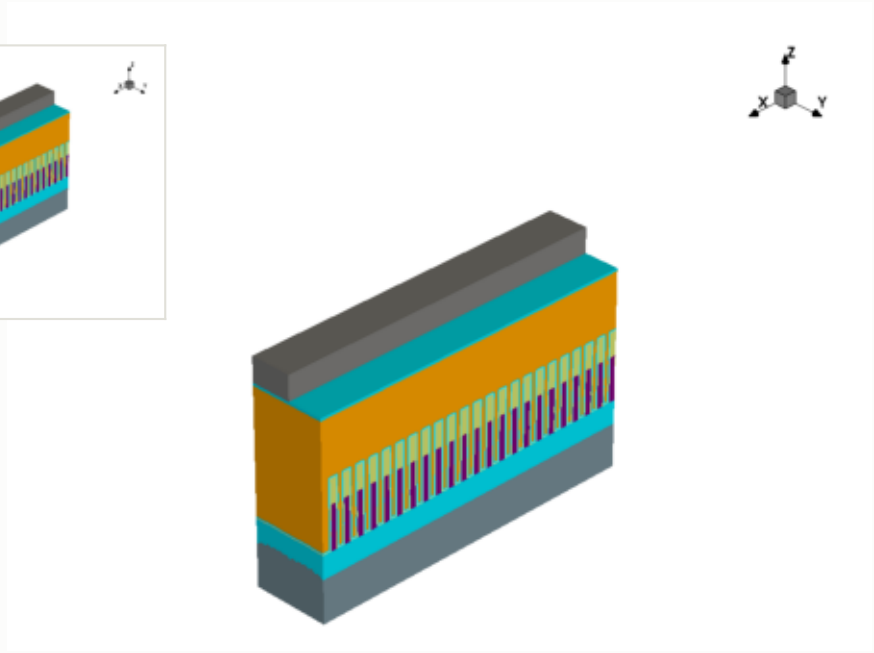

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

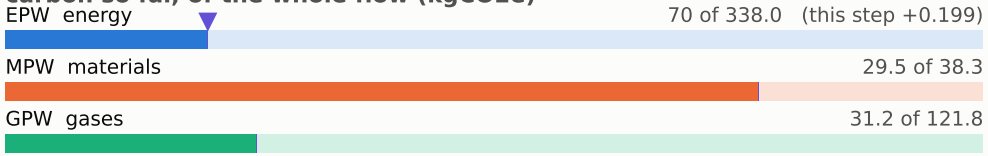

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

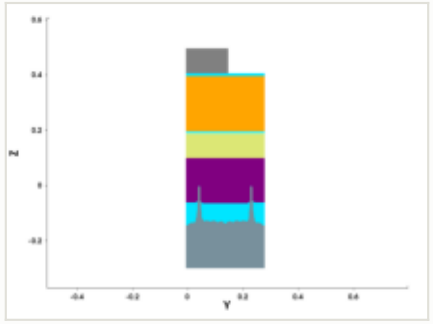

y cut at 0.211 µm

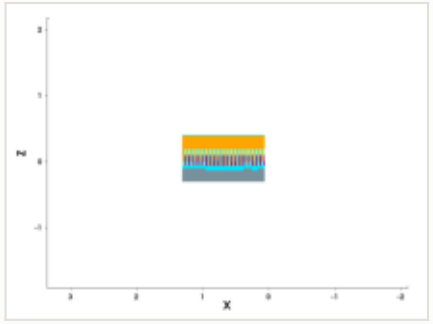

mask: layer 12:0, positive (GDSII)

steps by process area



materials deposited (g)

gases emitted (g)



Step #1230: RIE

etch_anisotropic · RIE

1.04	131.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

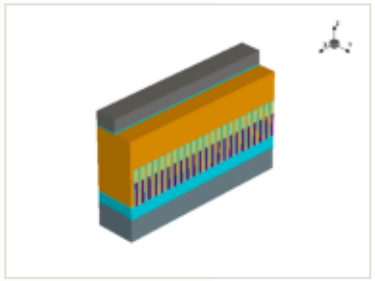

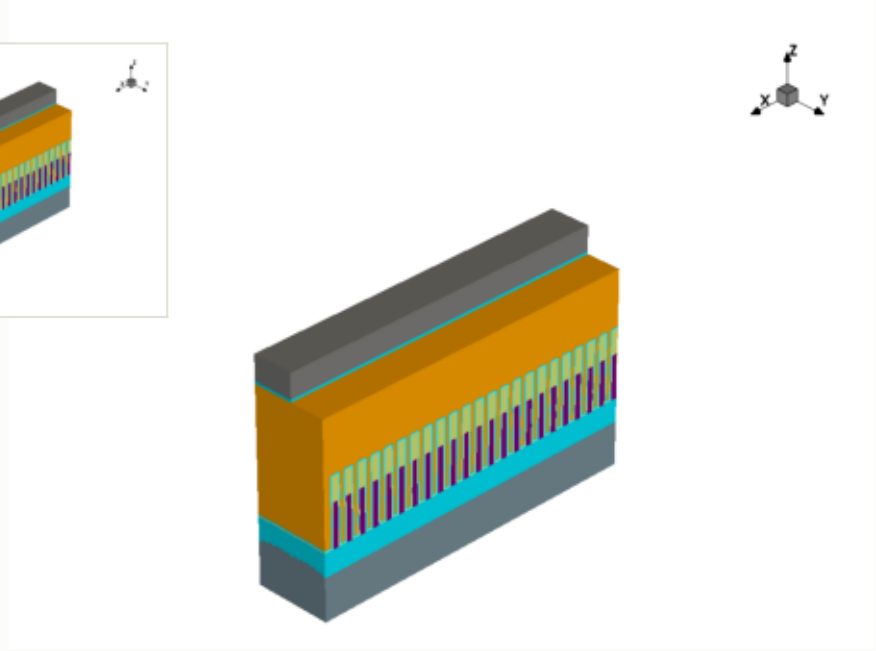

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

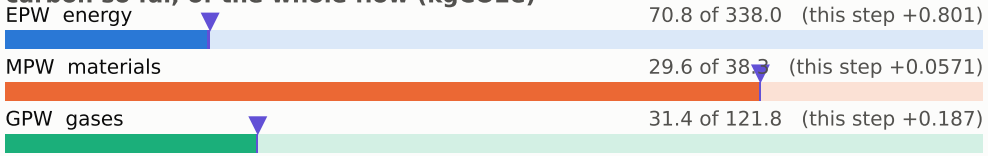

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

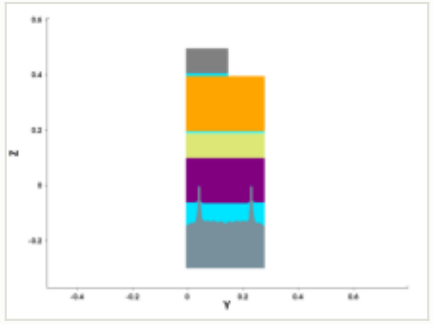

y cut at 0.211 µm

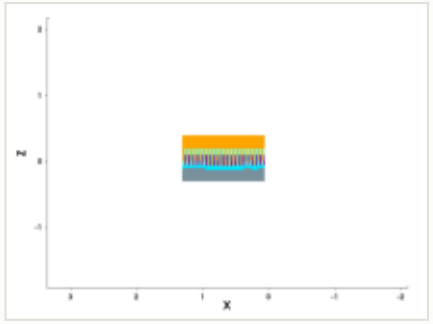

mask for this step

no mask for this step

steps by process area

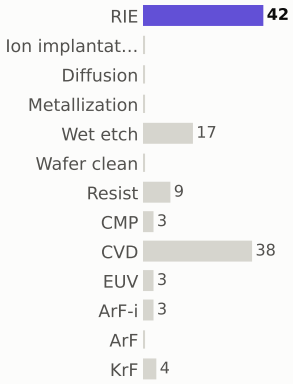

materials deposited (g)

gases emitted (g)



Step #1240: RIE

etch_anisotropic · RIE

1.04	132.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

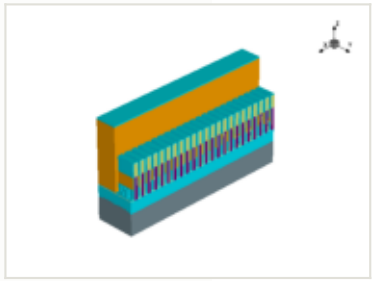

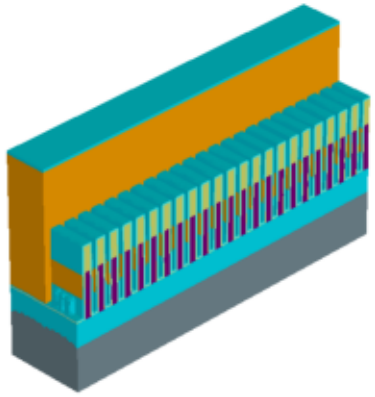

x cut at 0.677 µm

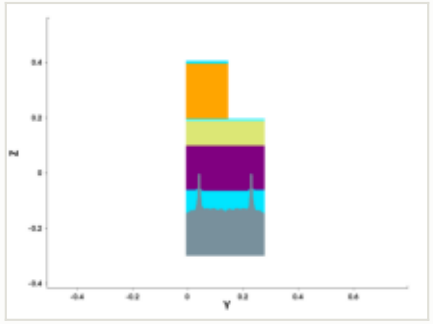

y cut at 0.211 µm

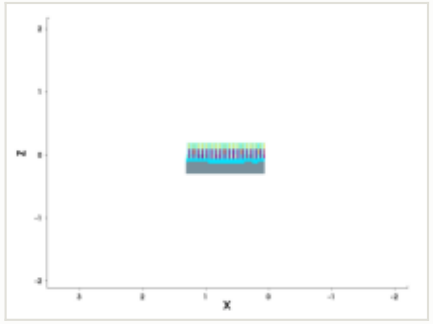

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

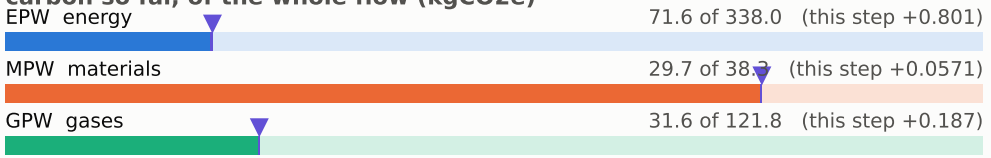

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

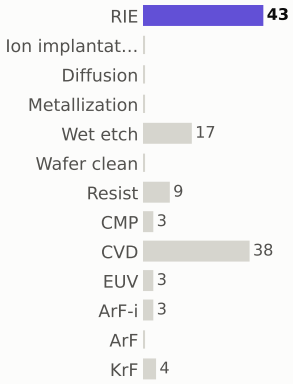

materials deposited (g)

gases emitted (g)



Step #1250: Wet_etch

etch_isotropic · Wet_etch

0.169	133.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

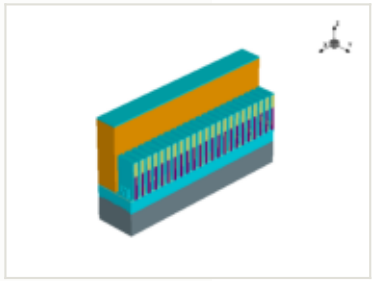

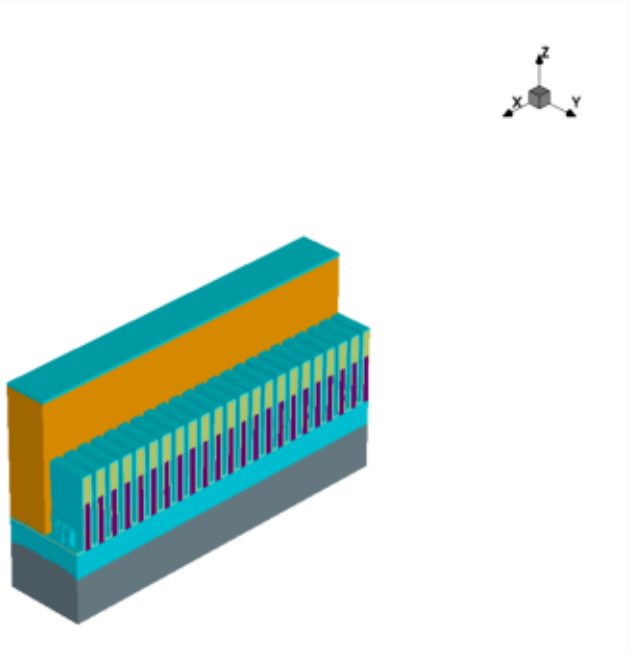

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

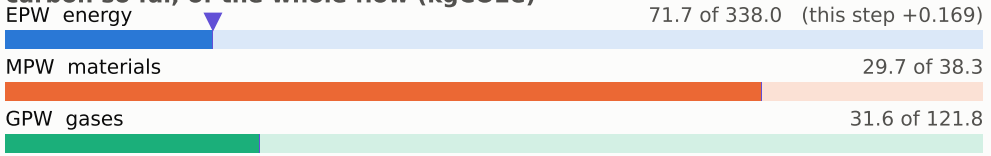

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

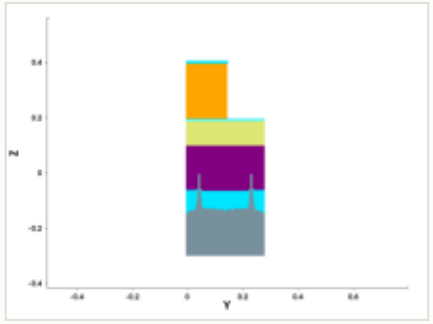

y cut at 0.211 µm

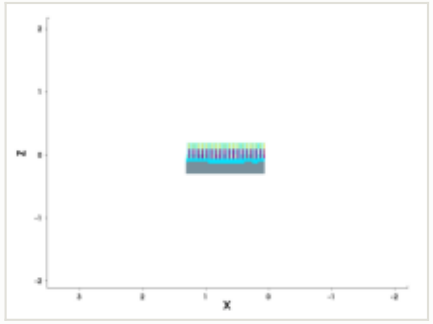

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1260: RIE

etch_anisotropic · RIE

1.04	134.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

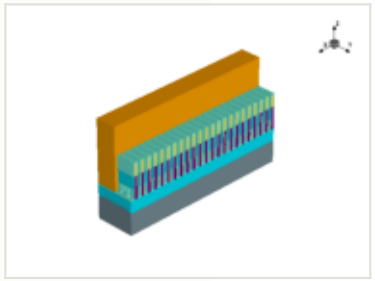

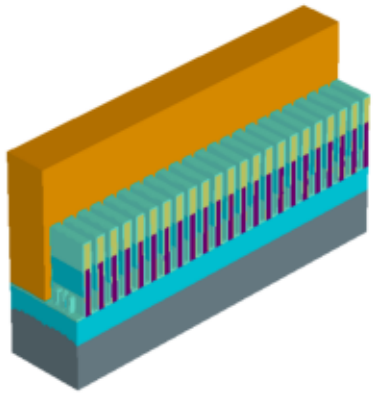

x cut at 0.677 µm

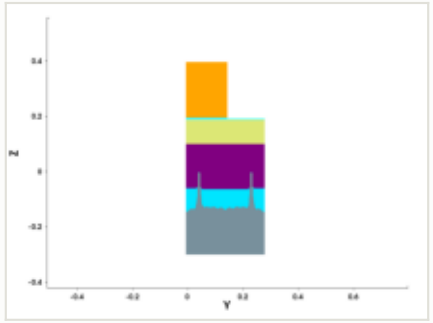

y cut at 0.211 µm

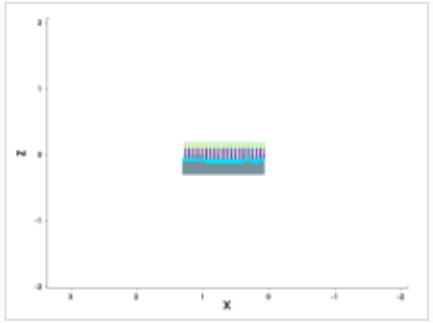

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

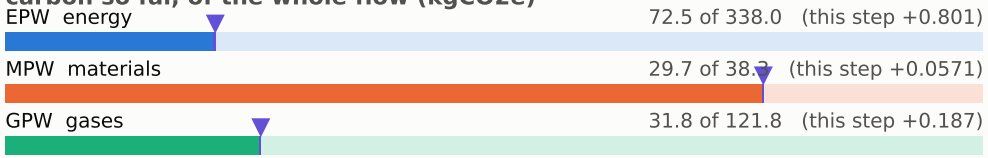

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

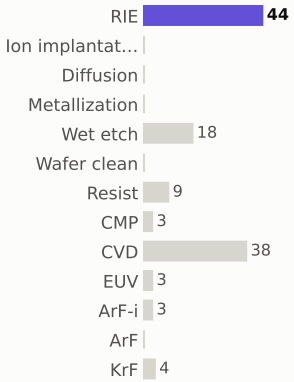

materials deposited (g)



gases emitted (g)



Step #1270: RIE

etch_unified · RIE

1.04	135.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

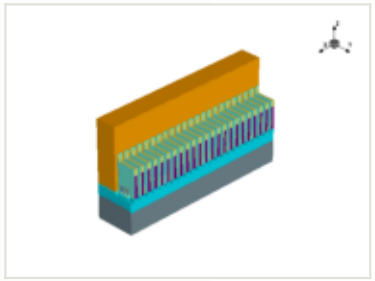

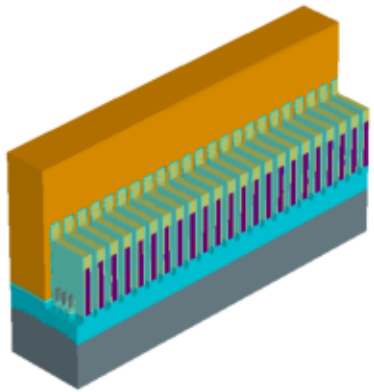

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

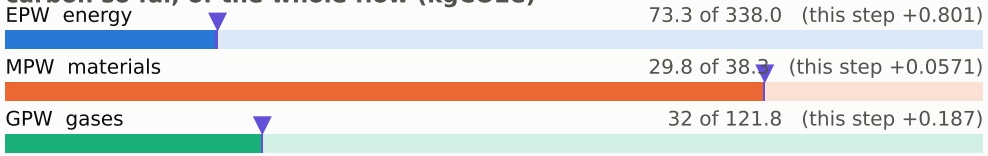

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

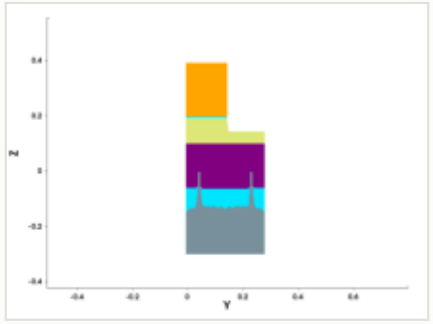

y cut at 0.211 µm

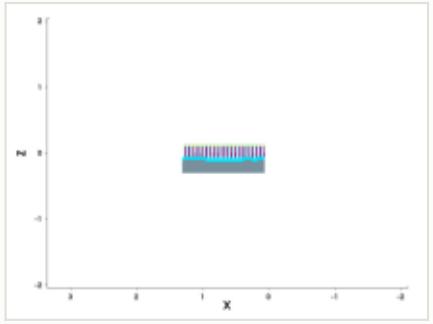

mask for this step

no mask for this step

steps by process area

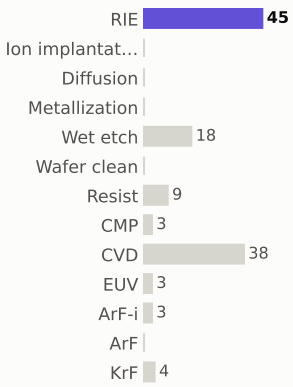

materials deposited (g)

gases emitted (g)



Step #1280: Wet_etch

etch_isotropic · Wet_etch

0.169	135.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

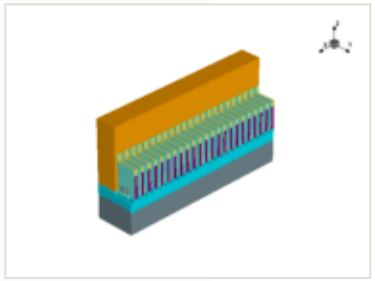

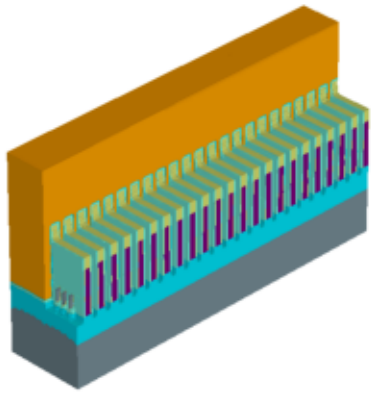

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

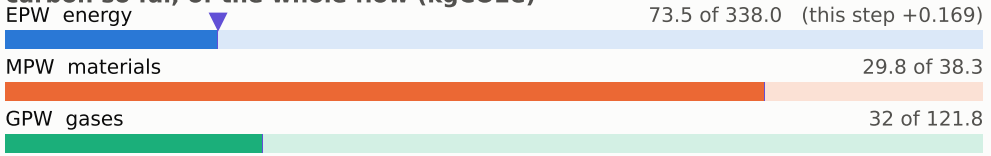

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

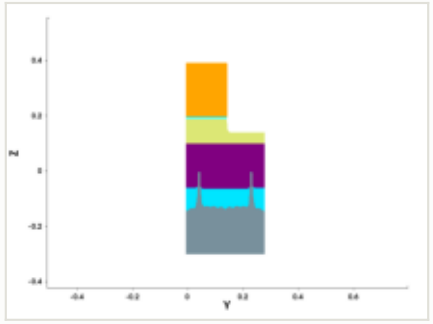

y cut at 0.211 µm

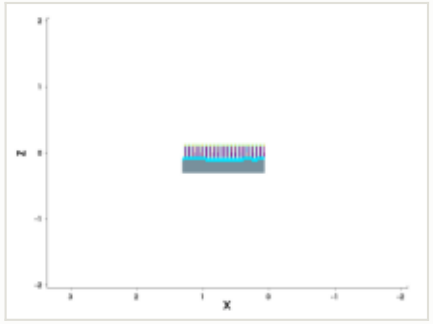

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1290: RIE

etch_unified · RIE

1.04	136.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

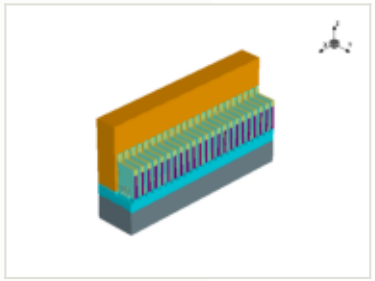

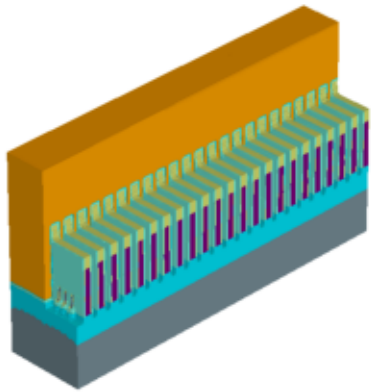

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

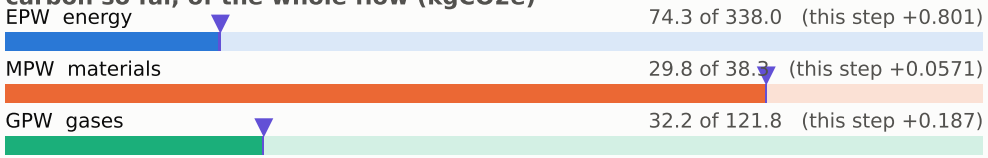

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

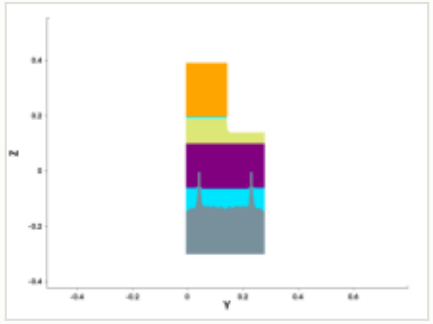

y cut at 0.211 µm

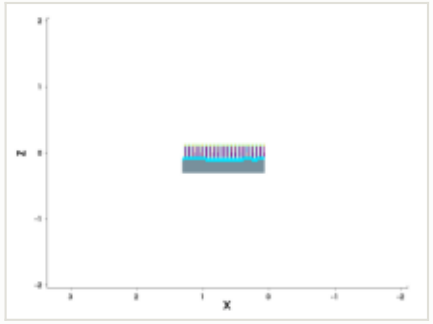

mask for this step

no mask for this step

steps by process area

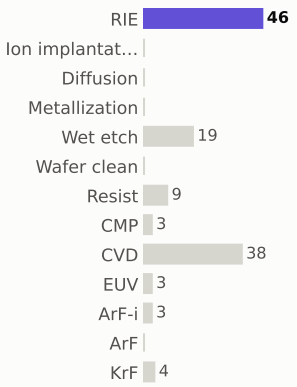

materials deposited (g)

gases emitted (g)



Step #1300: RIE

etch_unified · RIE

1.04	137.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

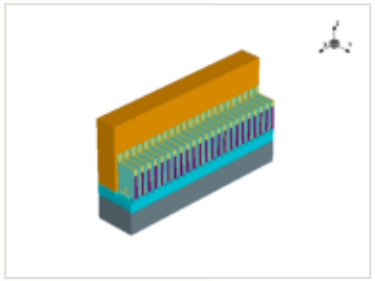

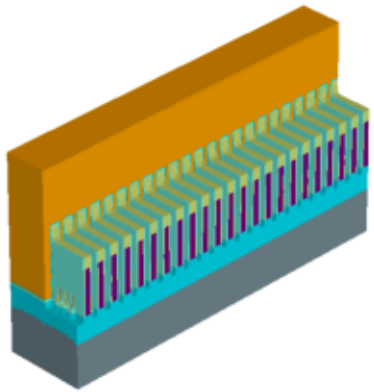

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

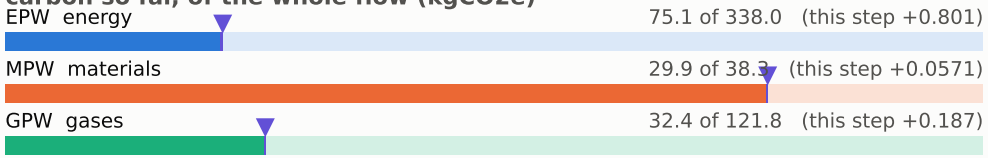

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

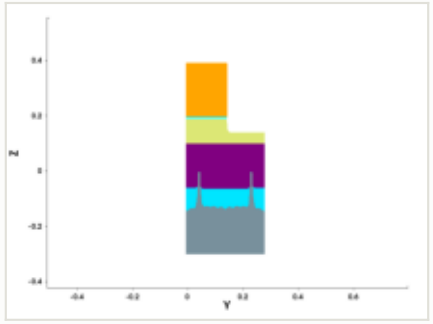

y cut at 0.211 µm

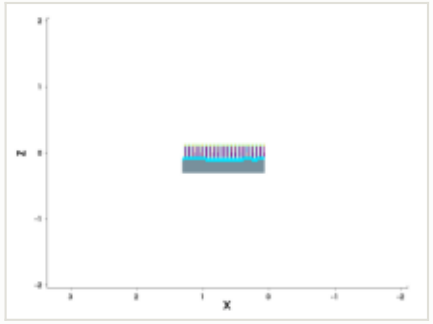

mask for this step

no mask for this step

steps by process area

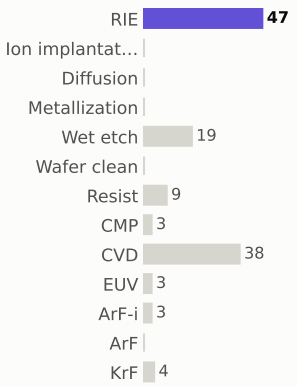

materials deposited (g)

gases emitted (g)



Step #1310: Resist

etch_strip · Resist

0.169	137.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

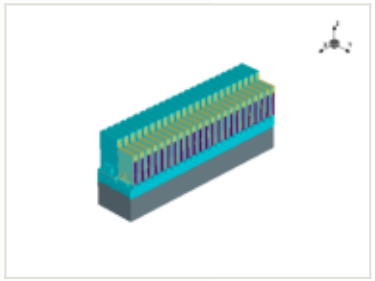

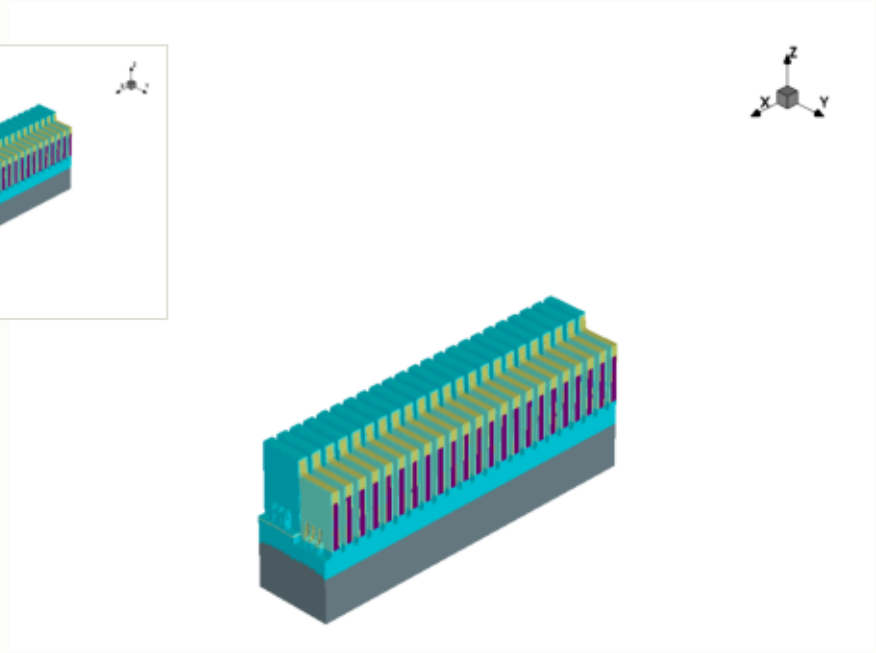

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

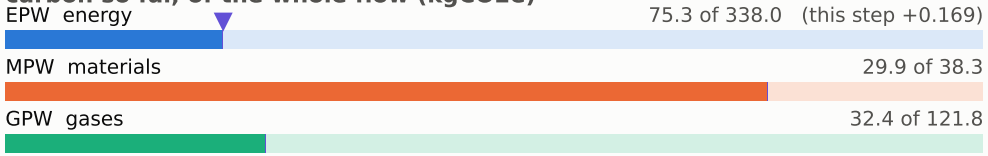

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

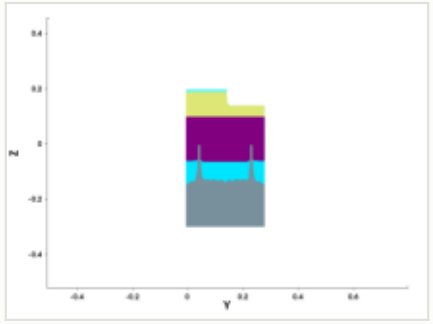

y cut at 0.211 µm

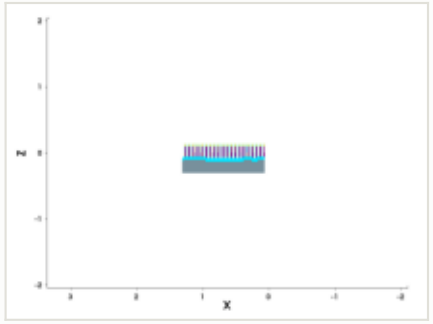

mask for this step

no mask for this step

steps by process area

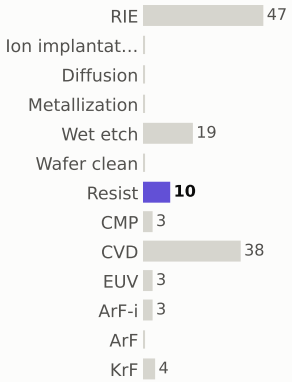

materials deposited (g)

gases emitted (g)



Step #1320: RIE

etch_ellipsoidal · RIE

1.04	138.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

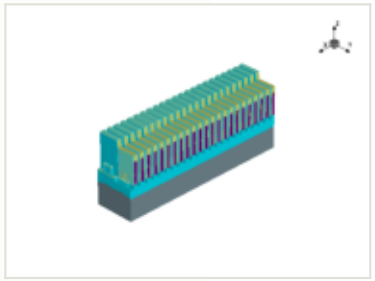

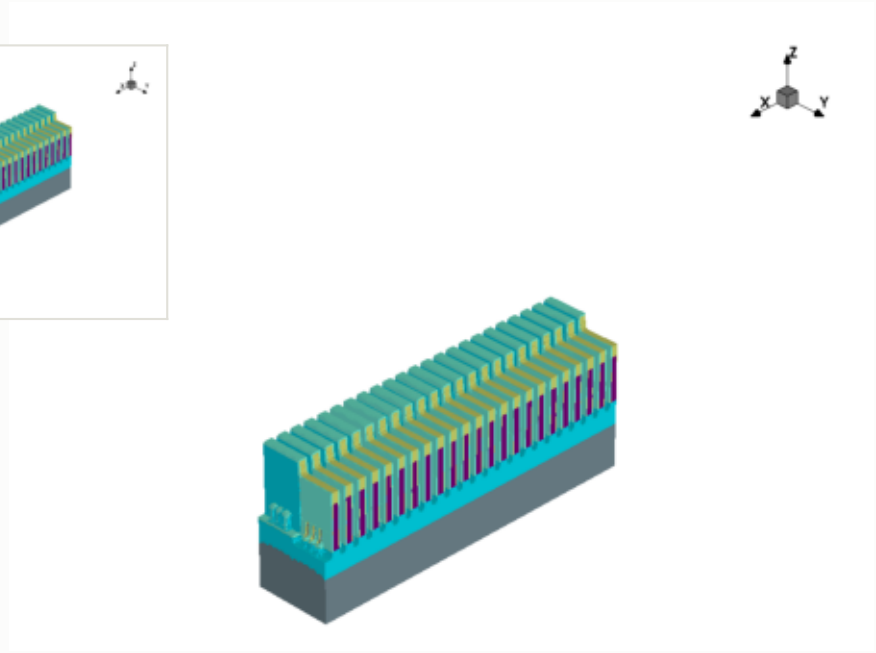

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

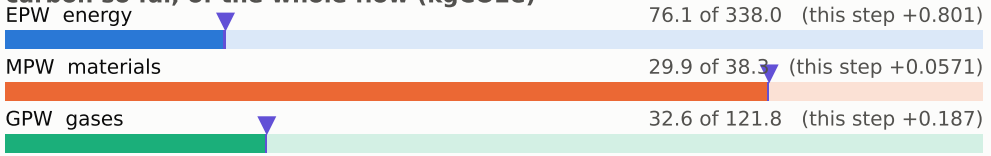

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

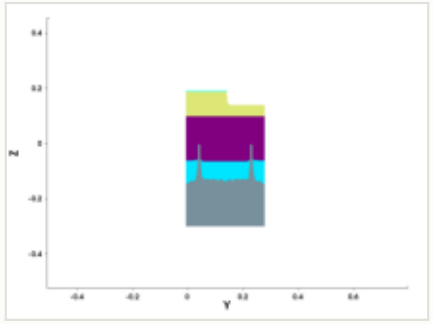

y cut at 0.211 µm

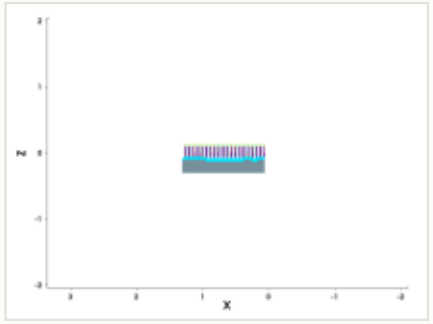

mask for this step

no mask for this step

steps by process area

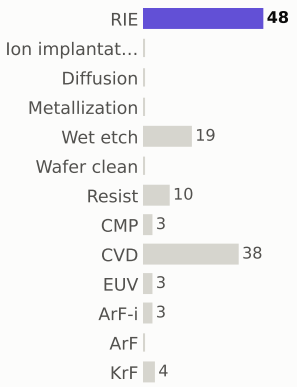

materials deposited (g)

gases emitted (g)

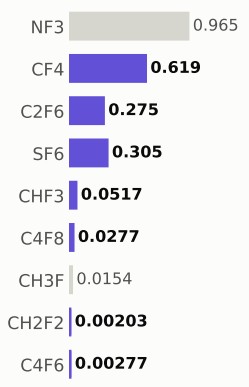

Step #1330: CVD

depo_epi · CVD

1.31	139.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

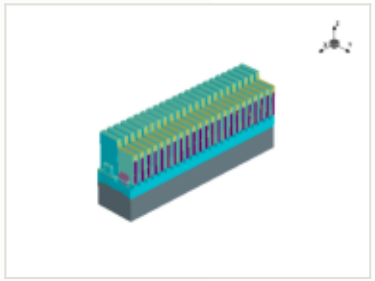

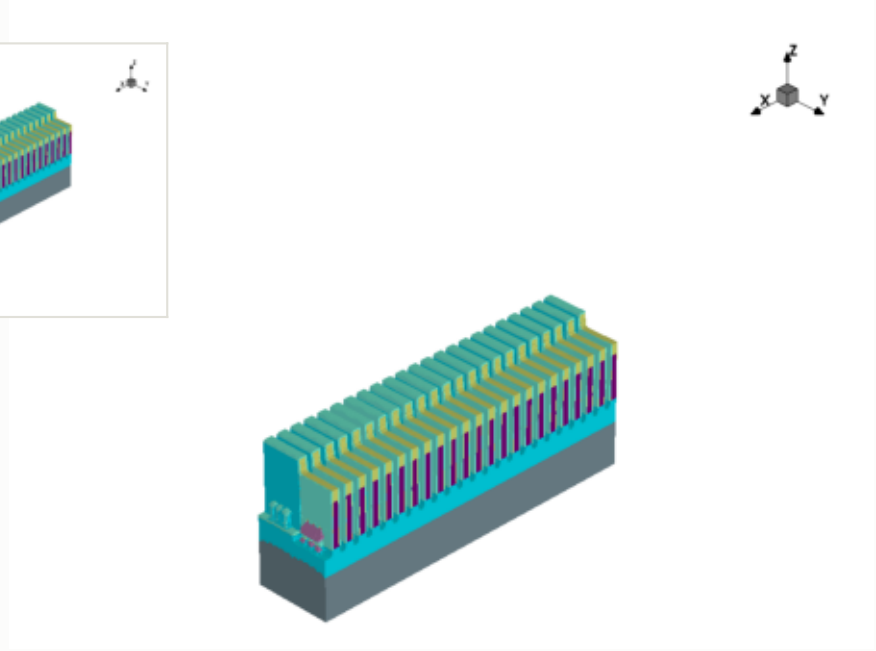

this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

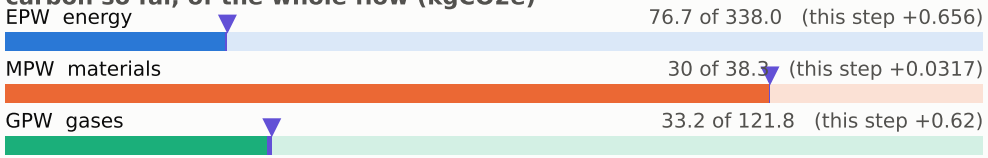

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

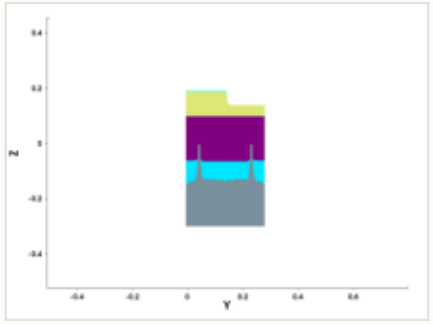

y cut at 0.211 µm

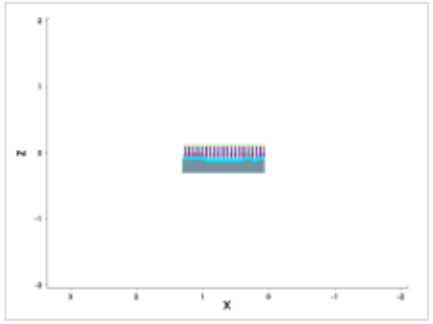

mask for this step

no mask for this step

steps by process area

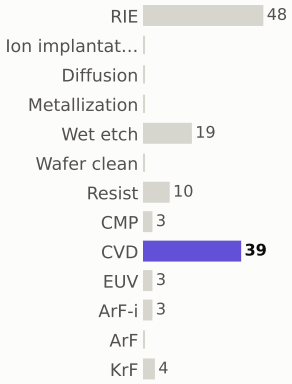

materials deposited (g)

gases emitted (g)

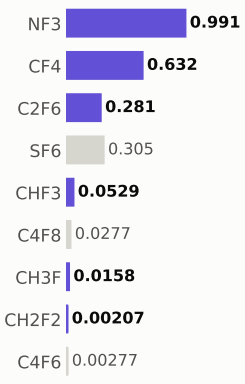

Step #1340: CVD

depo_epi · CVD

1.31	141.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

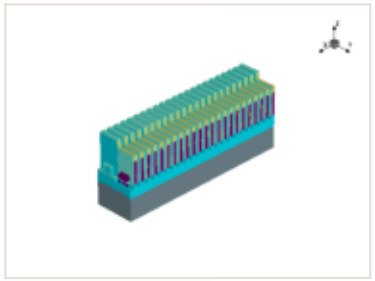



this step

process area	CVD
material	—
thickness	0.004 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

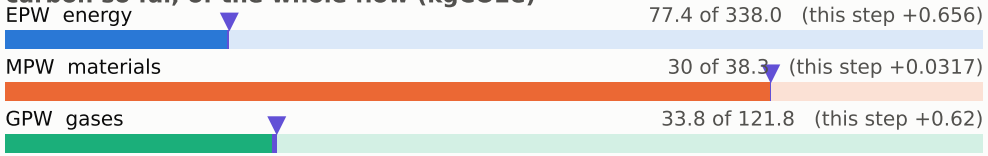

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

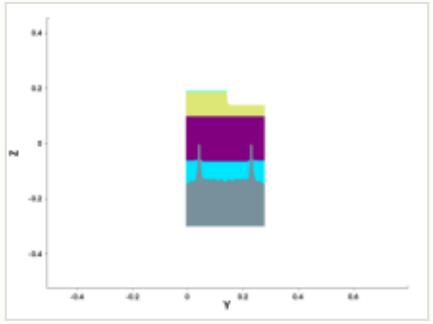

y cut at 0.211 µm

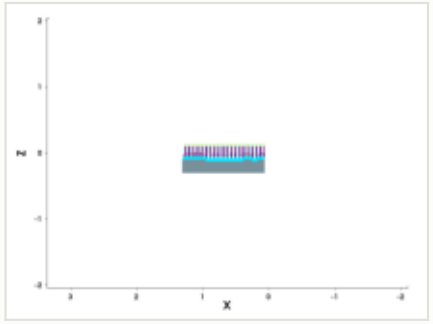

mask for this step

no mask for this step

steps by process area

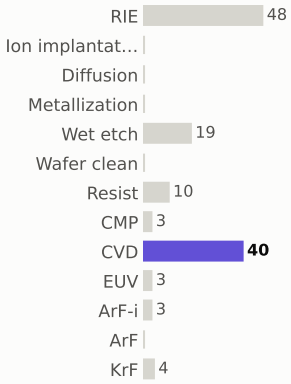

materials deposited (g)

gases emitted (g)



Step #1350: CVD

depo_isotropic · CVD

1.31	142.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

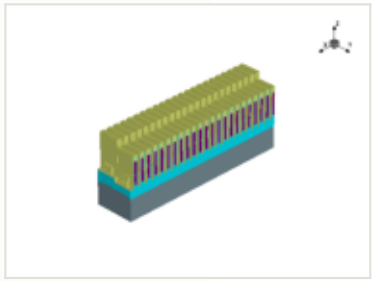



x cut at 0.677 µm

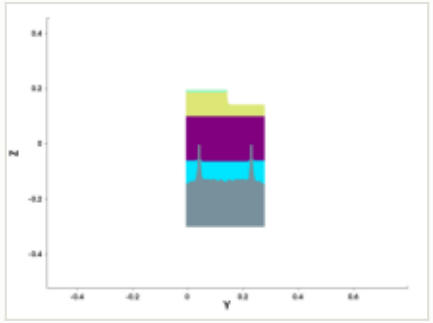

y cut at 0.211 µm

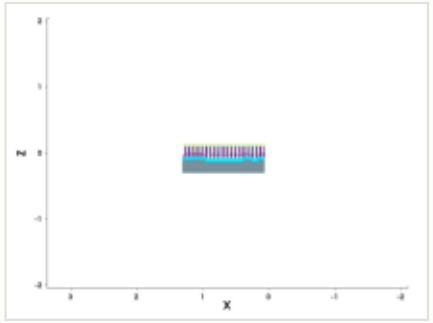

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0015 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

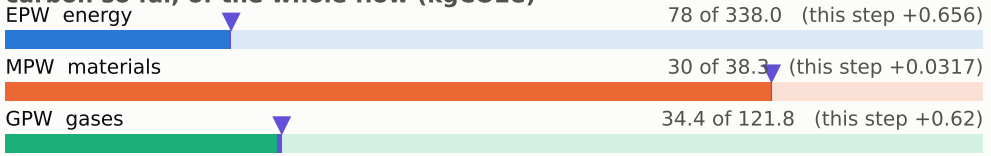

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

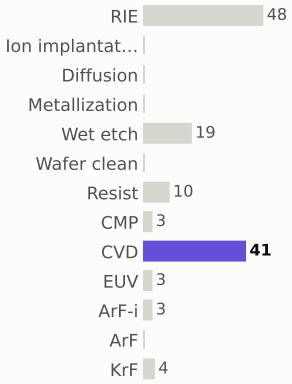

materials deposited (g)



gases emitted (g)



Step #1360: CVD

depo_fill · CVD

1.31	143.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

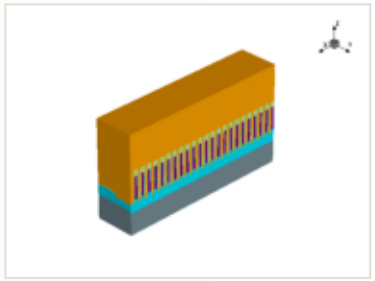

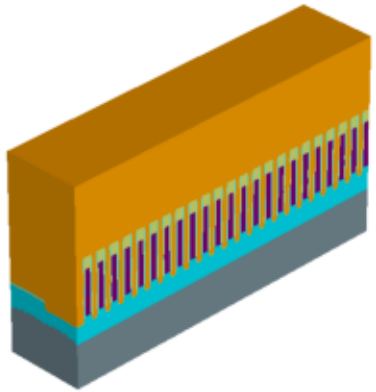

this step

process area	CVD
material	—
thickness	0.2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

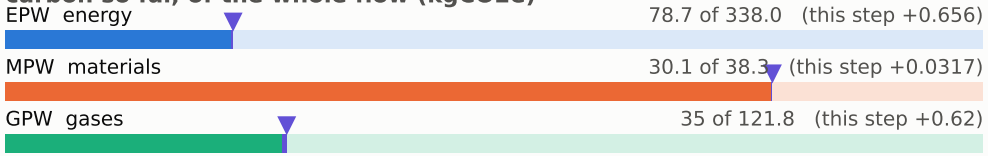

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

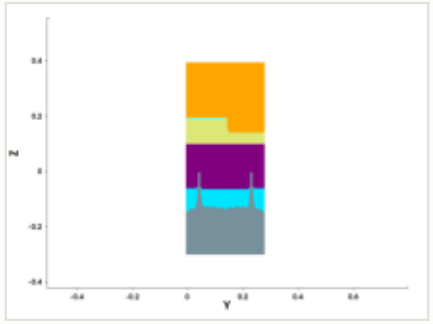

y cut at 0.211 µm

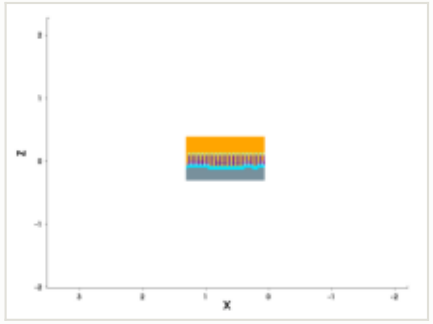

mask for this step

no mask for this step

steps by process area

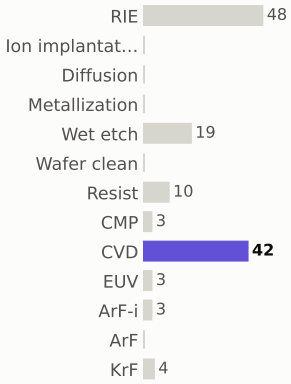

materials deposited (g)



gases emitted (g)



Step #1370: CVD

depo_isotropic · CVD

1.31	145.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

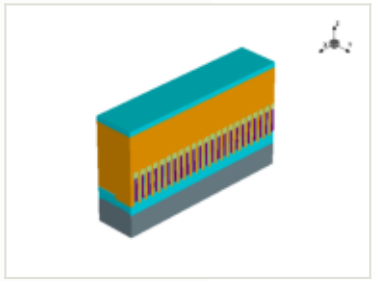

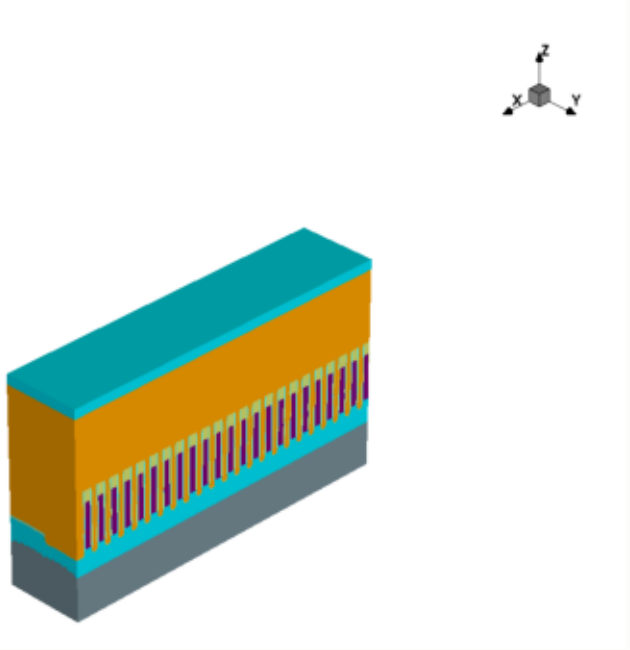

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

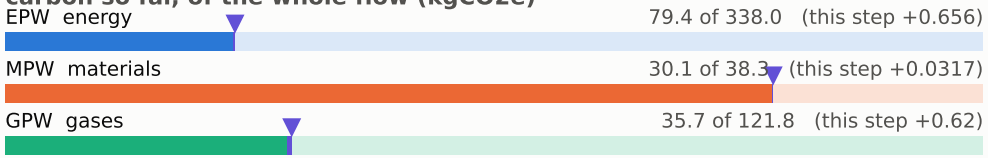

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

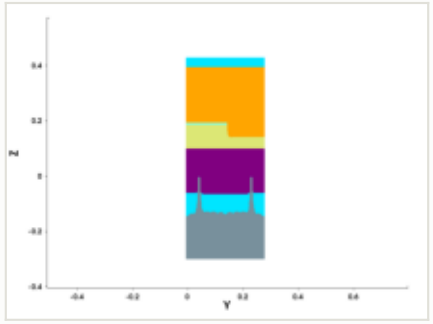

y cut at 0.211 µm

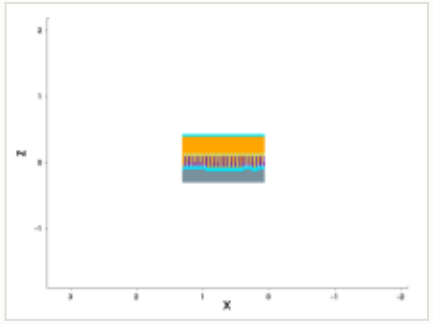

mask for this step

no mask for this step

steps by process area

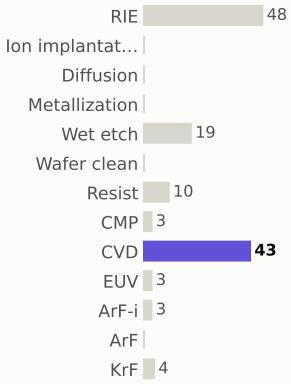

materials deposited (g)

gases emitted (g)



Step #1380: KrF

litho_patterning · KrF

0.199	145.3	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

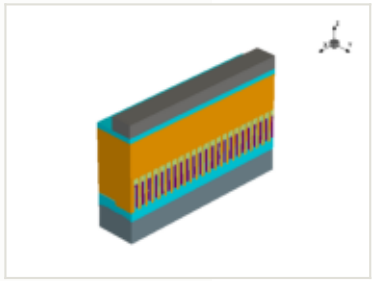

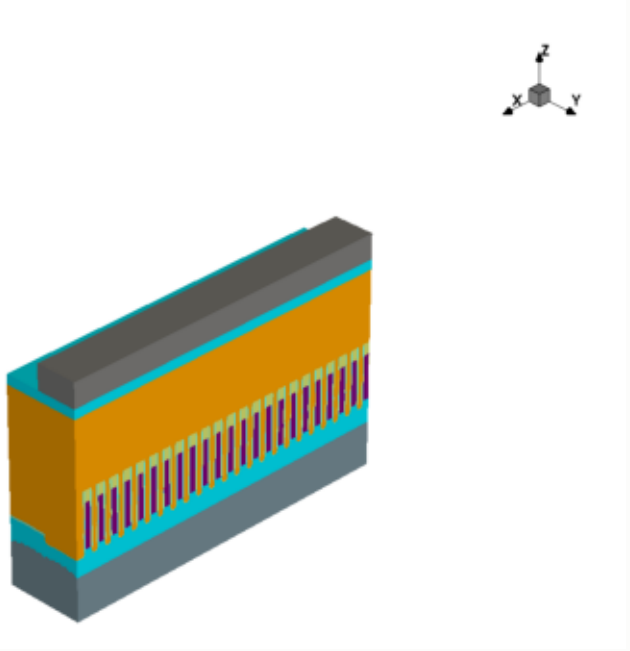

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

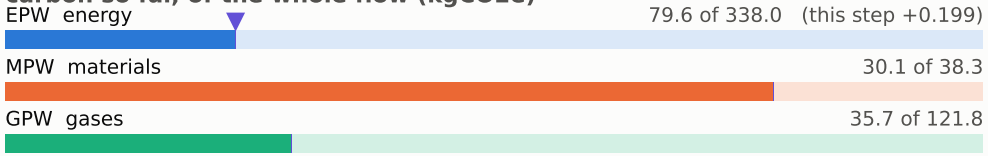

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

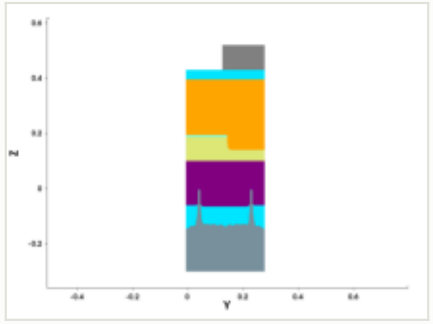

y cut at 0.211 µm

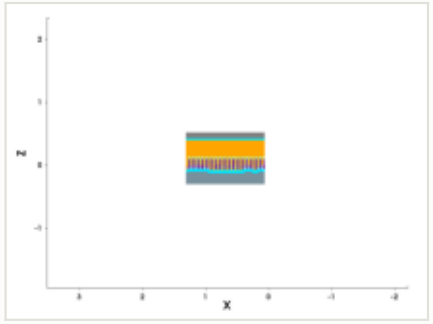

mask: layer 1:0, positive (GDSII)

steps by process area

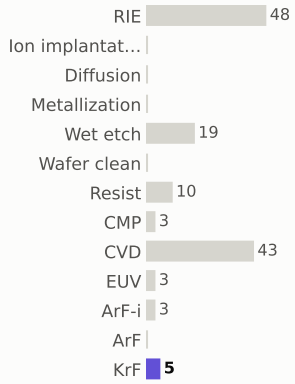

materials deposited (g)

gases emitted (g)



Step #1390: RIE

etch_anisotropic · RIE

1.04	146.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

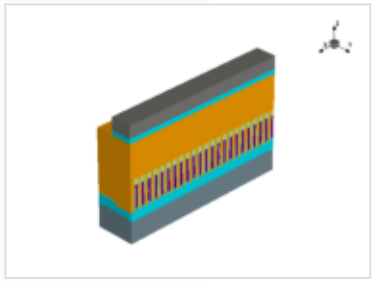

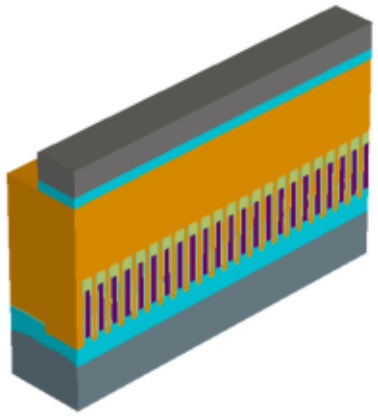

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

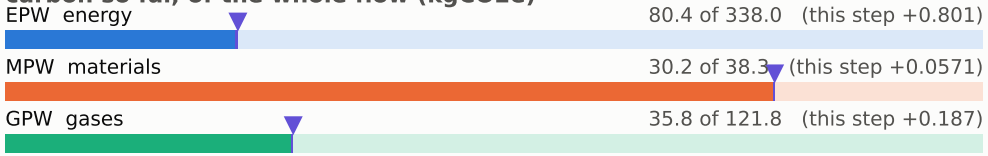

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

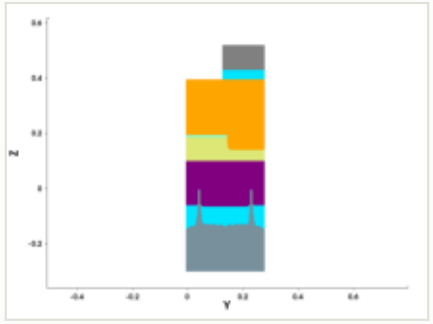

y cut at 0.211 µm

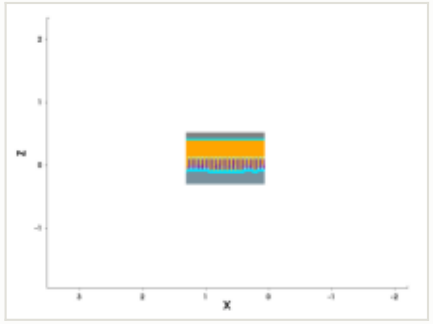

mask for this step

no mask for this step

steps by process area

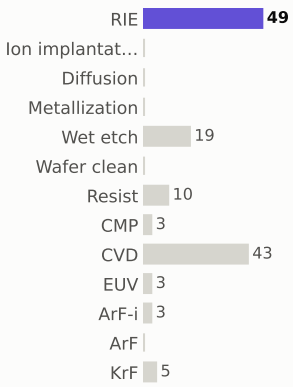

materials deposited (g)



gases emitted (g)



Step #1400: RIE

etch_anisotropic · RIE

1.04	147.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

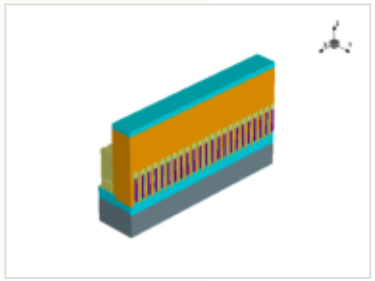

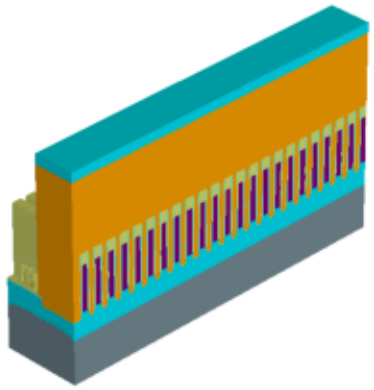

x cut at 0.677 µm

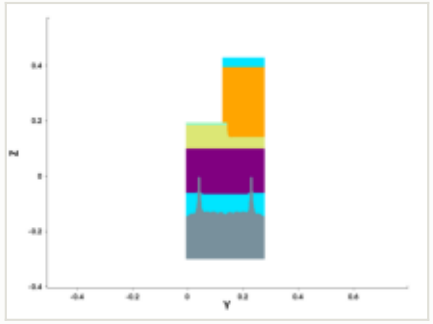

y cut at 0.211 µm

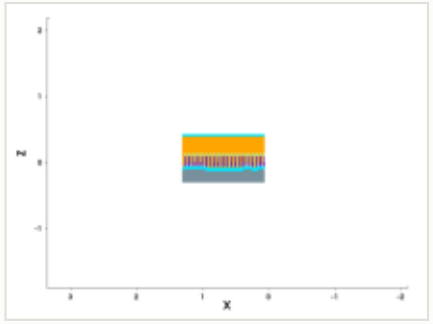

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

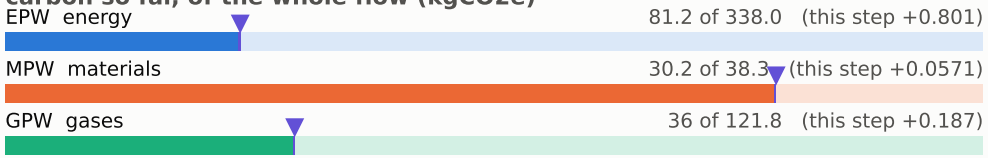

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #1410: Wet_etch

etch_isotropic · Wet_etch

0.169	147.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

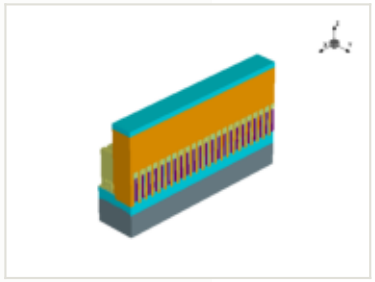

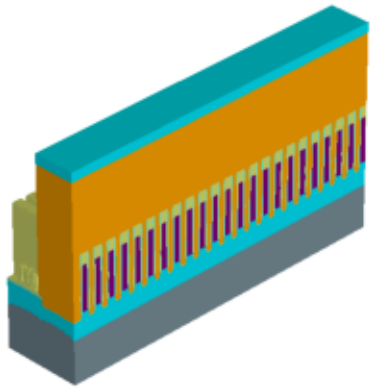

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

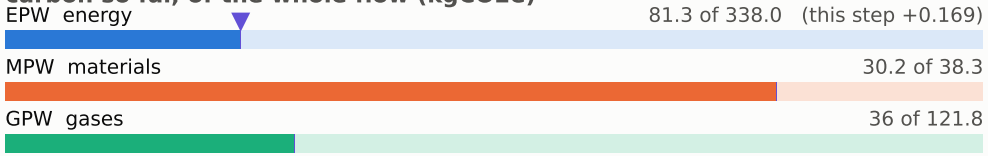

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

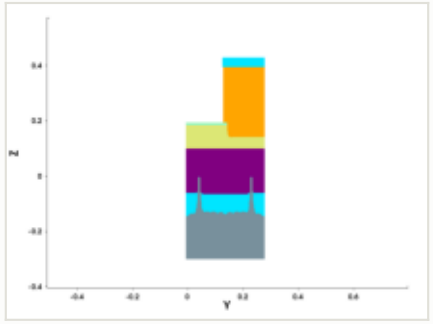

y cut at 0.211 µm

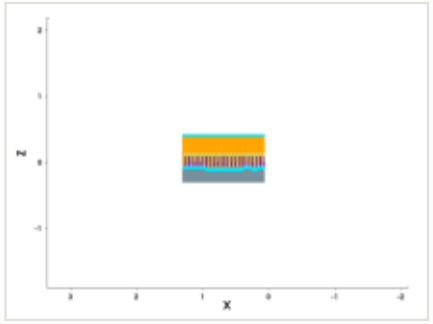

mask for this step

no mask for this step

steps by process area

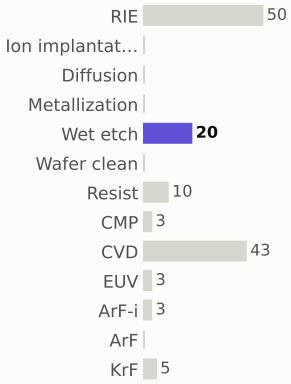

materials deposited (g)

gases emitted (g)



Step #1420: RIE

etch_anisotropic · RIE

1.04	148.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

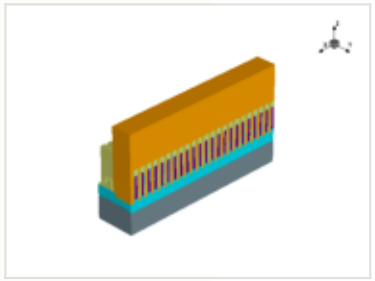

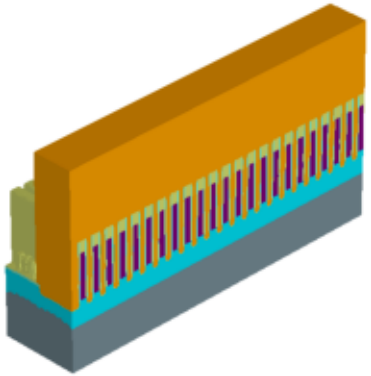

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

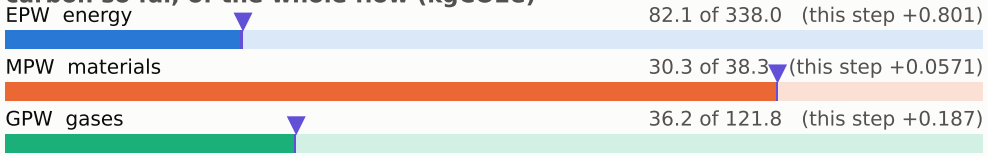

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

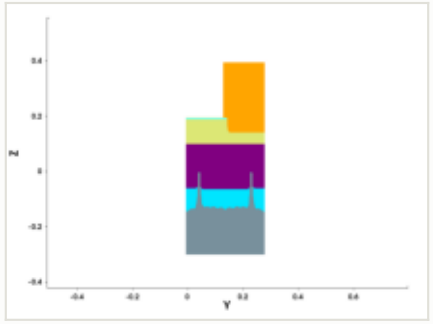

y cut at 0.211 µm

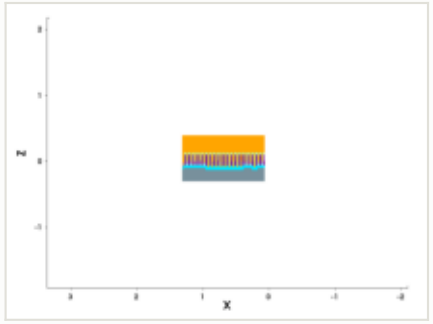

mask for this step

no mask for this step

steps by process area

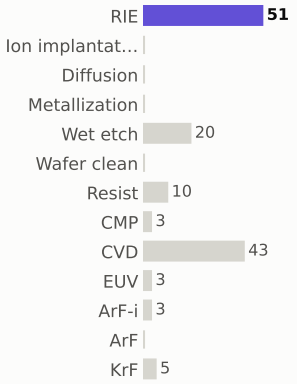

materials deposited (g)

gases emitted (g)



Step #1430: RIE

etch_unified · RIE

1.04	149.7	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

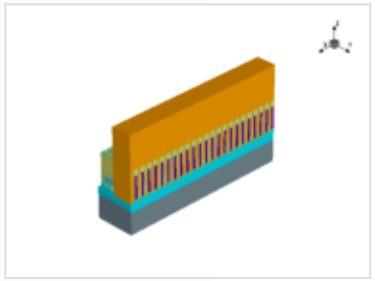

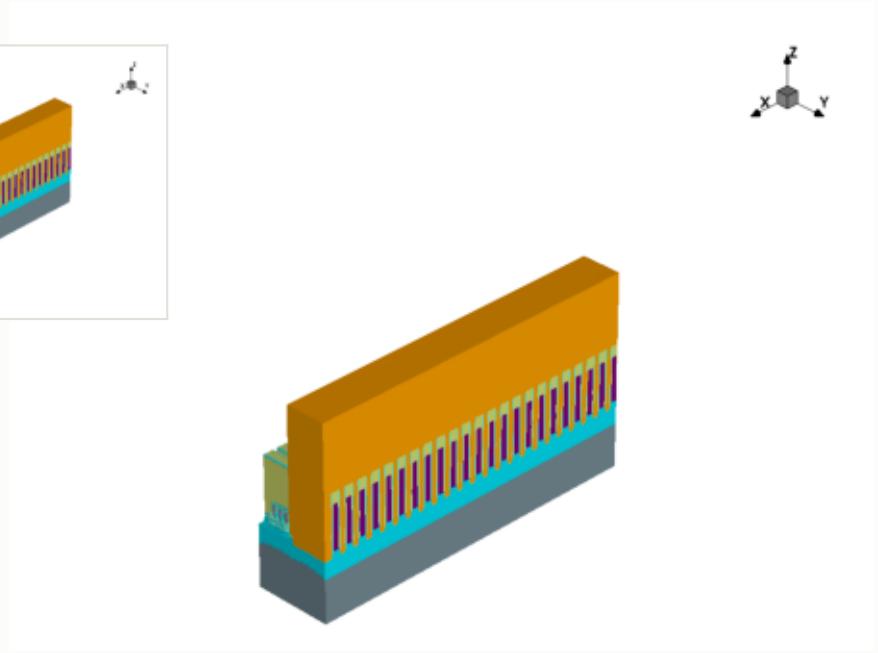

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

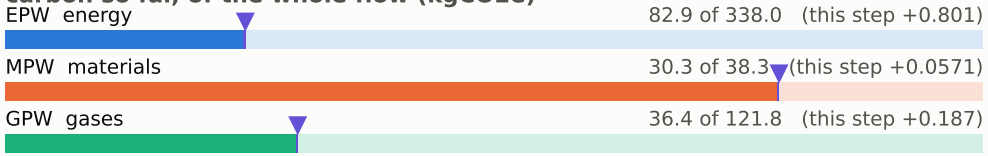

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

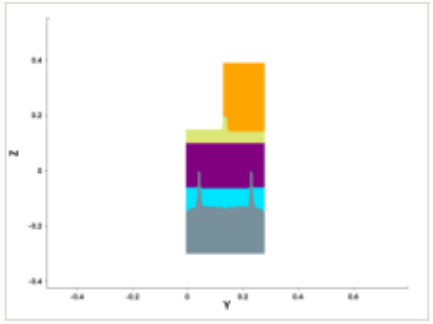

y cut at 0.211 µm

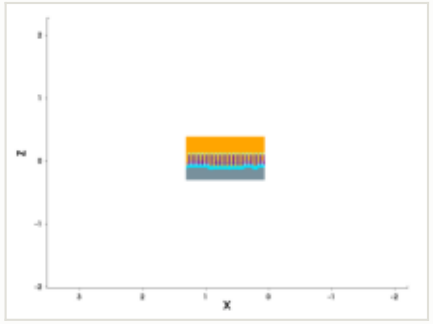

mask for this step

no mask for this step

steps by process area

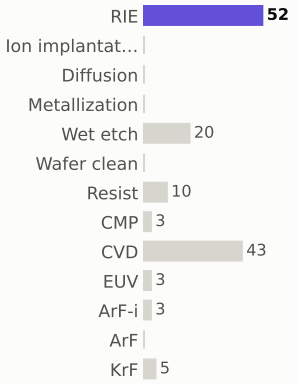

materials deposited (g)

gases emitted (g)



Step #1440: Wet_etch

etch_isotropic · Wet_etch

0.169	149.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

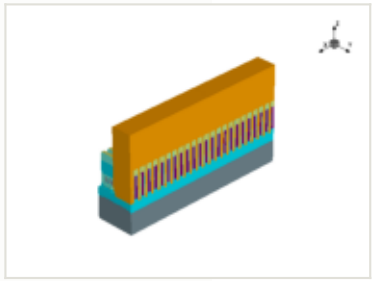

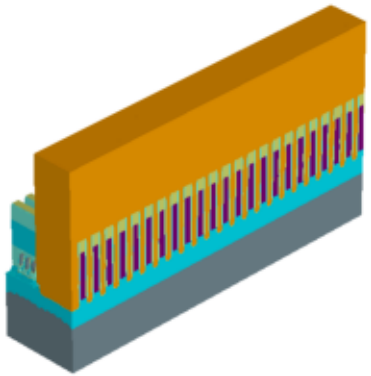

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

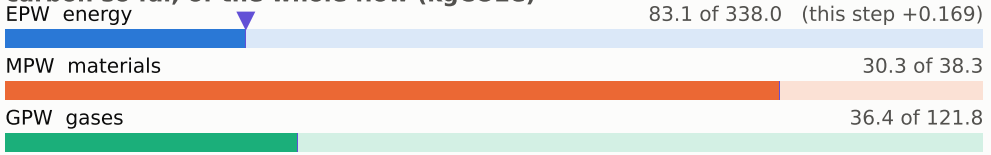

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

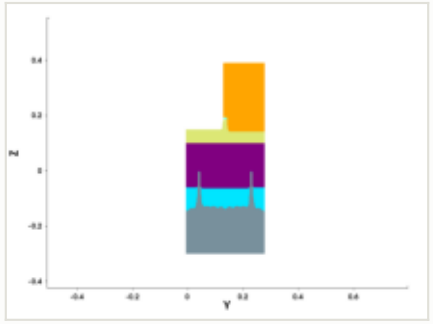

y cut at 0.211 µm

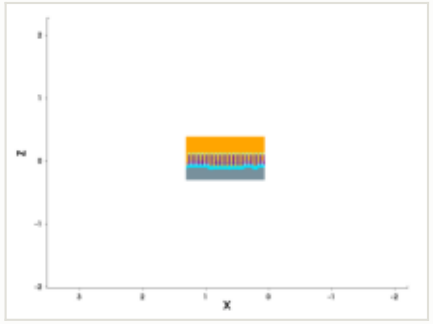

mask for this step

no mask for this step

steps by process area

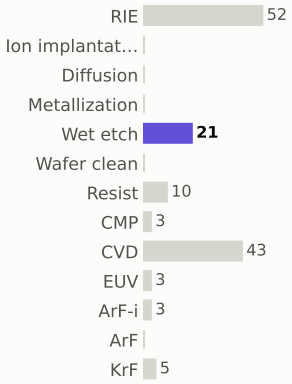

materials deposited (g)

gases emitted (g)



Step #1450: RIE

etch_unified · RIE

1.04	150.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

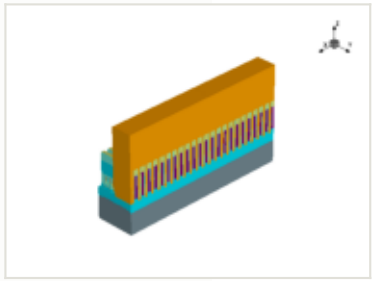

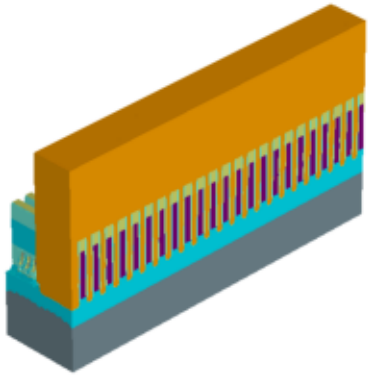

x cut at 0.677 µm

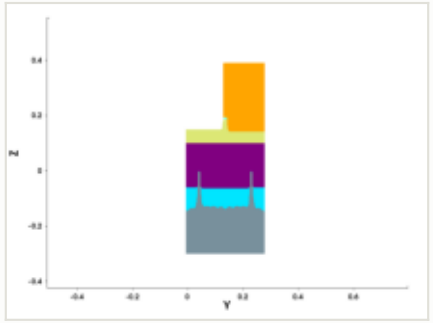

y cut at 0.211 µm

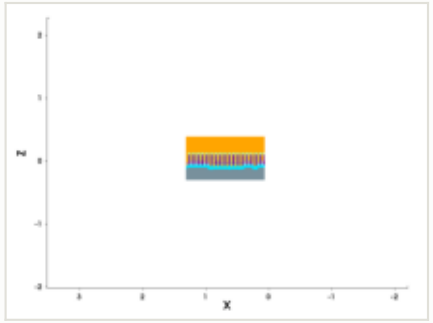

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

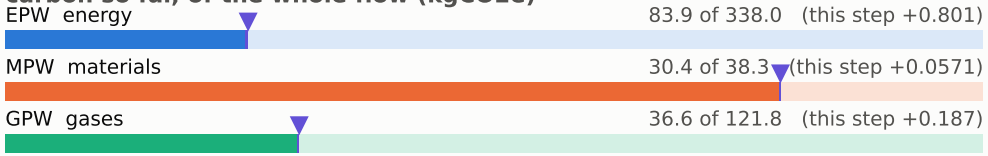

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

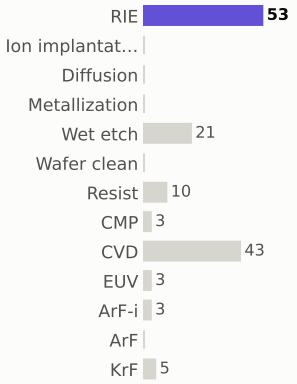

materials deposited (g)



gases emitted (g)



Step #1460: Resist

etch_strip · Resist

0.169	151.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

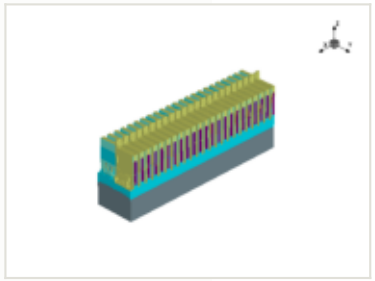

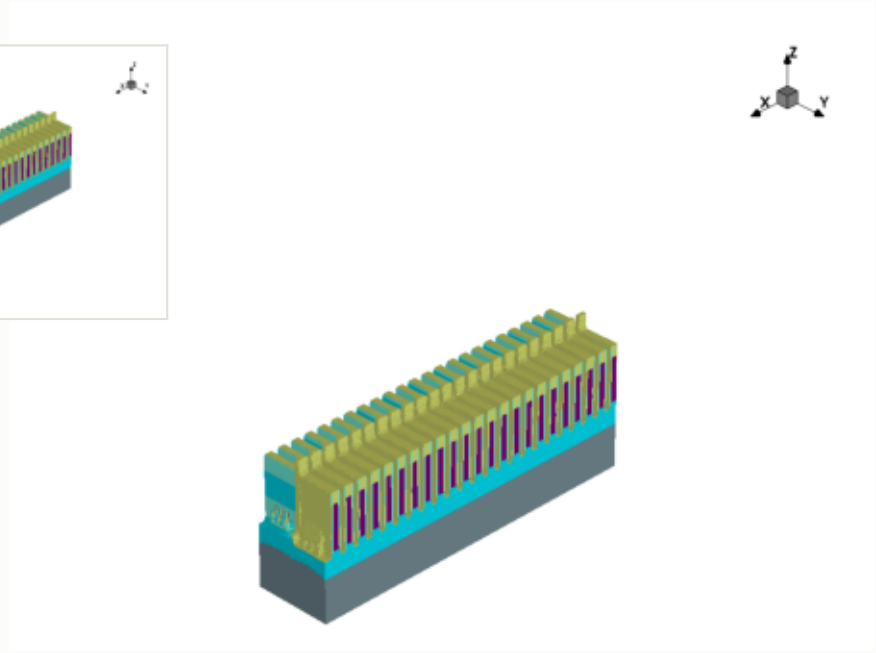

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

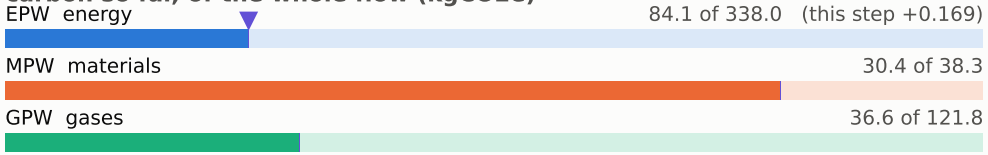

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

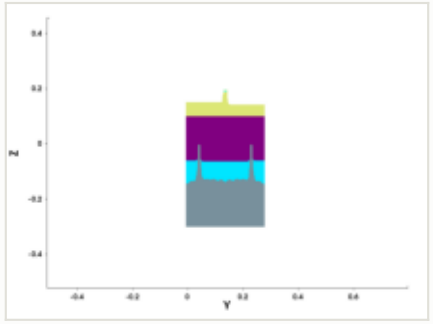

y cut at 0.211 µm

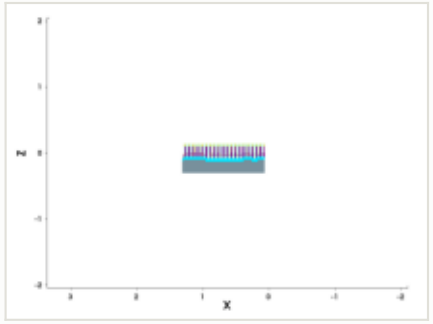

mask for this step

no mask for this step

steps by process area

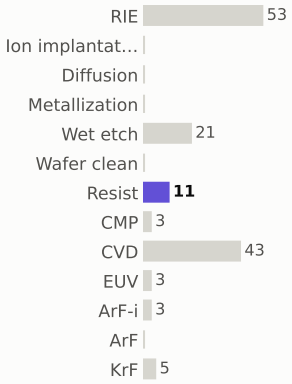

materials deposited (g)

gases emitted (g)



Step #1470: Wet_etch

etch_isotropic · Wet_etch

0.169	151.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

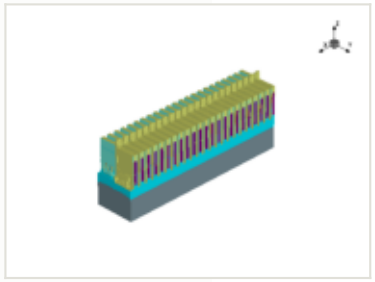

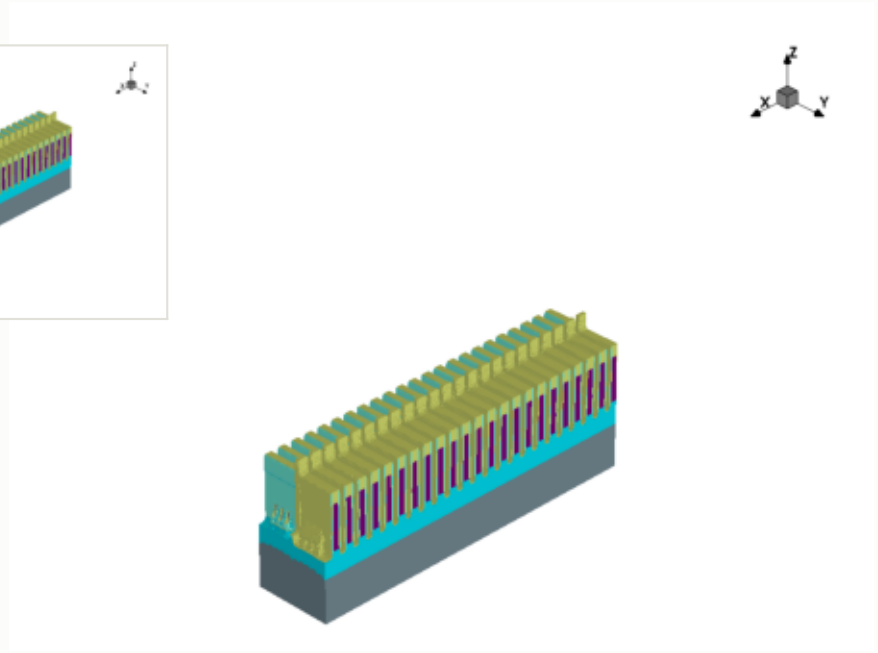

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

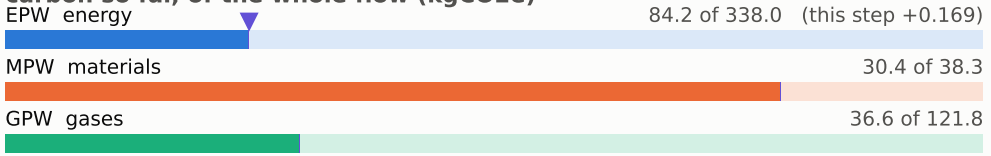

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

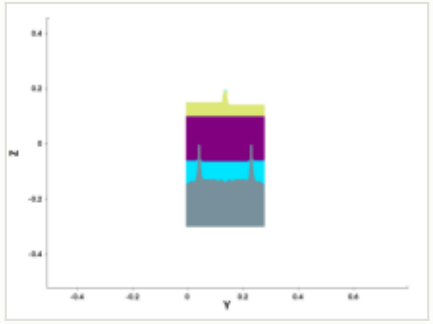

y cut at 0.211 µm

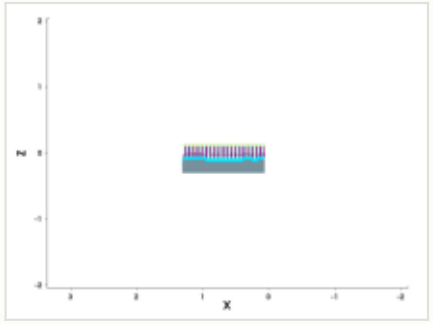

mask for this step

no mask for this step

steps by process area

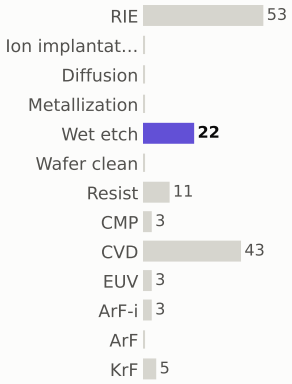

materials deposited (g)

gases emitted (g)



Step #1480: CVD

depo_epi · CVD

1.31	152.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

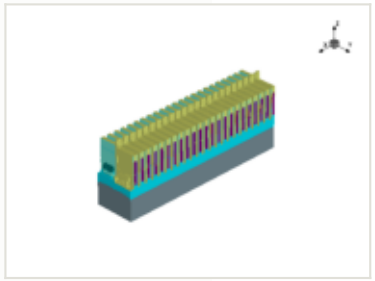

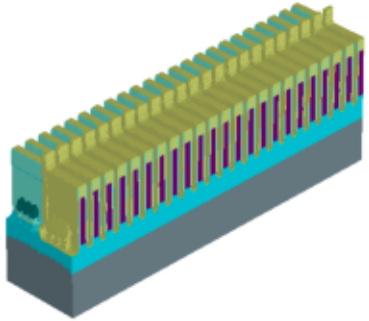

this step

process area	CVD
material	—
thickness	0.0476 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

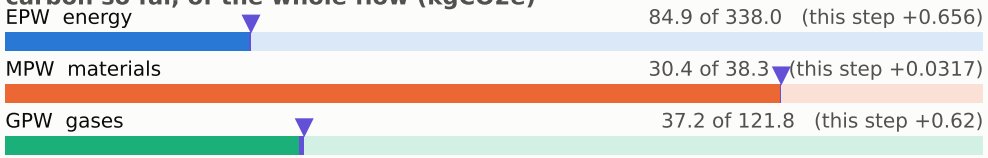

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

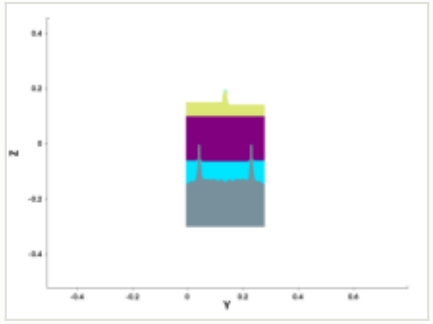

y cut at 0.211 µm

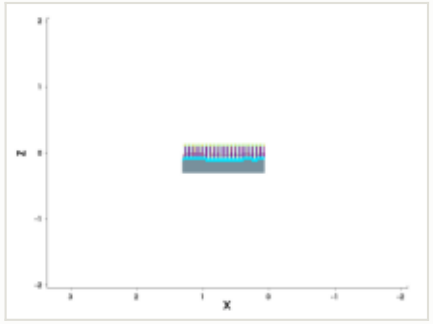

mask for this step

no mask for this step

steps by process area

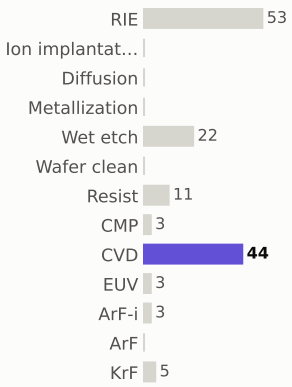

materials deposited (g)

gases emitted (g)



Step #1490: CVD

depo_isotropic · CVD

1.31	153.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

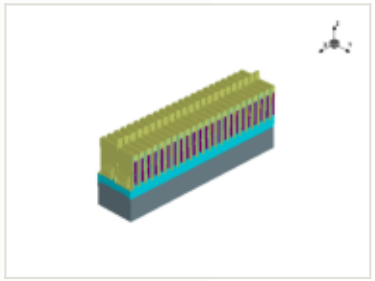

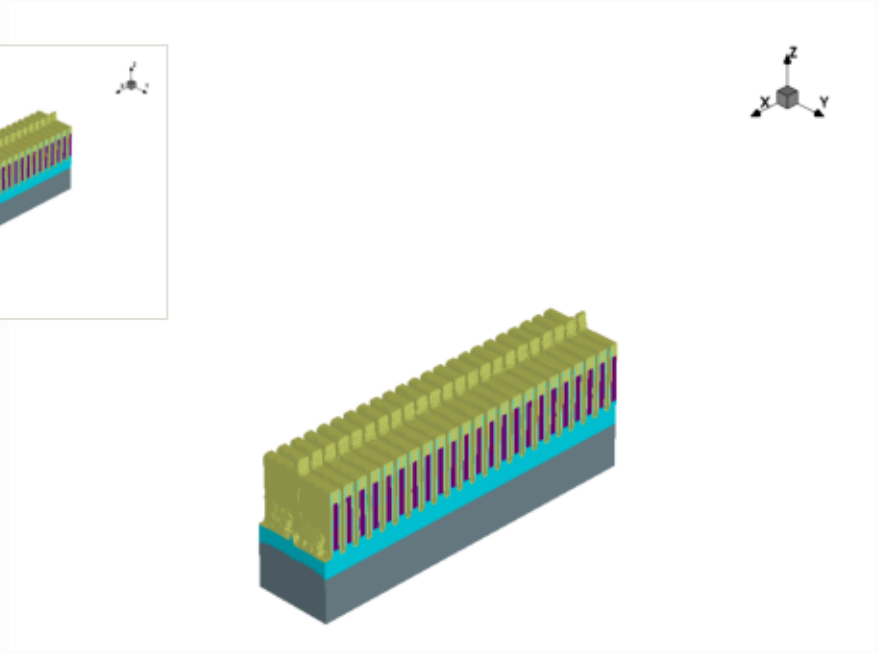

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

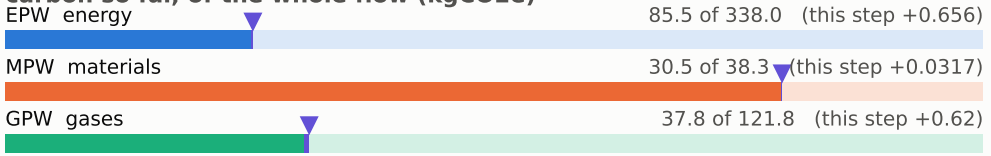

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

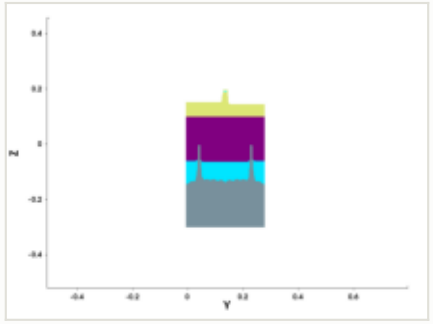

y cut at 0.211 µm

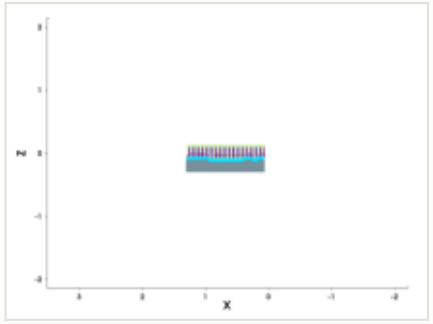

mask for this step

no mask for this step

steps by process area

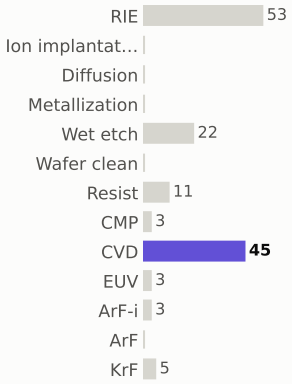

materials deposited (g)

gases emitted (g)



Step #1500: RIE

etch_ellipsoidal · RIE

1.04	154.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

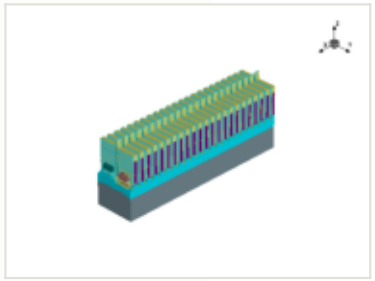

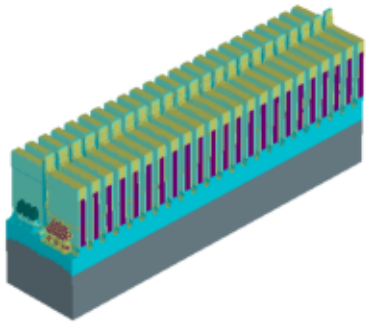

x cut at 0.677 µm

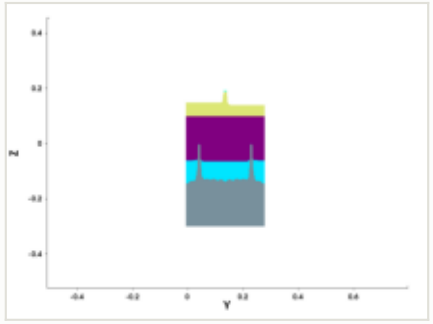

y cut at 0.211 µm

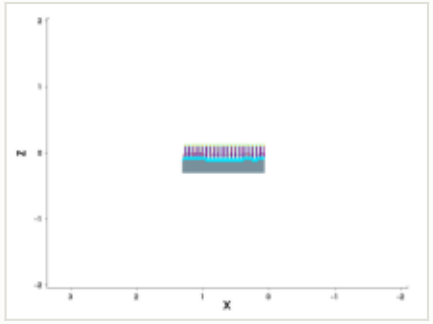

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

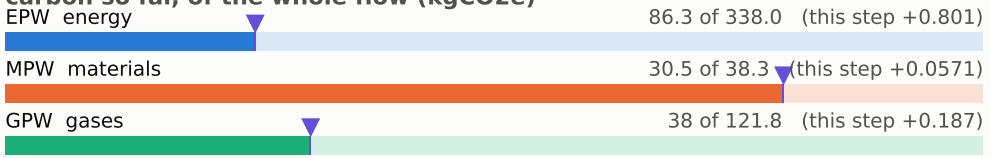

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

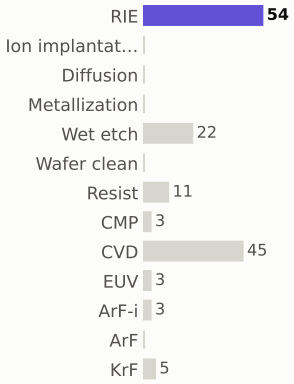

materials deposited (g)



gases emitted (g)



Step #1510: CVD

depo_isotropic · CVD

1.31	156.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

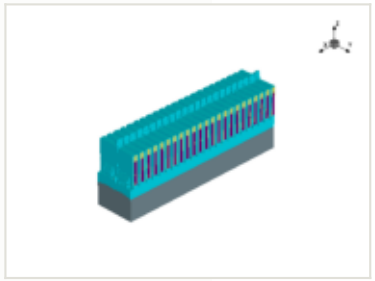

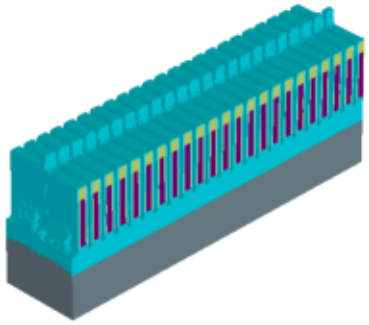

x cut at 0.677 µm

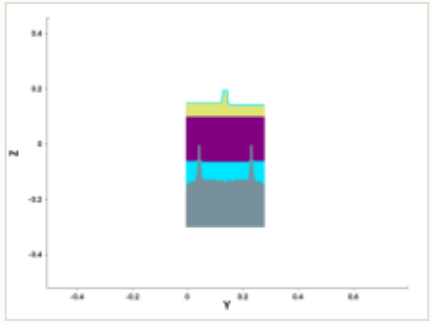

y cut at 0.211 µm

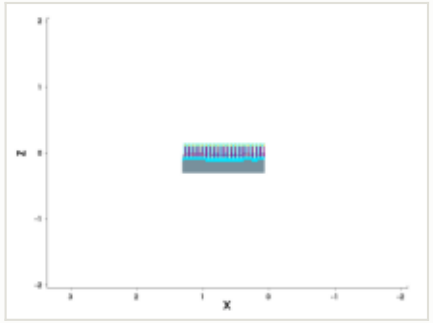

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.004 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

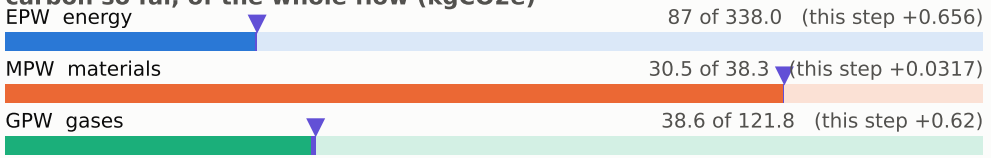

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

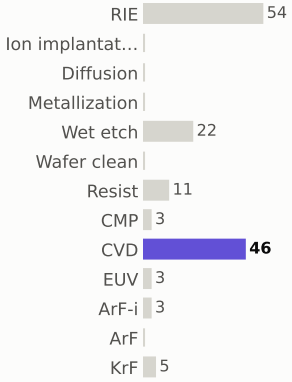

materials deposited (g)



gases emitted (g)



Step #1520: RIE

etch_anisotropic · RIE

1.04	157.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

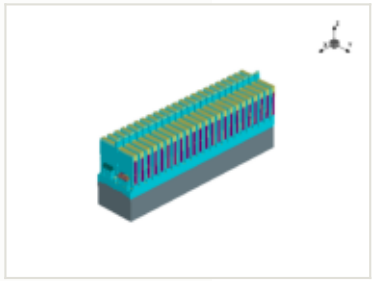

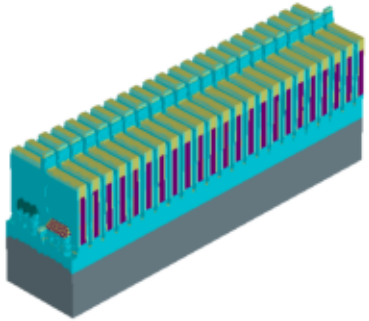

x cut at 0.677 µm

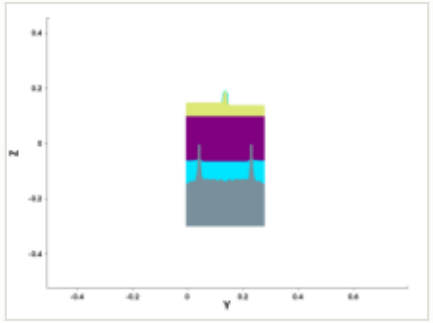

y cut at 0.211 µm

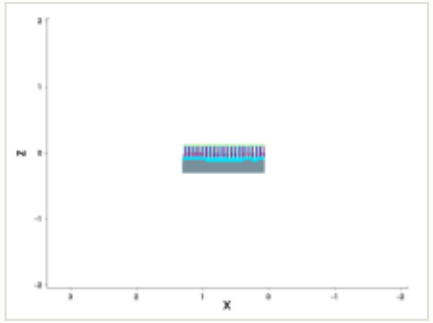

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

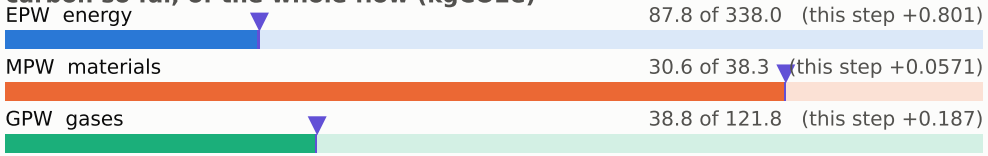

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #1530: KrF

litho_patterning · KrF

0.199	157.4	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

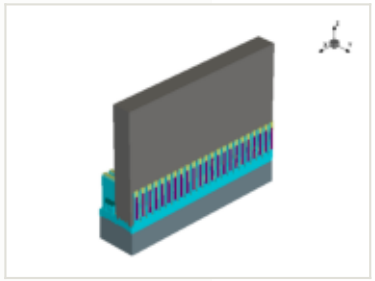

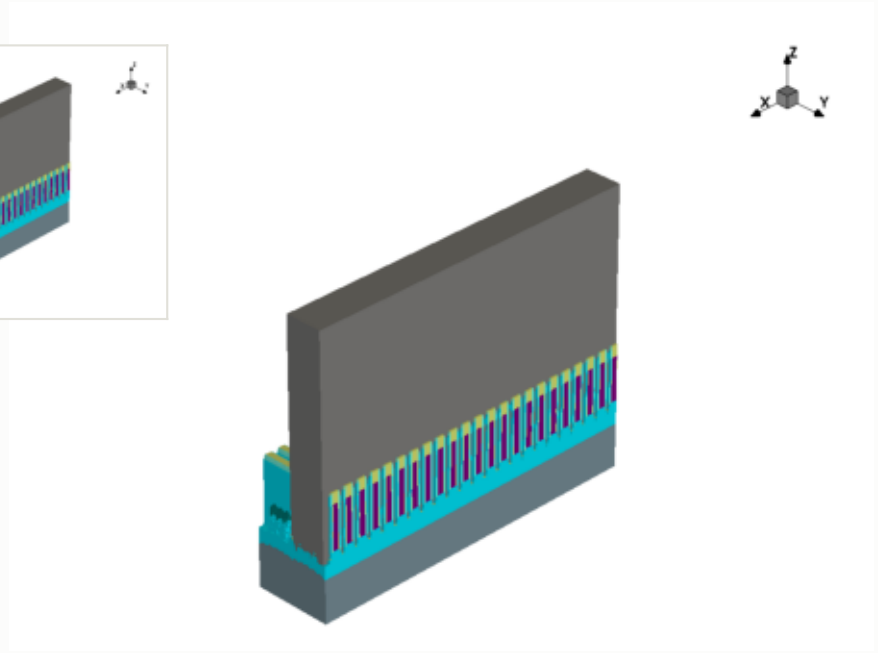

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

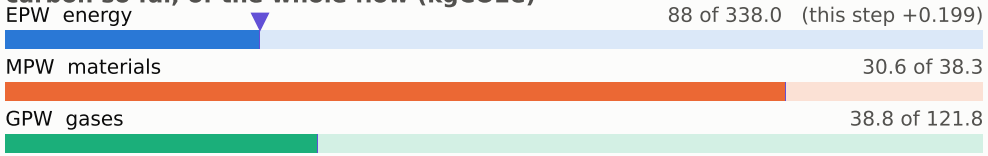

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

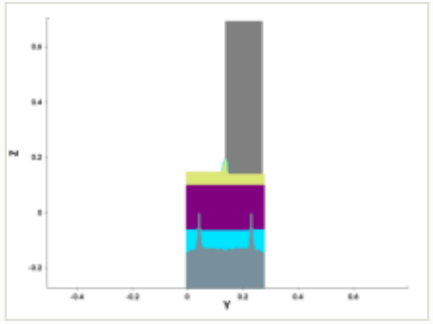

y cut at 0.211 µm

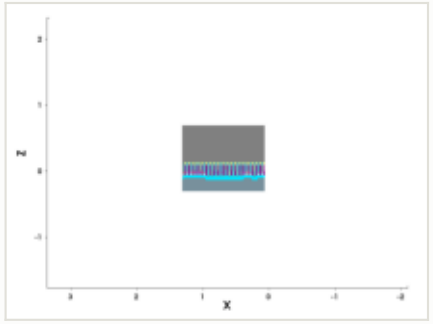

mask: layer 1:0, positive (GDSII)

steps by process area

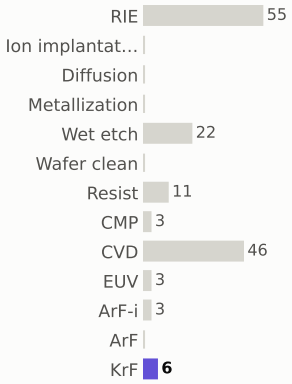

materials deposited (g)

gases emitted (g)



Step #1540: Resist

etch_strip · Resist

0.169	157.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

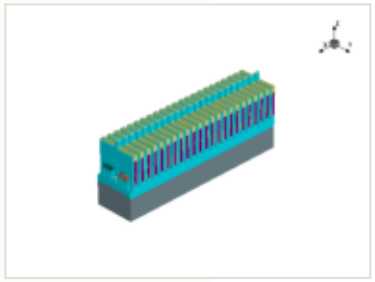

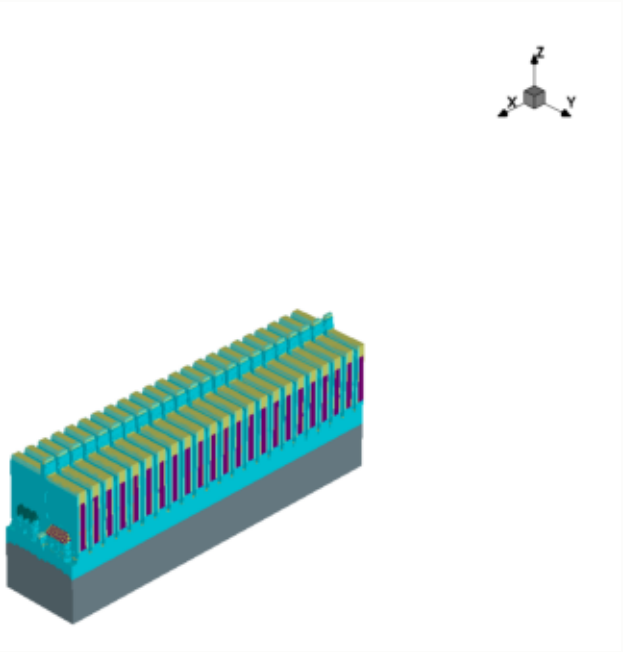

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

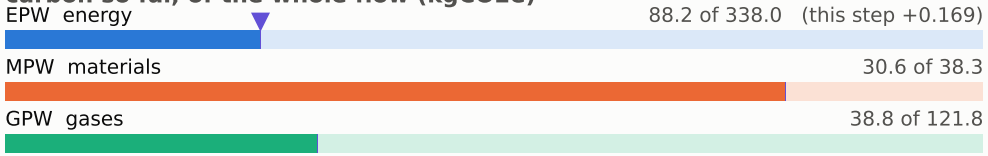

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

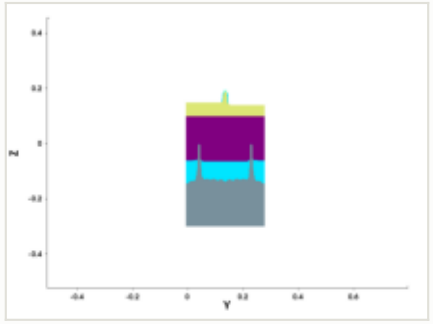

y cut at 0.211 µm

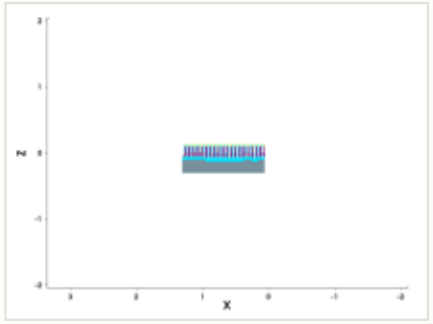

mask for this step

no mask for this step

steps by process area

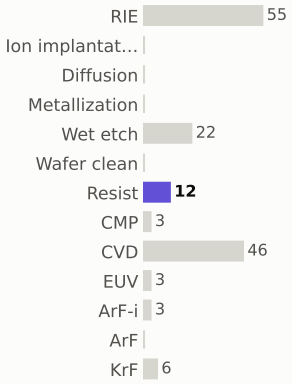

materials deposited (g)

gases emitted (g)



Step #1550: KrF

litho_patterning · KrF

0.199	157.8	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

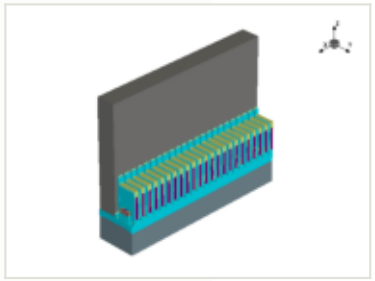

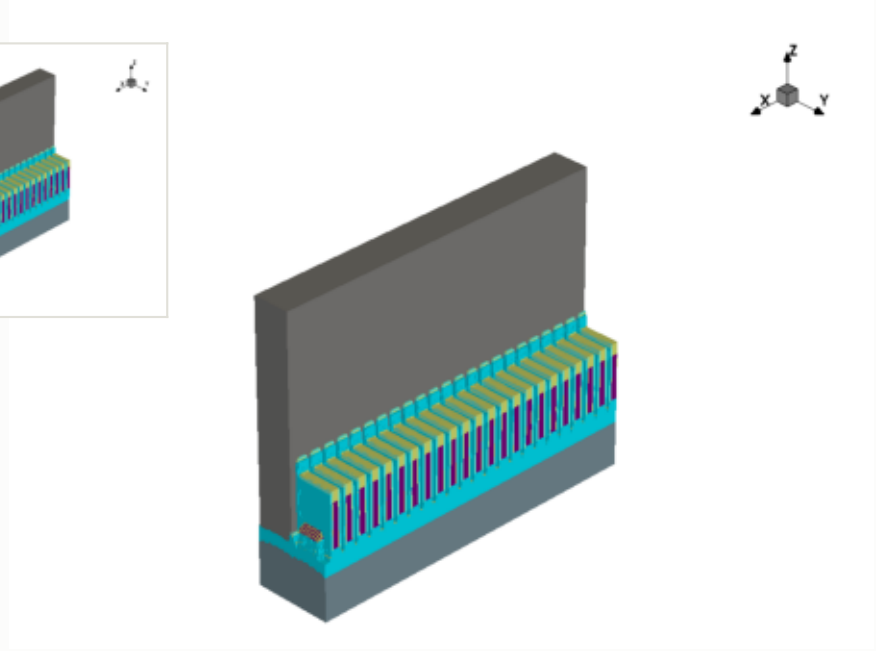

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

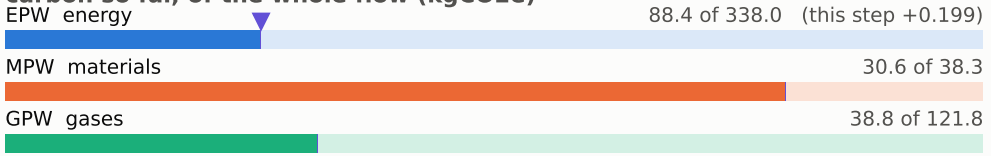

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

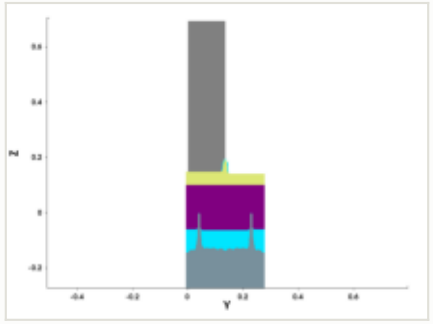

y cut at 0.211 µm

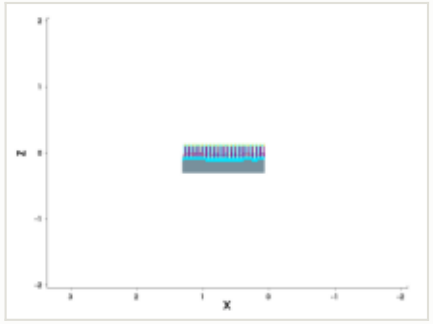

mask: layer 12:0, positive (GDSII)

steps by process area

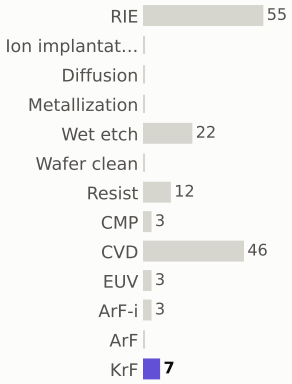

materials deposited (g)

gases emitted (g)



Step #1560: Resist

etch_strip · Resist

0.169	158.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

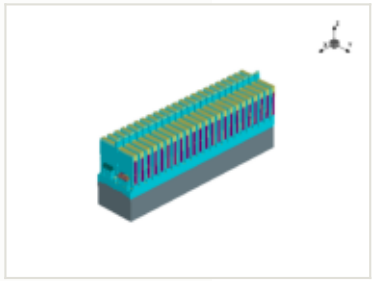

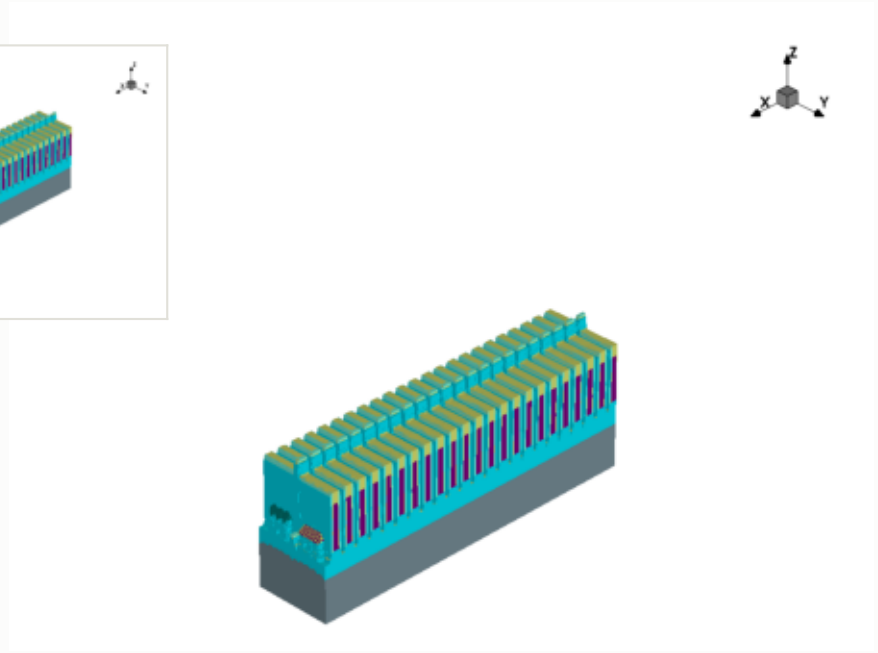

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

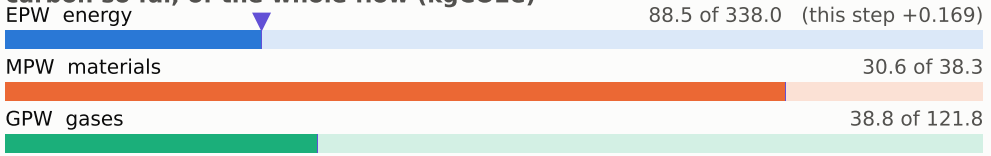

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

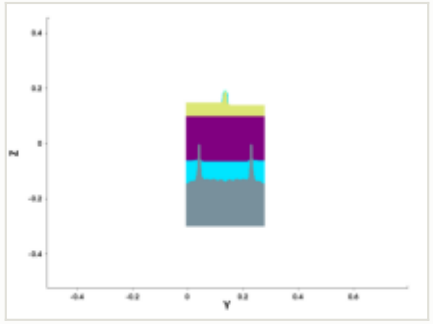

y cut at 0.211 µm

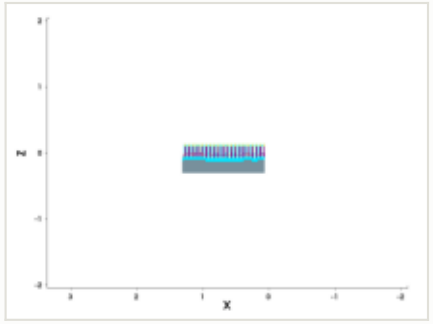

mask for this step

no mask for this step

steps by process area

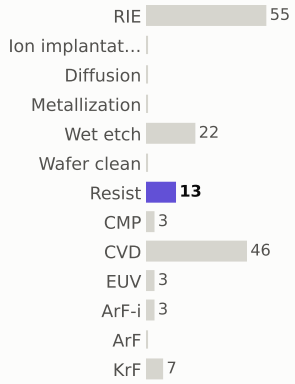

materials deposited (g)

gases emitted (g)



Step #1570: KrF

litho_patterning · KrF

0.199	158.2	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

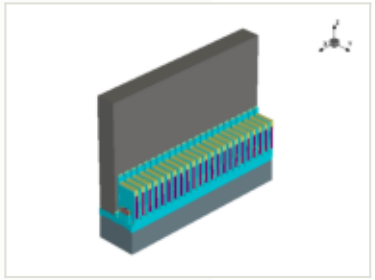

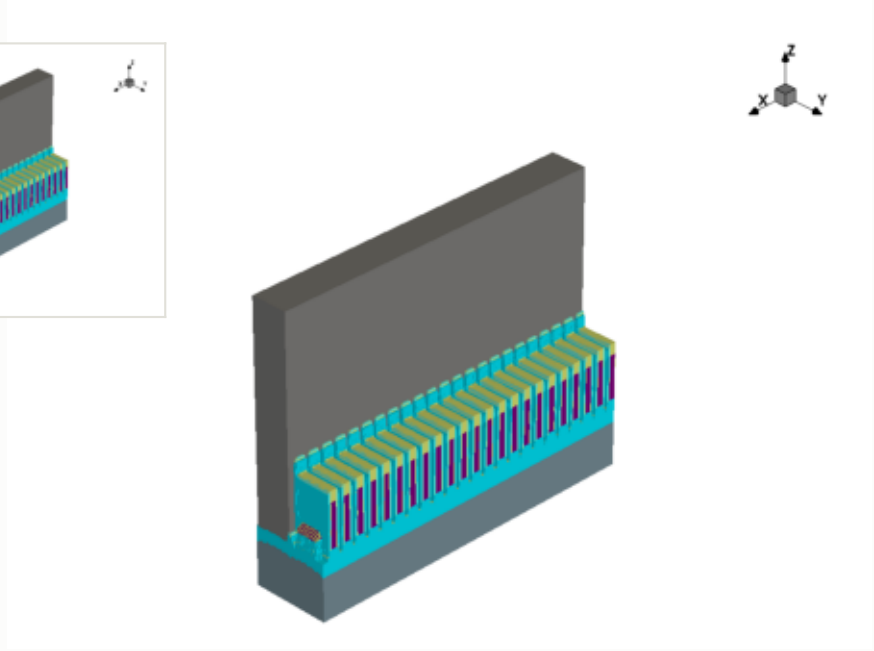

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

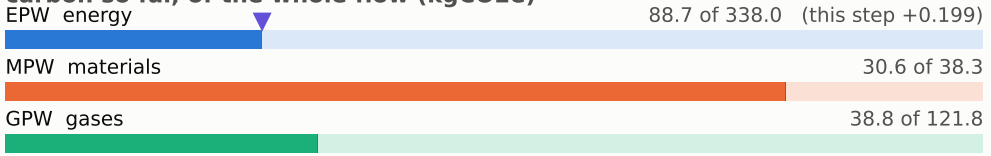

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

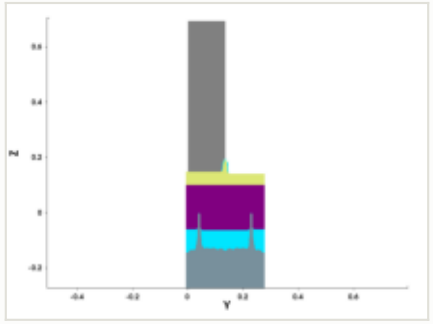

y cut at 0.211 µm

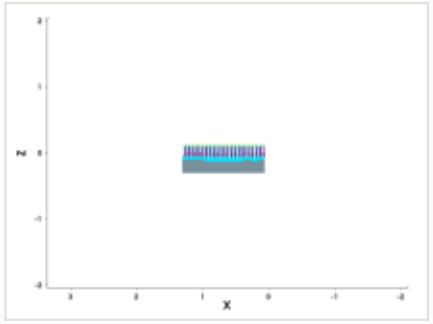

mask: layer 12:0, positive (GDSII)

steps by process area

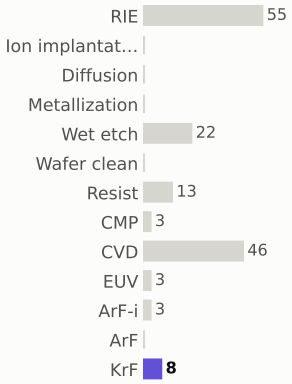

materials deposited (g)

gases emitted (g)



Step #1580: Resist

etch_strip · Resist

0.169	158.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

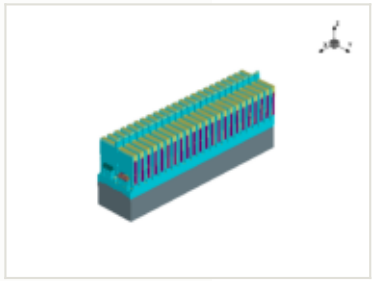

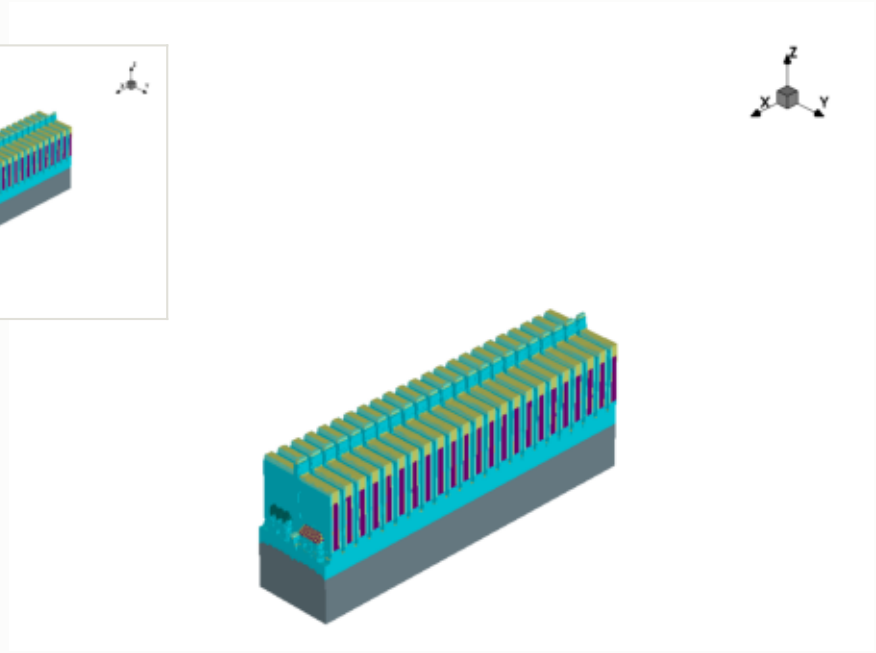

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

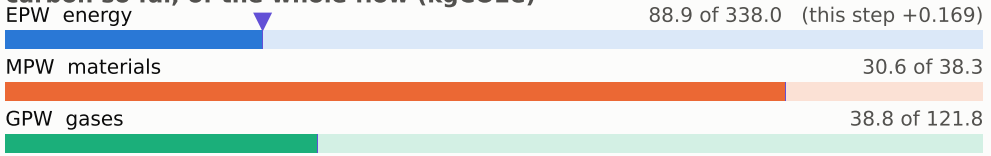

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

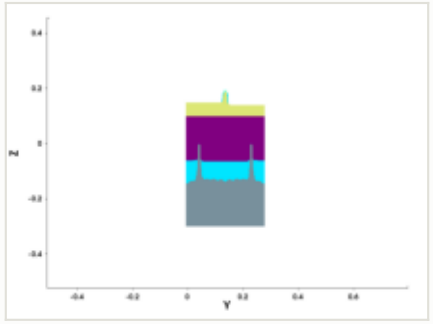

y cut at 0.211 µm

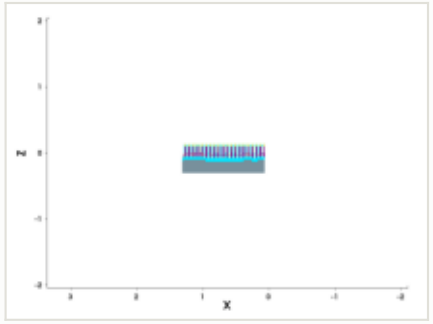

mask for this step

no mask for this step

steps by process area

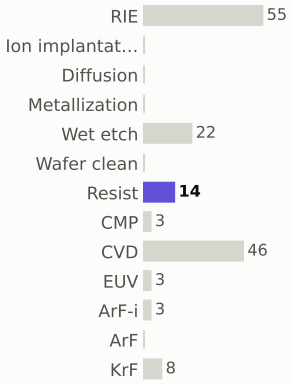

materials deposited (g)

gases emitted (g)



Step #1590: Wet_etch

etch_isotropic · Wet_etch

0.169	158.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

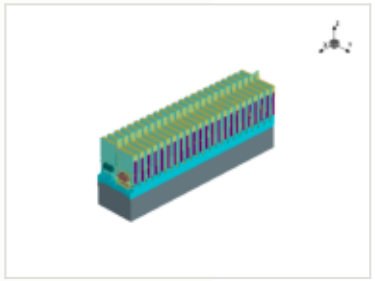

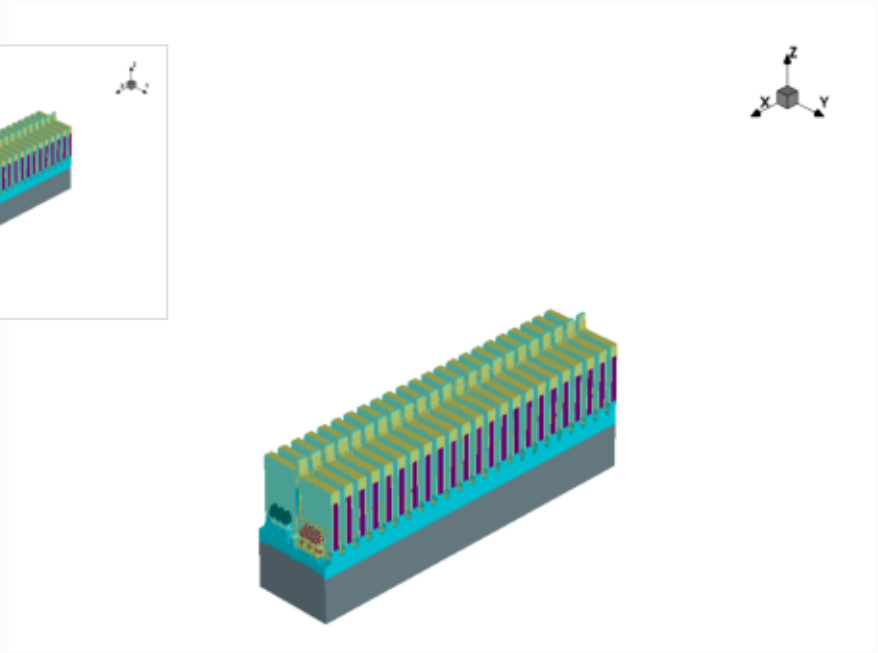

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

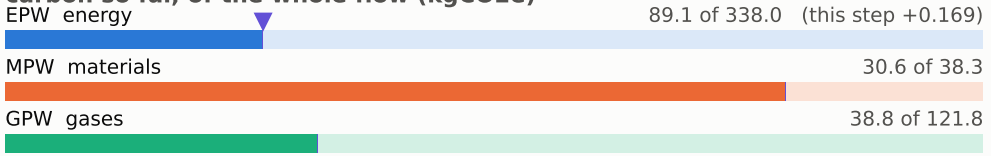

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

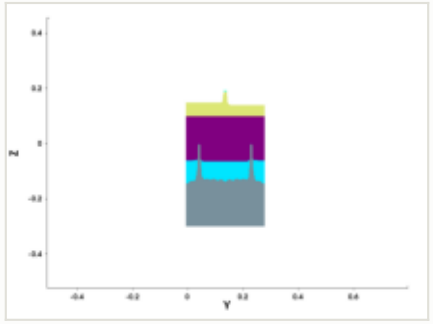

y cut at 0.211 µm

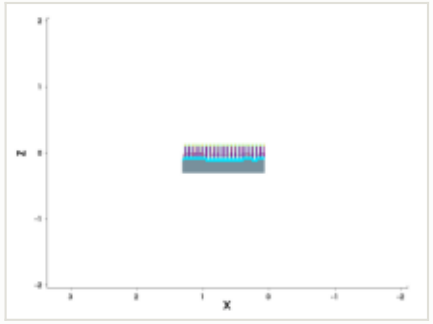

mask for this step

no mask for this step

steps by process area

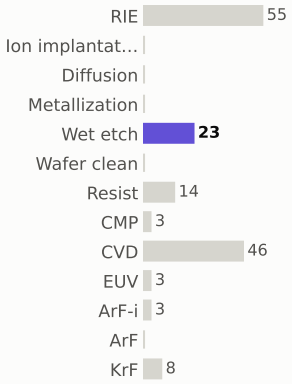

materials deposited (g)

gases emitted (g)



Step #1600: CVD

depo_isotropic · CVD

1.31	159.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

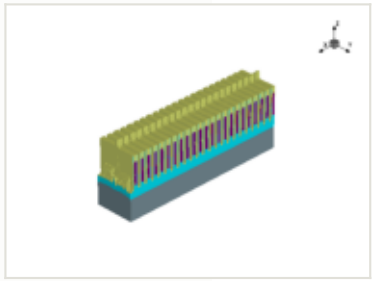

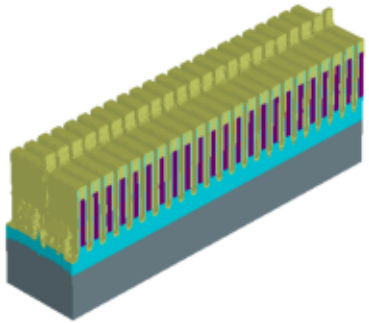

x cut at 0.677 µm

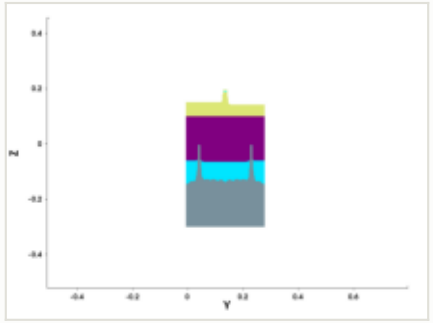

y cut at 0.211 µm

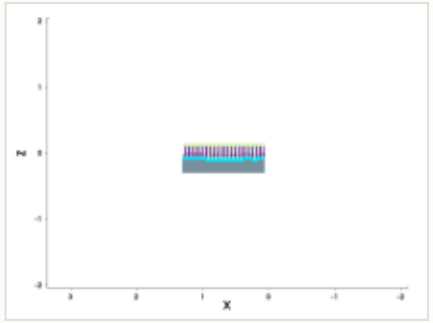

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0025 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

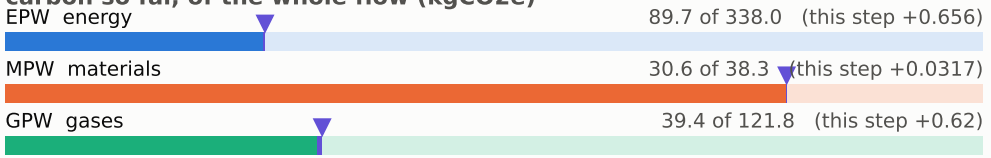

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

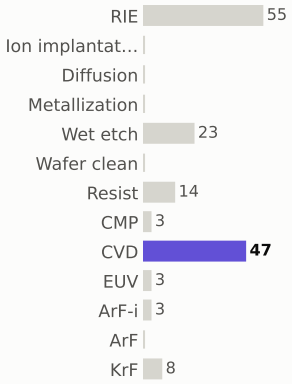

materials deposited (g)



gases emitted (g)



Step #1610: CVD

depo_isotropic · CVD

1.31	161.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

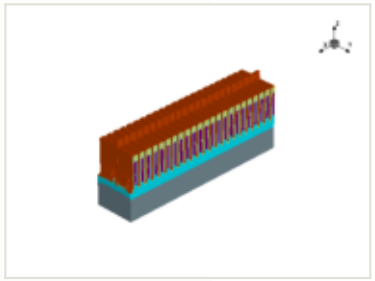



x cut at 0.677 µm

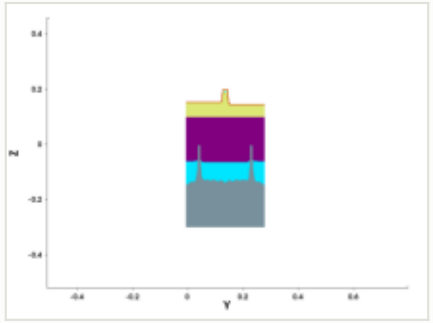

y cut at 0.211 µm

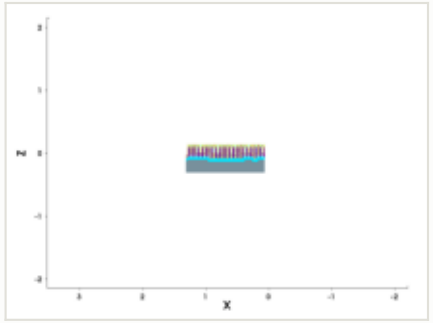

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

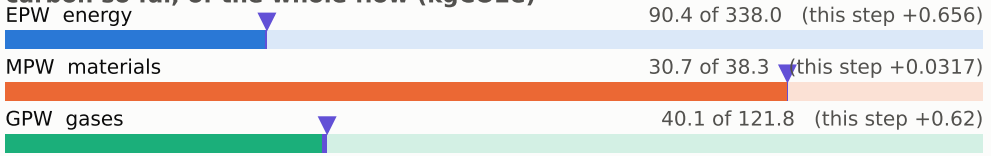

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

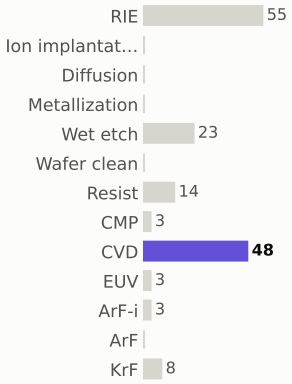

materials deposited (g)



gases emitted (g)



Step #1620: CVD

depo_fill · CVD

1.31	162.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

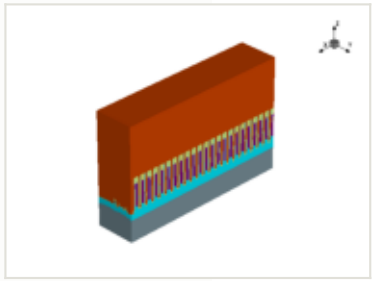

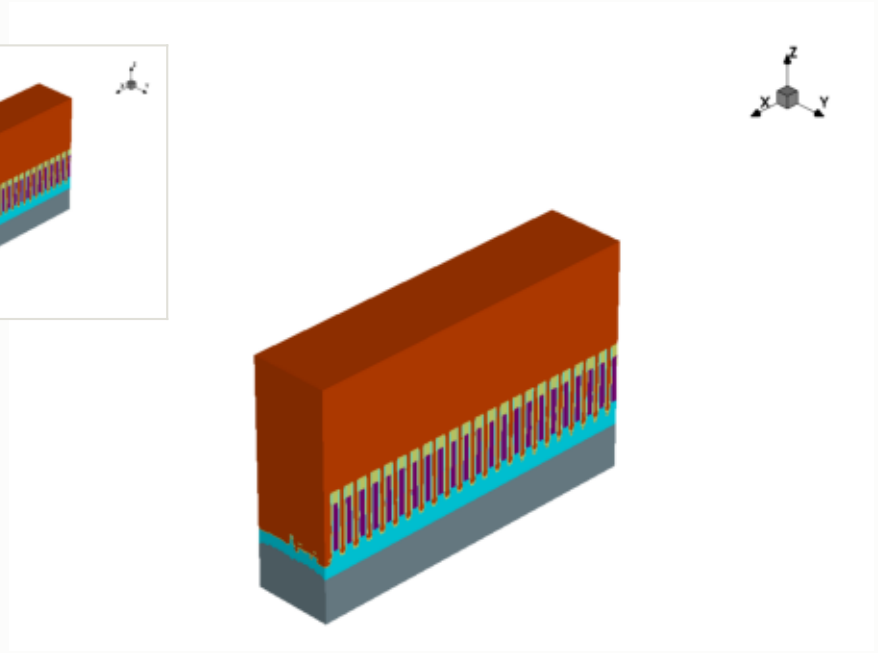

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

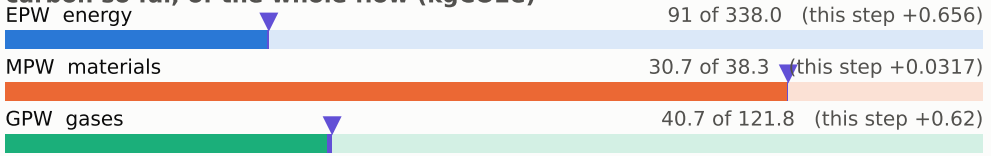

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

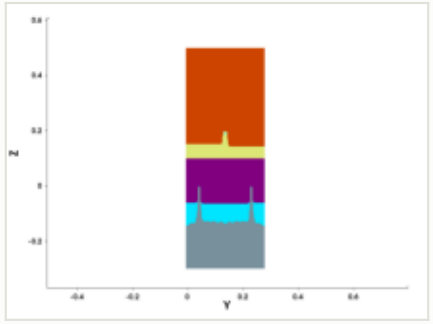

y cut at 0.211 µm

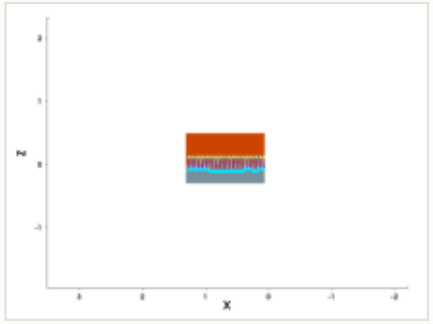

mask for this step

no mask for this step

steps by process area

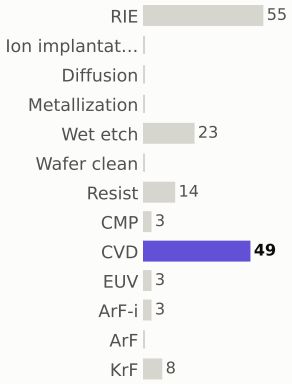

materials deposited (g)

gases emitted (g)



Step #1630: CVD

depo_fill · CVD

1.31	163.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

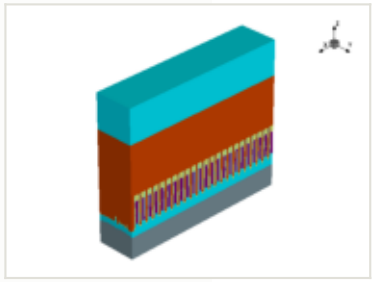

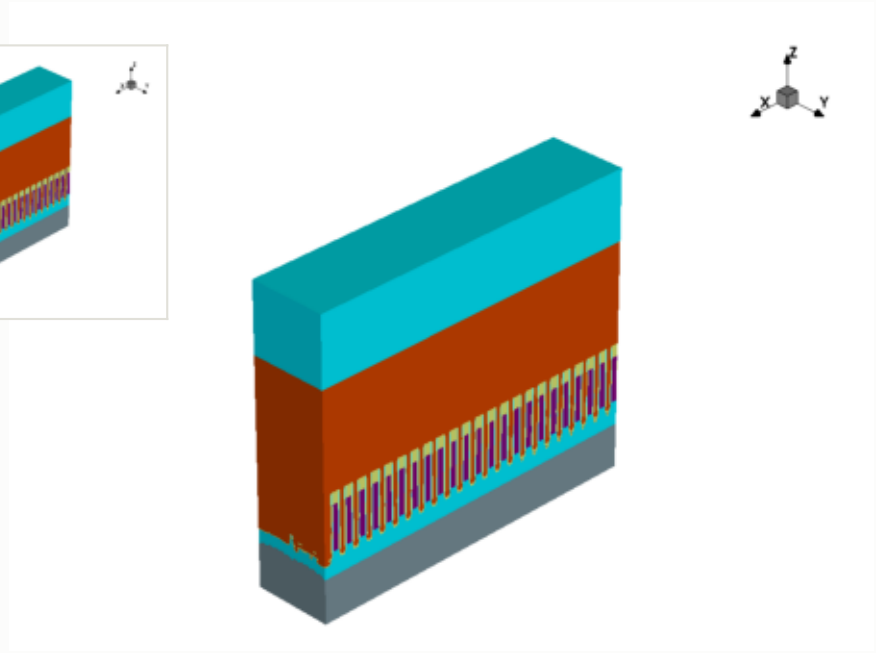

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

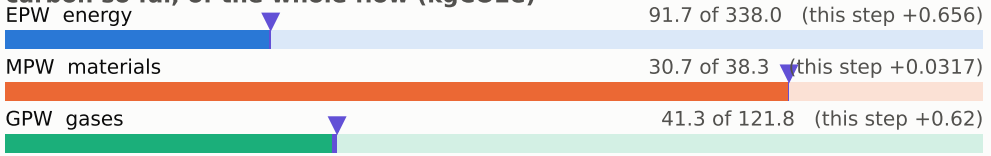

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

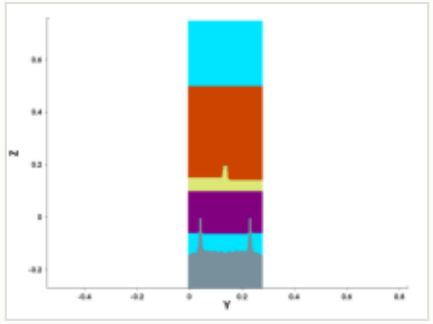

y cut at 0.211 µm

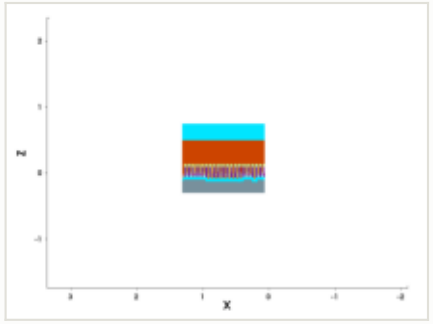

mask for this step

no mask for this step

steps by process area

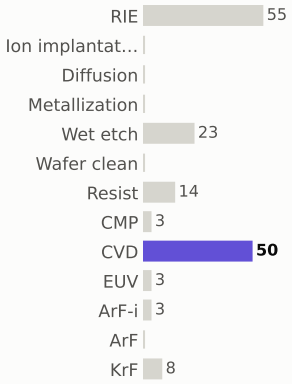

materials deposited (g)

gases emitted (g)



Step #1640: CMP

etch_cmp · CMP

0.169	163.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

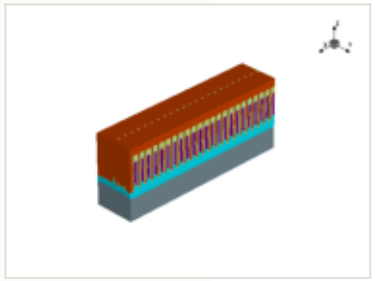

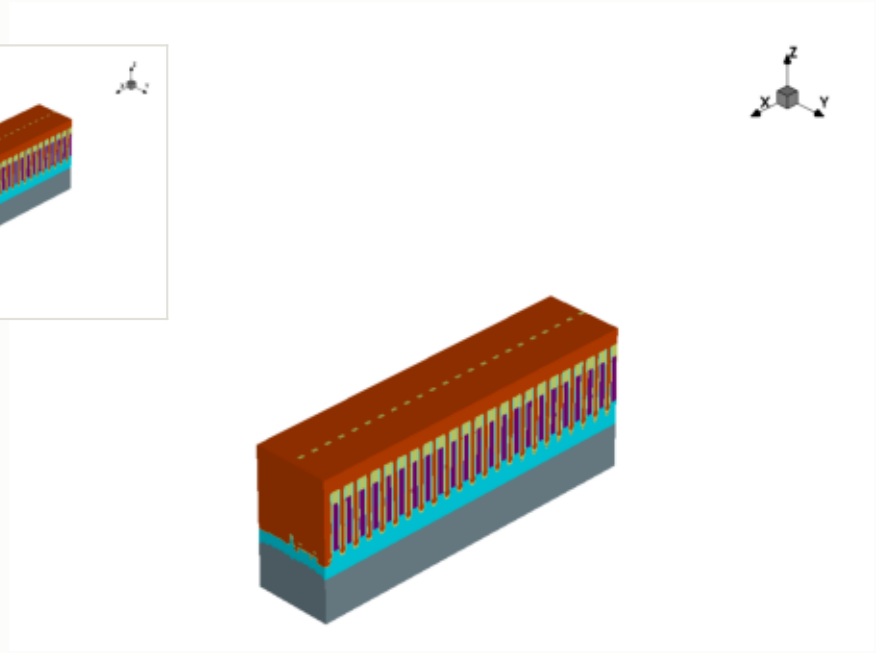

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

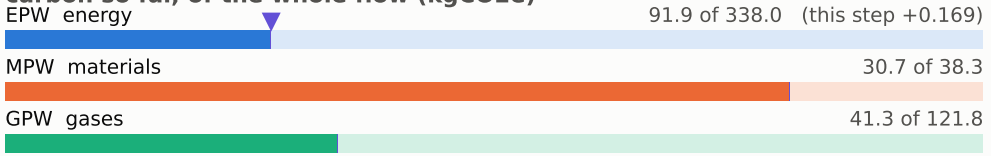

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

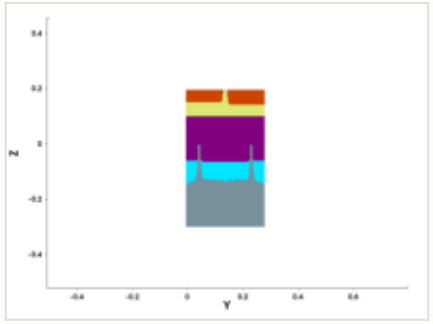

y cut at 0.211 µm

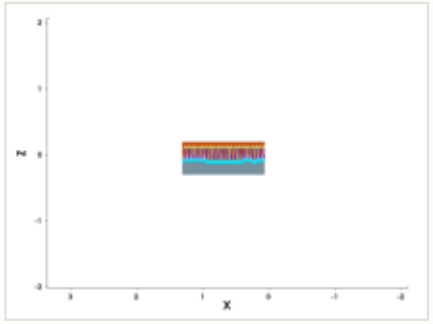

mask for this step

no mask for this step

steps by process area

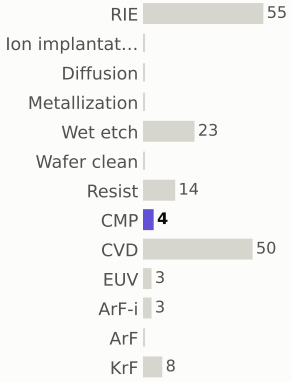

materials deposited (g)



gases emitted (g)



Step #1650: Wet_etch

etch_isotropic · Wet_etch

0.169	164.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

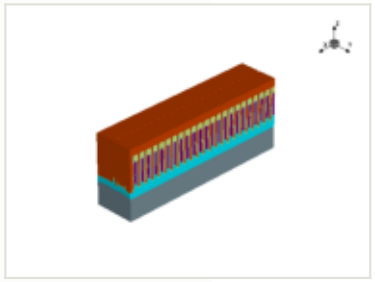

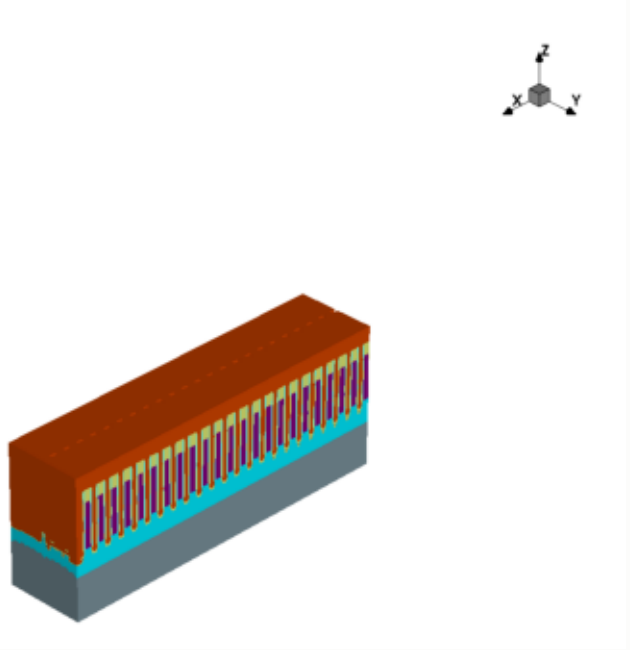

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

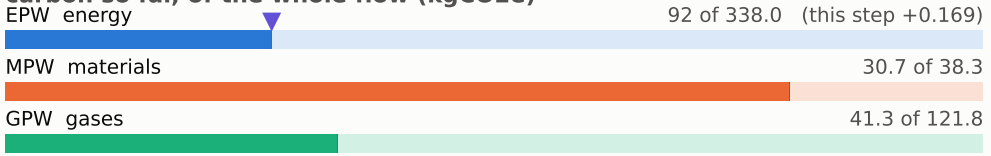

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

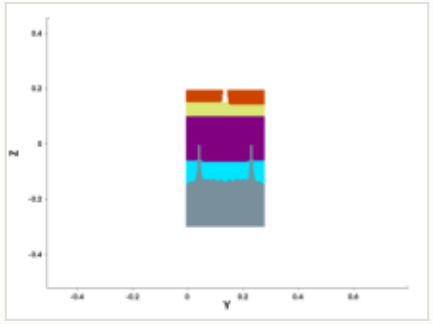

y cut at 0.211 µm

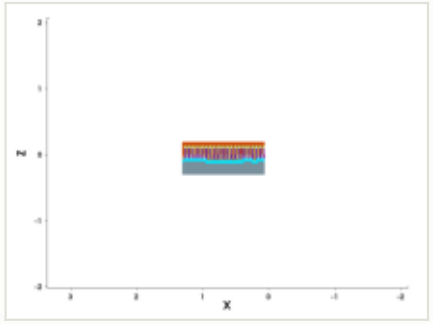

mask for this step

no mask for this step

steps by process area

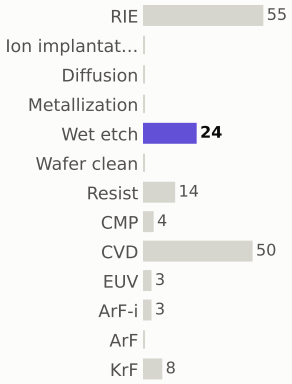

materials deposited (g)

gases emitted (g)



Step #1660: CMP

etch_cmp · CMP

0.169	164.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

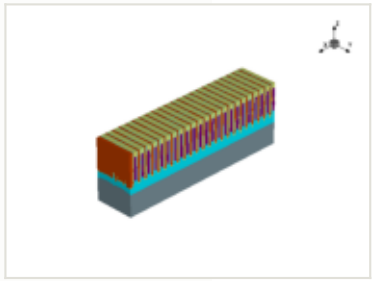

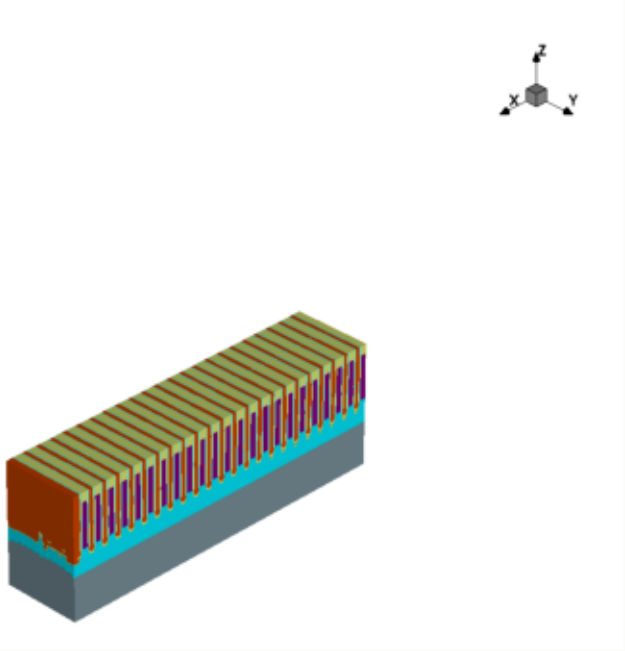

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

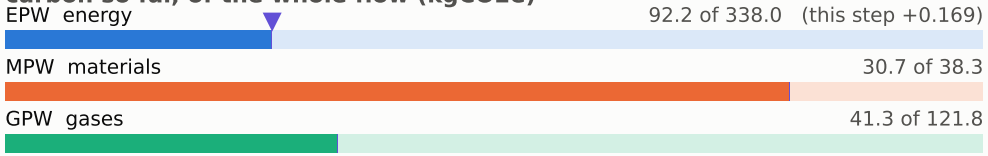

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

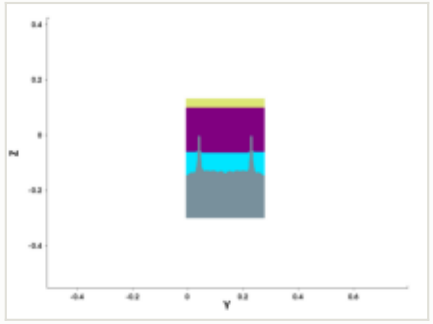

y cut at 0.211 µm

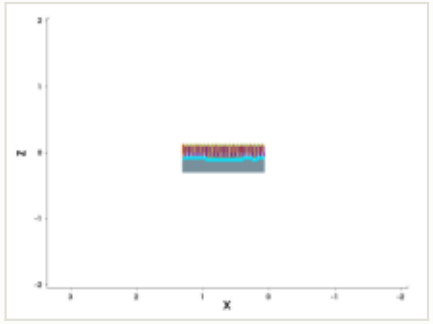

mask for this step

no mask for this step

steps by process area

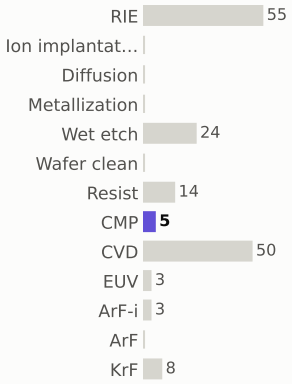

materials deposited (g)

gases emitted (g)



Step #1670: CVD

depo_fill · CVD

1.31	165.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

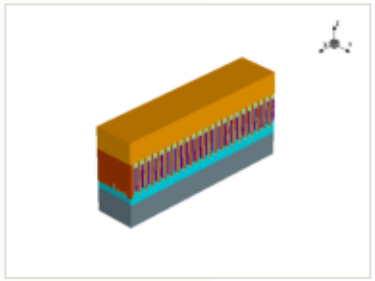

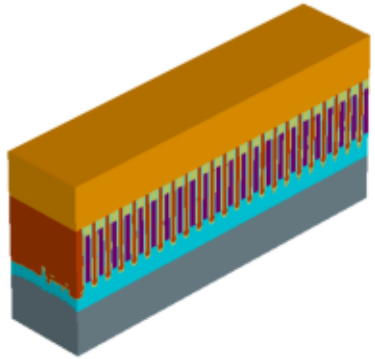

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

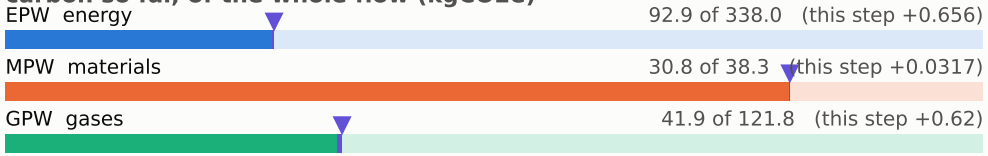

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

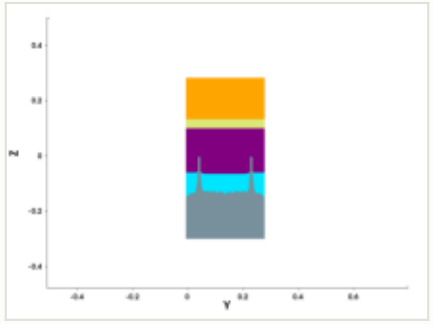

y cut at 0.211 µm

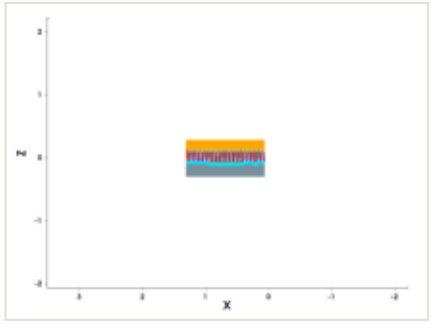

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1680: CVD

depo_isotropic · CVD

1.31	166.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

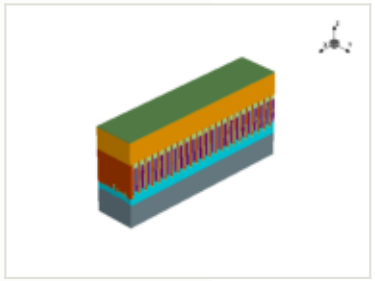

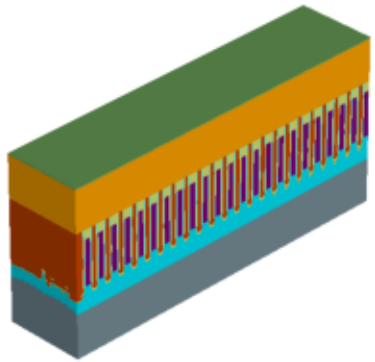

x cut at 0.677 µm

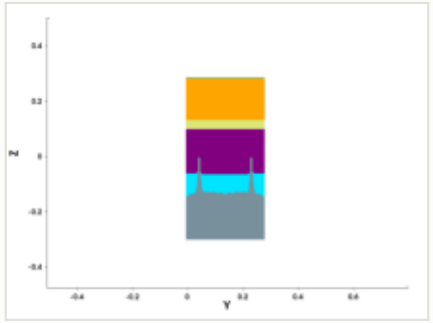

y cut at 0.211 µm

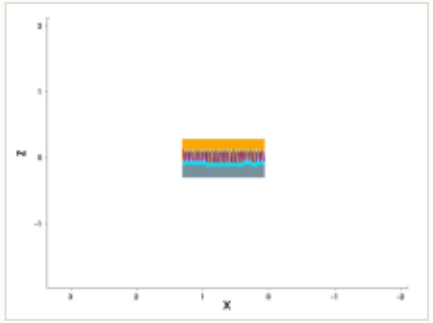

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

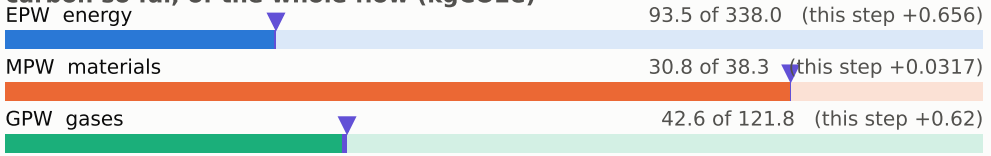

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

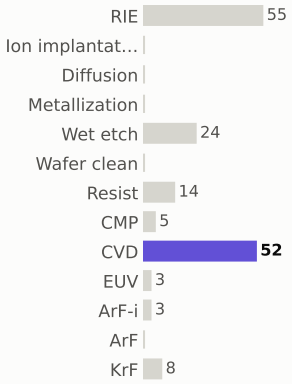

materials deposited (g)



gases emitted (g)



Step #1690: CVD

depo_fill · CVD

1.31	168.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

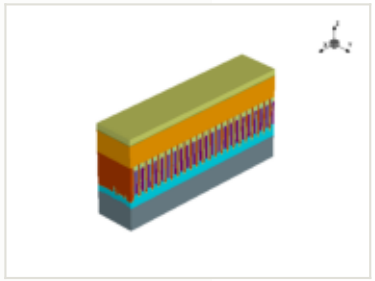

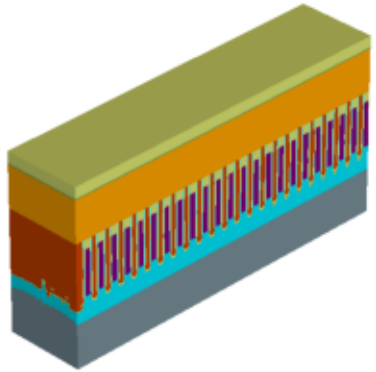

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

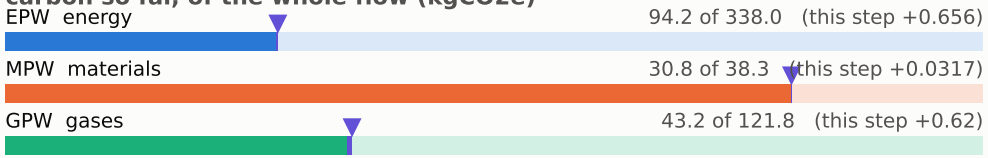

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

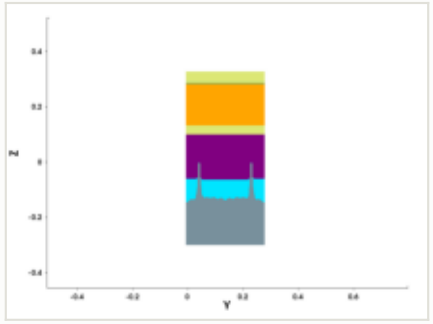

y cut at 0.211 µm

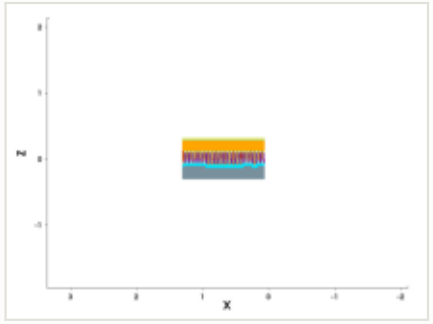

mask for this step

no mask for this step

steps by process area

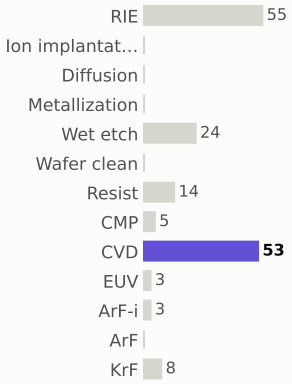

materials deposited (g)



gases emitted (g)



Step #1700: CVD

depo_fill · CVD

1.31	169.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

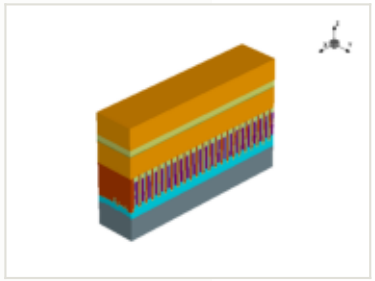

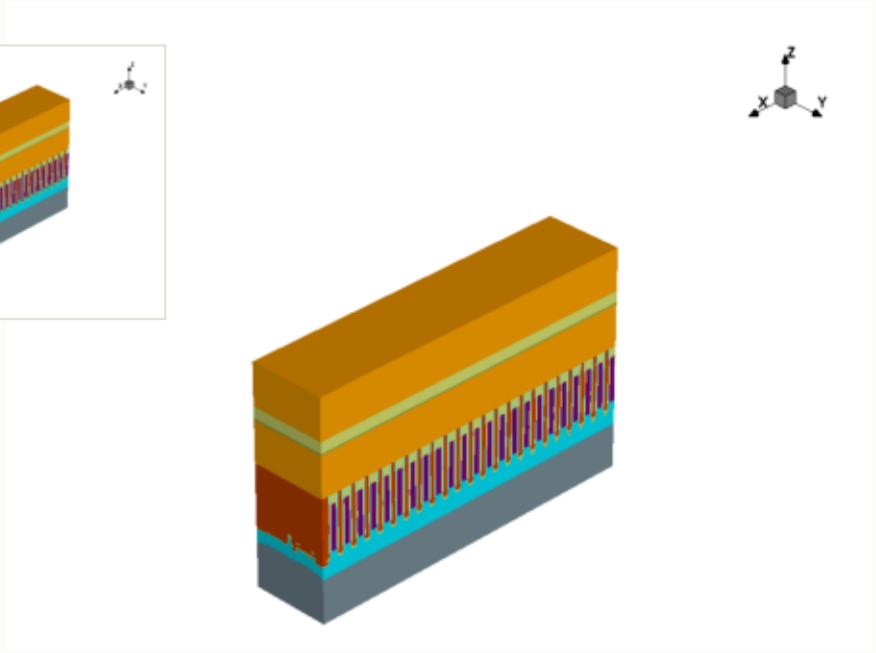

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

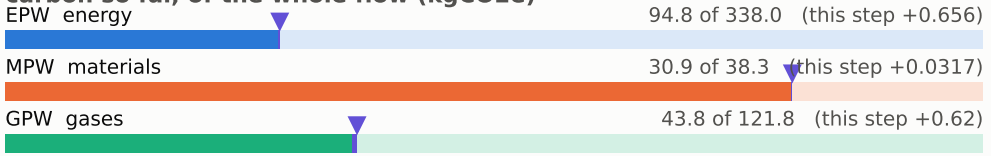

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

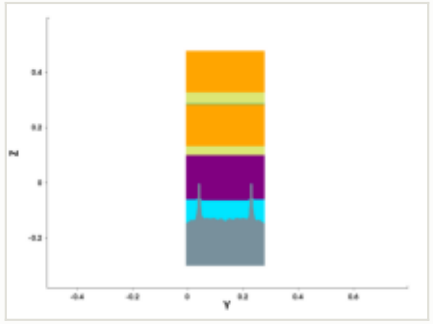

y cut at 0.211 µm

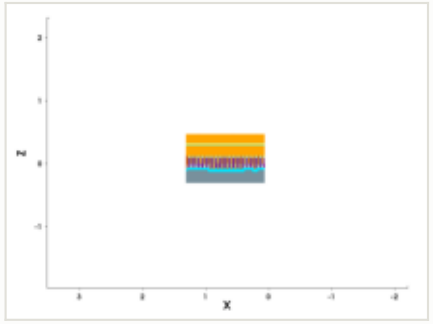

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1710: CVD

depo_isotropic · CVD

1.31	170.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

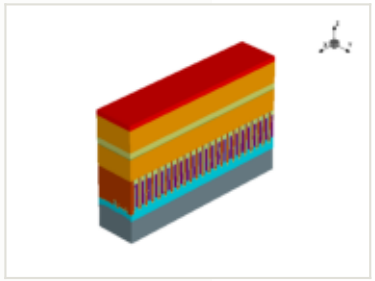

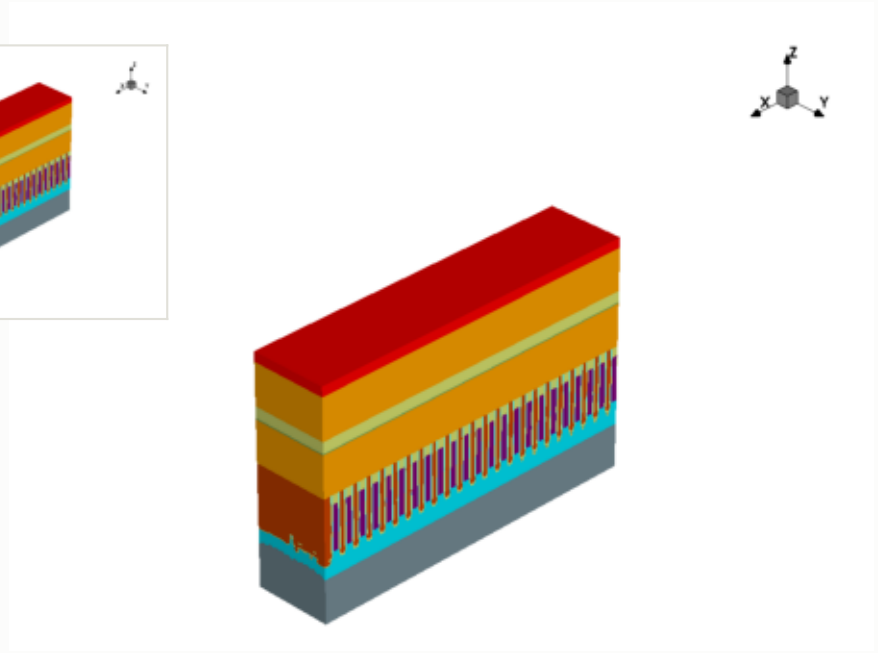

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

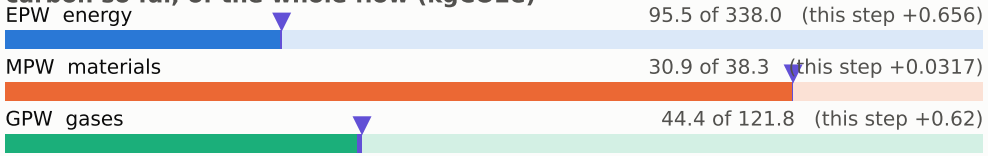

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

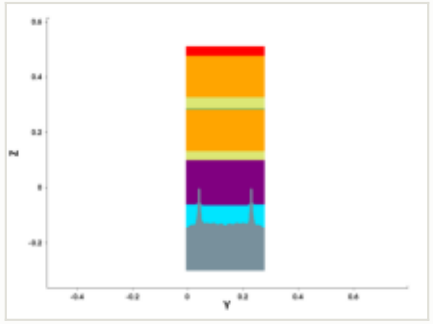

y cut at 0.211 µm

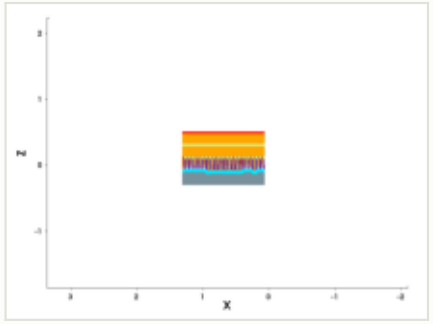

mask for this step

no mask for this step

steps by process area

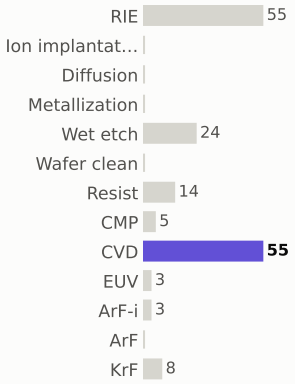

materials deposited (g)

gases emitted (g)

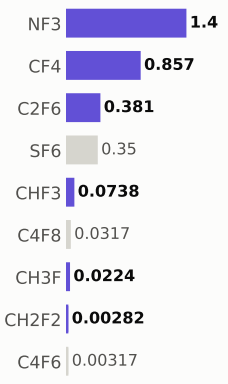

Step #1720: EUV

litho_patterning · EUV

1.96	172.7	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

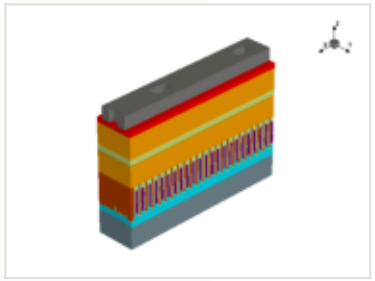

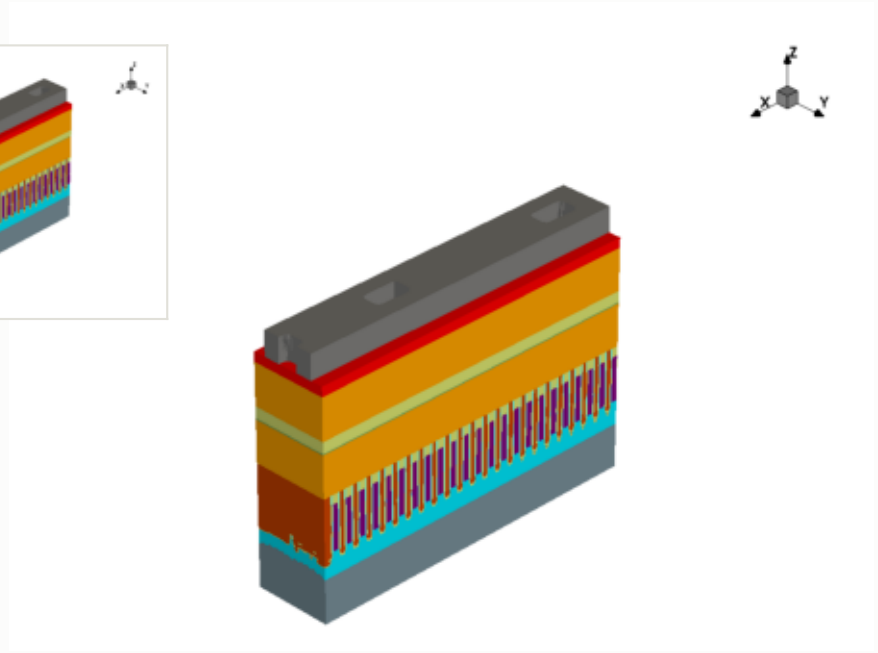

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

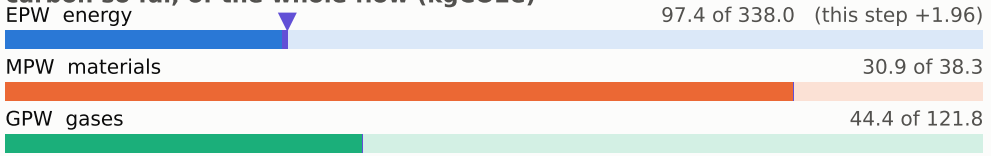

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

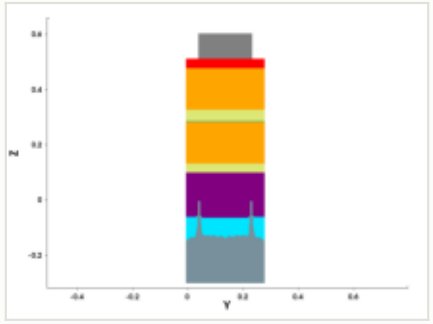

y cut at 0.211 µm

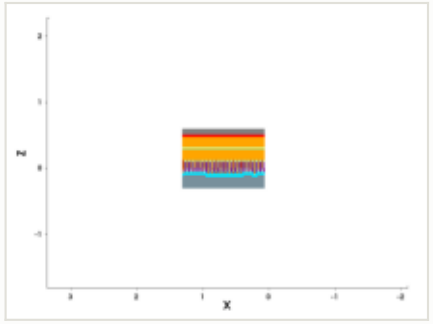

mask: layer 10:0 (GDSII)



steps by process area

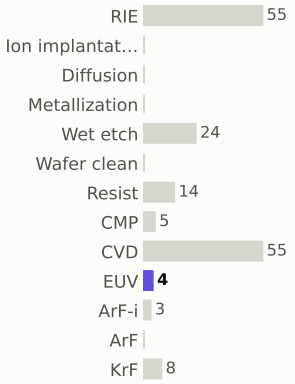

materials deposited (g)

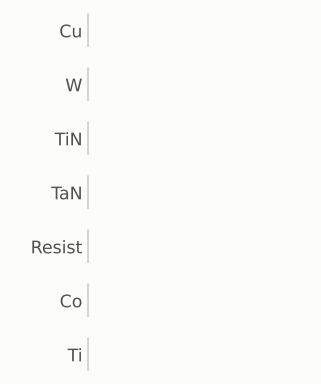

gases emitted (g)



Step #1730: RIE

etch_anisotropic · RIE

1.04	173.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

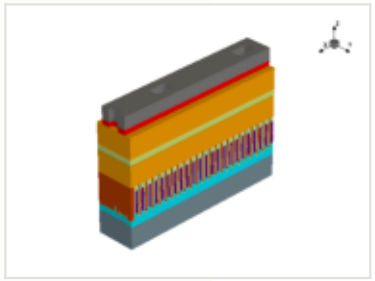

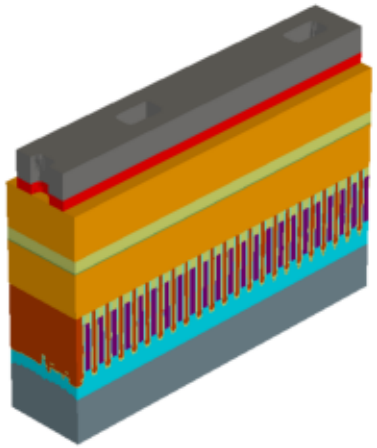

x cut at 0.677 µm

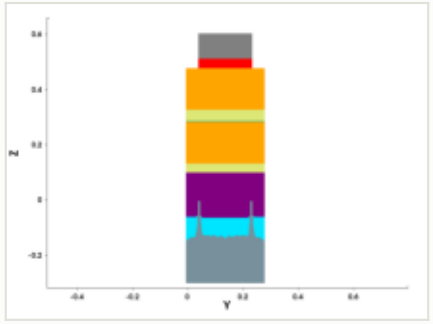

y cut at 0.211 µm

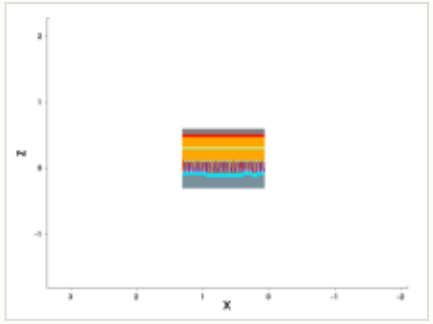

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

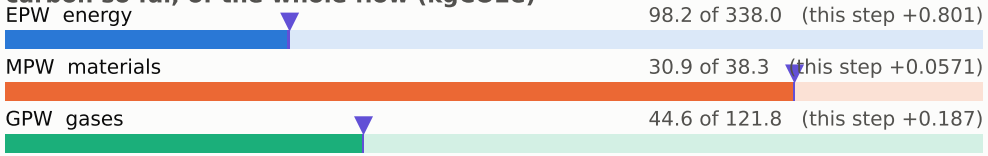

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

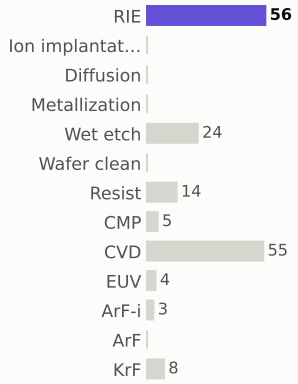

materials deposited (g)

gases emitted (g)



Step #1740: CVD

depo_isotropic · CVD

1.31	175.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

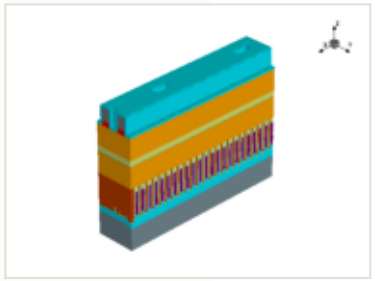

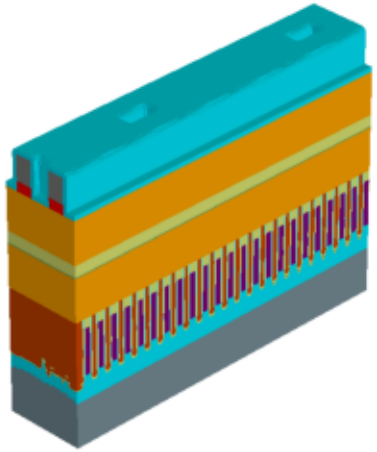

this step

process area	CVD
material	—
thickness	0.016 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

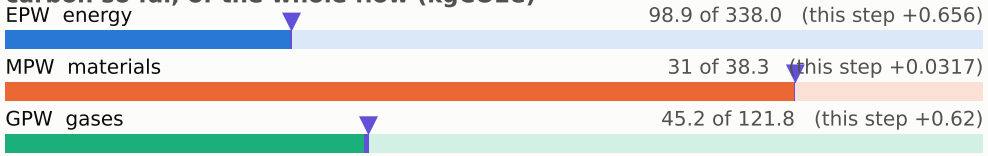

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

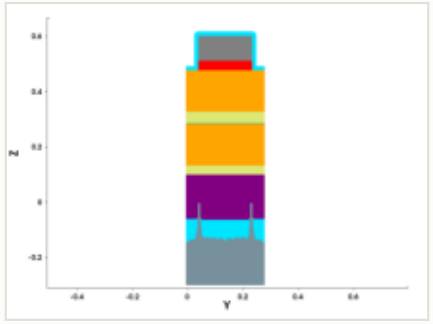

y cut at 0.211 µm

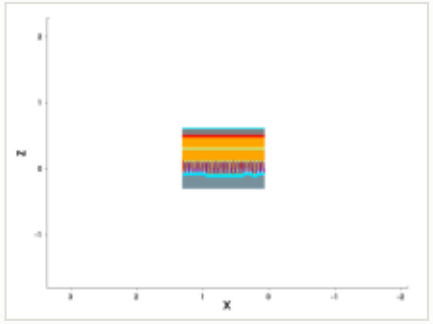

mask for this step

no mask for this step

steps by process area

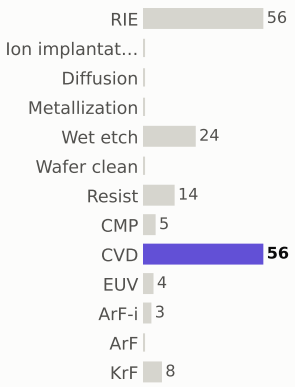

materials deposited (g)

gases emitted (g)



Step #1750: RIE

etch_ellipsoidal · RIE

1.04	176.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

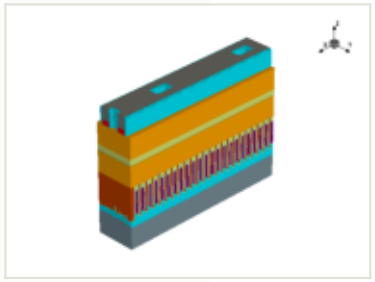

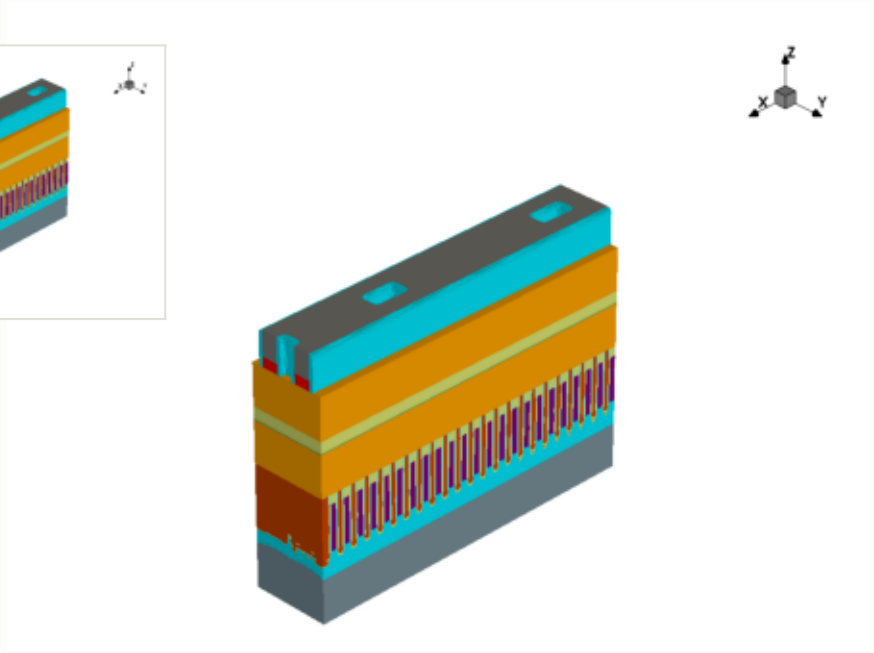

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

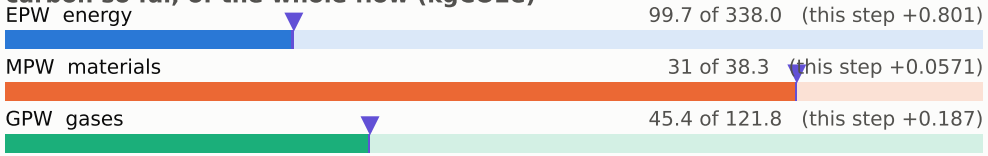

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

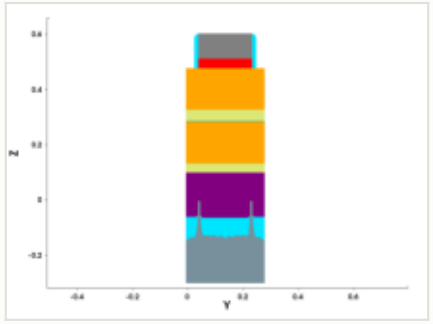

y cut at 0.211 µm

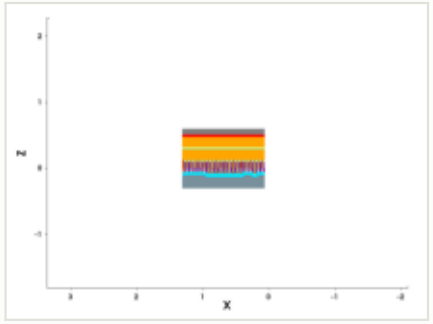

mask for this step

no mask for this step

steps by process area

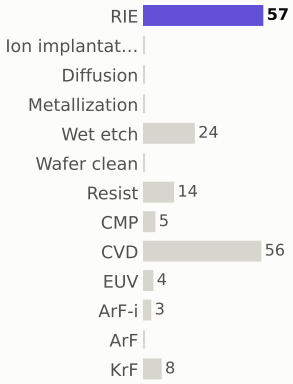

materials deposited (g)

gases emitted (g)



Step #1760: RIE

etch_anisotropic · RIE

1.04	177.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

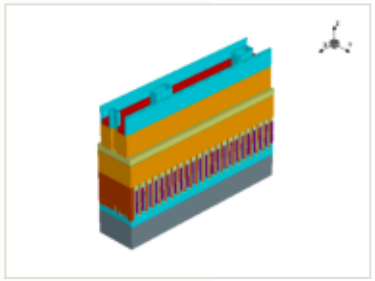

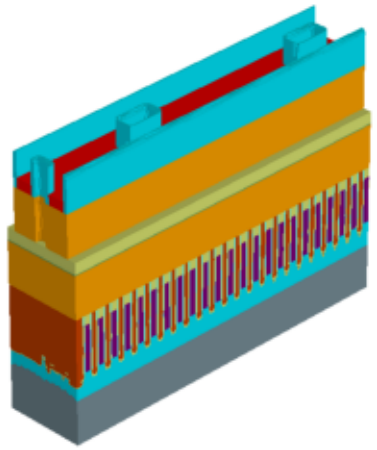

x cut at 0.677 µm

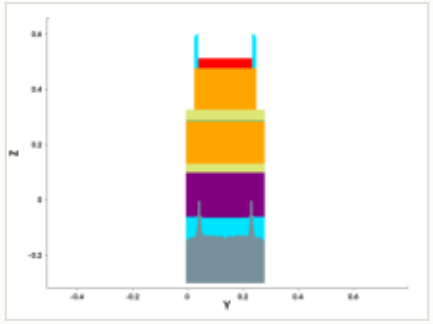

y cut at 0.211 µm

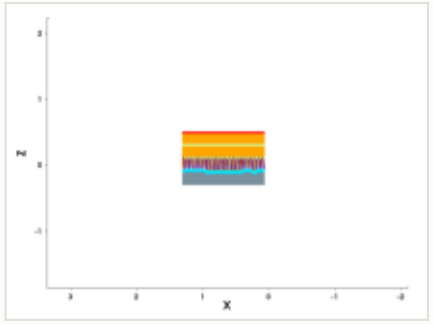

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

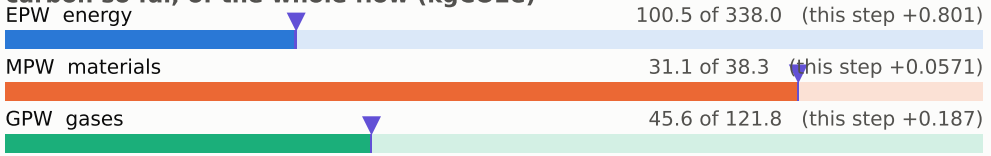

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #1770: RIE

etch_anisotropic · RIE

1.04	178.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

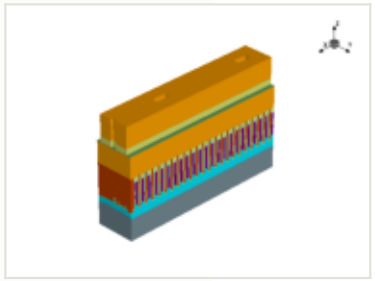

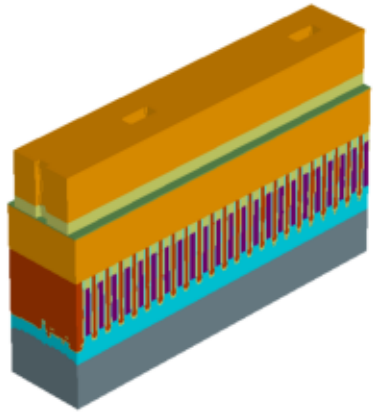

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

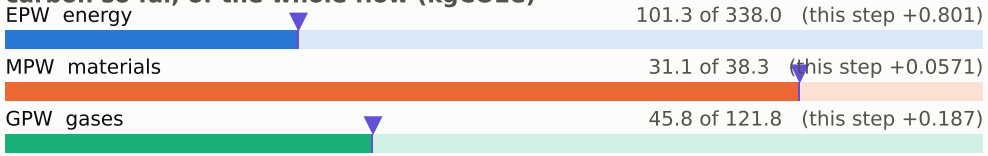

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

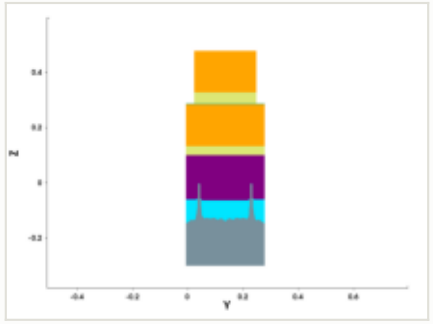

y cut at 0.211 µm

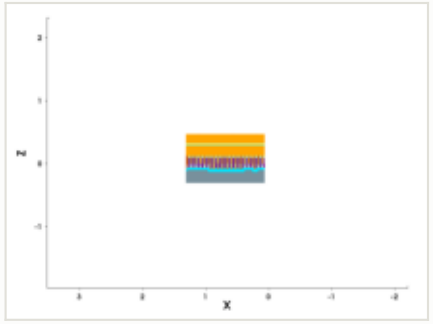

mask for this step

no mask for this step

steps by process area

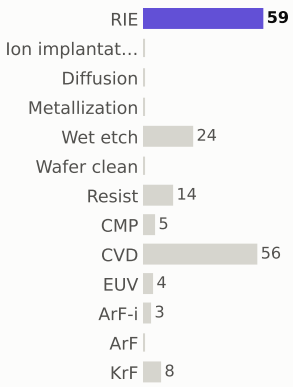

materials deposited (g)

gases emitted (g)



Step #1780: Resist

etch_strip · Resist

0.169	178.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

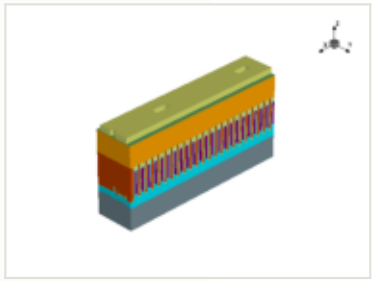

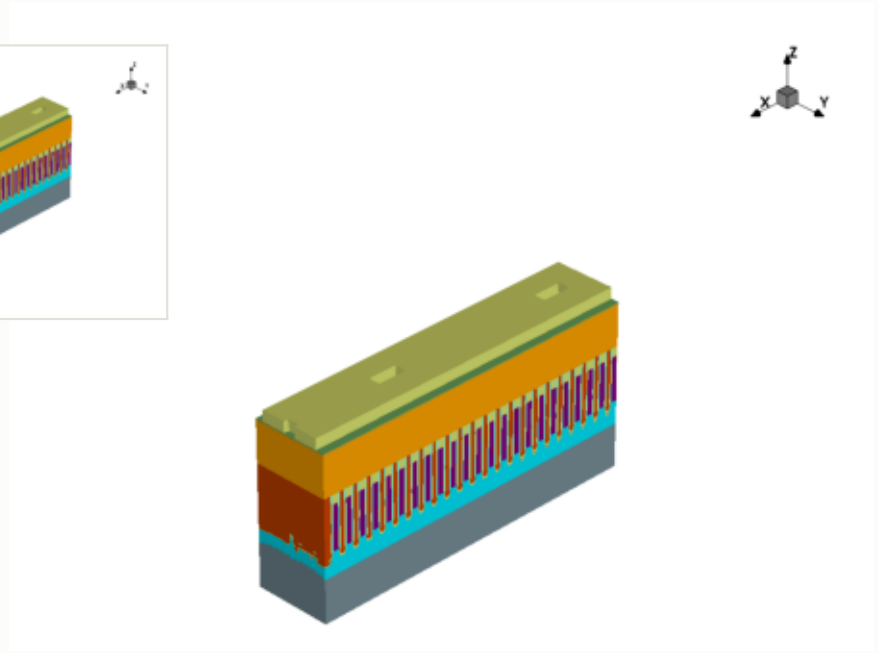

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

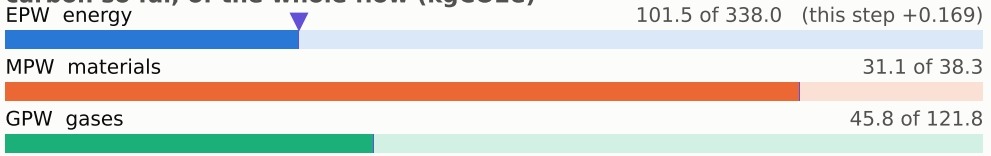

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

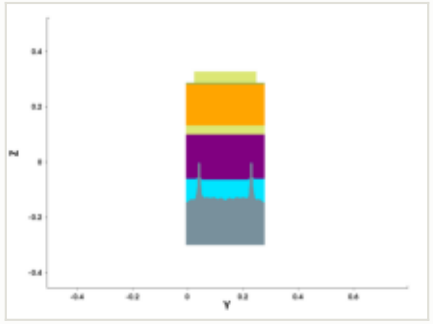

y cut at 0.211 µm

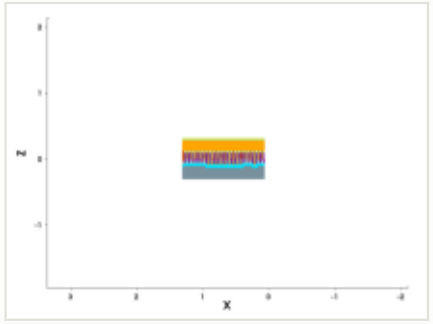

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1790: RIE

etch_anisotropic · RIE

1.04	179.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

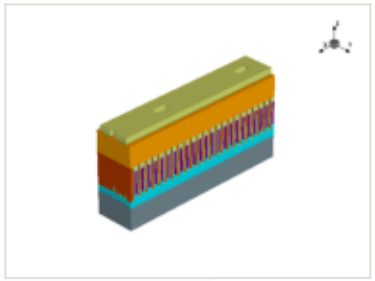

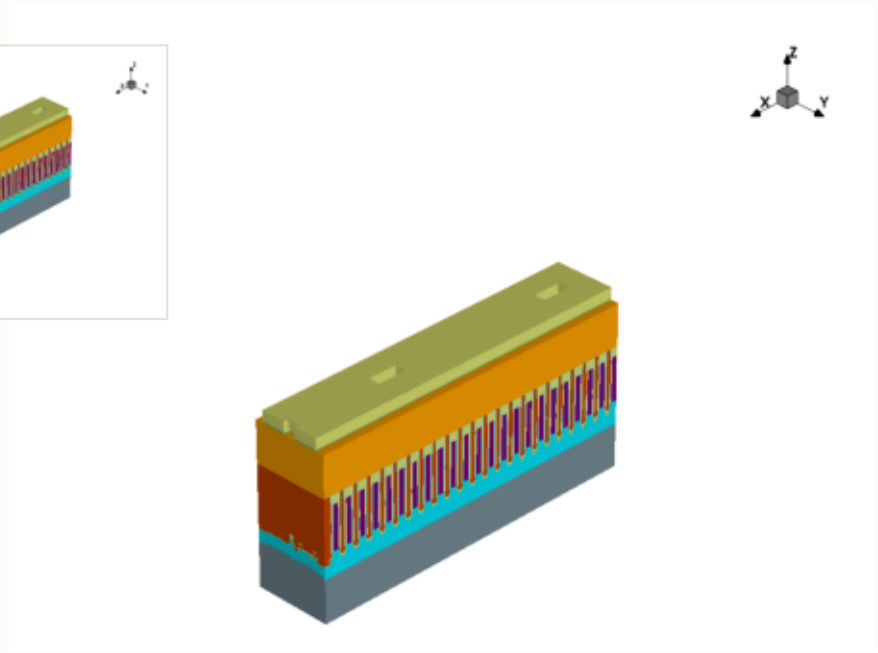

x cut at 0.677 µm

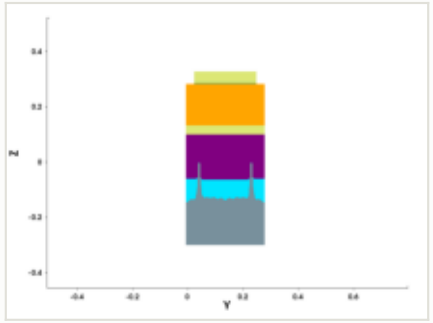

y cut at 0.211 µm

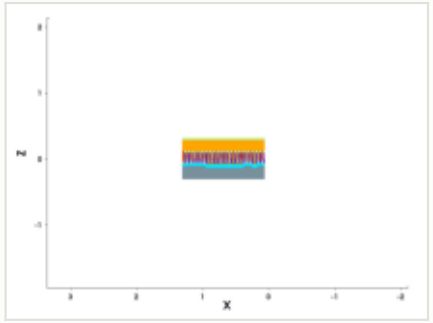

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

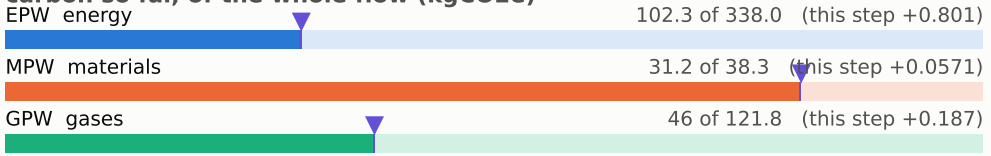

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #1800: RIE

etch_anisotropic · RIE

1.04	180.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

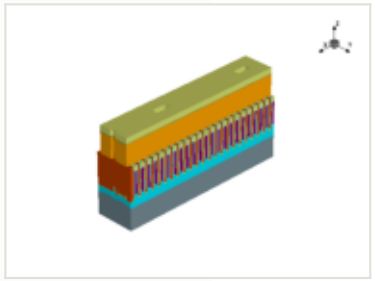

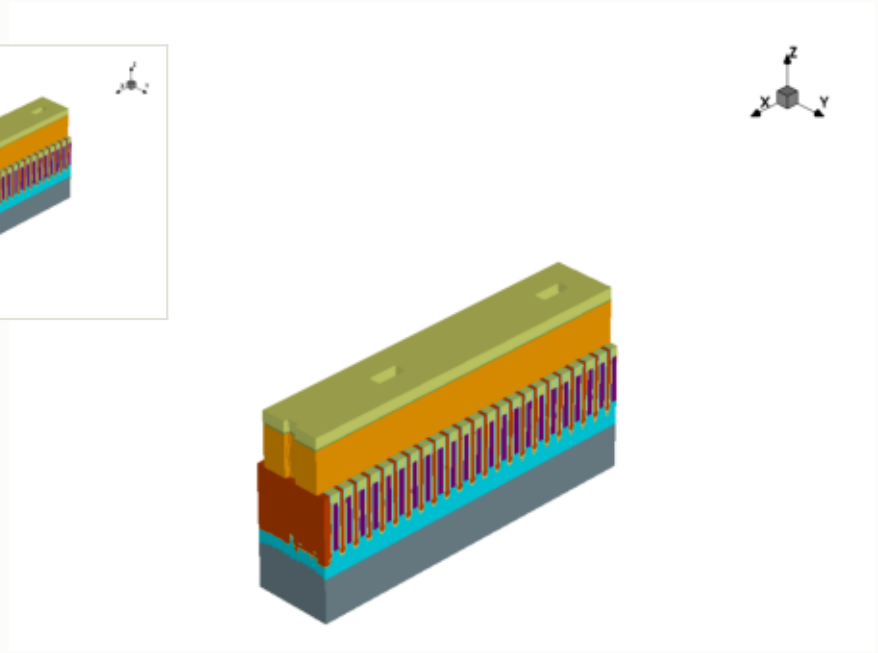

x cut at 0.677 µm

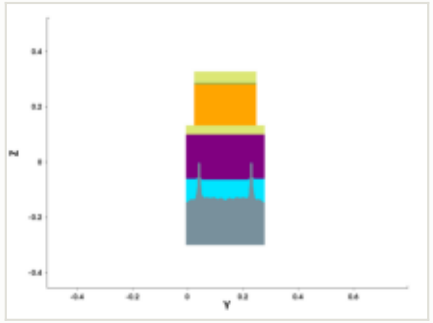

y cut at 0.211 µm

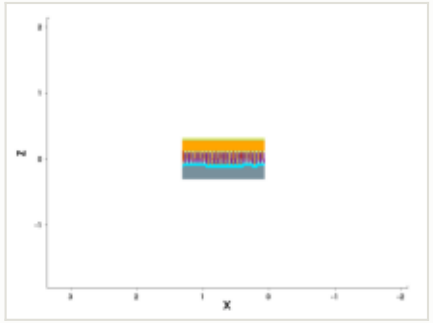

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

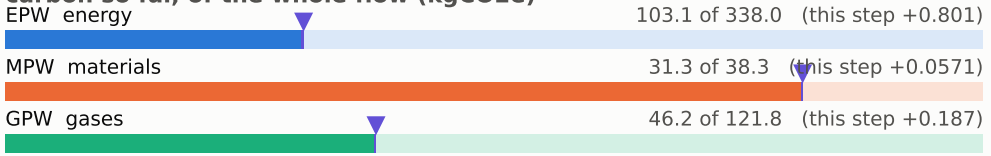

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

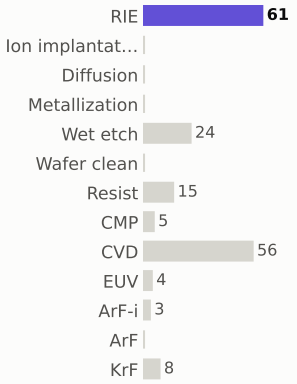

materials deposited (g)

gases emitted (g)



Step #1810: RIE

etch_anisotropic · RIE

1.04	181.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

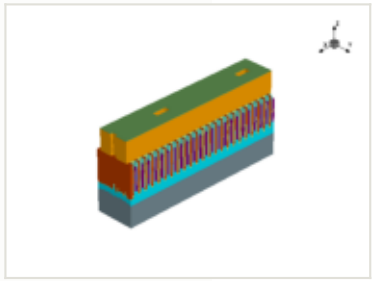

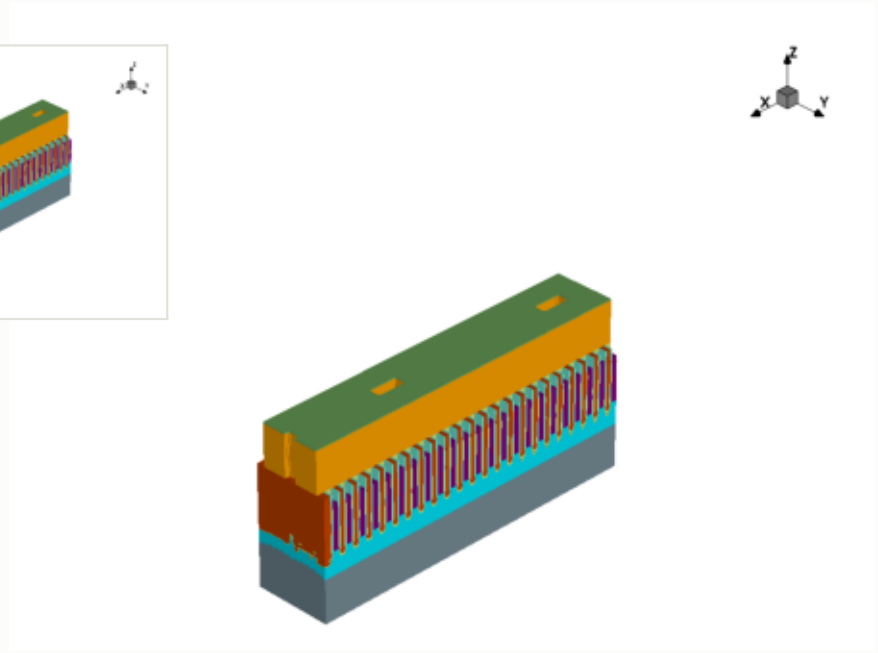

x cut at 0.677 µm

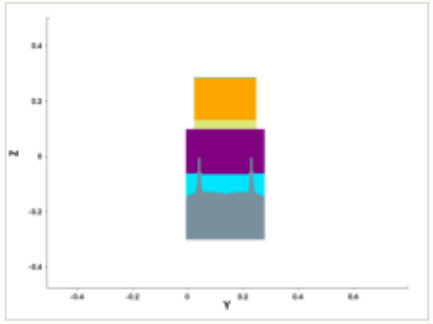

y cut at 0.211 µm

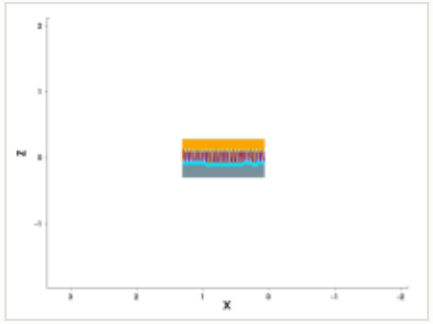

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

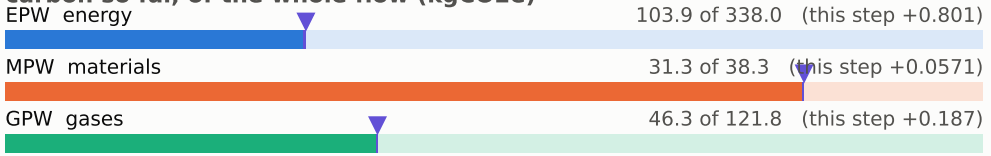

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

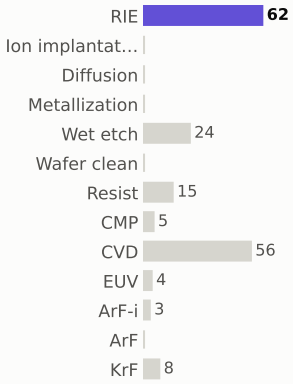

materials deposited (g)

gases emitted (g)



Step #1820: RIE

etch_unified · RIE

1.04	182.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

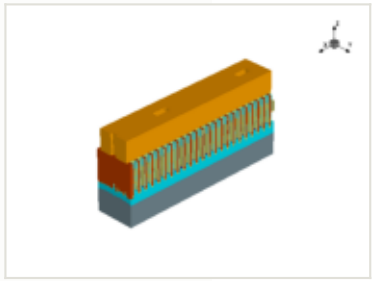

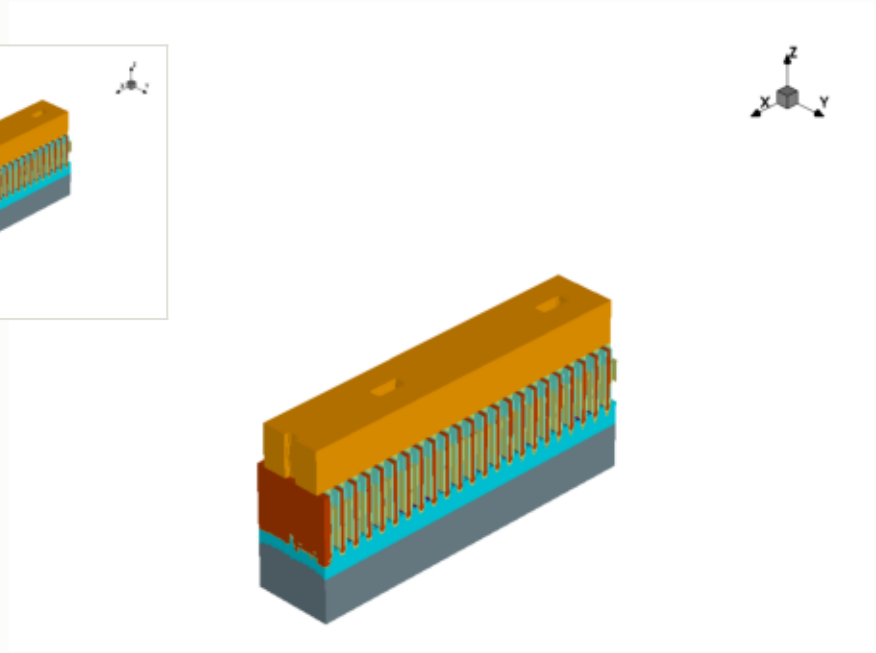

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

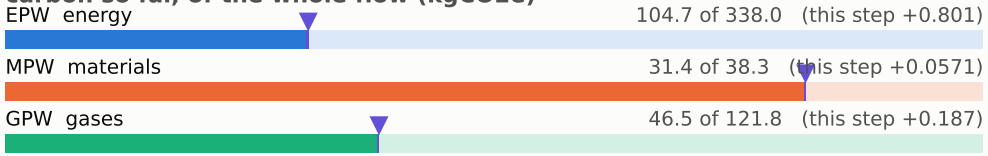

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

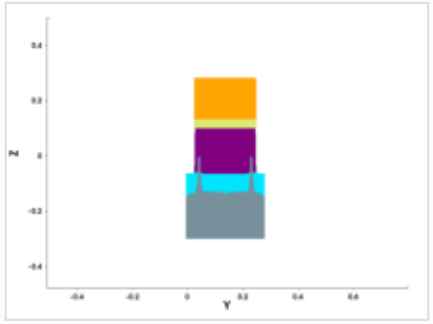

y cut at 0.211 µm

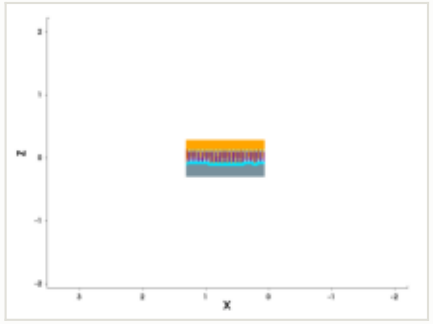

mask for this step

no mask for this step

steps by process area

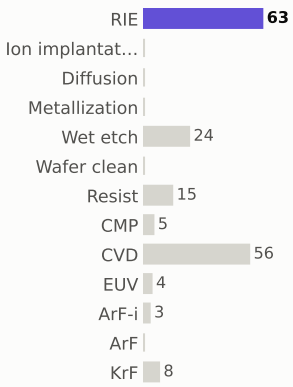

materials deposited (g)

gases emitted (g)



Step #1830: RIE

etch_anisotropic · RIE

1.04	183.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

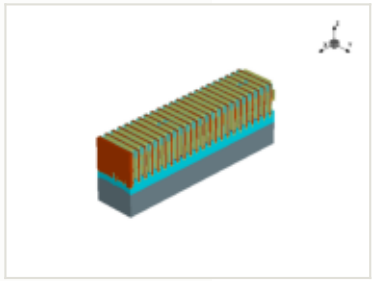

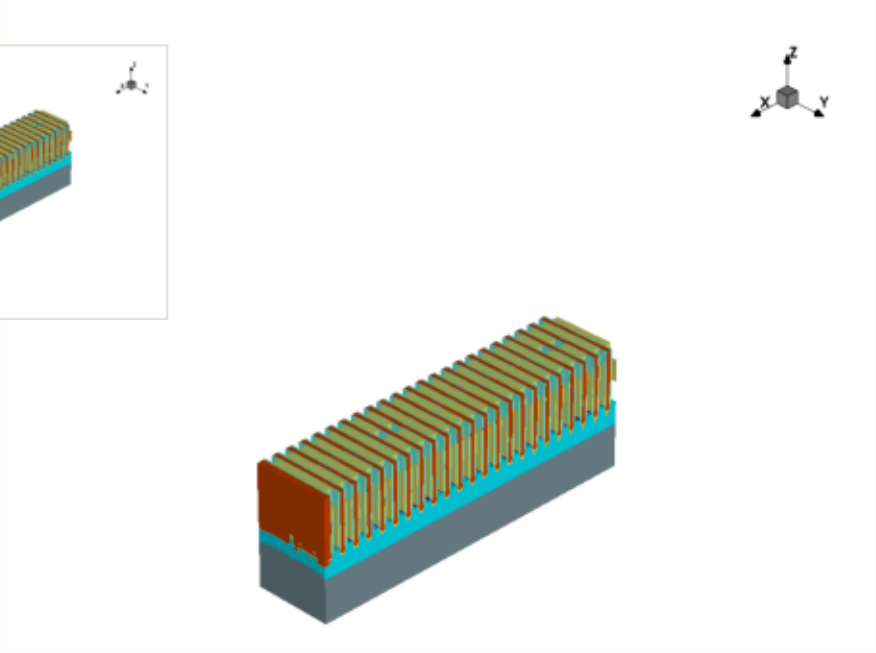

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

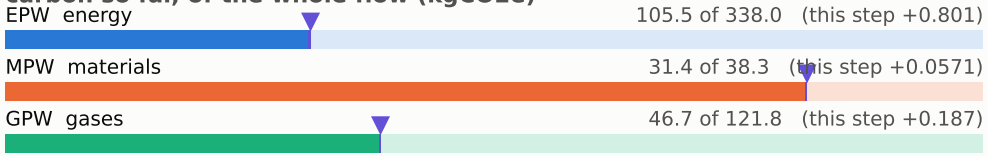

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

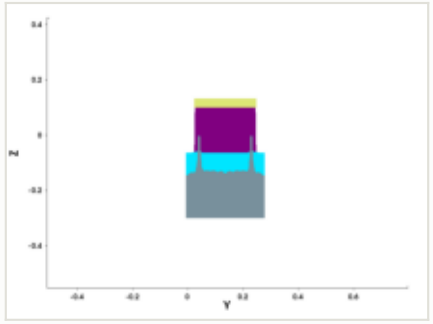

y cut at 0.211 µm

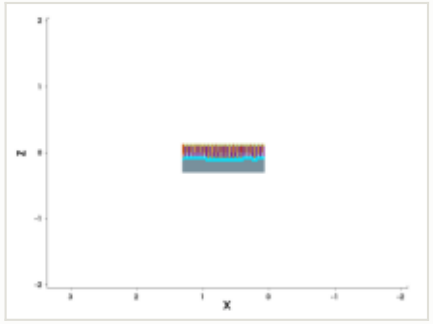

mask for this step

no mask for this step

steps by process area

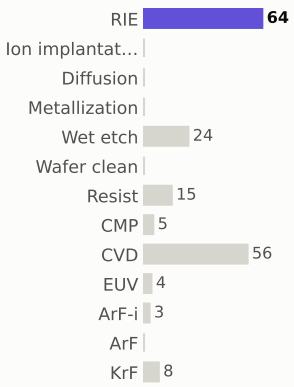

materials deposited (g)

gases emitted (g)



Step #1840: CVD

depo_isotropic · CVD

1.31	184.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

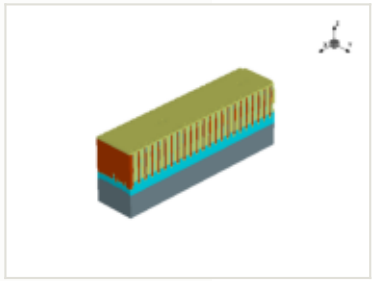

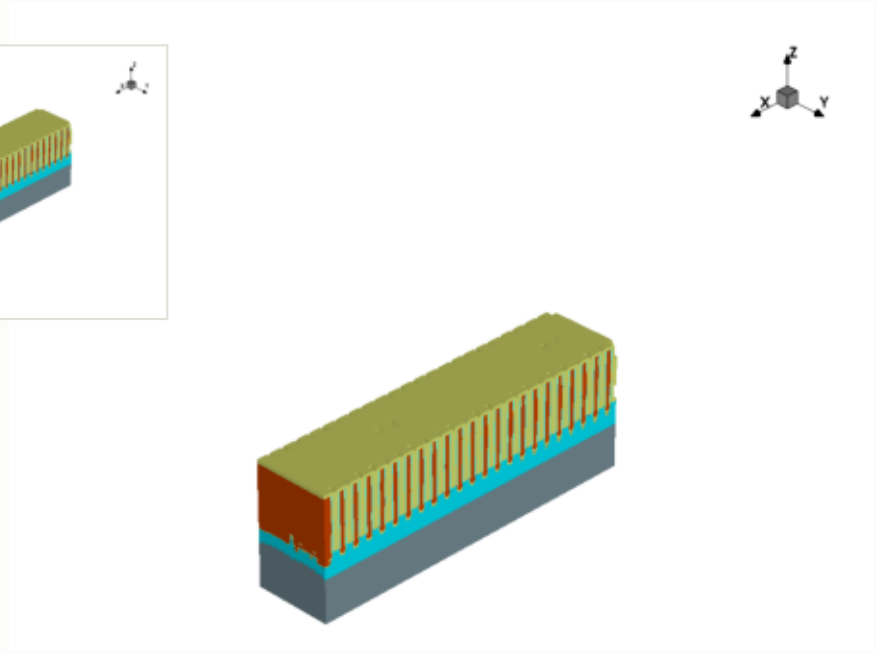

this step

process area	CVD
material	—
thickness	0.012 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

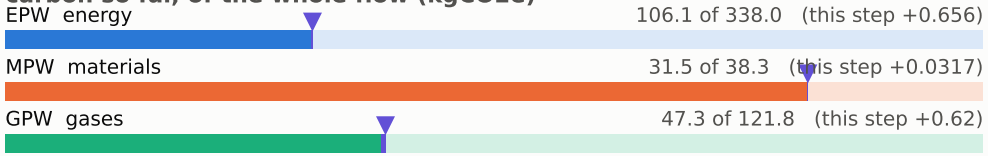

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

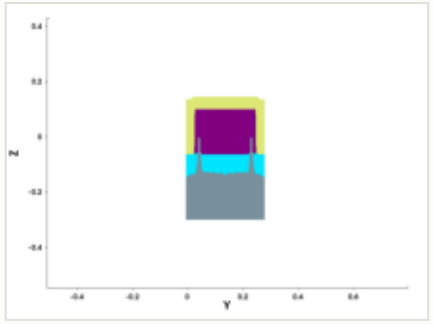

y cut at 0.211 µm

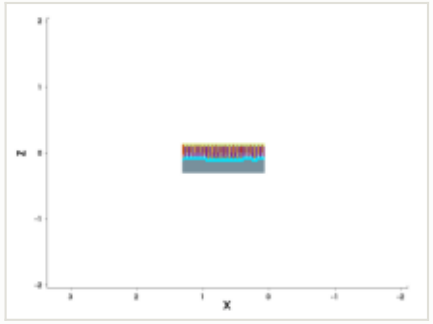

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1850: CVD

depo_fill · CVD

1.31	186.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

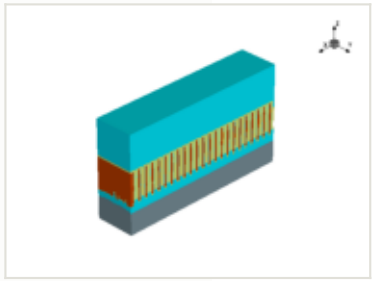

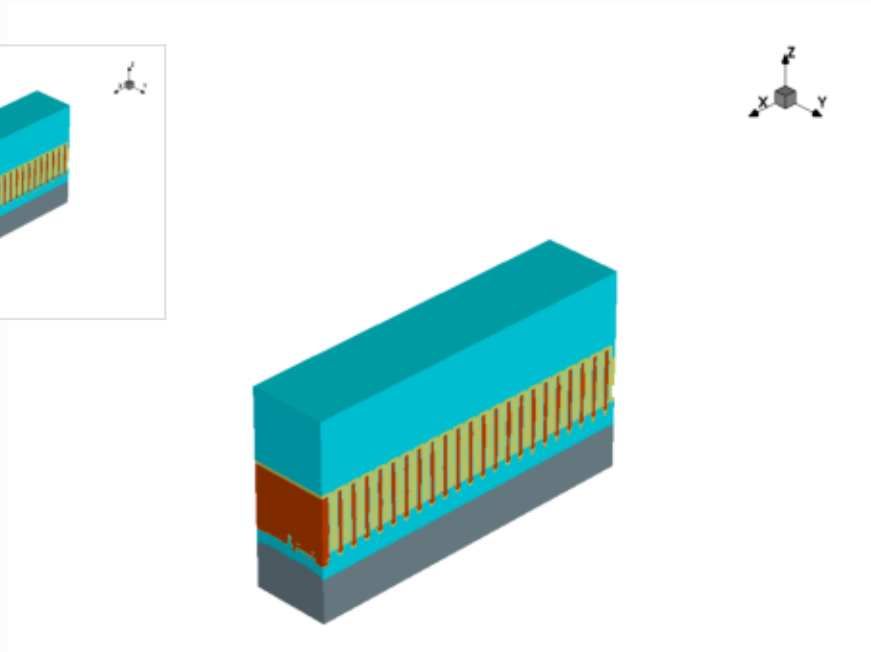

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

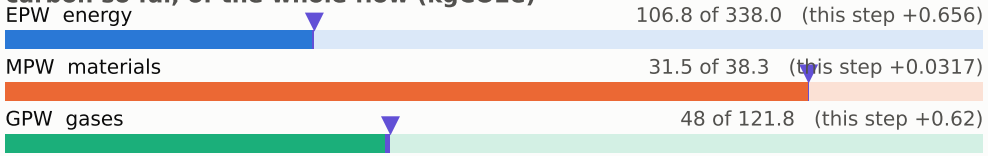

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

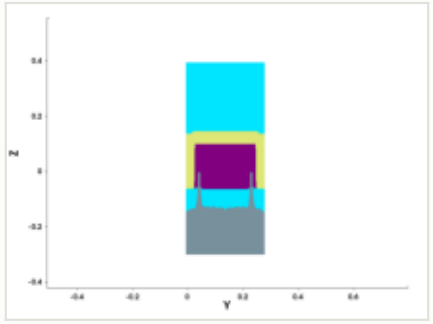

y cut at 0.211 µm

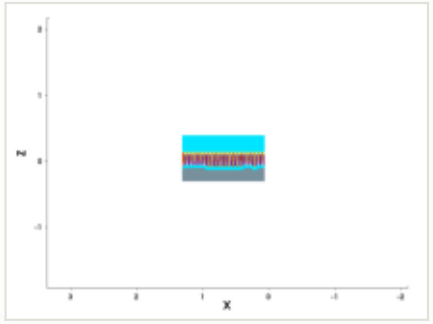

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1860: CMP

etch_cmp · CMP

0.169	186.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

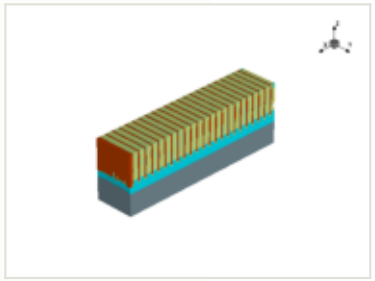

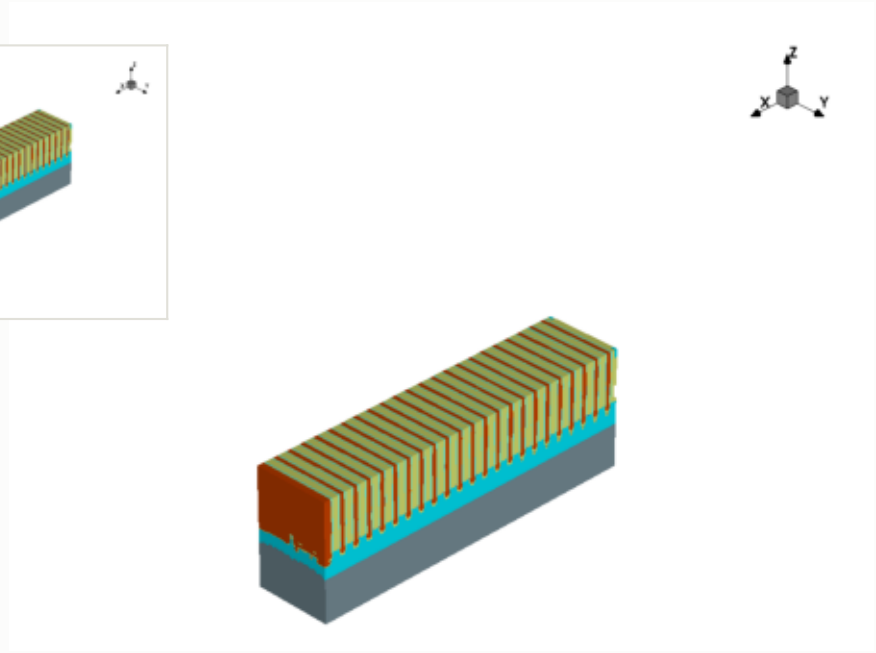

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

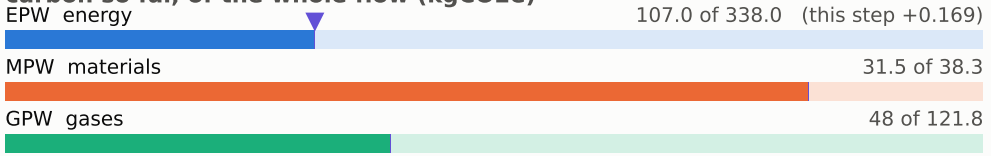

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

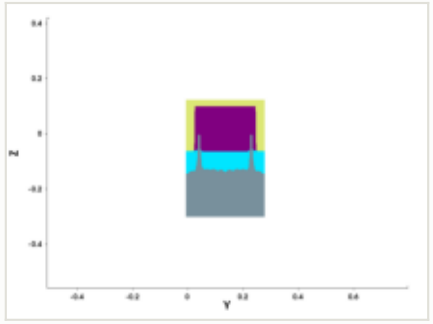

y cut at 0.211 µm

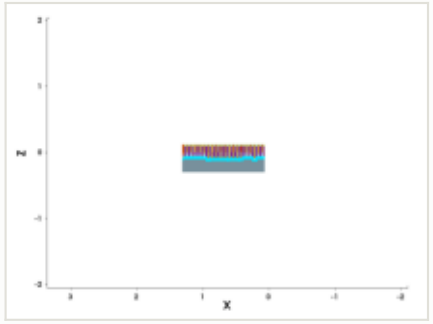

mask for this step

no mask for this step

steps by process area

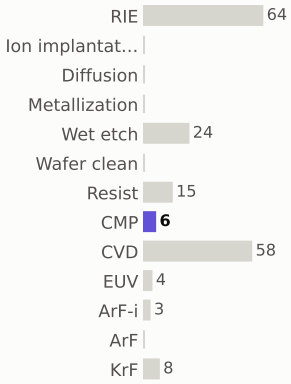

materials deposited (g)

gases emitted (g)



Step #1870: RIE

etch_anisotropic · RIE

1.04	187.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

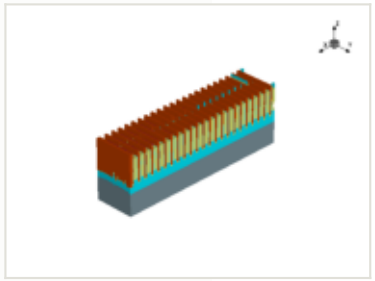

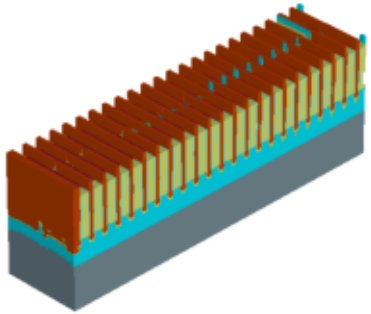

x cut at 0.677 µm

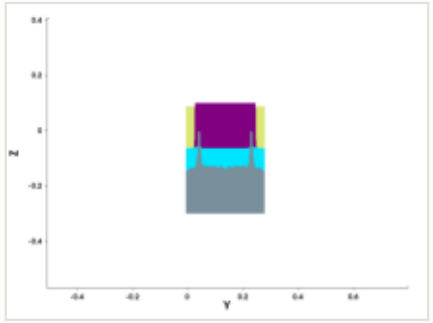

y cut at 0.211 µm

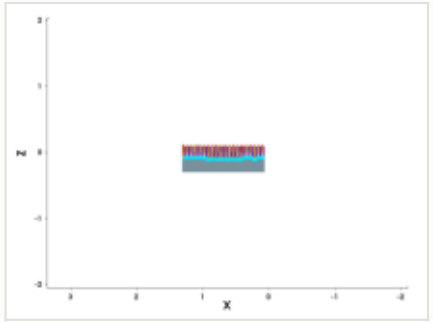

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

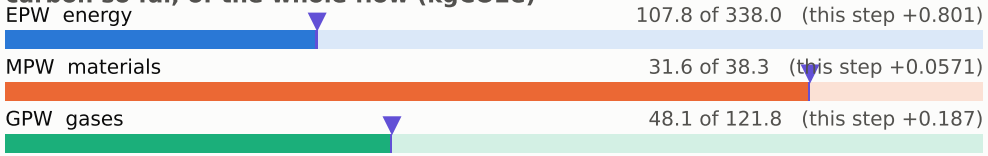

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

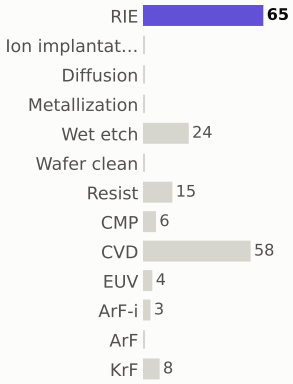

materials deposited (g)

gases emitted (g)



Step #1880: RIE

etch_anisotropic · RIE

1.04	188.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

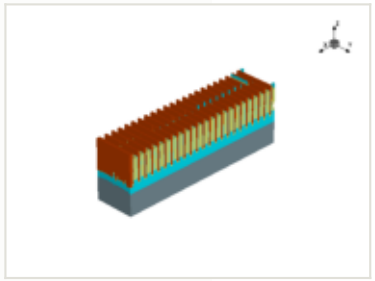

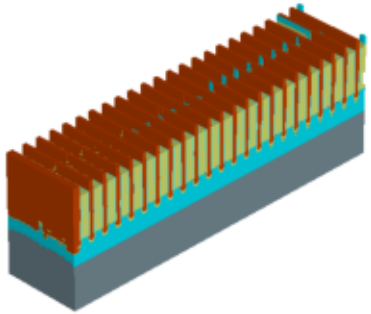

x cut at 0.677 µm

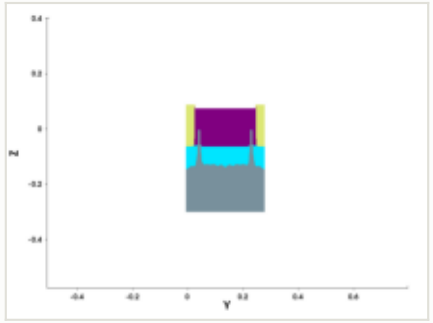

y cut at 0.211 µm

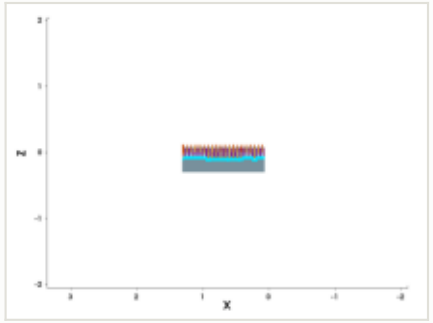

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

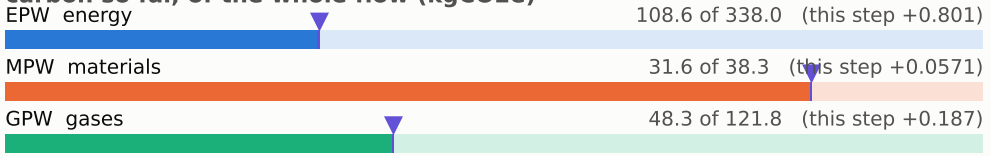

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

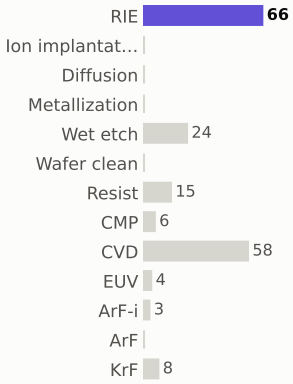

materials deposited (g)

gases emitted (g)



Step #1890: Wet_etch

etch_isotropic · Wet_etch

0.169	188.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

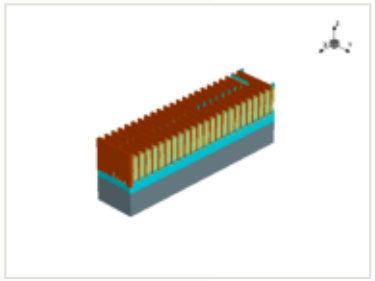

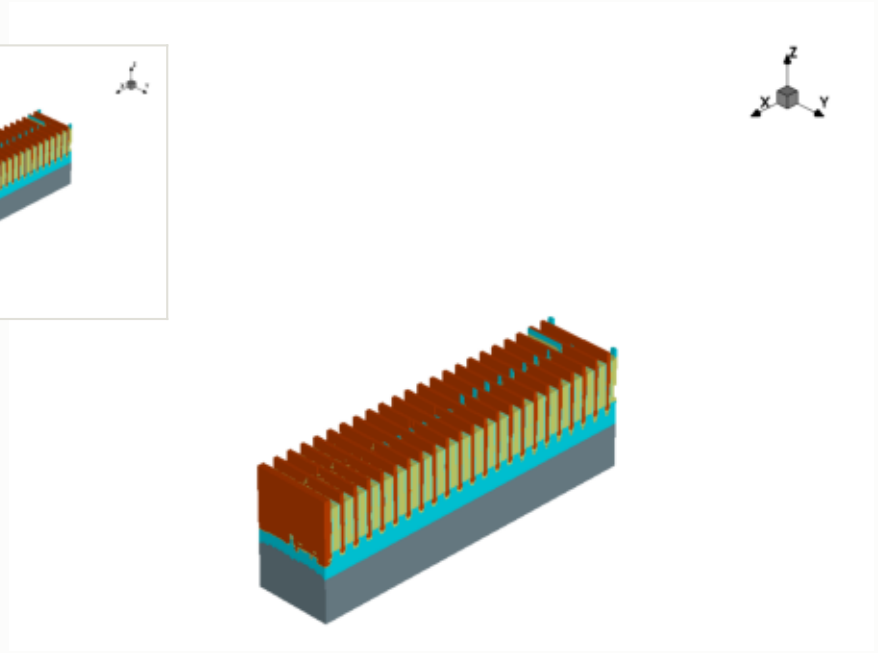

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

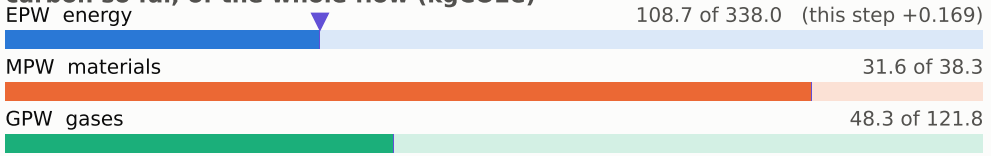

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

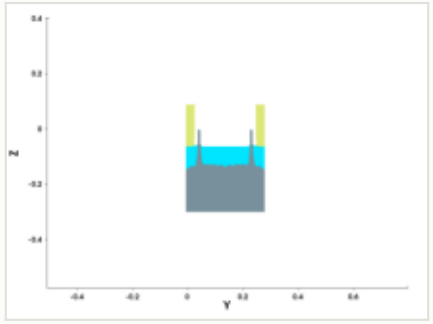

y cut at 0.211 µm

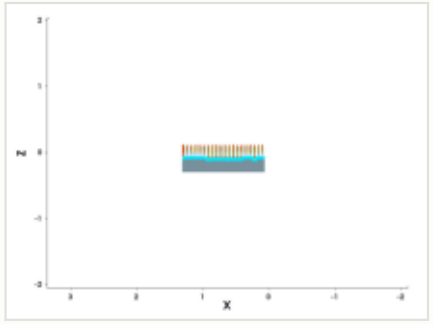

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1900: Wet_etch

etch_isotropic · Wet_etch

0.169	188.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

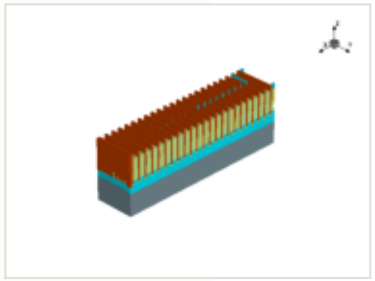

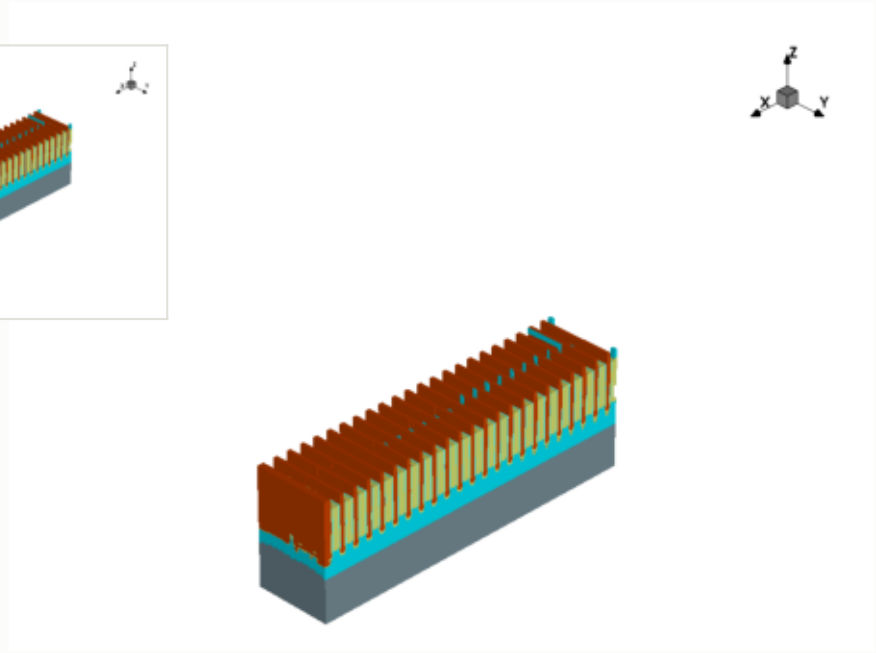

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

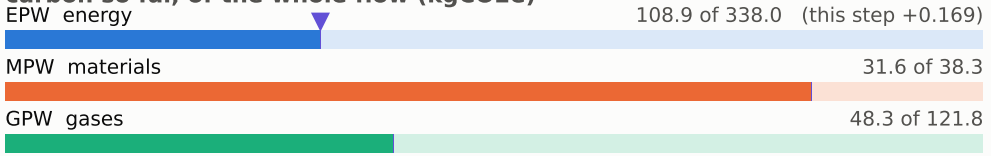

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

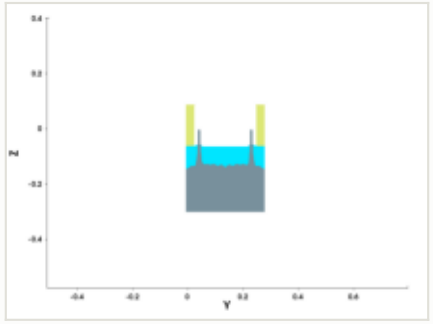

y cut at 0.211 µm

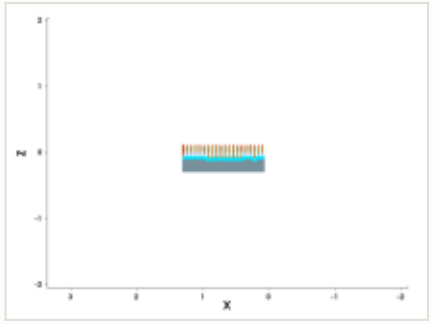

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1920: CVD

depo_isotropic · CVD

1.31	190.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

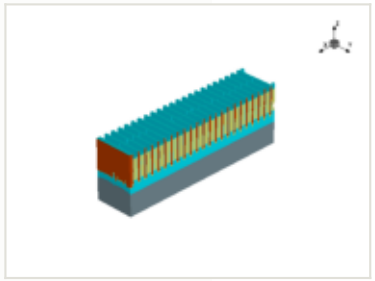

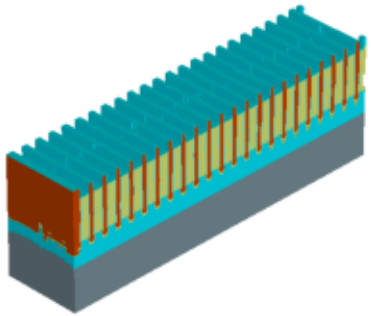

x cut at 0.677 µm

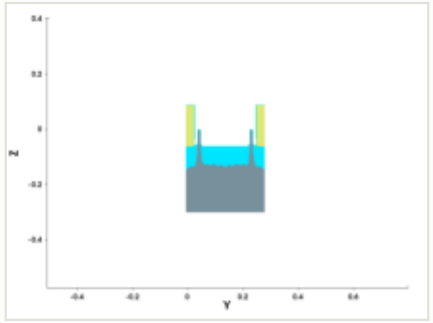

y cut at 0.211 µm

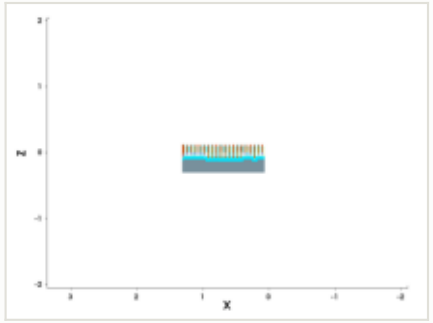

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

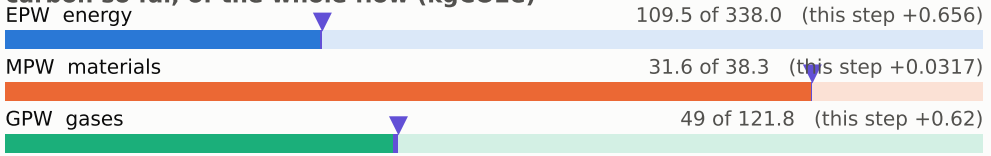

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

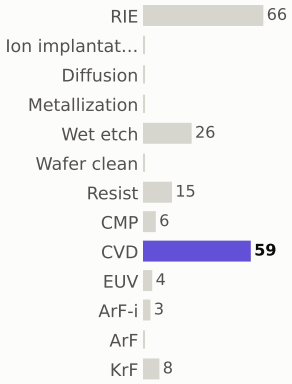

materials deposited (g)



gases emitted (g)



Step #1930: KrF

litho_patterning · KrF

0.199	190.3	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

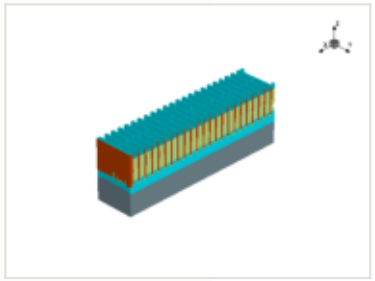

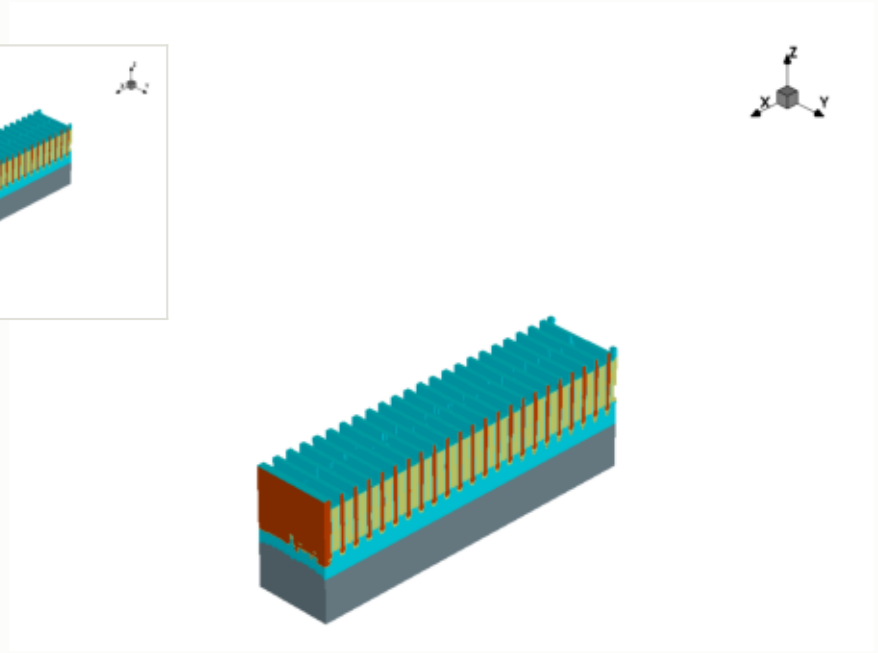

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

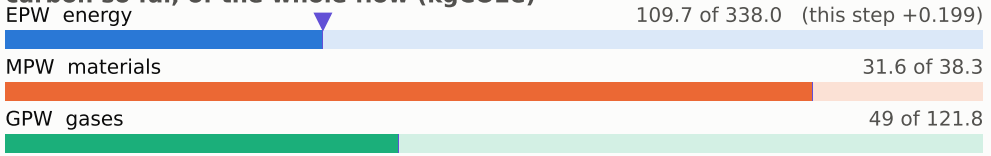

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

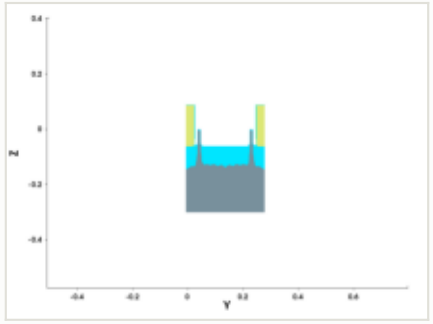

y cut at 0.211 µm

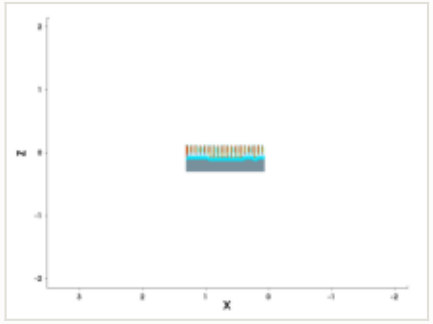

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

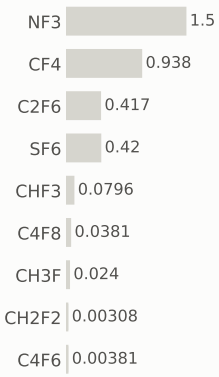

Step #1940: Wet_etch

etch_isotropic · Wet_etch

0.169	190.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

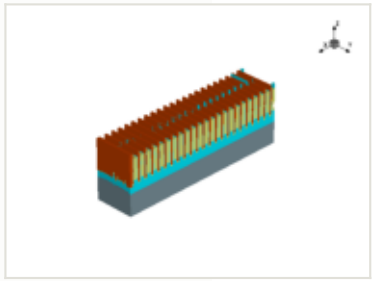

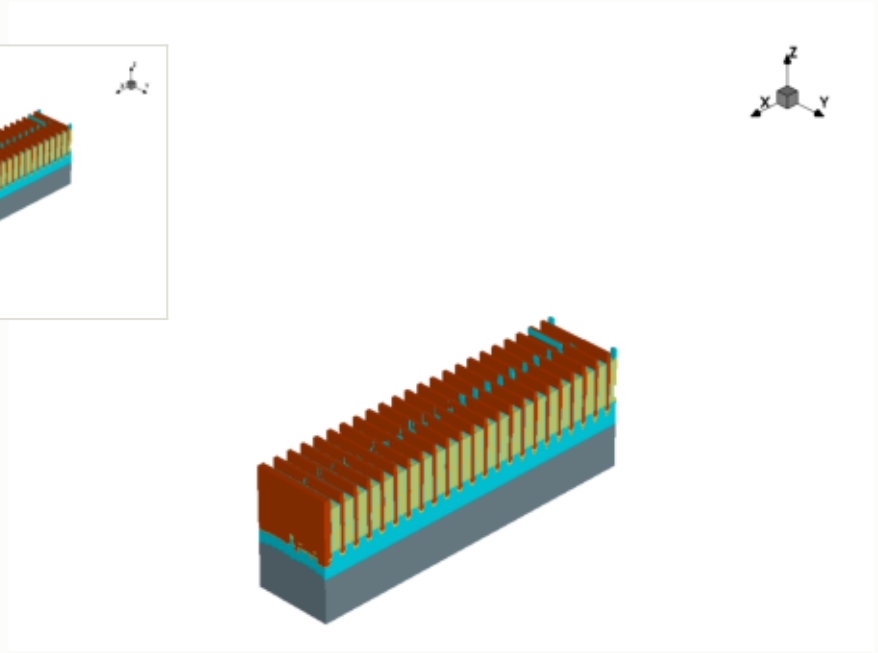

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

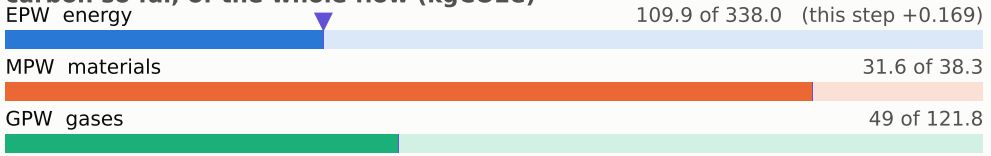

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

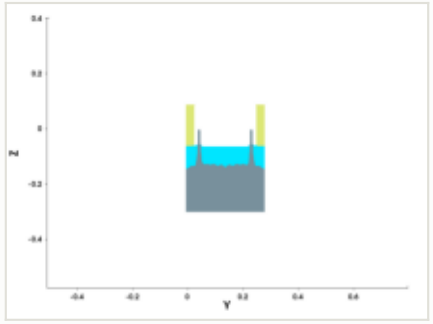

y cut at 0.211 µm

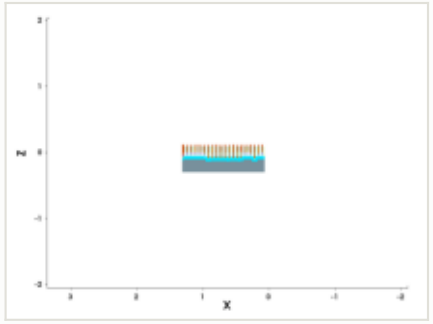

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

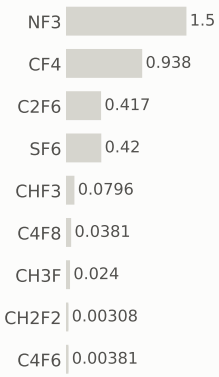

Step #1950: Wet_etch

etch_isotropic · Wet_etch

0.169	190.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

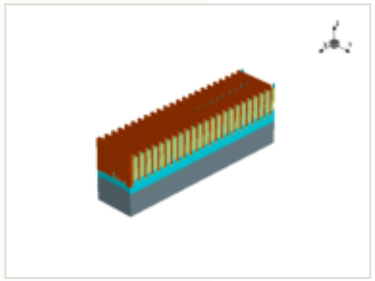

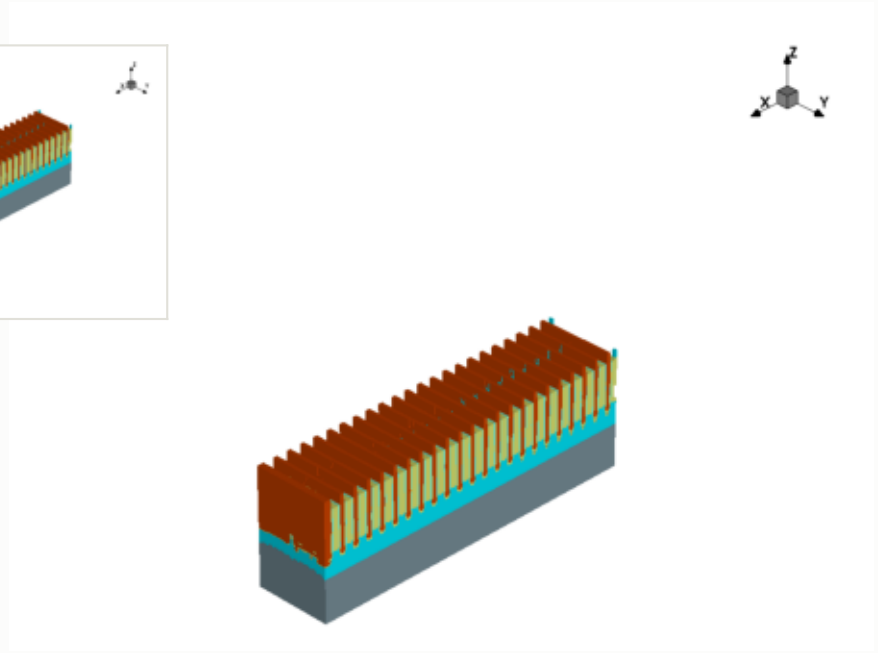

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

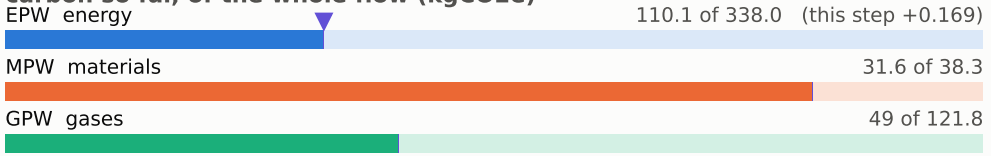

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

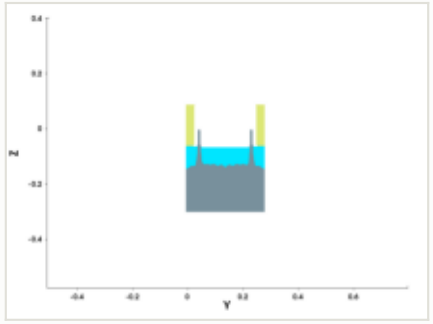

y cut at 0.211 µm

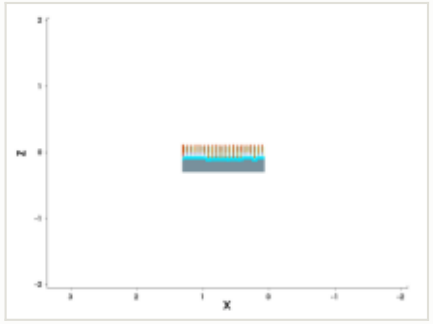

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

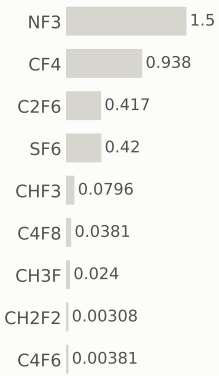

Step #1960: Resist

etch_strip · Resist

0.169	190.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

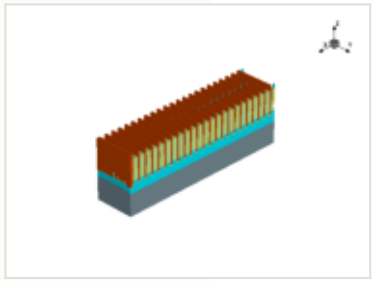

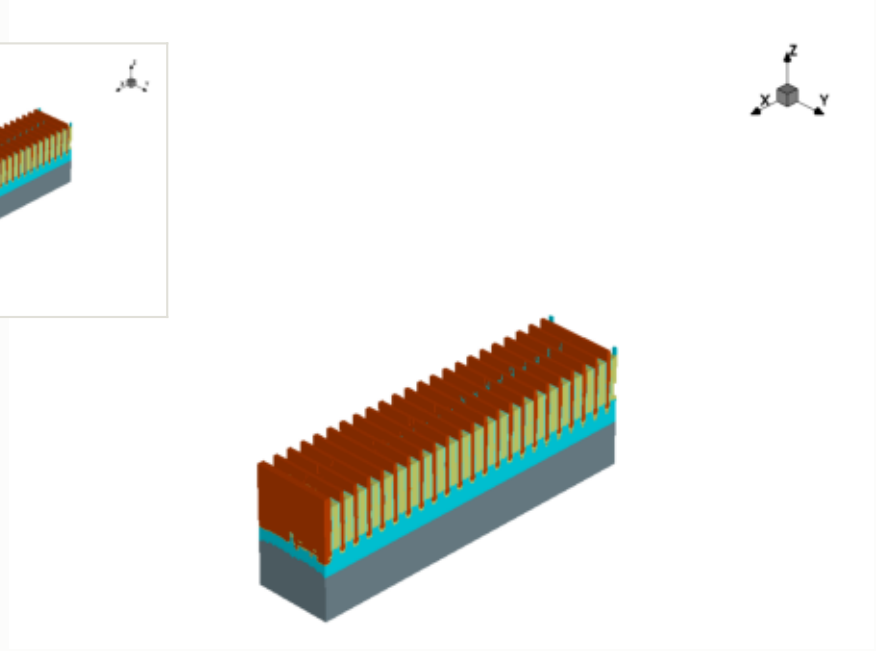

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

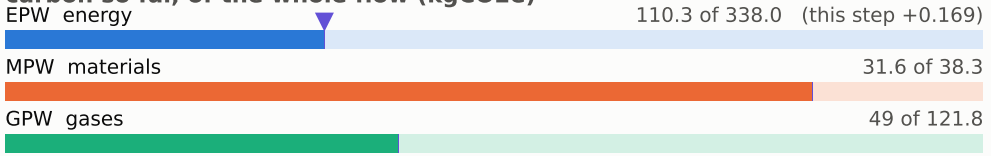

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

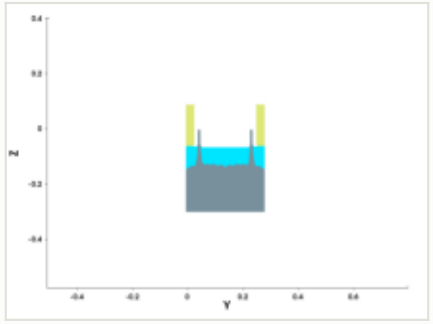

y cut at 0.211 µm

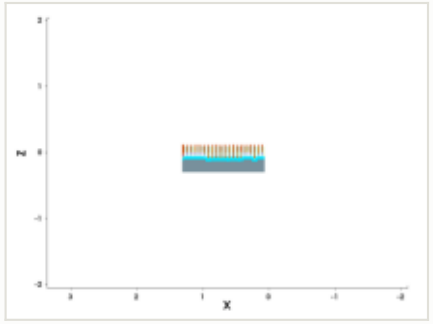

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #1970: Diffusion

interface_growth · Diffusion

0.801	191.6	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

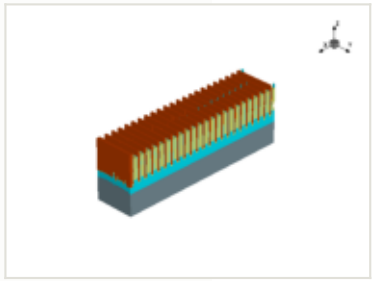

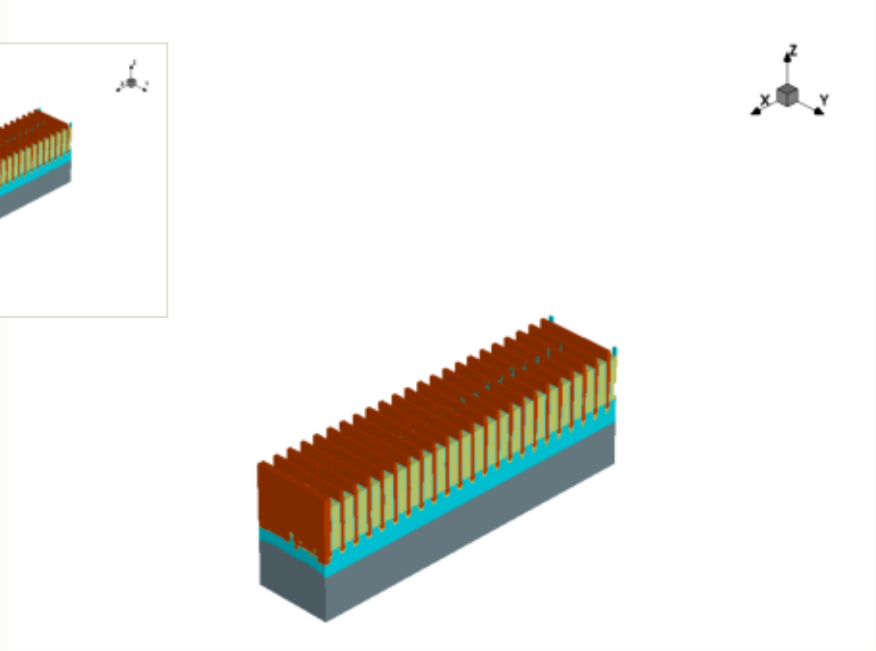

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

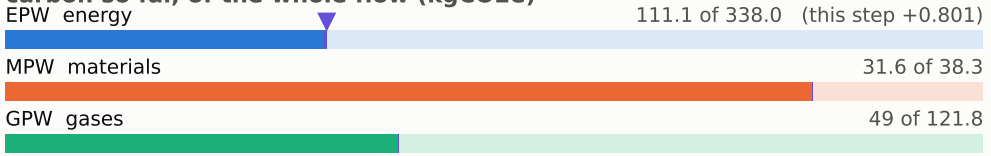

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

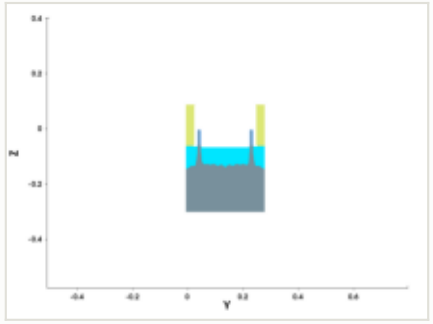

y cut at 0.211 µm

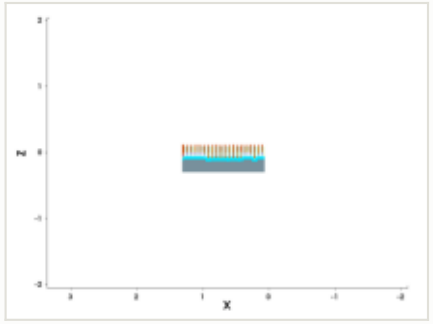

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #1980: CVD

depo_isotropic · CVD

1.31	193.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

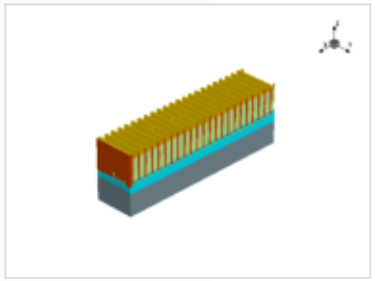

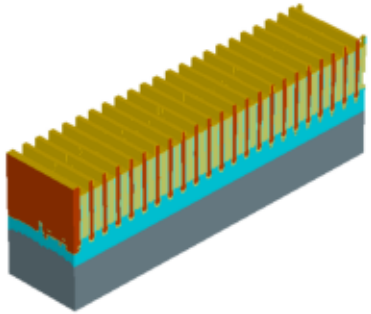

x cut at 0.677 µm

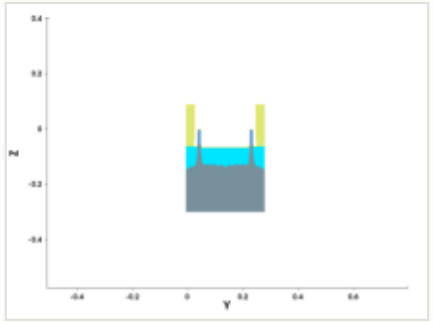

y cut at 0.211 µm

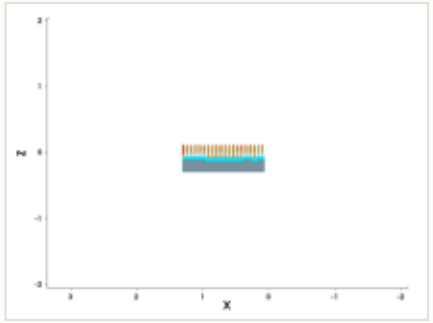

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0013 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

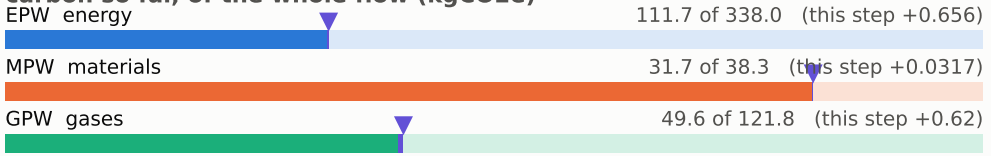

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

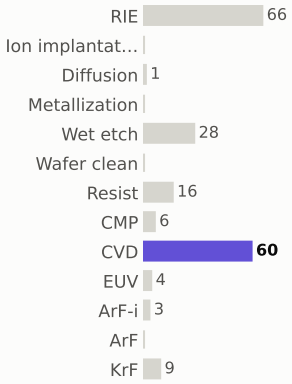

materials deposited (g)

gases emitted (g)



Step #1990: CVD

depo_isotropic · CVD

1.31	194.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

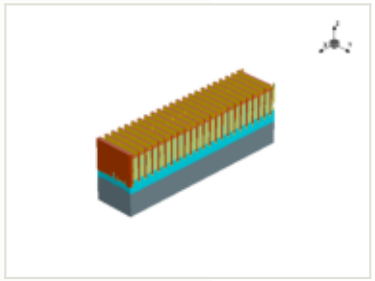

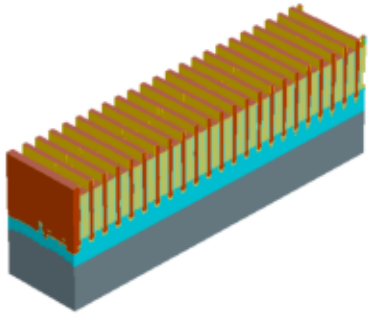

x cut at 0.677 µm

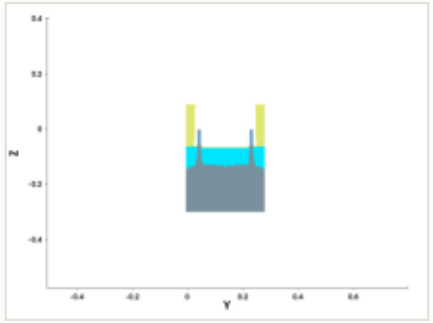

y cut at 0.211 µm

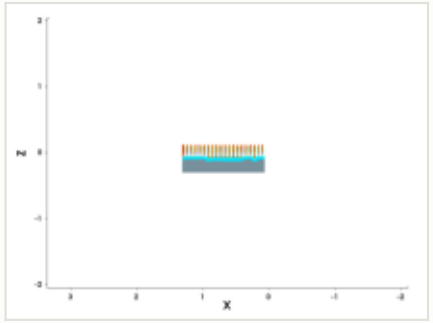

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

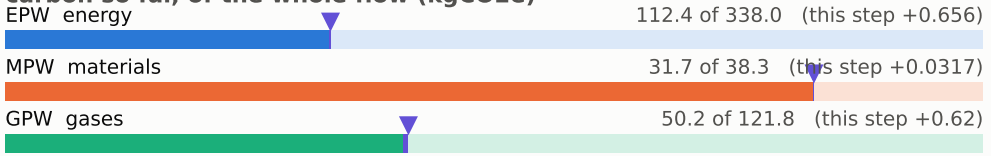

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #2000: CVD

depo_fill · CVD

1.31	195.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

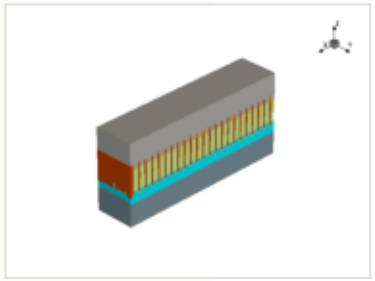

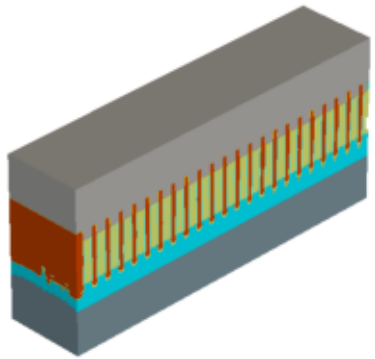

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

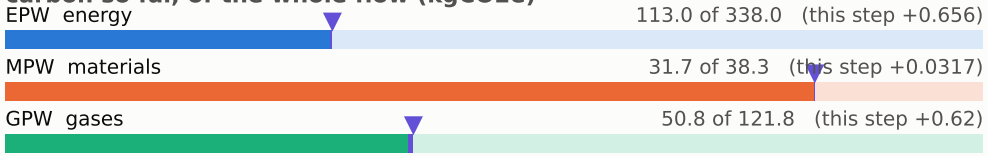

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

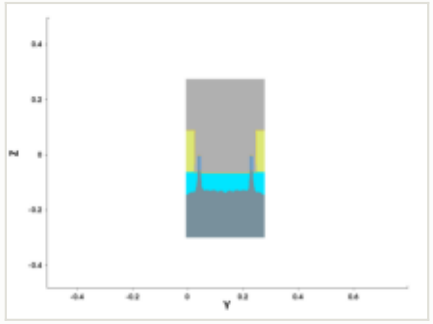

y cut at 0.211 µm

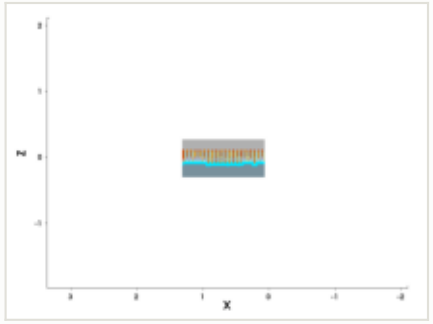

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #2010: KrF

litho_patterning · KrF

0.199	195.8	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

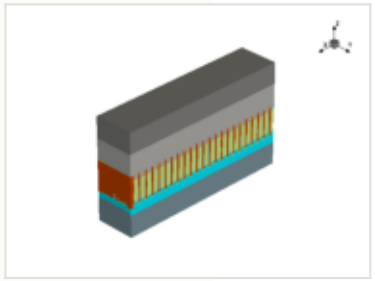

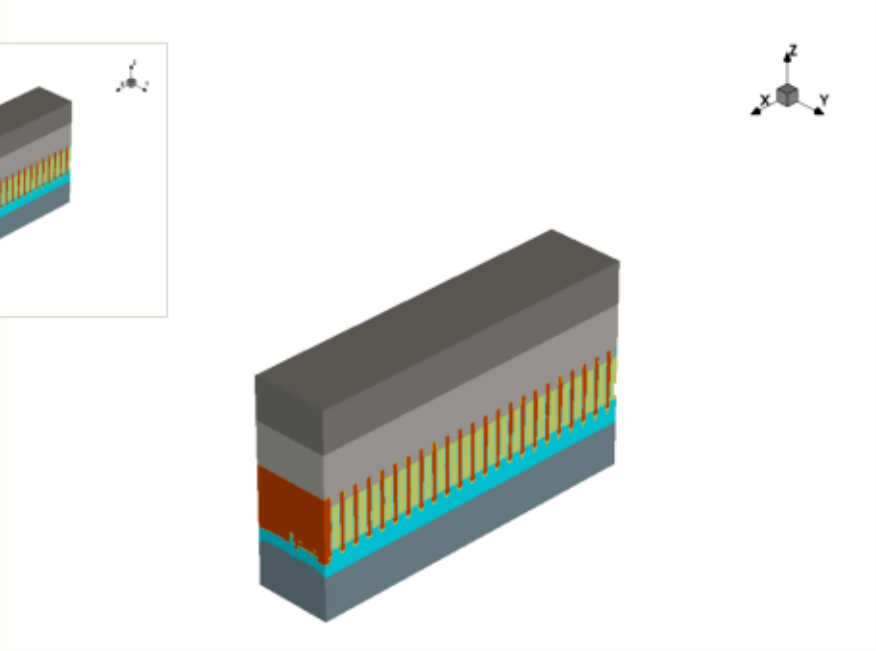

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

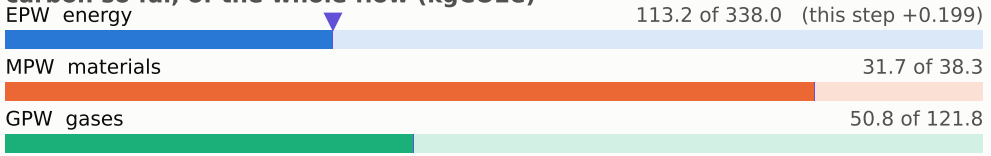

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

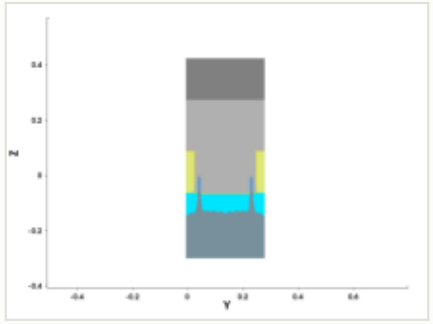

y cut at 0.211 µm

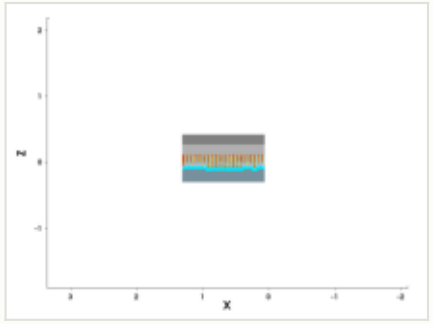

mask: layer 503:0, positive (GDSII)

steps by process area

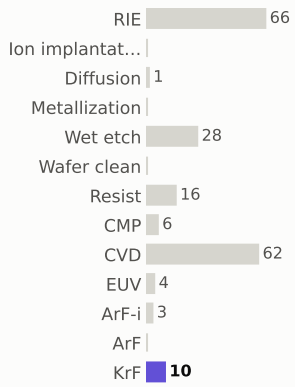

materials deposited (g)

gases emitted (g)



Step #2020: RIE

etch_ellipsoidal · RIE

1.04	196.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

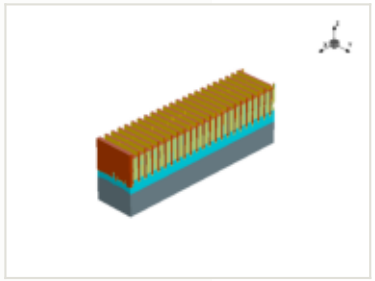

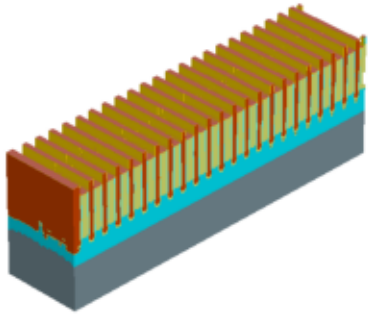

x cut at 0.677 µm

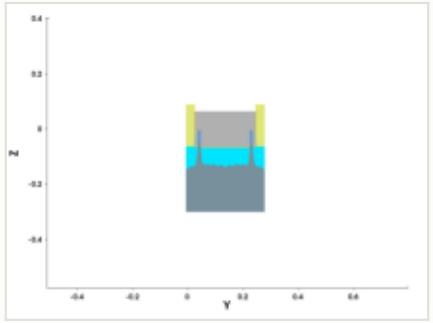

y cut at 0.211 µm

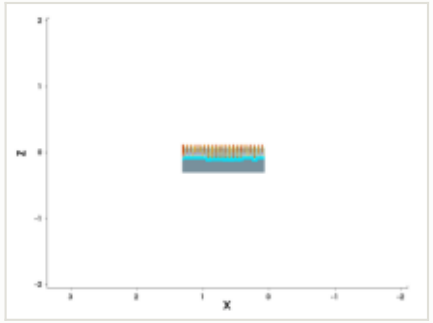

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

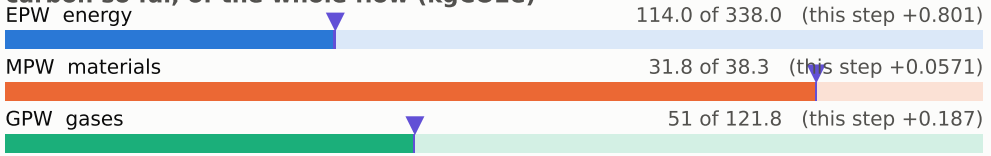

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #2030: RIE

etch_ellipsoidal · RIE

1.04	197.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

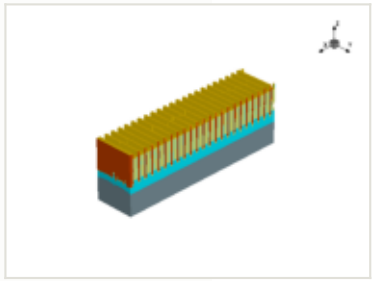

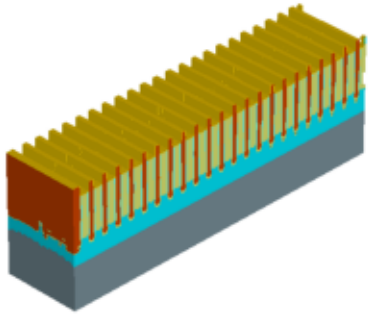

x cut at 0.677 µm

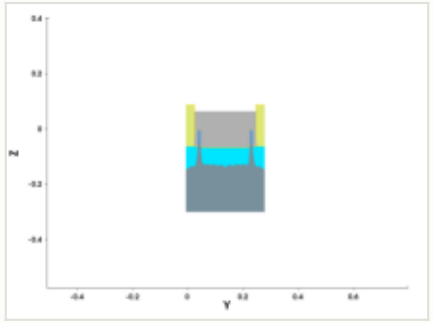

y cut at 0.211 µm

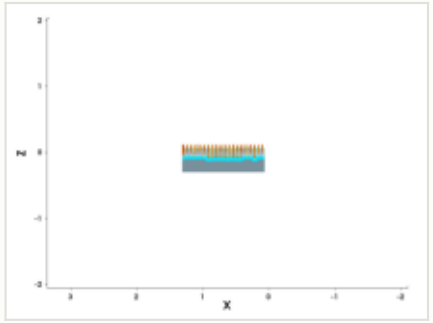

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

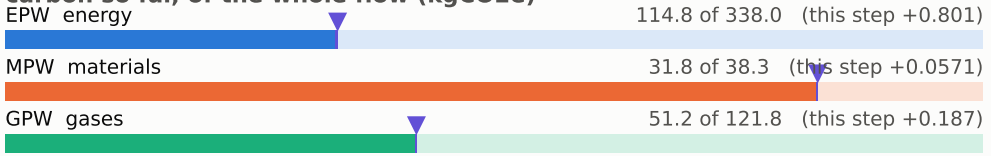

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #2040: Resist

etch_strip · Resist

0.169	198.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

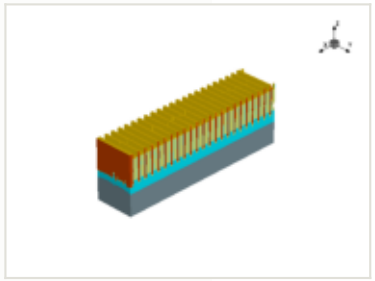

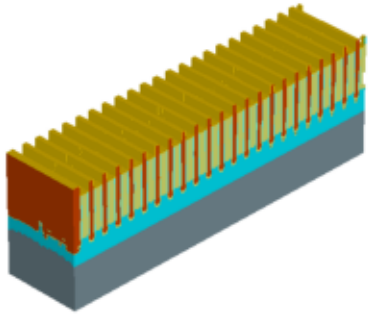

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

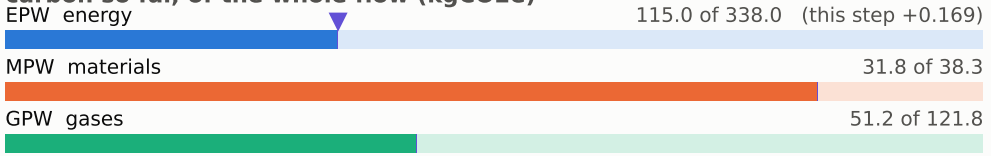

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

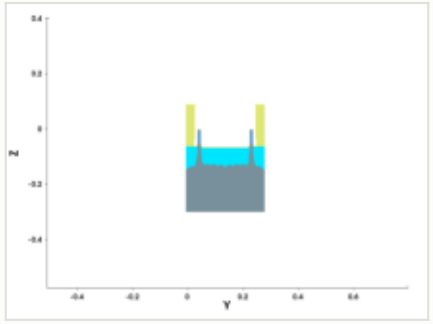

y cut at 0.211 µm

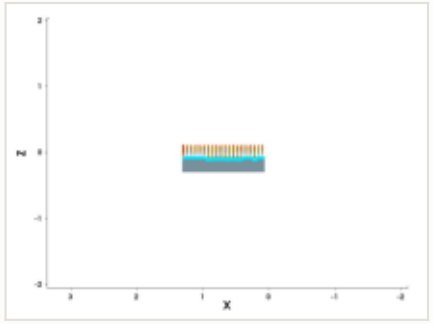

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #2050: CVD

depo_isotropic · CVD

1.31	199.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

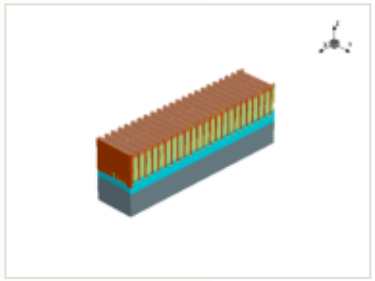

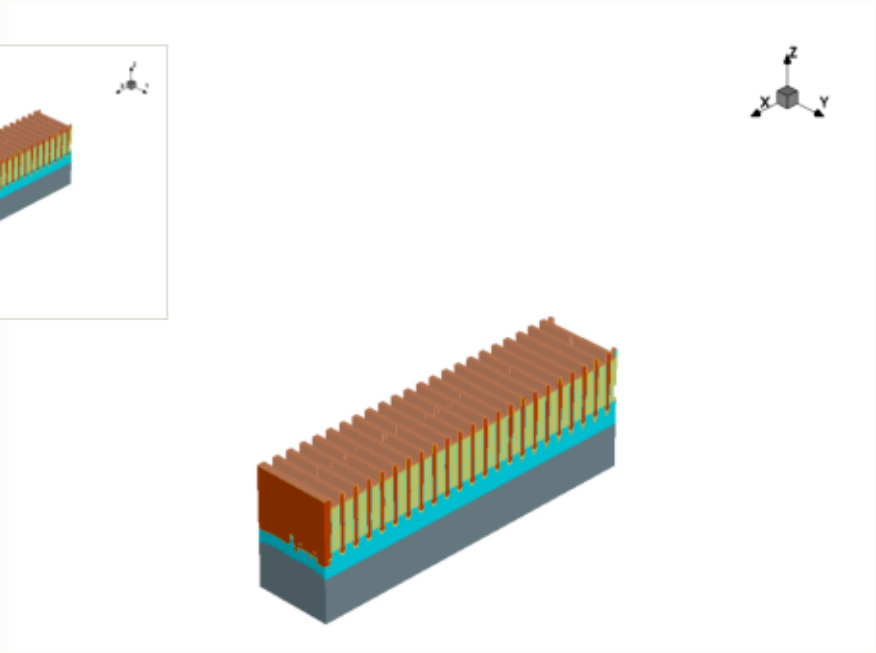

this step

process area	CVD
material	—
thickness	0.0018 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

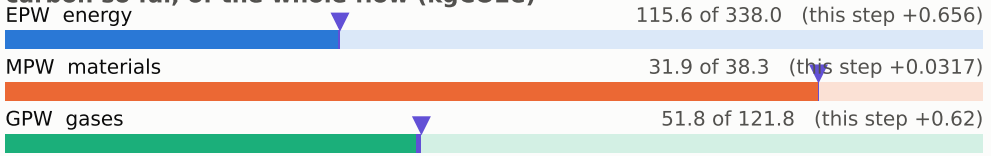

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

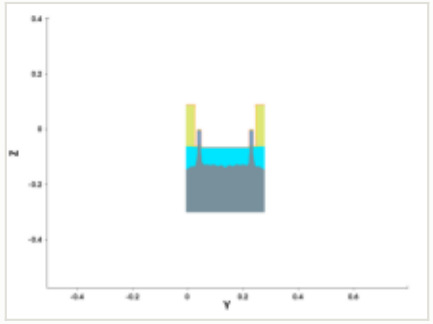

y cut at 0.211 µm

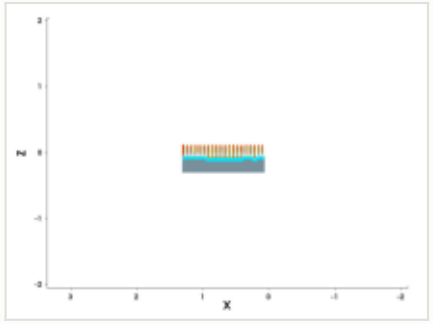

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

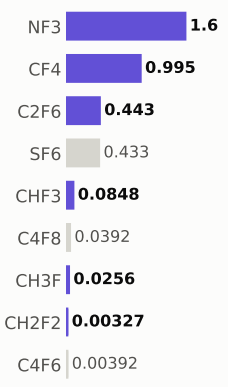

Step #2060: CVD

depo_fill · CVD

1.31	200.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

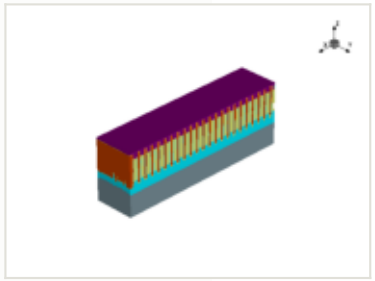

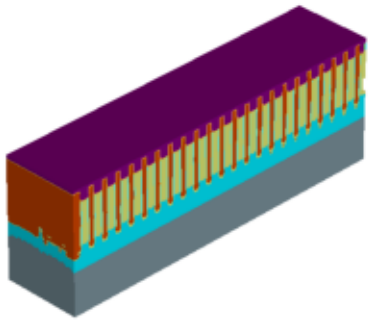

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

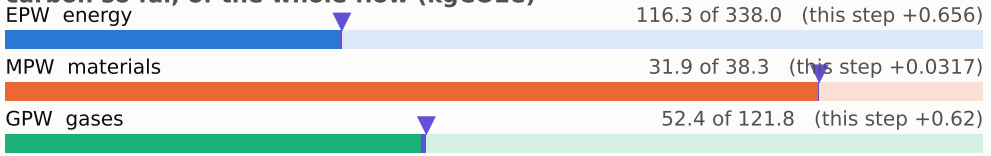

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

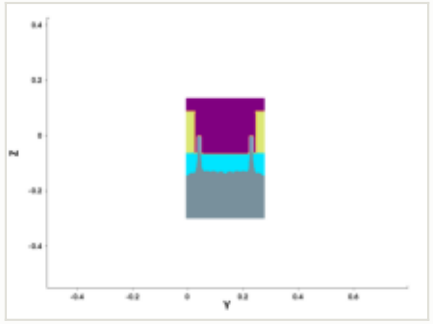

y cut at 0.211 µm

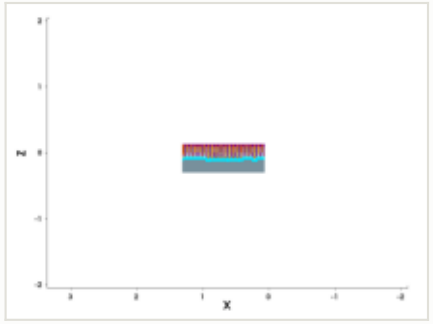

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #2070: Diffusion

interface_growth · Diffusion

0.801	201.4	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

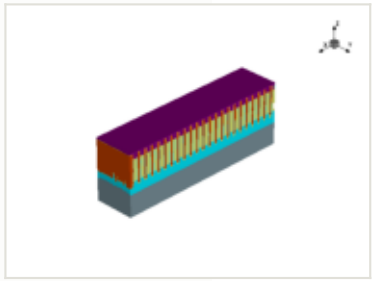

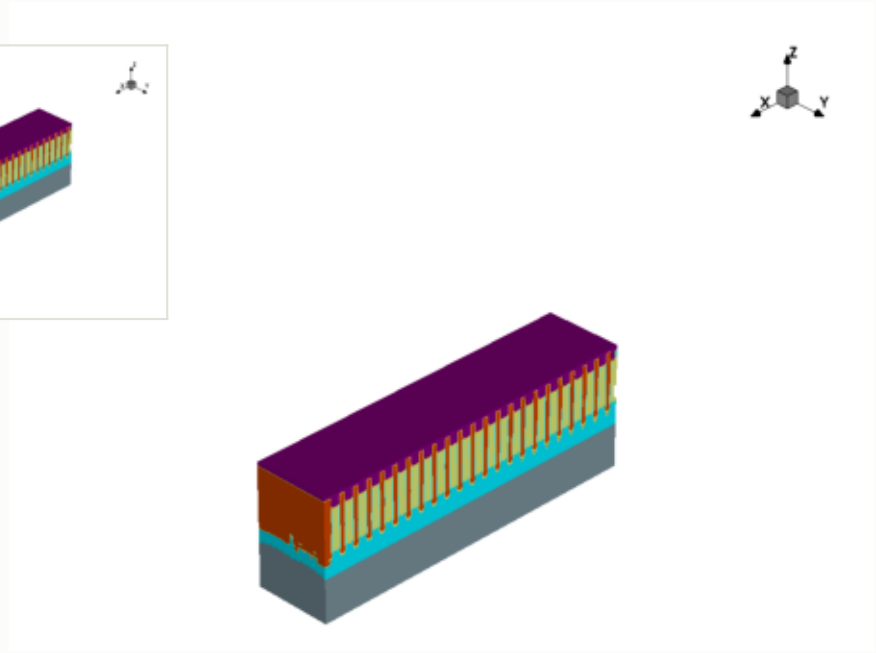

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

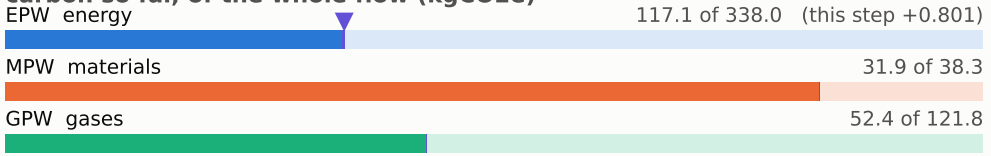

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

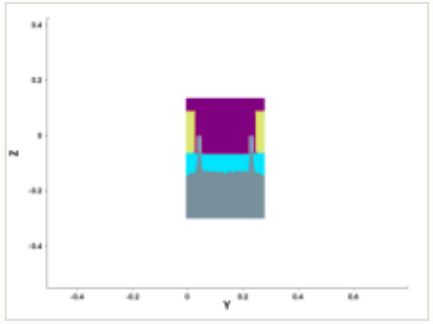

y cut at 0.211 µm

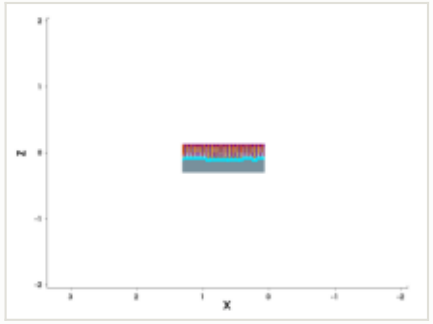

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #2080: Wet_etch

etch_isotropic · Wet_etch

0.169	201.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

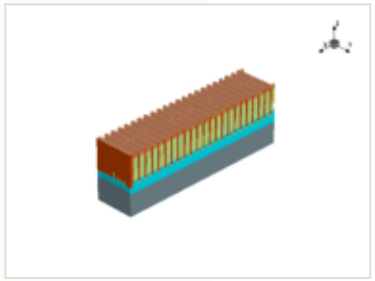

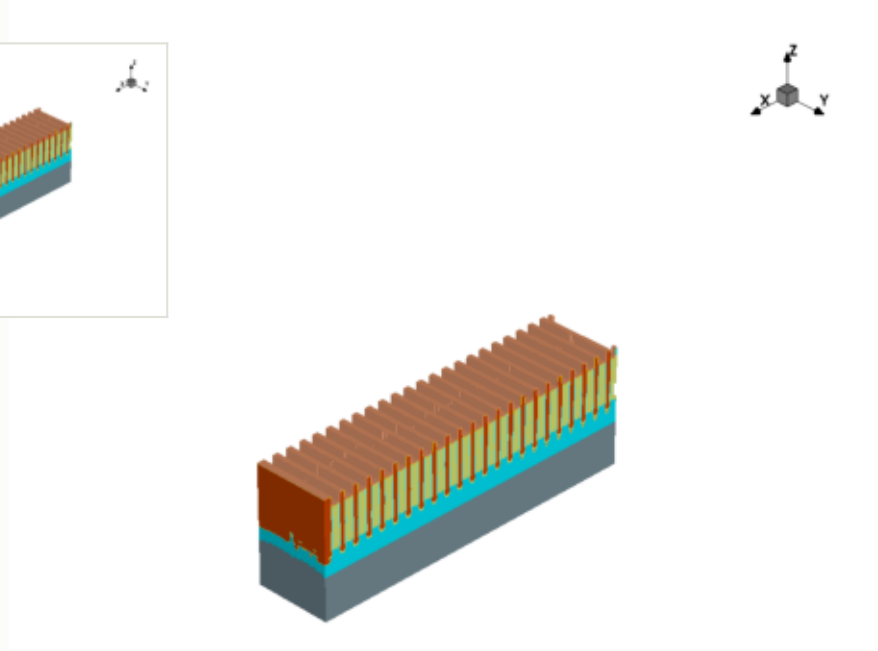

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

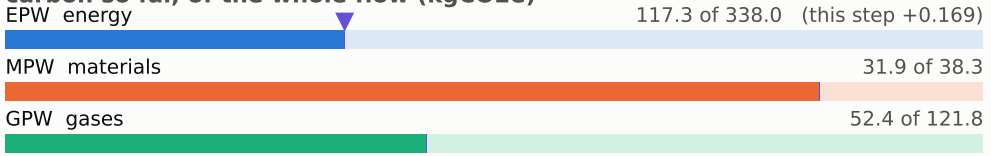

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

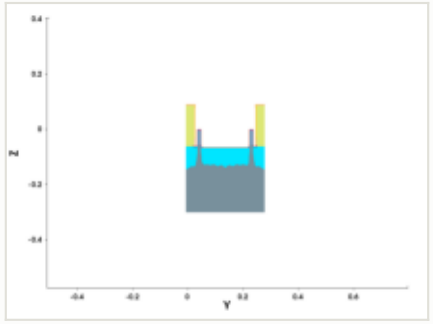

y cut at 0.211 µm

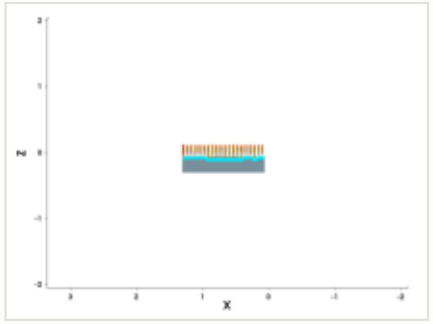

mask for this step

no mask for this step

steps by process area

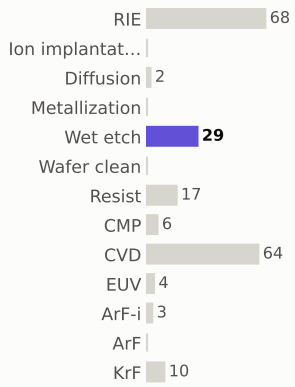

materials deposited (g)

gases emitted (g)



Step #2090: CVD

depo_fill · CVD

1.31	202.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

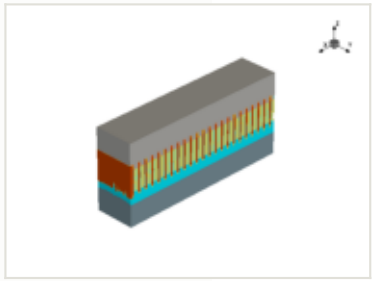

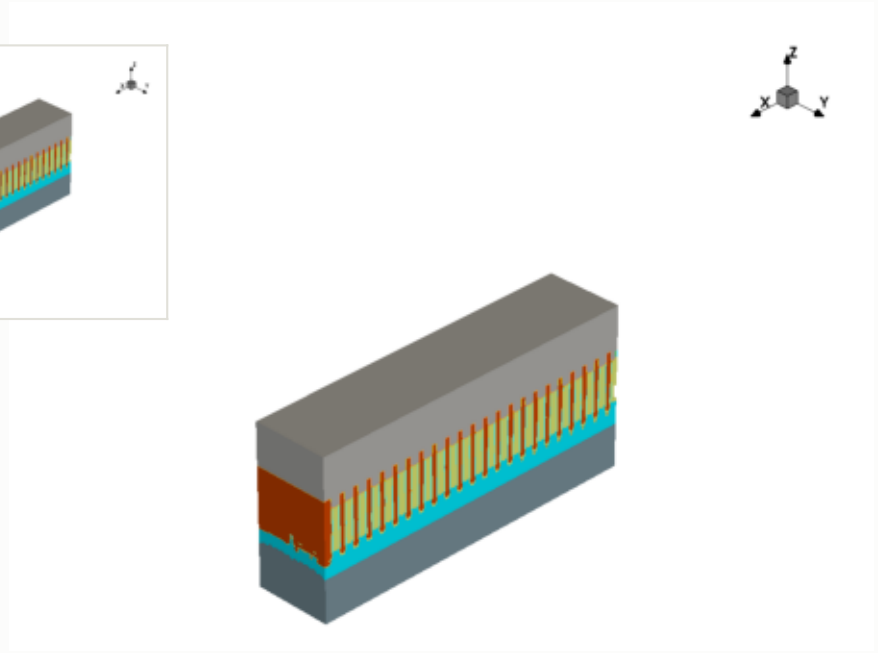

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

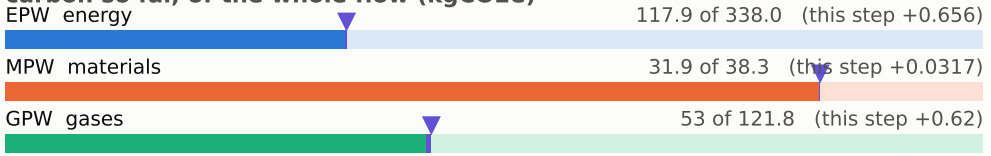

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

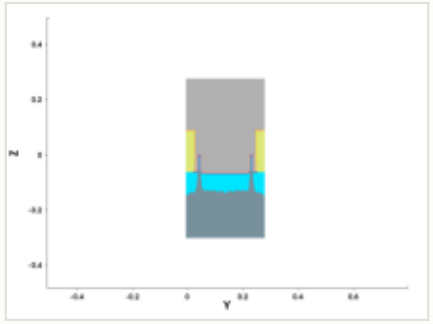

y cut at 0.211 µm

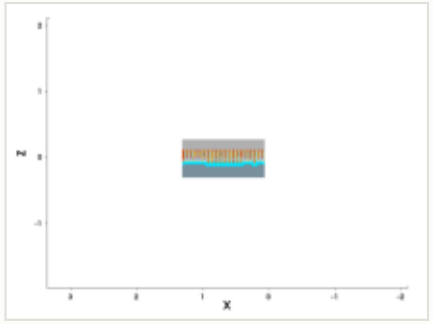

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #2100: KrF

litho_patterning · KrF

0.199	203.1	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

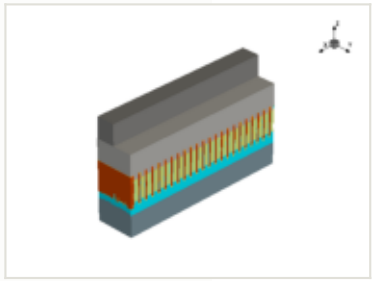

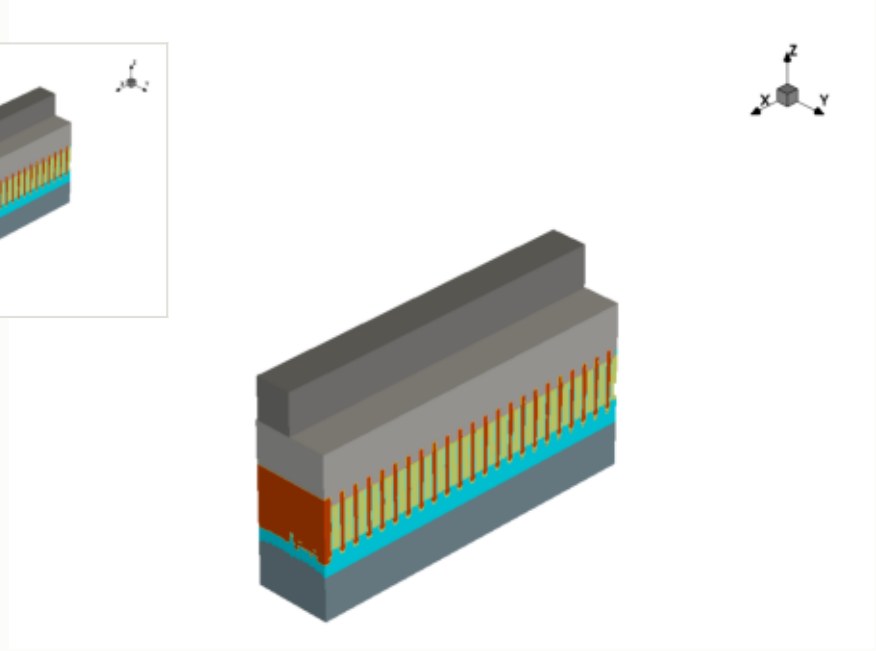

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

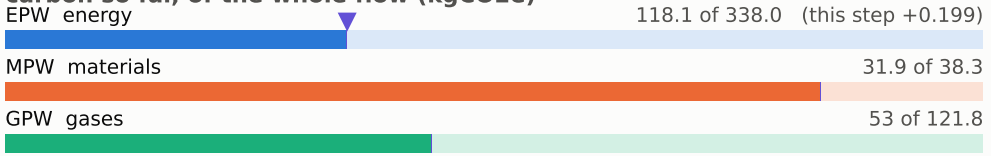

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

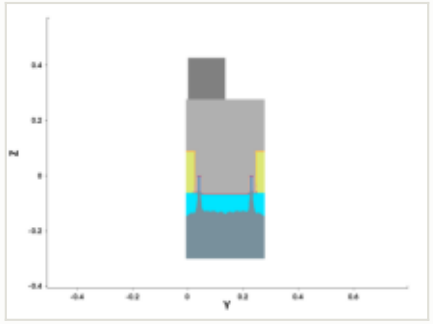

y cut at 0.211 µm

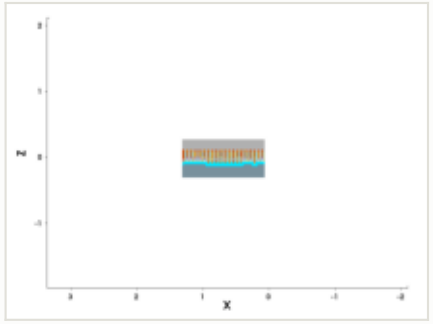

mask: layer 12:0, positive (GDSII)

steps by process area

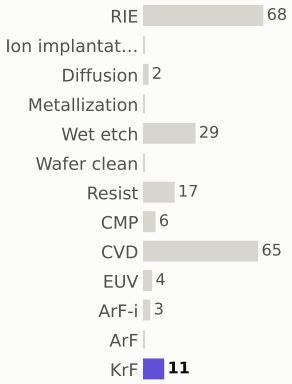

materials deposited (g)

gases emitted (g)



Step #2110: RIE

etch_ellipsoidal · RIE

1.04	204.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

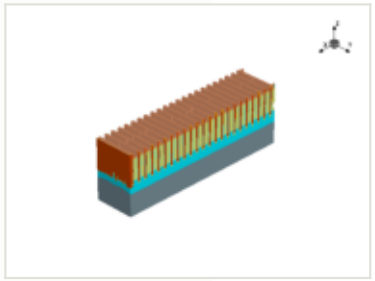

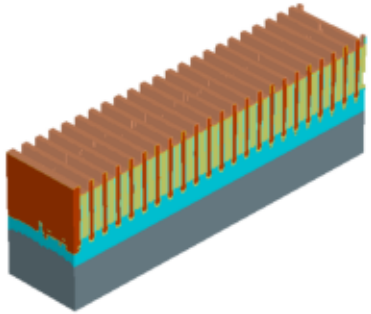

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

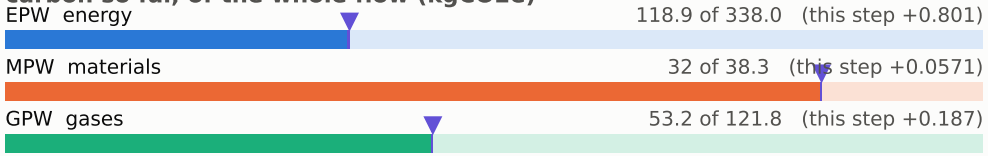

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

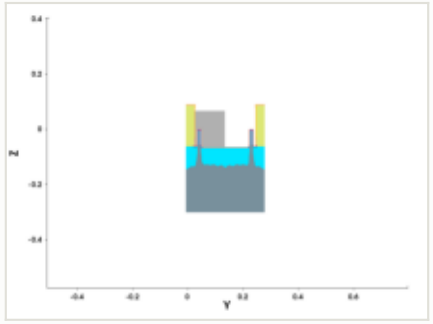

y cut at 0.211 µm

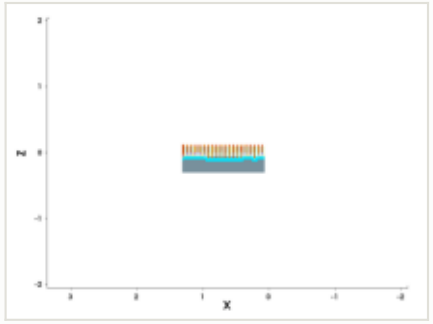

mask for this step

no mask for this step

steps by process area

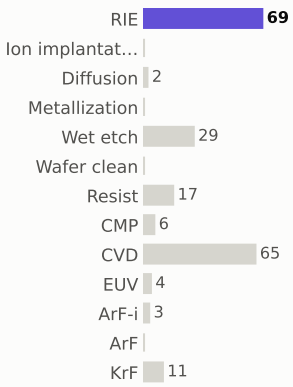

materials deposited (g)

gases emitted (g)



Step #2120: Wet_etch

etch_isotropic · Wet_etch

0.169	204.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

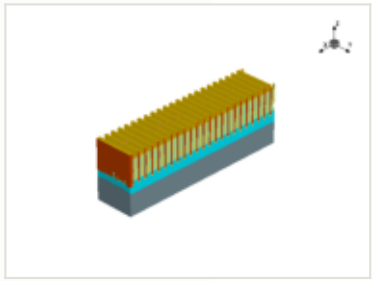

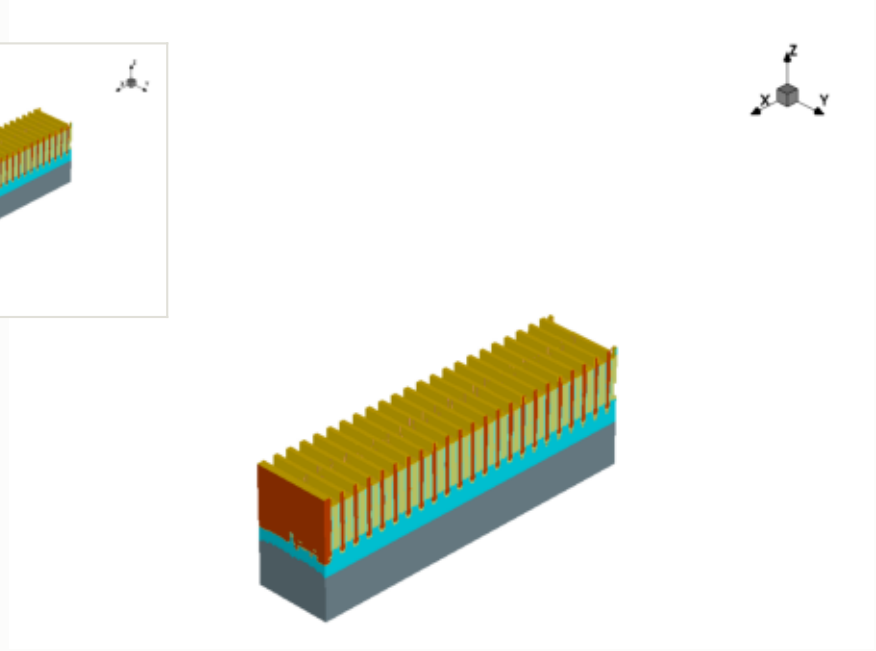

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

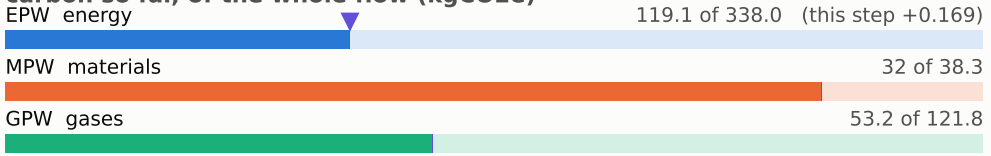

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

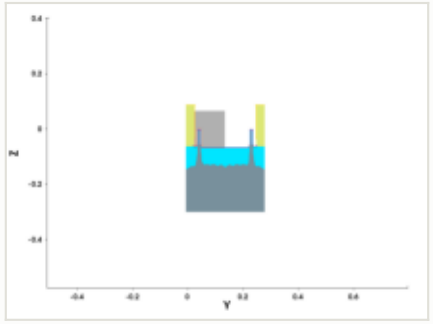

y cut at 0.211 µm

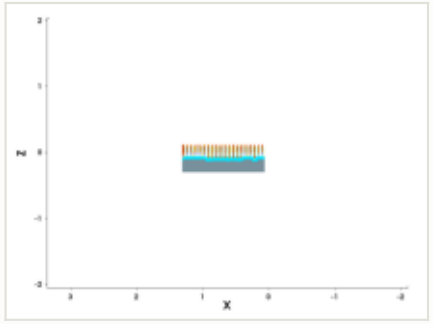

mask for this step

no mask for this step

steps by process area

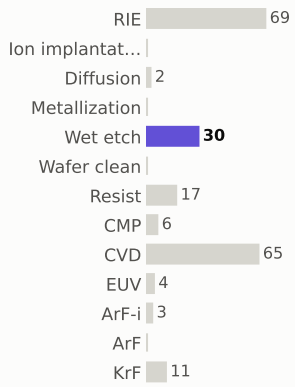

materials deposited (g)

gases emitted (g)



Step #2130: Resist

etch_strip · Resist

0.169	204.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

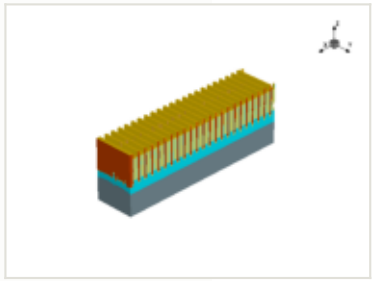

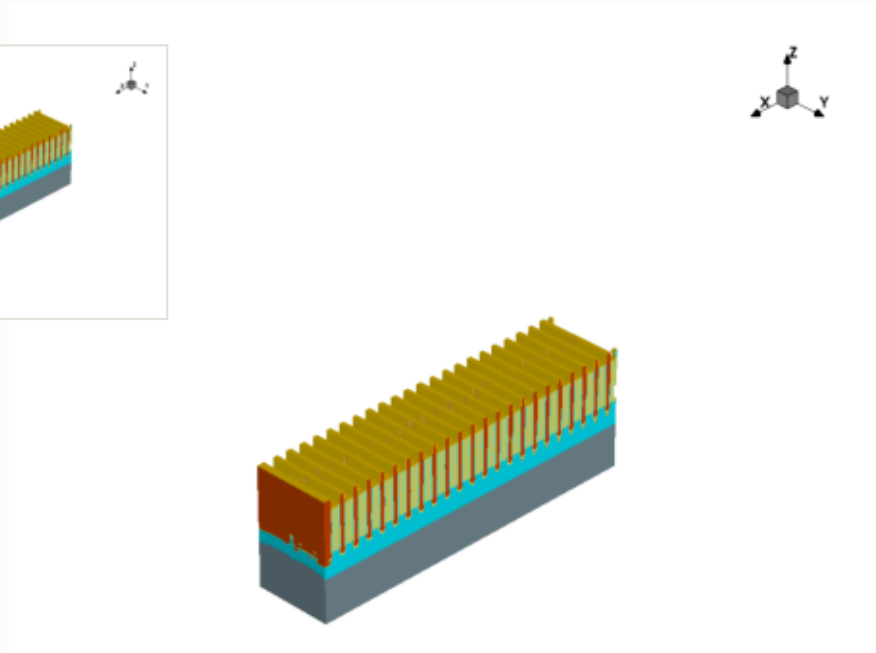

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

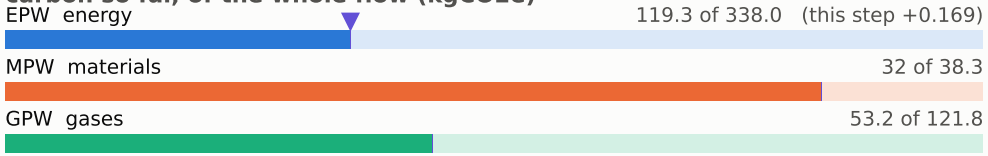

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

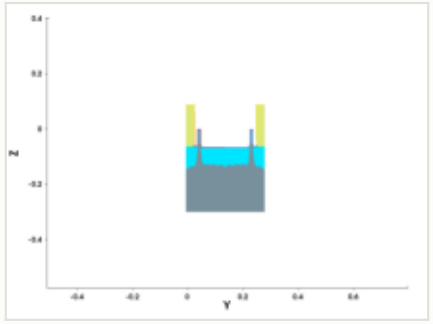

y cut at 0.211 µm

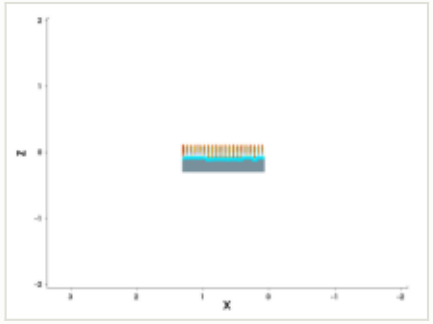

mask for this step

no mask for this step

steps by process area

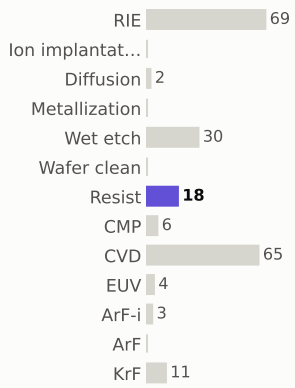

materials deposited (g)

gases emitted (g)



Step #2140: CVD

depo_isotropic · CVD

1.31	205.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

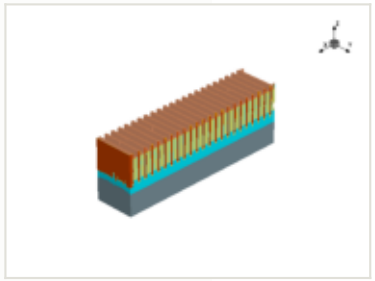

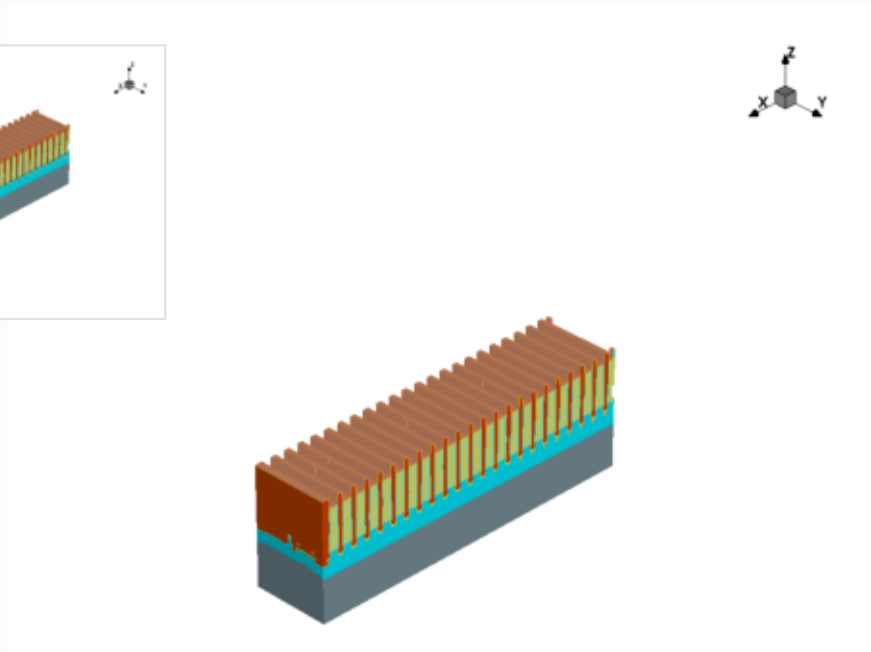

this step

process area	CVD
material	—
thickness	0.0018 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

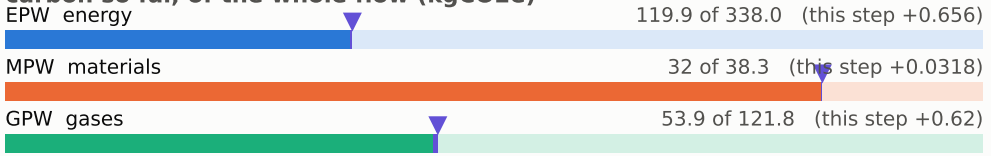

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

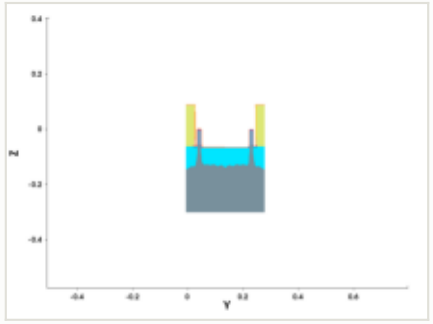

y cut at 0.211 µm

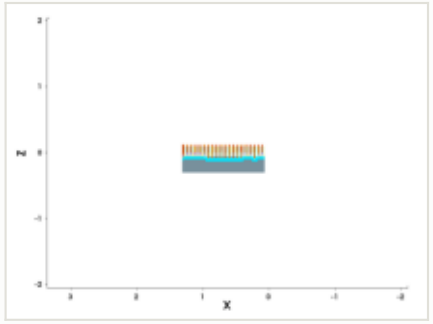

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #2150: CVD

depo_fill · CVD

1.31	207.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

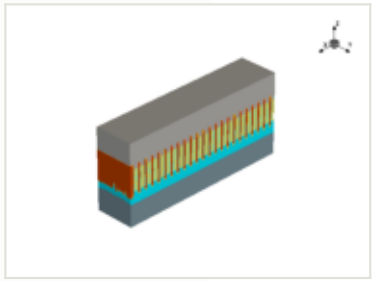

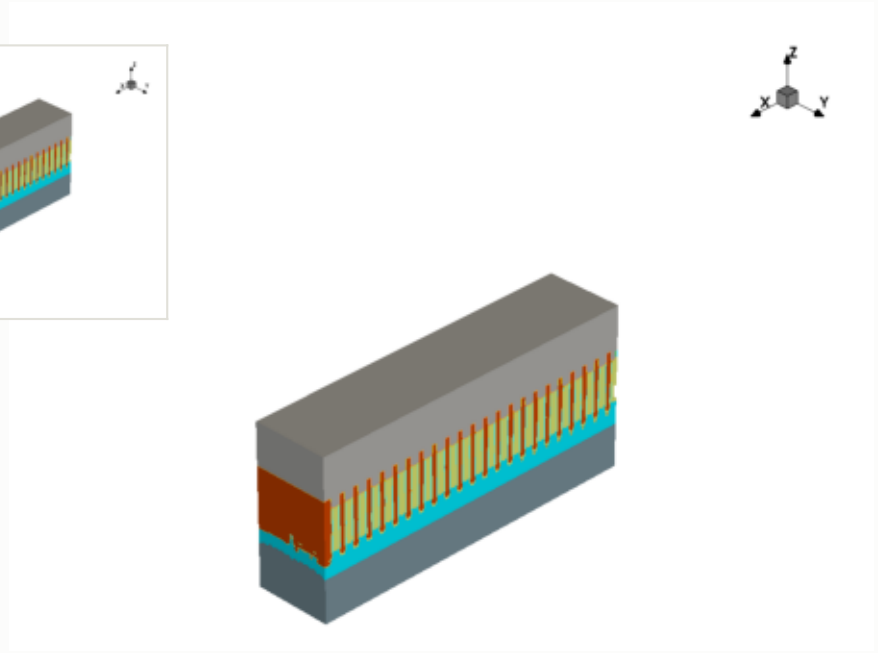

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

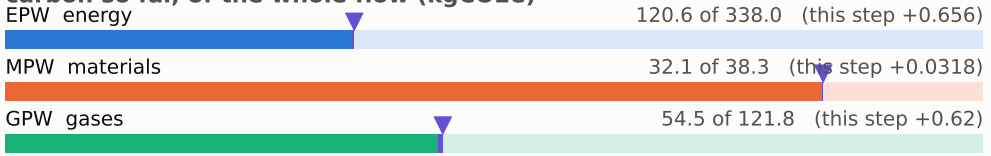

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

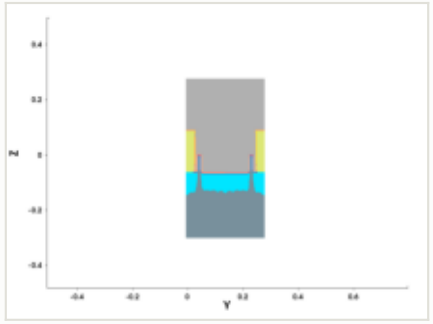

y cut at 0.211 µm

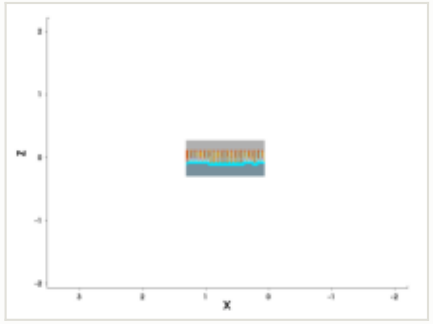

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

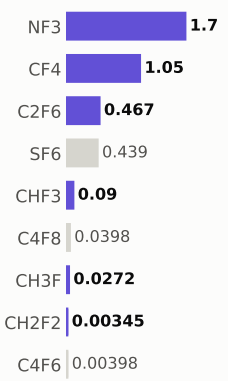

Step #2160: KrF

litho_patterning · KrF

0.199	207.3	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

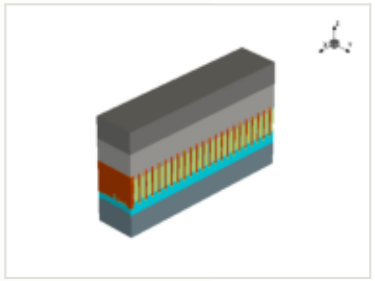

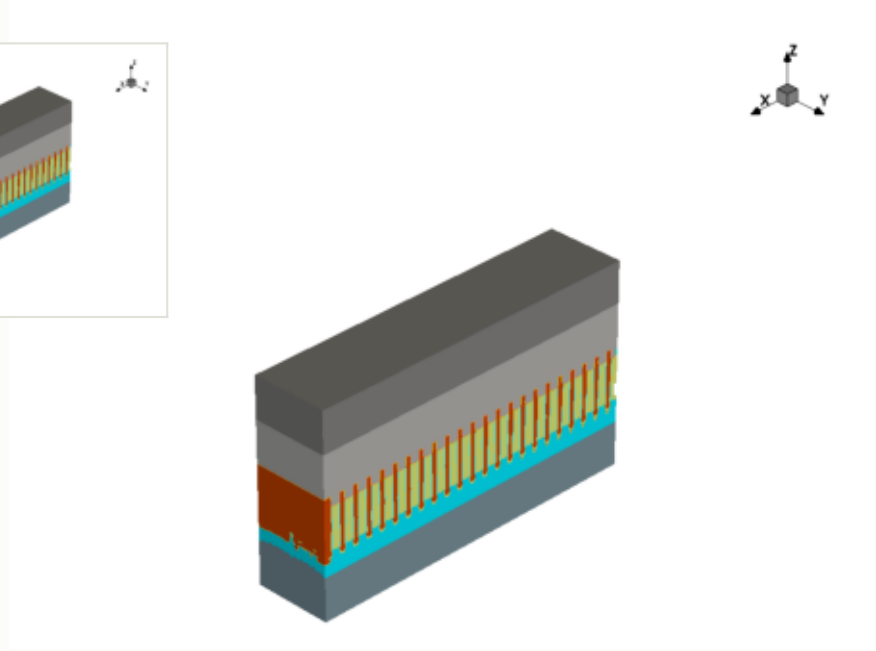

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

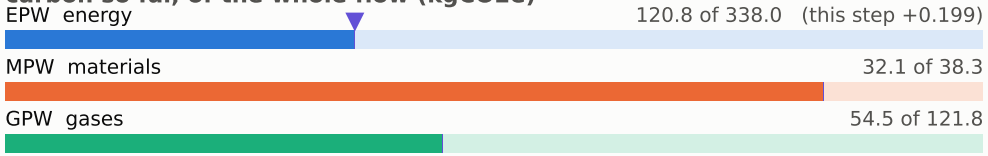

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

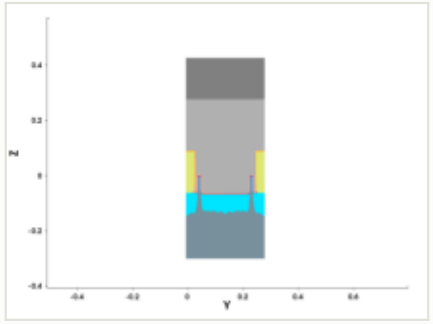

y cut at 0.211 µm

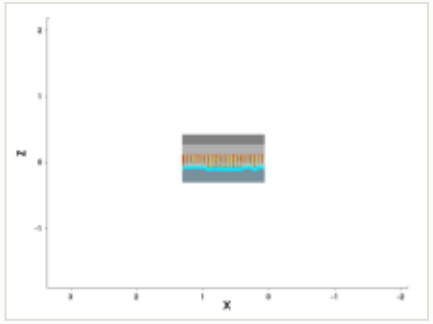

mask: layer 503:0, positive (GDSII)

steps by process area

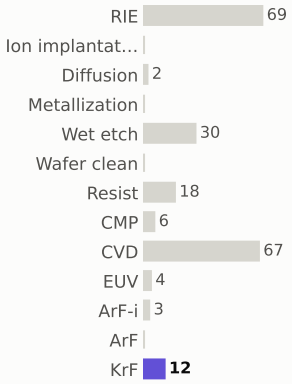

materials deposited (g)

gases emitted (g)



Step #2170: RIE

etch_ellipsoidal · RIE

1.04	208.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

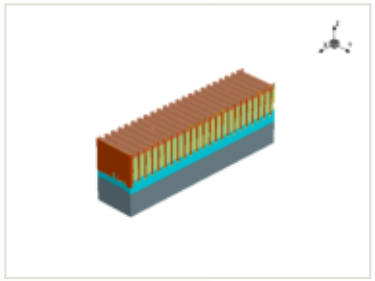

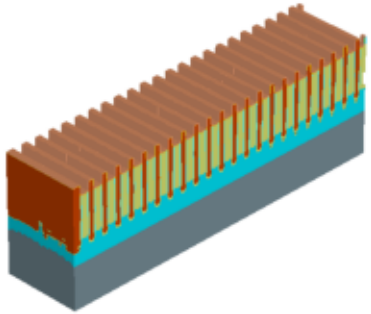

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

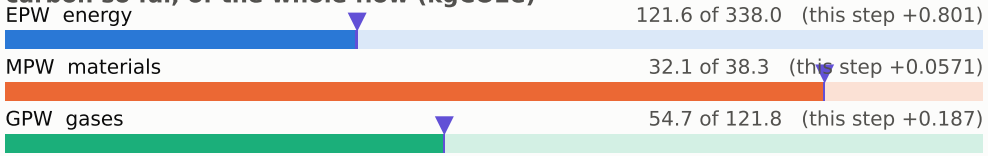

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

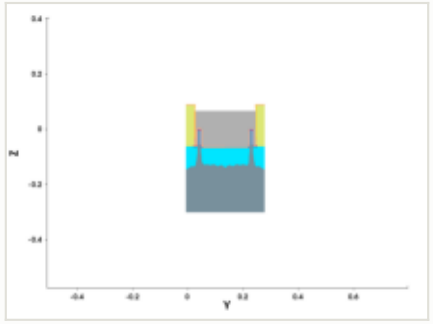

y cut at 0.211 µm

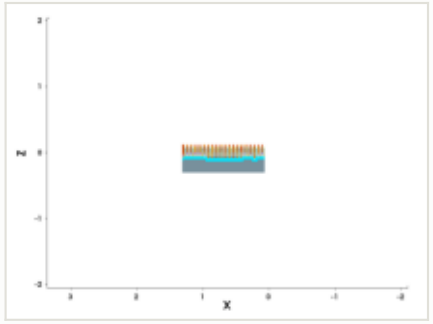

mask for this step

no mask for this step

steps by process area

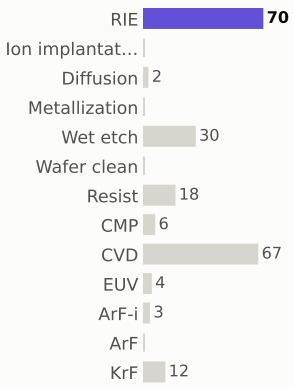

materials deposited (g)

gases emitted (g)



Step #2180: Wet_etch

etch_isotropic · Wet_etch

0.169	208.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

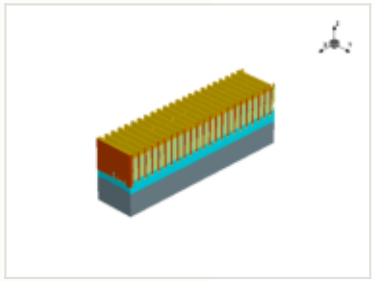

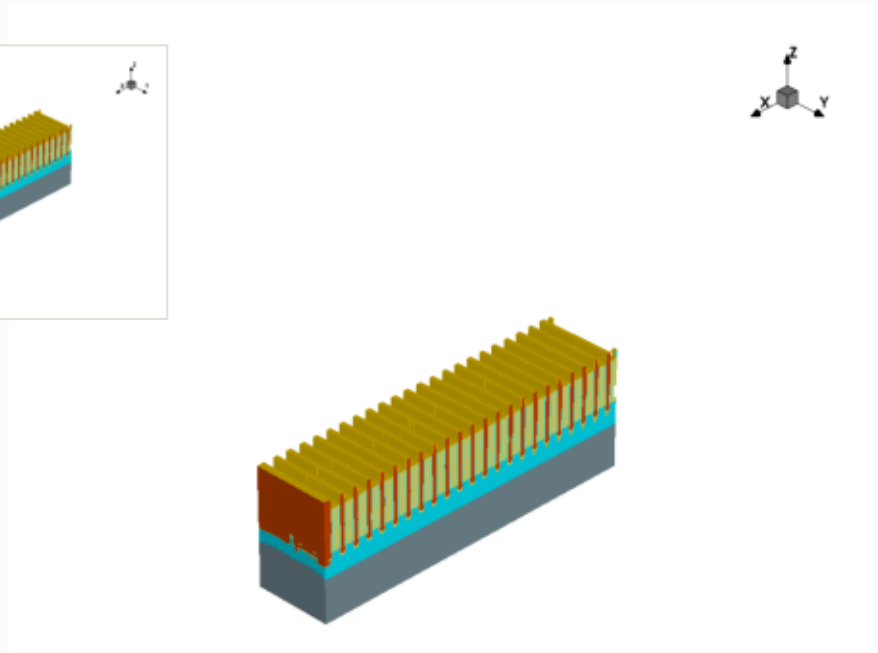

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

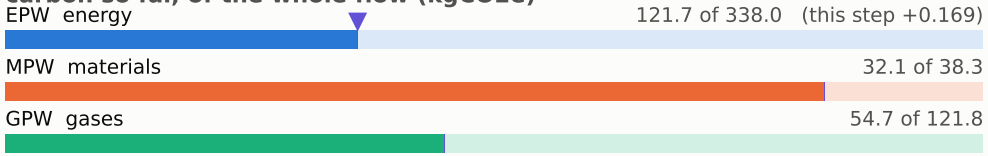

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

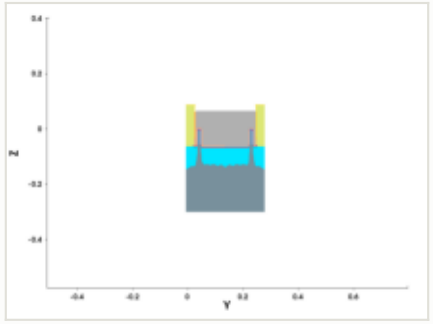

y cut at 0.211 µm

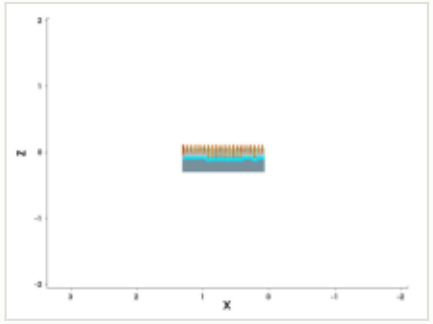

mask for this step

no mask for this step

steps by process area

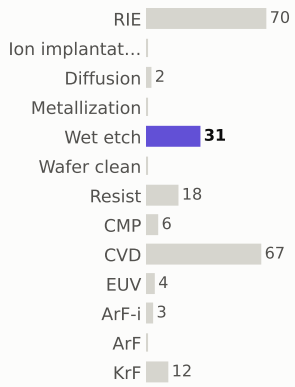

materials deposited (g)

gases emitted (g)



Step #2190: Resist

etch_strip · Resist

0.169	208.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

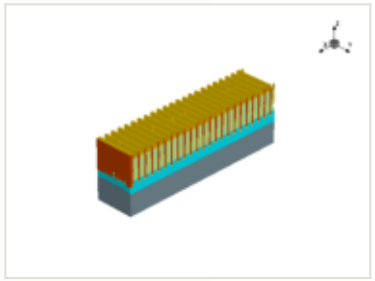

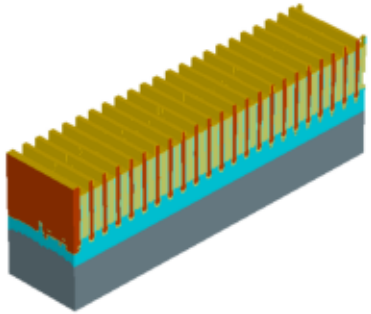

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

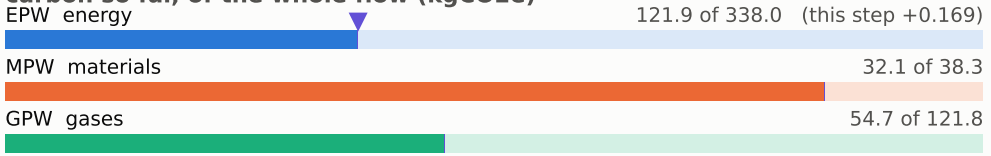

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

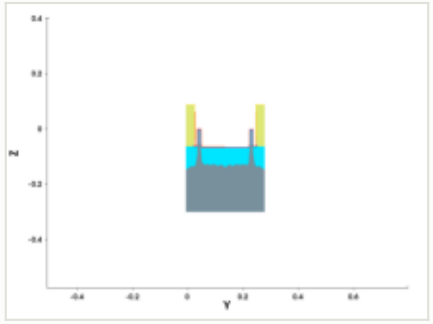

y cut at 0.211 µm

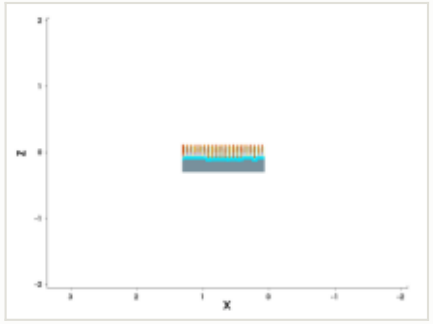

mask for this step

no mask for this step

steps by process area

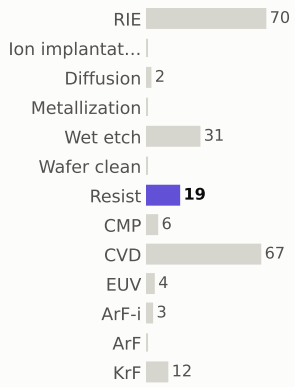

materials deposited (g)

gases emitted (g)



Step #2200: CVD

depo_isotropic · CVD

1.31	210.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

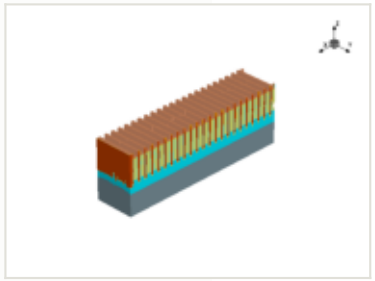

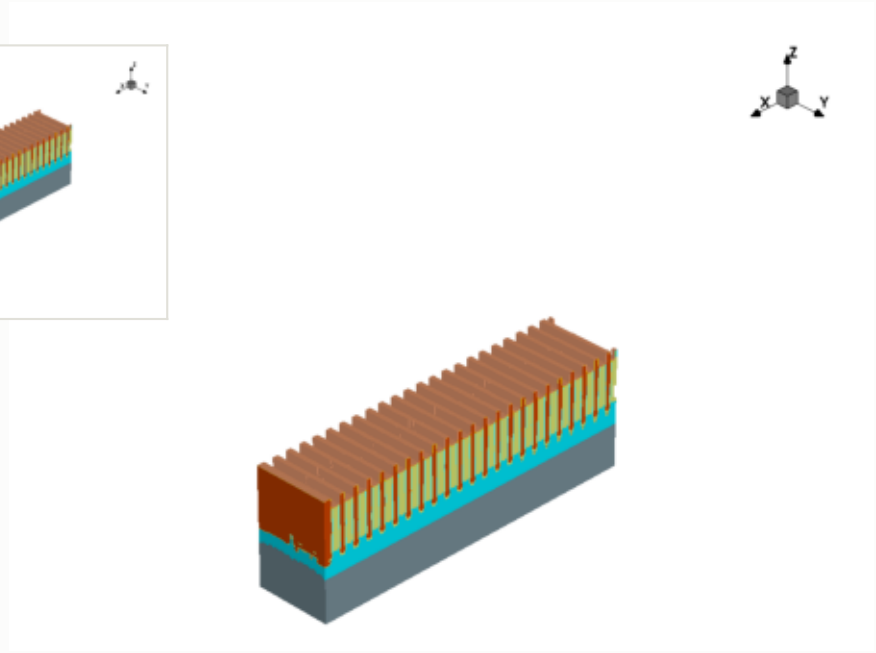

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.0009 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

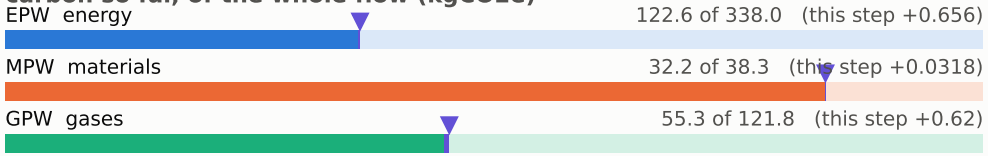

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

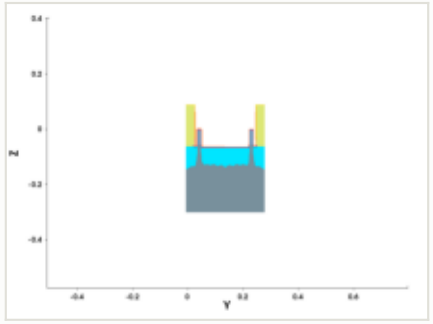

y cut at 0.211 µm

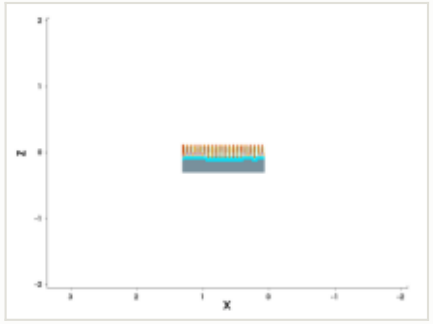

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #2210: CVD

depo_fill · CVD

1.31	211.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

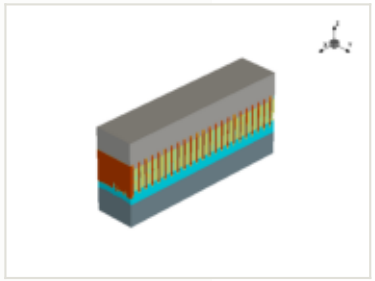

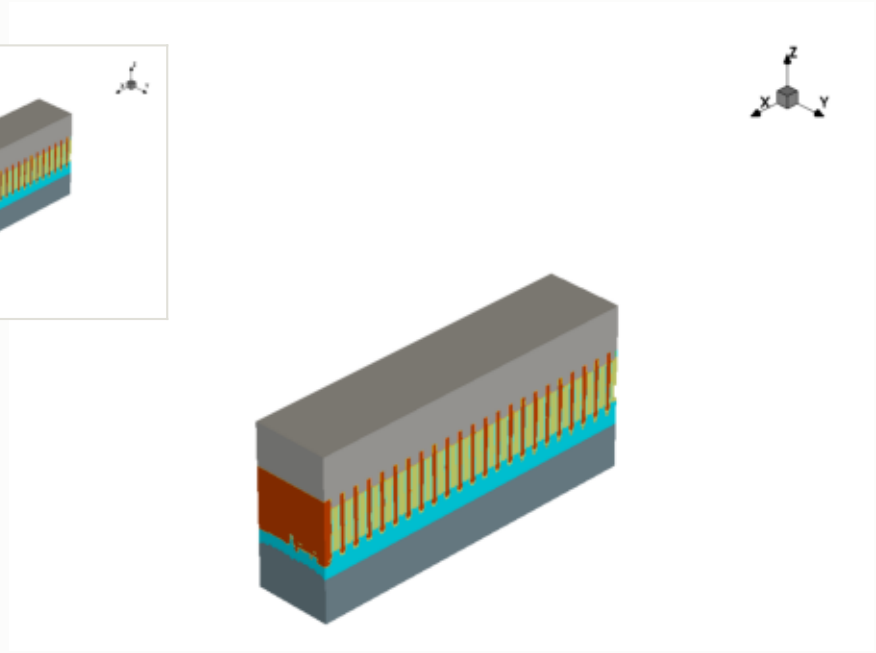

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

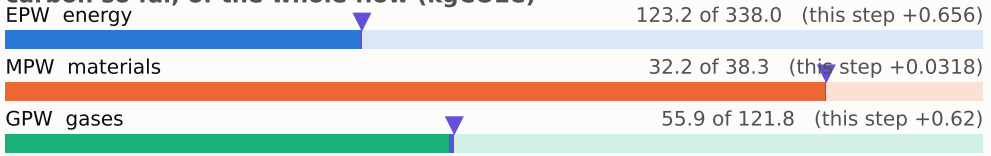

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

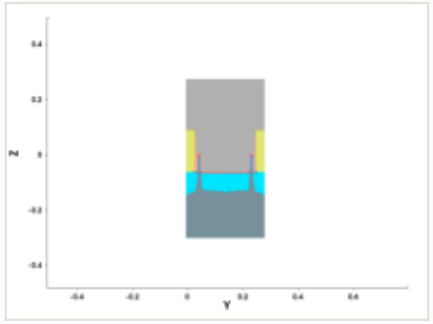

y cut at 0.211 µm

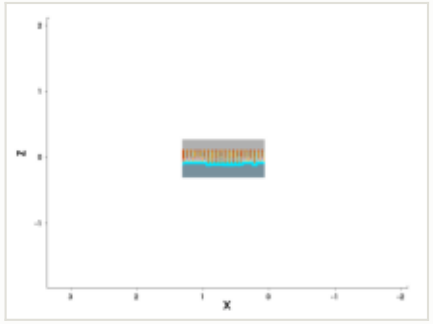

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #2220: KrF

litho_patterning · KrF

0.199	211.5	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

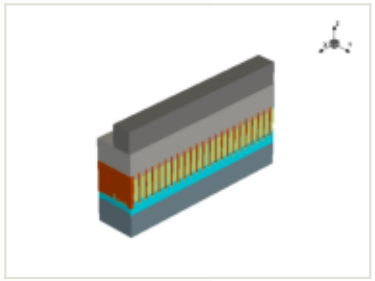

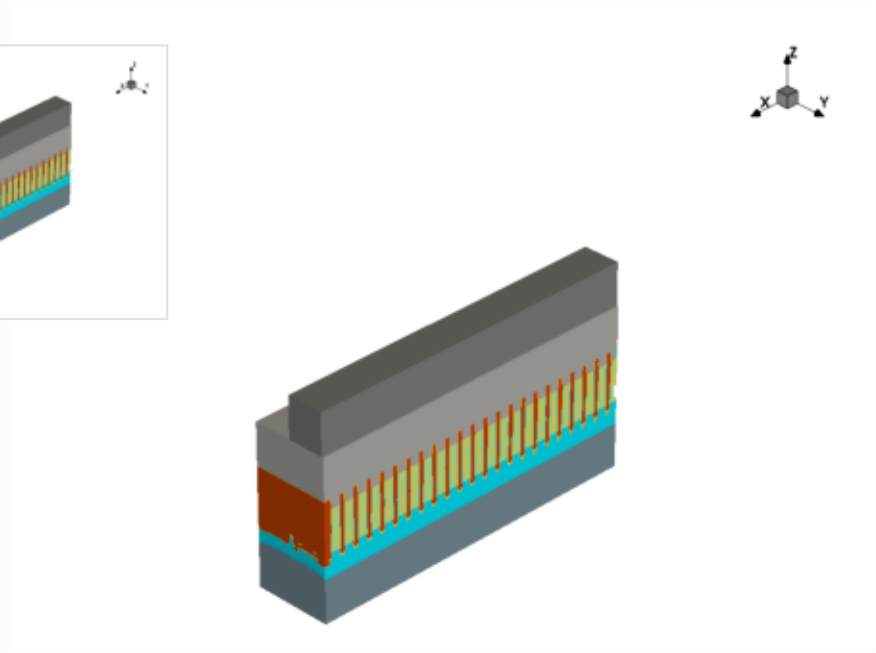

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

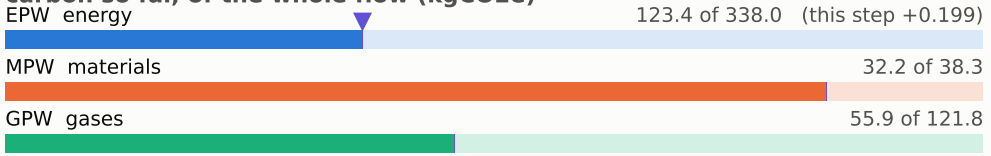

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

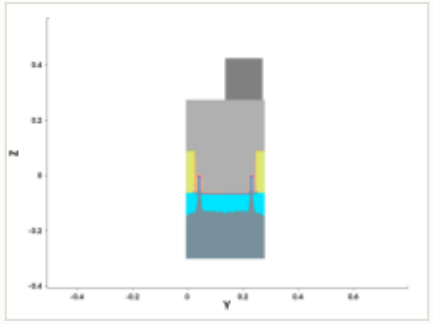

y cut at 0.211 µm

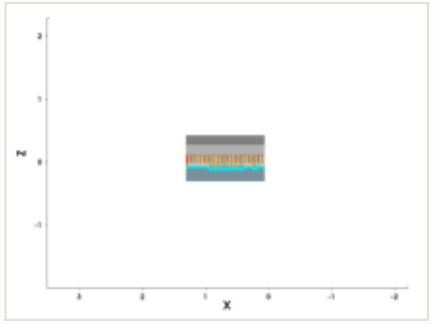

mask: layer 1:0, positive (GDSII)

steps by process area

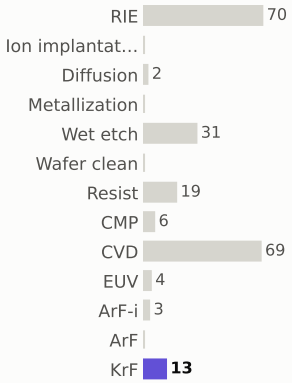

materials deposited (g)

gases emitted (g)



Step #2230: RIE

etch_ellipsoidal · RIE

1.04	212.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

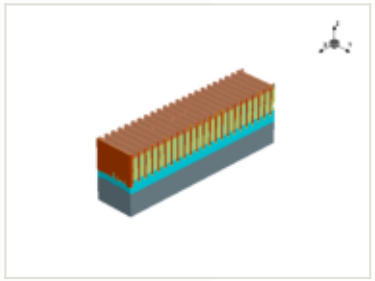

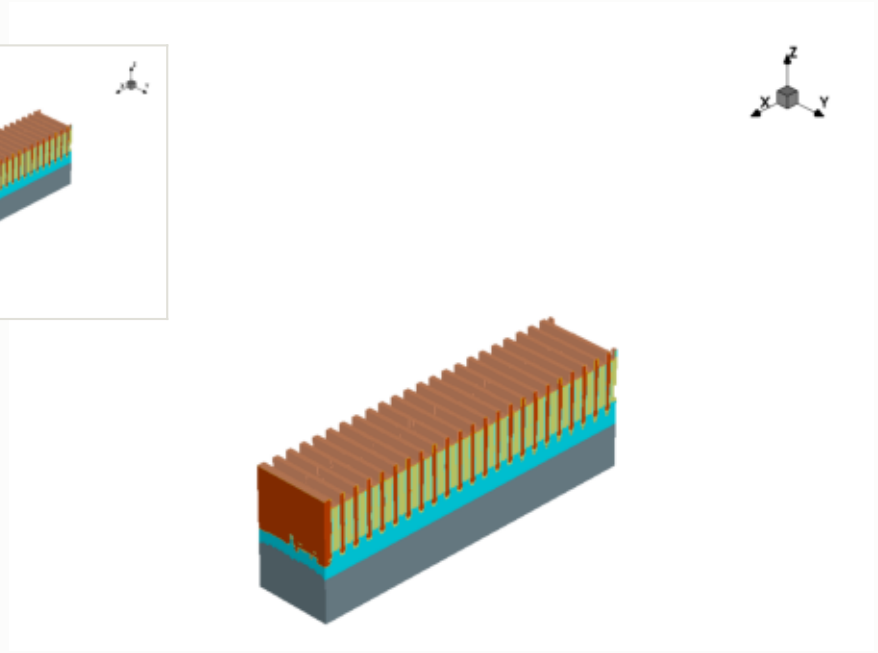

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

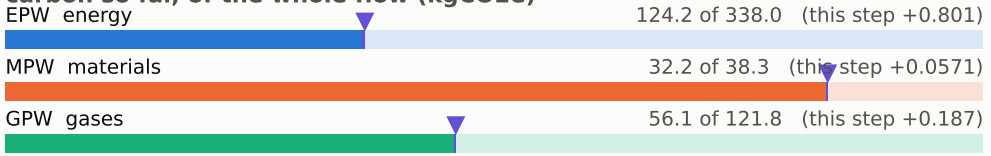

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

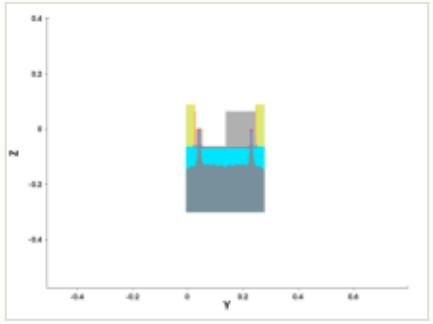

y cut at 0.211 µm

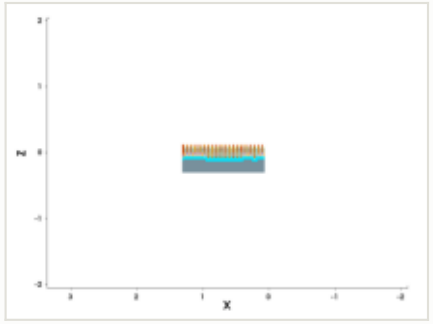

mask for this step

no mask for this step

steps by process area

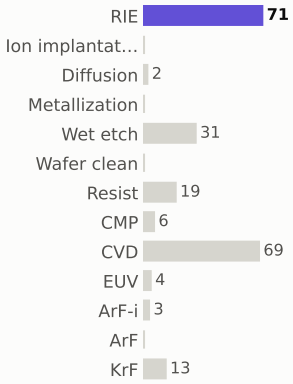

materials deposited (g)

gases emitted (g)



Step #2240: Wet_etch

etch_isotropic · Wet_etch

0.169	212.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

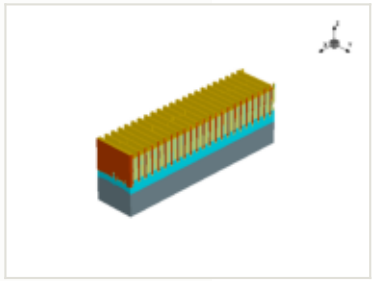

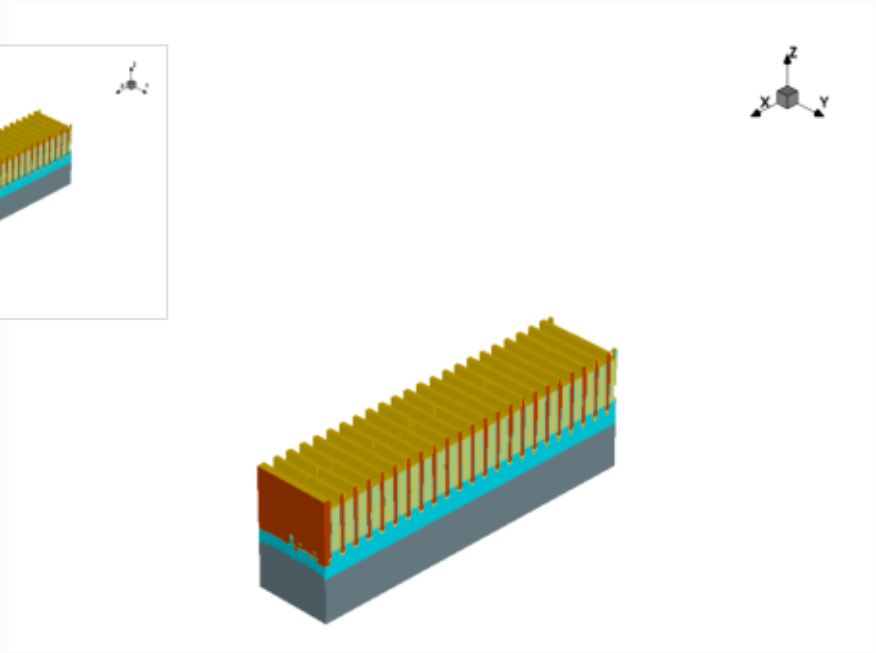

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

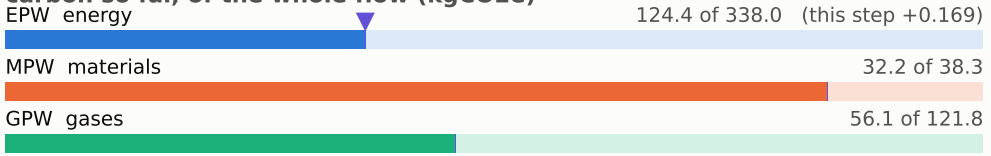

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

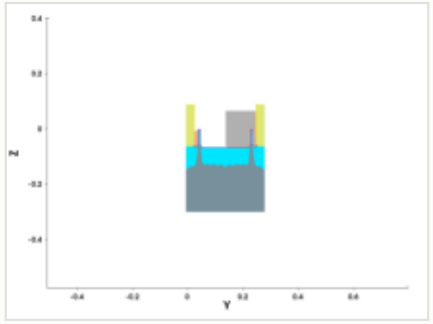

y cut at 0.211 µm

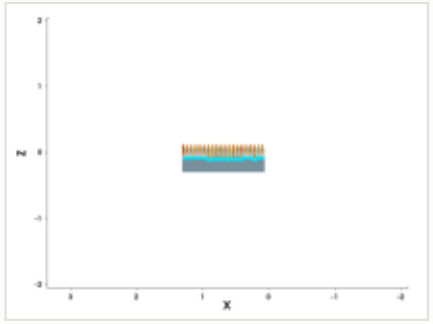

mask for this step

no mask for this step

steps by process area

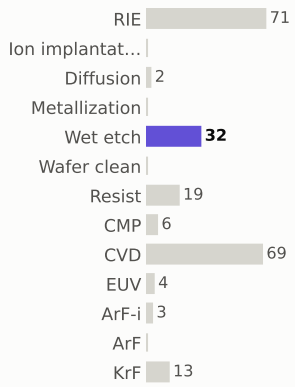

materials deposited (g)

gases emitted (g)



Step #2250: Resist

etch_strip · Resist

0.169	212.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

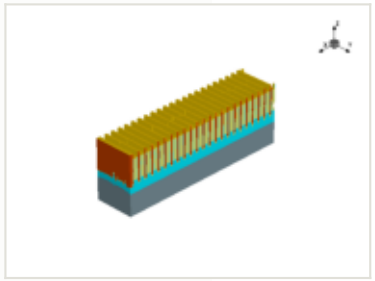

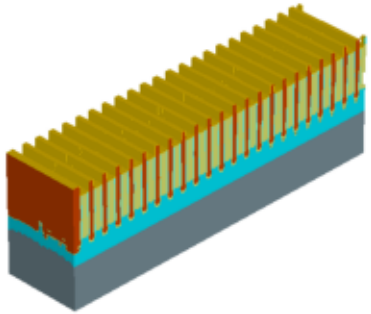

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

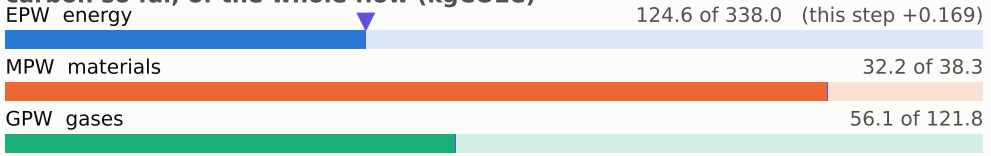

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

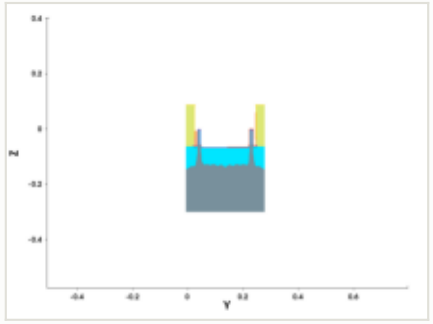

y cut at 0.211 µm

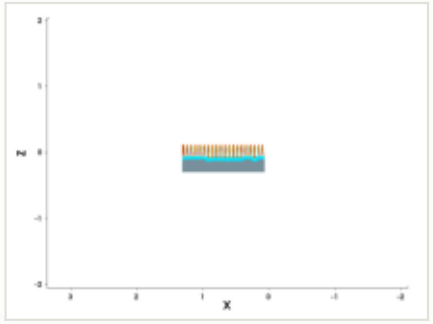

mask for this step

no mask for this step

steps by process area

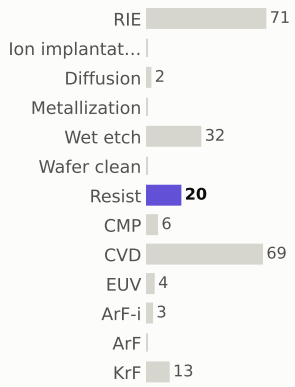

materials deposited (g)

gases emitted (g)



Step #2260: CVD

depo_isotropic · CVD

1.31	214.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

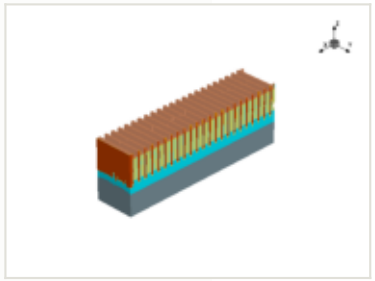

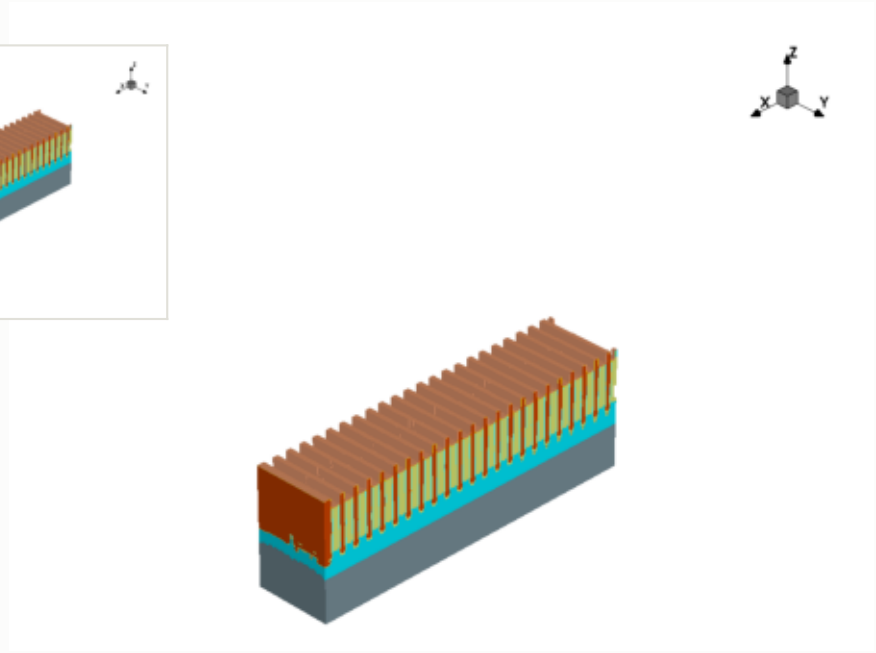

x cut at 0.677 µm

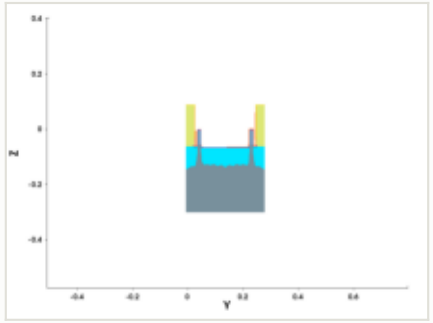

y cut at 0.211 µm

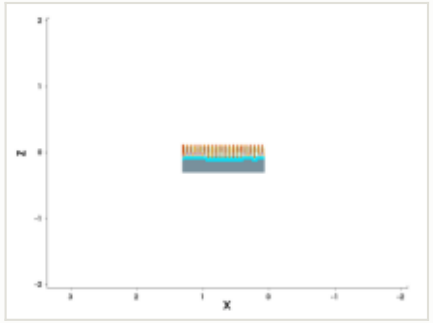

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0009 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

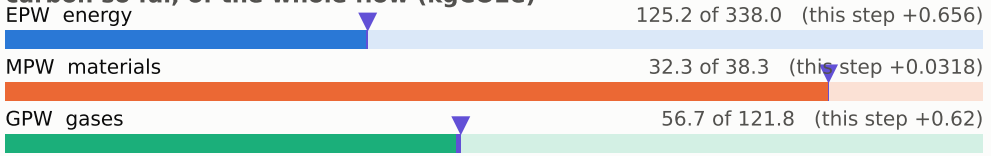

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

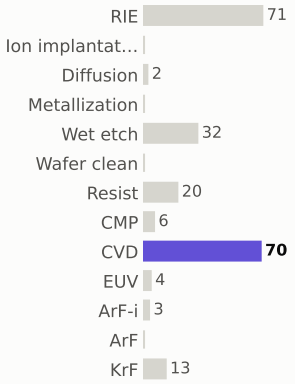

materials deposited (g)

gases emitted (g)



Step #2270: CVD

depo_fill · CVD

1.31	215.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

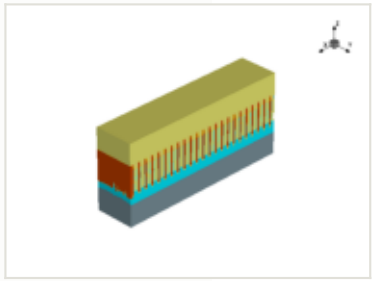

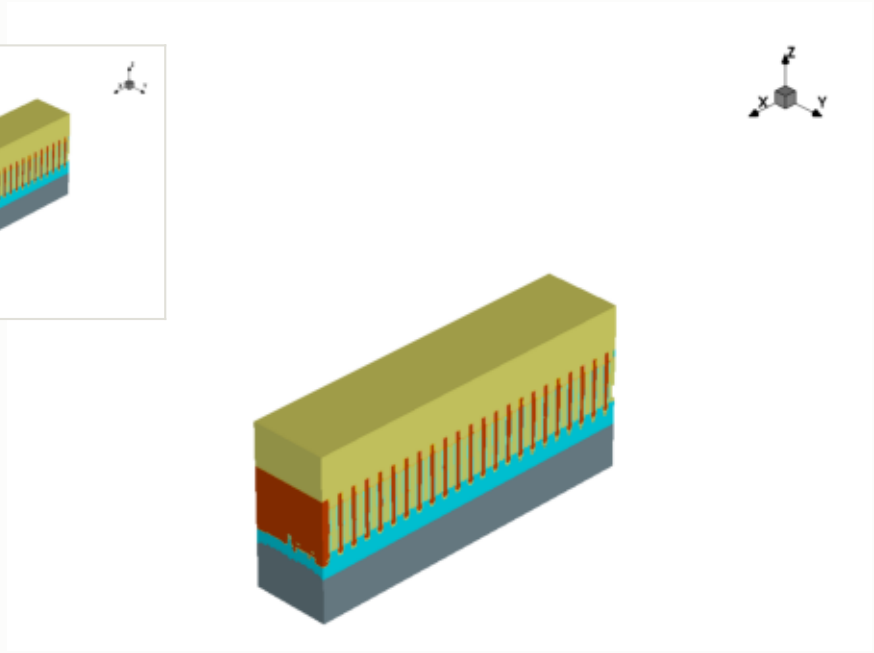

x cut at 0.677 µm

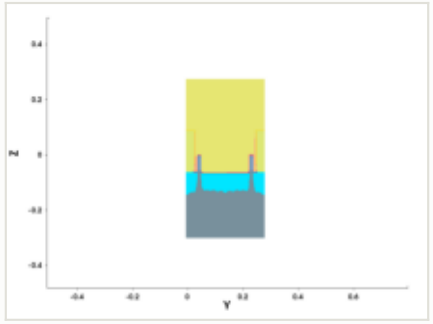

y cut at 0.211 µm

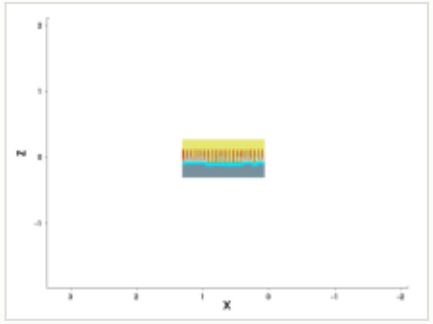

mask for this step

no mask for this step

this step

process area	CVD
material	Resist
thickness	0.15 µm
material GWP	4.2 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

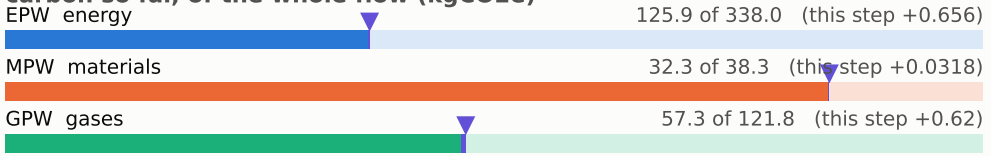

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

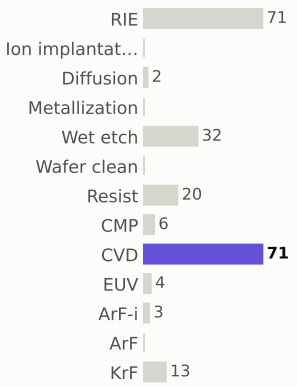

materials deposited (g)

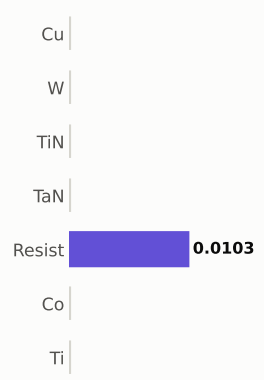

gases emitted (g)



Step #2280: KrF

litho_patterning · KrF

0.199	215.7	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

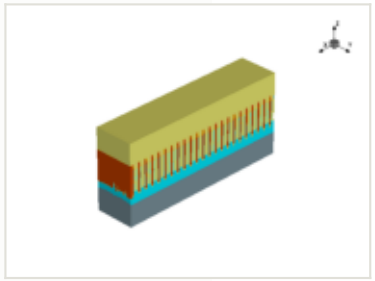

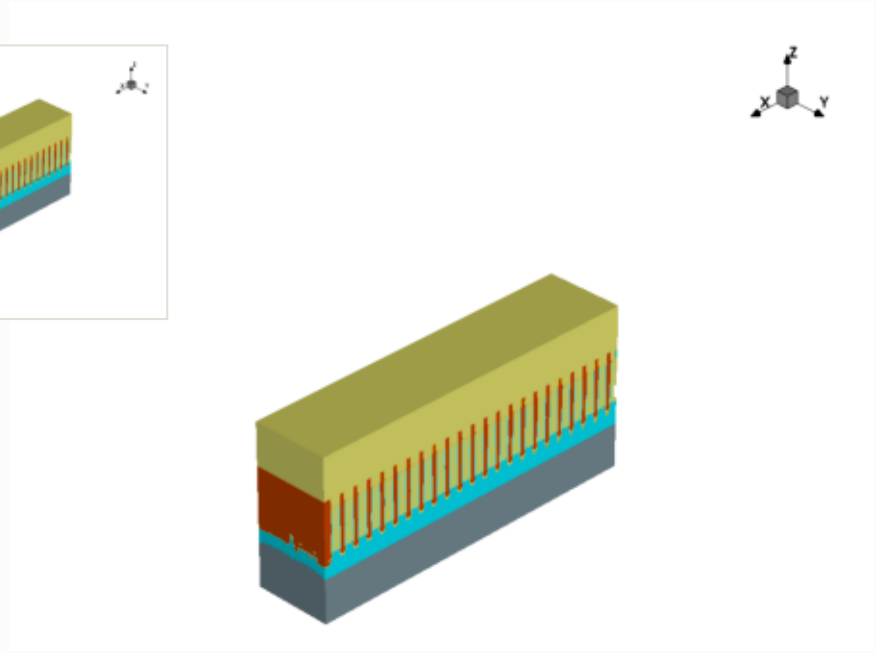

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

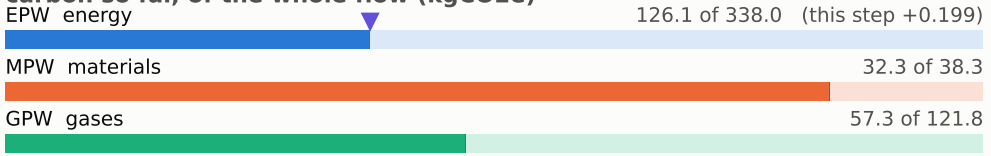

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

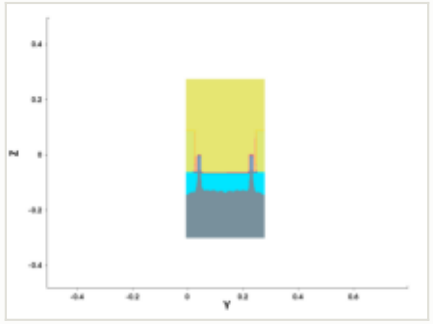

y cut at 0.211 µm

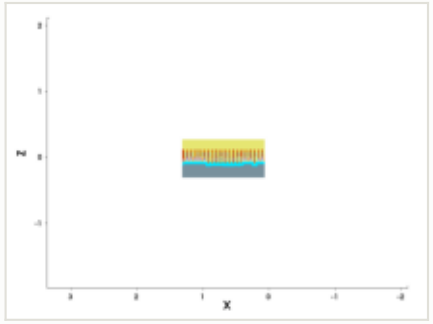

mask for this step

no mask for this step

steps by process area

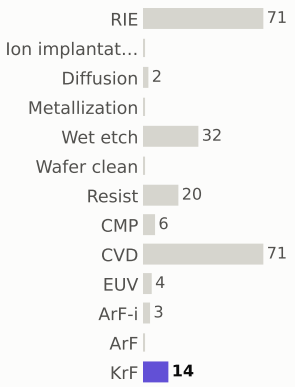

materials deposited (g)



gases emitted (g)



Step #2290: RIE

etch_ellipsoidal · RIE

1.04	216.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

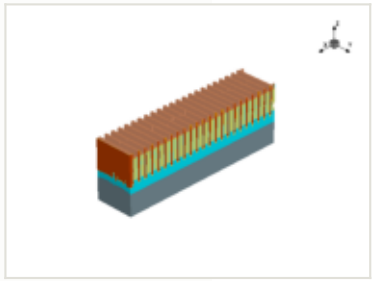

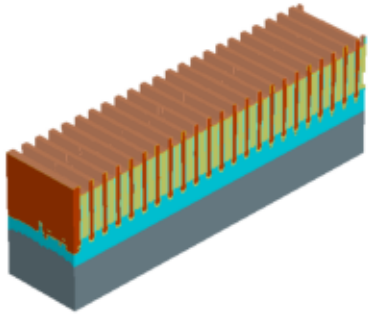

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

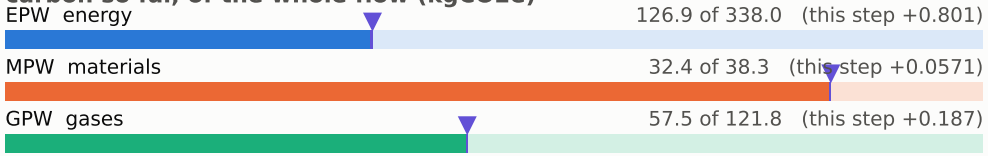

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

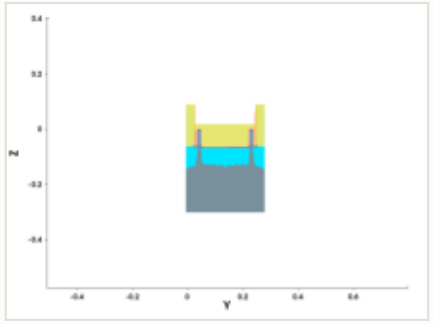

y cut at 0.211 µm

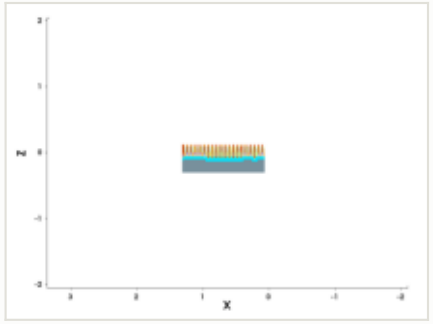

mask for this step

no mask for this step

steps by process area

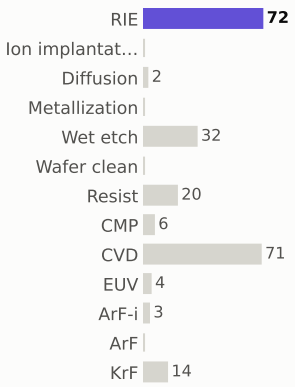

materials deposited (g)



gases emitted (g)



Step #2300: Wet_etch

etch_isotropic · Wet_etch

0.169	216.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

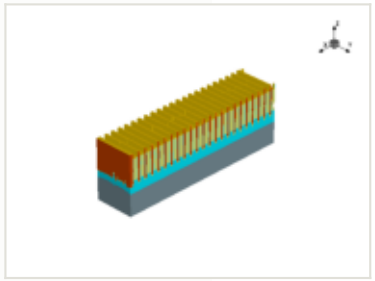

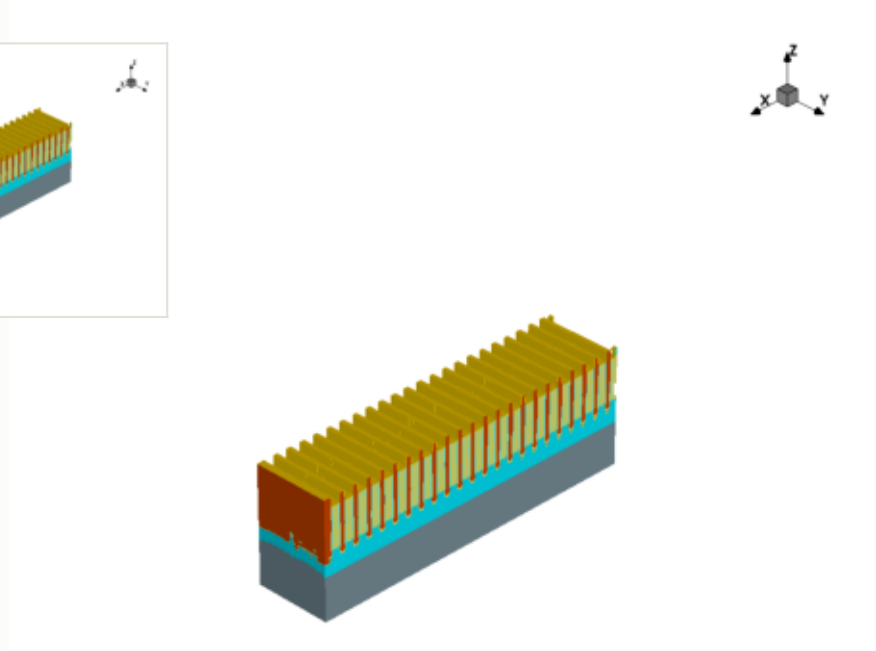

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

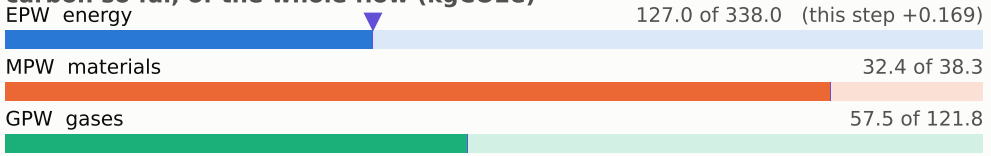

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

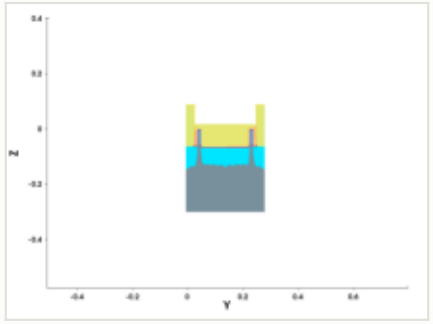

y cut at 0.211 µm

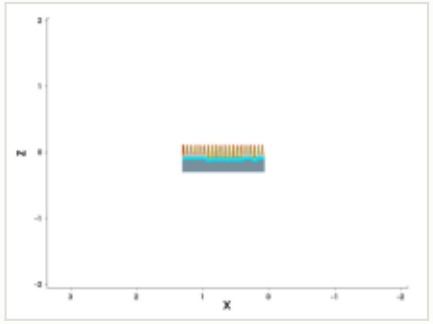

mask for this step

no mask for this step

steps by process area

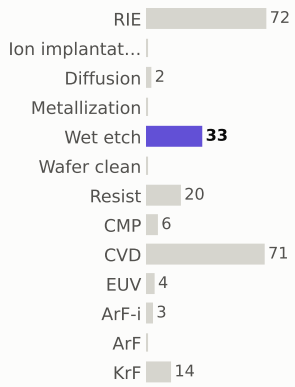

materials deposited (g)



gases emitted (g)



Step #2310: Resist

etch_strip · Resist

0.169	217.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

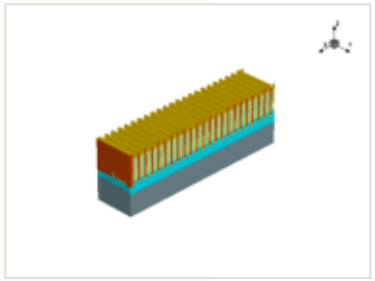

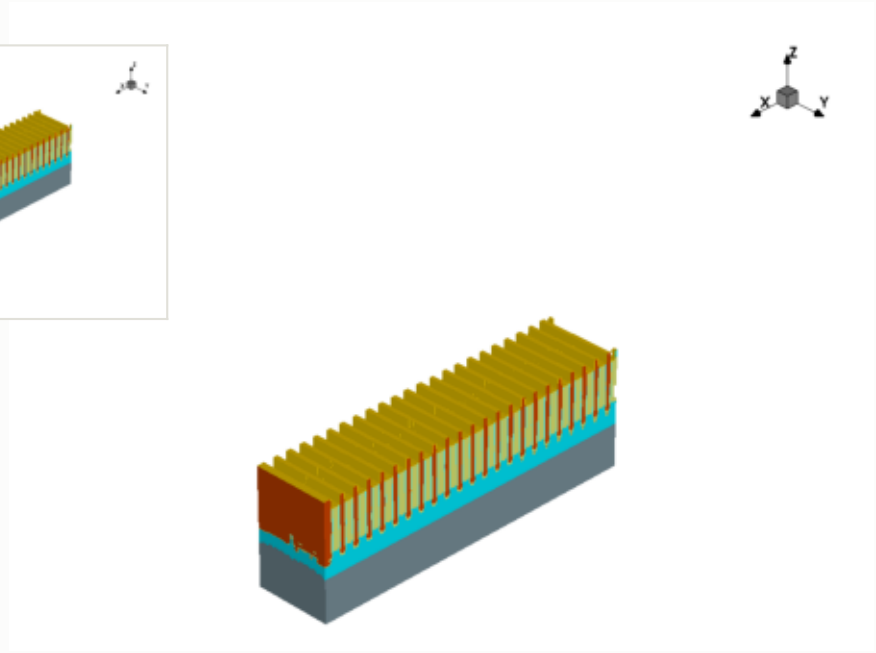

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

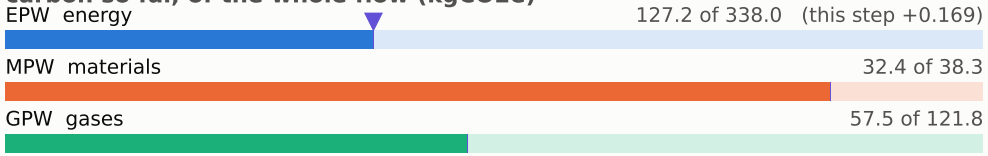

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

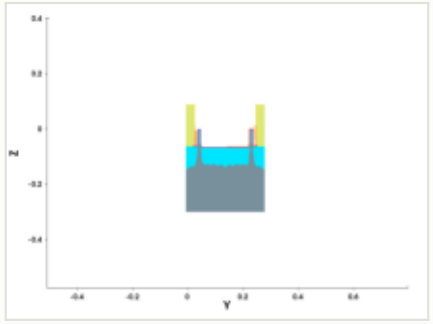

y cut at 0.211 µm

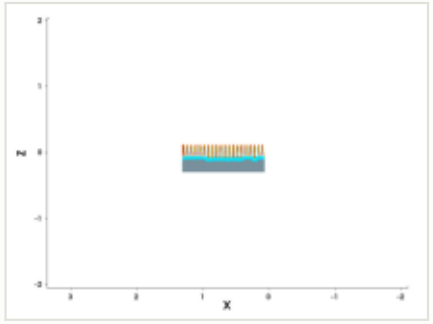

mask for this step

no mask for this step

steps by process area

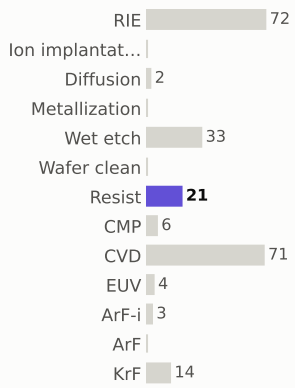

materials deposited (g)

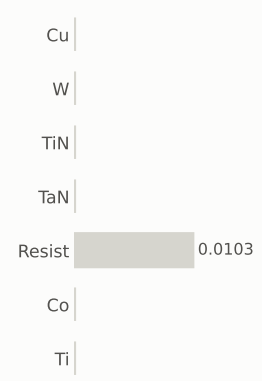

gases emitted (g)

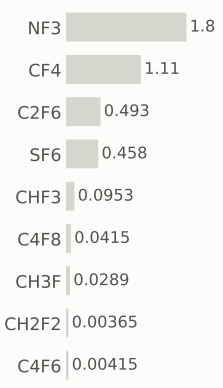

Step #2320: CVD

depo_ellipsoidal · CVD

1.31	218.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

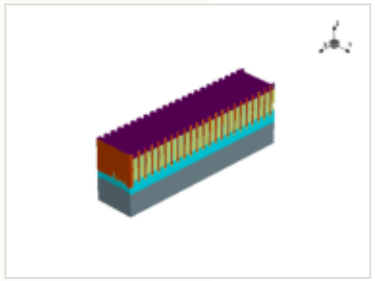

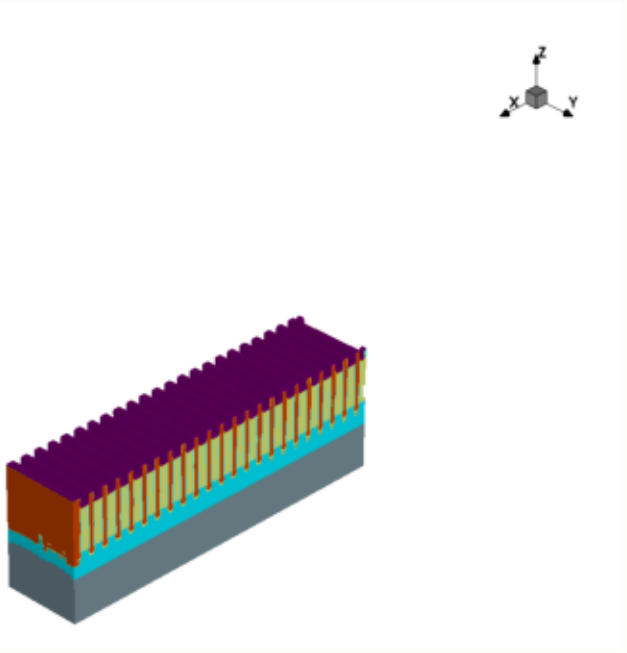

this step

process area	CVD
material	—
thickness	0.0052 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

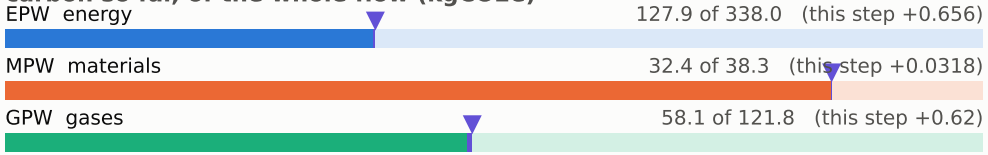

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

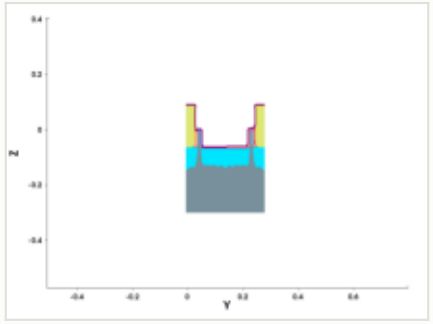

y cut at 0.211 µm

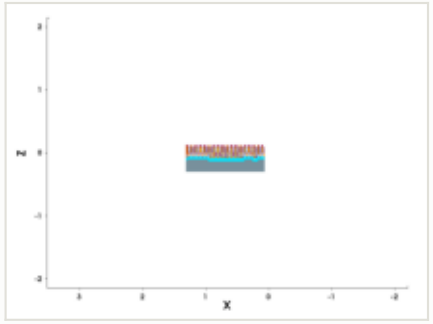

mask for this step

no mask for this step

steps by process area

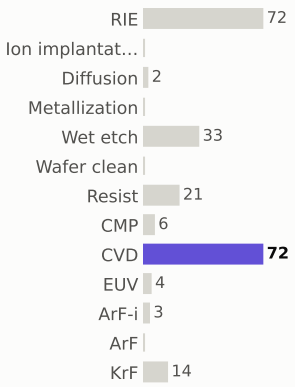

materials deposited (g)



gases emitted (g)



Step #2330: CVD

depo_isotropic · CVD

1.31	219.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

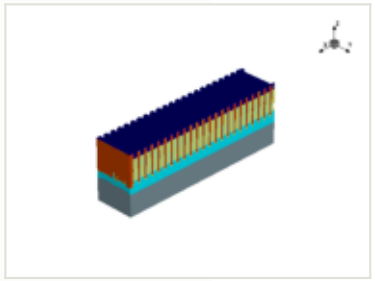

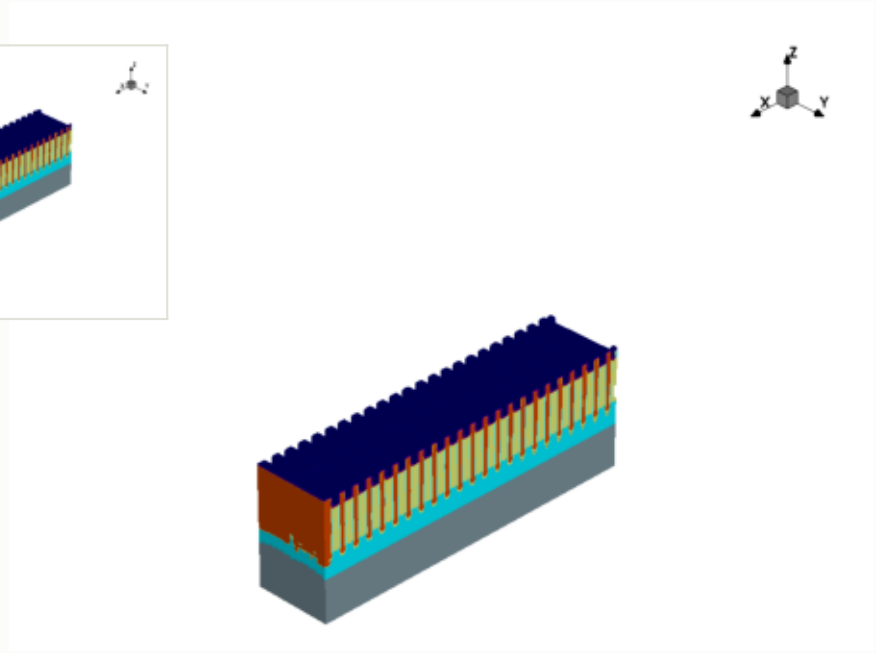

x cut at 0.677 µm

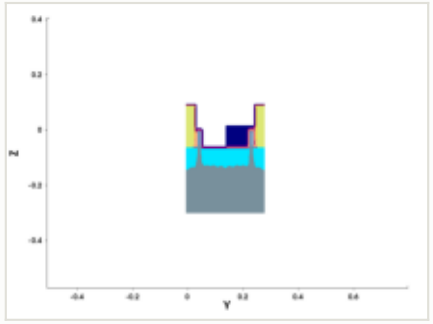

y cut at 0.211 µm

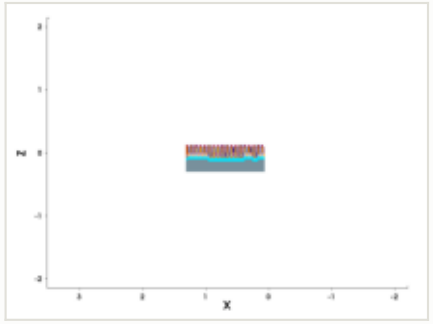

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.002 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

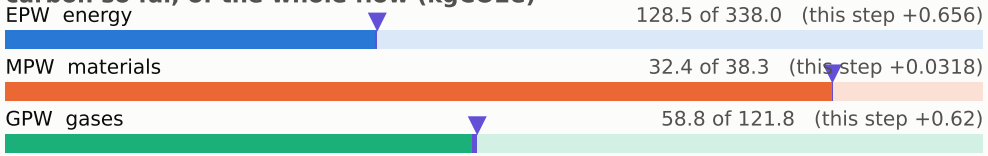

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

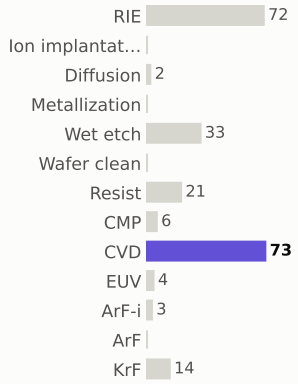

materials deposited (g)



gases emitted (g)



Step #2340: Metallization

depo_fill · Metallization

1.22	220.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

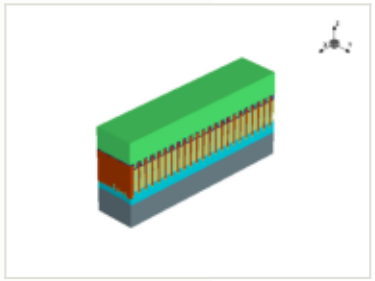

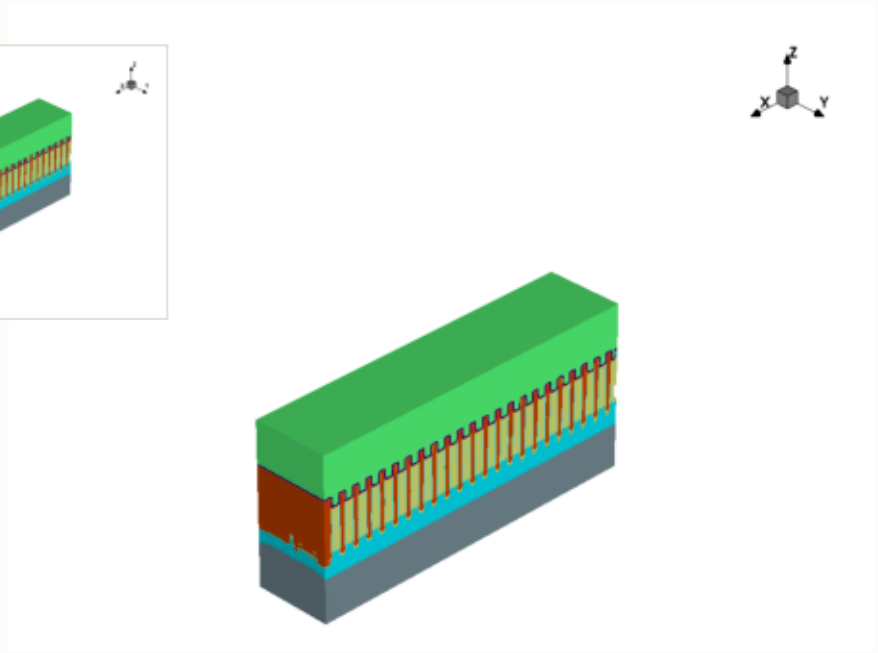

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

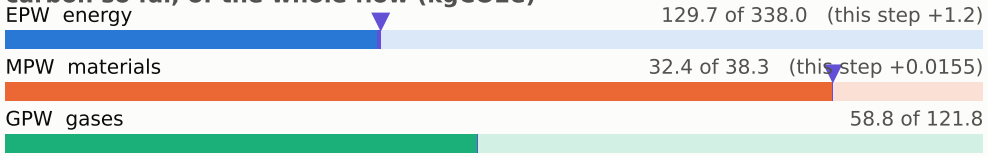

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

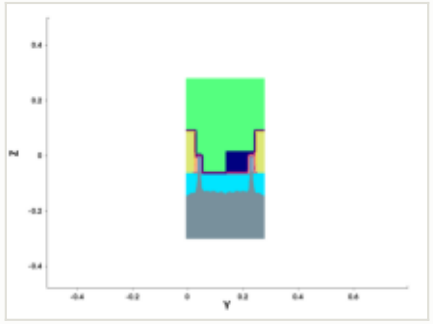

y cut at 0.211 µm

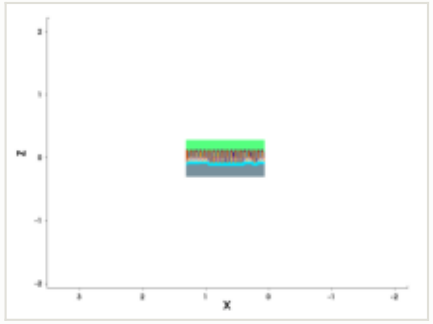

mask for this step

no mask for this step

steps by process area

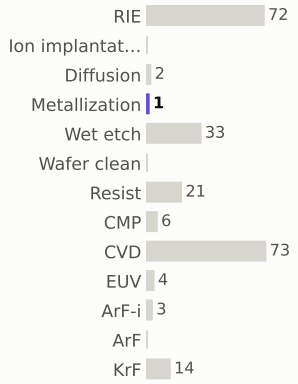

materials deposited (g)

gases emitted (g)



Step #2350: CMP

etch_cmp · CMP

0.169	221.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

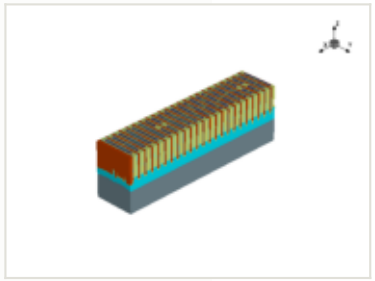

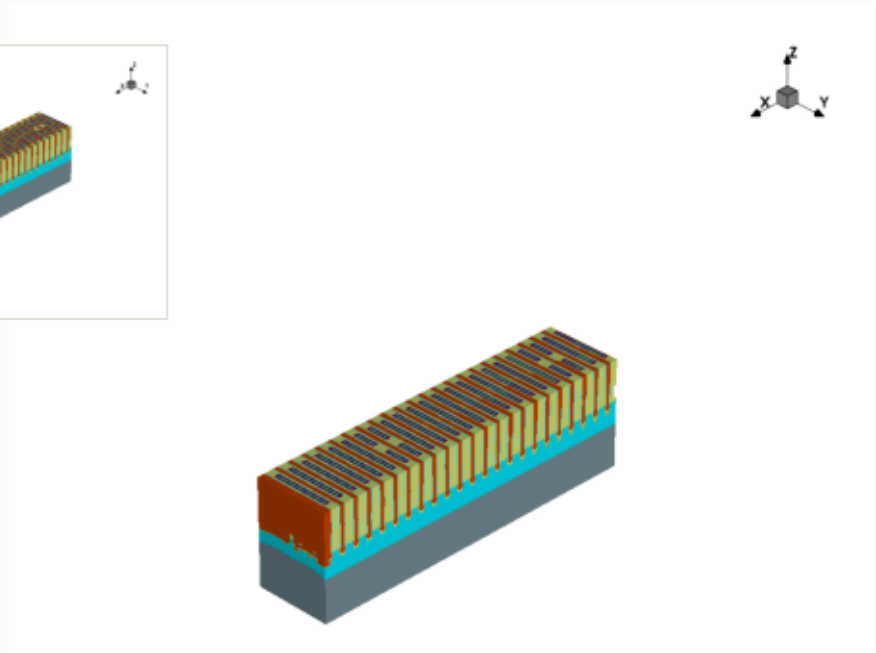

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

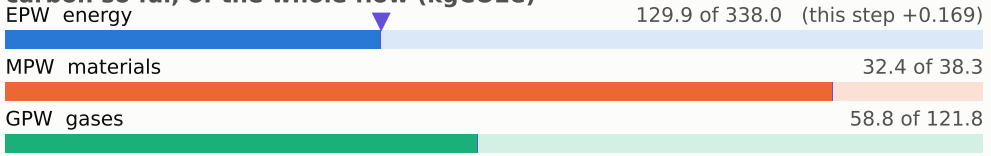

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

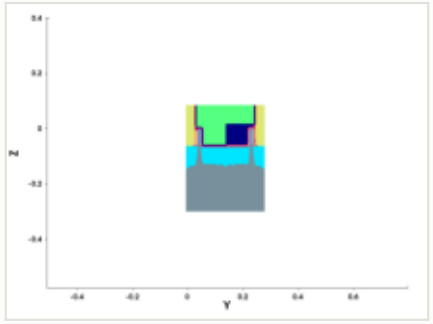

y cut at 0.211 µm

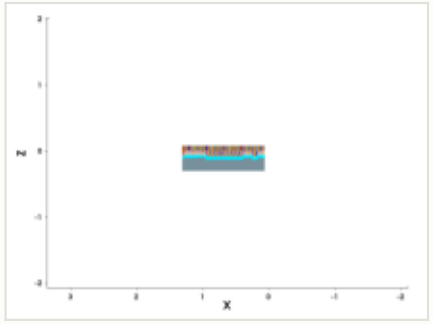

mask for this step

no mask for this step

steps by process area

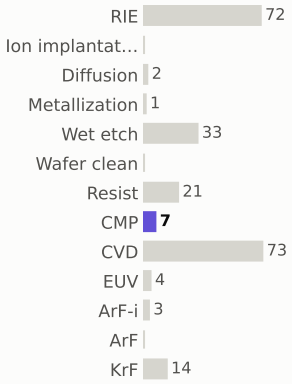

materials deposited (g)



gases emitted (g)



Step #2360: RIE

etch_unified · RIE

1.04	222.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

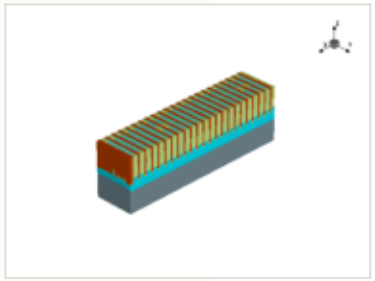

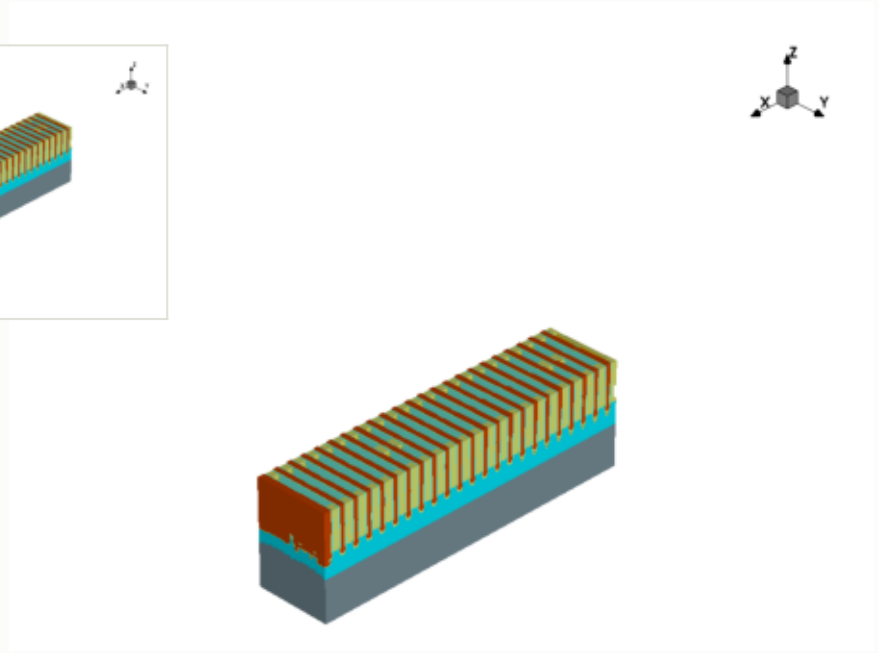

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

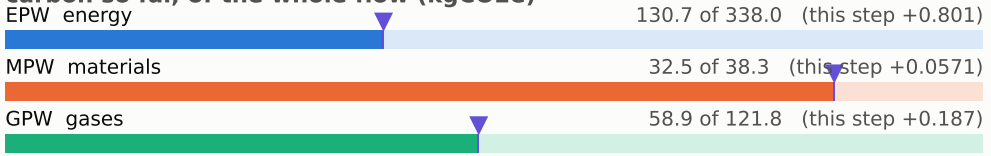

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

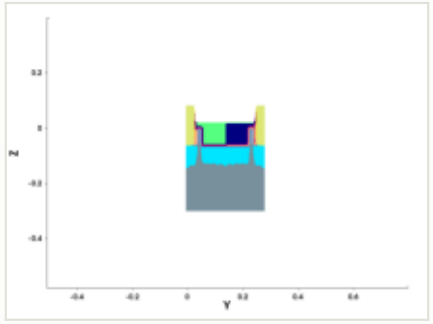

y cut at 0.211 µm

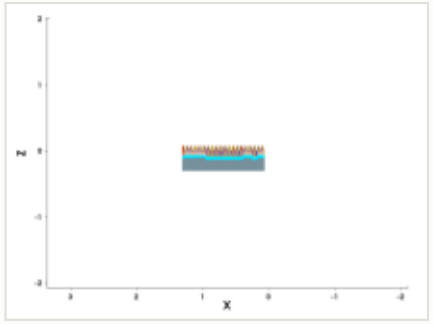

mask for this step

no mask for this step

steps by process area

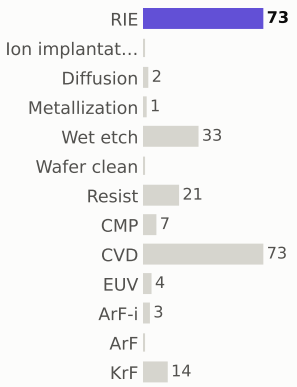

materials deposited (g)



gases emitted (g)



Step #2370: RIE

etch_ellipsoidal · RIE

1.04	223.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

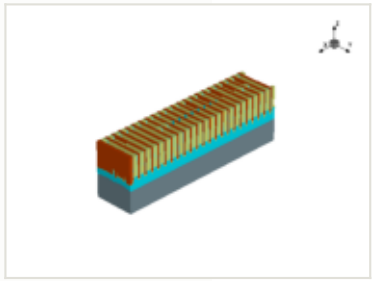

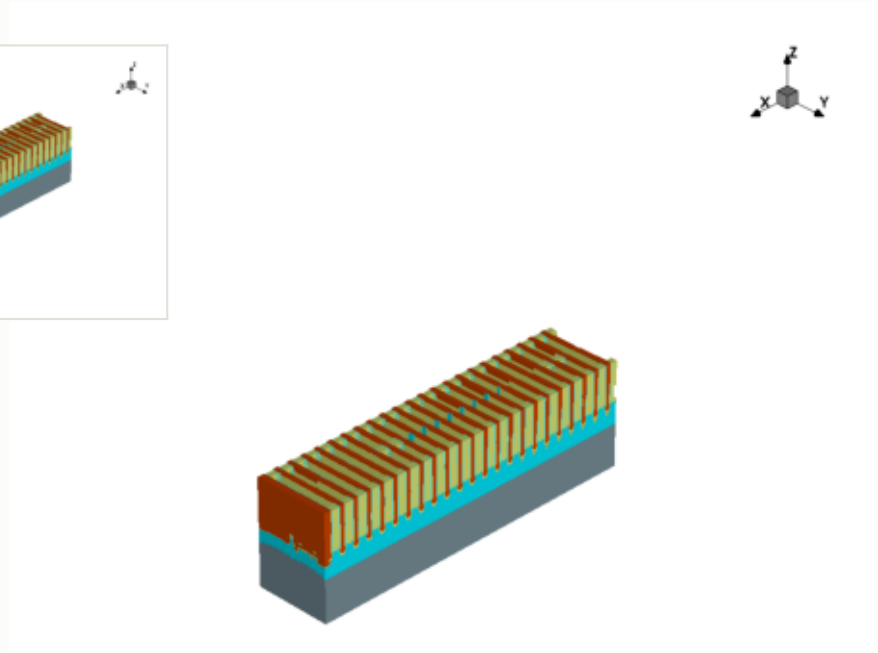

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

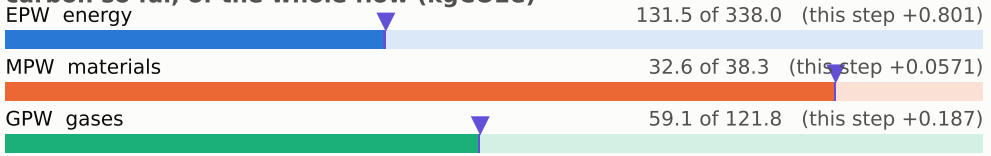

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

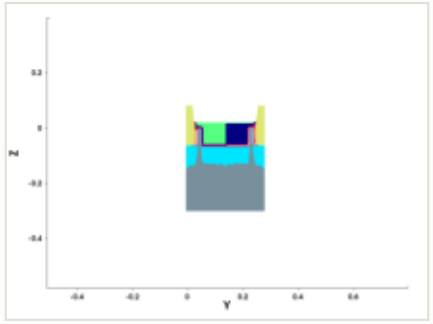

y cut at 0.211 µm

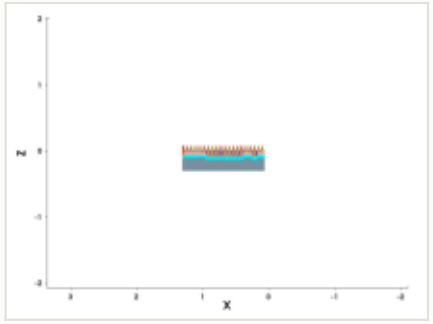

mask for this step

no mask for this step

steps by process area

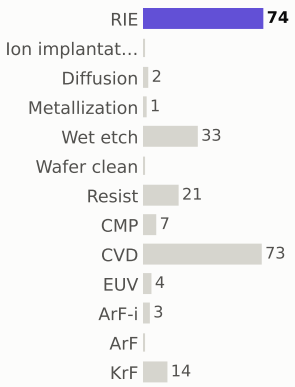

materials deposited (g)



gases emitted (g)



Step #2380: CVD

depo_isotropic · CVD

1.31	224.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

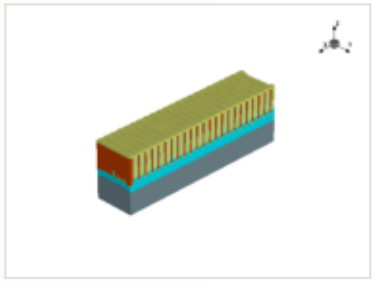

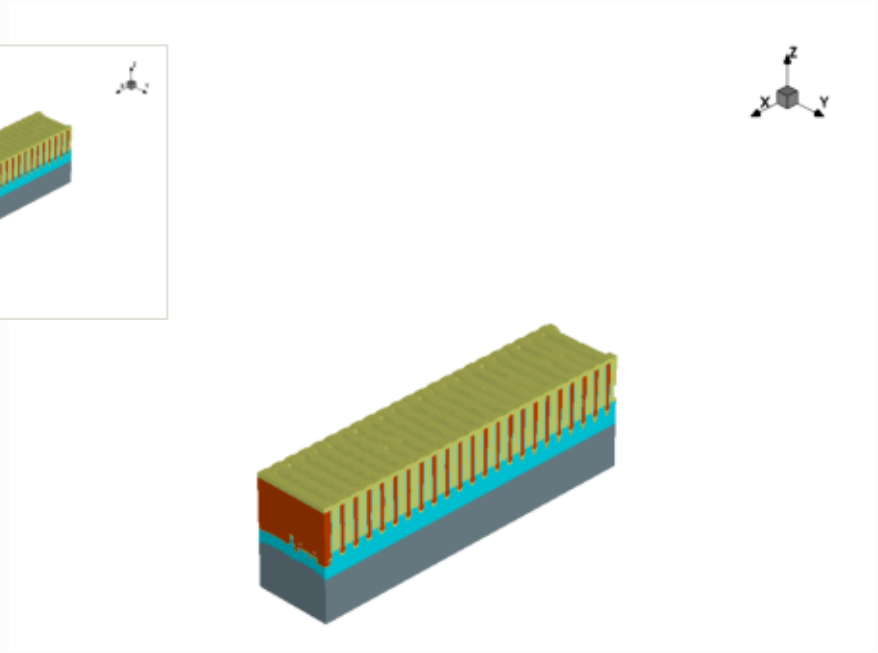

x cut at 0.677 µm

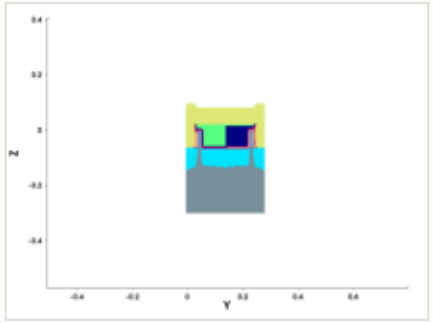

y cut at 0.211 µm

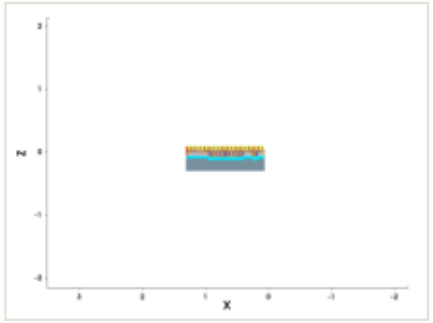

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.016 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

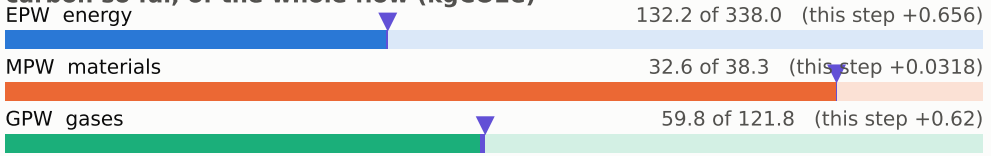

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

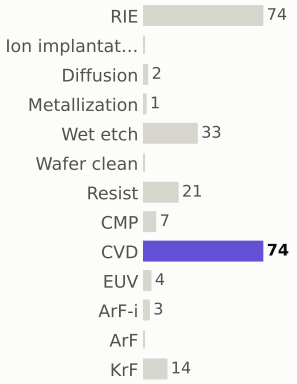

materials deposited (g)



gases emitted (g)



Step #2390: CMP

etch_cmp · CMP

0.169	224.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

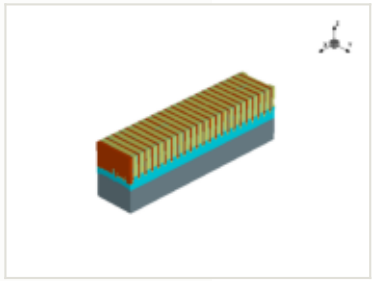

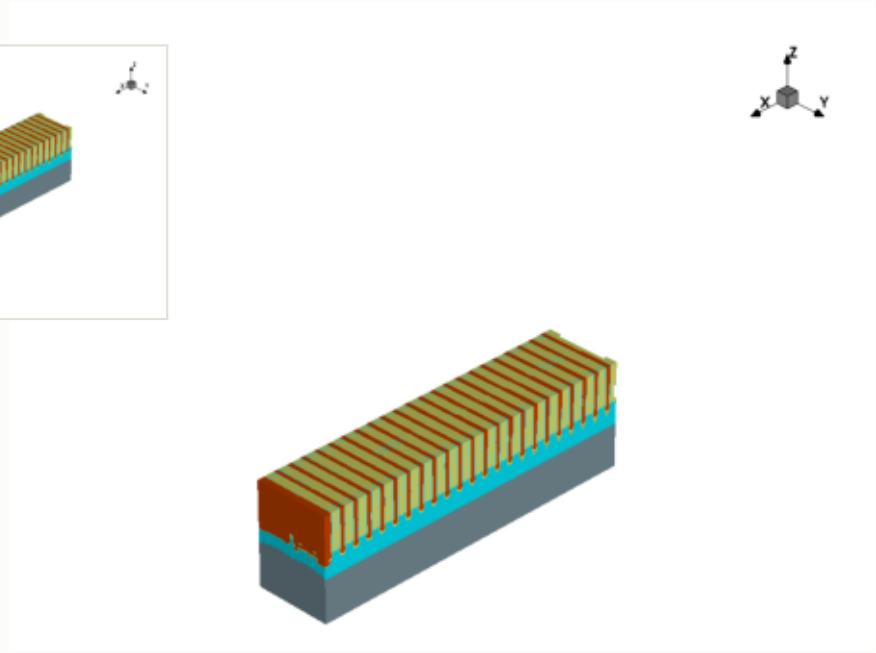

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

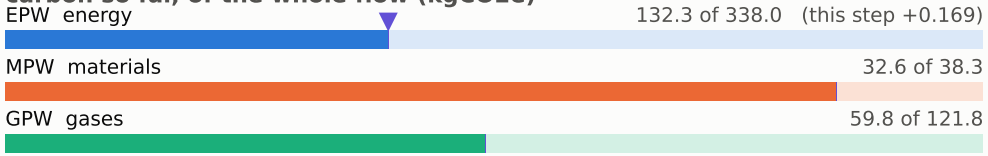

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

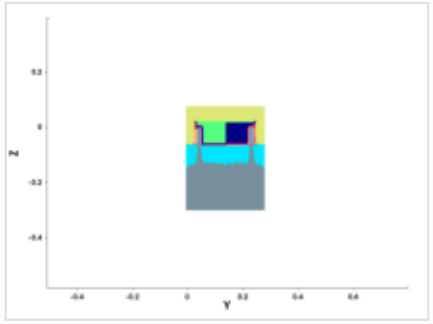

y cut at 0.211 µm

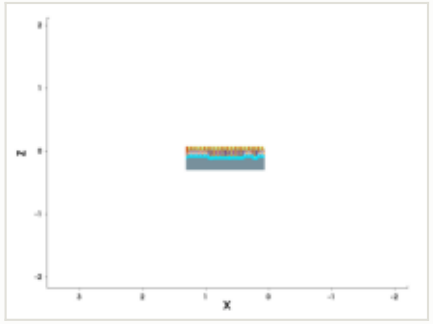

mask for this step

no mask for this step

steps by process area

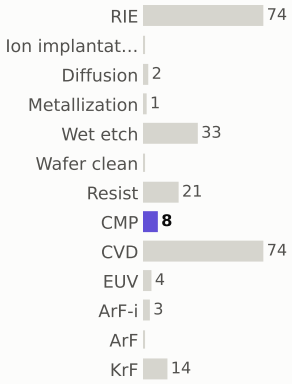

materials deposited (g)



gases emitted (g)



Step #2410: CVD

depo_fill · CVD

1.31	226.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

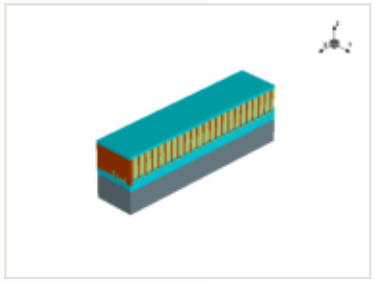

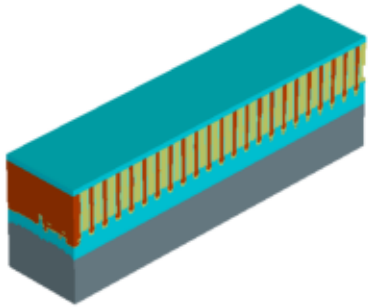

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

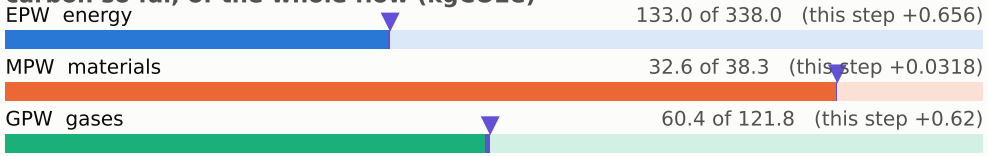

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

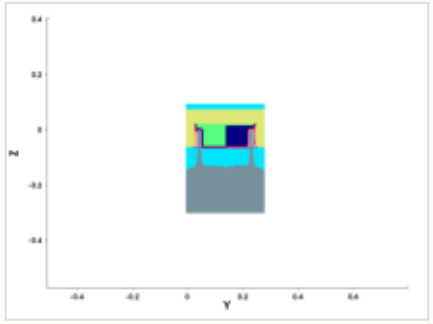

y cut at 0.211 µm

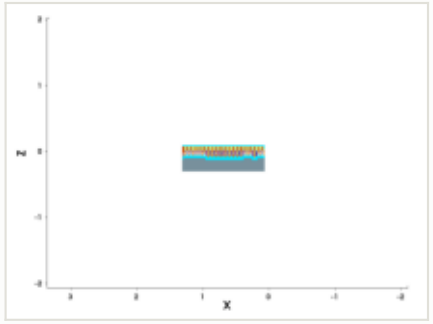

mask for this step

no mask for this step

steps by process area

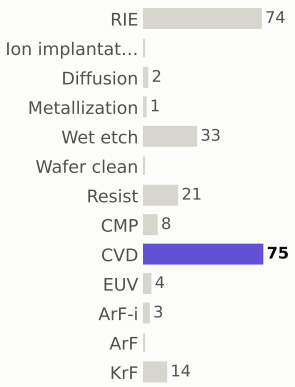

materials deposited (g)



gases emitted (g)



Step #2420: CVD

depo_fill · CVD

1.31	227.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

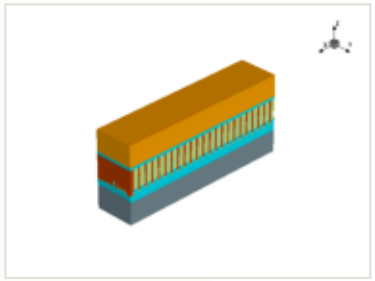

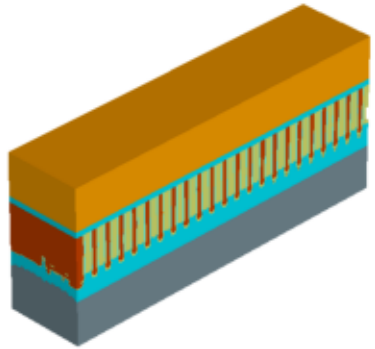

x cut at 0.677 µm

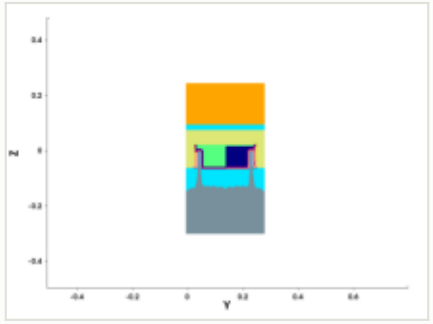

y cut at 0.211 µm

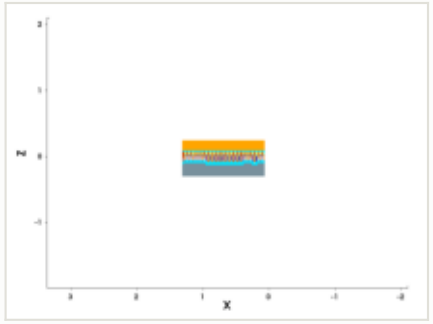

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

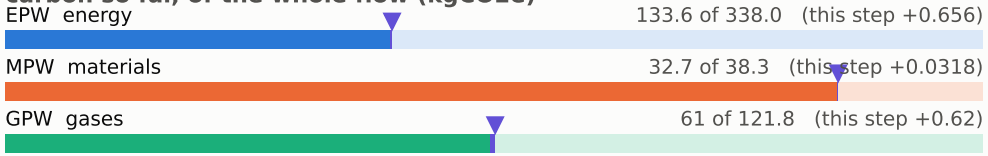

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

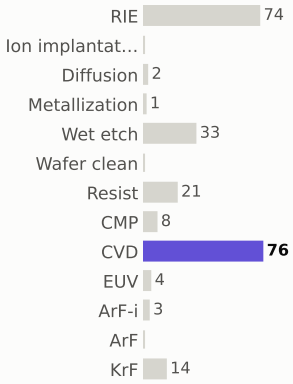

materials deposited (g)



gases emitted (g)



Step #2430: CVD

depo_isotropic · CVD

1.31	228.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

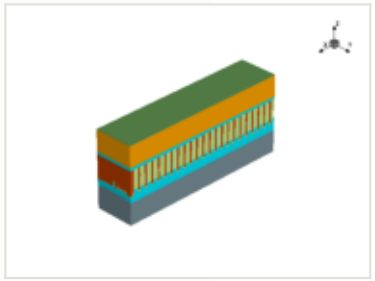

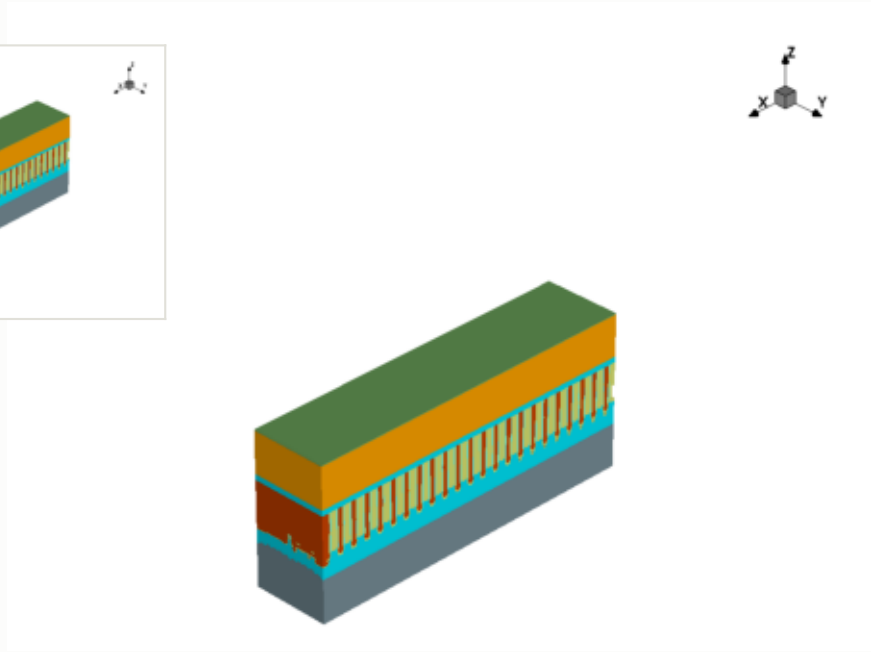

x cut at 0.677 µm

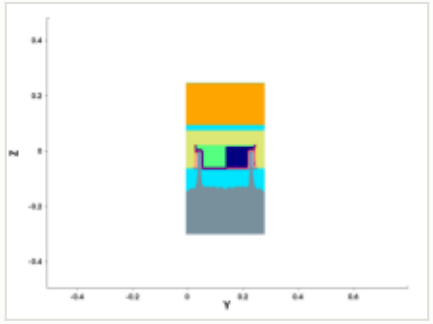

y cut at 0.211 µm

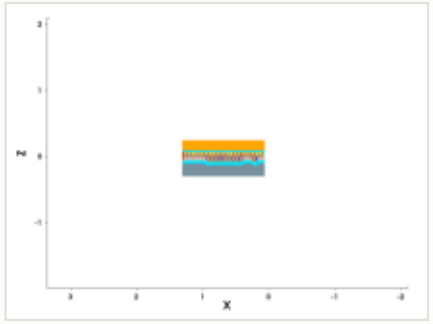

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

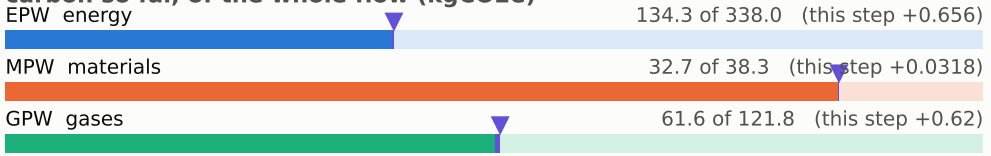

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

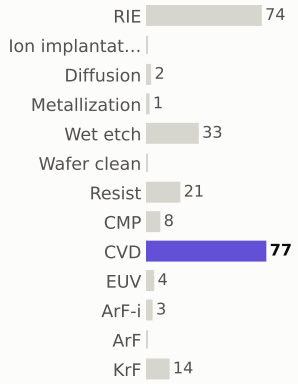

materials deposited (g)



gases emitted (g)



Step #2440: CVD

depo_isotropic · CVD

1.31	229.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

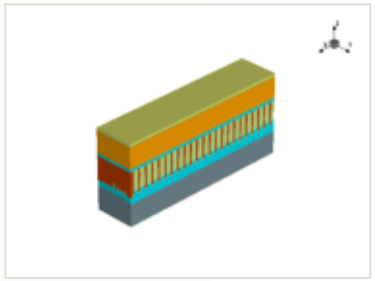

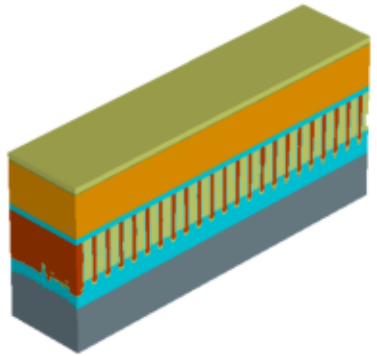

x cut at 0.677 µm

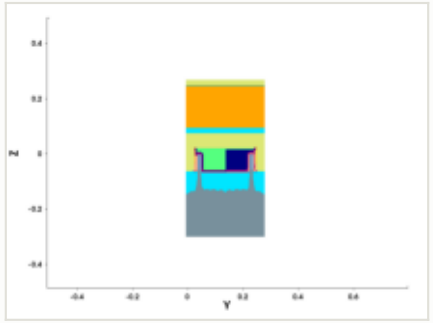

y cut at 0.211 µm

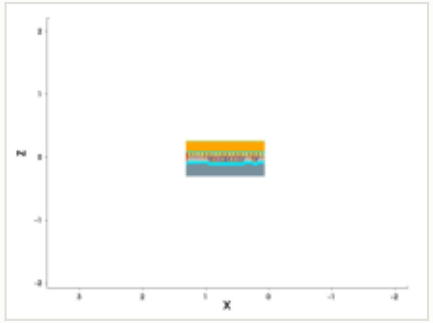

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 134.9 of 338.0 (this step +0.656)

MPW materials — 32.7 of 38.3 (this step +0.0318)

GPW gases — 62.2 of 121.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

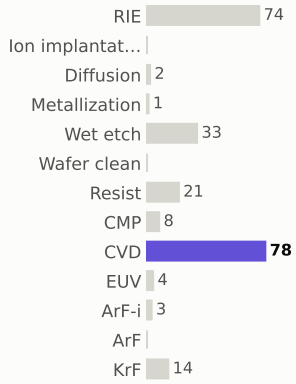

materials deposited (g)



gases emitted (g)



Step #2450: CVD

depo_fill · CVD

1.31	231.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

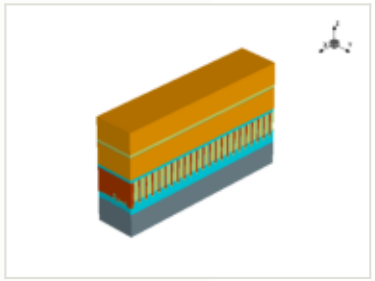

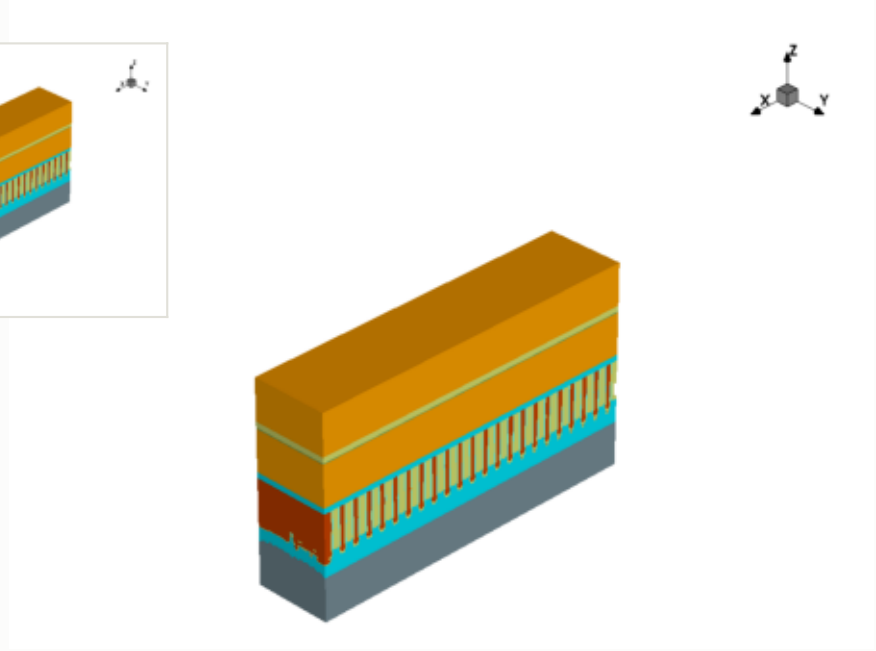

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

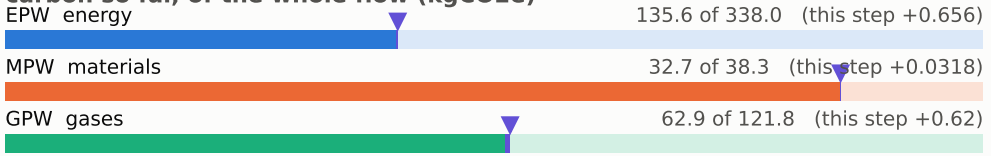

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

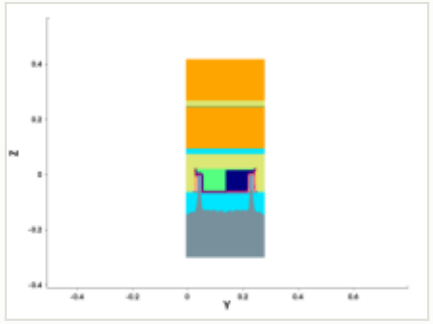

y cut at 0.211 µm

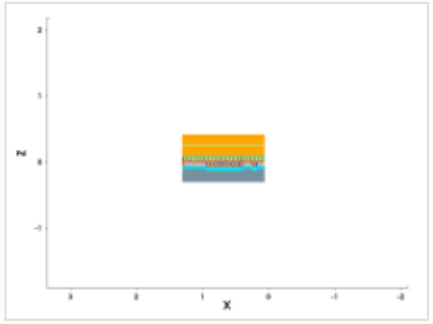

mask for this step

no mask for this step

steps by process area

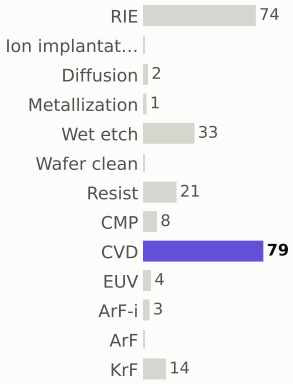

materials deposited (g)



gases emitted (g)



Step #2460: CVD

depo_fill · CVD

1.31	232.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

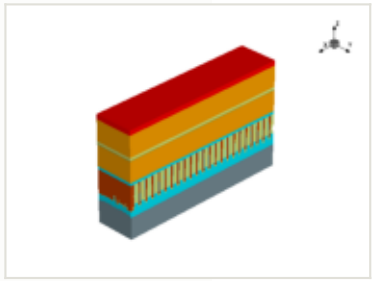

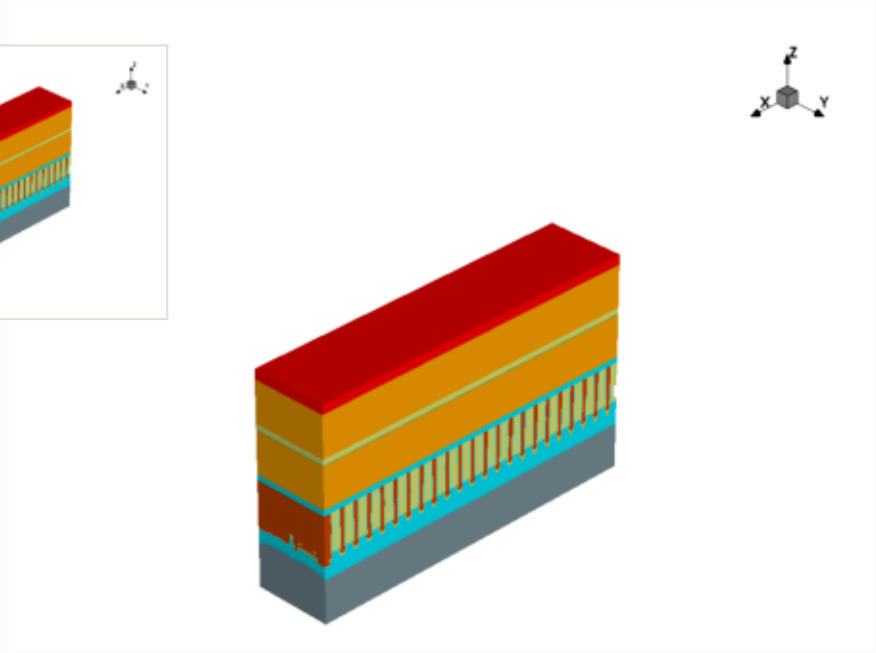

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

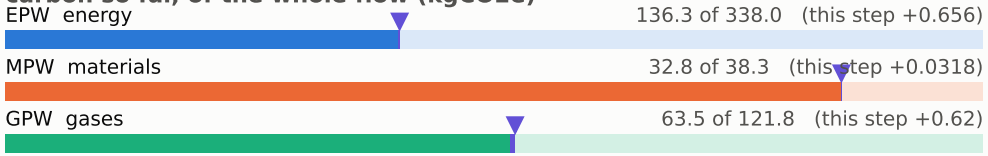

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

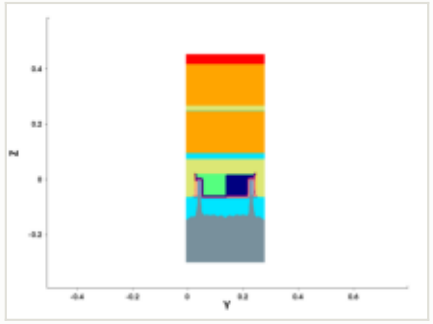

y cut at 0.211 µm

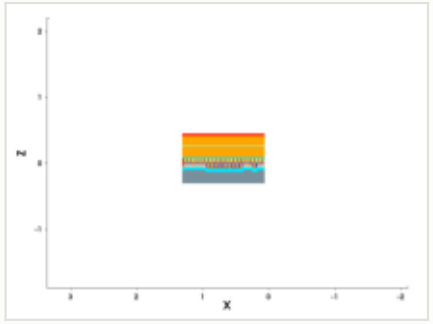

mask for this step

no mask for this step

steps by process area

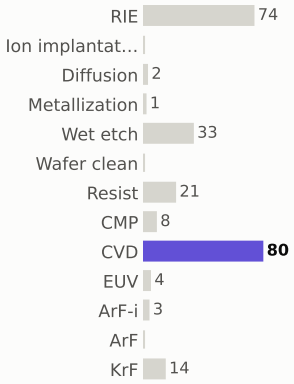

materials deposited (g)



gases emitted (g)



Step #2470: EUV

litho_patterning · EUV

1.96	234.5	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

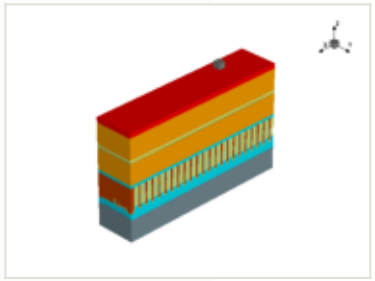

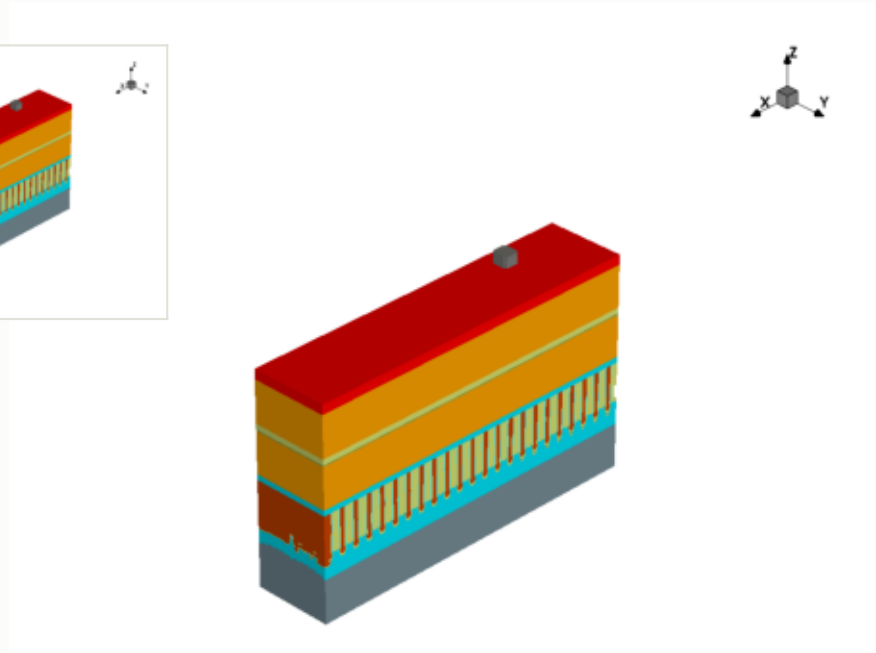

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

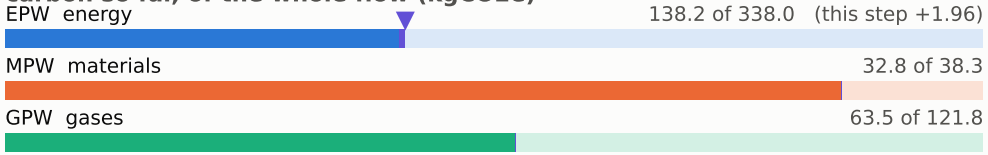

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

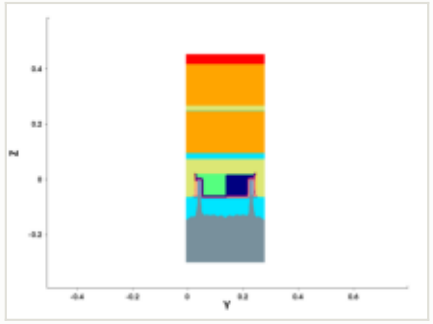

y cut at 0.211 µm

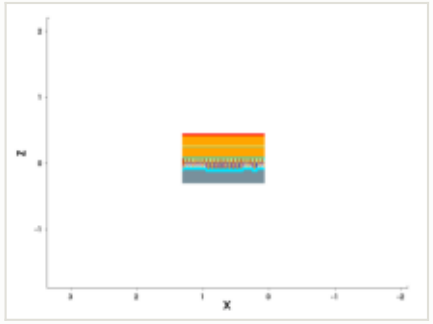

mask: layer 504:0 (GDSII)



steps by process area

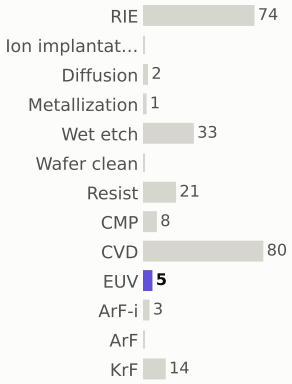

materials deposited (g)



gases emitted (g)



Step #2480: RIE

etch_anisotropic · RIE

1.04	235.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

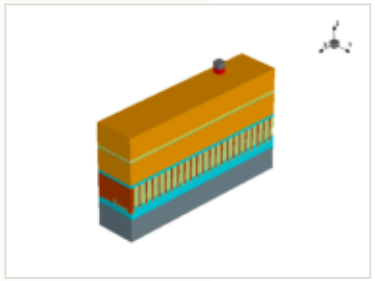

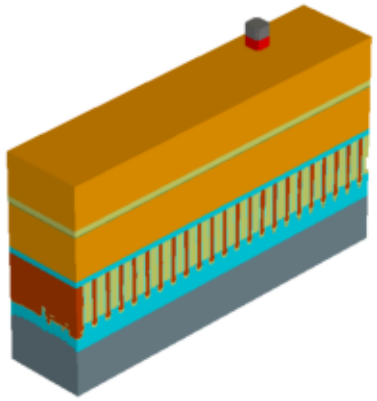

x cut at 0.677 µm

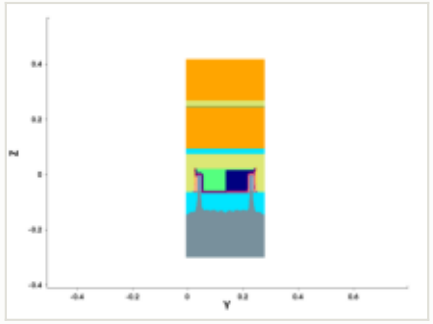

y cut at 0.211 µm

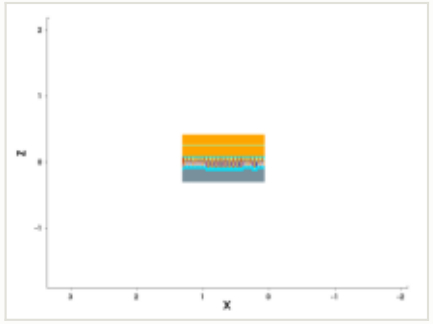

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

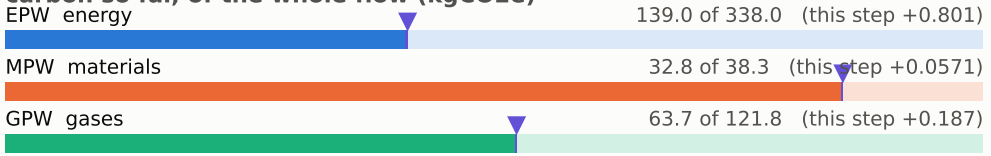

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

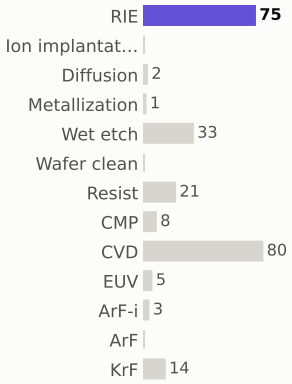

materials deposited (g)



gases emitted (g)



Step #2490: CVD

depo_isotropic · CVD

1.31	236.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

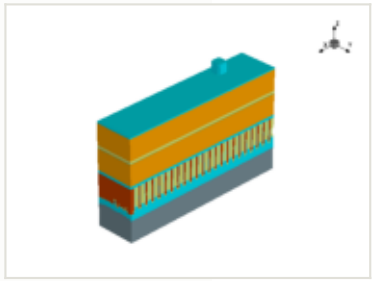

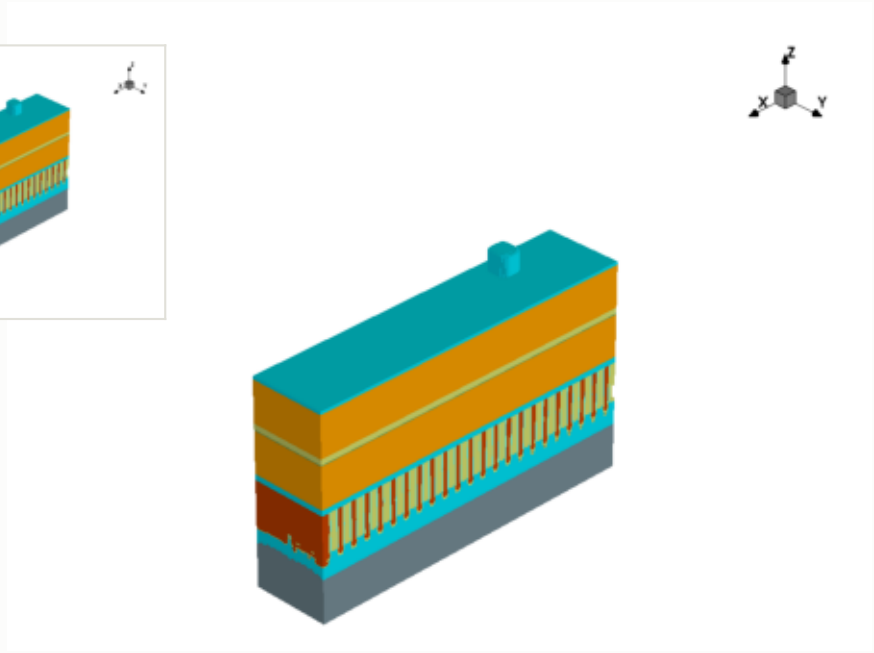

this step

process area	CVD
material	—
thickness	0.011 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

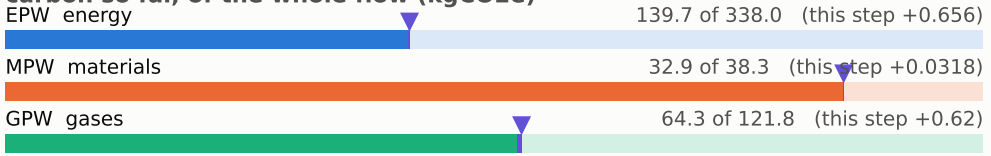

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

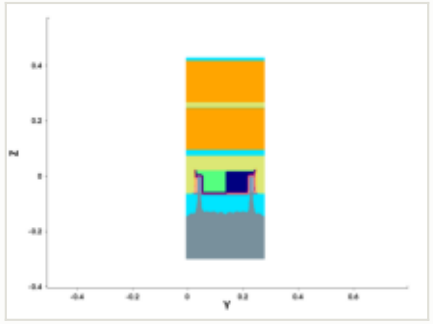

y cut at 0.211 µm

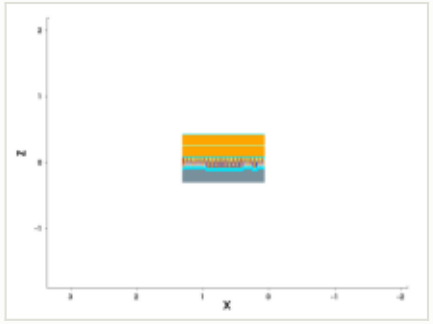

mask for this step

no mask for this step

steps by process area

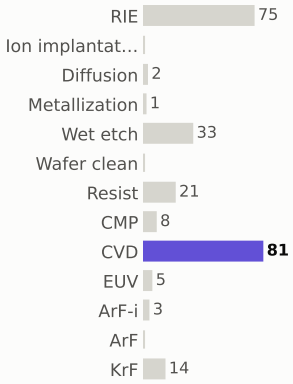

materials deposited (g)



gases emitted (g)



Step #2500: RIE

etch_ellipsoidal · RIE

1.04	237.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

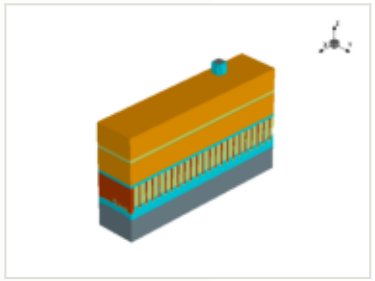

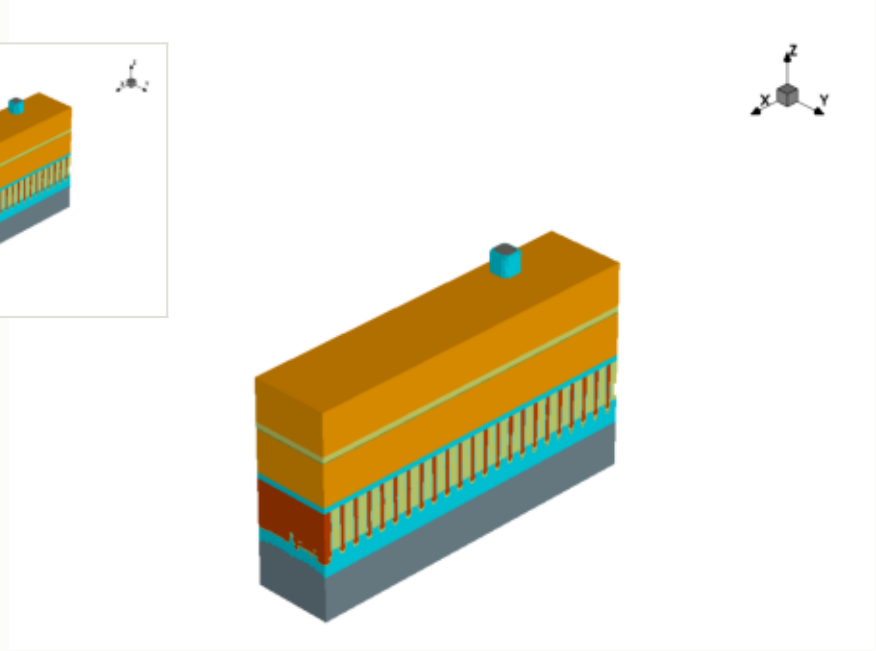

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

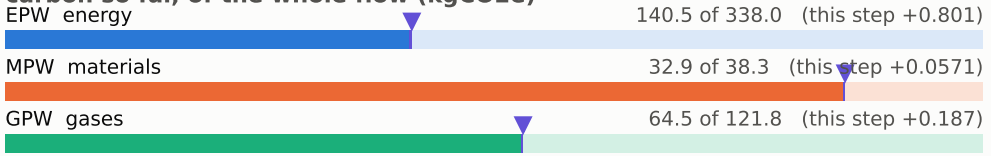

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

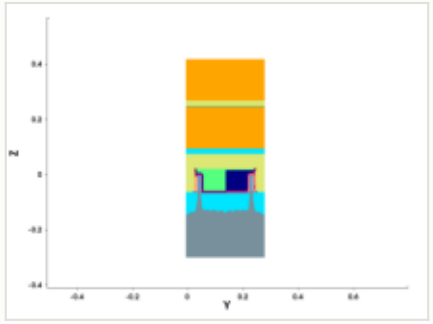

y cut at 0.211 µm

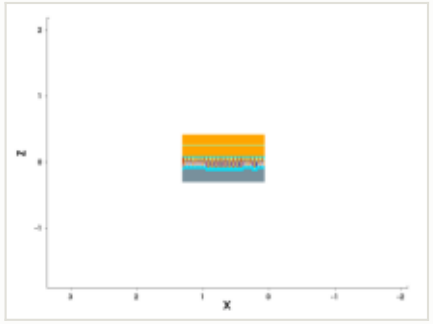

mask for this step

no mask for this step

steps by process area

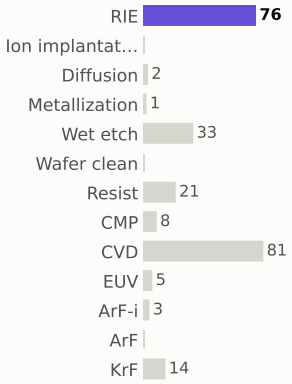

materials deposited (g)



gases emitted (g)



Step #2510: RIE

etch_anisotropic · RIE

1.04	238.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

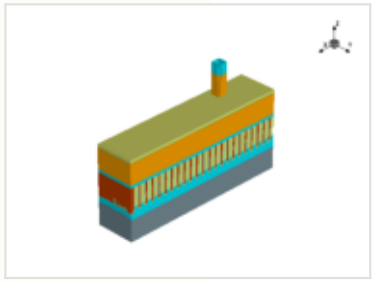

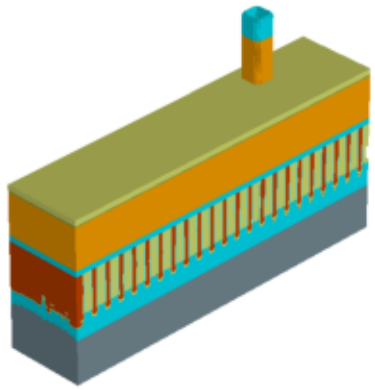

x cut at 0.677 µm

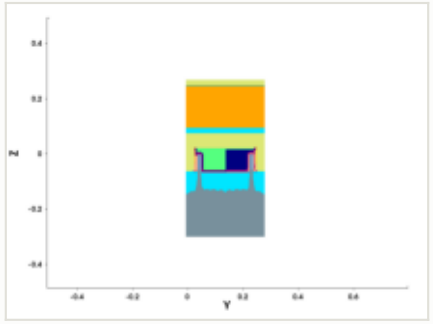

y cut at 0.211 µm

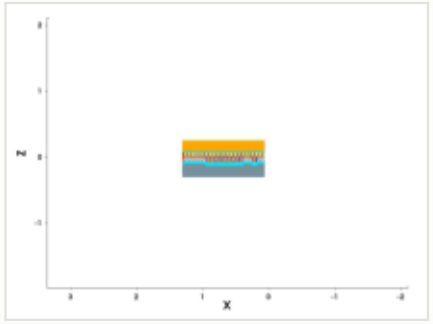

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

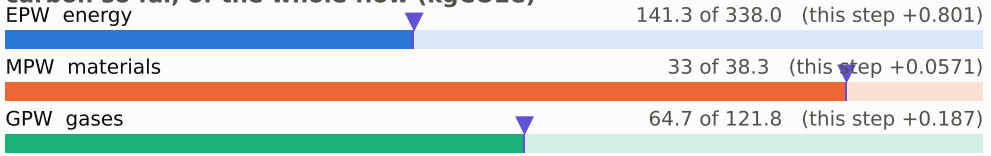

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

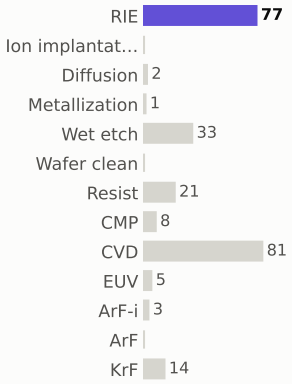

materials deposited (g)



gases emitted (g)



Step #2520: RIE

etch_anisotropic · RIE

1.04	240.0	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

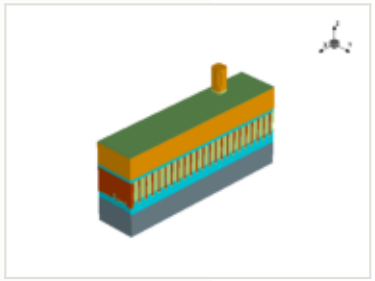

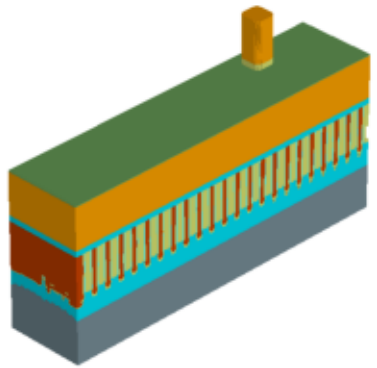

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

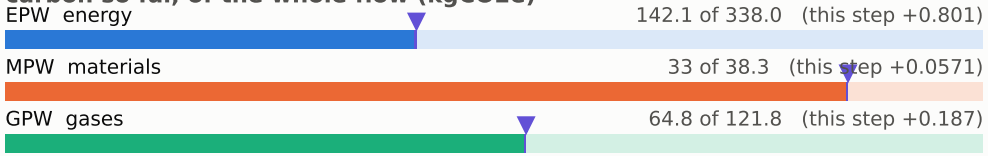

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

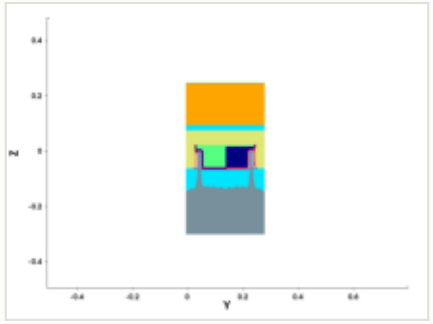

y cut at 0.211 µm

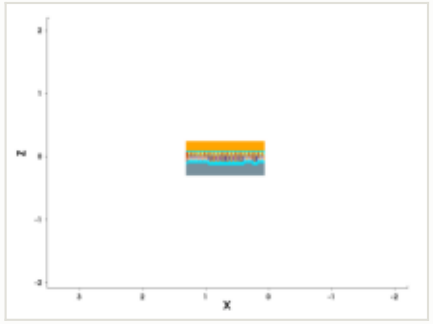

mask for this step

no mask for this step

steps by process area

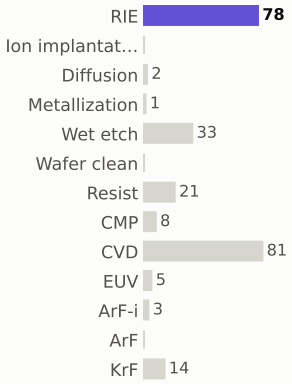

materials deposited (g)



gases emitted (g)



Step #2530: RIE

etch_anisotropic · RIE

1.04	241.0	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

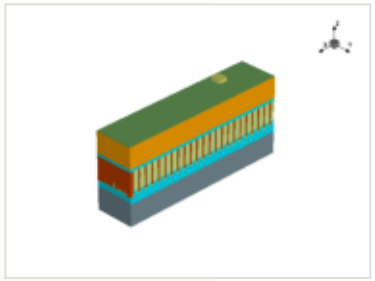

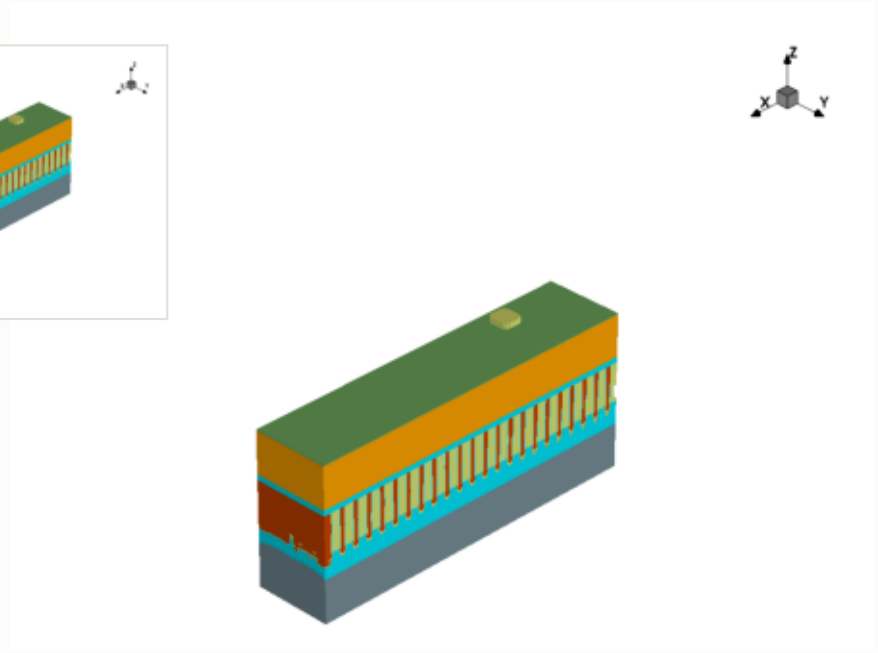

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

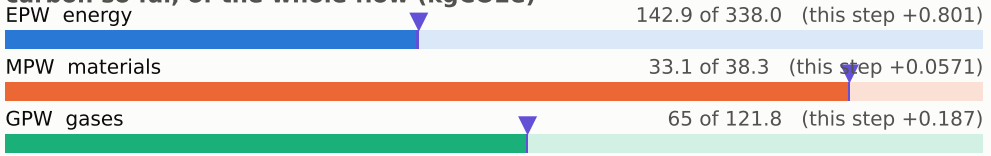

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

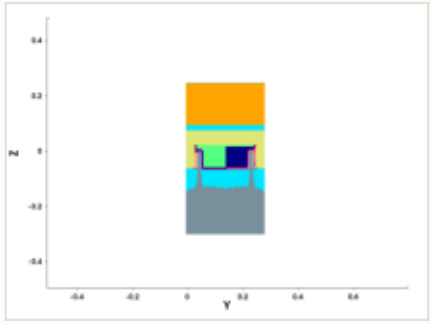

y cut at 0.211 µm

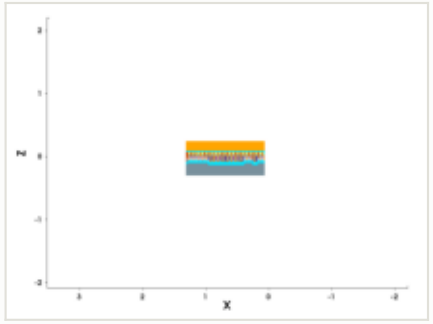

mask for this step

no mask for this step

steps by process area

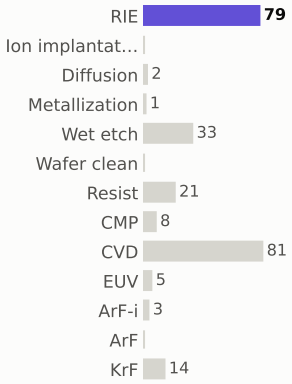

materials deposited (g)



gases emitted (g)



Step #2540: CVD

depo_isotropic · CVD

1.31	242.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

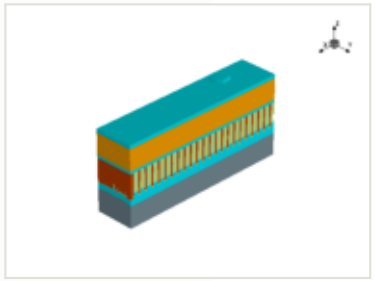

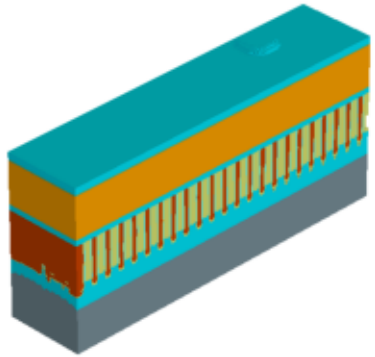

this step

process area	CVD
material	—
thickness	0.025 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

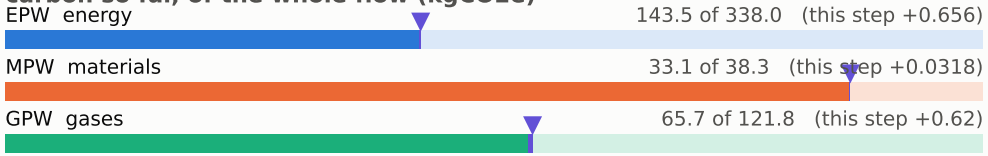

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

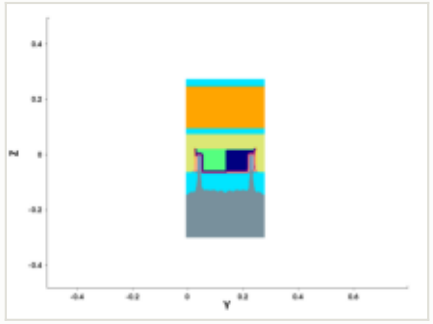

y cut at 0.211 µm

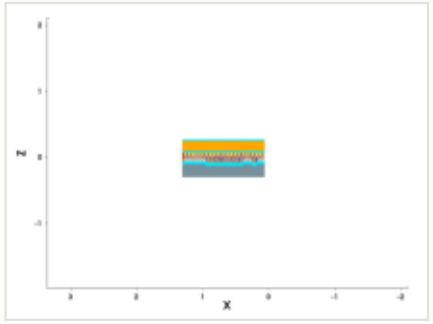

mask for this step

no mask for this step

steps by process area

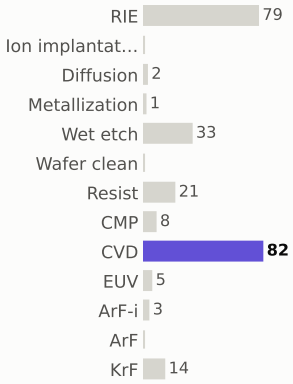

materials deposited (g)



gases emitted (g)



Step #2550: RIE

etch_anisotropic · RIE

1.04	243.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

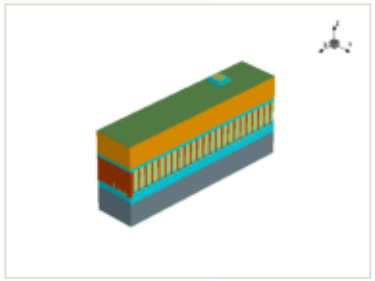

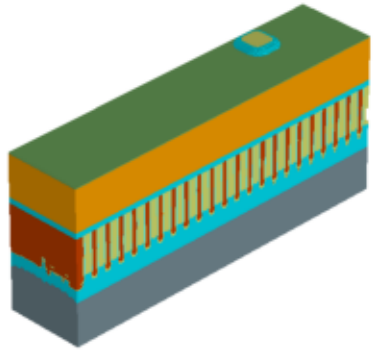

x cut at 0.677 µm

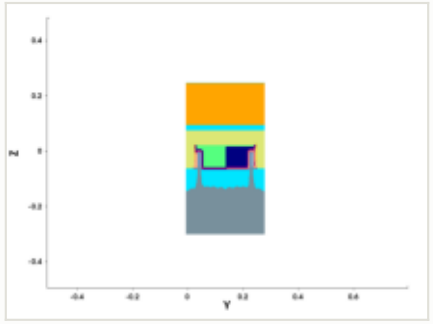

y cut at 0.211 µm

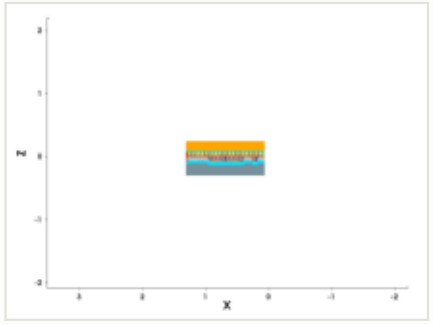

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

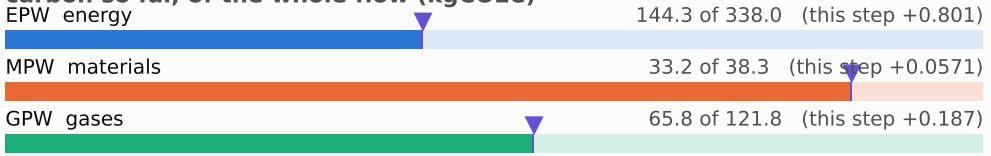

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

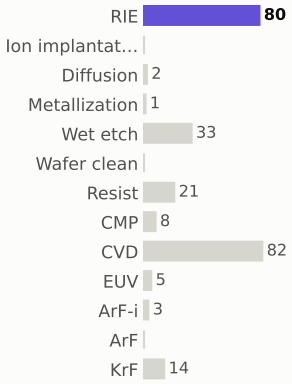

materials deposited (g)



gases emitted (g)



Step #2560: RIE

etch_anisotropic · RIE

1.04	244.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

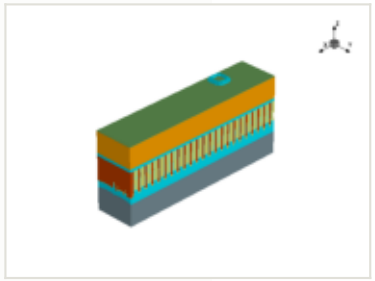

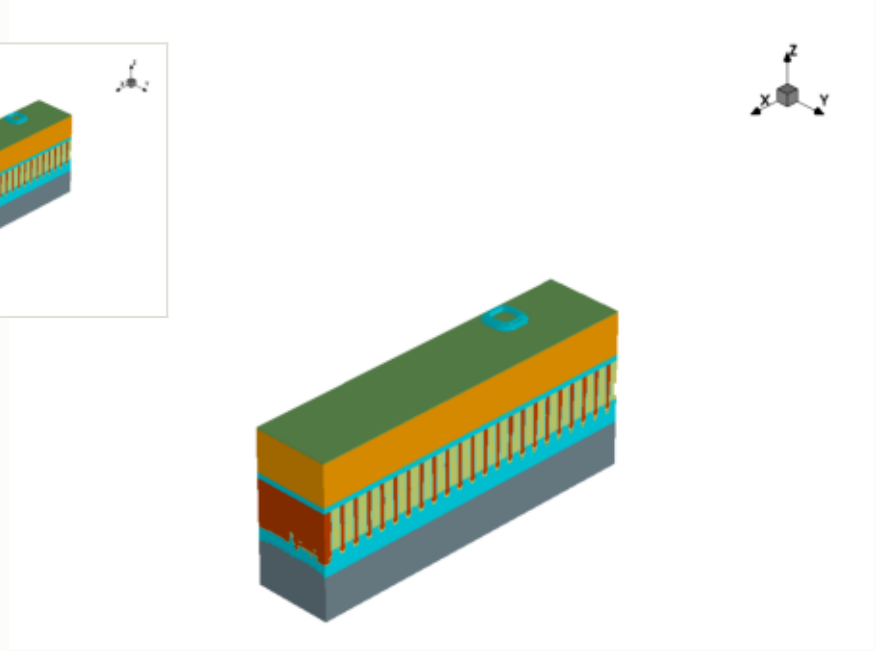

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

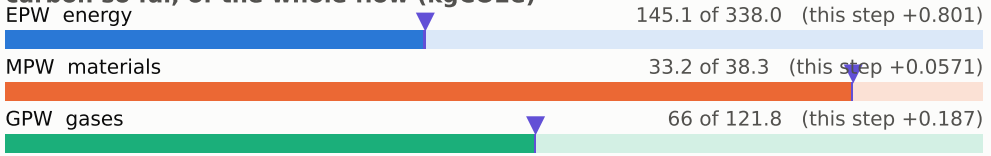

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

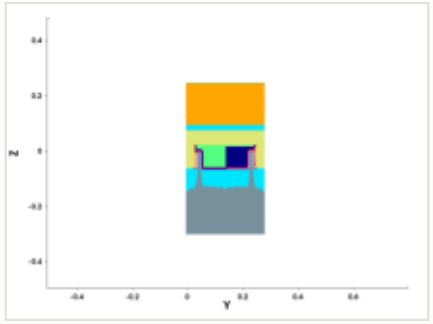

y cut at 0.211 µm

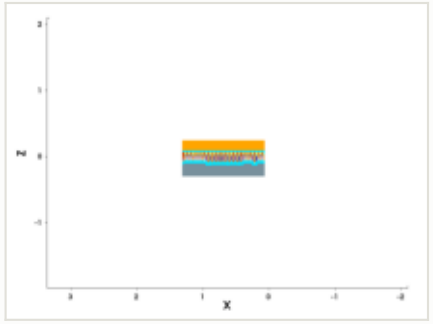

mask for this step

no mask for this step

steps by process area

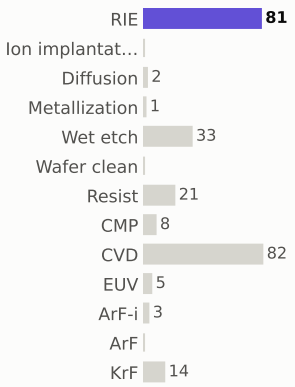

materials deposited (g)



gases emitted (g)



Step #2570: RIE

etch_anisotropic · RIE

1.04	245.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

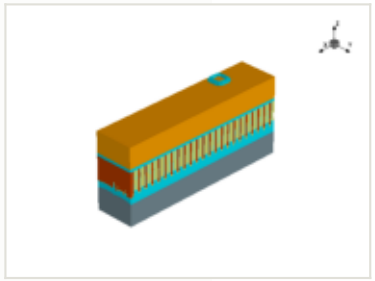

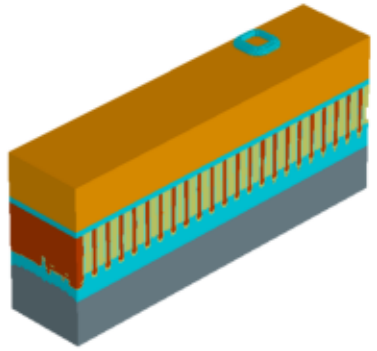

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

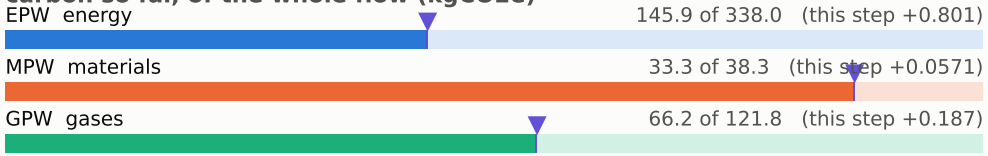

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

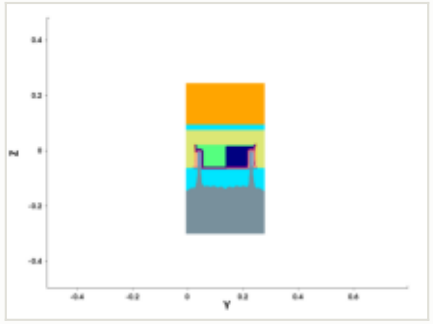

y cut at 0.211 µm

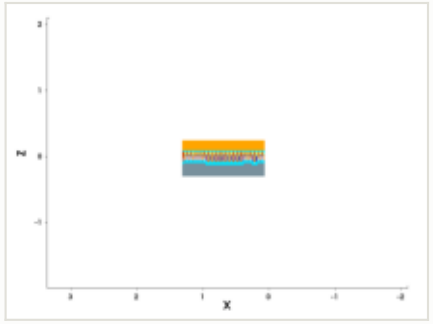

mask for this step

no mask for this step

steps by process area

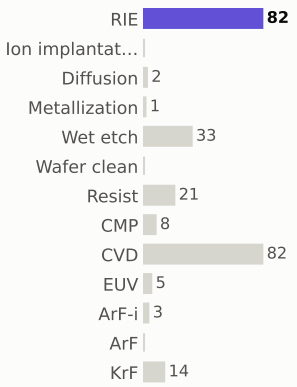

materials deposited (g)

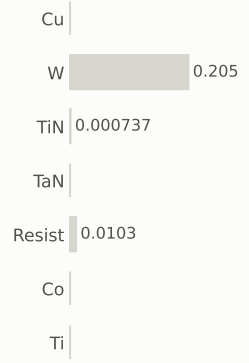

gases emitted (g)



Step #2580: RIE

etch_anisotropic · RIE

1.04	246.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

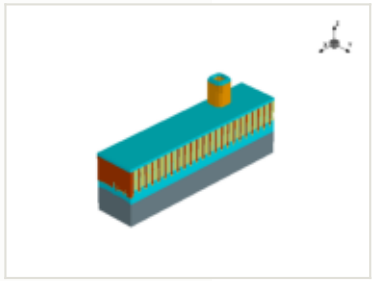

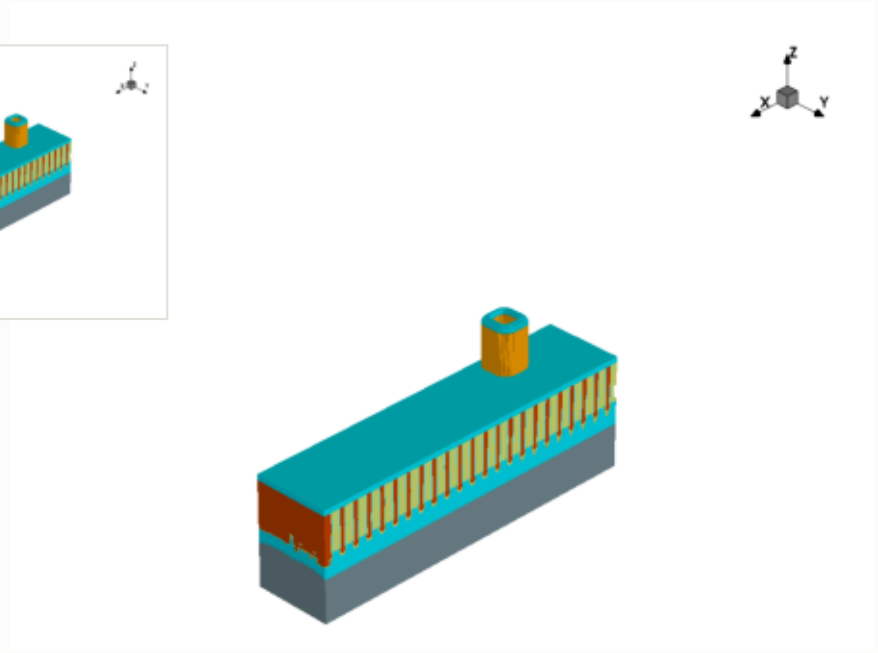

x cut at 0.677 µm

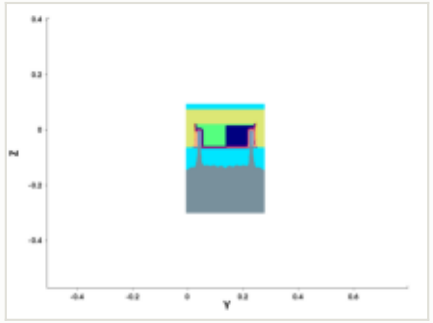

y cut at 0.211 µm

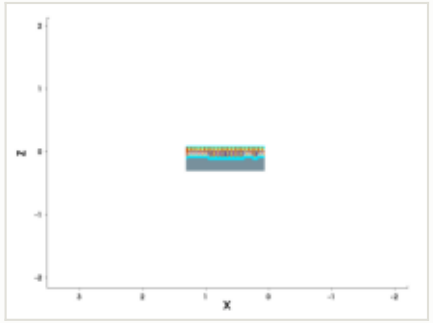

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

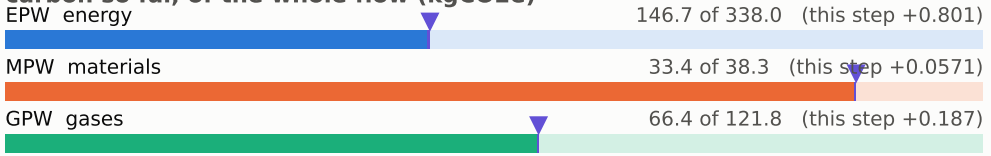

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

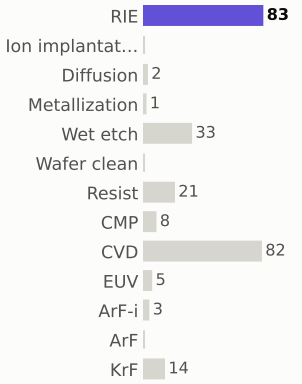

materials deposited (g)



gases emitted (g)



Step #2590: RIE

etch_anisotropic · RIE

1.04	247.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

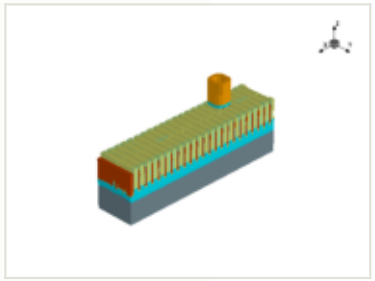

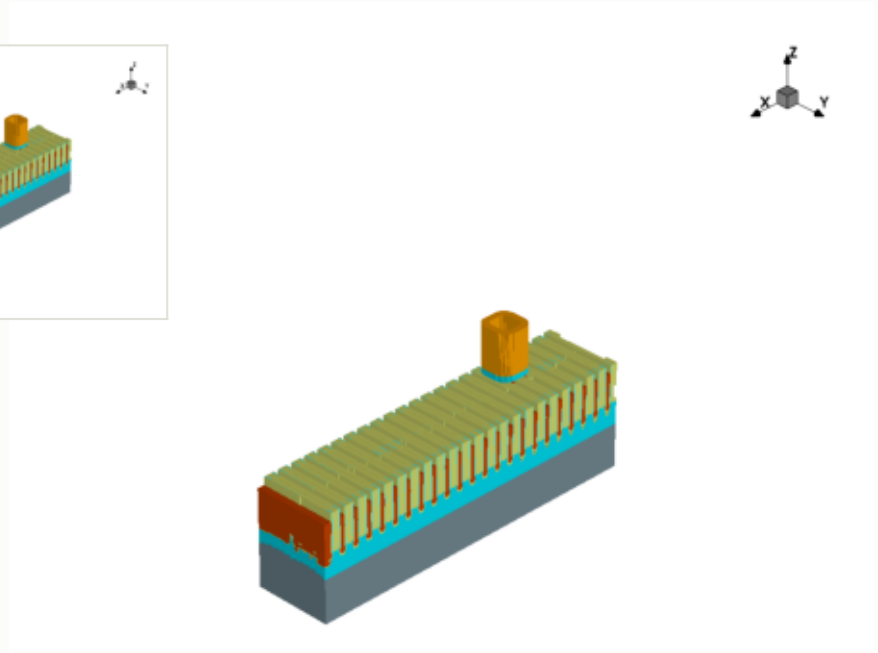

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

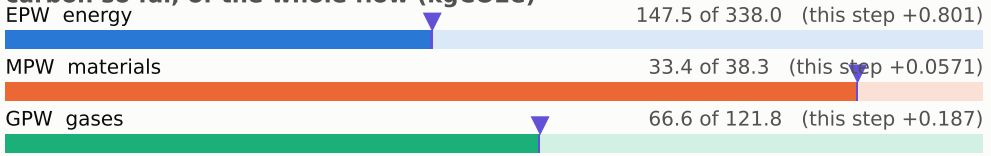

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

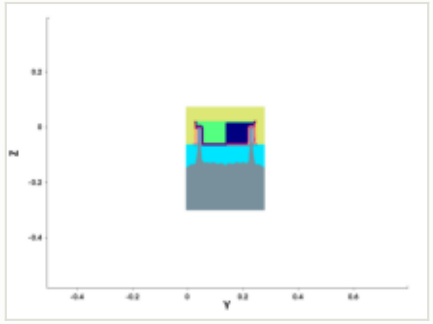

y cut at 0.211 µm

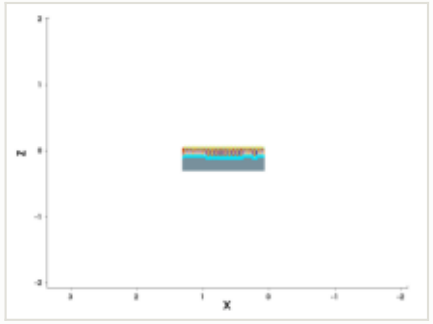

mask for this step

no mask for this step

steps by process area

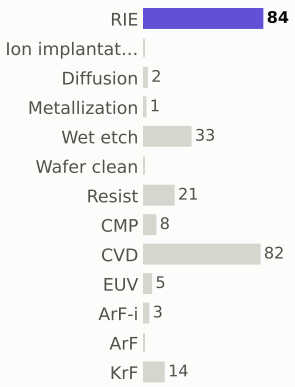

materials deposited (g)



gases emitted (g)



Step #2600: RIE

etch_unified · RIE

1.04	248.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

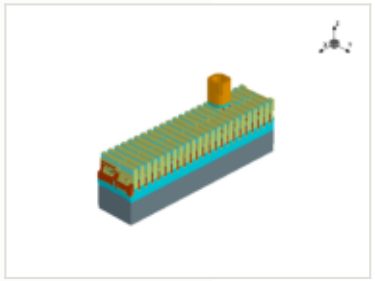

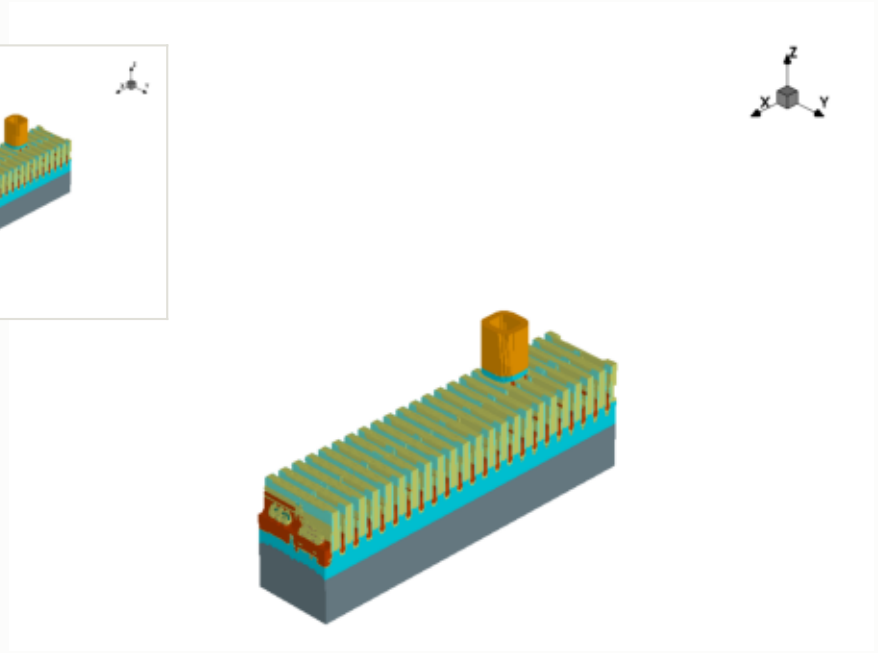

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

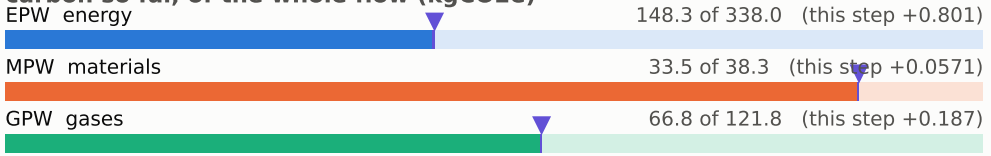

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

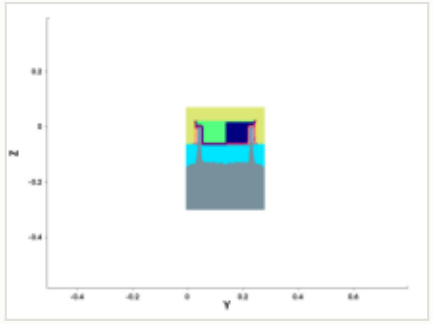

y cut at 0.211 µm

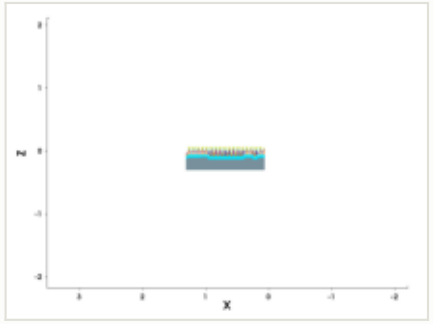

mask for this step

no mask for this step

steps by process area

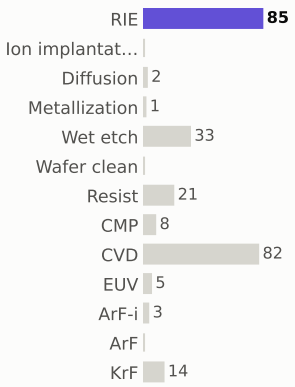

materials deposited (g)

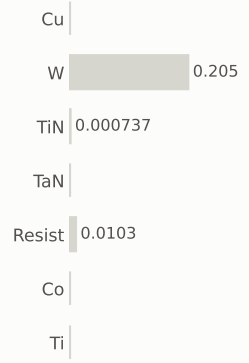

gases emitted (g)



Step #2610: Resist

etch_strip · Resist

0.169	248.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

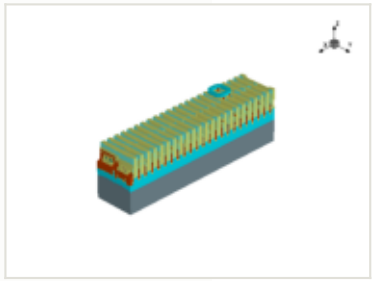

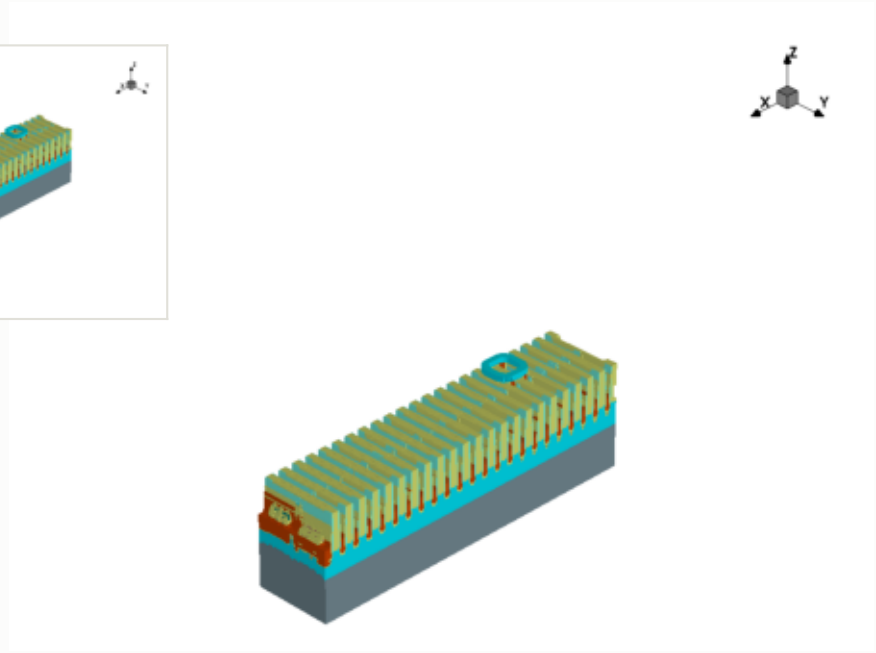

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

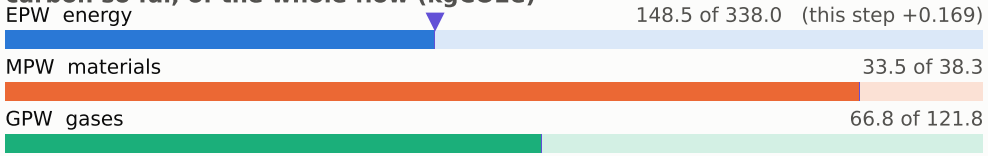

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

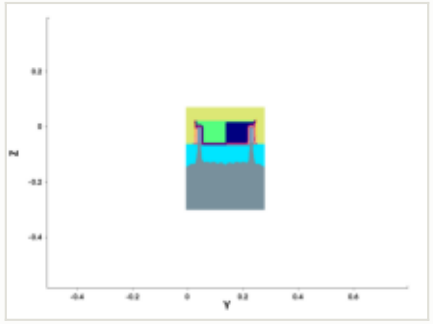

y cut at 0.211 µm

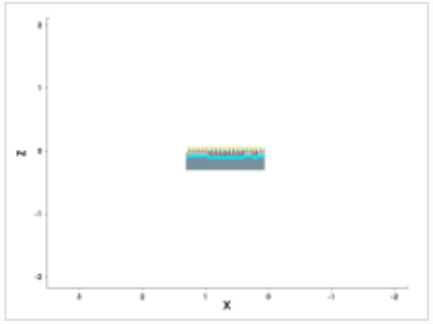

mask for this step

no mask for this step

steps by process area

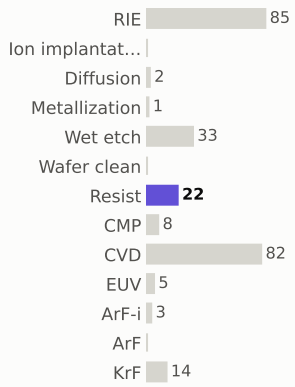

materials deposited (g)



gases emitted (g)

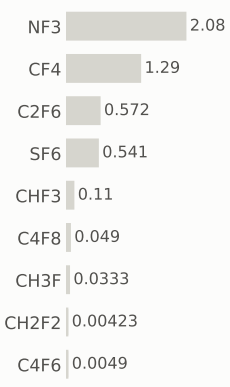

Step #2620: CVD

depo_isotropic · CVD

1.31	250.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

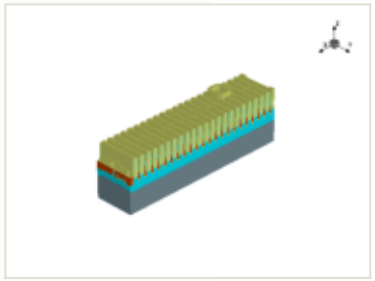

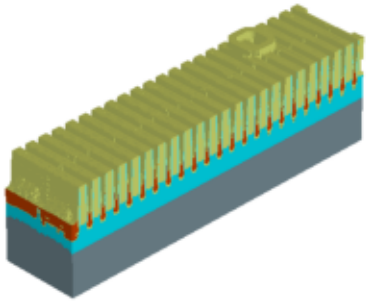

x cut at 0.677 µm

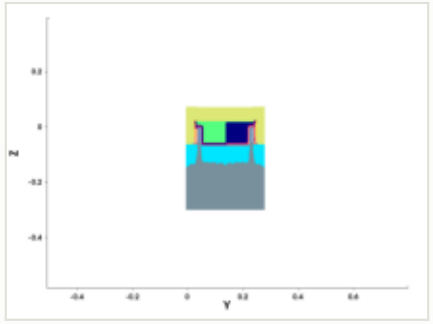

y cut at 0.211 µm

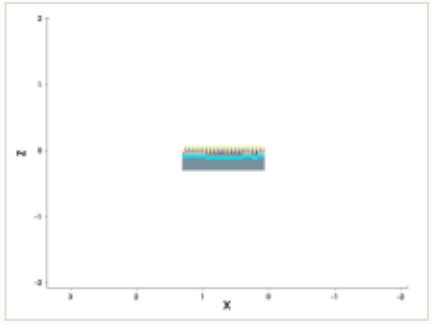

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0015 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

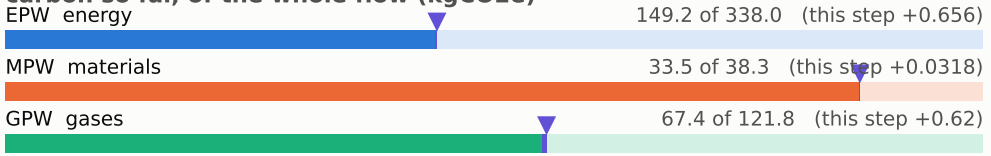

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

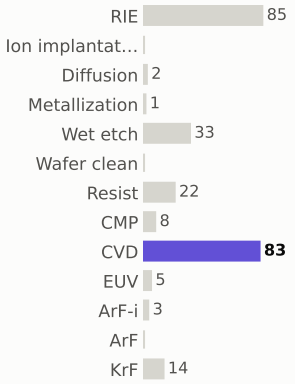

materials deposited (g)



gases emitted (g)



Step #2630: CVD

depo_isotropic · CVD

1.31	251.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

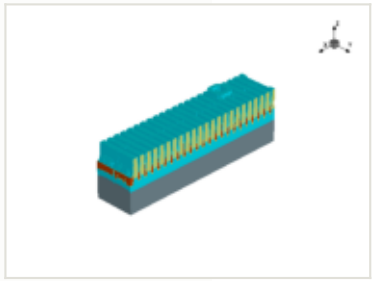

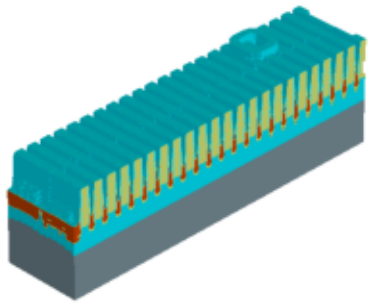

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

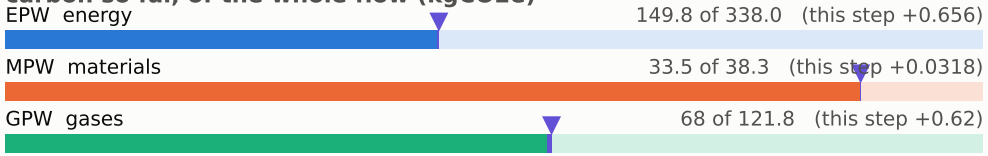

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

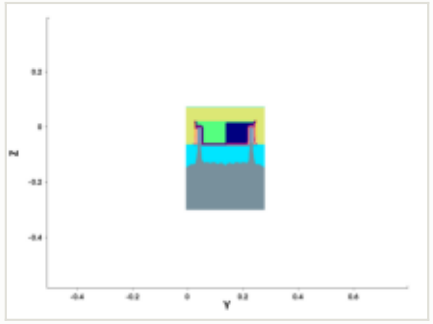

y cut at 0.211 µm

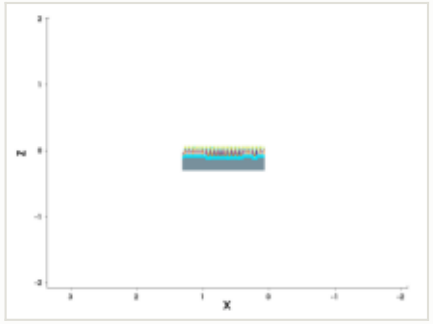

mask for this step

no mask for this step

steps by process area

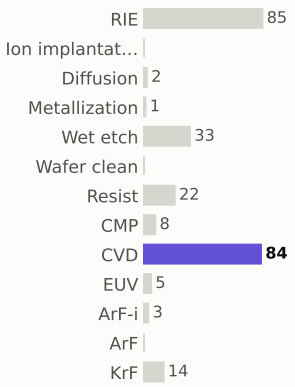

materials deposited (g)



gases emitted (g)



Step #2640: RIE

etch_anisotropic · RIE

1.04	252.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

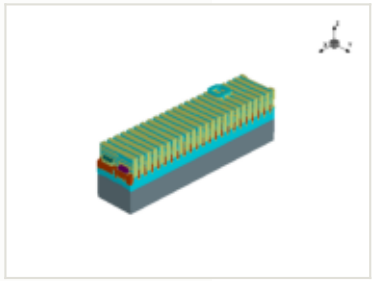



x cut at 0.677 µm

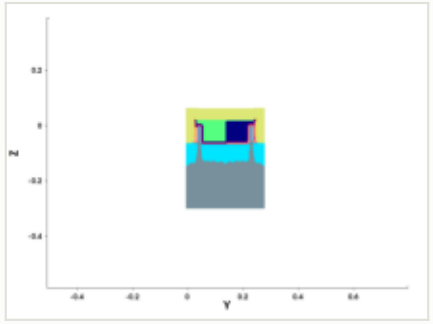

y cut at 0.211 µm

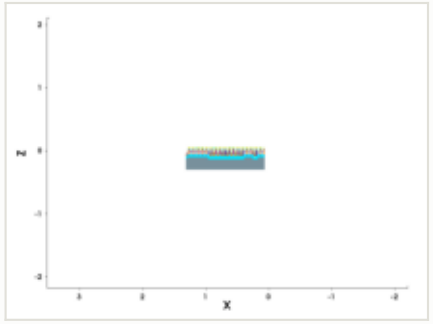

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

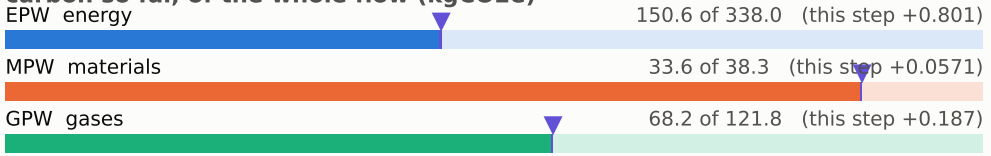

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #2650: RIE

etch_anisotropic · RIE

1.04	253.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

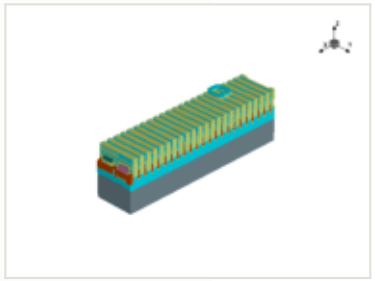

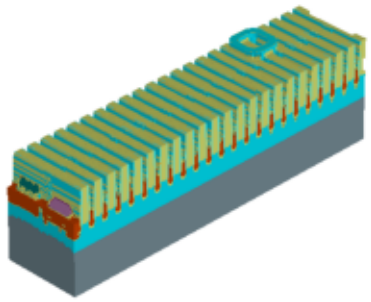

x cut at 0.677 µm

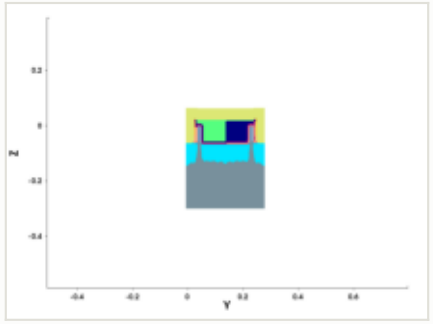

y cut at 0.211 µm

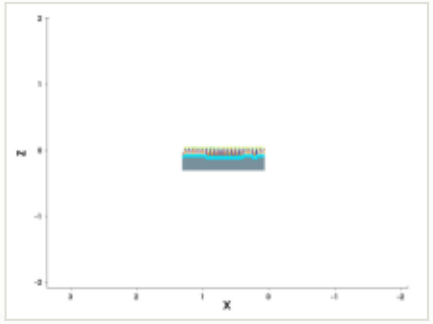

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

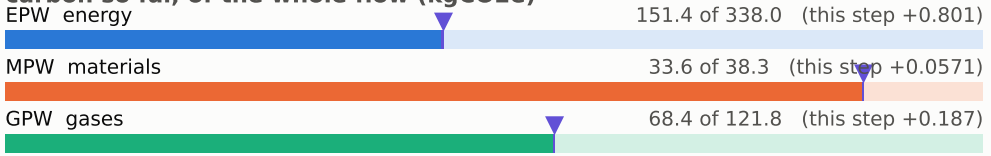

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #2660: RIE

etch_anisotropic · RIE

1.04	254.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

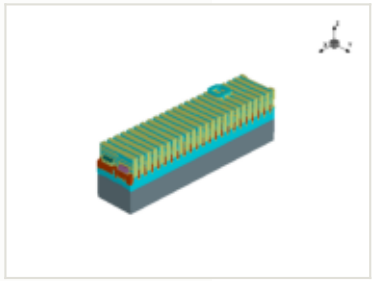



x cut at 0.677 µm

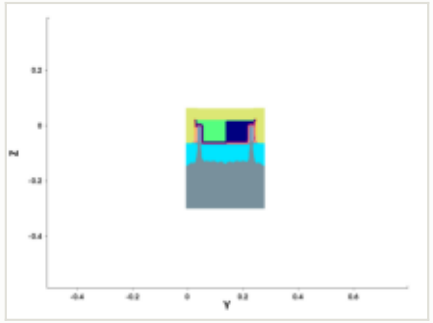

y cut at 0.211 µm

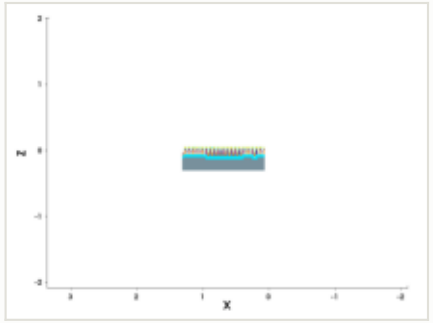

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

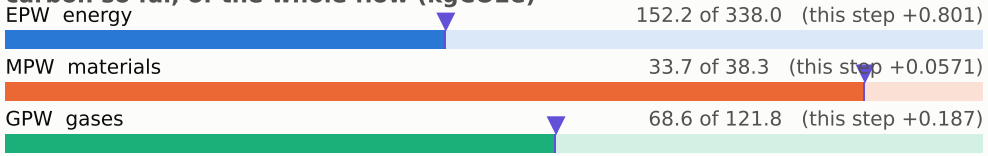

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

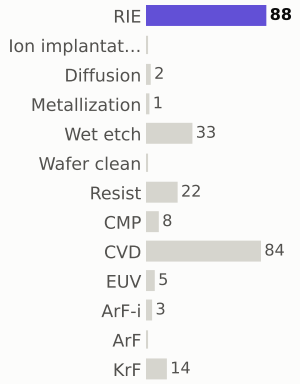

materials deposited (g)



gases emitted (g)



Step #2670: Metallization

depo_isotropic · Metallization

1.2	255.7	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

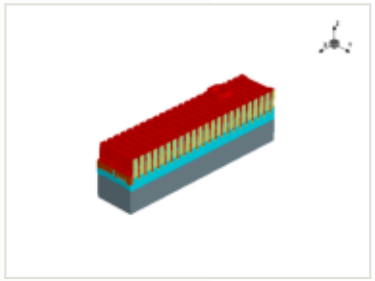

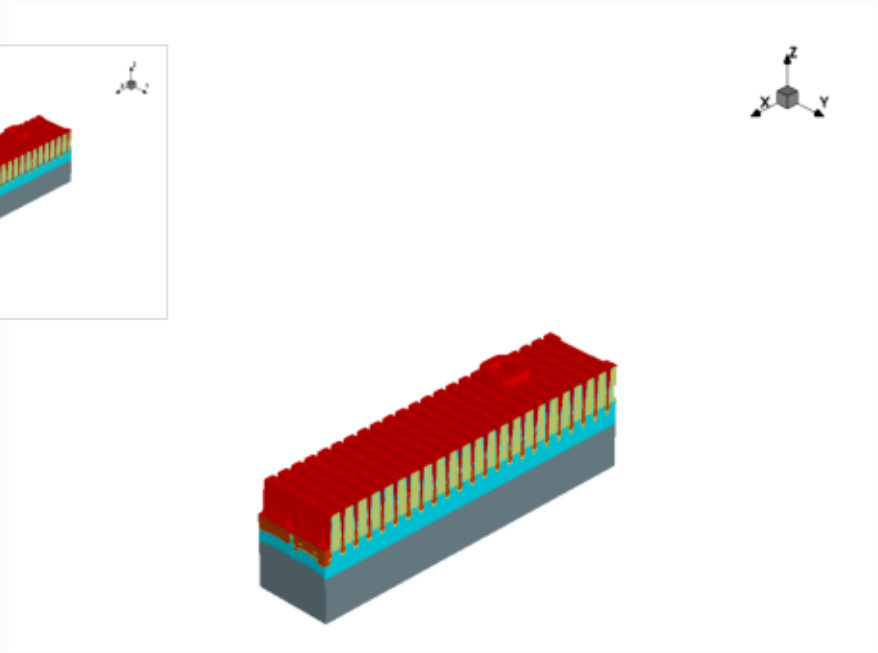

this step

process area	Metallization
material	Ti
thickness	0.0016 µm
material GWP	47.6334 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	2.42e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

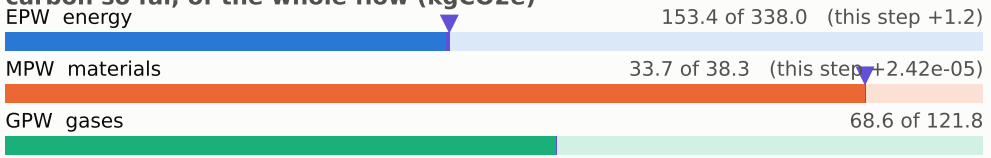

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

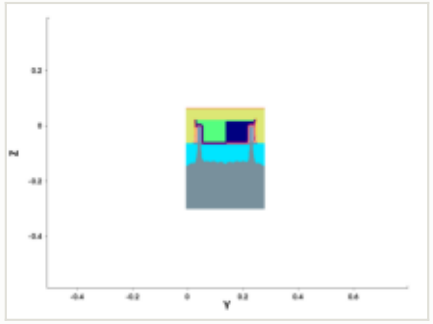

y cut at 0.211 µm

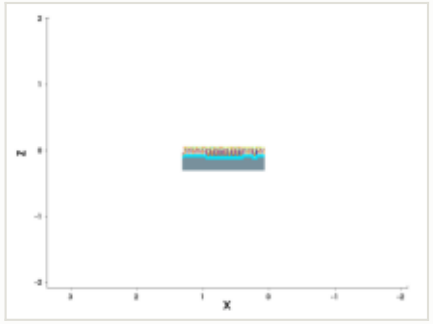

mask for this step

no mask for this step

steps by process area

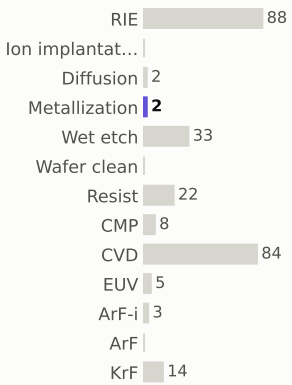

materials deposited (g)



gases emitted (g)



Step #2680: Diffusion

interface_growth · Diffusion

0.801	256.5	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

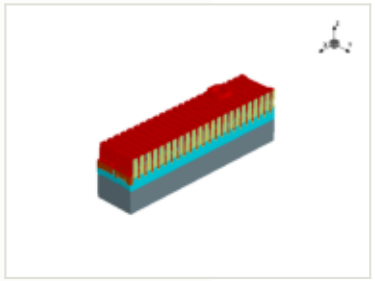

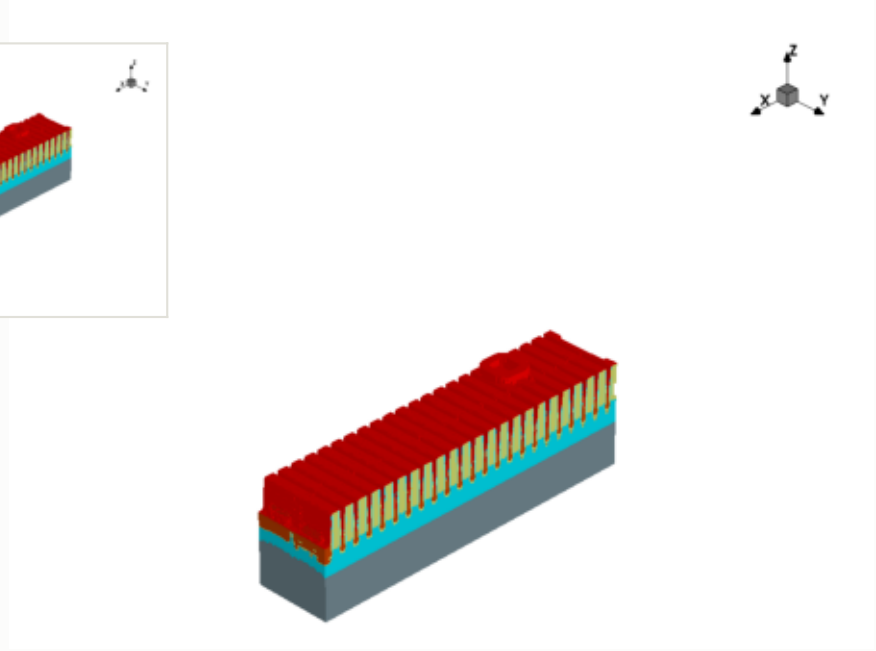

x cut at 0.677 µm

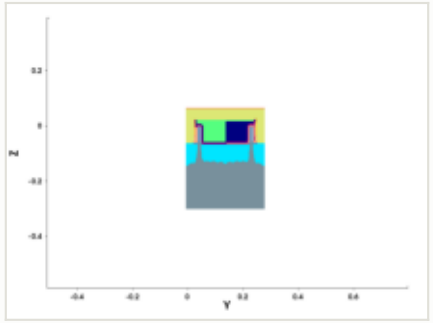

y cut at 0.211 µm

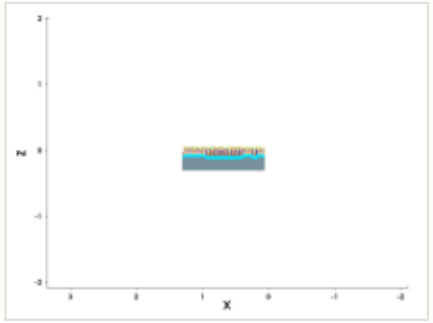

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

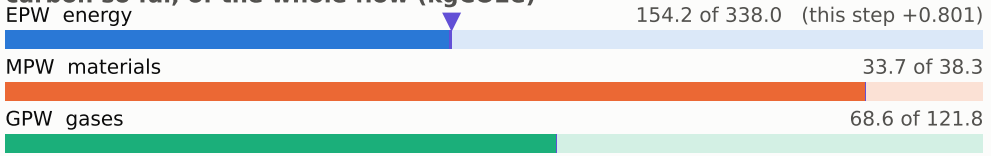

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

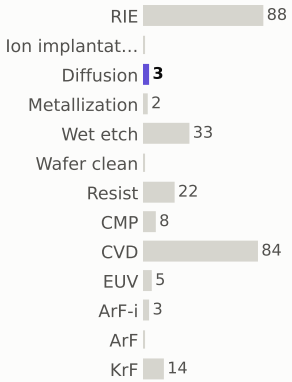

materials deposited (g)



gases emitted (g)



Step #2690: Wet_etch

etch_isotropic · Wet_etch

0.169	256.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

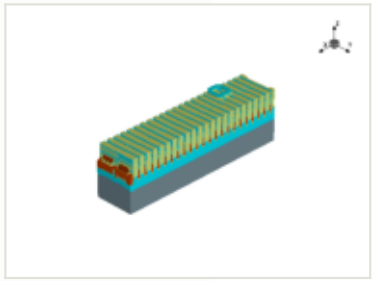

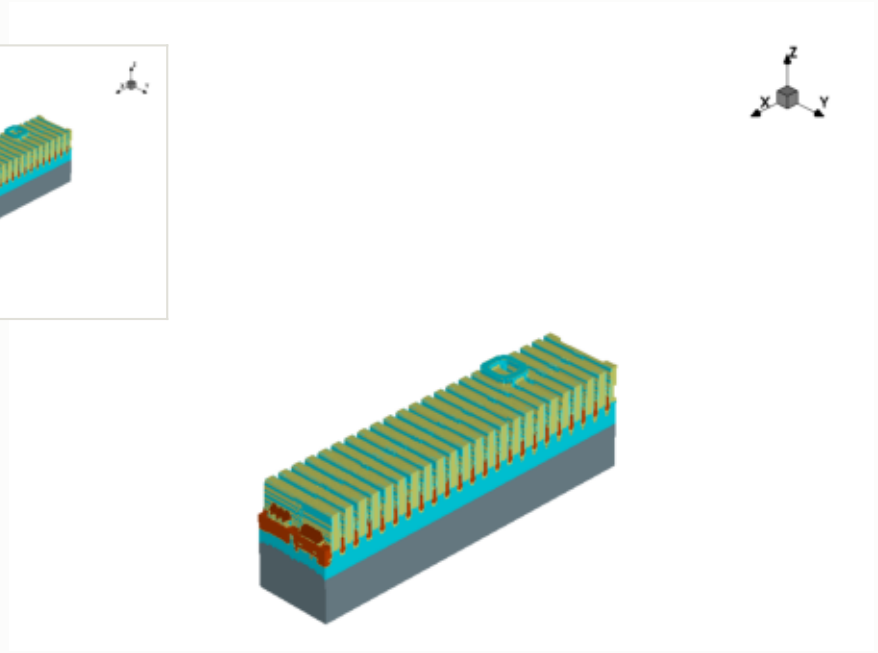

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

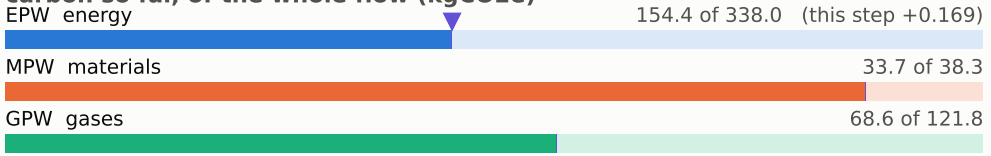

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

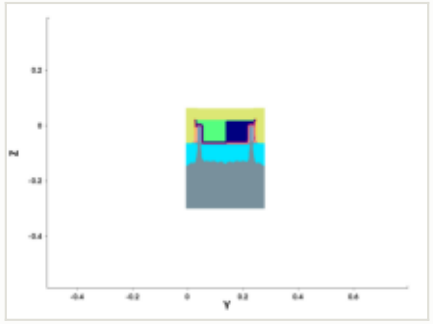

y cut at 0.211 µm

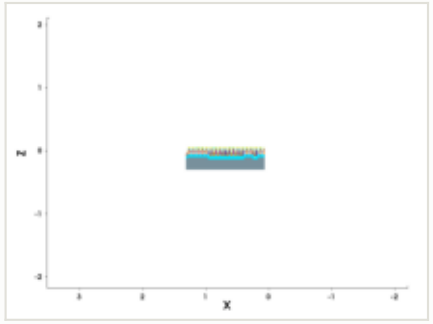

mask for this step

no mask for this step

steps by process area

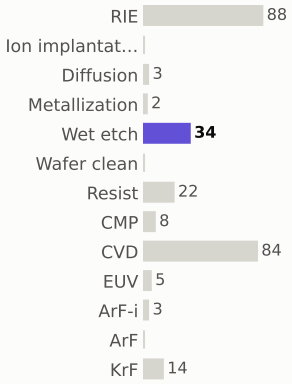

materials deposited (g)



gases emitted (g)



Step #2700: Metallization

depo_isotropic · Metallization

1.2	257.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

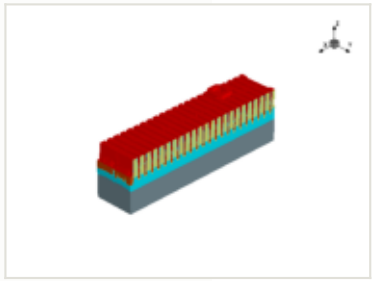

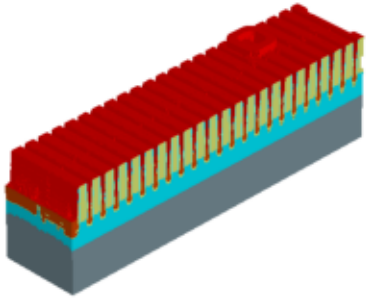

this step

process area	Metallization
material	Ti
thickness	0.001 µm
material GWP	47.6334 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	1.52e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

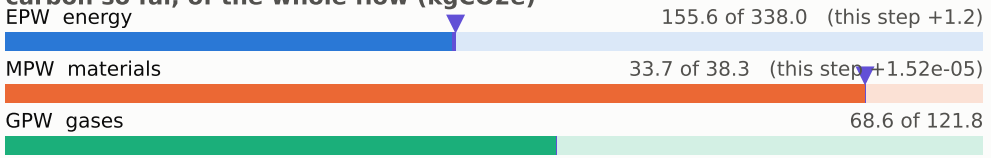

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

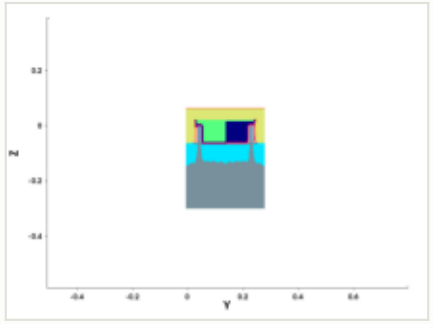

y cut at 0.211 µm

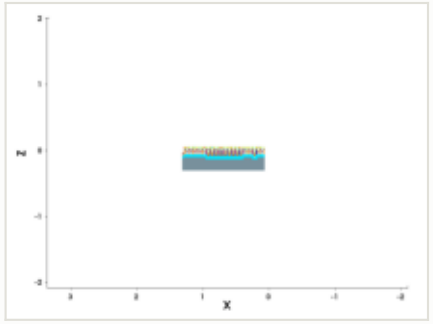

mask for this step

no mask for this step

steps by process area

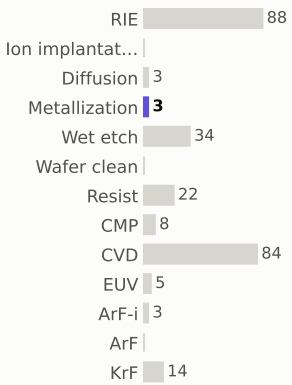

materials deposited (g)



gases emitted (g)



Step #2710: CVD

depo_isotropic · CVD

1.31	259.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

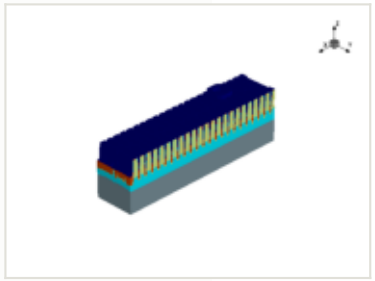



x cut at 0.677 µm

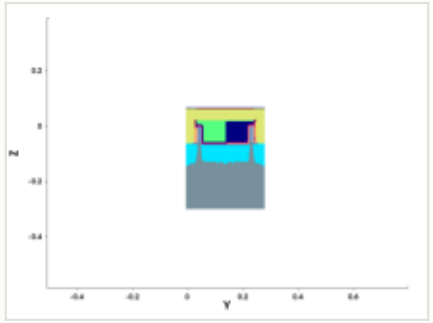

y cut at 0.211 µm

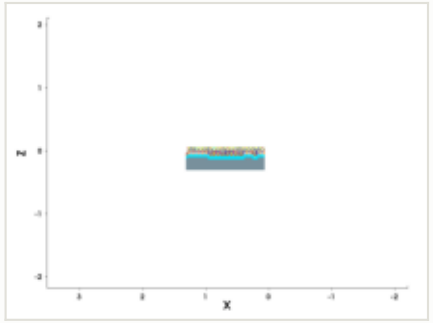

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.0025 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

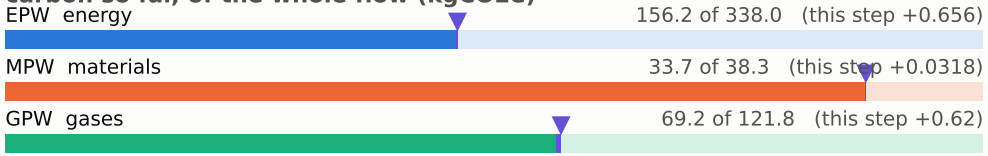

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

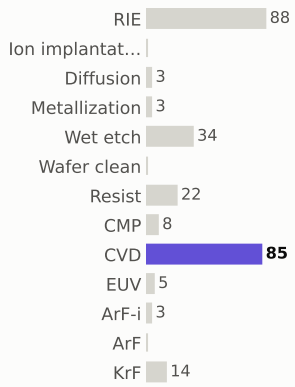

materials deposited (g)



gases emitted (g)



Step #2720: Metallization

depo_isotropic · Metallization

1.22	260.4	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

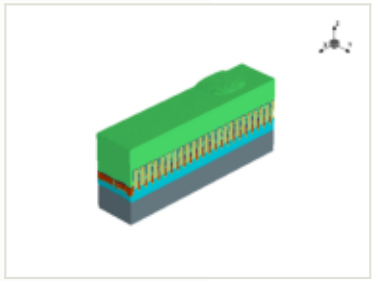

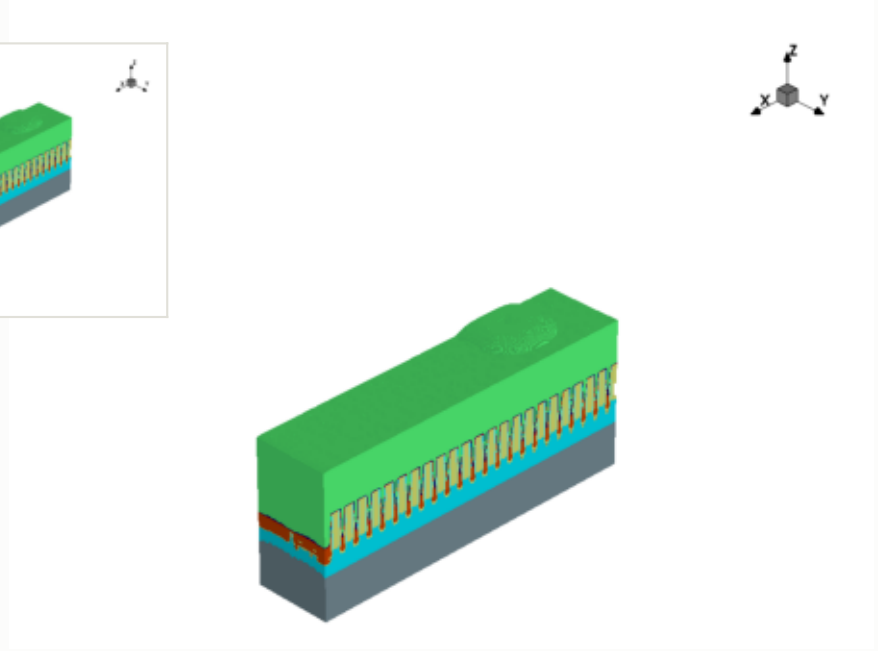

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

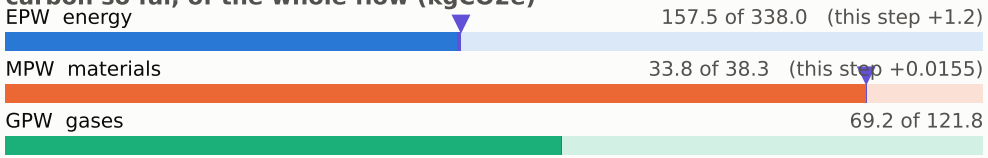

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

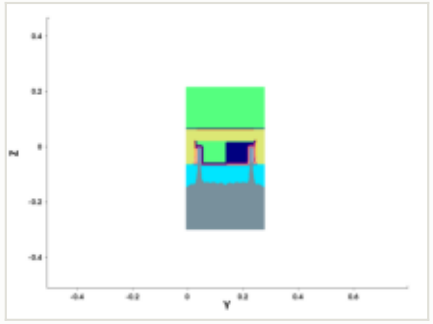

y cut at 0.211 µm

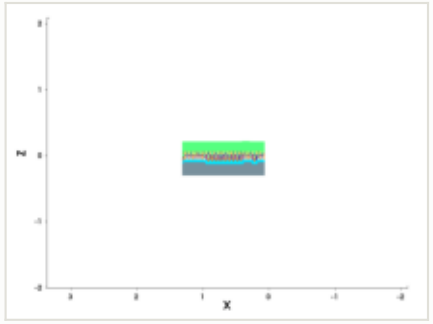

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #2730: CMP

etch_cmp · CMP

0.169	260.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

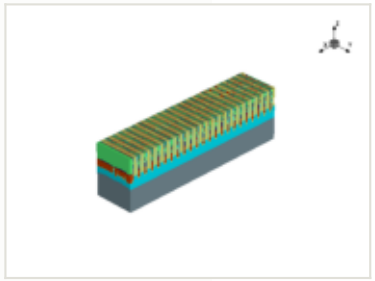

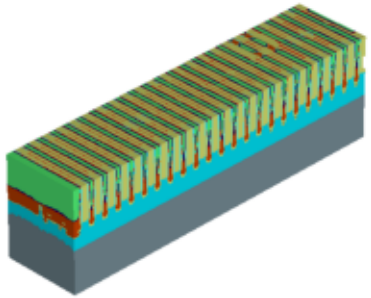

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

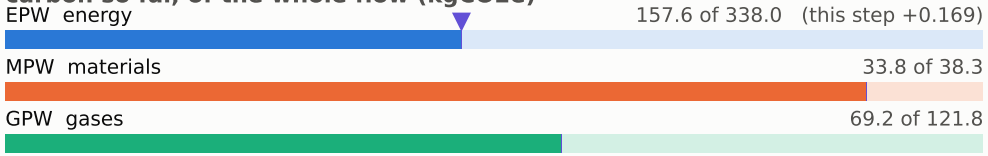

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

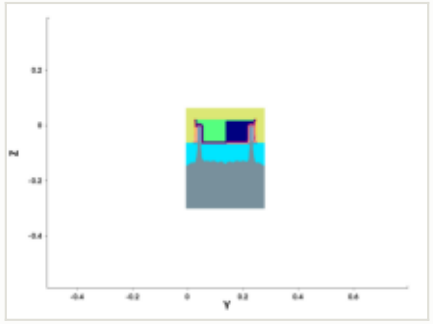

y cut at 0.211 µm

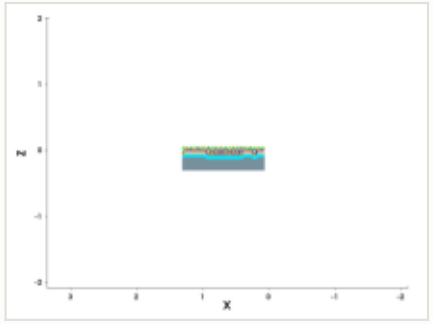

mask for this step

no mask for this step

steps by process area

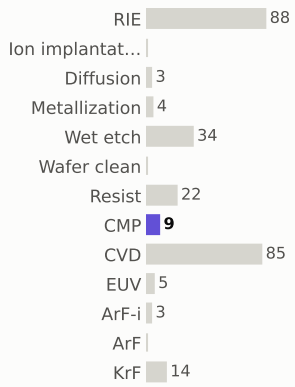

materials deposited (g)



gases emitted (g)



Step #2740: CVD

depo_fill · CVD

1.31	261.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

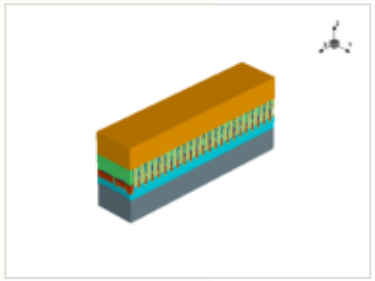

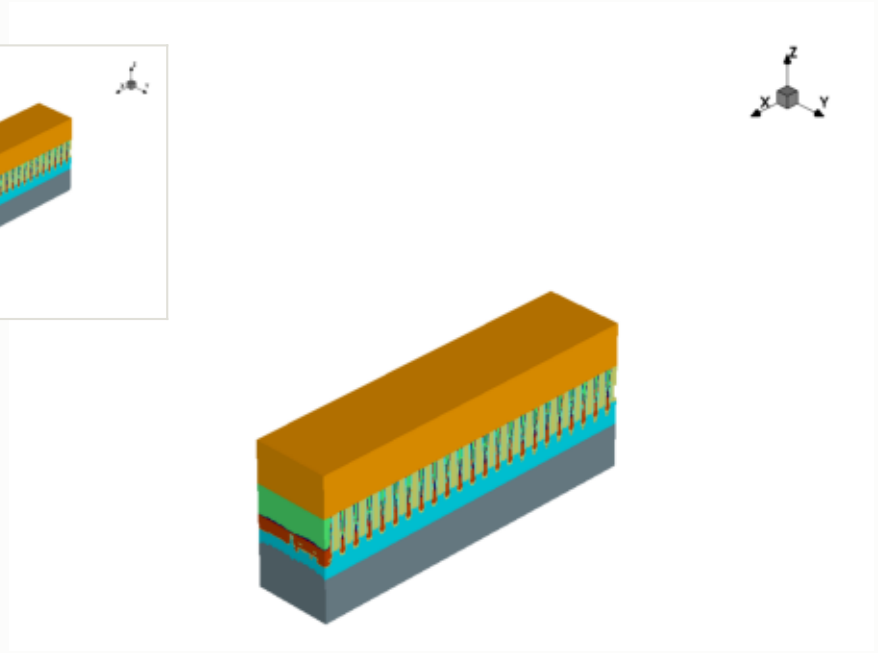

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

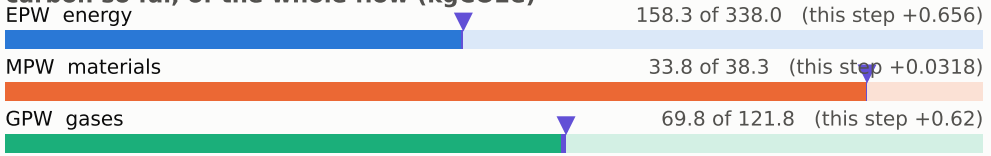

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

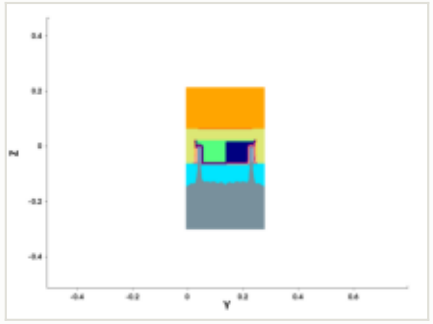

y cut at 0.211 µm

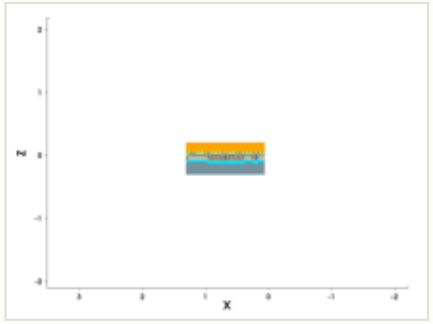

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #2750: CVD

depo_fill · CVD

1.31	263.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

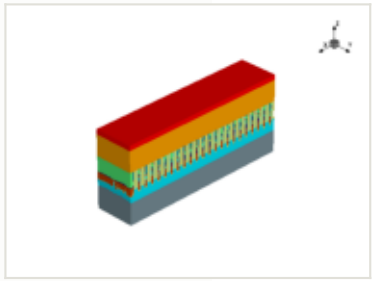

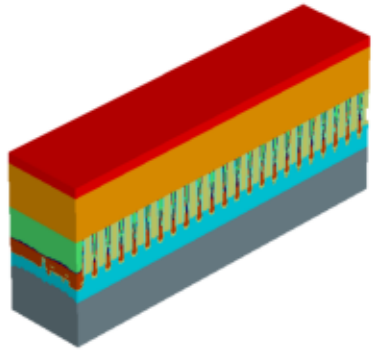

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

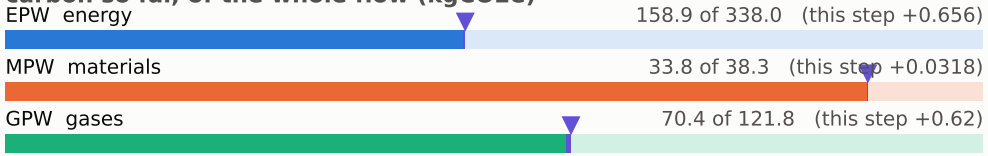

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

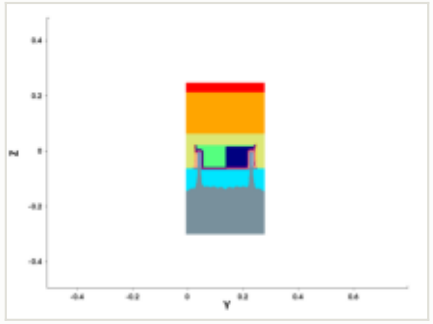

y cut at 0.211 µm

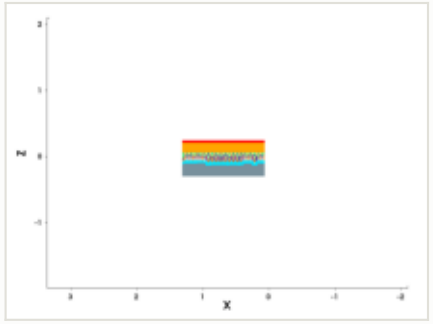

mask for this step

no mask for this step

steps by process area

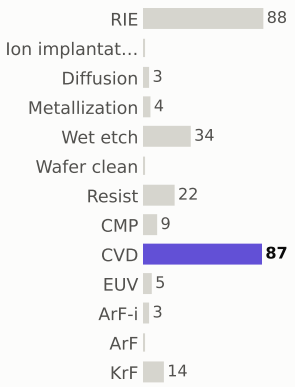

materials deposited (g)



gases emitted (g)



Step #2760: EUV

litho_patterning · EUV

1.96	265.1	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

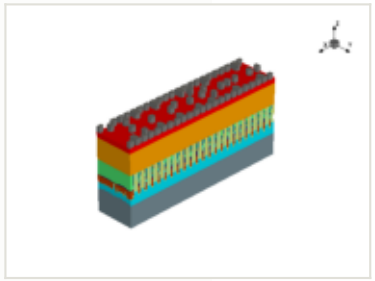

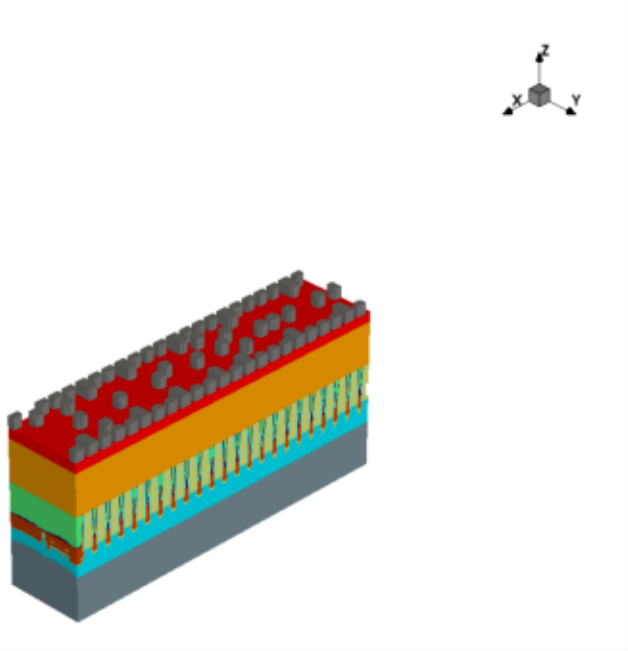

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

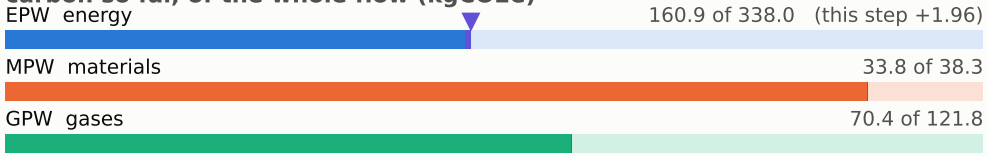

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

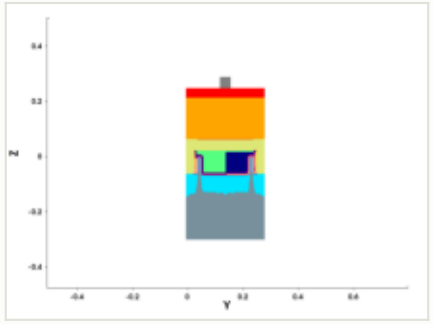

y cut at 0.211 µm

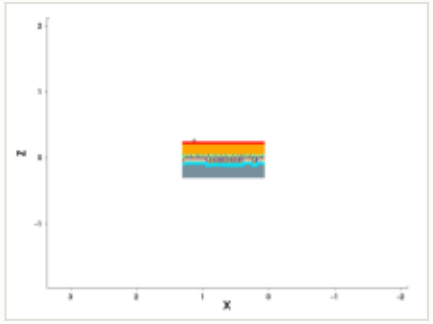

mask: layer 505:0 (GDSII)



steps by process area

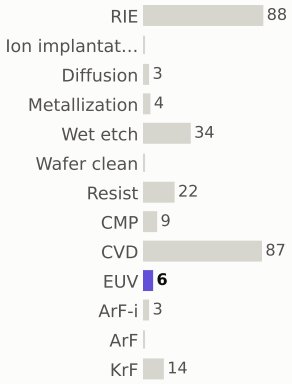

materials deposited (g)



gases emitted (g)



Step #2770: RIE

etch_anisotropic · RIE

1.04	266.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

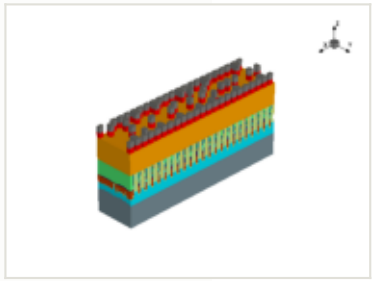

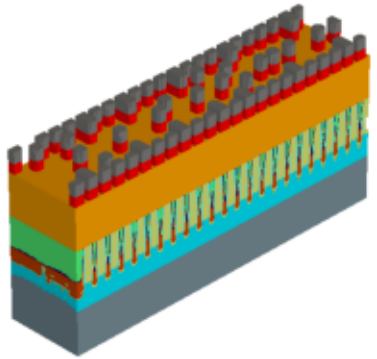

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

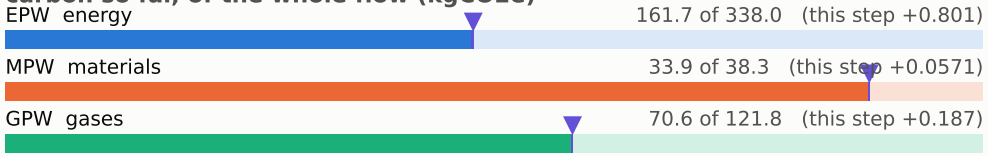

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

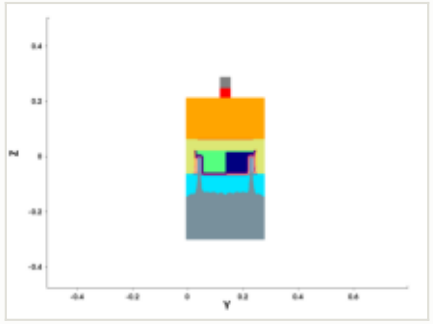

y cut at 0.211 µm

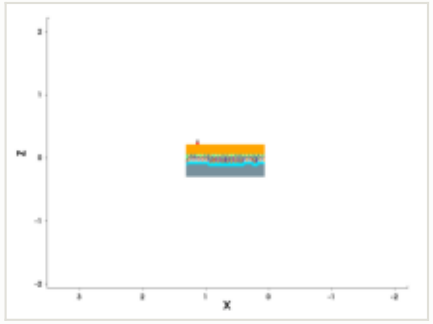

mask for this step

no mask for this step

steps by process area

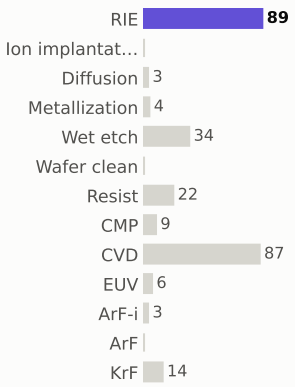

materials deposited (g)



gases emitted (g)



Step #2780: RIE

etch_anisotropic · RIE

1.04	267.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

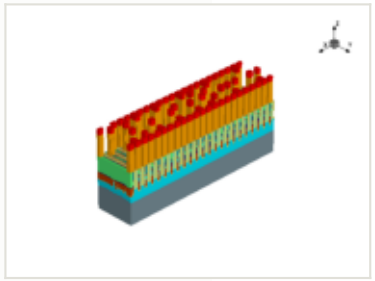

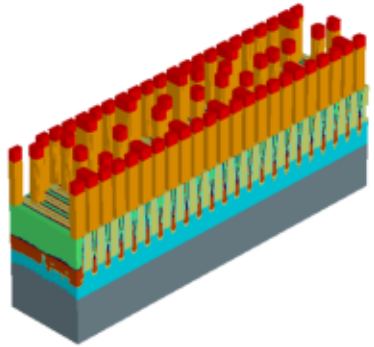

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

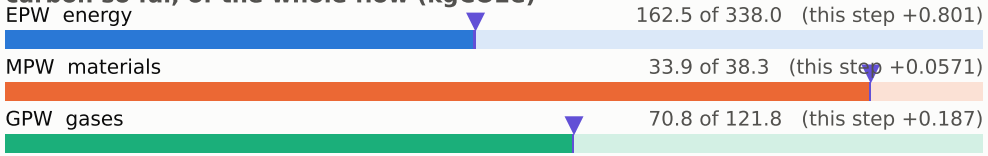

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

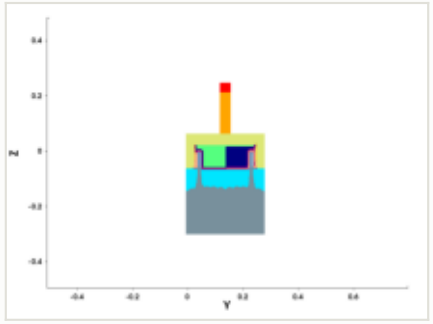

y cut at 0.211 µm

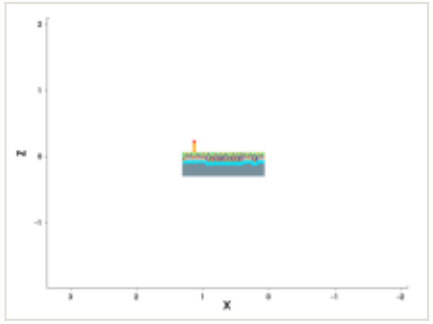

mask for this step

no mask for this step

steps by process area

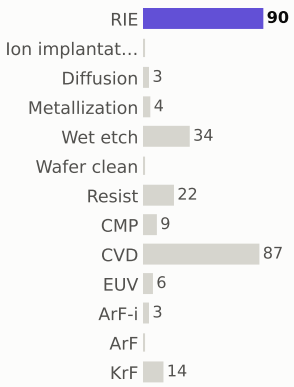

materials deposited (g)



gases emitted (g)



Step #2790: RIE

etch_anisotropic · RIE

1.04	268.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

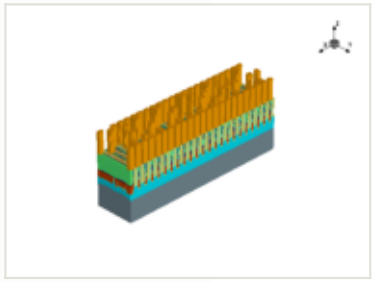

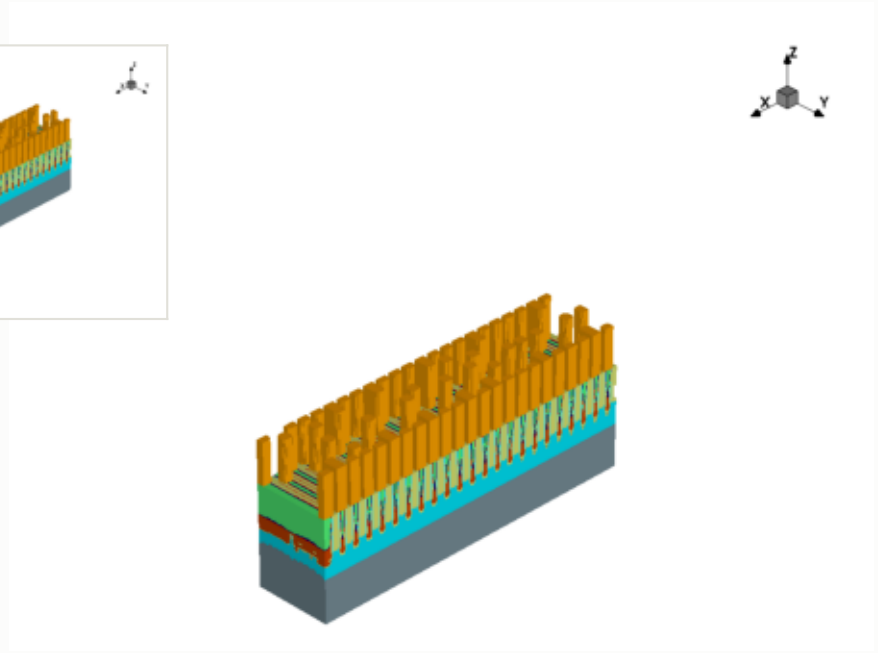

x cut at 0.677 µm

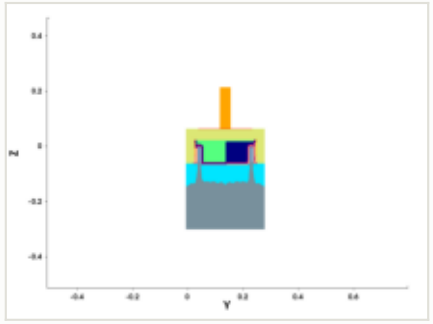

y cut at 0.211 µm

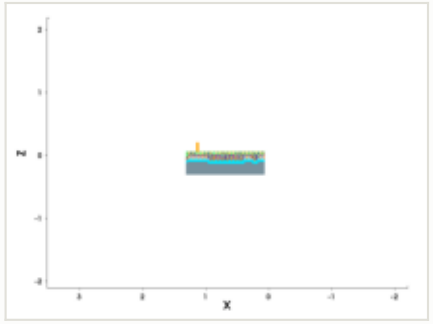

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

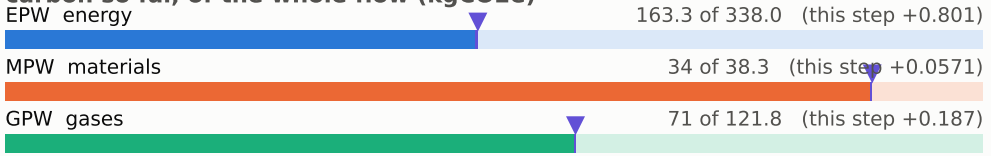

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #2800: RIE

etch_unified · RIE

1.04	269.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

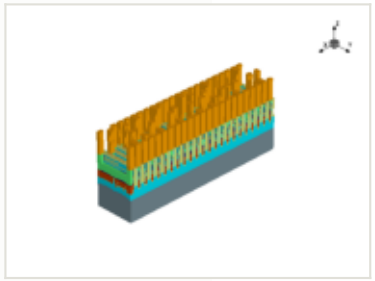

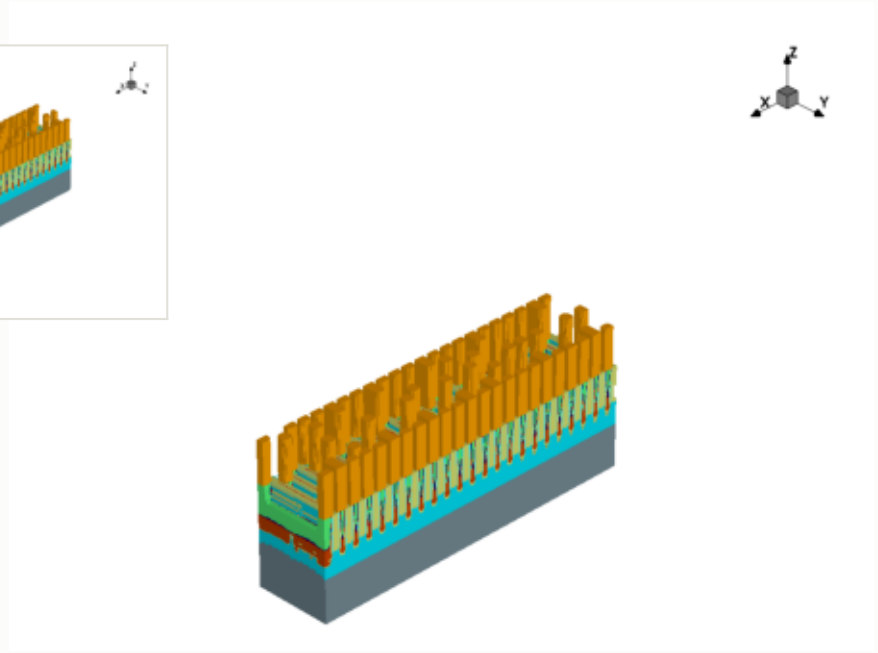

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

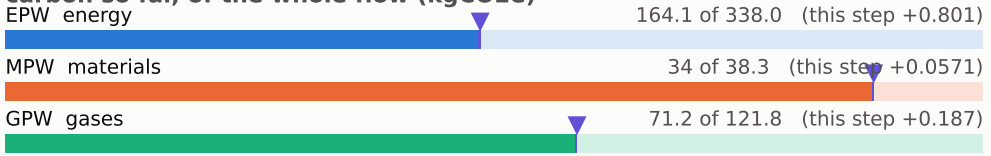

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

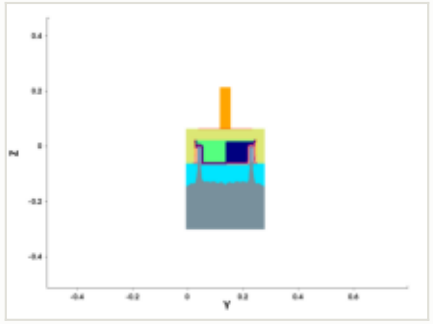

y cut at 0.211 µm

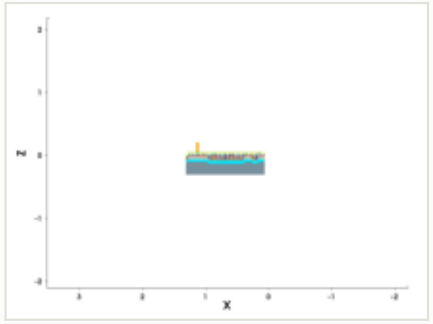

mask for this step

no mask for this step

steps by process area

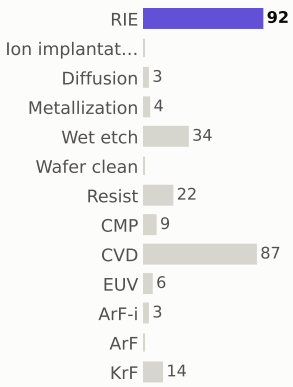

materials deposited (g)



gases emitted (g)



Step #2810: Resist

etch_strip · Resist

0.169	269.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

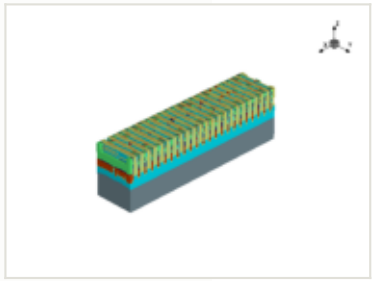

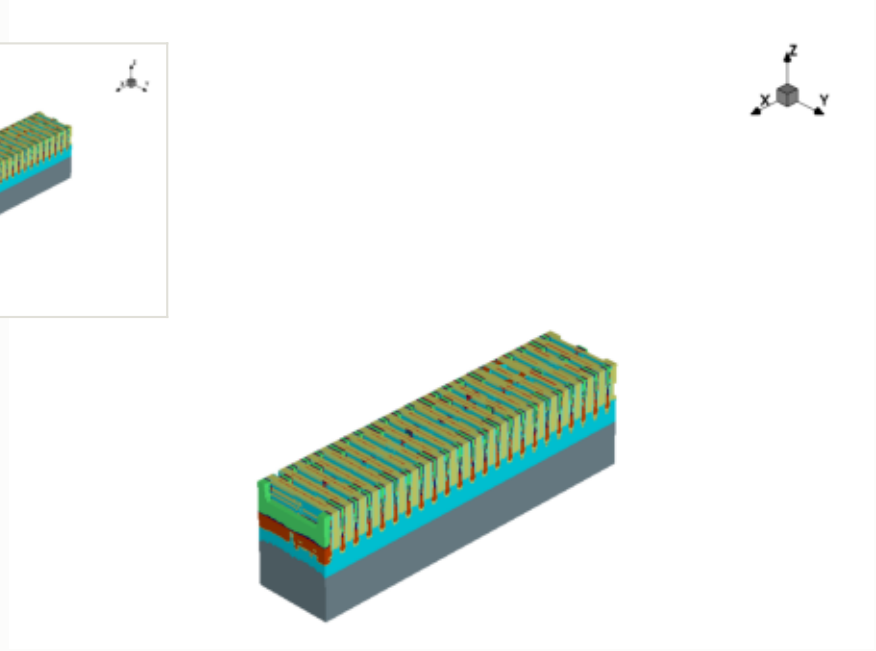

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

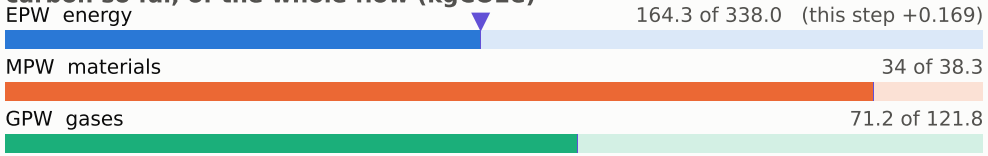

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

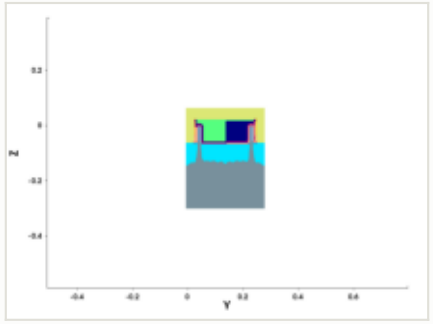

y cut at 0.211 µm

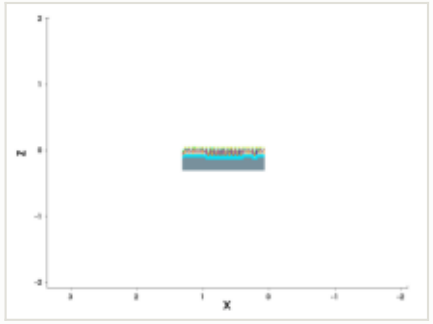

mask for this step

no mask for this step

steps by process area

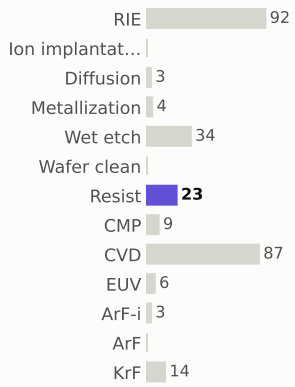

materials deposited (g)



gases emitted (g)



Step #2820: CVD

depo_isotropic · CVD

1.31	270.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

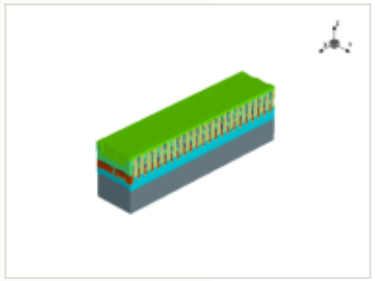

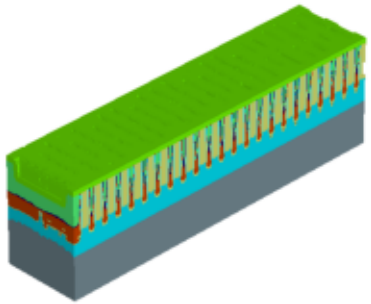

x cut at 0.677 µm

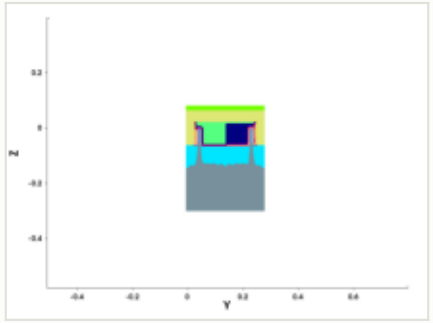

y cut at 0.211 µm

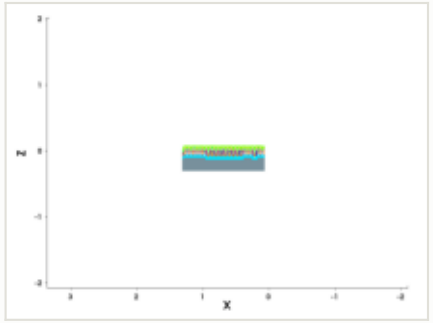

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.018 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

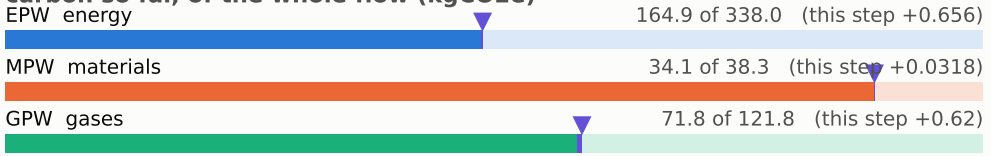

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #2830: CMP

etch_cmp · CMP

0.169	271.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

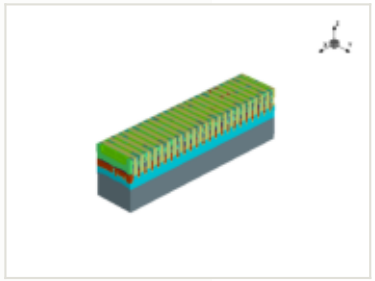

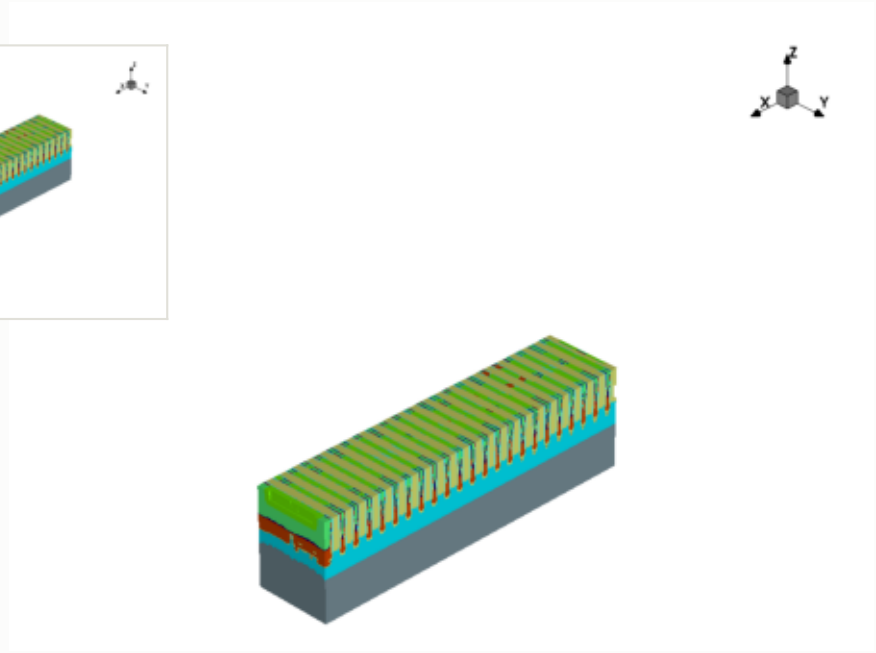

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

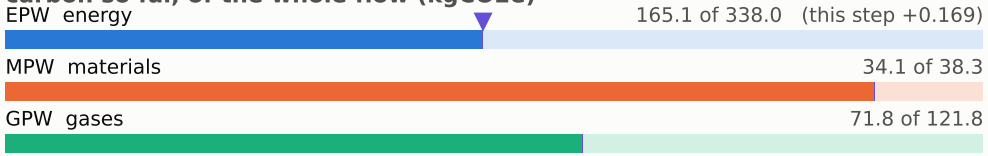

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

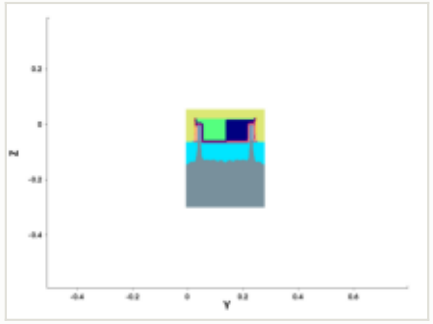

y cut at 0.211 µm

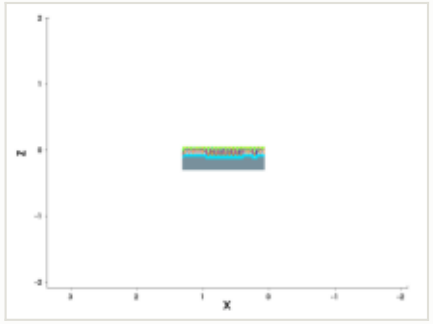

mask for this step

no mask for this step

steps by process area

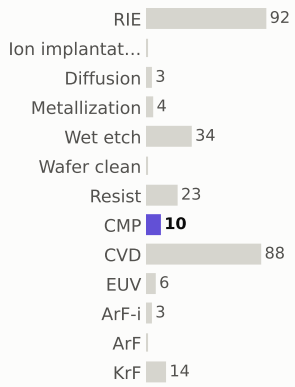

materials deposited (g)



gases emitted (g)



Step #2840: CVD

depo_fill · CVD

1.31	272.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

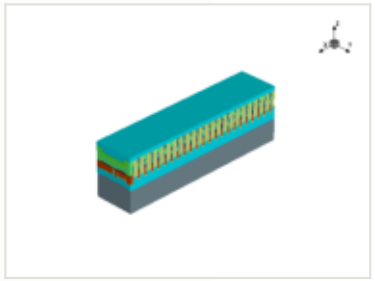

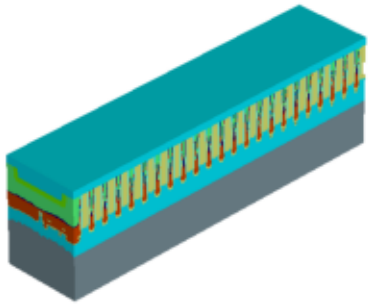

x cut at 0.677 µm

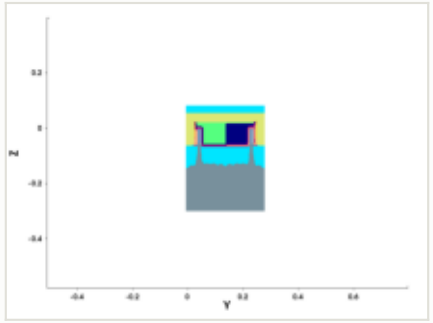

y cut at 0.211 µm

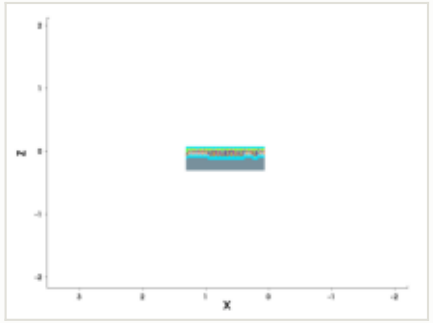

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 165.7 of 338.0 (this step +0.656)

MPW materials — 34.1 of 38.3 (this step +0.0318)

GPW gases — 72.4 of 121.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

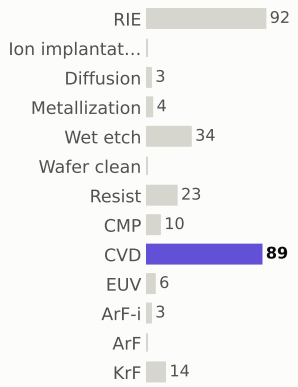

materials deposited (g)



gases emitted (g)



Step #2850: CVD

depo_fill · CVD

1.31	273.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

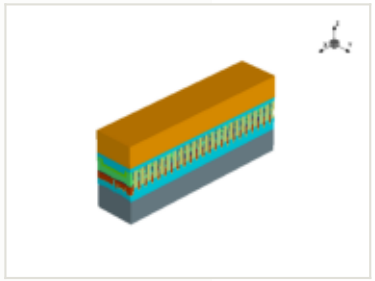

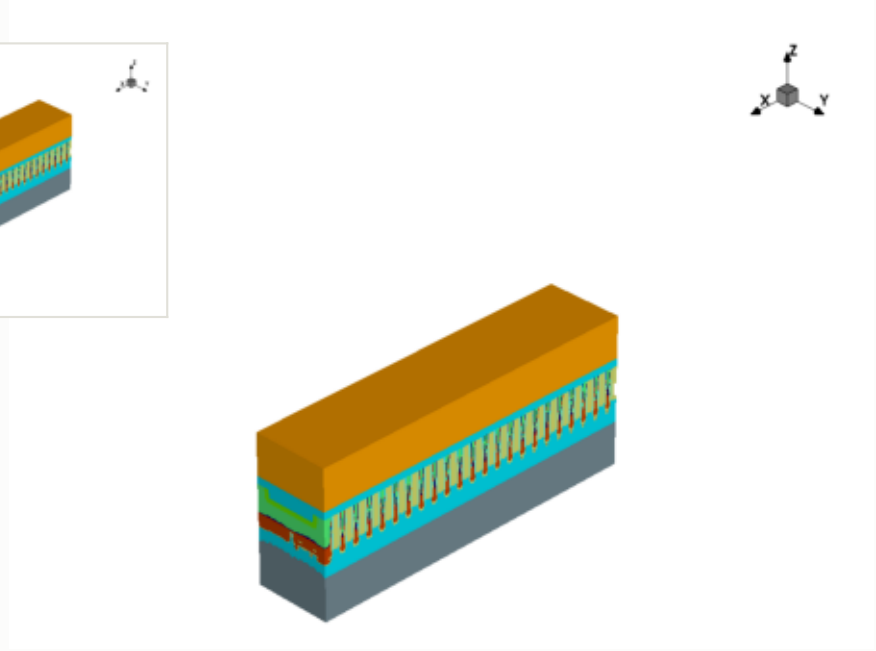

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

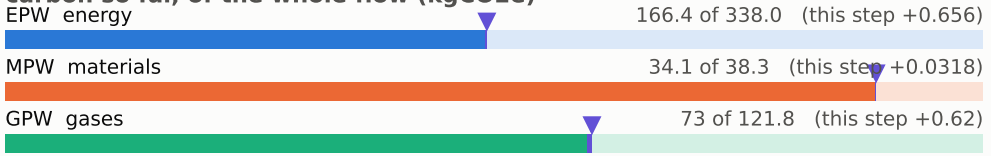

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

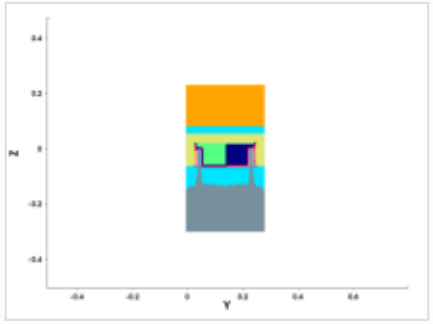

y cut at 0.211 µm

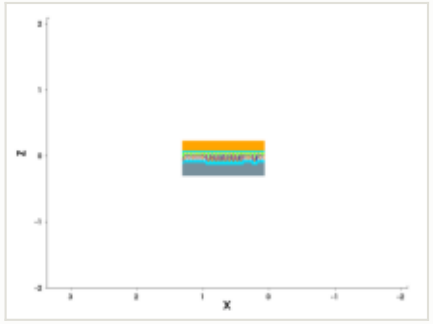

mask for this step

no mask for this step

steps by process area

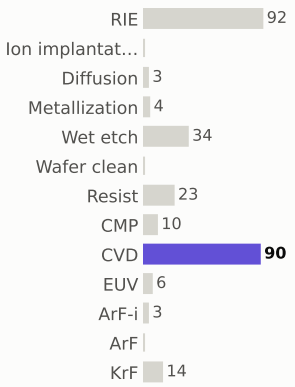

materials deposited (g)



gases emitted (g)



Step #2860: CVD

depo_fill · CVD

1.31	274.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

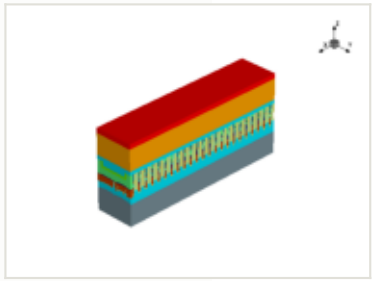

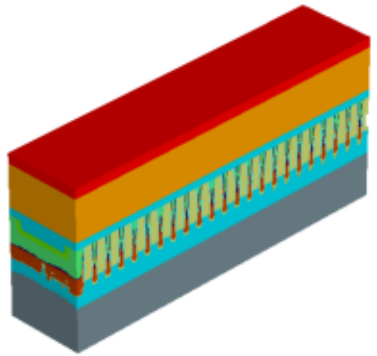

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

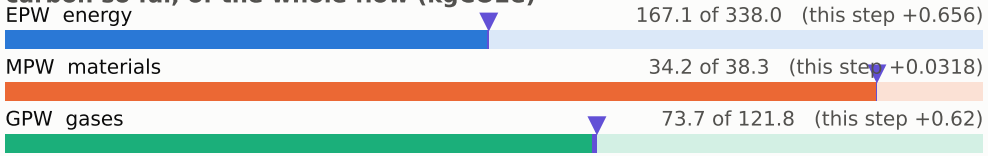

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

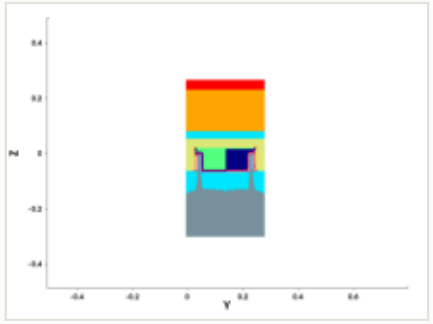

y cut at 0.211 µm

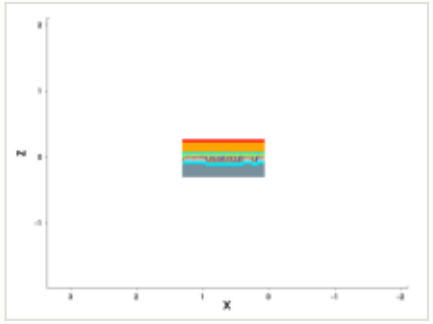

mask for this step

no mask for this step

steps by process area

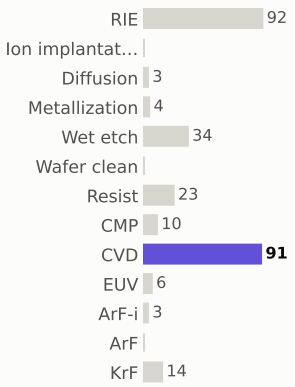

materials deposited (g)



gases emitted (g)



Step #2870: EUV

litho_patterning · EUV

1.96	276.9	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

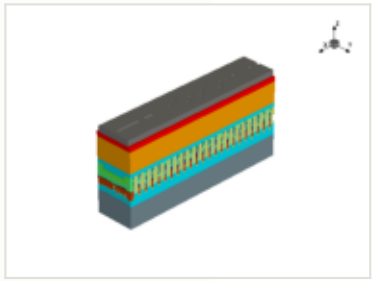

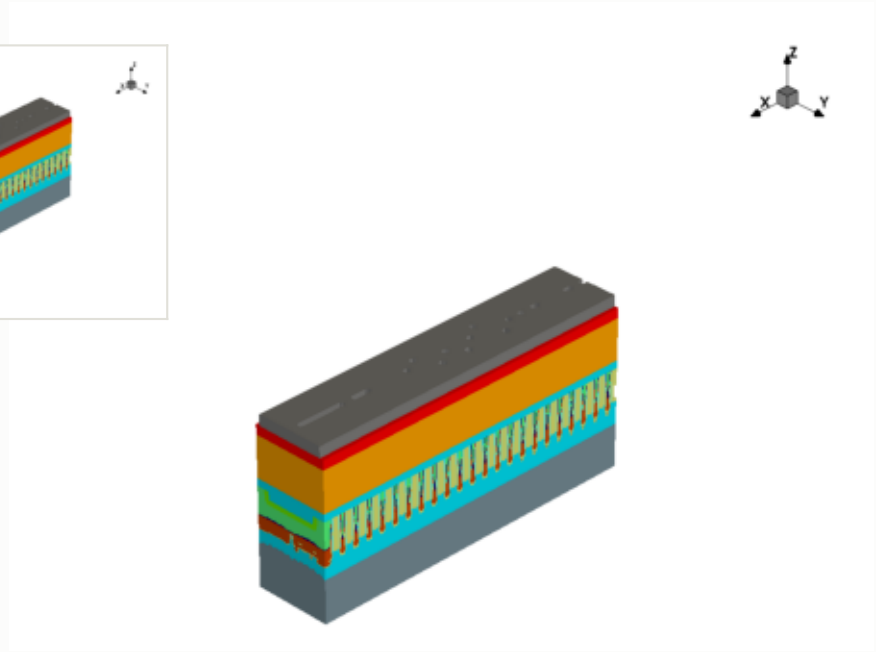

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

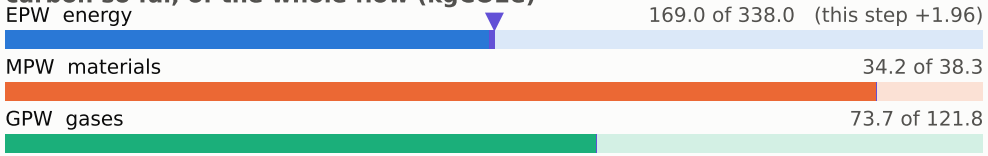

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

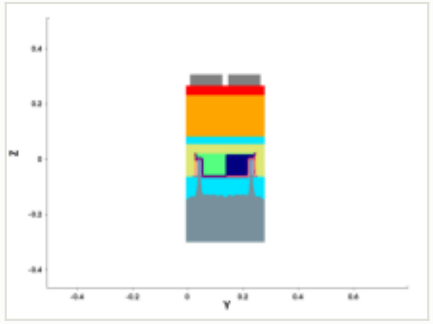

y cut at 0.211 µm

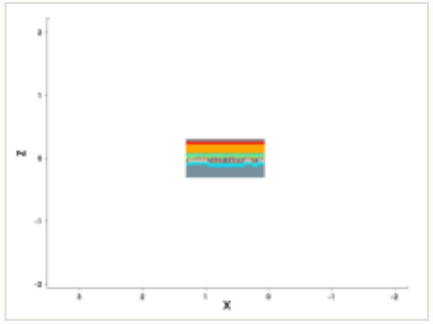

mask: layer 506:0 (GDSII)

steps by process area

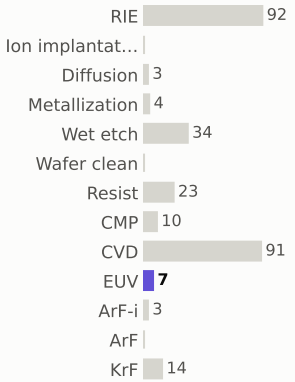

materials deposited (g)



gases emitted (g)



Step #2880: RIE

etch_anisotropic · RIE

1.04	277.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

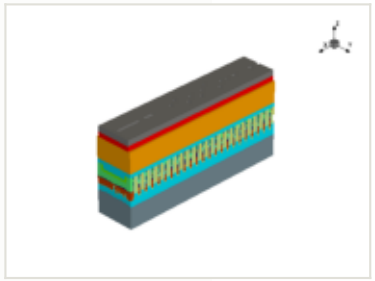

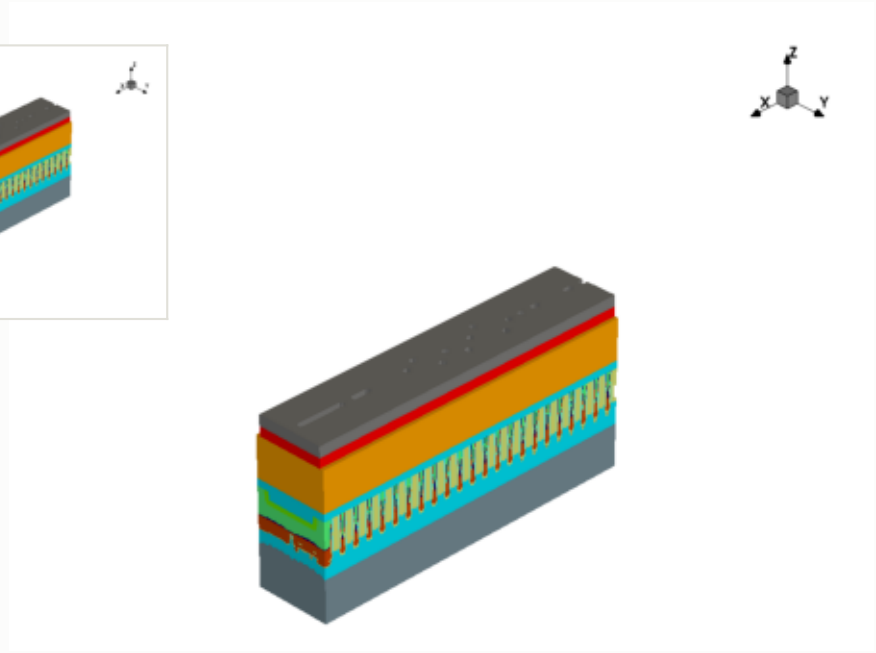

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

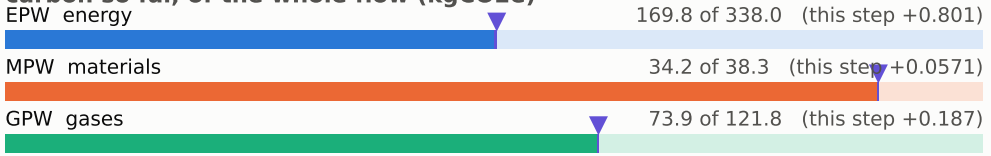

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

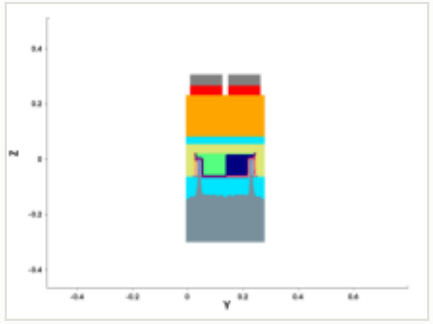

y cut at 0.211 µm

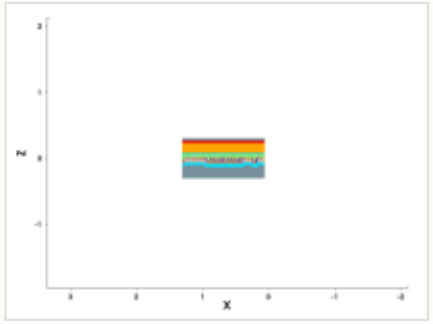

mask for this step

no mask for this step

steps by process area

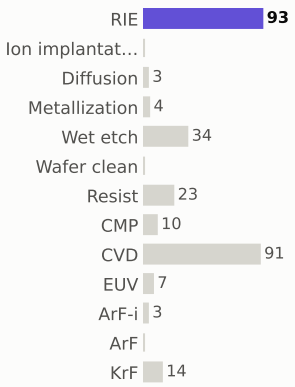

materials deposited (g)



gases emitted (g)



Step #2890: RIE

etch_anisotropic · RIE

1.04	278.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

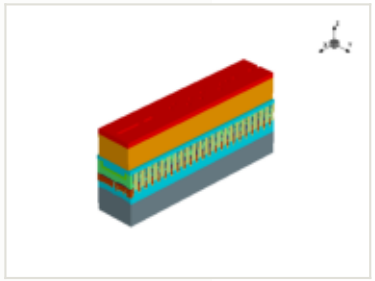

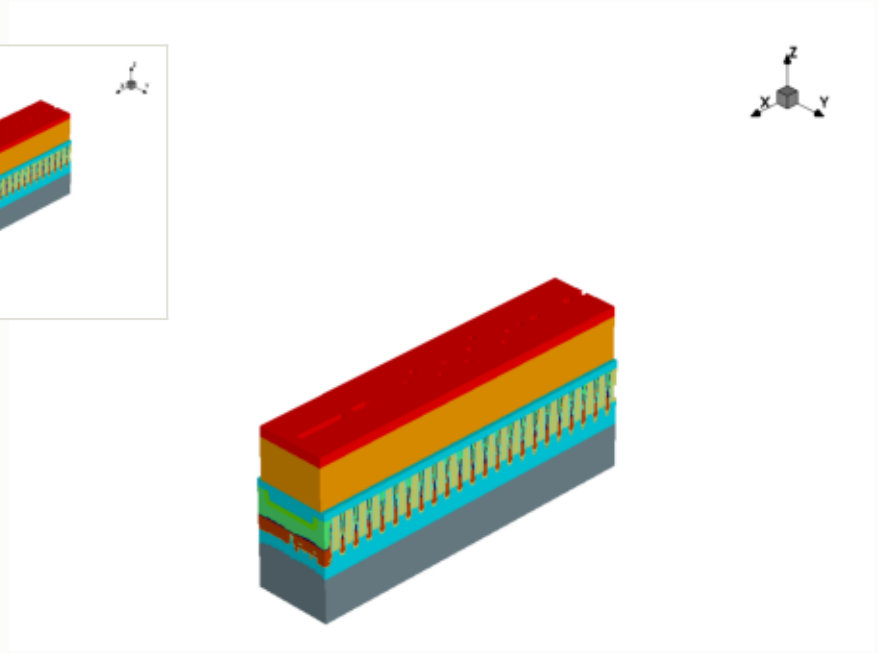

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

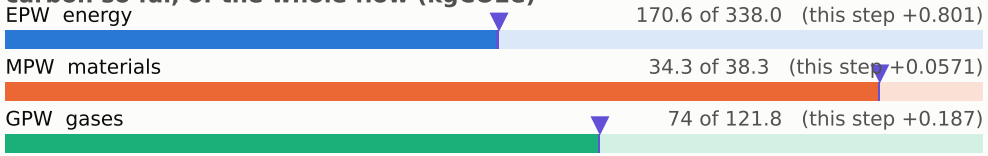

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

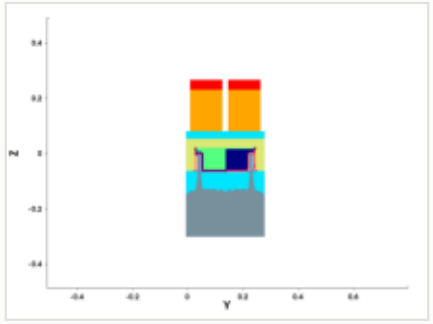

y cut at 0.211 µm

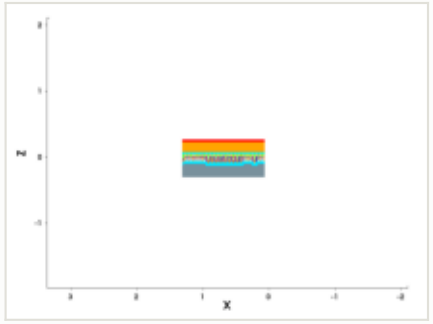

mask for this step

no mask for this step

steps by process area

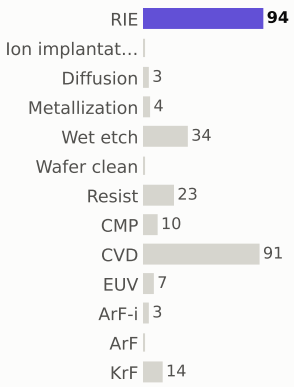

materials deposited (g)



gases emitted (g)



Step #2900: RIE

etch_anisotropic · RIE

1.04	280.0	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

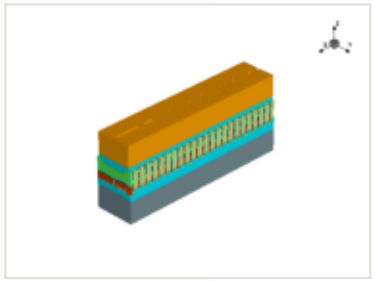

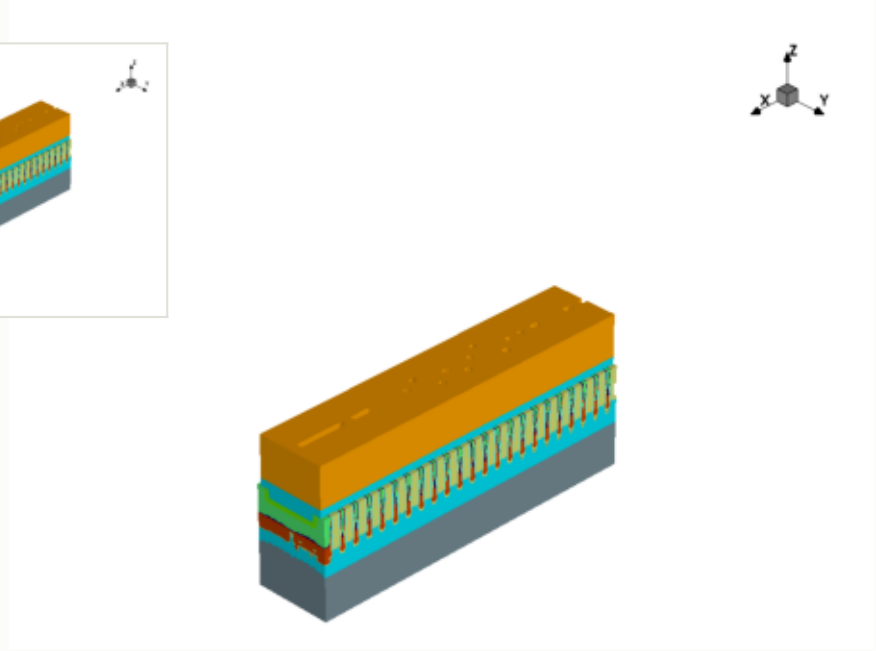

x cut at 0.677 µm

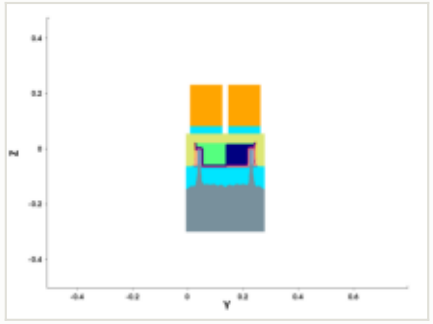

y cut at 0.211 µm

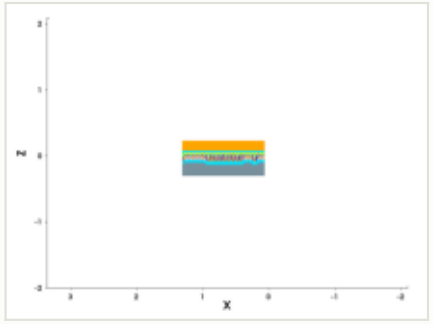

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

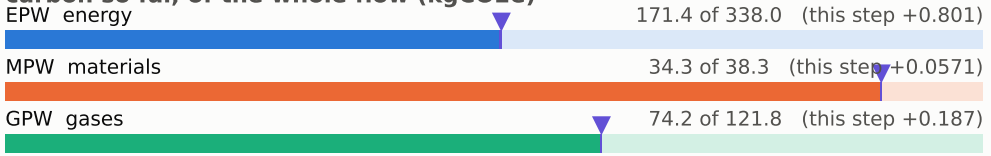

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

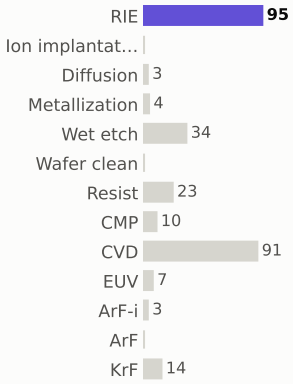

materials deposited (g)



gases emitted (g)



Step #2910: RIE

etch_anisotropic · RIE

1.04	281.0	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

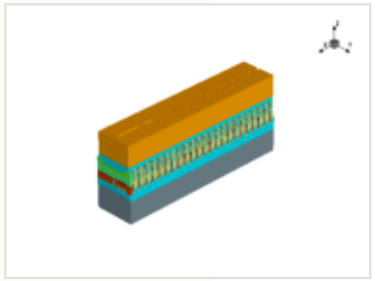

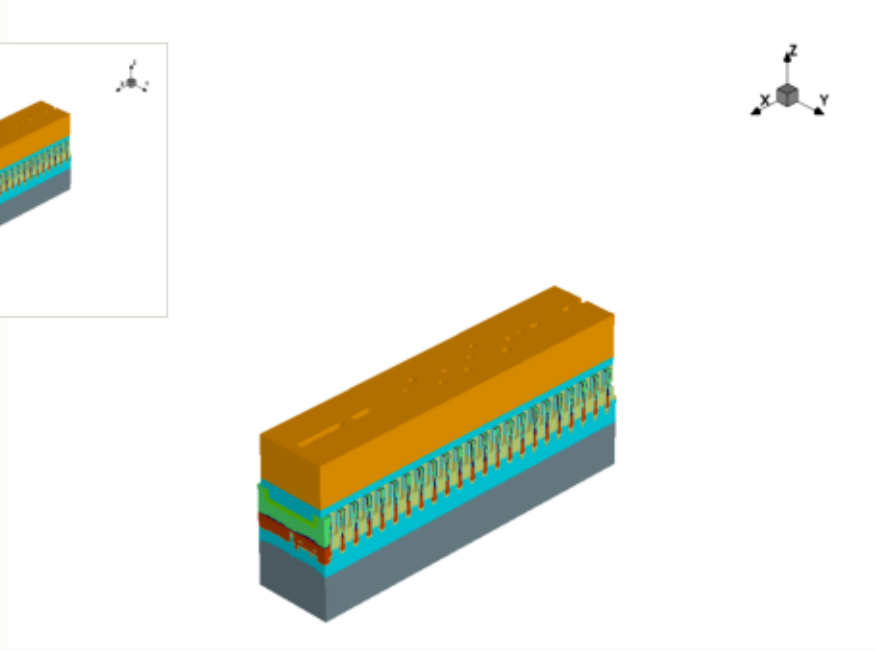

x cut at 0.677 µm

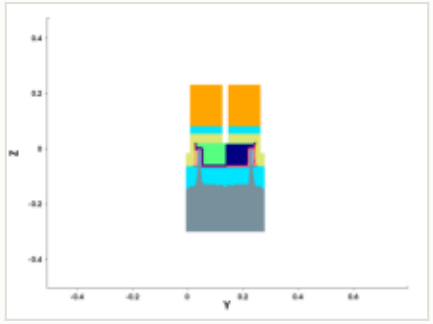

y cut at 0.211 µm

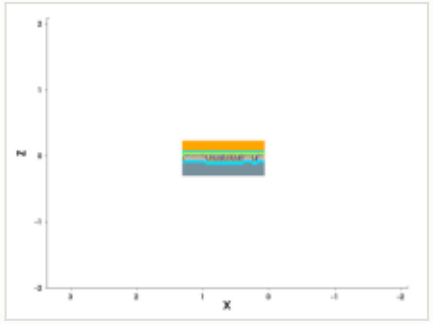

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

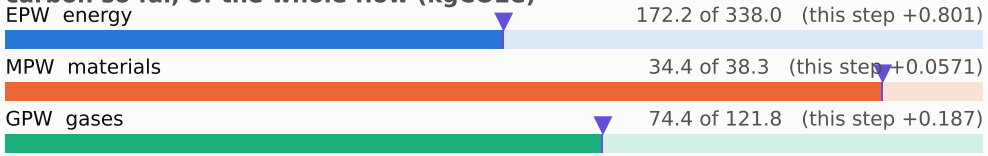

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #2920: Resist

etch_strip · Resist

0.169	281.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

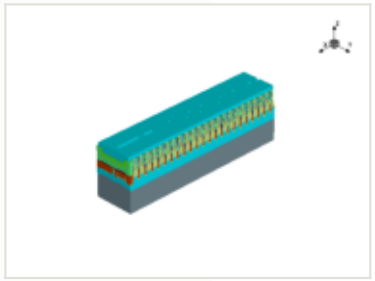

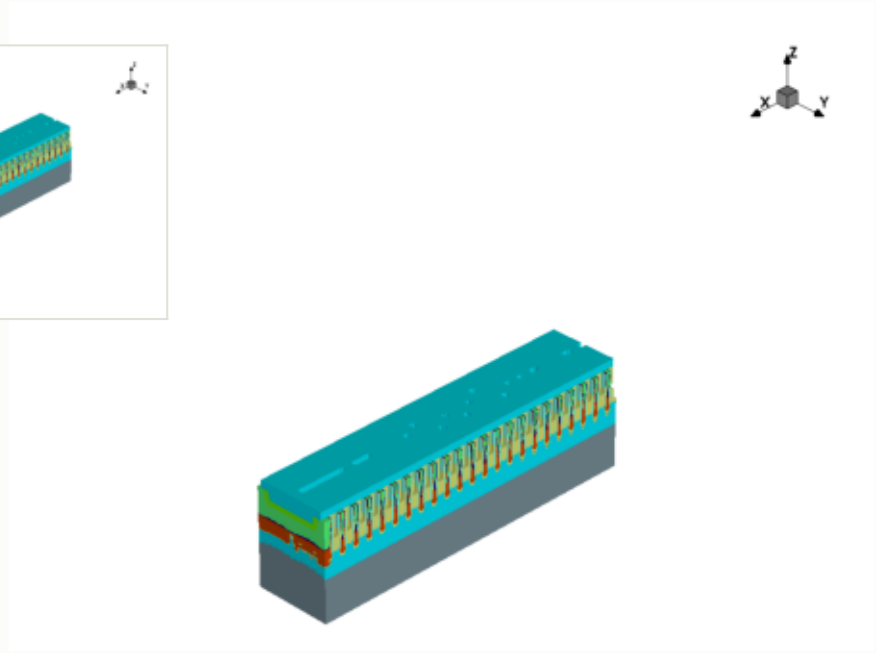

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

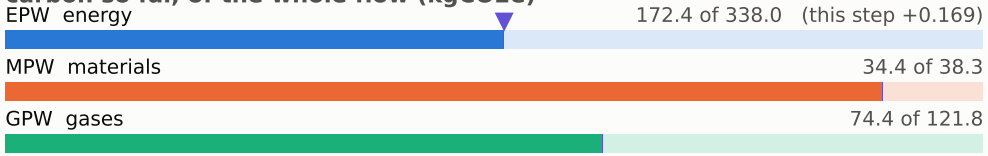

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

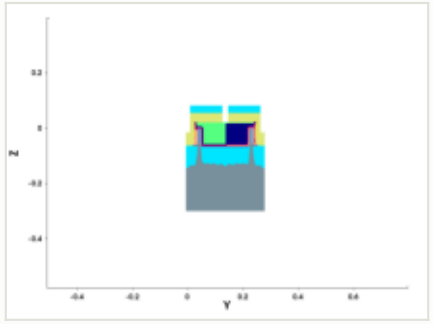

y cut at 0.211 µm

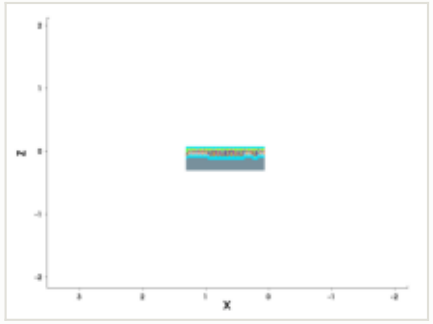

mask for this step

no mask for this step

steps by process area

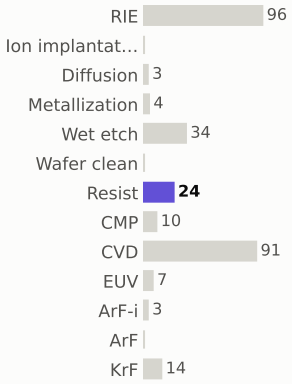

materials deposited (g)

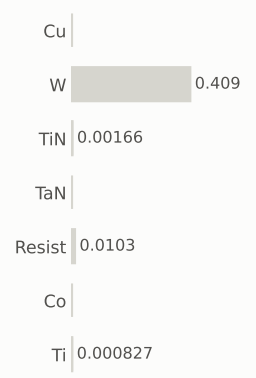

gases emitted (g)



Step #2930: Metallization

depo_isotropic · Metallization

1.2	282.4	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

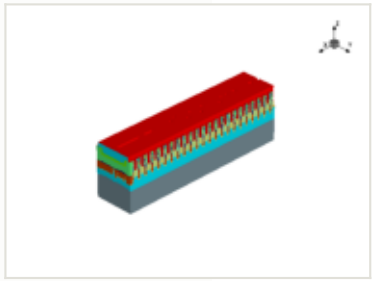

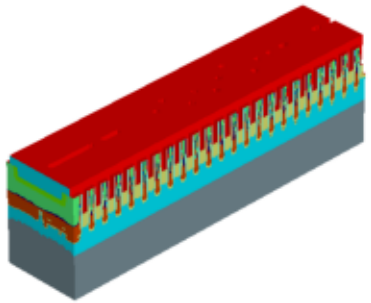

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Ti	EPW tool	0.86 kgCO2e
thickness	0.001 µm	EPW overhead	0.344 kgCO2e
material GWP	47.6334 gCO2e/g	MPW	1.52e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

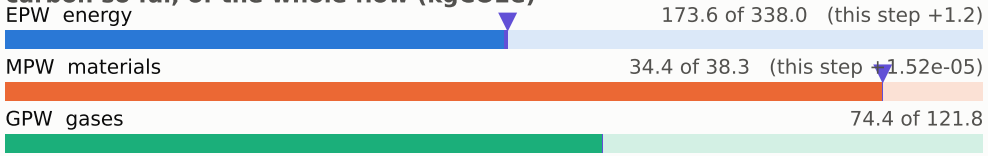

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

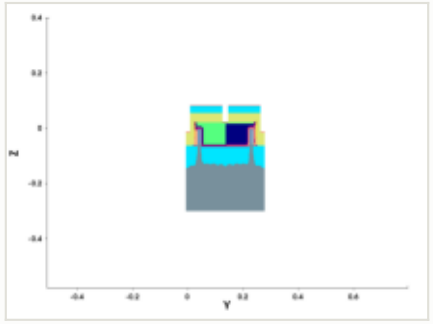

y cut at 0.211 µm

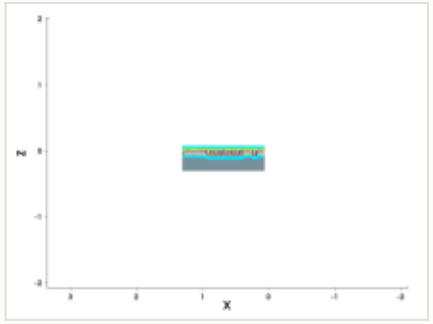

mask for this step

no mask for this step

steps by process area

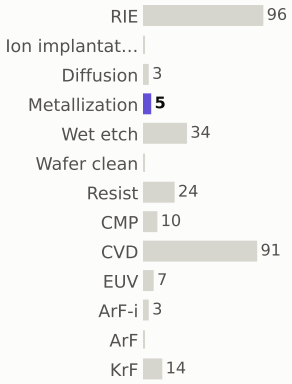

materials deposited (g)



gases emitted (g)



Step #2940: CVD

depo_isotropic · CVD

1.31	283.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

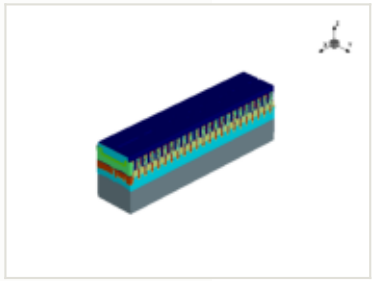

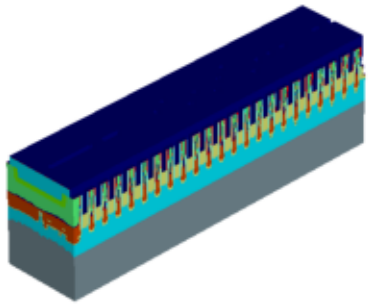

x cut at 0.677 µm

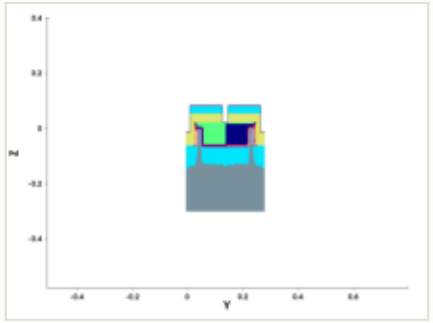

y cut at 0.211 µm

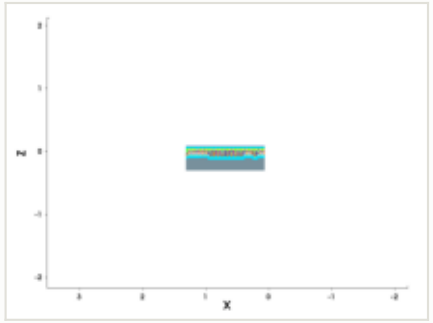

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.0015 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

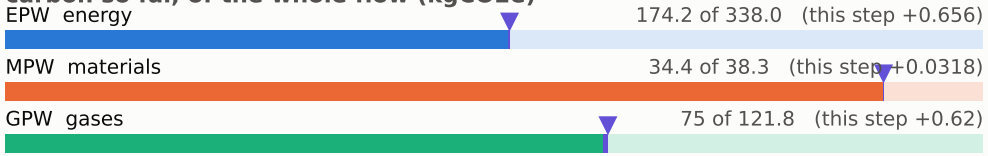

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

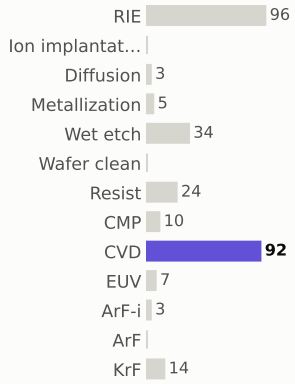

materials deposited (g)



gases emitted (g)



Step #2950: Metallization

depo_isotropic · Metallization

1.22	284.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

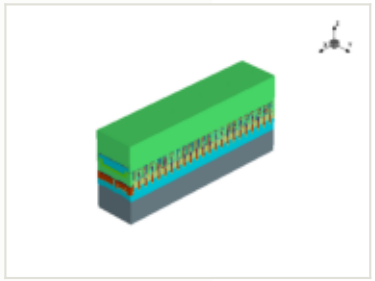

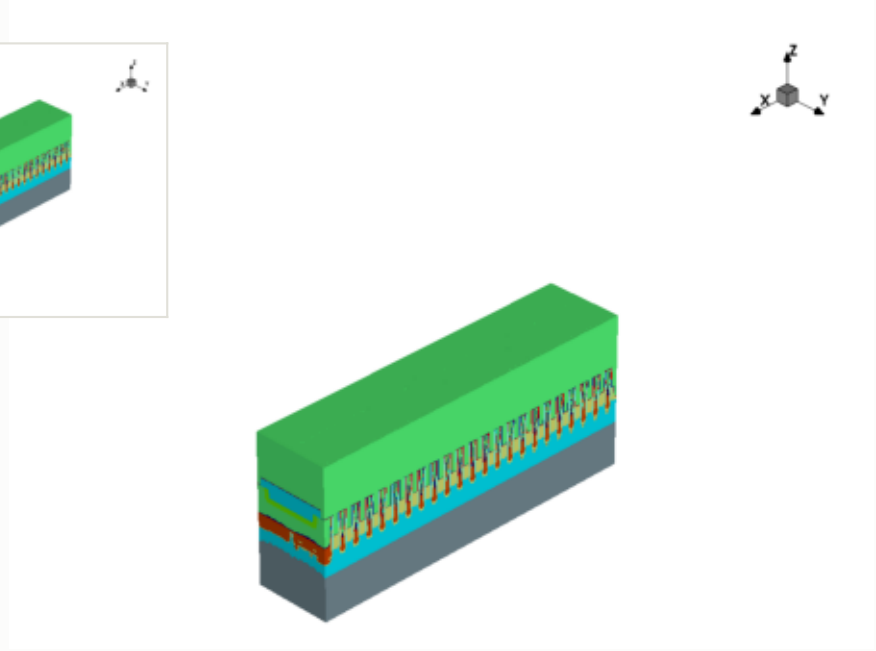

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

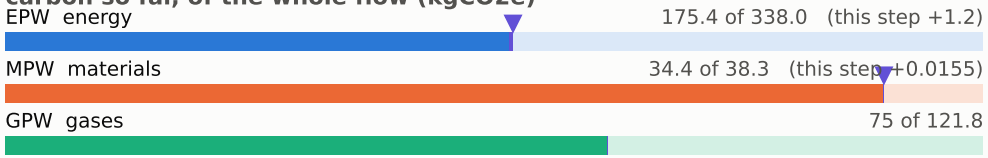

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

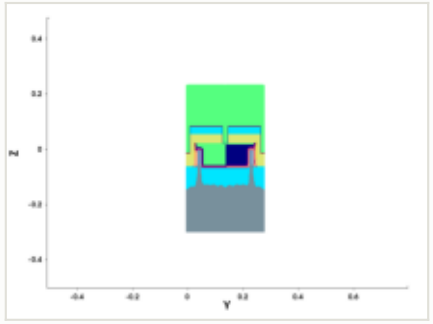

y cut at 0.211 µm

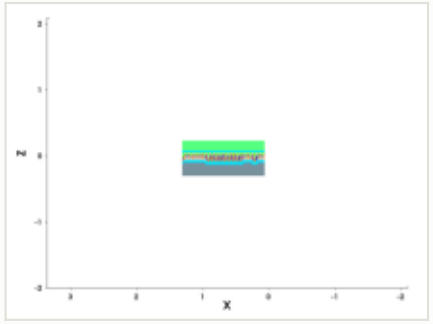

mask for this step

no mask for this step

steps by process area

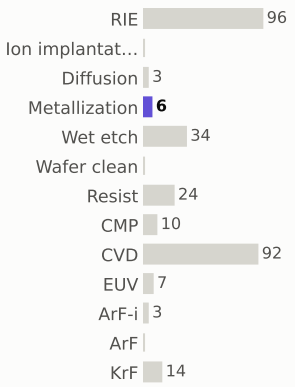

materials deposited (g)

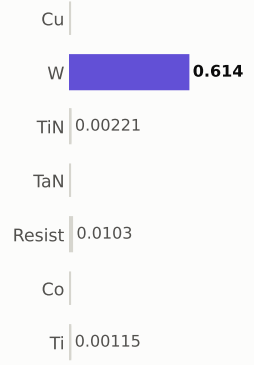

gases emitted (g)



Step #2960: CMP

etch_cmp · CMP

0.169	285.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

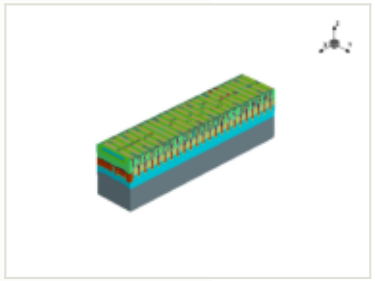

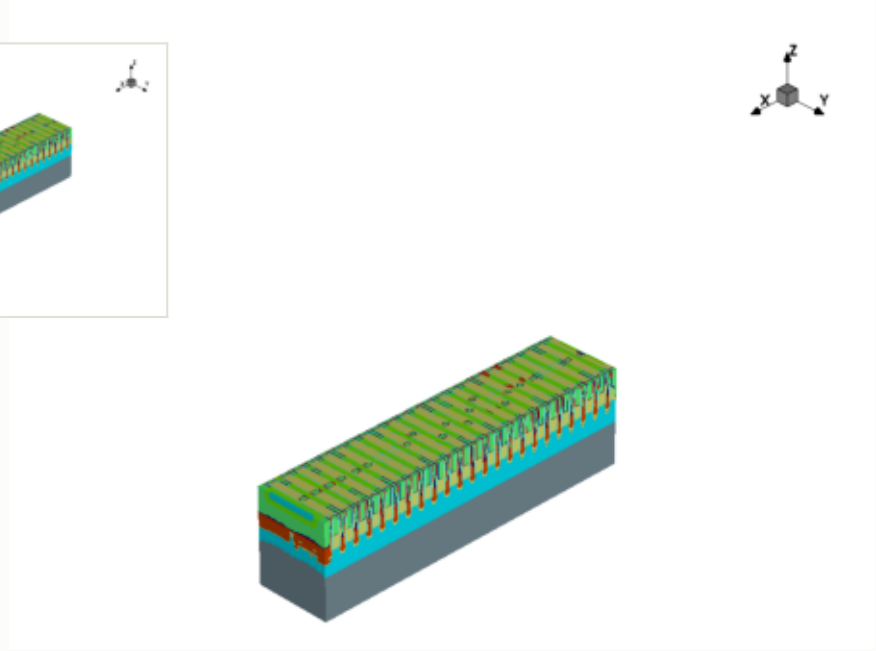

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

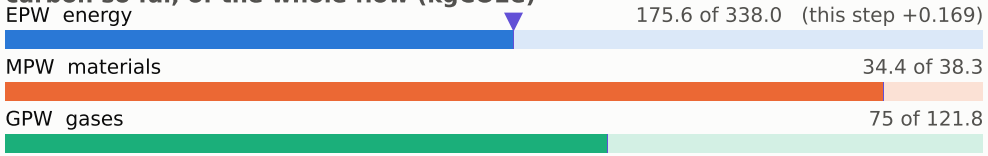

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

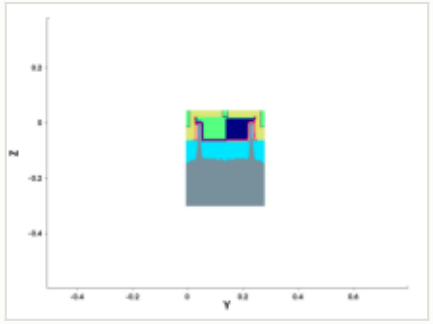

y cut at 0.211 µm

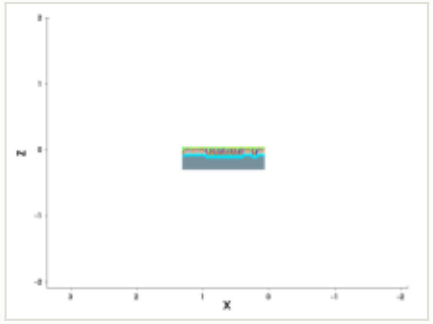

mask for this step

no mask for this step

steps by process area

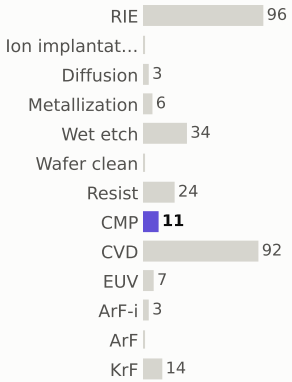

materials deposited (g)



gases emitted (g)



Step #3230: CVD

depo_fill · CVD

1.31	286.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

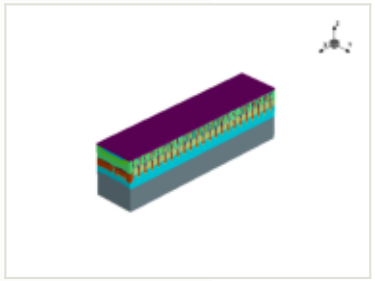

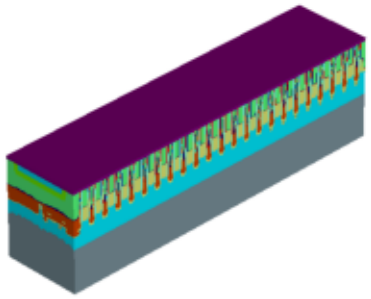

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

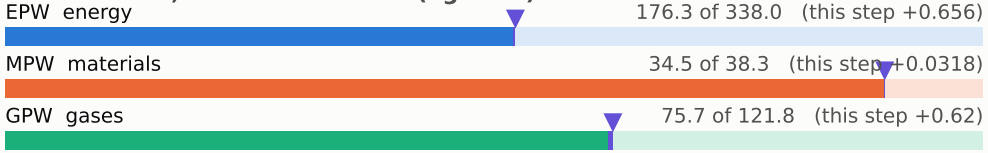

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

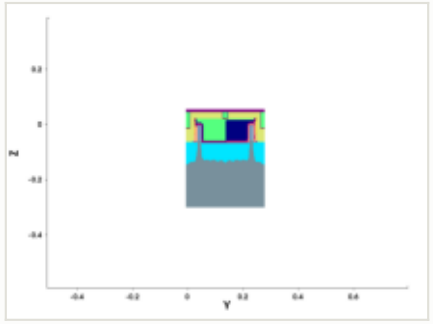

y cut at 0.211 µm

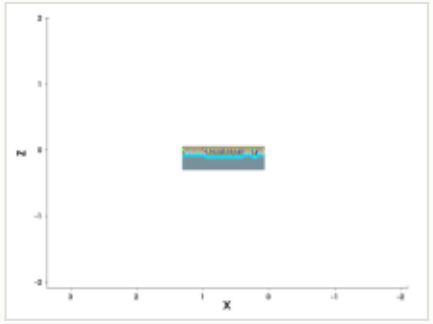

mask for this step

no mask for this step

steps by process area

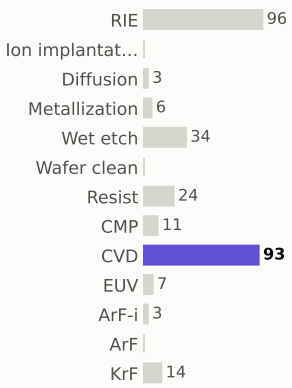

materials deposited (g)



gases emitted (g)



Step #3240: CVD

depo_fill · CVD

1.31	287.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

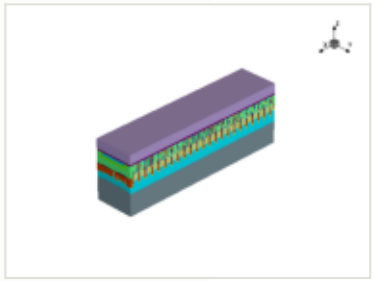

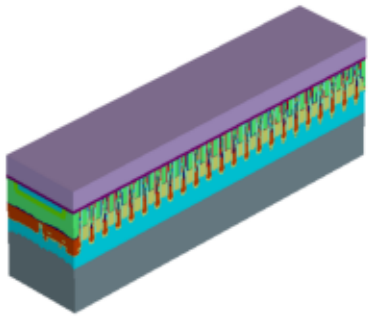

x cut at 0.677 µm

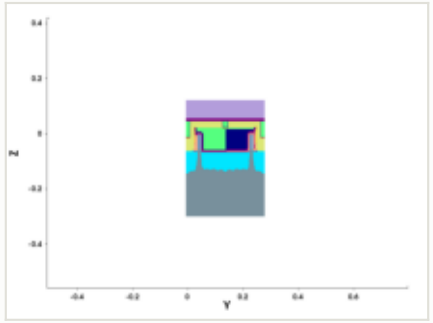

y cut at 0.211 µm

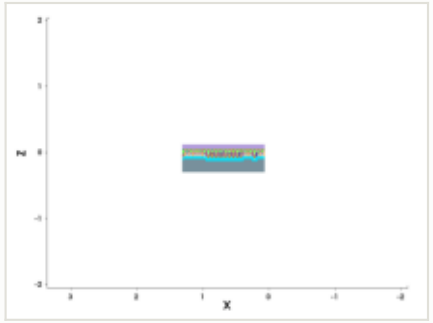

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.066 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

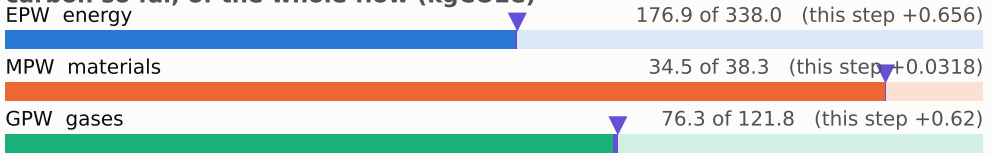

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

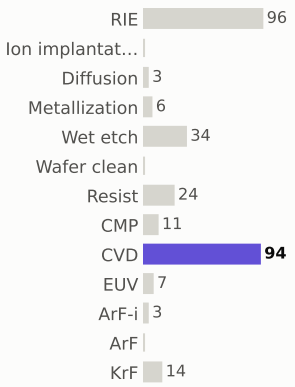

materials deposited (g)



gases emitted (g)



Step #3250: Diffusion

treatment · Diffusion

0.801	288.5	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

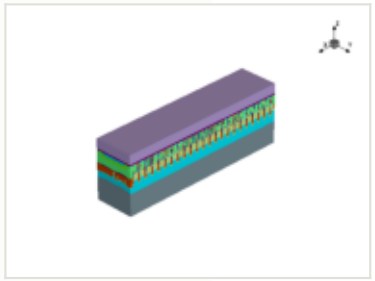

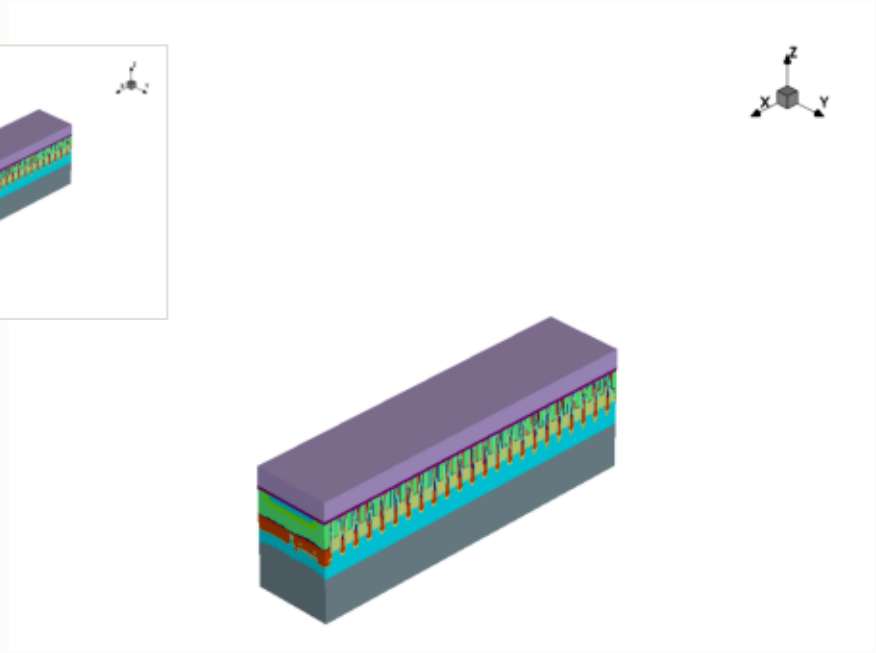

x cut at 0.677 µm

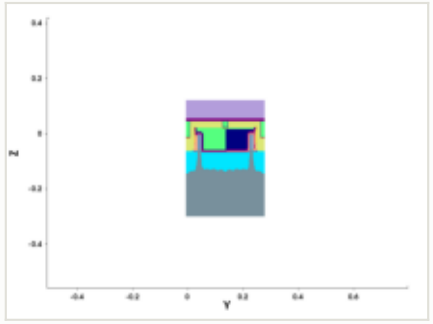

y cut at 0.211 µm

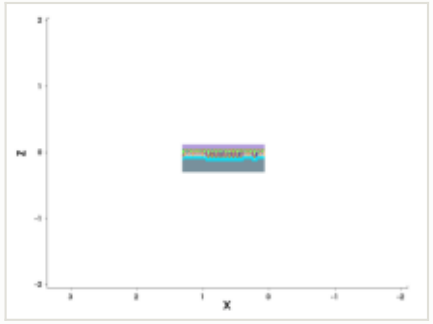

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

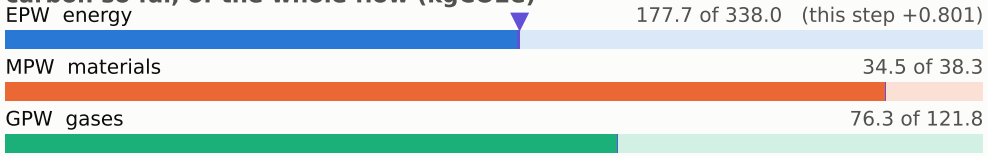

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

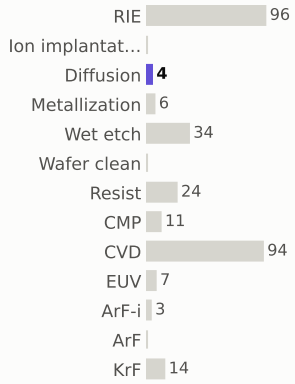

materials deposited (g)



gases emitted (g)



Step #3260: Wafer_clean

clean · Wafer_clean

0.169	288.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

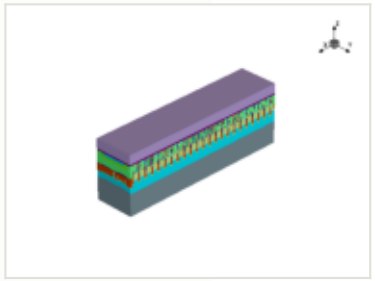

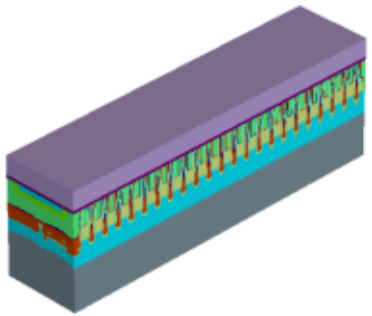

x cut at 0.677 µm

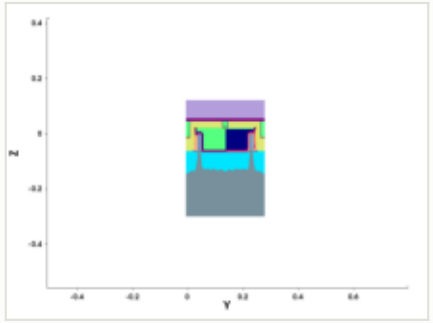

y cut at 0.211 µm

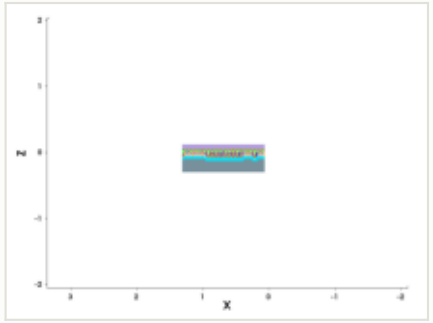

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

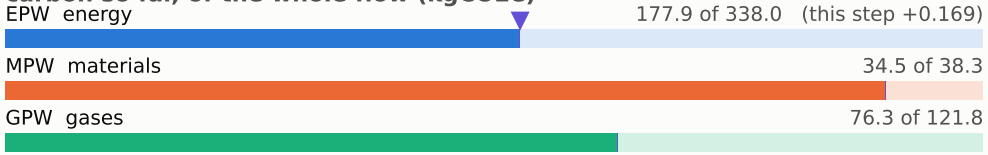

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

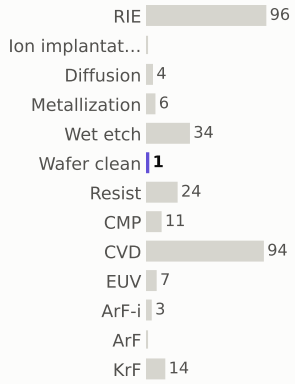

materials deposited (g)



gases emitted (g)



Step #3270: CVD

depo_fill · CVD

1.31	290.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

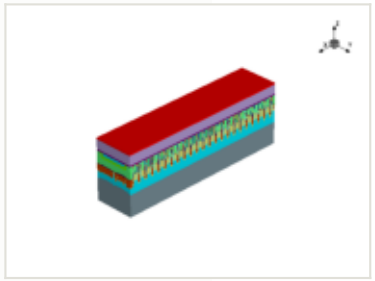

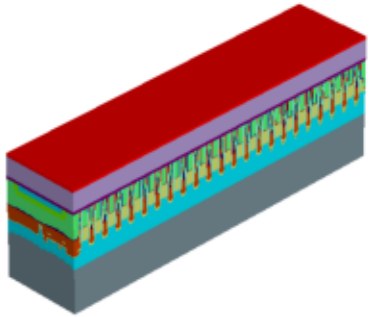

x cut at 0.677 µm

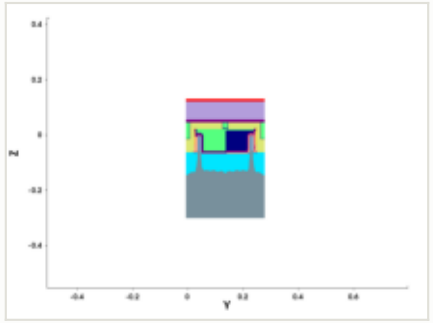

y cut at 0.211 µm

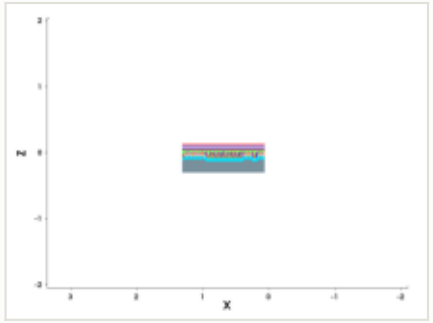

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

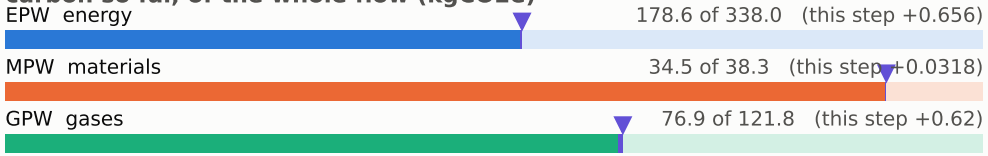

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

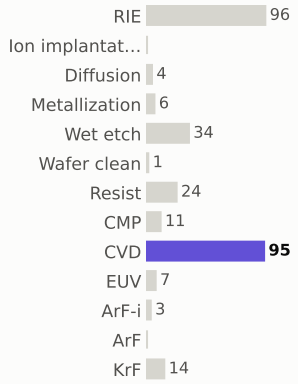

materials deposited (g)



gases emitted (g)



Step #3280: CVD

depo_fill · CVD

1.31	291.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

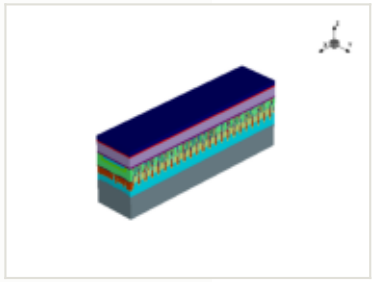

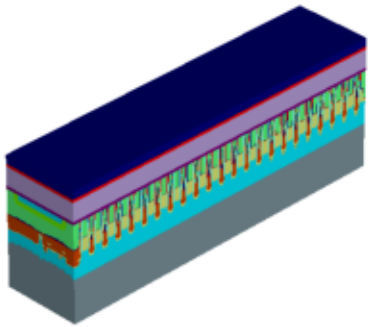

x cut at 0.677 µm

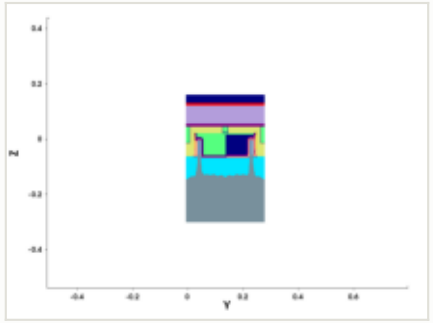

y cut at 0.211 µm

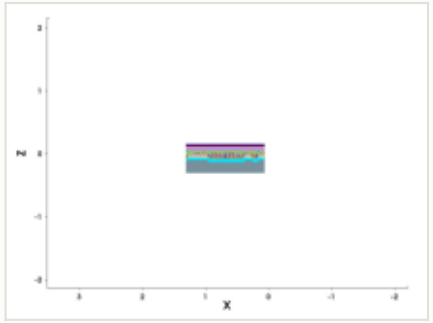

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0322 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

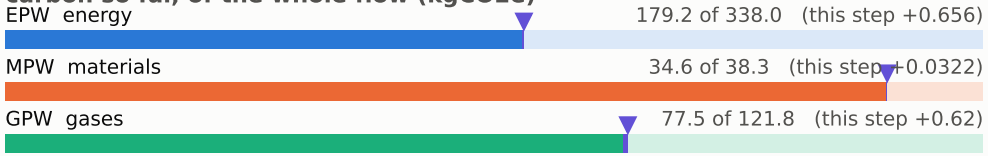

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #3290: Wafer_clean

clean · Wafer_clean

0.169	291.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

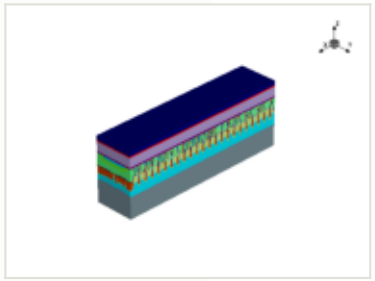

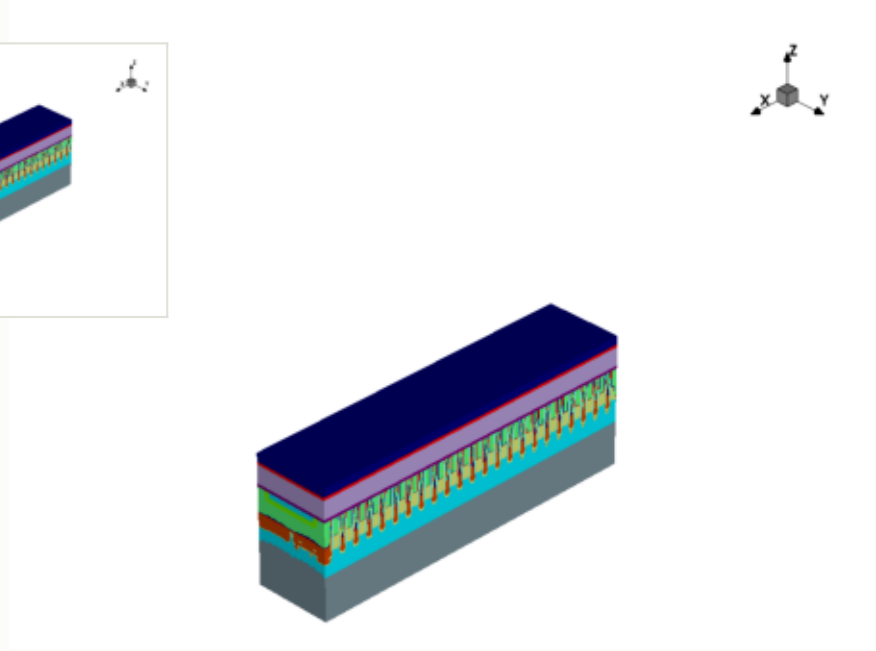

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

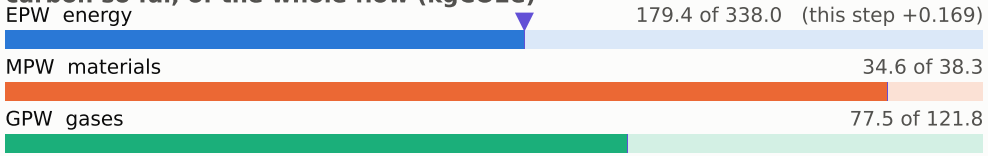

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

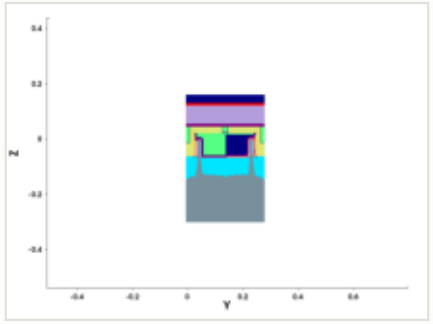

y cut at 0.211 µm

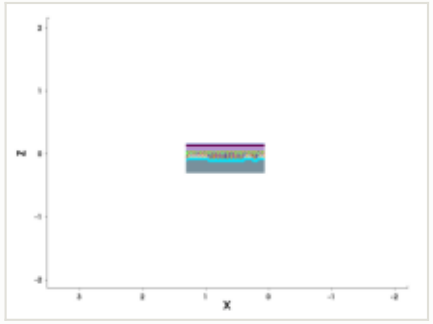

mask for this step

no mask for this step

steps by process area

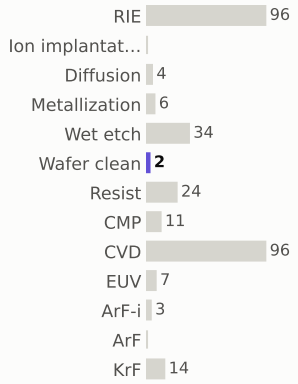

materials deposited (g)



gases emitted (g)



Step #3300: CVD

depo_fill · CVD

1.31	292.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

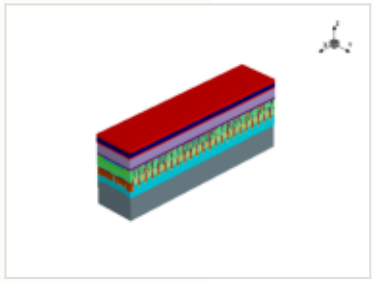

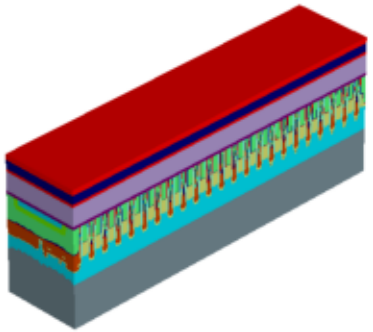

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

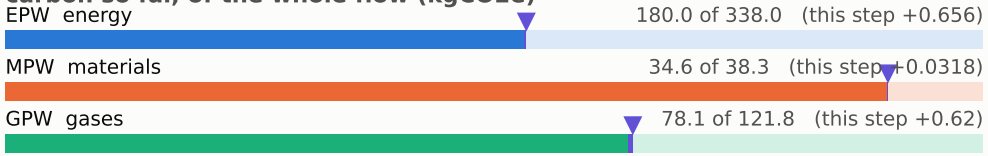

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

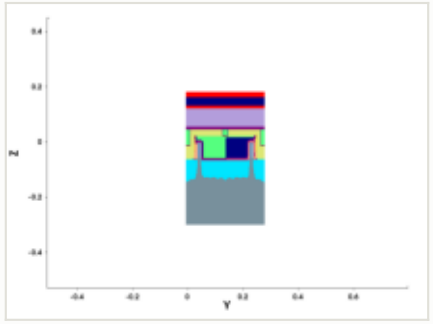

y cut at 0.211 µm

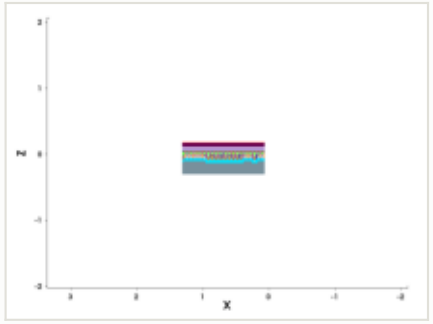

mask for this step

no mask for this step

steps by process area

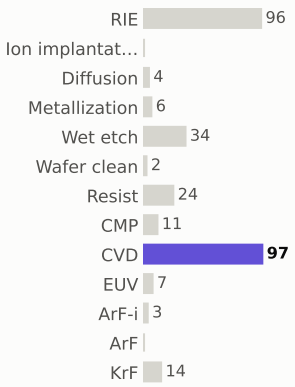

materials deposited (g)



gases emitted (g)



Step #3310: Resist

depo_fill · Resist

0.169	292.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

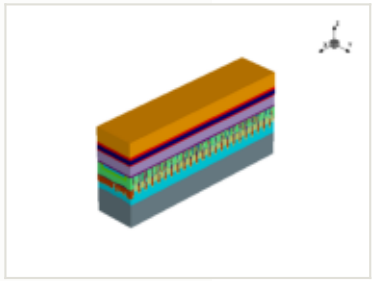

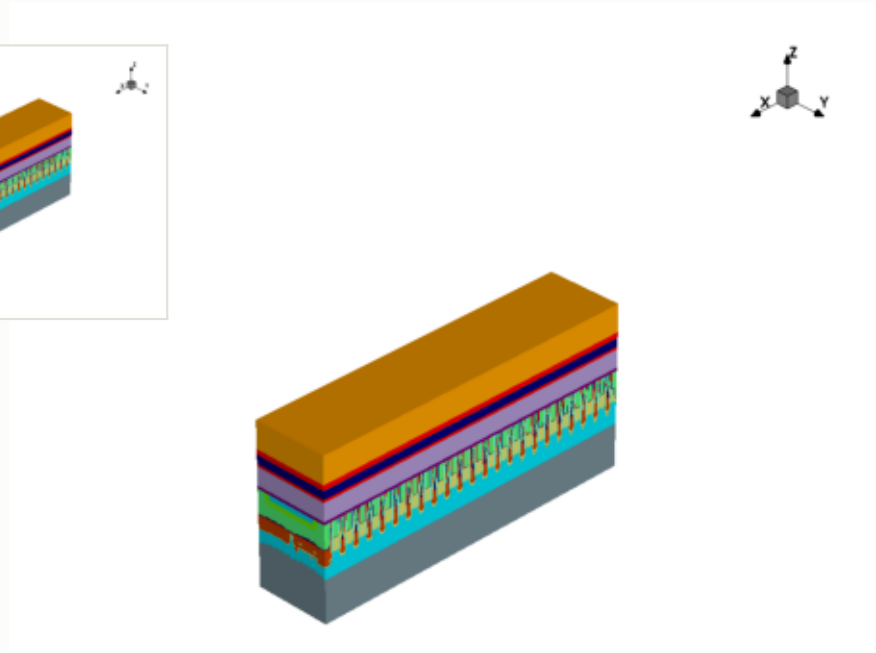

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

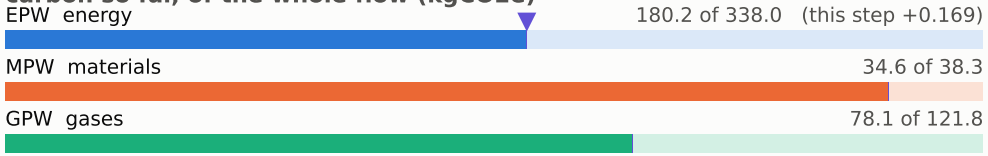

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

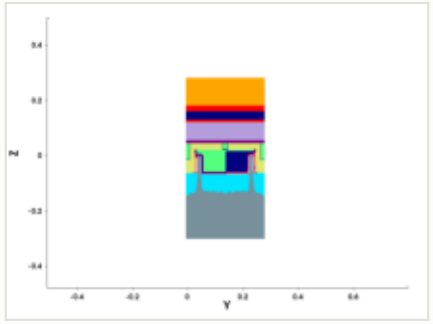

y cut at 0.211 µm

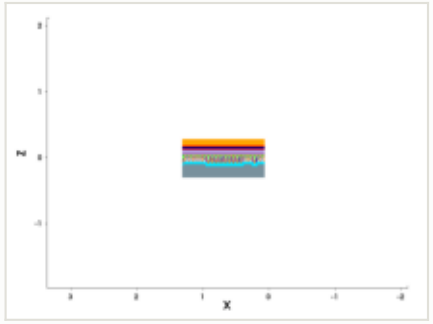

mask for this step

no mask for this step

steps by process area

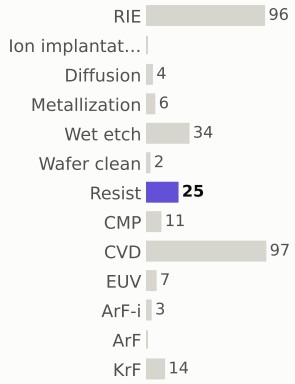

materials deposited (g)



gases emitted (g)



Step #3320: CVD

depo_fill · CVD

1.31	294.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

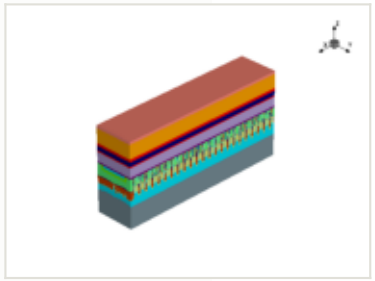

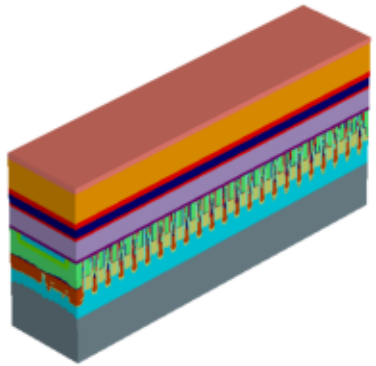

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

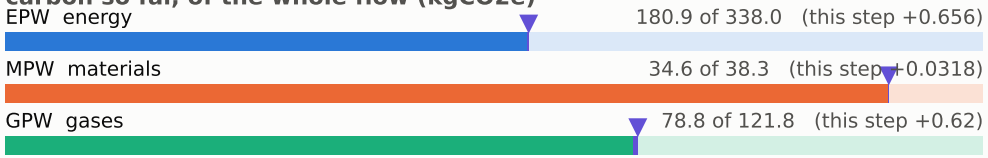

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

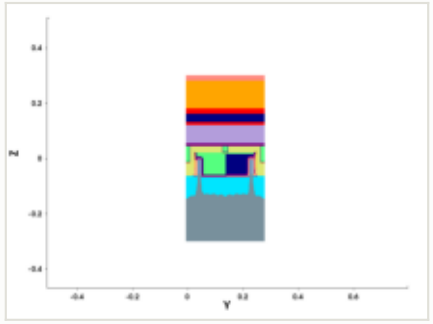

y cut at 0.211 µm

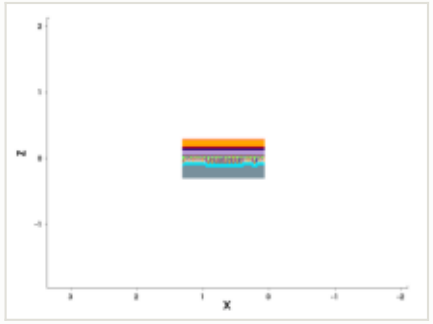

mask for this step

no mask for this step

steps by process area

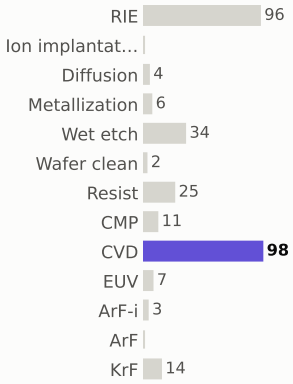

materials deposited (g)



gases emitted (g)



Step #3330: Wafer_clean

clean · Wafer_clean

0.169	294.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

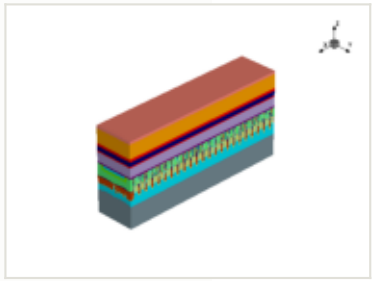

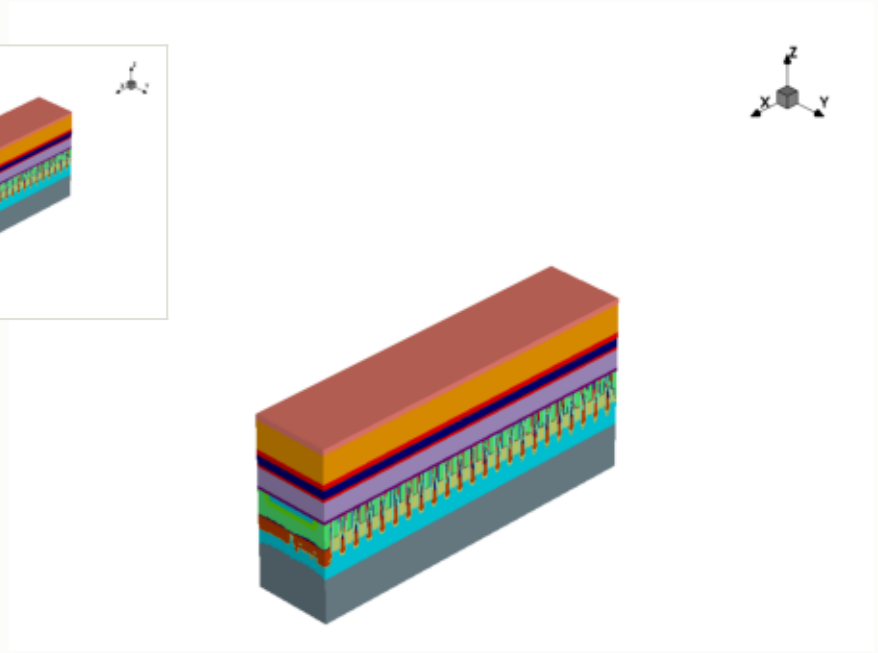

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

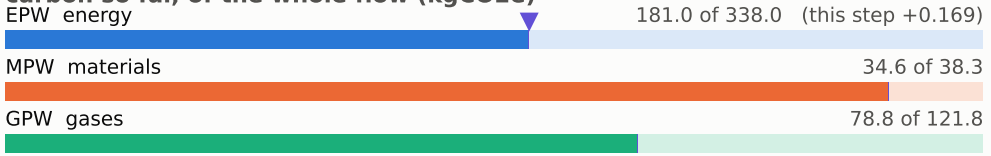

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

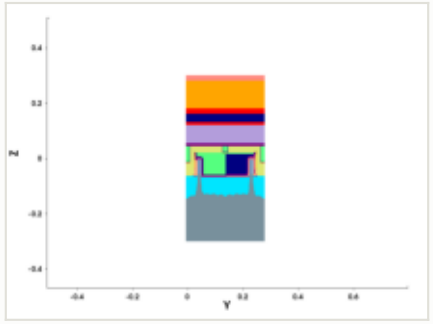

y cut at 0.211 µm

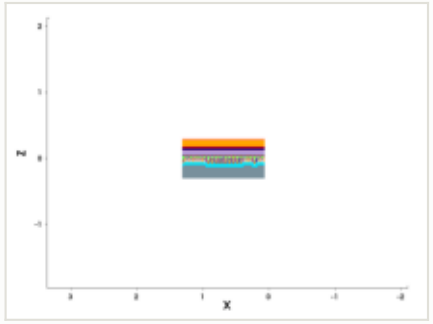

mask for this step

no mask for this step

steps by process area

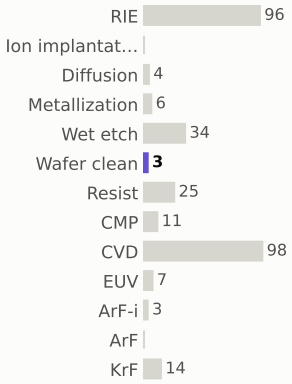

materials deposited (g)



gases emitted (g)



Step #3340: EUV

litho_patterning · EUV

1.96	296.4	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

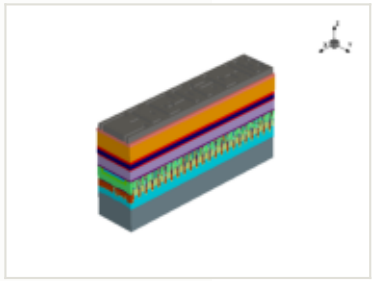

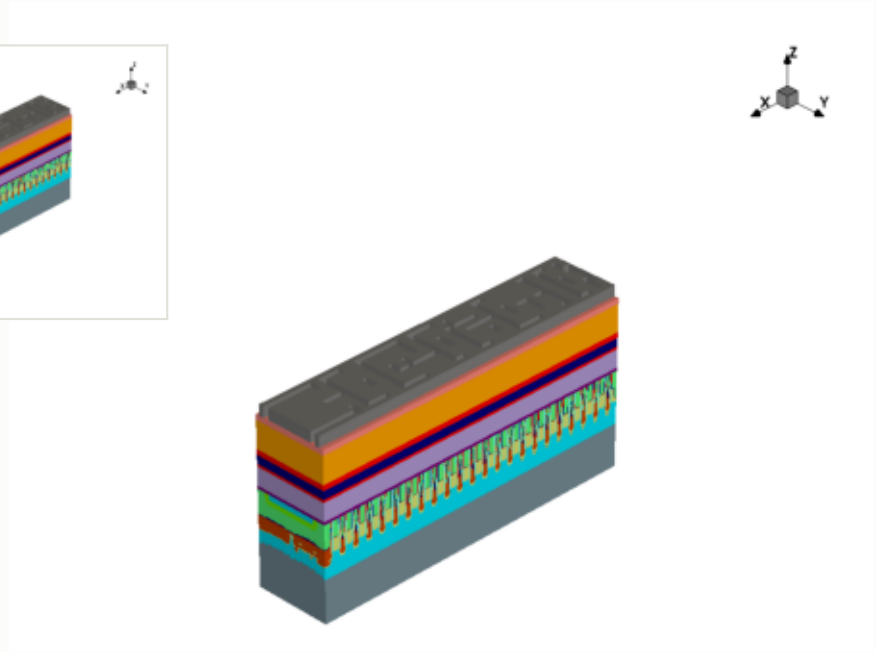

x cut at 0.677 µm

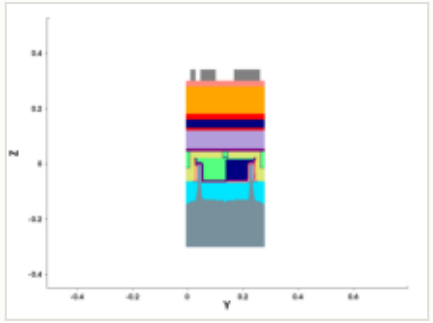

y cut at 0.211 µm

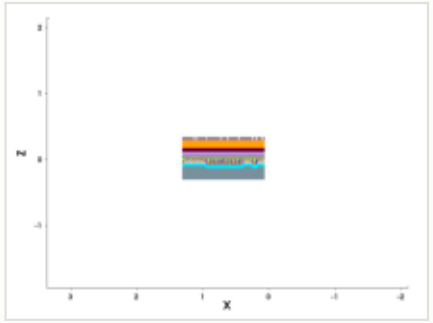

mask: layer 19:0 (GDSII)

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

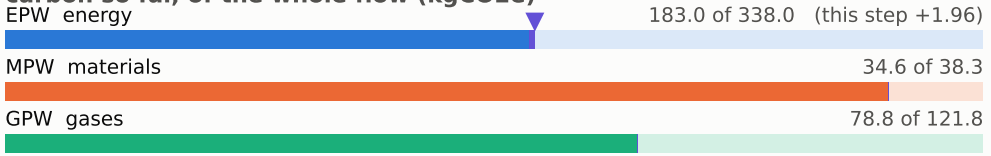

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

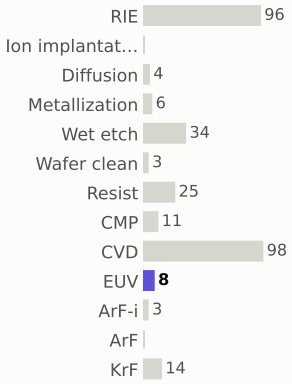

materials deposited (g)



gases emitted (g)



Step #3350: RIE

etch_anisotropic · RIE

1.04	297.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

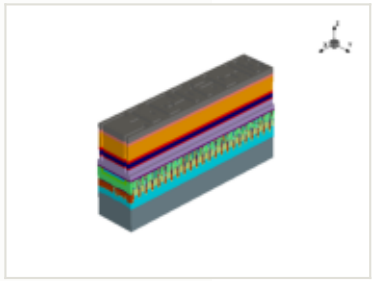

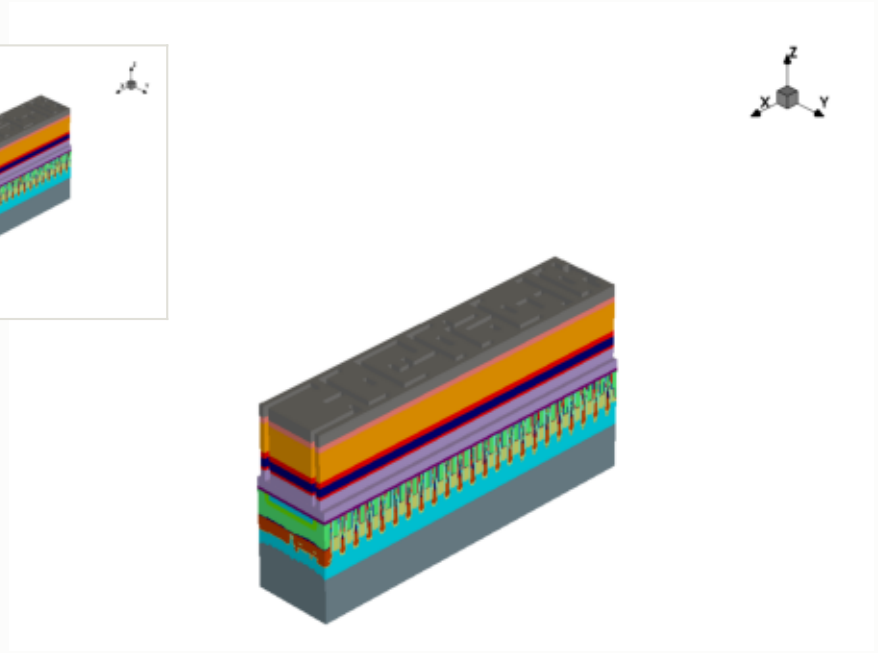

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

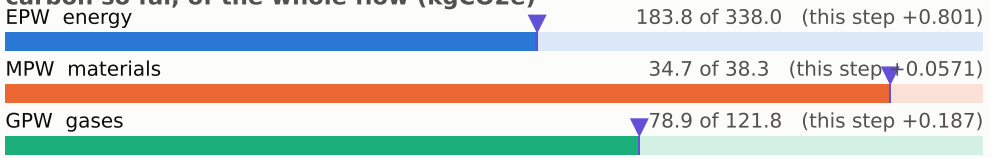

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

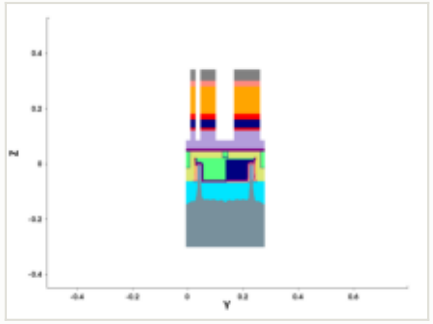

y cut at 0.211 µm

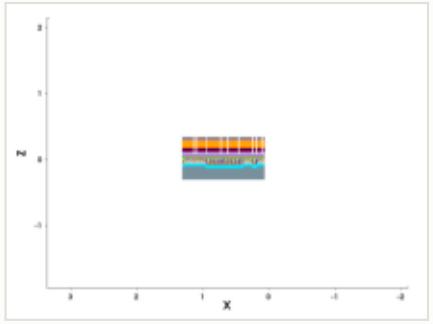

mask for this step

no mask for this step

steps by process area

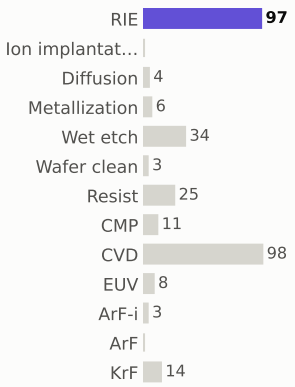

materials deposited (g)



gases emitted (g)



Step #3360: Wafer_clean

etch_strip · Wafer_clean

0.169	297.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

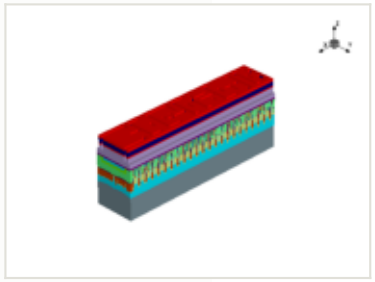

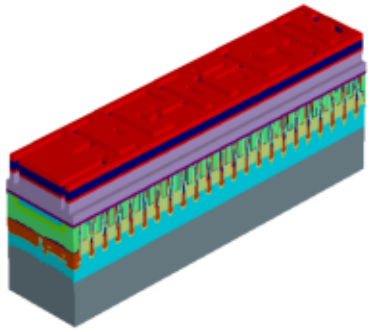

x cut at 0.677 µm

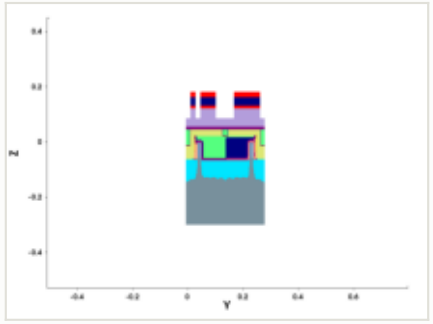

y cut at 0.211 µm

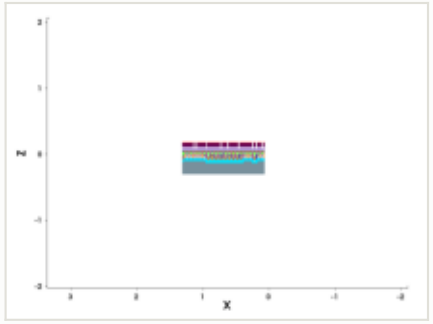

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

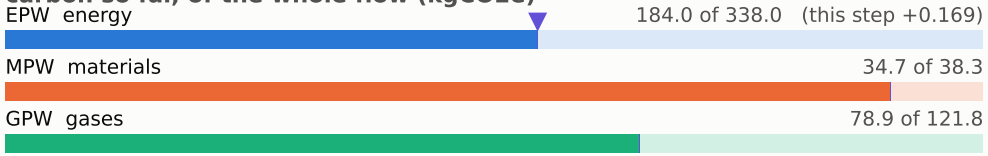

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

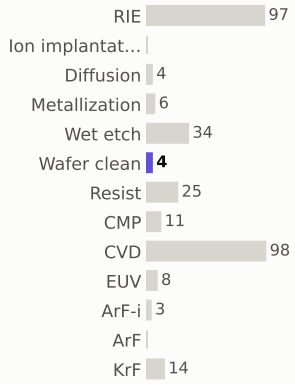

materials deposited (g)



gases emitted (g)



Step #3370: Resist

depo_fill · Resist

0.169	297.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

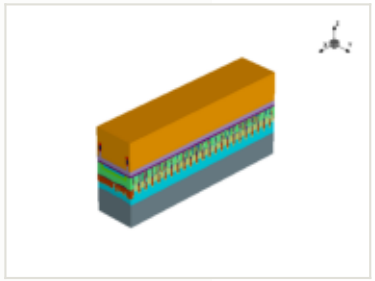

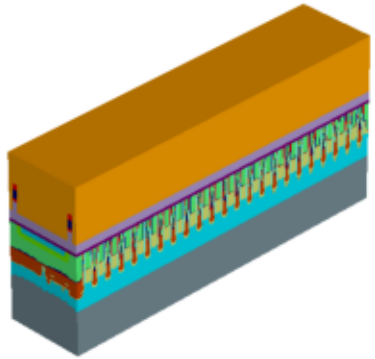

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

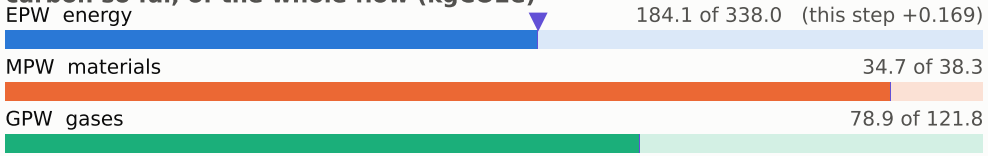

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

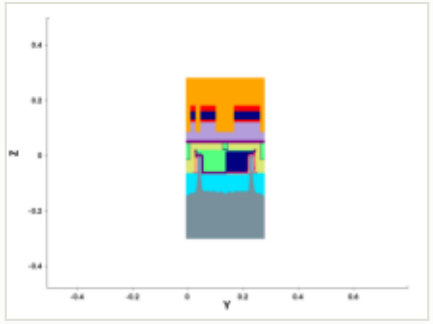

y cut at 0.211 µm

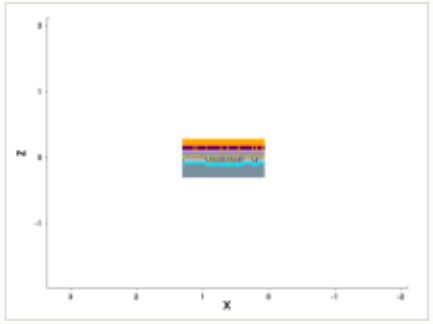

mask for this step

no mask for this step

steps by process area

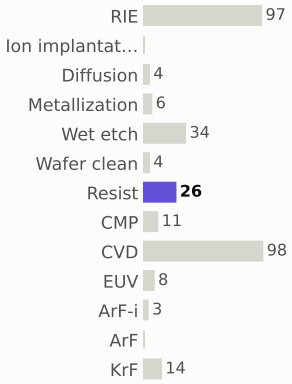

materials deposited (g)



gases emitted (g)



Step #3380: CVD

depo_fill · CVD

1.31	299.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

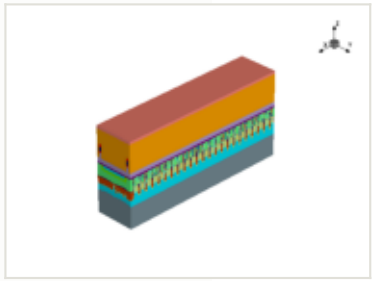

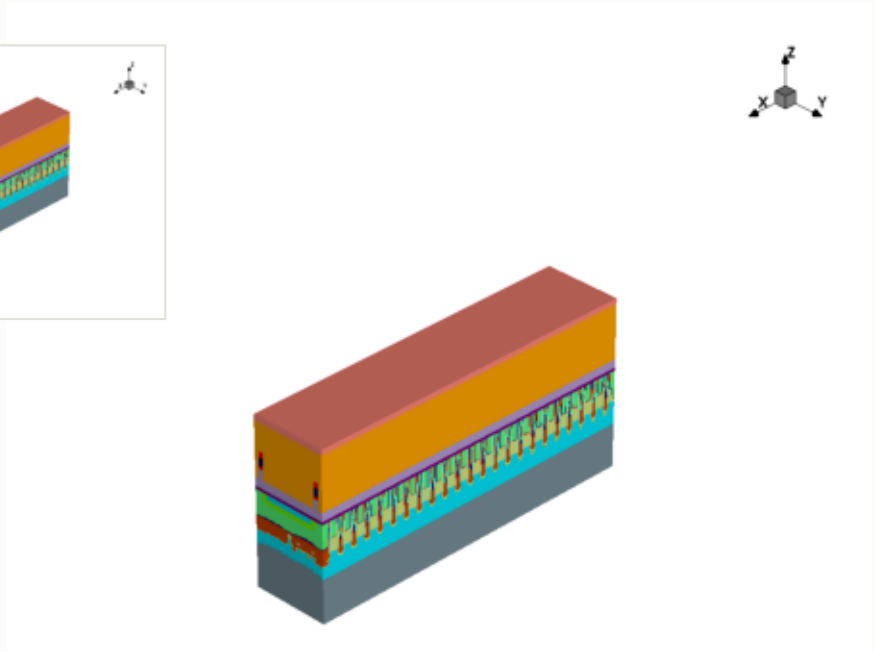

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

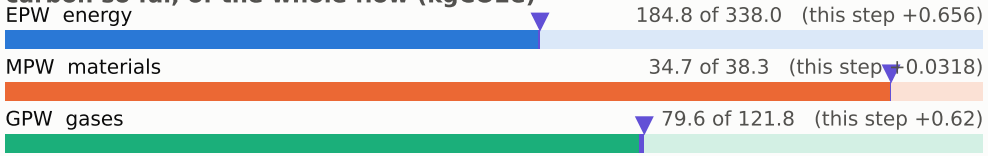

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

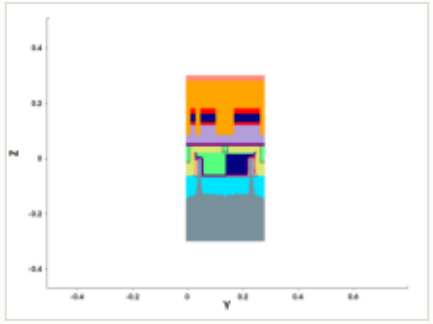

y cut at 0.211 µm

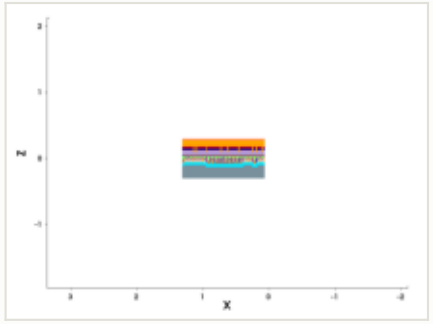

mask for this step

no mask for this step

steps by process area

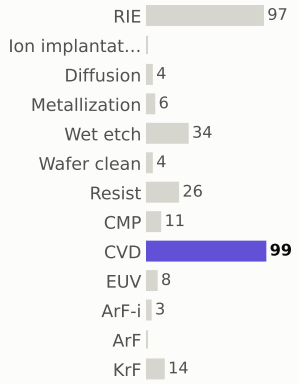

materials deposited (g)



gases emitted (g)



Step #3390: Wafer_clean

clean · Wafer_clean

0.169	299.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

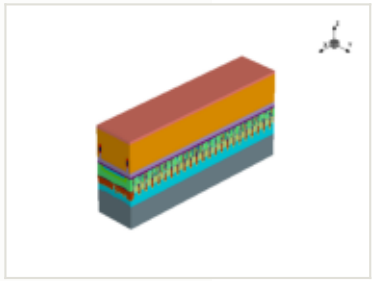

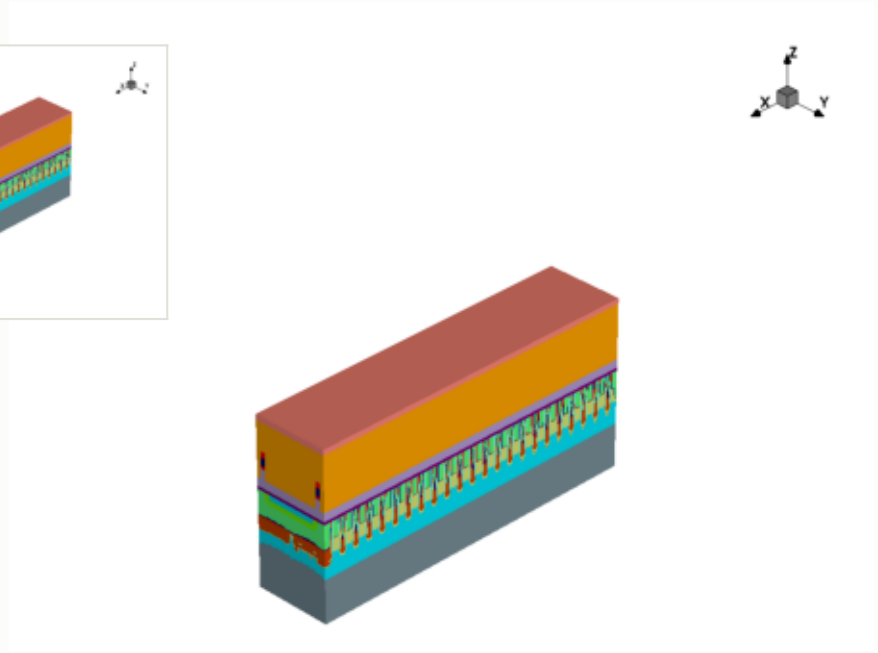

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

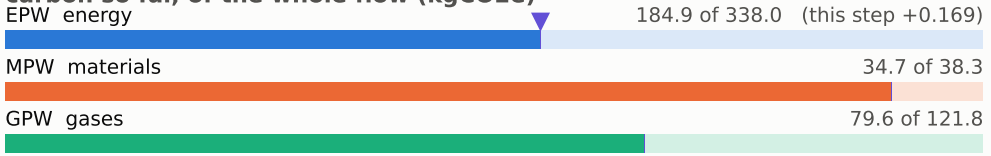

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

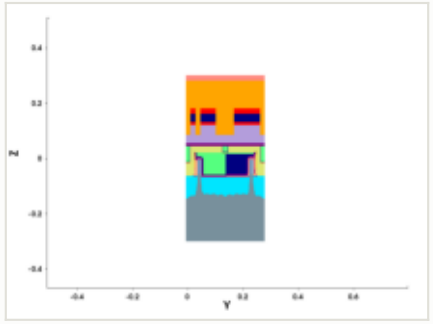

y cut at 0.211 µm

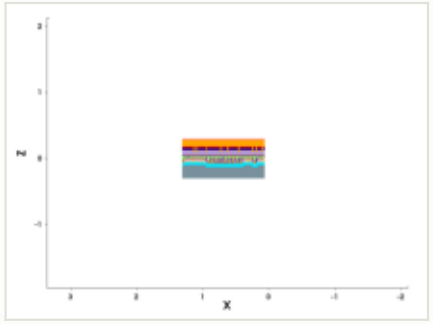

mask for this step

no mask for this step

steps by process area

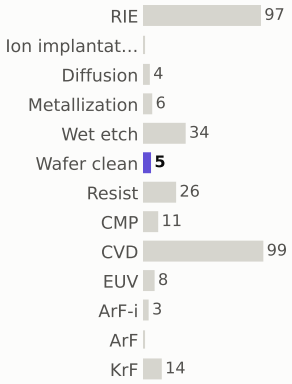

materials deposited (g)



gases emitted (g)



Step #3400: EUV

litho_patterning · EUV

1.96	301.2	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

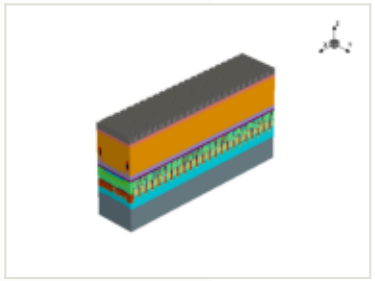

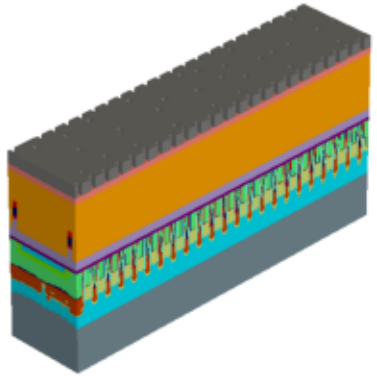

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

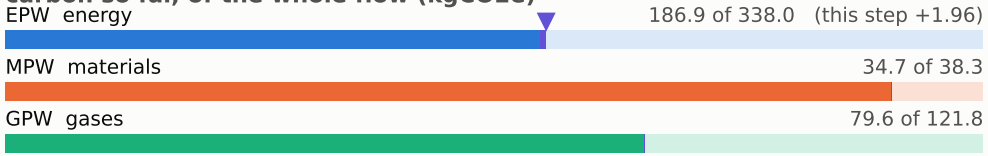

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

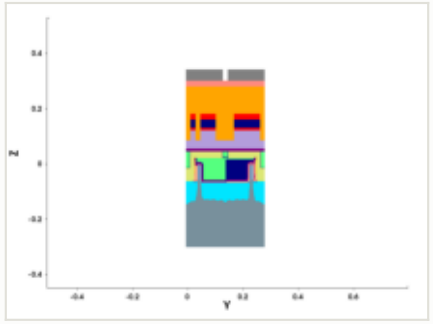

y cut at 0.211 µm

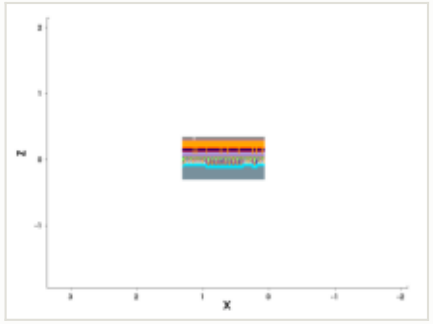

mask: layer 18:0 (GDSII)



steps by process area

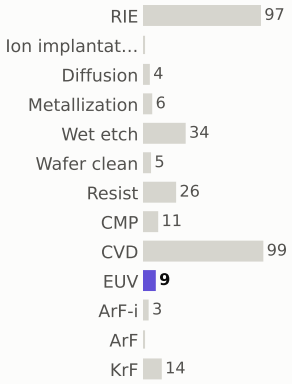

materials deposited (g)



gases emitted (g)



Step #3410: RIE

etch_anisotropic · RIE

1.04	302.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

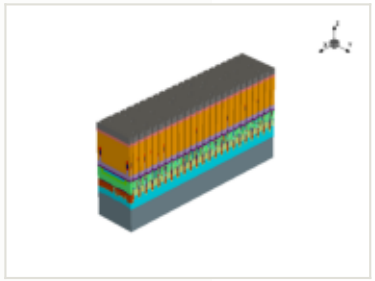

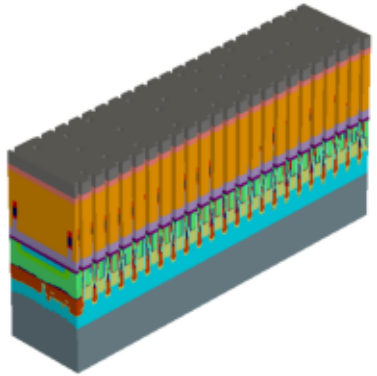

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

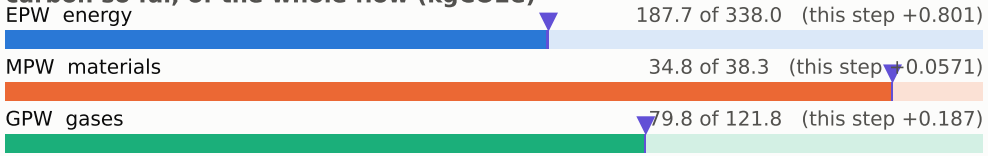

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

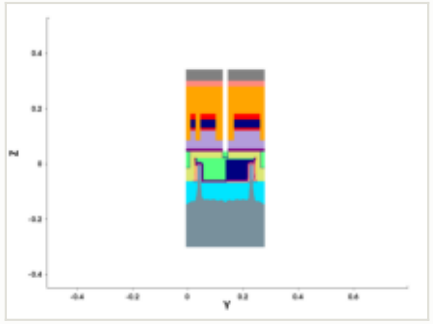

y cut at 0.211 µm

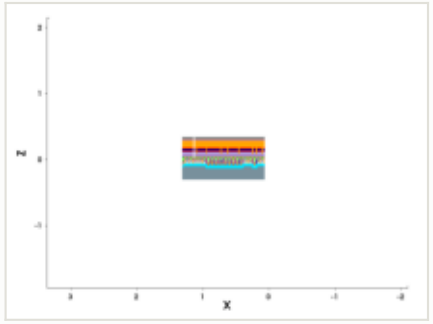

mask for this step

no mask for this step

steps by process area

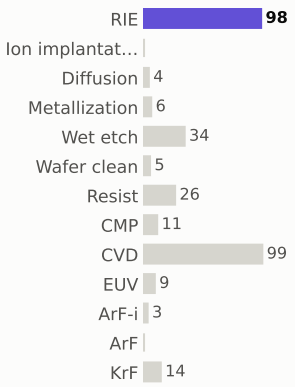

materials deposited (g)



gases emitted (g)



Step #3420: Wafer_clean

etch_strip · Wafer_clean

0.169	302.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

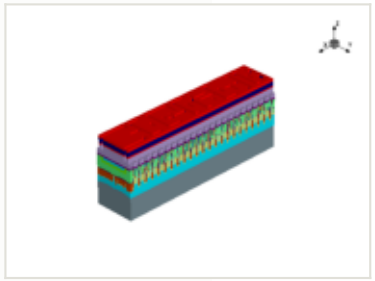

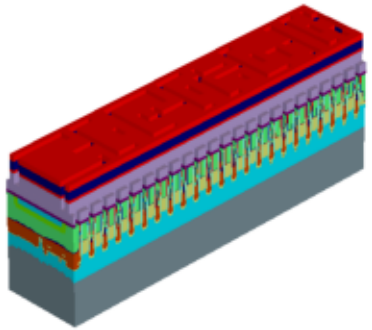

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

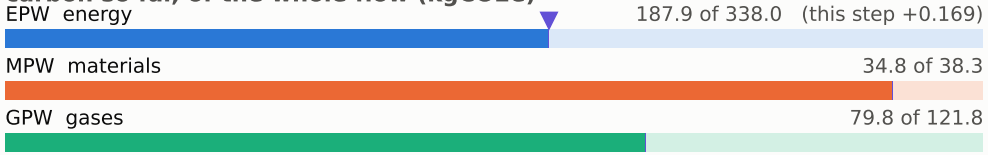

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

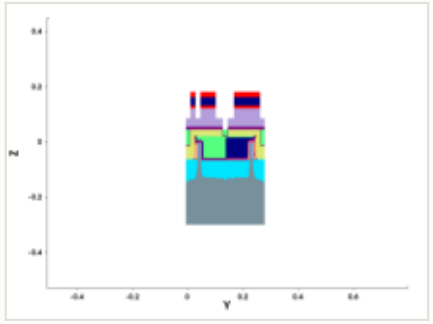

y cut at 0.211 µm

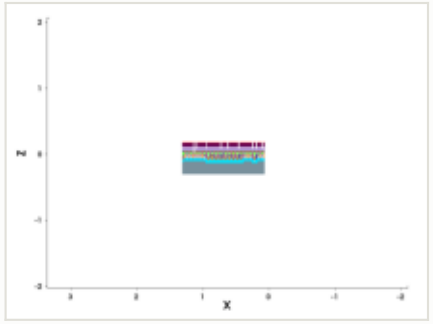

mask for this step

no mask for this step

steps by process area

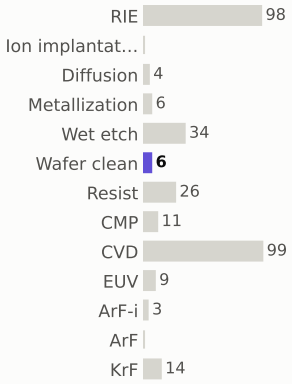

materials deposited (g)



gases emitted (g)



Step #3430: Metallization

depo_ellipsoidal · Metallization

1.2	303.6	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

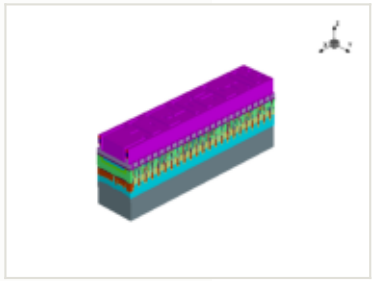

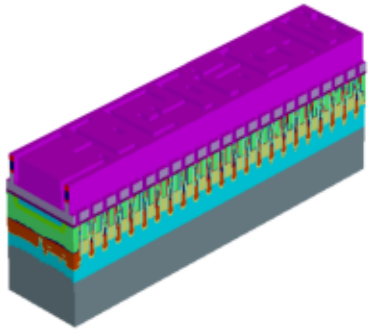

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

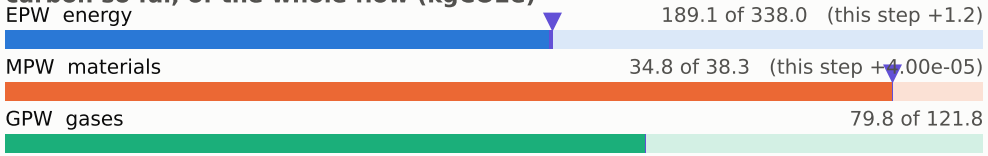

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

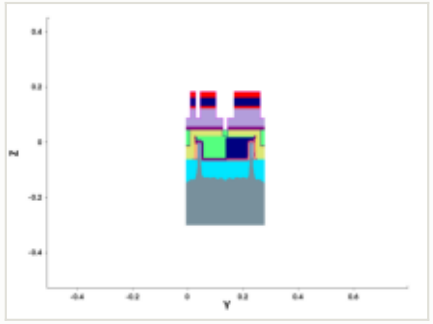

y cut at 0.211 µm

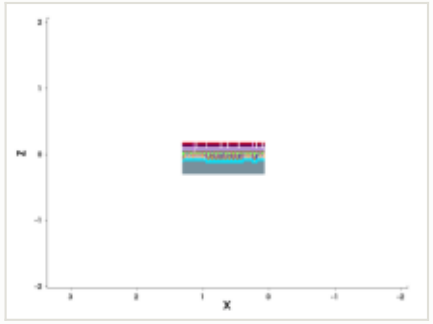

mask for this step

no mask for this step

steps by process area

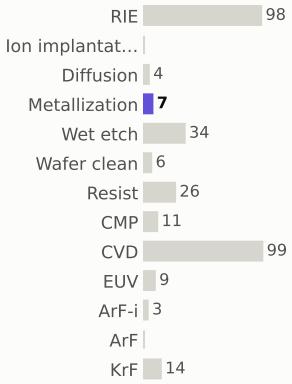

materials deposited (g)



gases emitted (g)



Step #3440: Metallization

depo_fill · Metallization

1.21	304.8	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

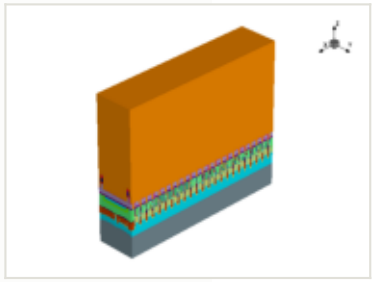

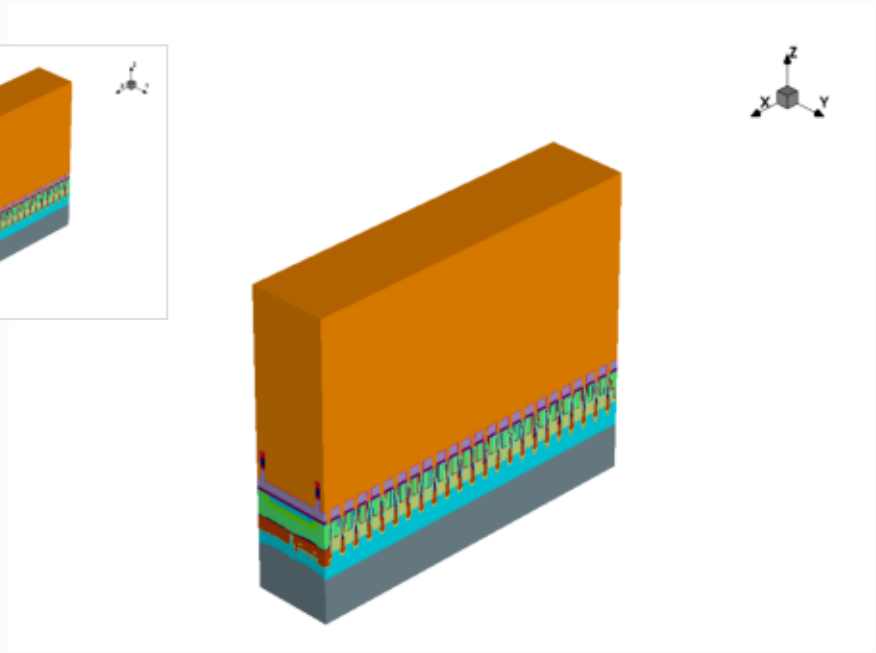

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

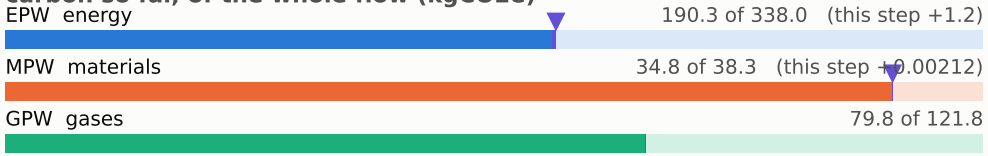

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

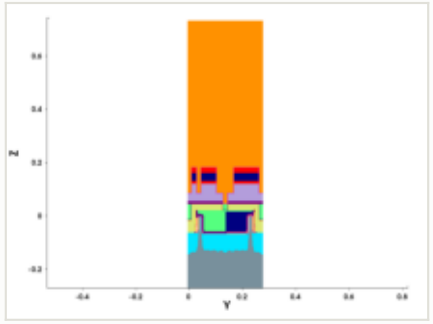

y cut at 0.211 µm

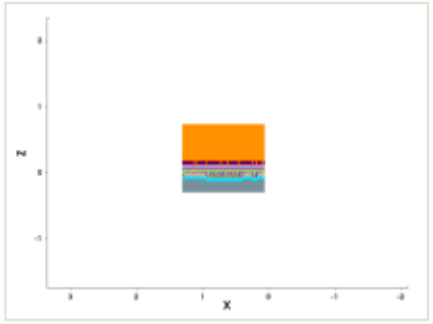

mask for this step

no mask for this step

steps by process area

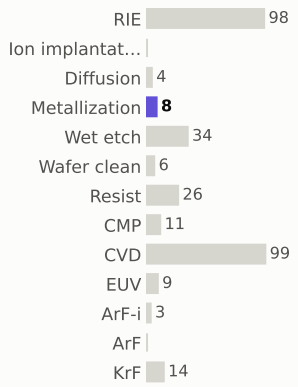

materials deposited (g)



gases emitted (g)



Step #3450: Diffusion

treatment · Diffusion

0.801	305.6	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

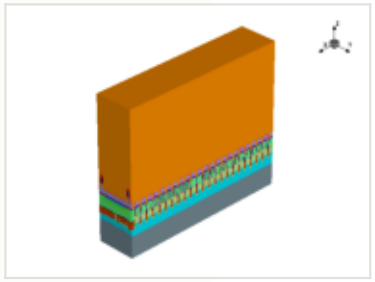

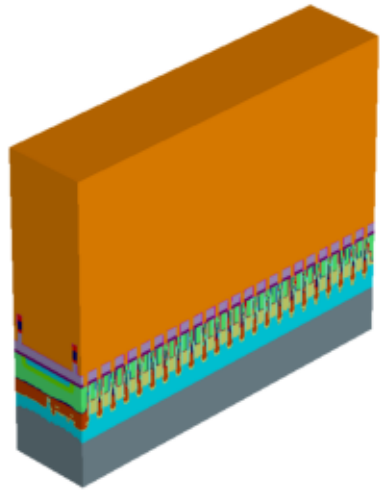

x cut at 0.677 µm

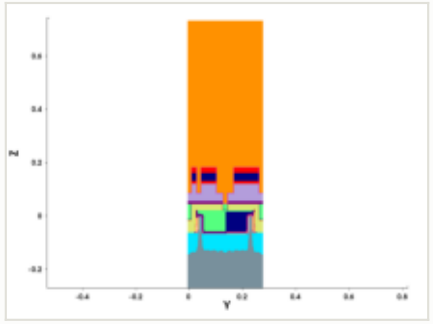

y cut at 0.211 µm

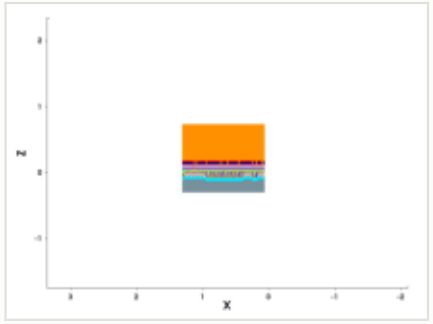

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

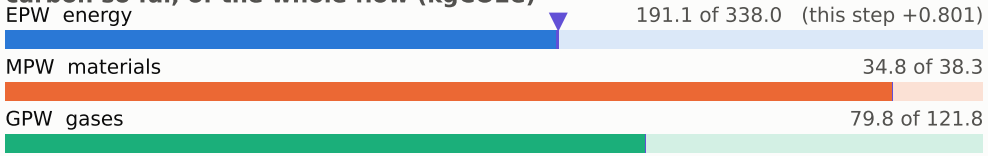

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

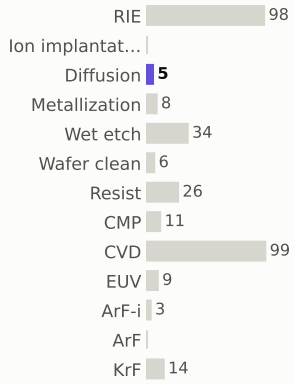

materials deposited (g)



gases emitted (g)



Step #3460: CMP

etch_cmp · CMP

0.169	305.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

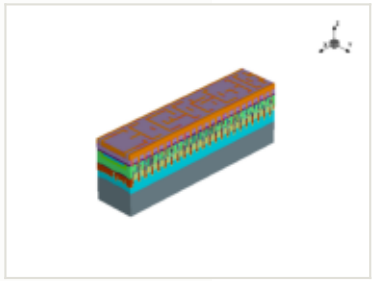

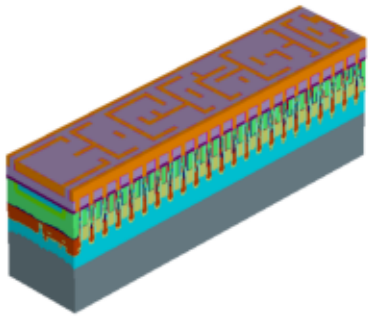

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

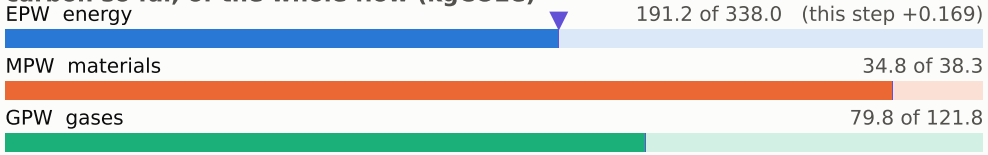

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

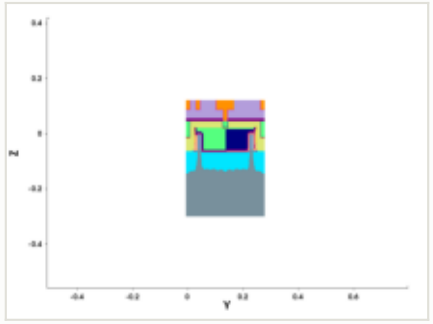

y cut at 0.211 µm

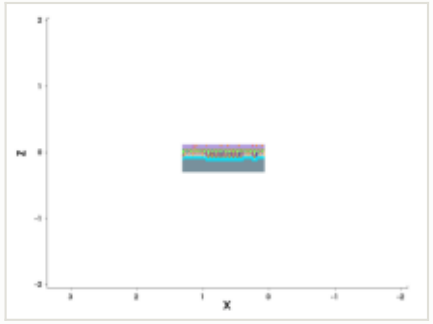

mask for this step

no mask for this step

steps by process area

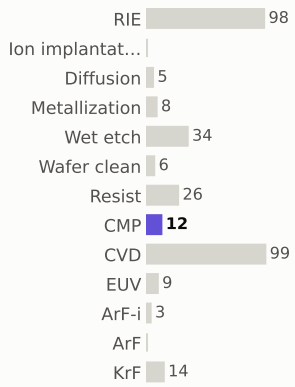

materials deposited (g)



gases emitted (g)



Step #3470: Metallization

depo_isotropic · Metallization

1.2	307.0	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

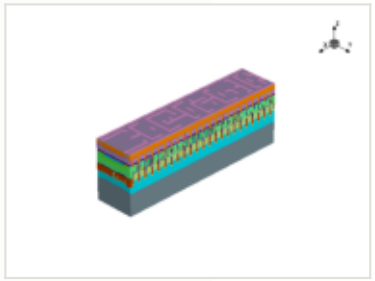

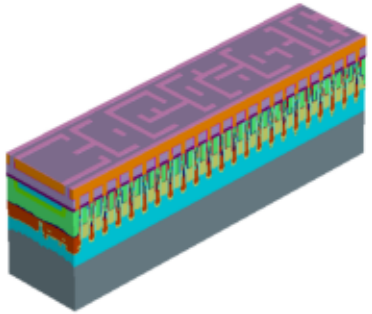

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Co	EPW tool	0.86 kgCO2e
thickness	0.0015 µm	EPW overhead	0.344 kgCO2e
material GWP	44.5 gCO2e/g	MPW	4.20e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

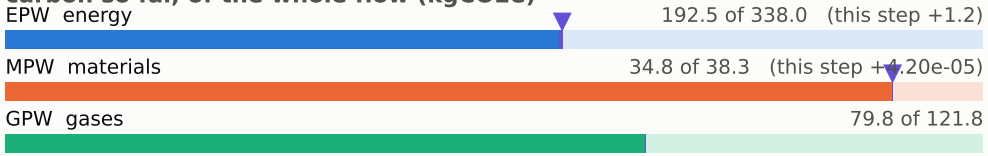

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

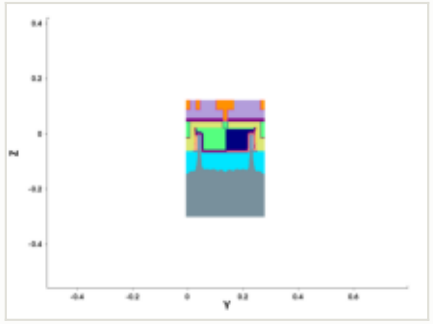

y cut at 0.211 µm

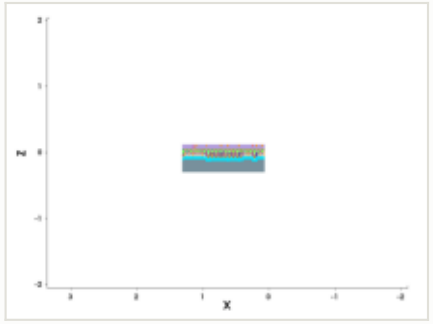

mask for this step

no mask for this step

steps by process area

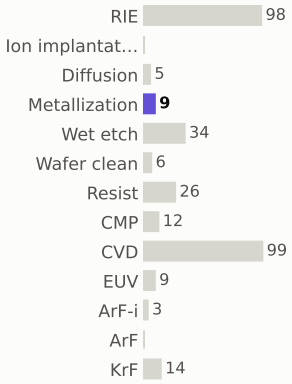

materials deposited (g)



gases emitted (g)



Step #3490: CVD

depo_fill · CVD

1.31	308.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

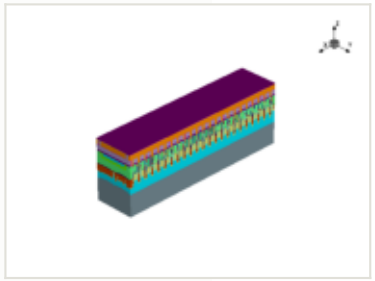

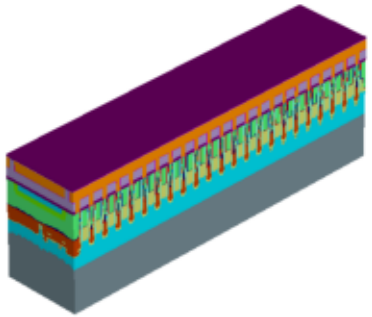

x cut at 0.677 µm

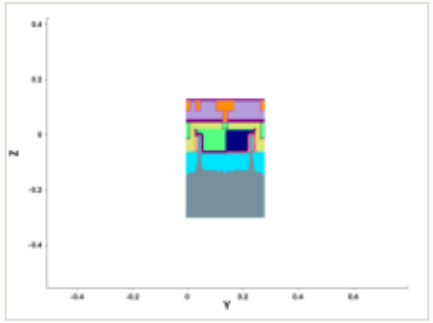

y cut at 0.211 µm

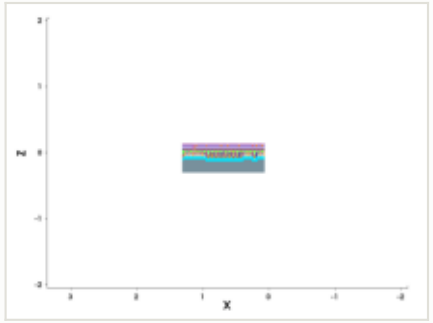

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

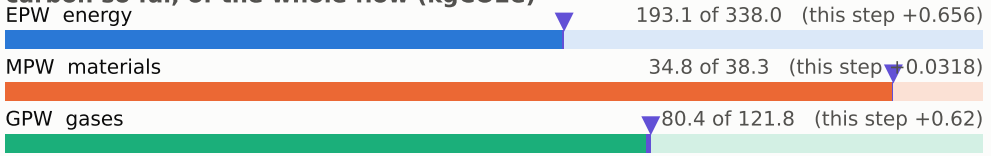

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

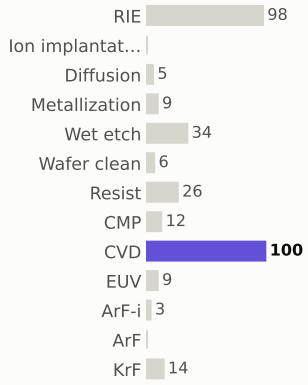

materials deposited (g)



gases emitted (g)



Step #3500: CVD

depo_fill · CVD

1.31	309.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

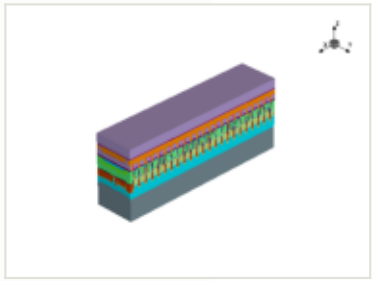

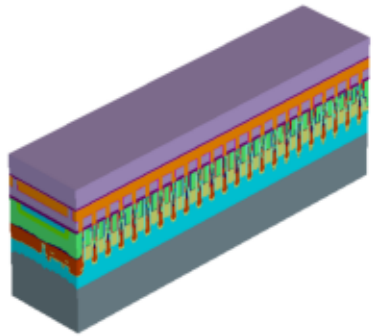

x cut at 0.677 µm

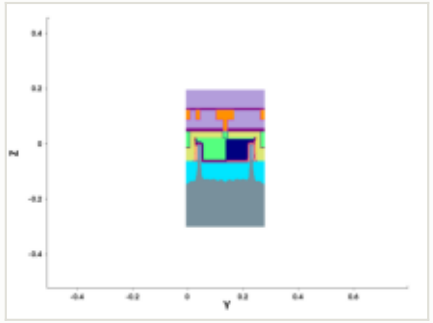

y cut at 0.211 µm

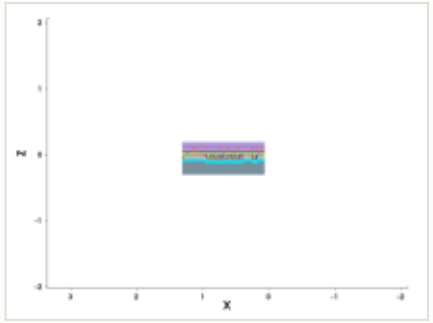

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.066 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

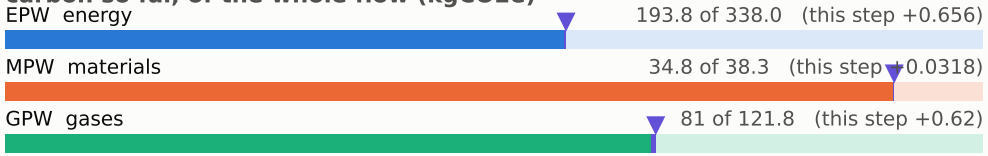

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #3510: Diffusion

treatment · Diffusion

0.801	310.4	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

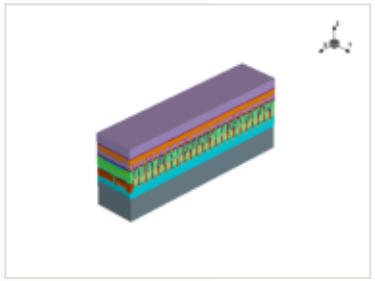



x cut at 0.677 µm

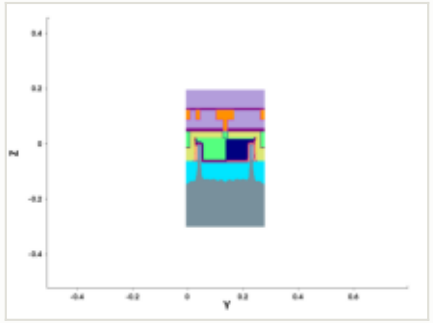

y cut at 0.211 µm

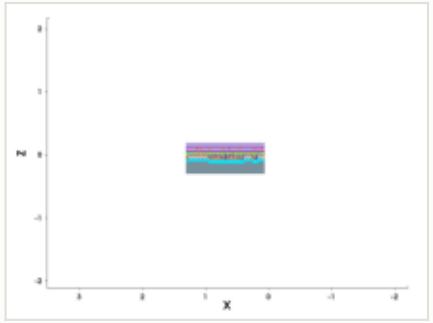

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

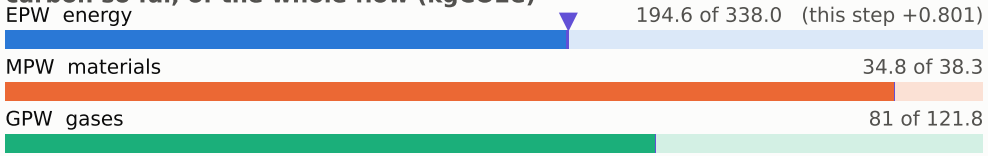

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

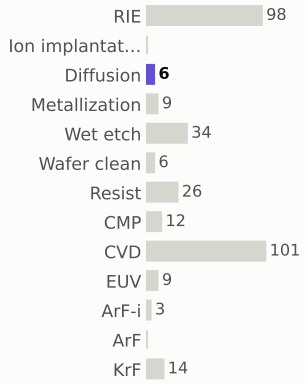

materials deposited (g)



gases emitted (g)



Step #3520: Wafer_clean

clean · Wafer_clean

0.169	310.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

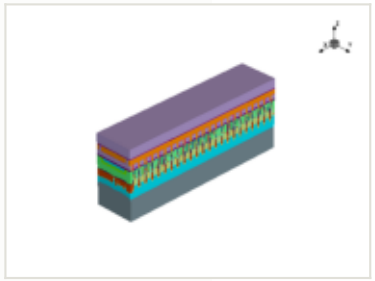

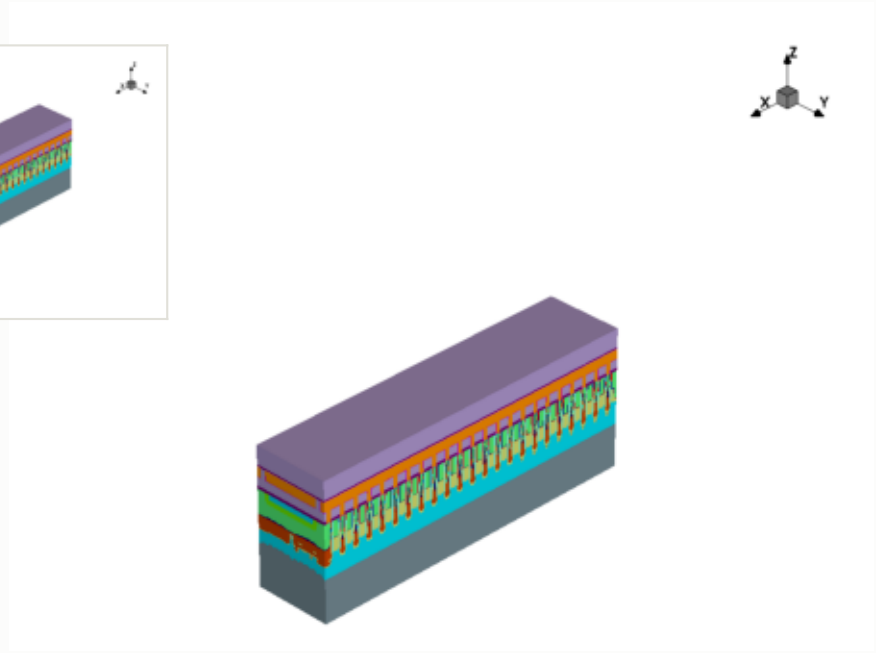

x cut at 0.677 µm

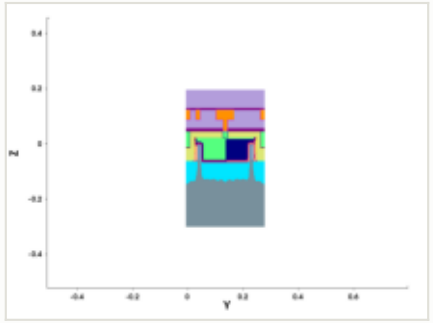

y cut at 0.211 µm

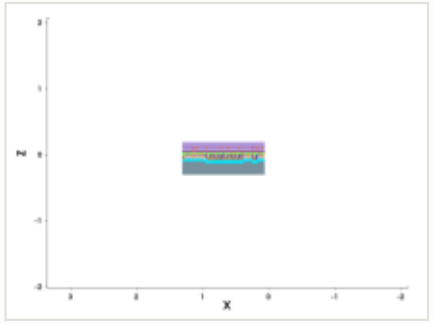

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

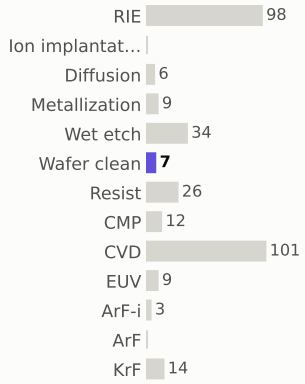

materials deposited (g)



gases emitted (g)



Step #3530: CVD

depo_fill · CVD

1.31	311.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

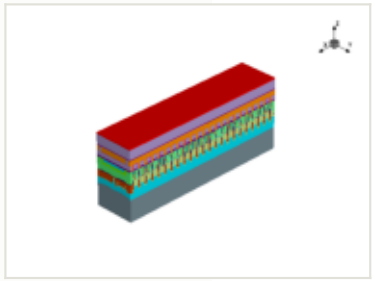

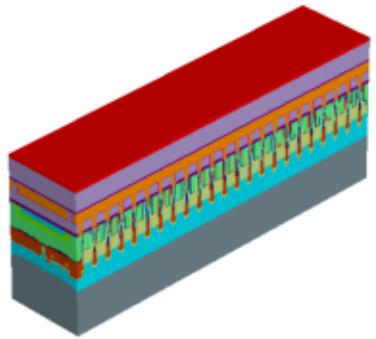

x cut at 0.677 µm

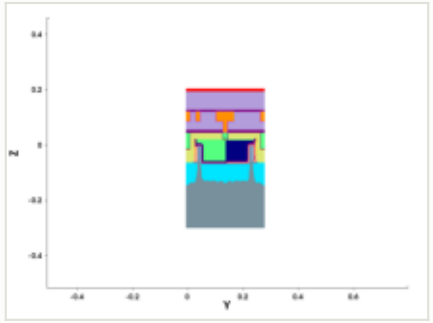

y cut at 0.211 µm

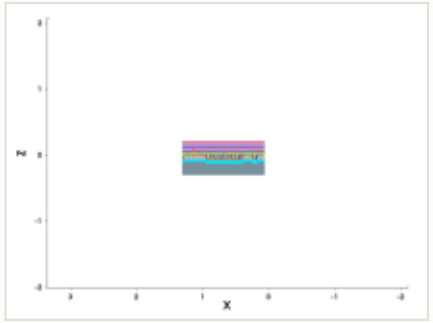

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

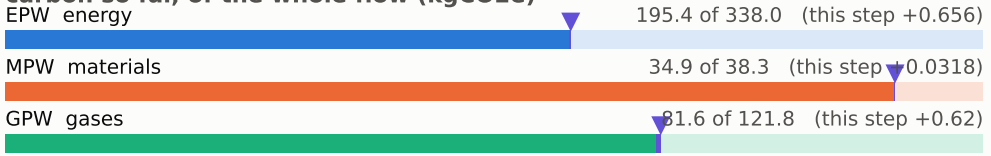

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #3540: CVD

depo_fill · CVD

1.31	313.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

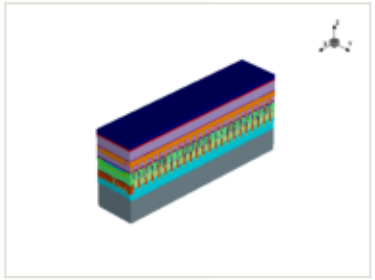

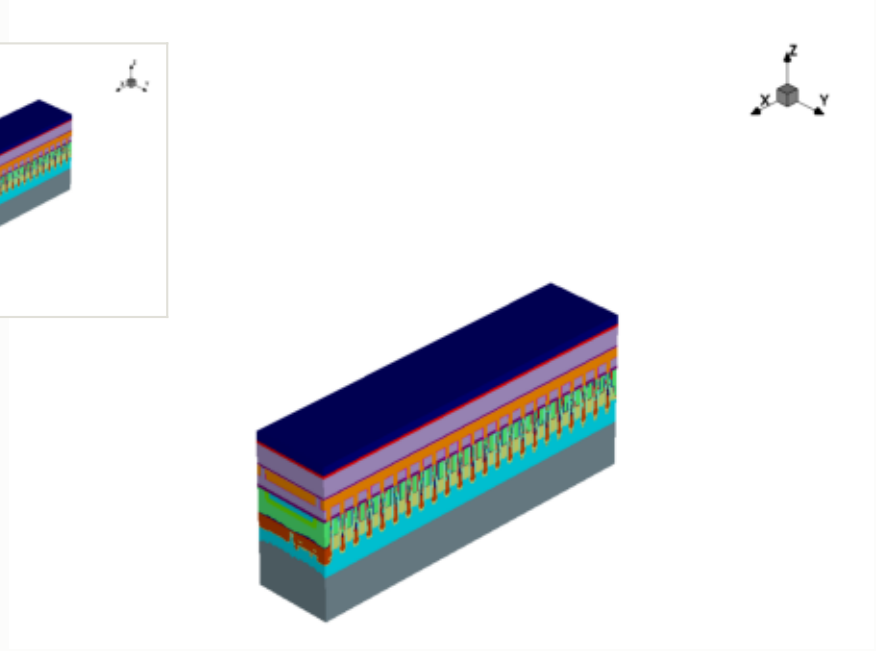

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

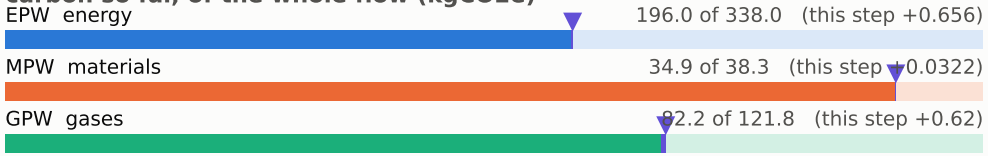

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

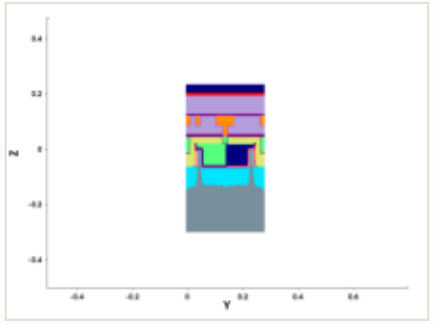

y cut at 0.211 µm

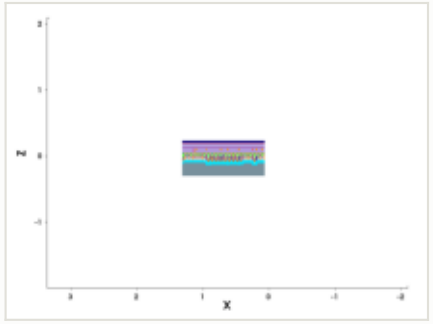

mask for this step

no mask for this step

steps by process area

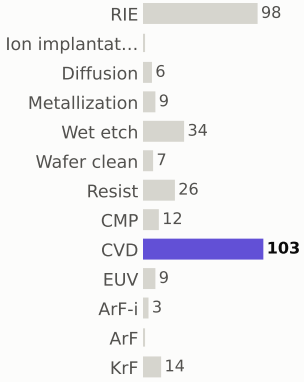

materials deposited (g)



gases emitted (g)



Step #3550: Wafer_clean

clean · Wafer_clean

0.169	313.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

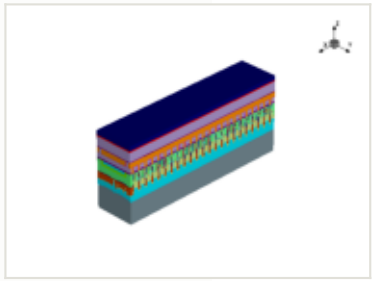

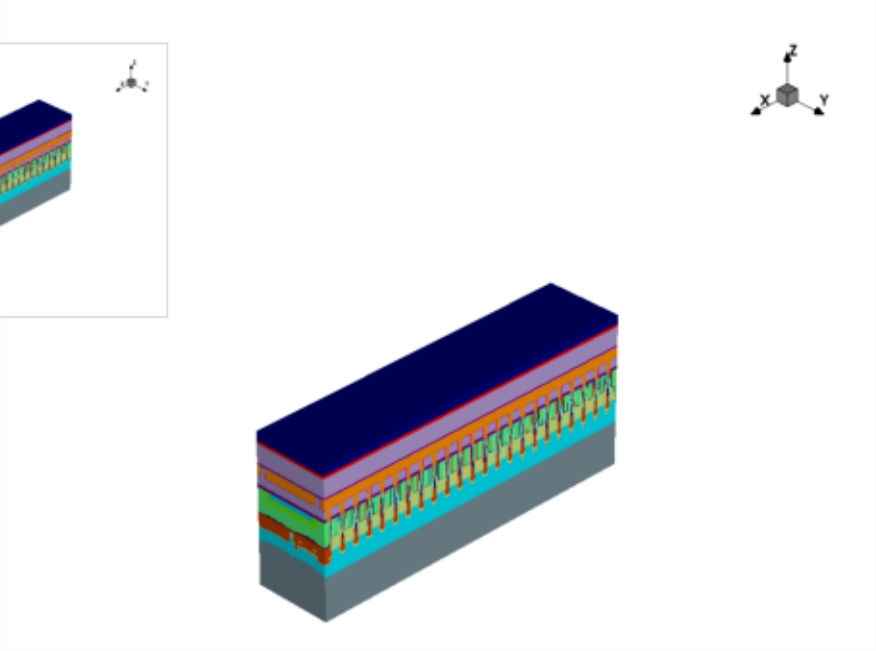

x cut at 0.677 µm

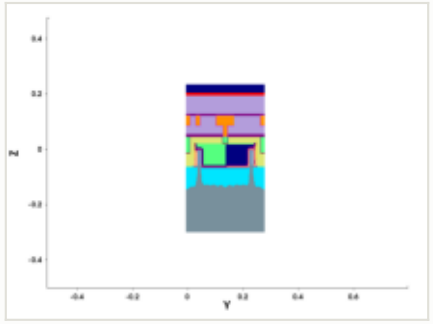

y cut at 0.211 µm

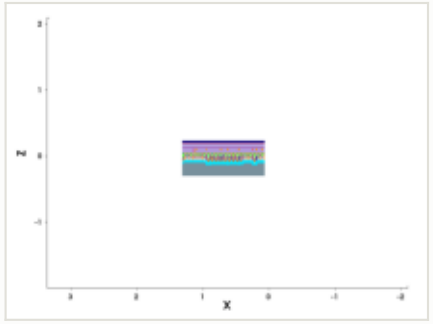

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

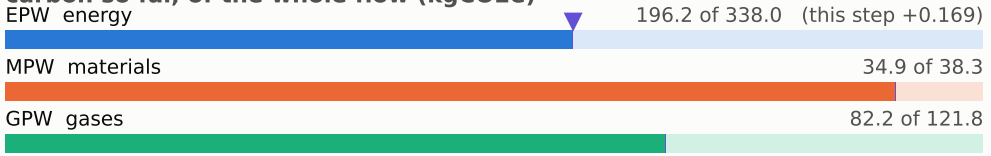

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

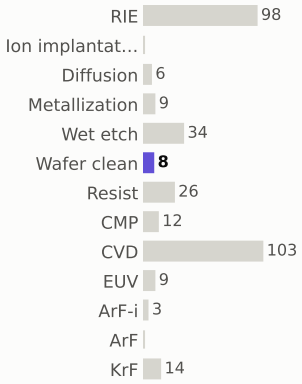

materials deposited (g)



gases emitted (g)



Step #3560: CVD

depo_fill · CVD

1.31	314.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

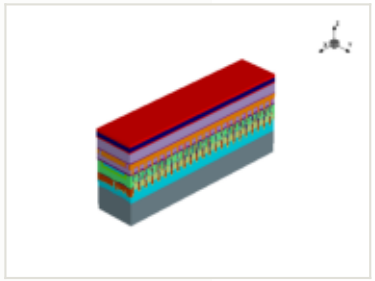

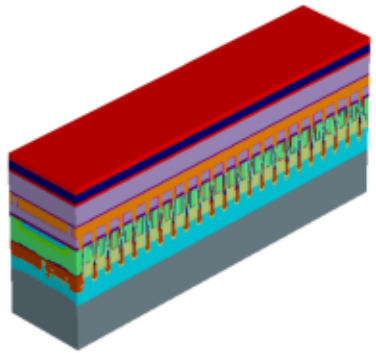

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

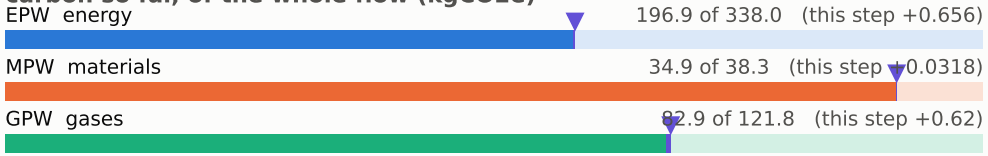

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

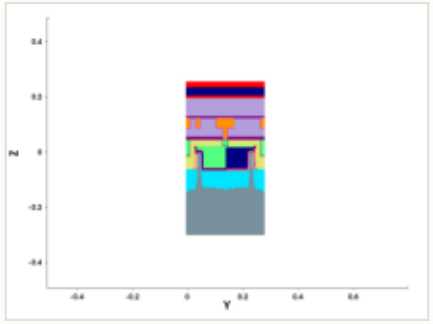

y cut at 0.211 µm

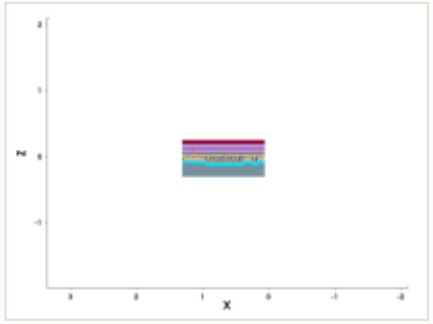

mask for this step

no mask for this step

steps by process area

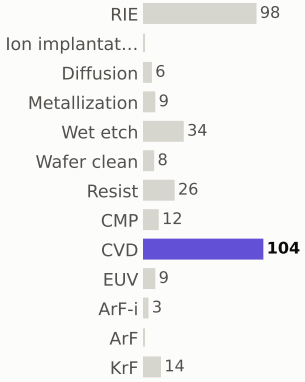

materials deposited (g)



gases emitted (g)

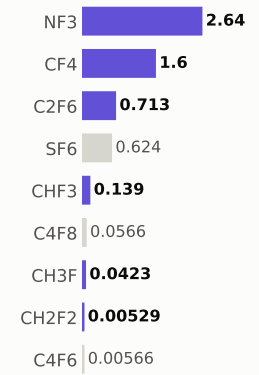

Step #3570: Resist

depo_fill · Resist

0.169	314.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

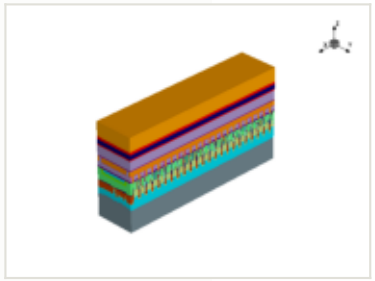

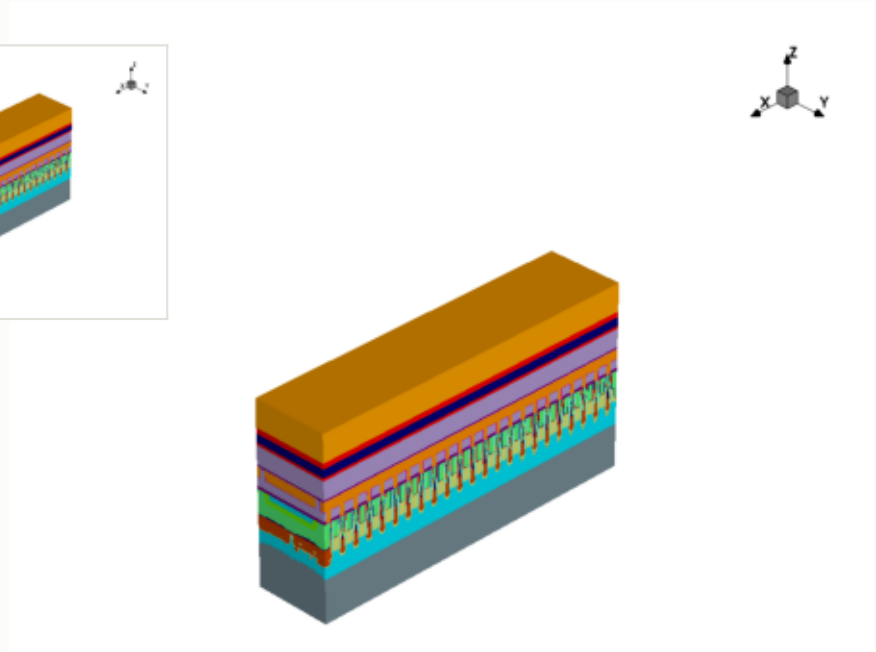

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

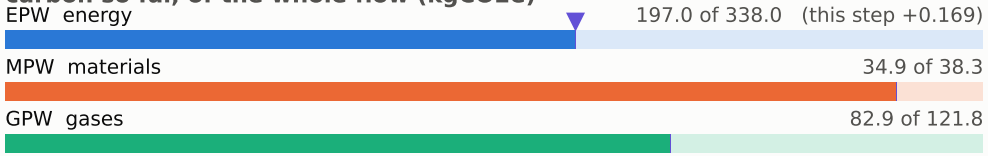

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

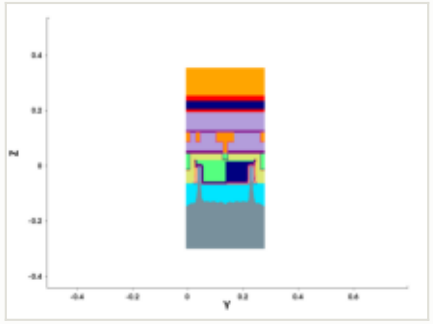

y cut at 0.211 µm

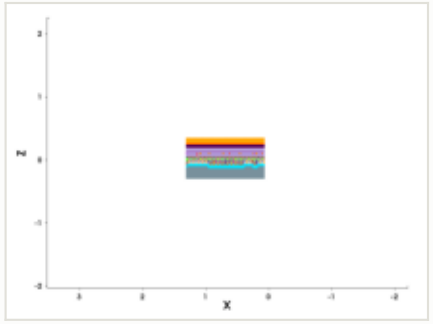

mask for this step

no mask for this step

steps by process area

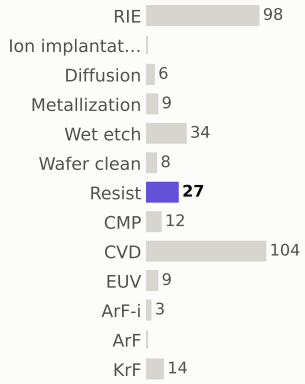

materials deposited (g)



gases emitted (g)



Step #3580: CVD

depo_fill · CVD

1.31	316.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

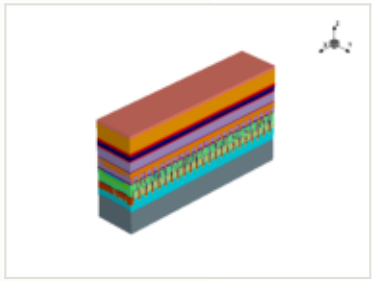

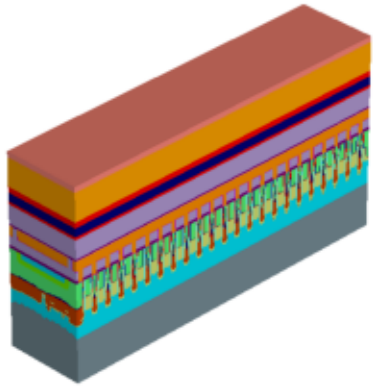

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

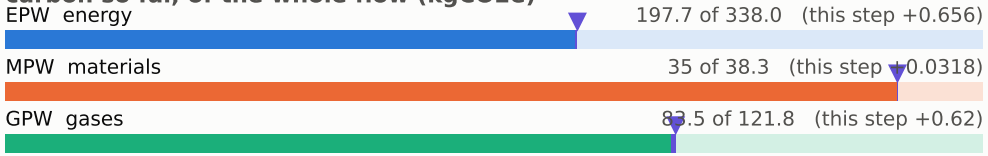

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

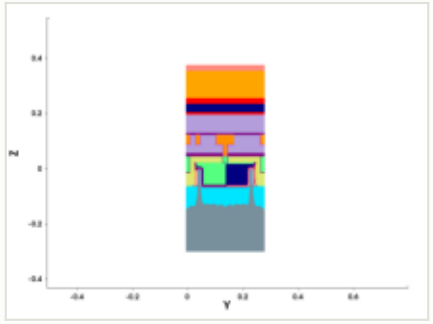

y cut at 0.211 µm

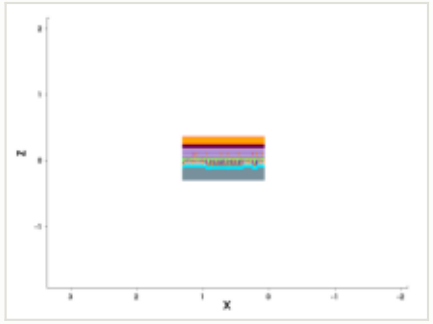

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #3590: Wafer_clean

clean · Wafer_clean

0.169	316.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

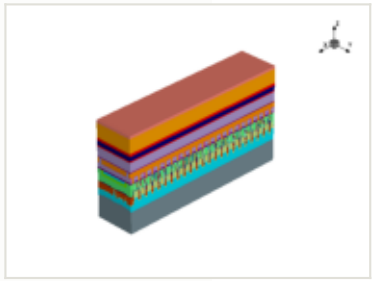

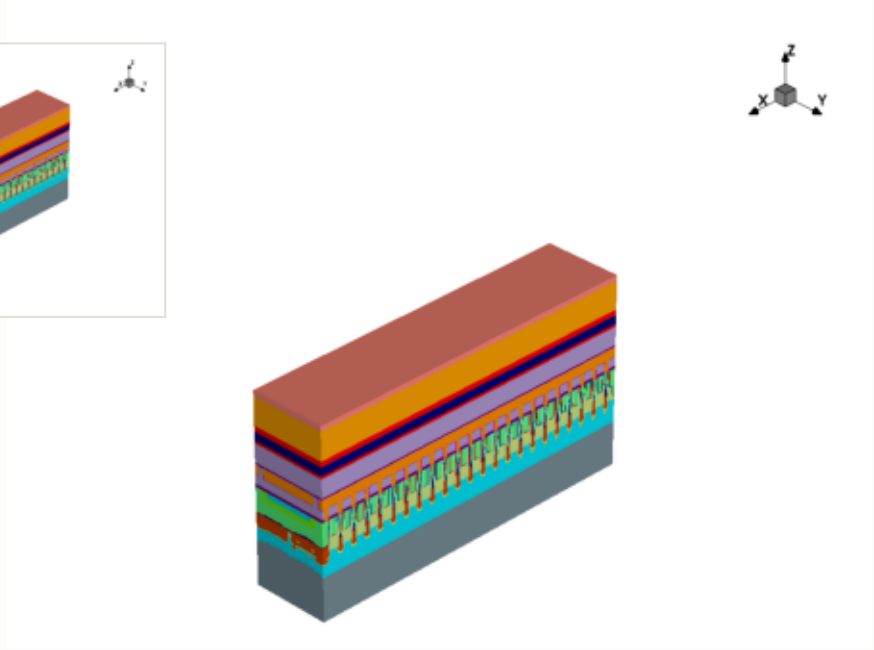

x cut at 0.677 µm

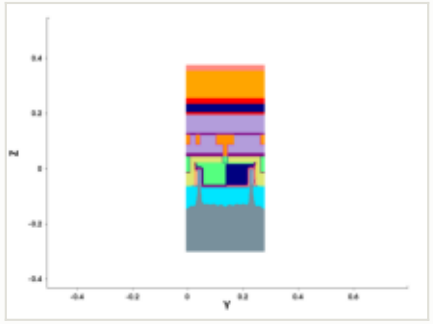

y cut at 0.211 µm

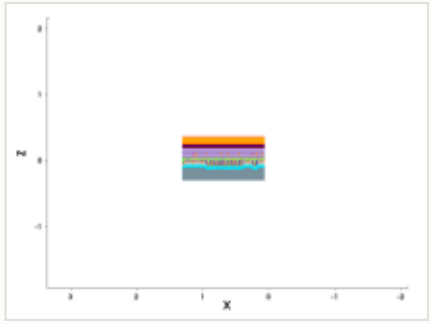

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

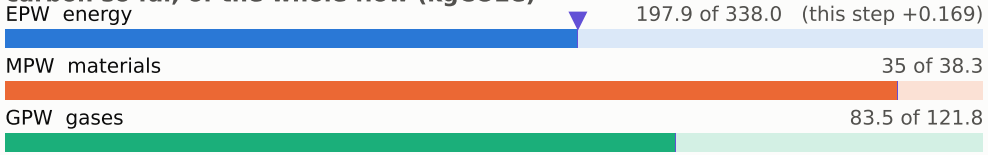

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

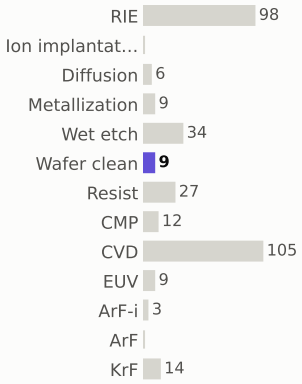

materials deposited (g)



gases emitted (g)



Step #3600: EUV

litho_patterning · EUV

1.96	318.3	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

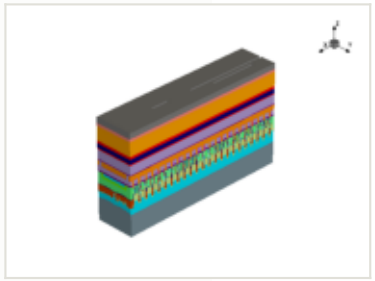

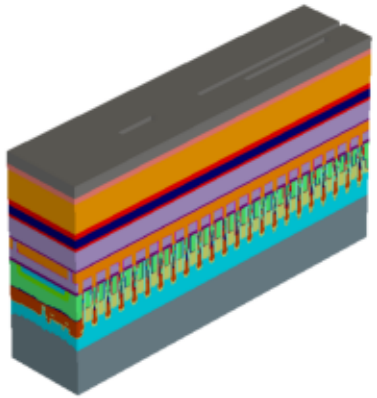

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

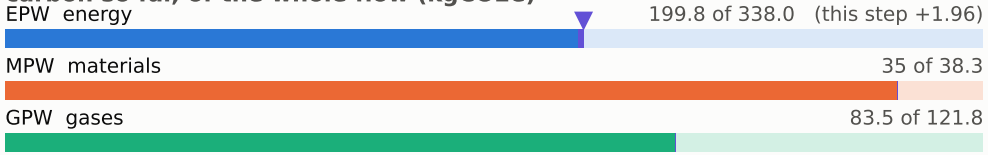

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

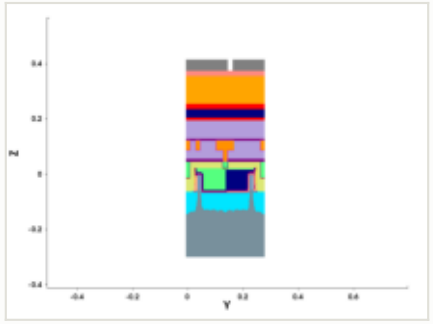

y cut at 0.211 µm

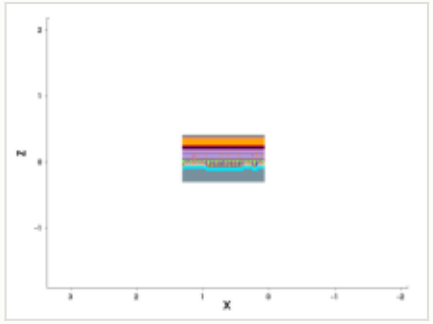

mask: layer 20:0 (GDSII)

steps by process area

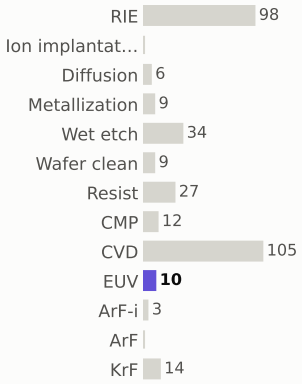

materials deposited (g)



gases emitted (g)



Step #3610: RIE

etch_anisotropic · RIE

1.04	319.3	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

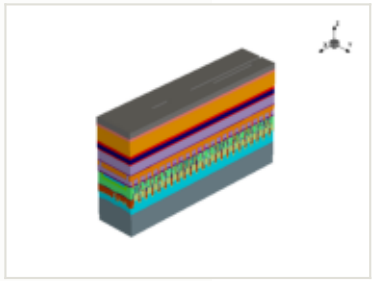

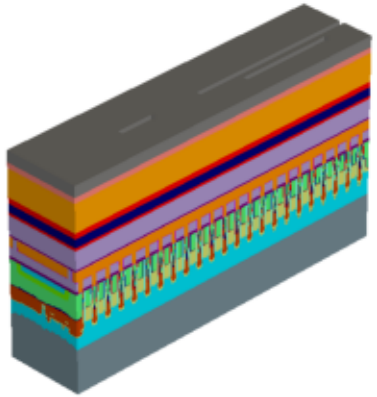

x cut at 0.677 µm

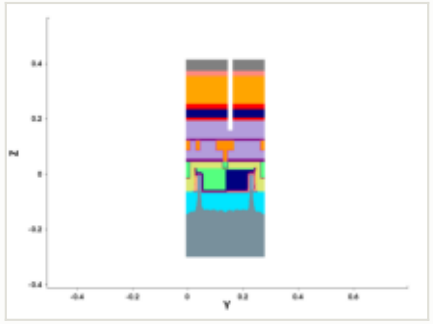

y cut at 0.211 µm

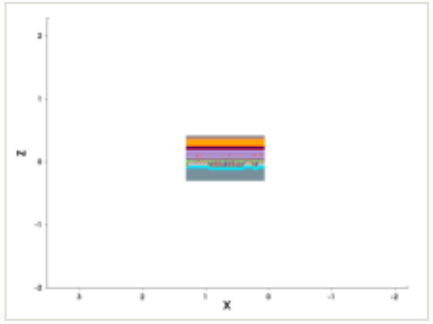

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

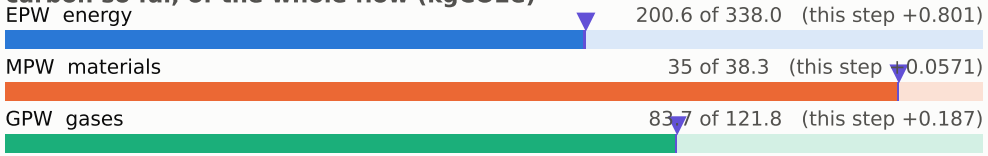

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

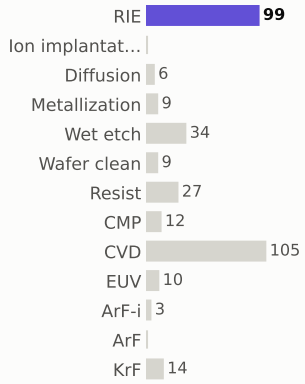

materials deposited (g)



gases emitted (g)



Step #3620: Wafer_clean

etch_strip · Wafer_clean

0.169	319.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

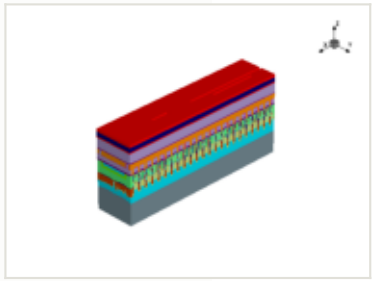

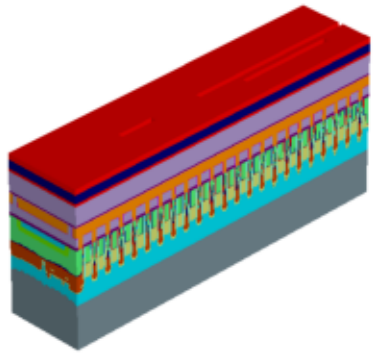

x cut at 0.677 µm

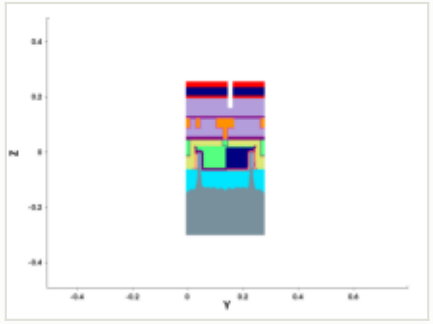

y cut at 0.211 µm

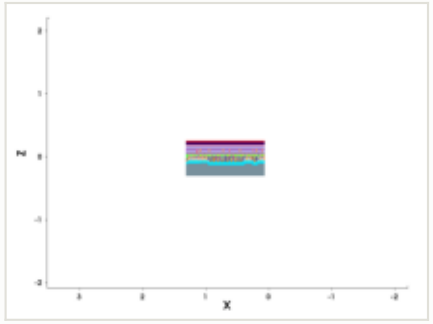

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

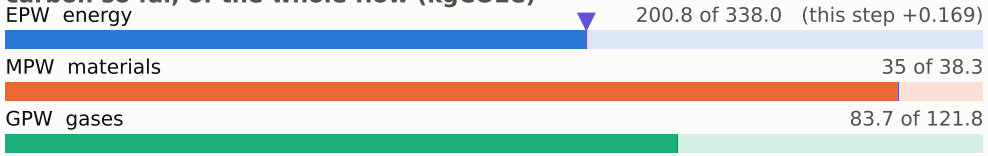

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

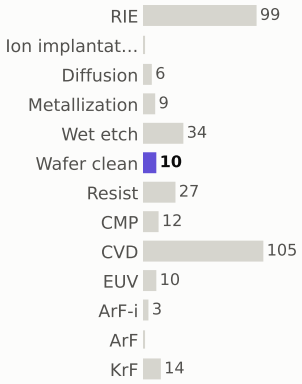

materials deposited (g)



gases emitted (g)



Step #3630: Resist

depo_fill · Resist

0.169	319.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

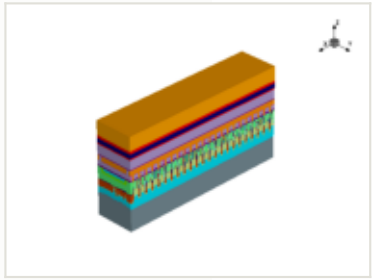

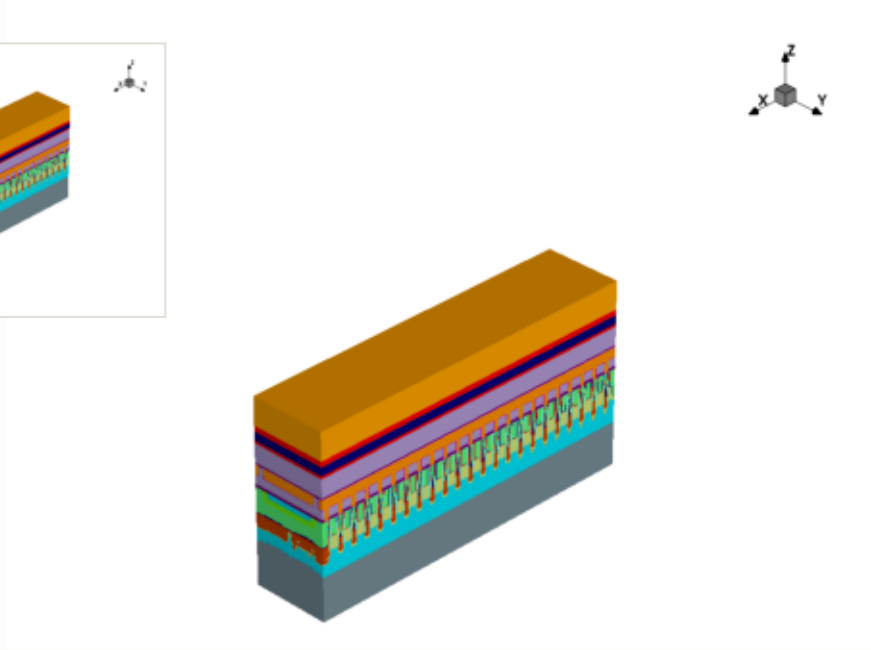

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

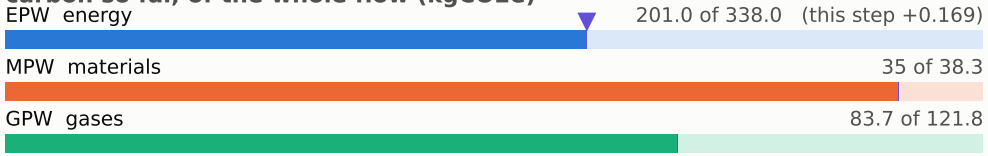

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

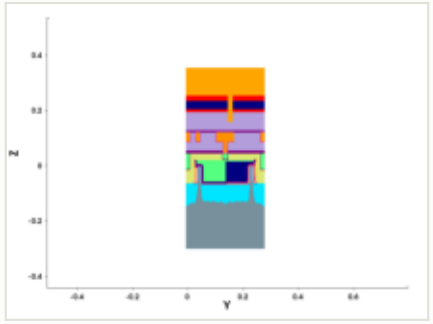

y cut at 0.211 µm

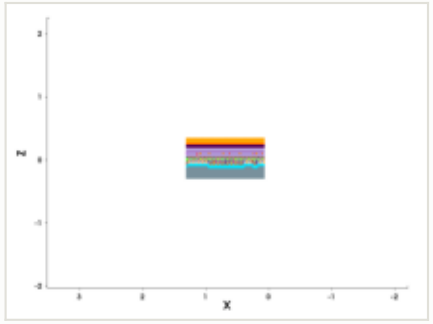

mask for this step

no mask for this step

steps by process area

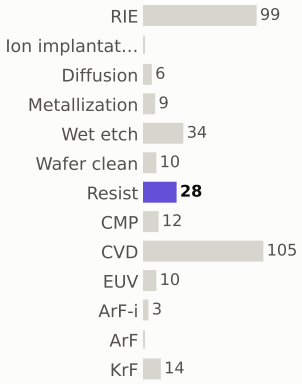

materials deposited (g)



gases emitted (g)



Step #3640: CVD

depo_fill · CVD

1.31	321.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

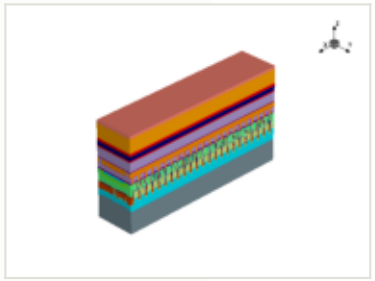

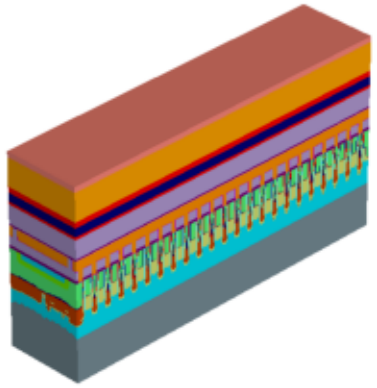

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

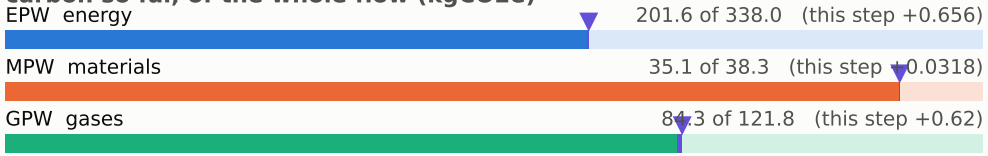

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

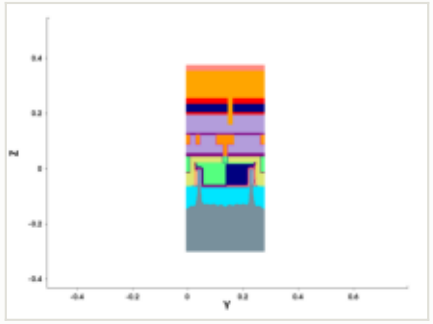

y cut at 0.211 µm

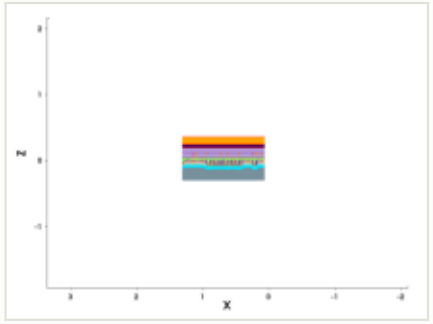

mask for this step

no mask for this step

steps by process area

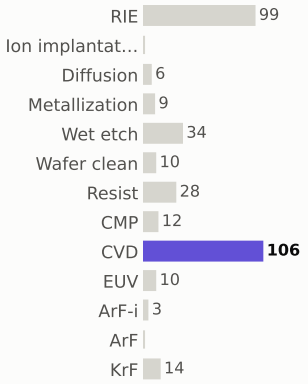

materials deposited (g)



gases emitted (g)



Step #3650: Wafer_clean

clean · Wafer_clean

0.169	321.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

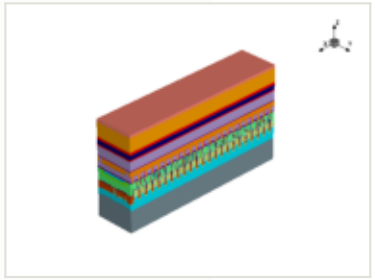

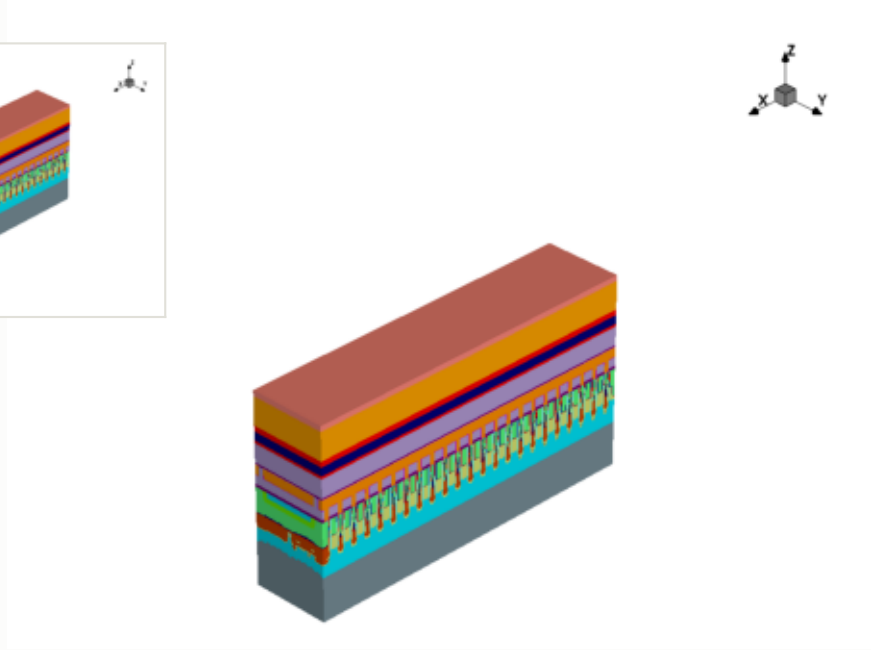

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

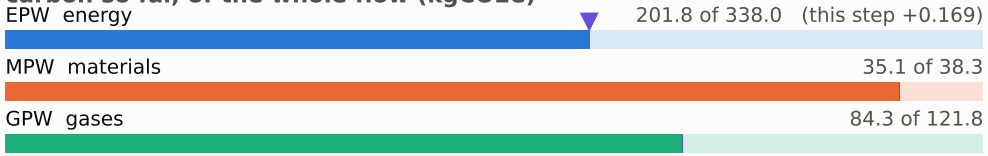

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

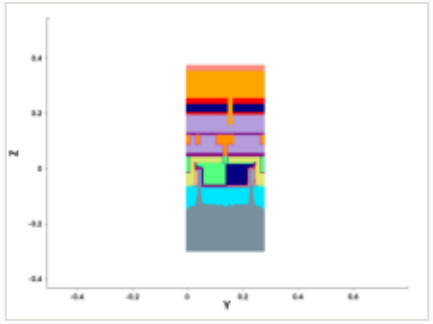

y cut at 0.211 µm

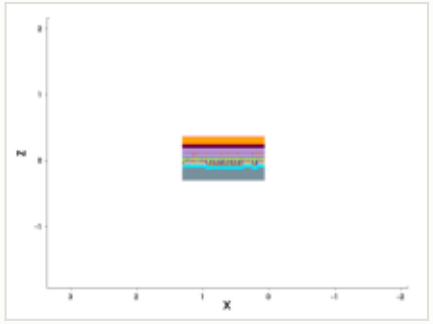

mask for this step

no mask for this step

steps by process area

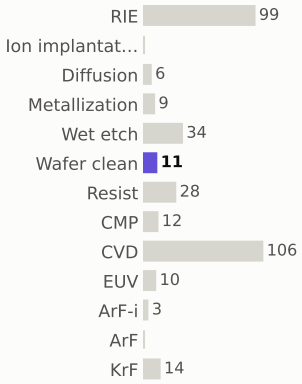

materials deposited (g)



gases emitted (g)



Step #3660: EUV

litho_patterning · EUV

1.96	323.1	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

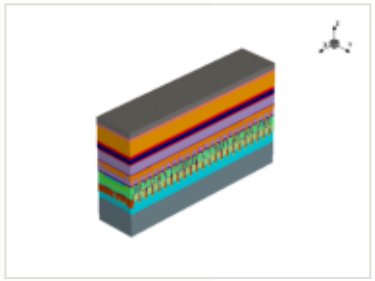

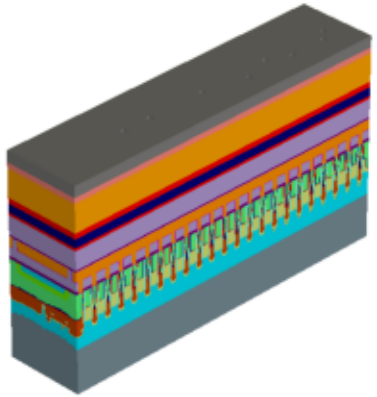

x cut at 0.677 µm

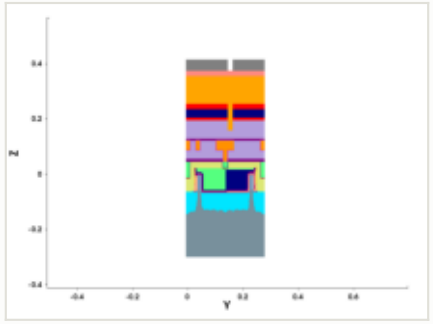

y cut at 0.211 µm

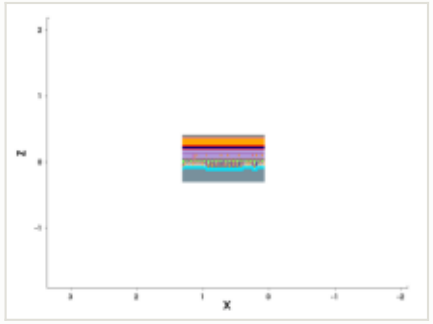

mask: layer 21:0 (GDSII)

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

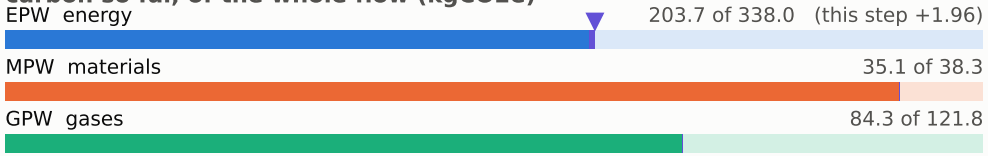

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

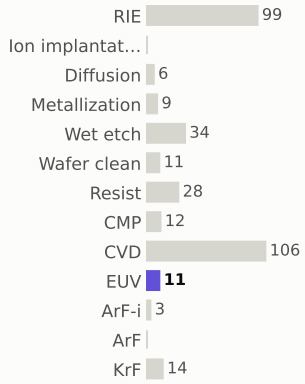

materials deposited (g)



gases emitted (g)

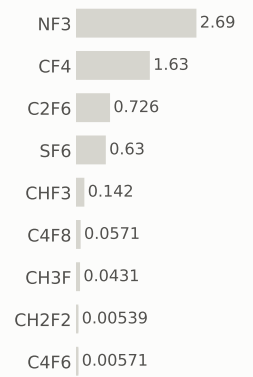

Step #3670: RIE

etch_anisotropic · RIE

1.04	324.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

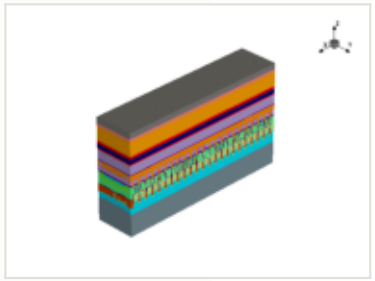

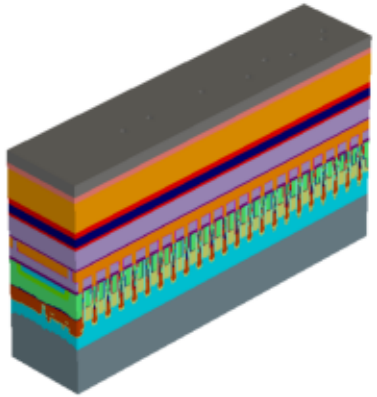

x cut at 0.677 µm

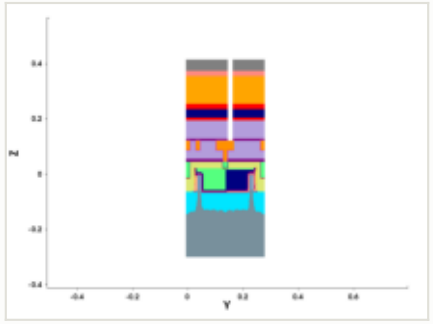

y cut at 0.211 µm

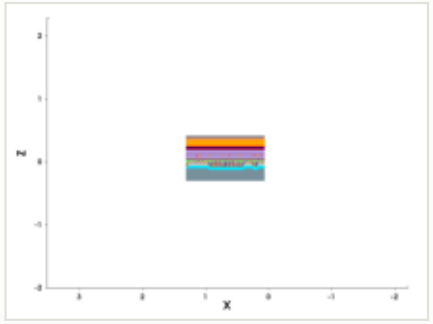

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

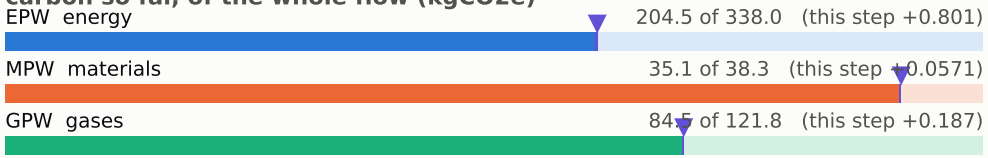

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

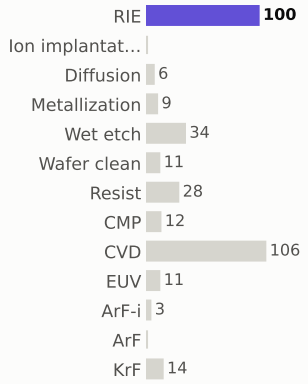

materials deposited (g)



gases emitted (g)



Step #3680: Wafer_clean

etch_strip · Wafer_clean

0.169	324.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

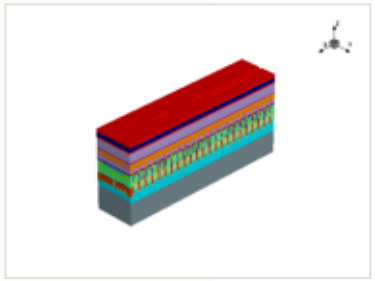

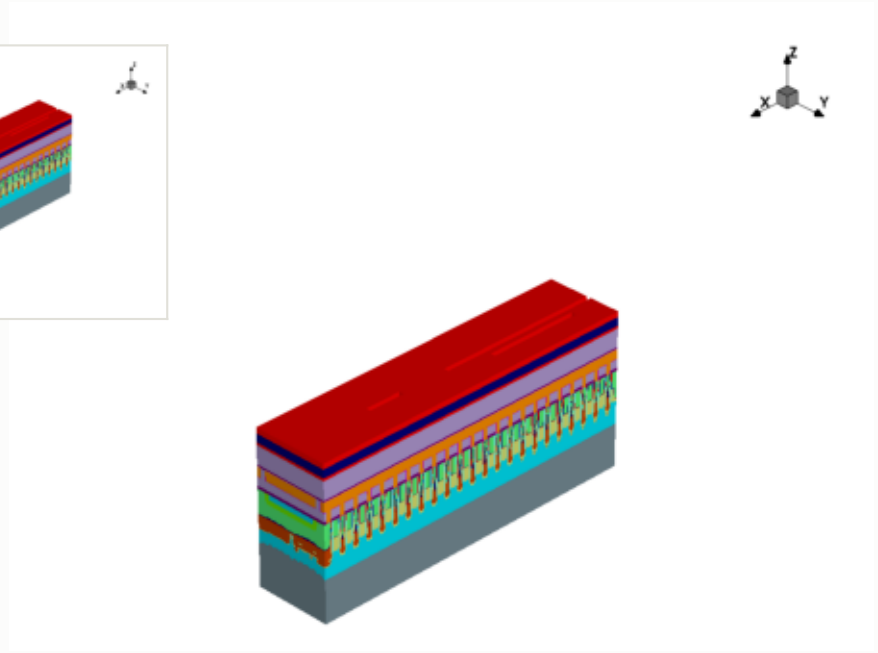

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

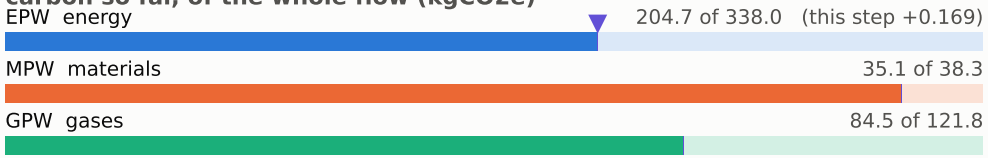

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

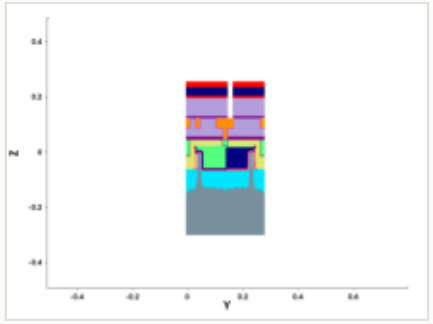

y cut at 0.211 µm

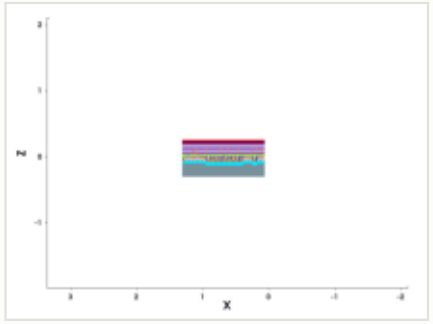

mask for this step

no mask for this step

steps by process area

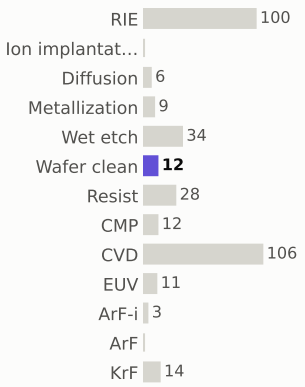

materials deposited (g)



gases emitted (g)



Step #3690: Metallization

depo_ellipsoidal · Metallization

1.2	325.5	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

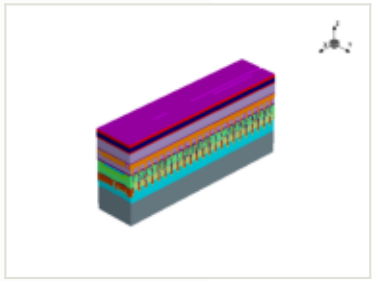

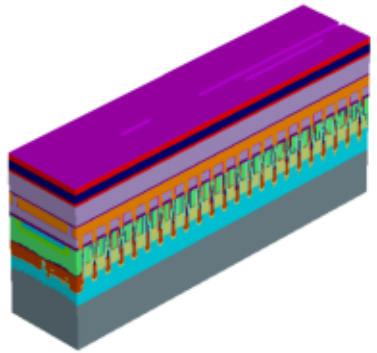

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

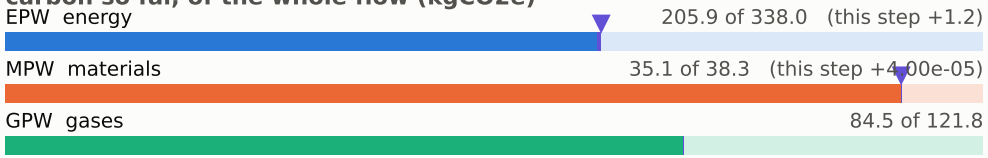

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

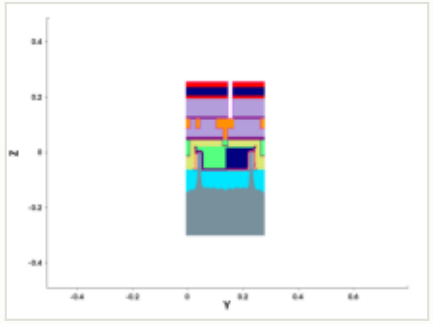

y cut at 0.211 µm

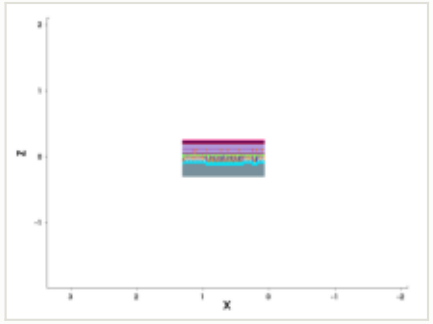

mask for this step

no mask for this step

steps by process area

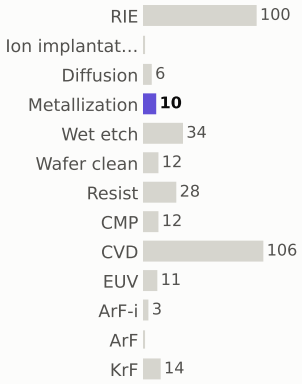

materials deposited (g)



gases emitted (g)



Step #3700: Metallization

depo_fill · Metallization

1.21	326.7	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

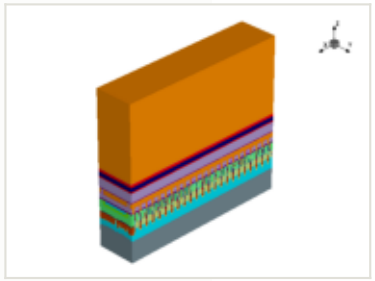

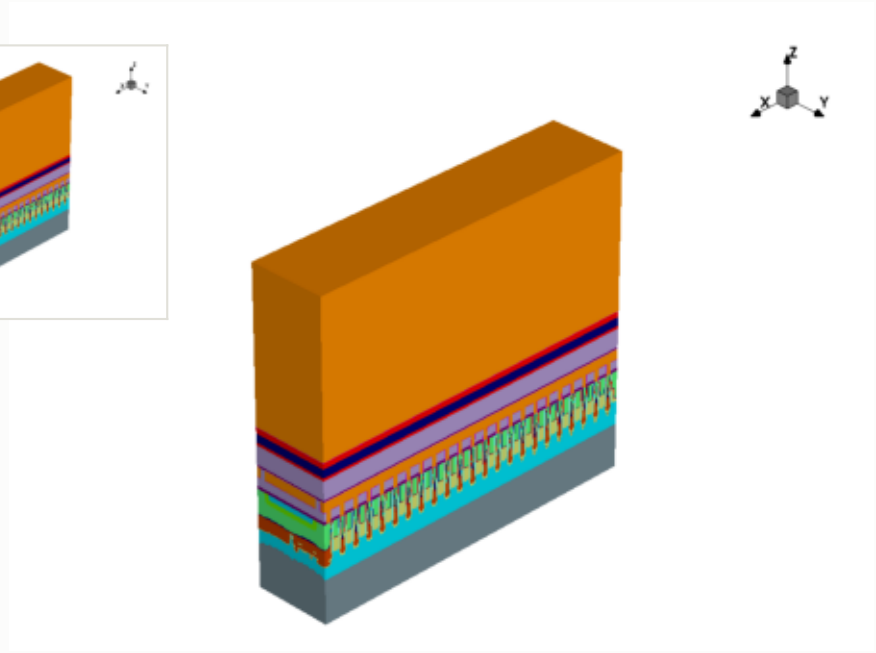

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

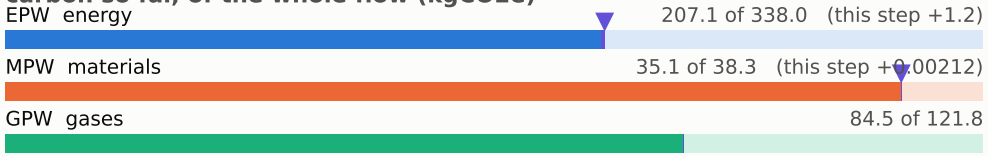

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

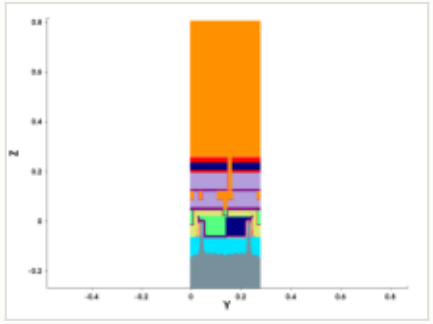

y cut at 0.211 µm

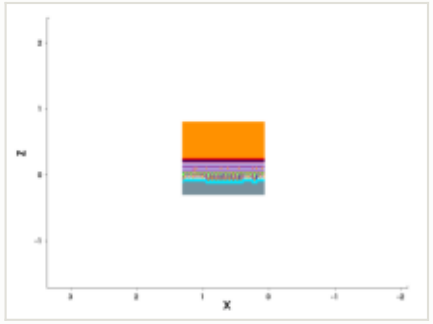

mask for this step

no mask for this step

steps by process area

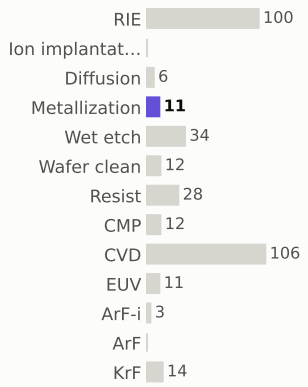

materials deposited (g)



gases emitted (g)



Step #3710: Diffusion

treatment · Diffusion

0.801	327.5	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

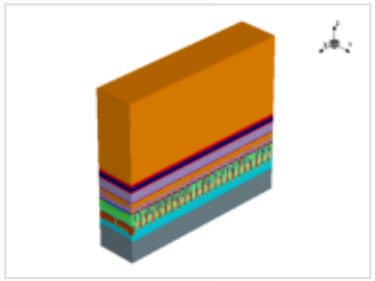

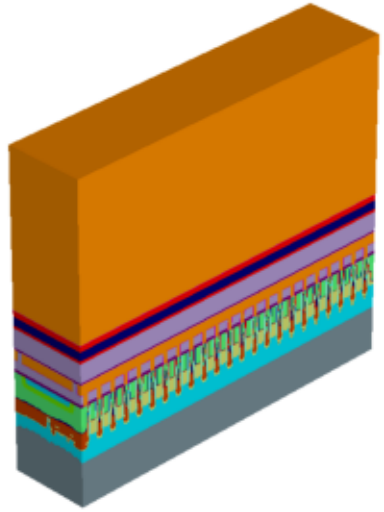

x cut at 0.677 µm

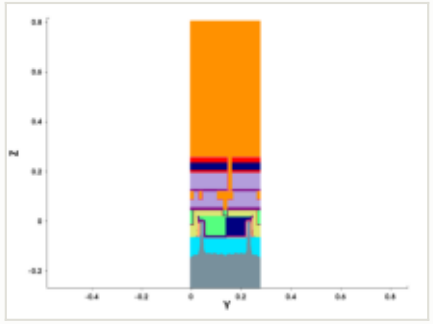

y cut at 0.211 µm

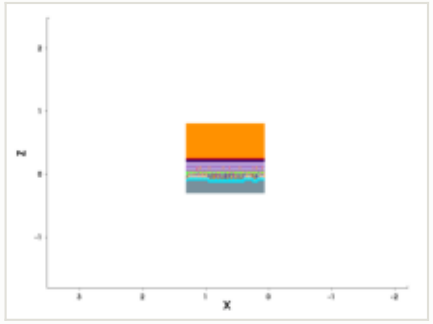

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

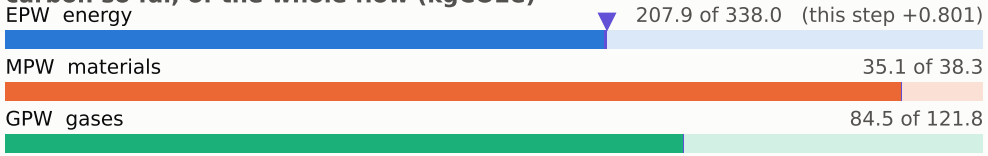

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

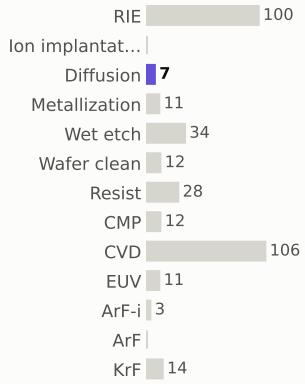

materials deposited (g)



gases emitted (g)



Step #3720: CMP

etch_cmp · CMP

0.169	327.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

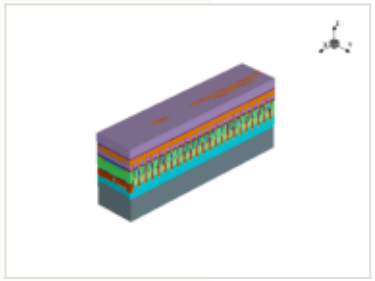



this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

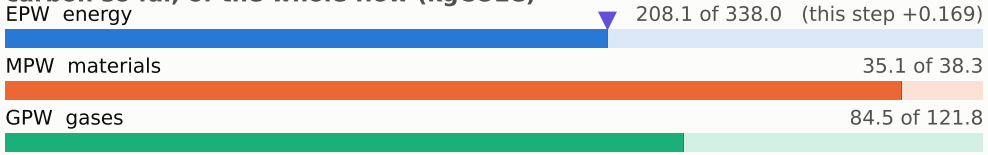

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

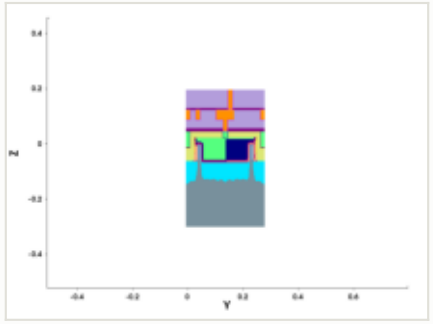

y cut at 0.211 µm

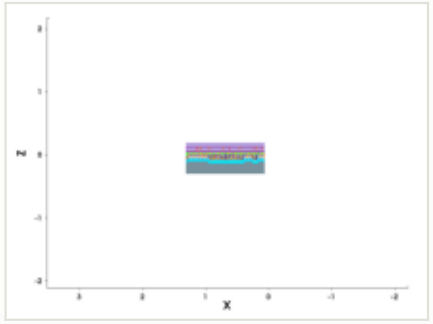

mask for this step

no mask for this step

steps by process area

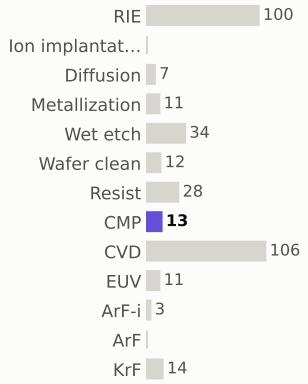

materials deposited (g)



gases emitted (g)



Step #3730: Metallization

depo_isotropic · Metallization

1.2	328.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

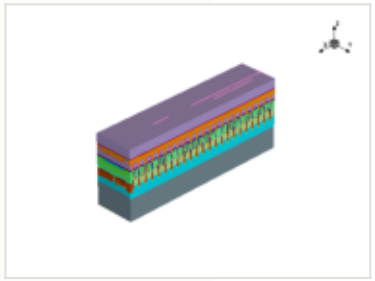



this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

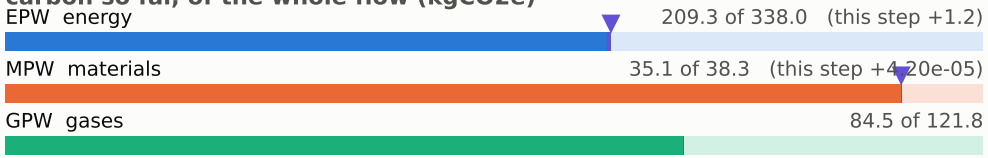

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

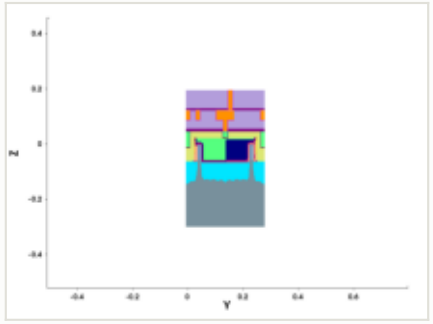

y cut at 0.211 µm

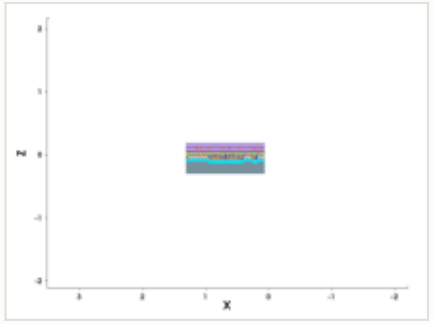

mask for this step

no mask for this step

steps by process area

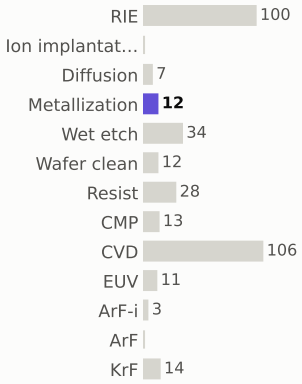

materials deposited (g)



gases emitted (g)



Step #3750: CVD

depo_fill · CVD

1.31	330.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

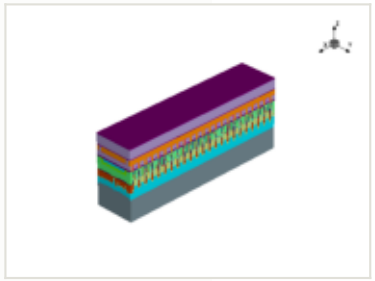

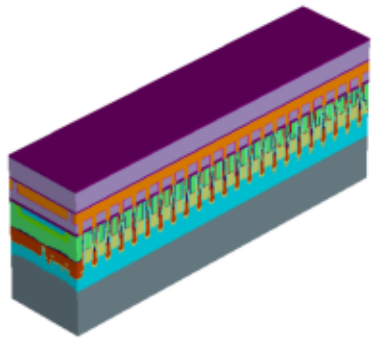

x cut at 0.677 µm

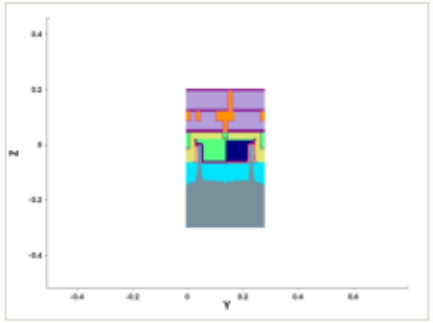

y cut at 0.211 µm

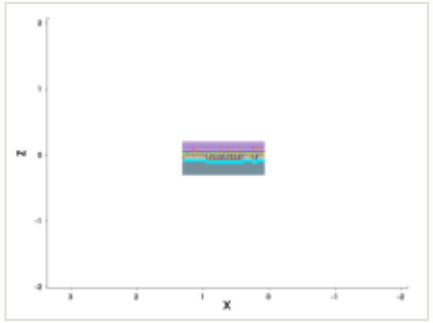

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

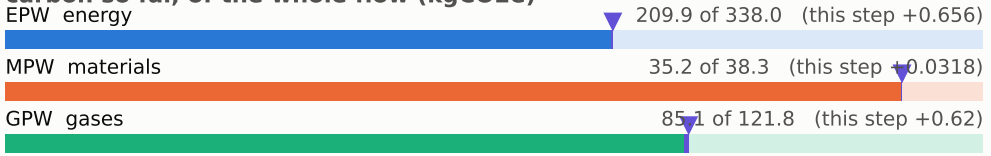

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #3760: CVD

depo_fill · CVD

1.31	331.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

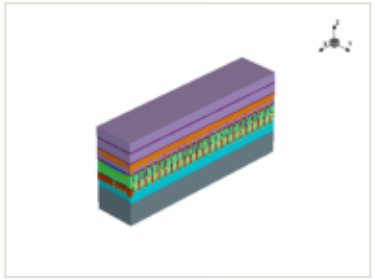

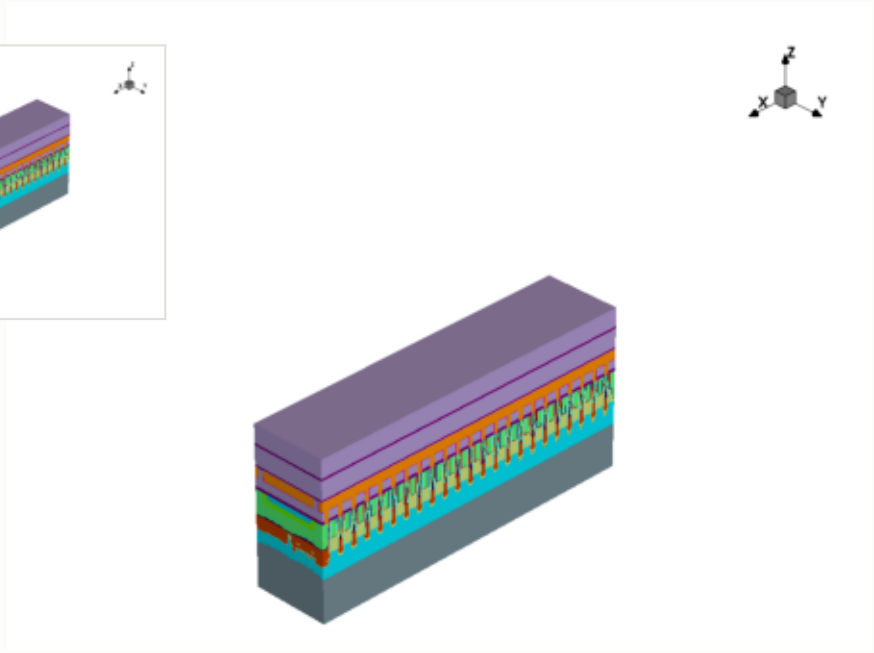

this step

process area	CVD
material	—
thickness	0.066 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

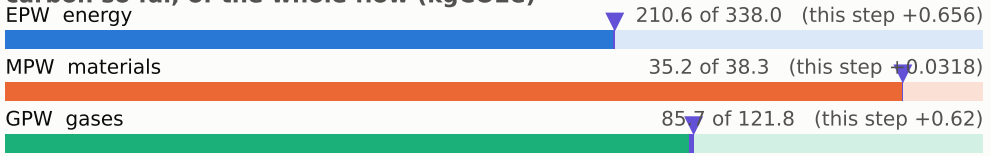

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

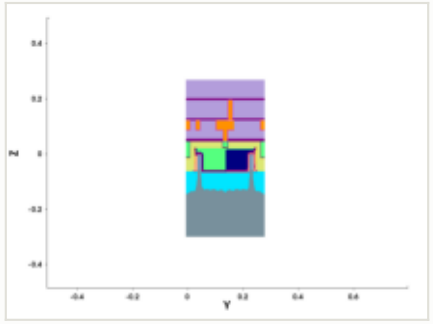

y cut at 0.211 µm

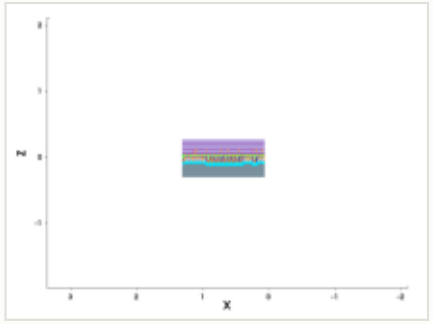

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #3770: Diffusion

treatment · Diffusion

0.801	332.3	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

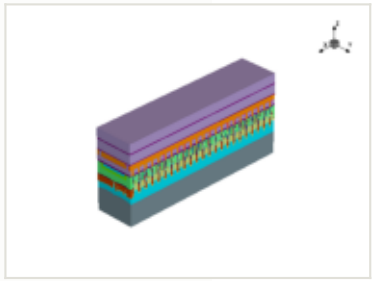

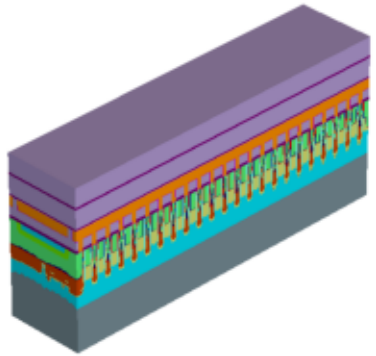

x cut at 0.677 µm

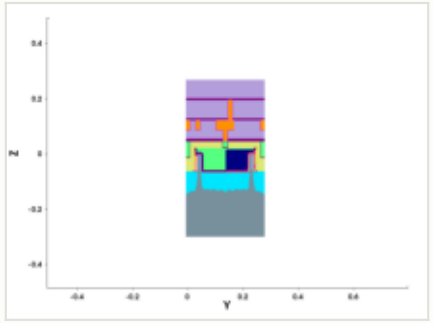

y cut at 0.211 µm

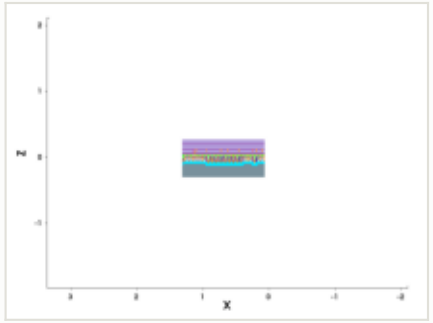

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

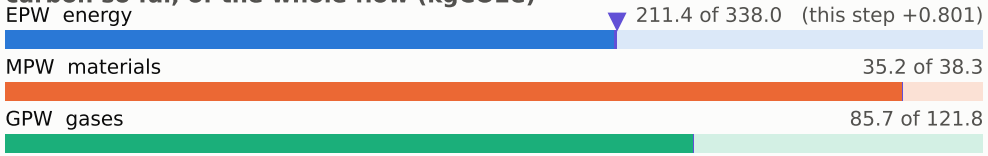

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

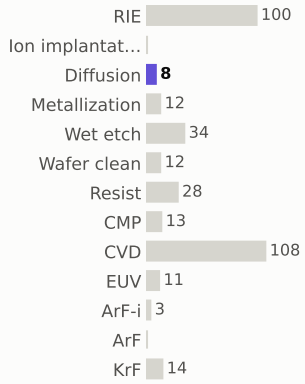

materials deposited (g)

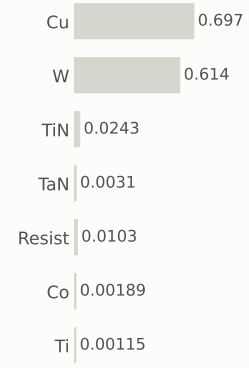

gases emitted (g)



Step #3780: Wafer_clean

clean · Wafer_clean

0.169	332.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

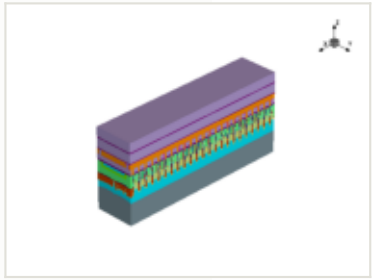

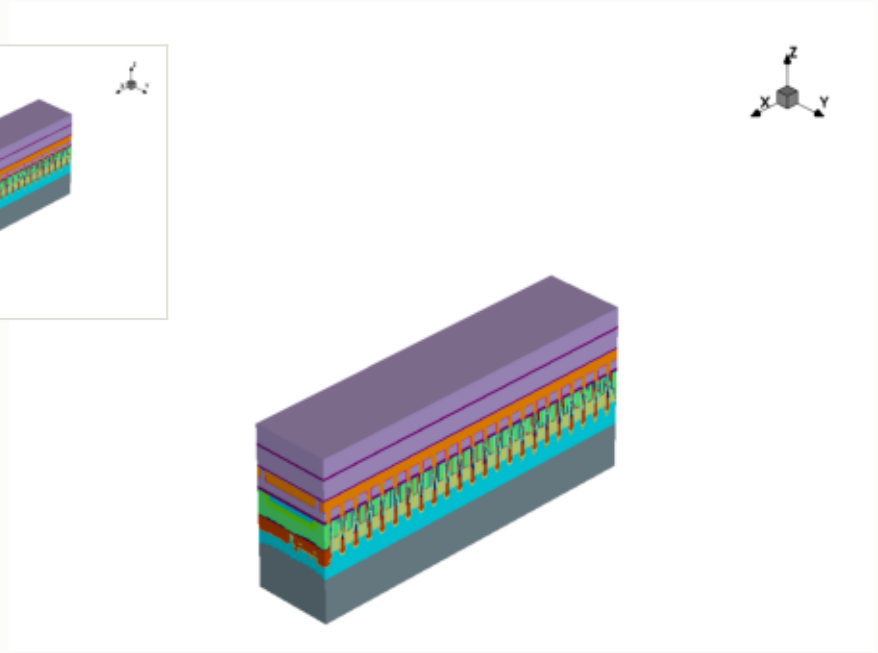

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

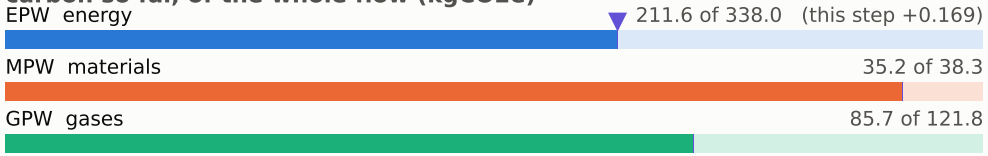

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

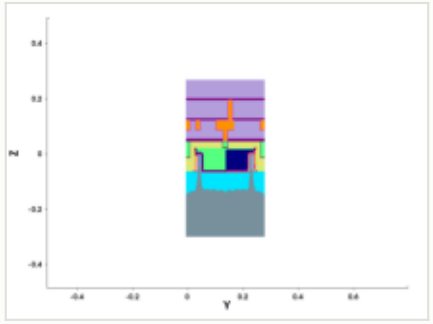

y cut at 0.211 µm

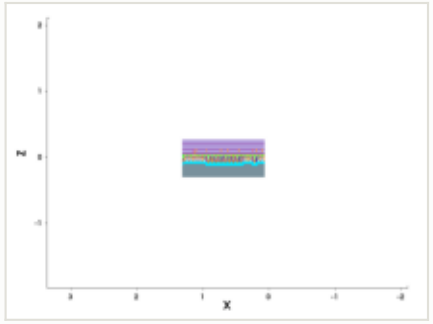

mask for this step

no mask for this step

steps by process area

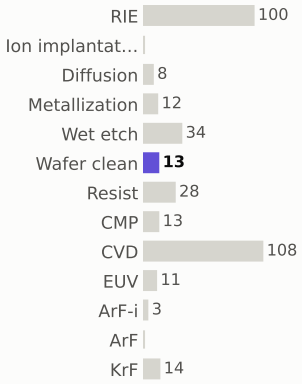

materials deposited (g)

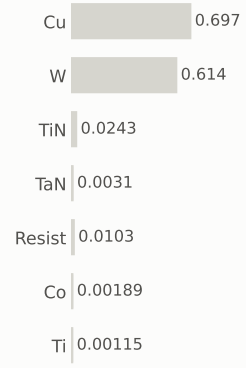

gases emitted (g)



Step #3790: CVD

depo_fill · CVD

1.31	333.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

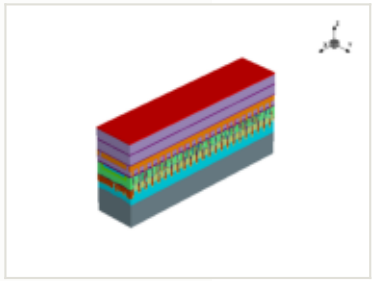

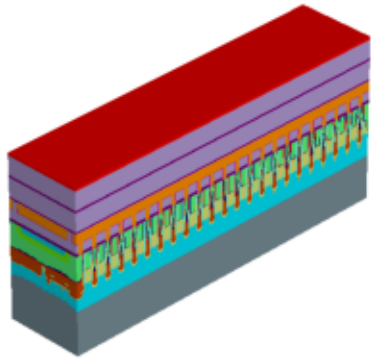

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

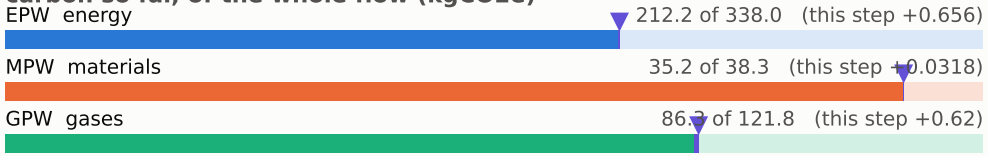

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

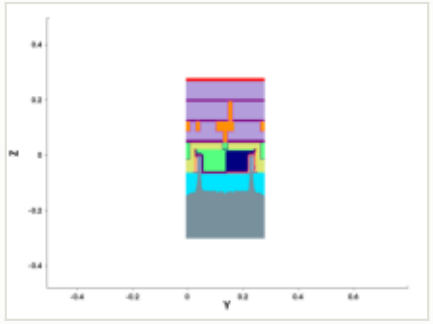

y cut at 0.211 µm

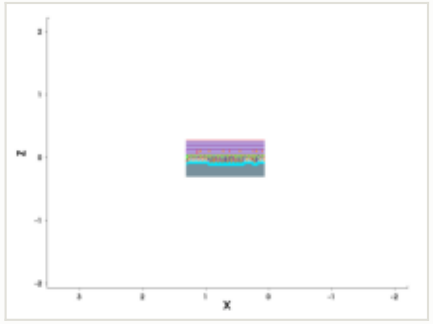

mask for this step

no mask for this step

steps by process area

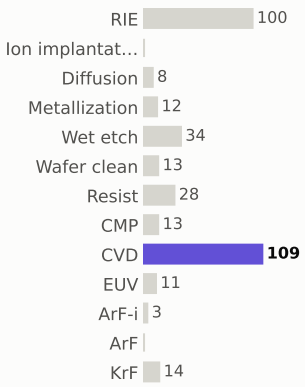

materials deposited (g)



gases emitted (g)



Step #3800: CVD

depo_fill · CVD

1.31	335.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

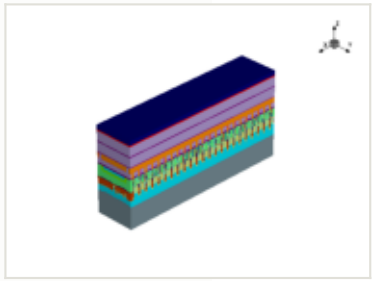

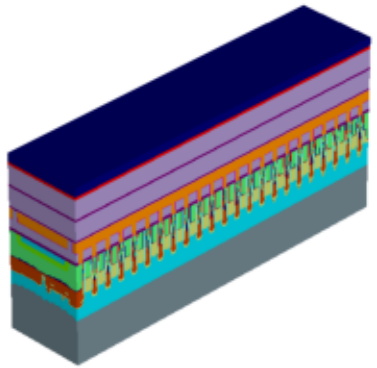

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0322 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

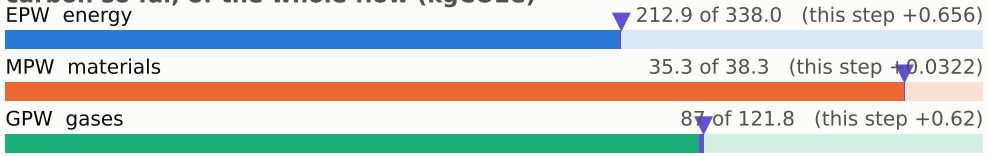

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

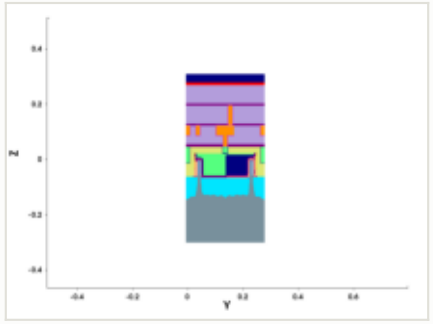

y cut at 0.211 µm

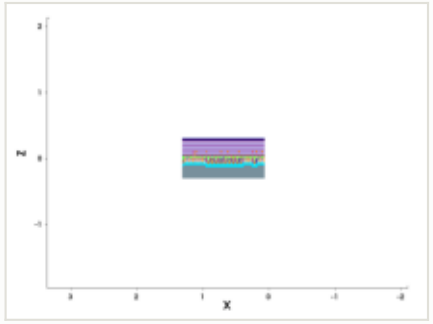

mask for this step

no mask for this step

steps by process area

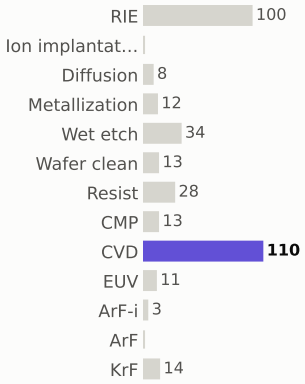

materials deposited (g)



gases emitted (g)



Step #3810: Wafer_clean

clean · Wafer_clean

0.169	335.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

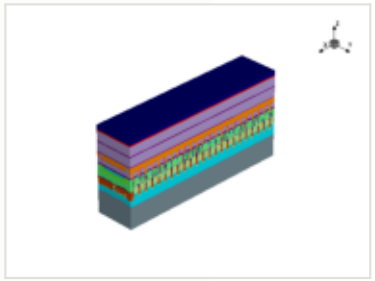

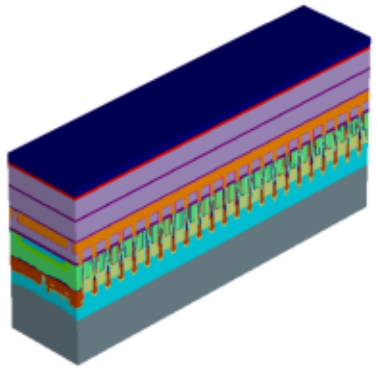

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

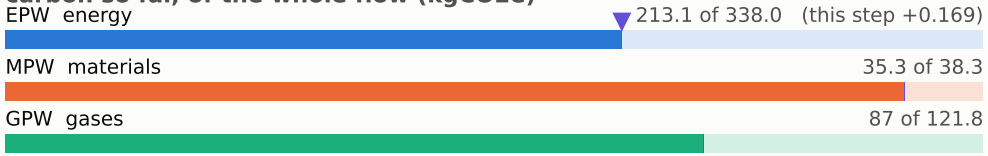

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

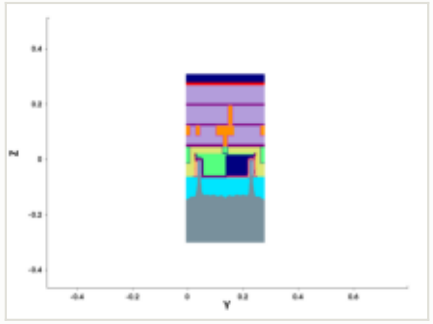

y cut at 0.211 µm

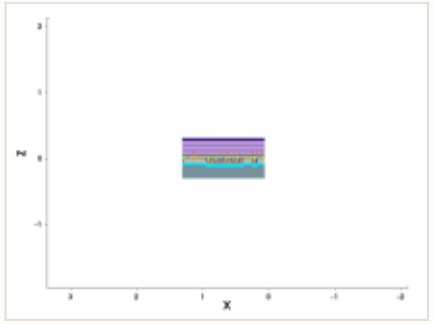

mask for this step

no mask for this step

steps by process area

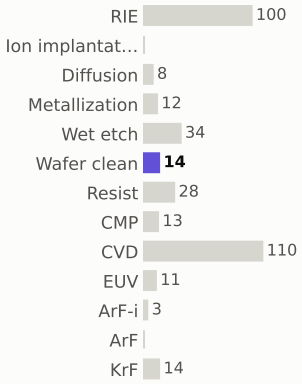

materials deposited (g)



gases emitted (g)



Step #3820: CVD

depo_fill · CVD

1.31	336.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

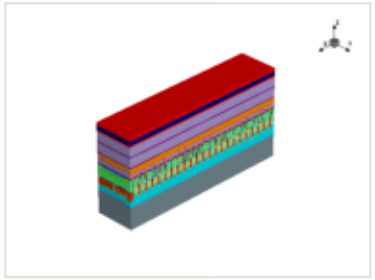

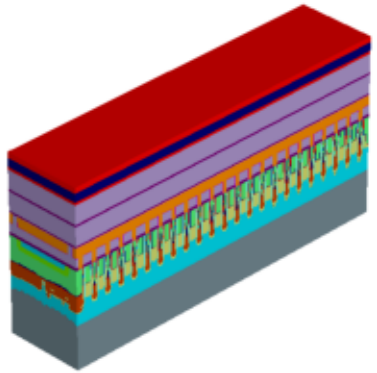

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

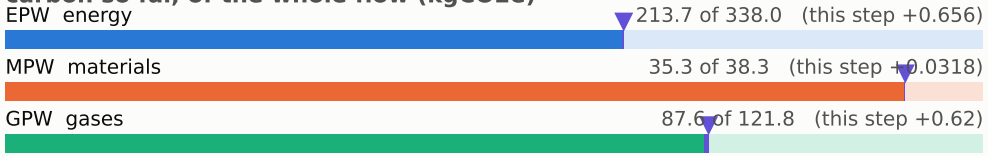

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

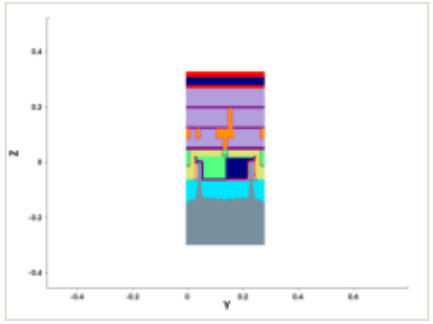

y cut at 0.211 µm

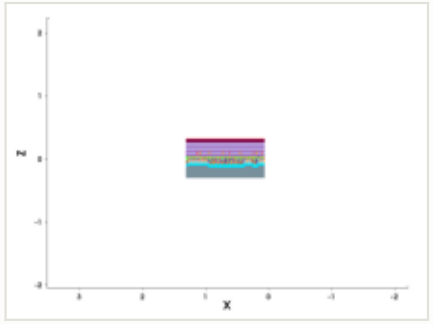

mask for this step

no mask for this step

steps by process area

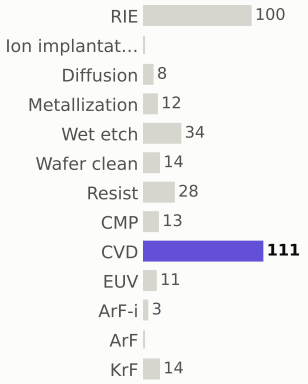

materials deposited (g)



gases emitted (g)



Step #3830: Resist

depo_fill · Resist

0.169	336.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

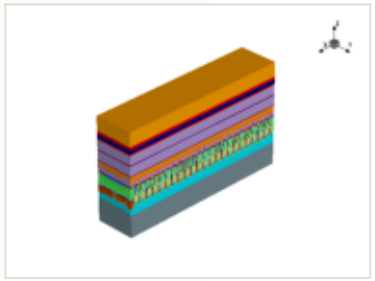

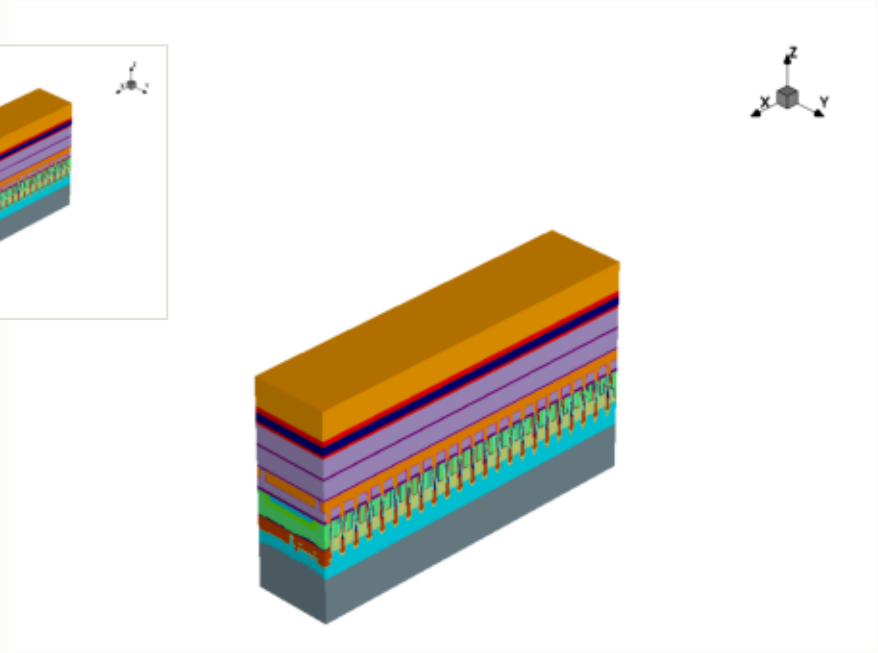

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

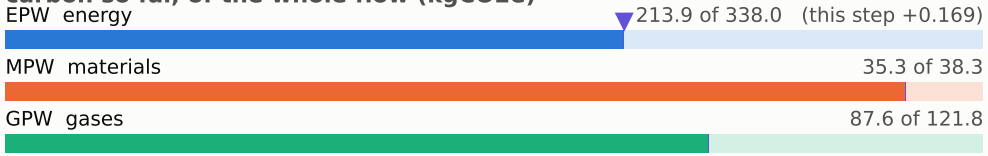

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

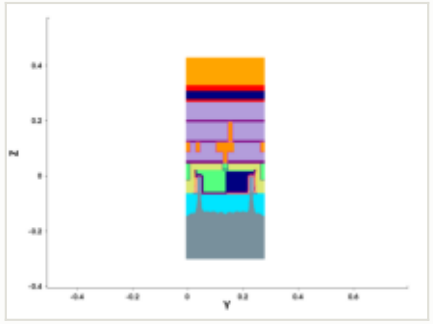

y cut at 0.211 µm

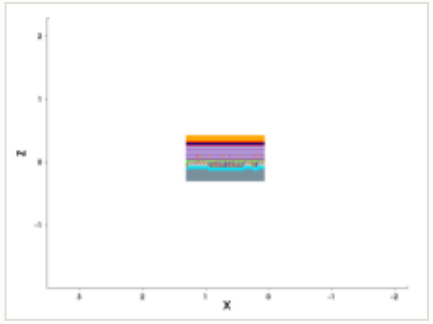

mask for this step

no mask for this step

steps by process area

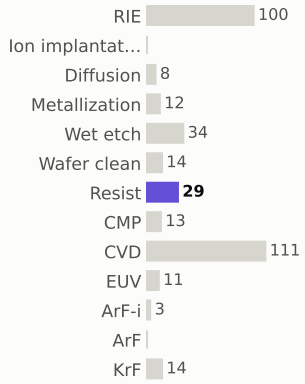

materials deposited (g)

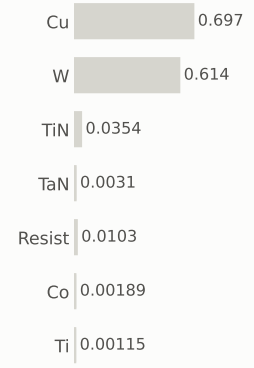

gases emitted (g)



Step #3840: CVD

depo_fill · CVD

1.31	338.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

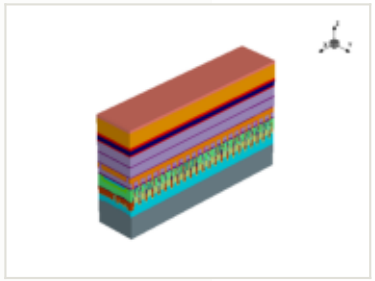

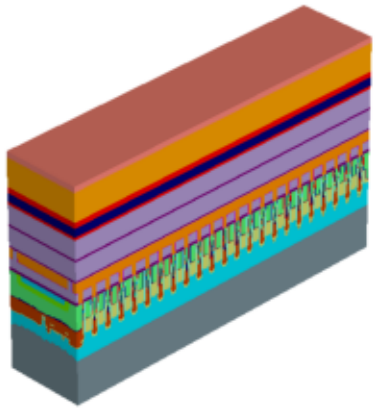

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

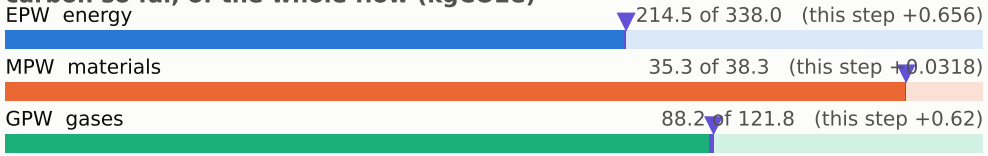

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

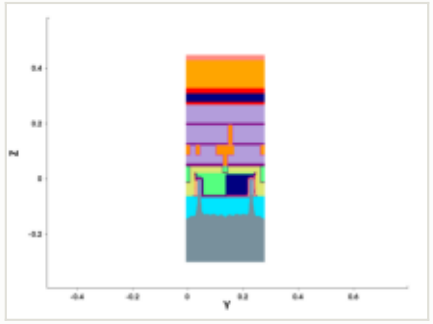

y cut at 0.211 µm

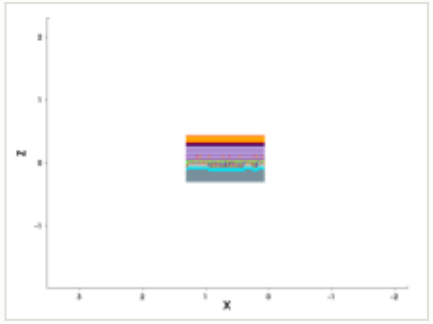

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #3850: Wafer_clean

clean · Wafer_clean

0.169	338.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

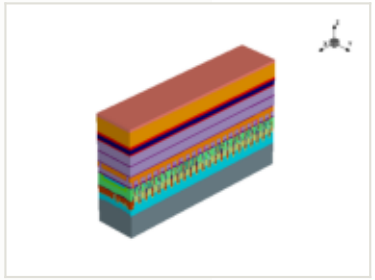

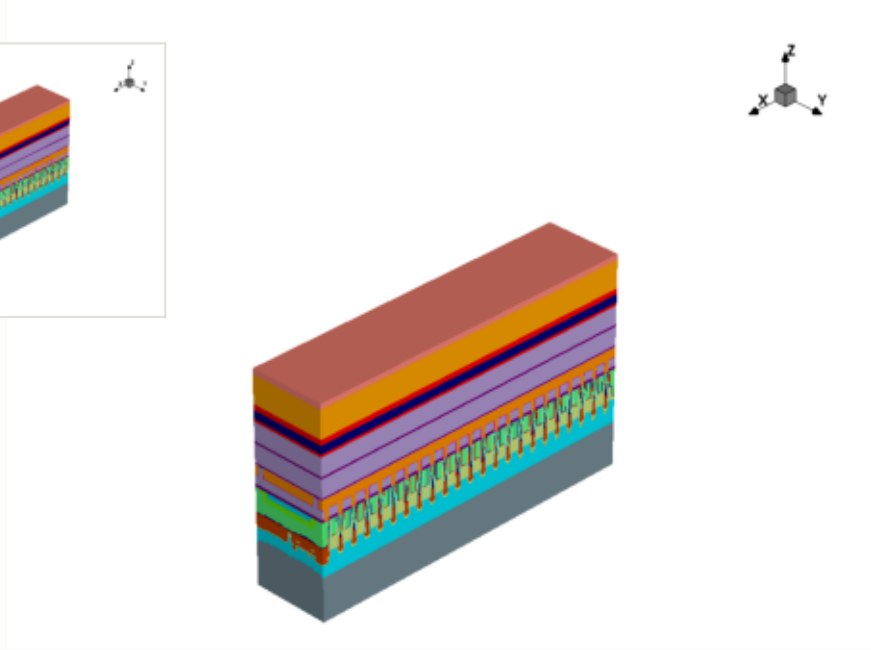

x cut at 0.677 µm

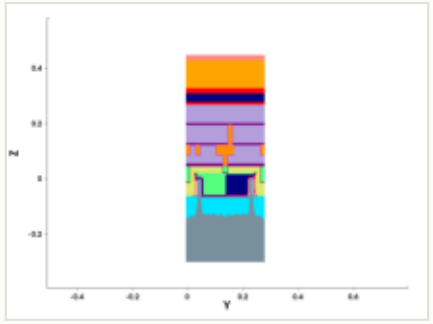

y cut at 0.211 µm

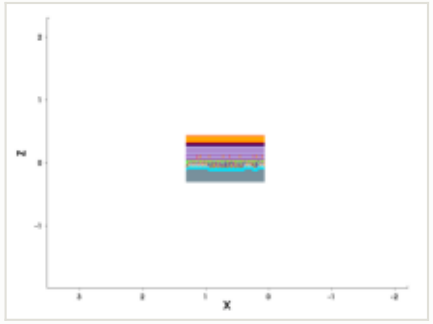

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

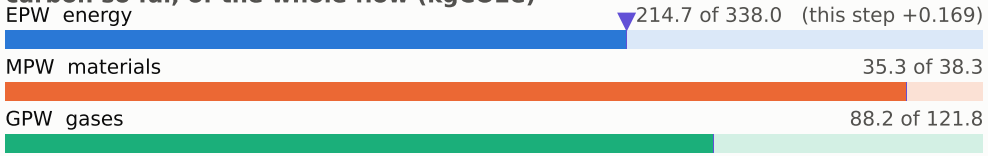

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

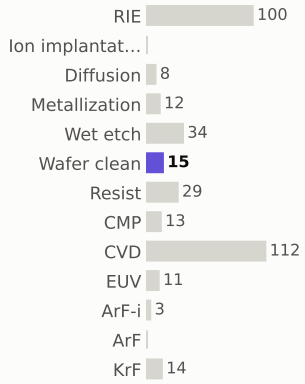

materials deposited (g)



gases emitted (g)



Step #3860: EUV

litho_patterning · EUV

1.96	340.2	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

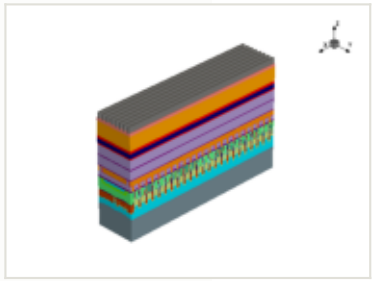

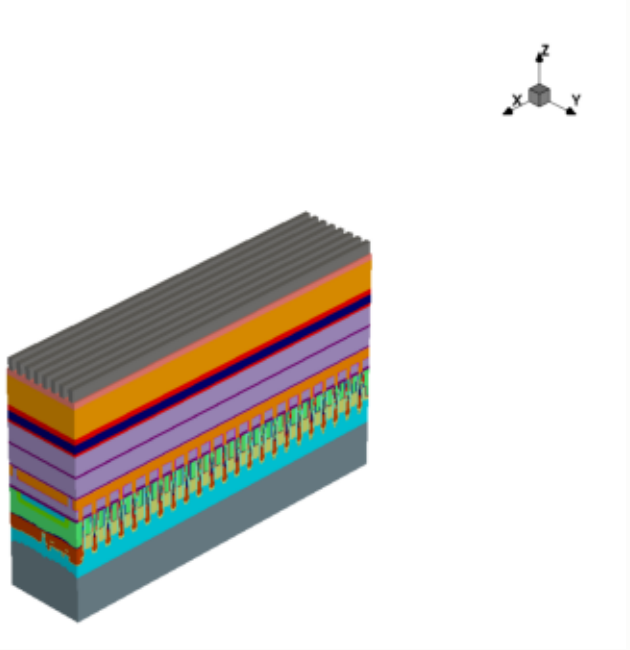

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

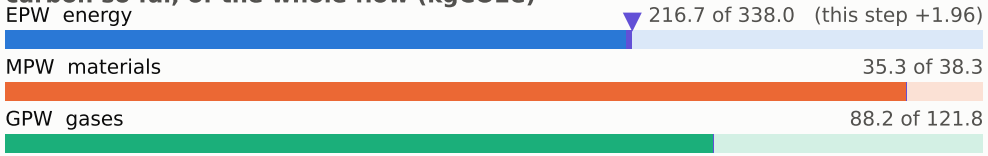

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

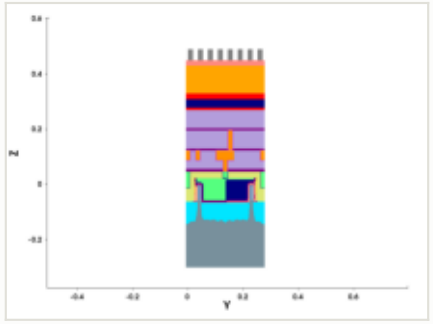

y cut at 0.211 µm

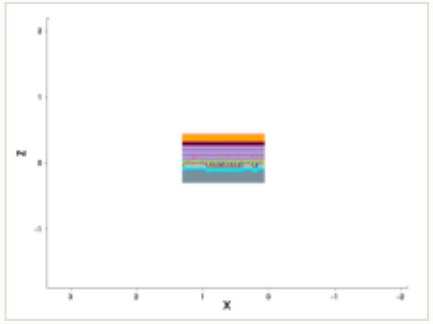

mask: layer 30:0 (GDSII)



steps by process area

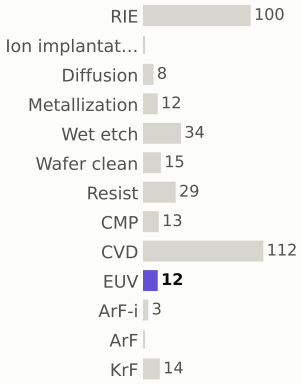

materials deposited (g)



gases emitted (g)



Step #3870: RIE

etch_anisotropic · RIE

1.04	341.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

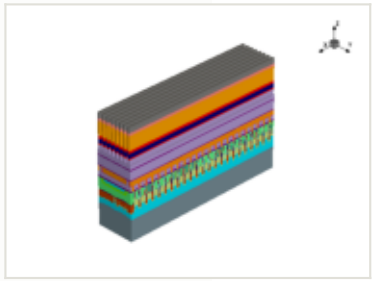

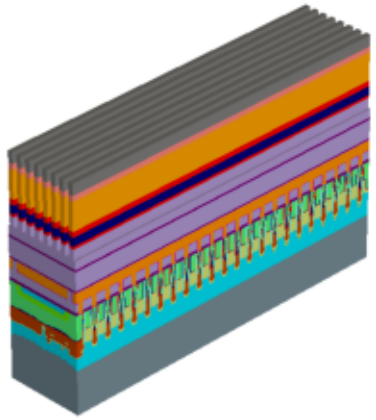

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

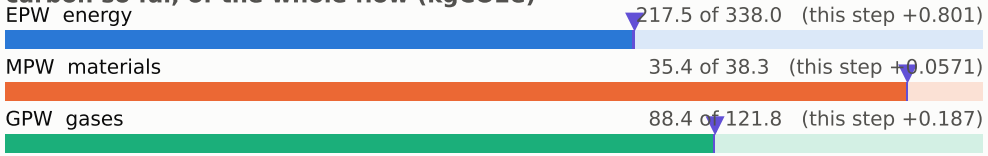

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

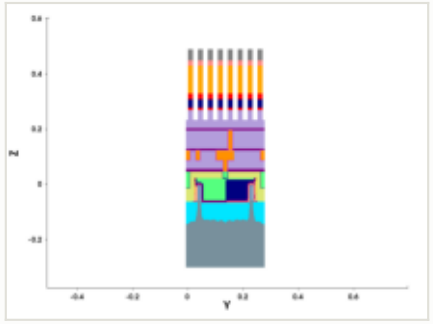

y cut at 0.211 µm

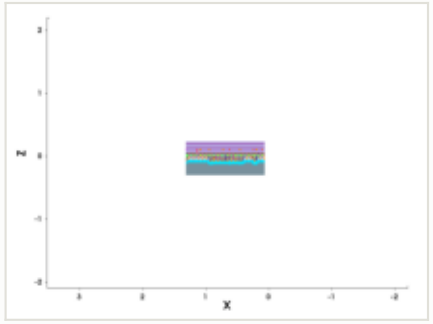

mask for this step

no mask for this step

steps by process area

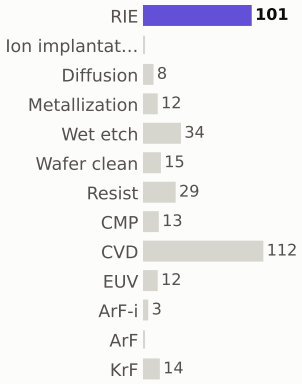

materials deposited (g)



gases emitted (g)

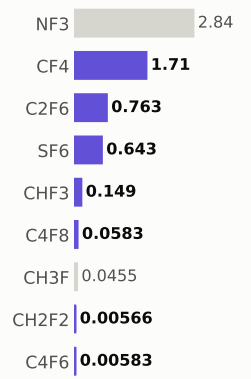

Step #3880: Wafer_clean

etch_strip · Wafer_clean

0.169	341.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

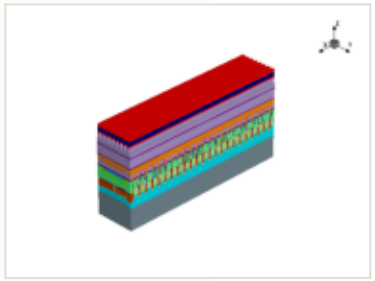

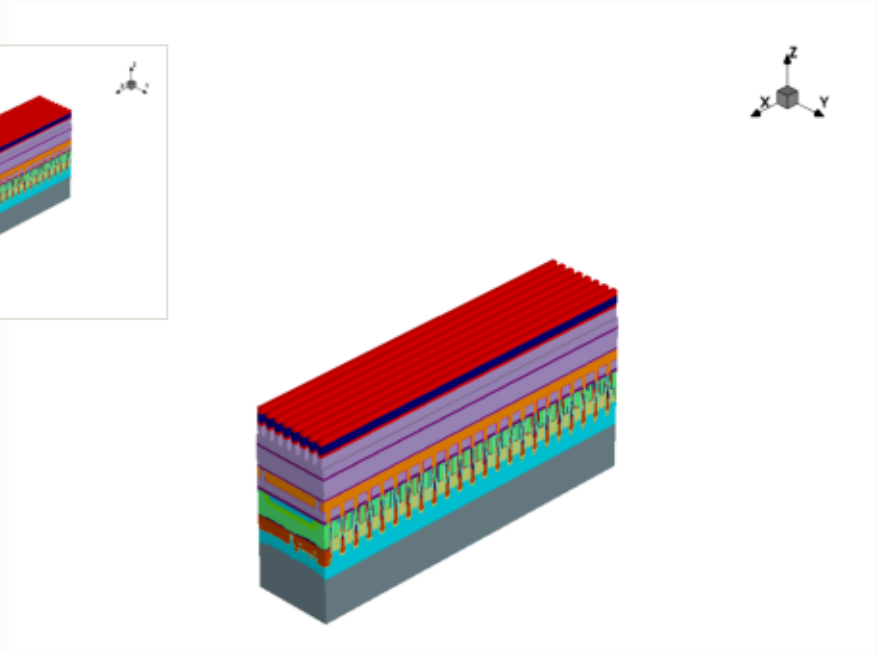

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

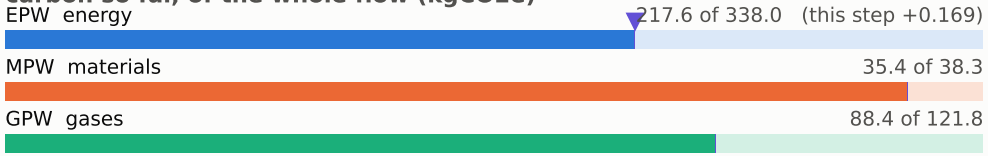

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

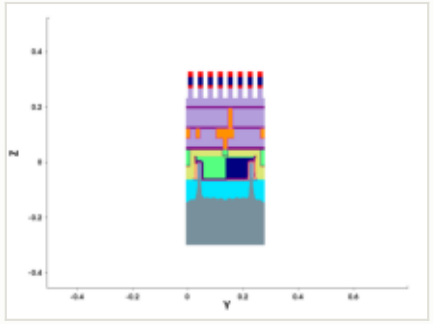

y cut at 0.211 µm

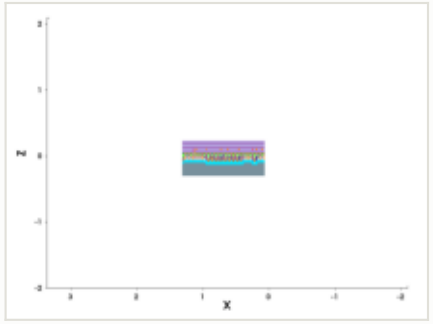

mask for this step

no mask for this step

steps by process area

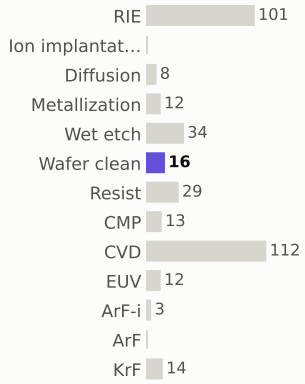

materials deposited (g)



gases emitted (g)



Step #3890: Resist

depo_fill · Resist

0.169	341.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

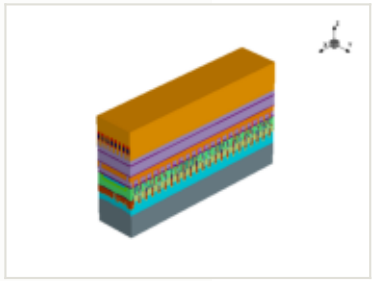

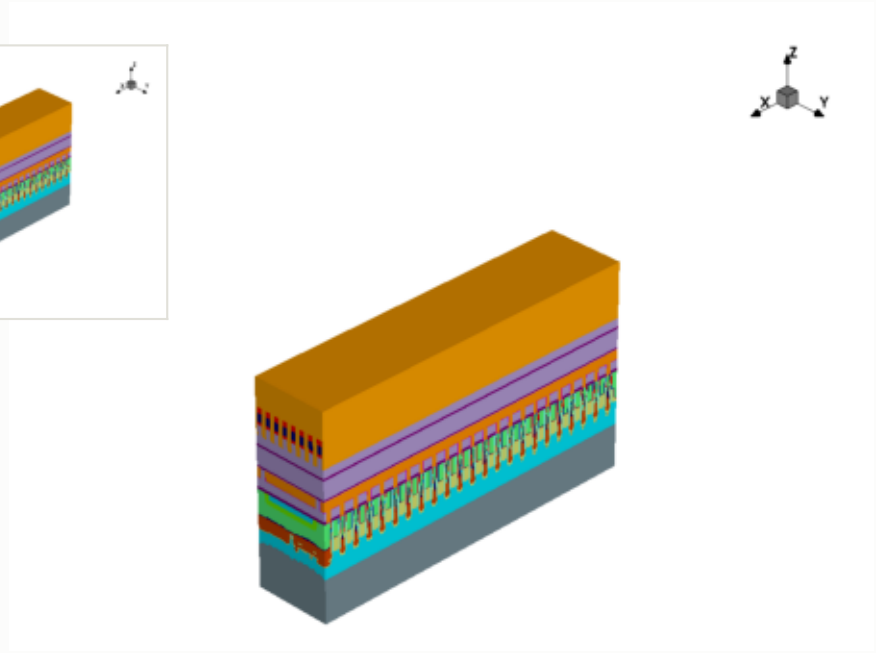

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

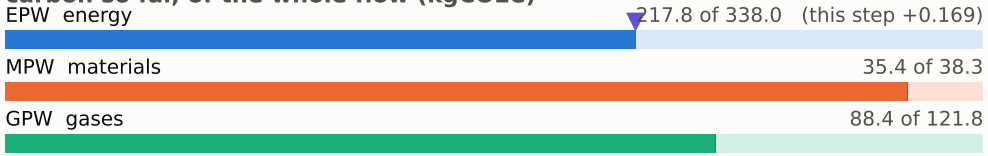

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

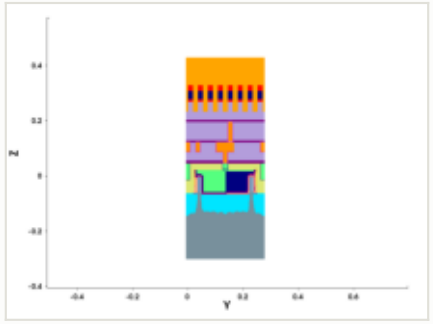

y cut at 0.211 µm

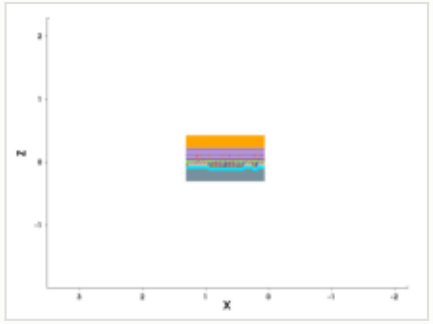

mask for this step

no mask for this step

steps by process area

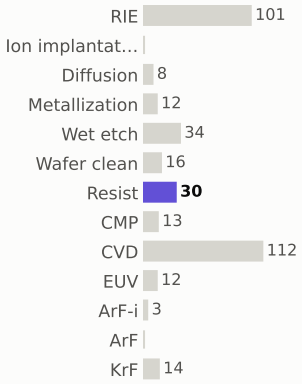

materials deposited (g)

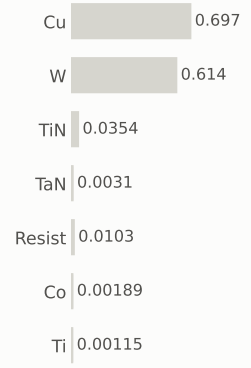

gases emitted (g)



Step #3900: CVD

depo_fill · CVD

1.31	342.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

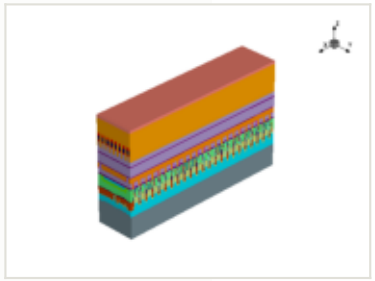

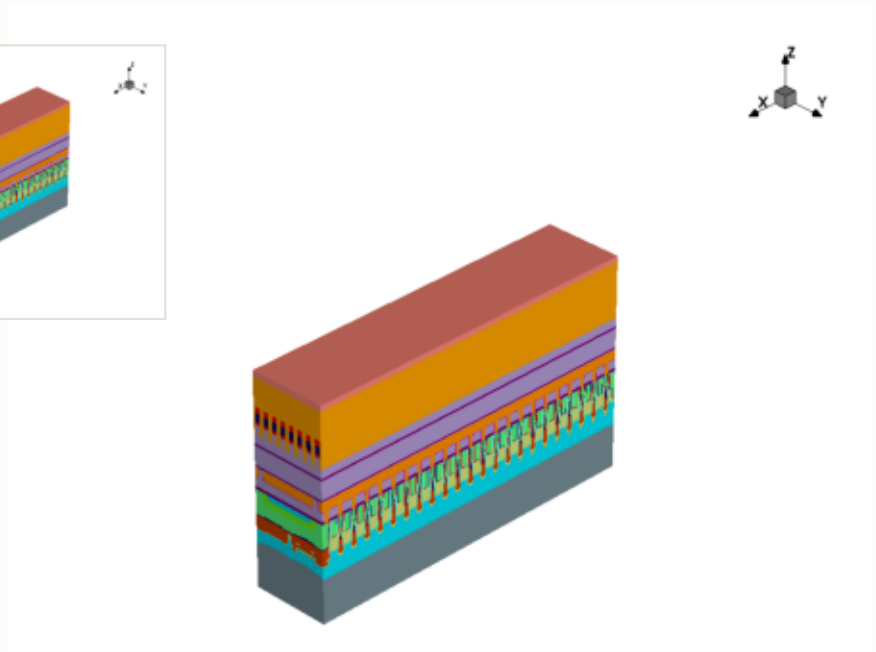

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

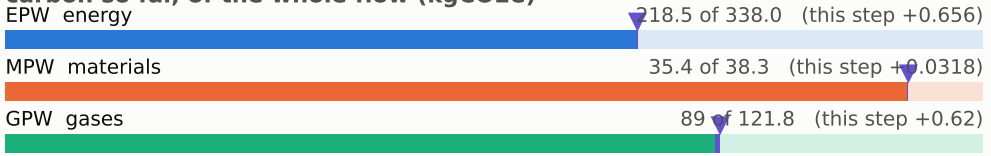

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

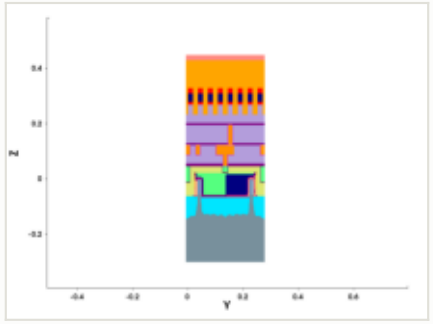

y cut at 0.211 µm

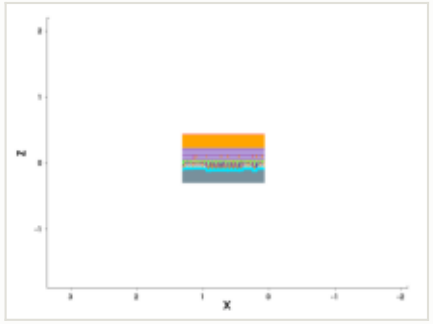

mask for this step

no mask for this step

steps by process area

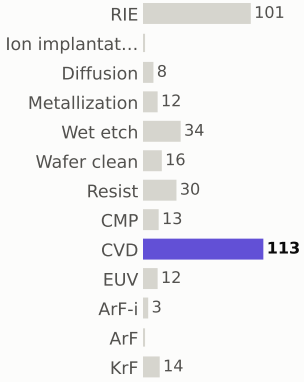

materials deposited (g)



gases emitted (g)



Step #3910: Wafer_clean

clean · Wafer_clean

0.169	343.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

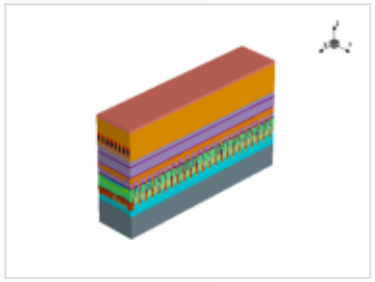

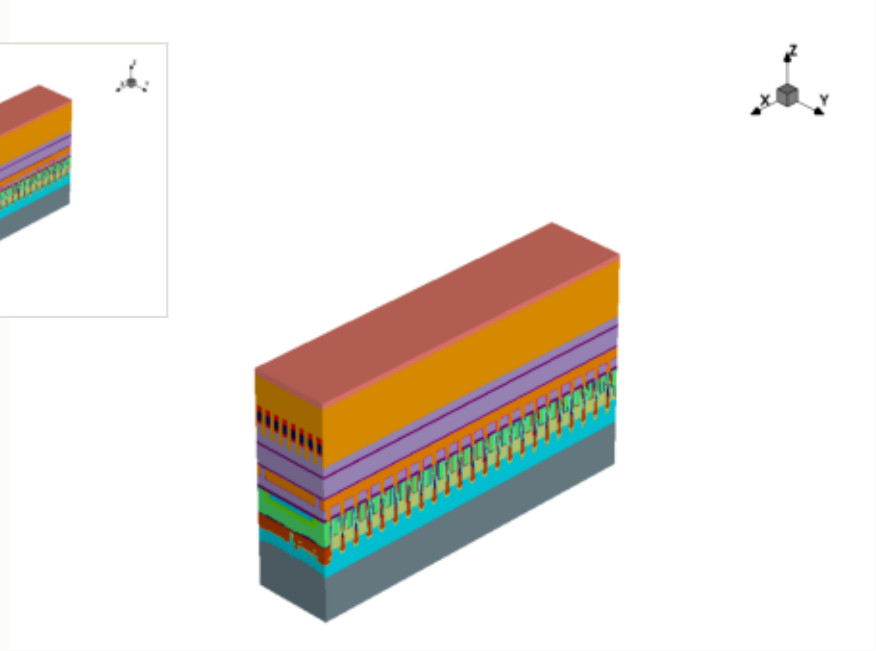

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

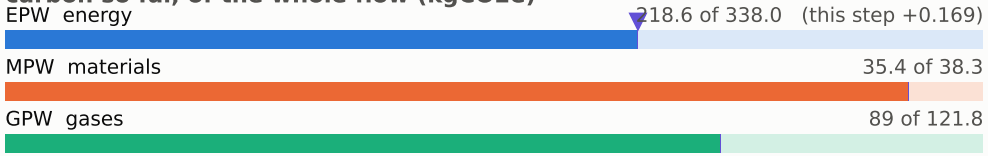

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

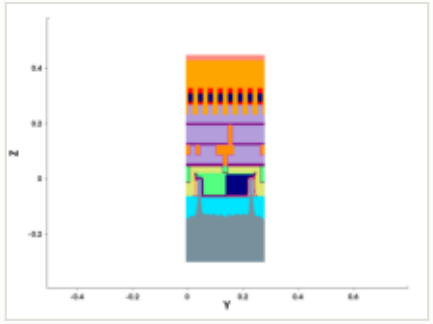

y cut at 0.211 µm

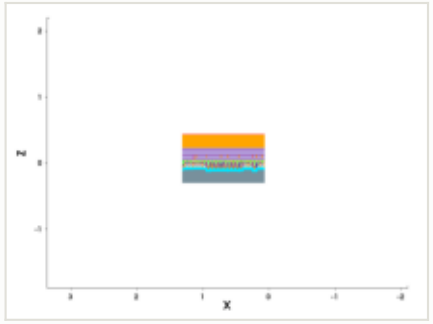

mask for this step

no mask for this step

steps by process area

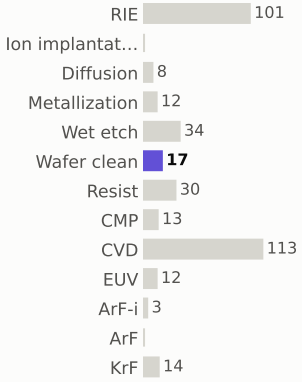

materials deposited (g)



gases emitted (g)



Step #3920: EUV

litho_patterning · EUV

1.96	345.0	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

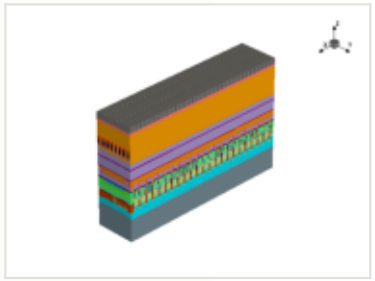

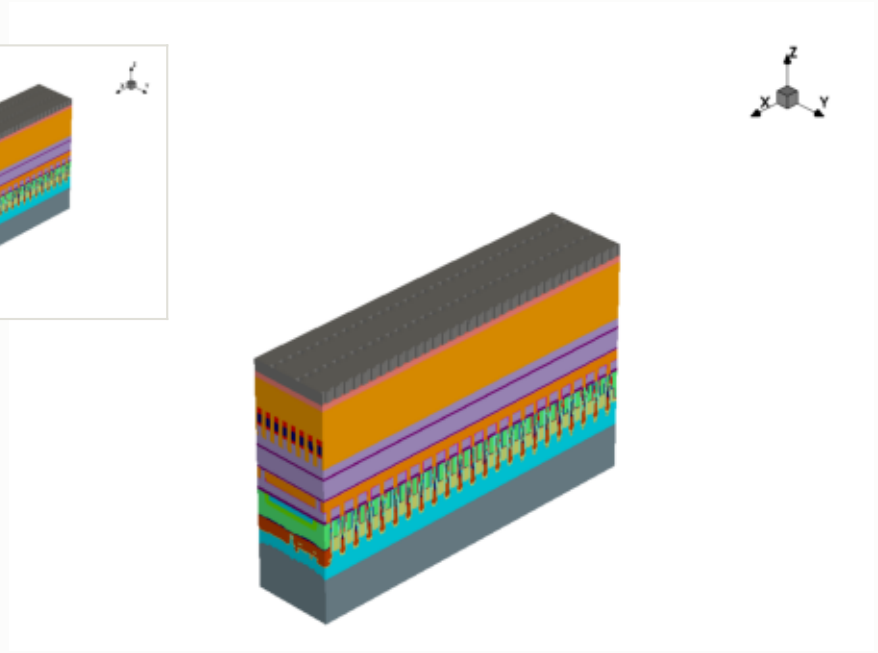

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

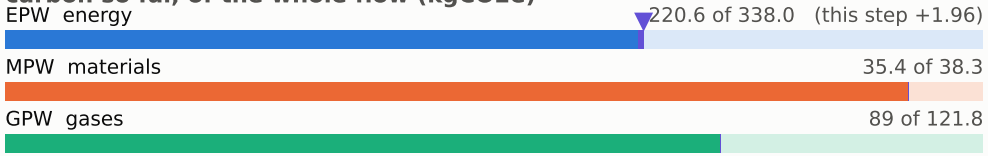

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

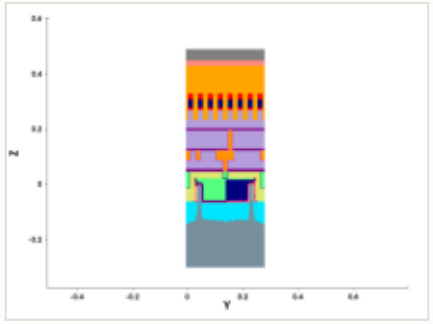

y cut at 0.211 µm

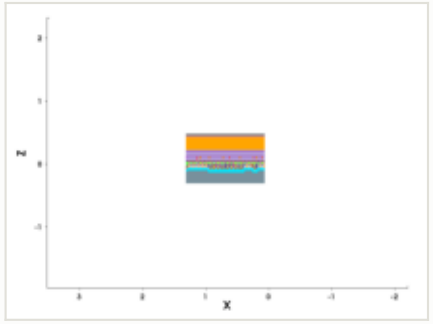

mask: layer 25:0 (GDSII)

steps by process area

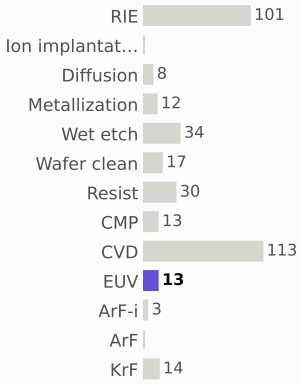

materials deposited (g)



gases emitted (g)



Step #3930: RIE

etch_anisotropic · RIE

1.04	346.0	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

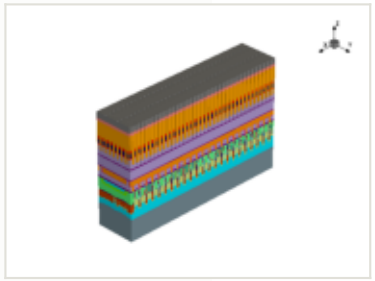

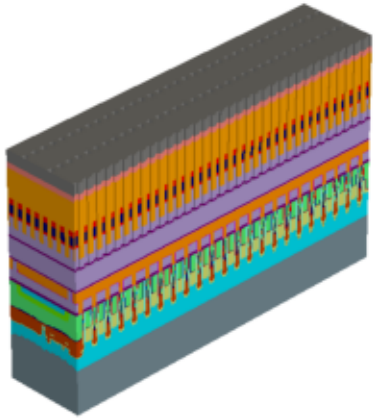

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

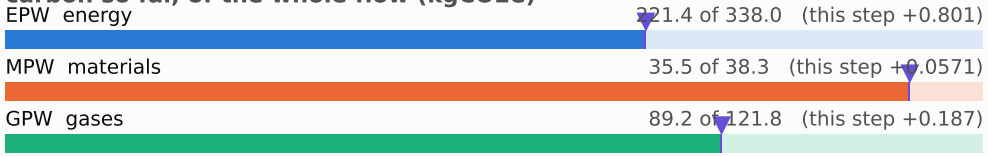

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

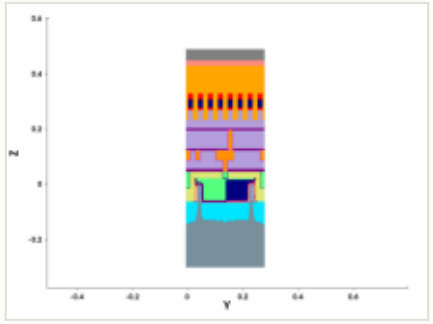

y cut at 0.211 µm

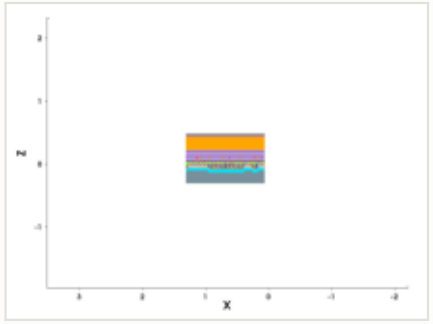

mask for this step

no mask for this step

steps by process area

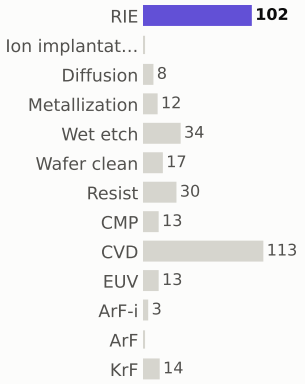

materials deposited (g)



gases emitted (g)



Step #3940: Wafer_clean

etch_strip · Wafer_clean

0.169	346.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

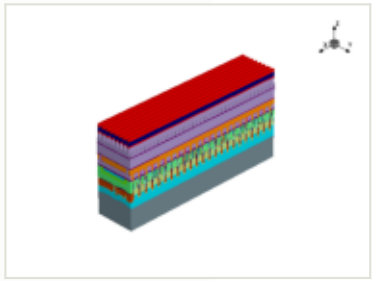

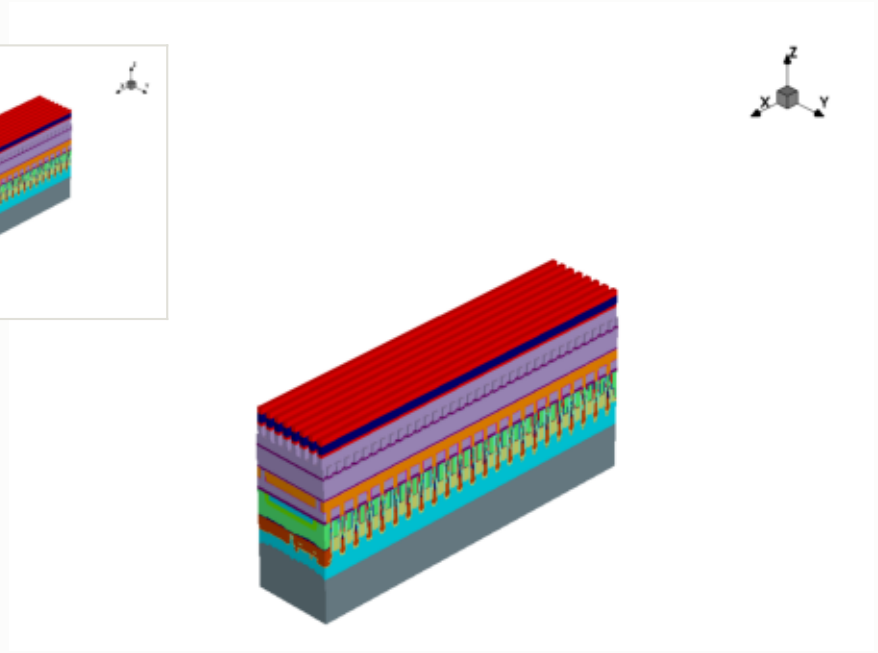

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

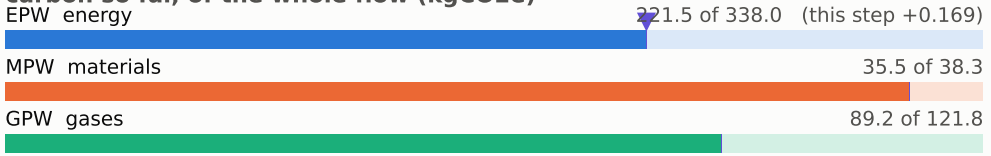

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

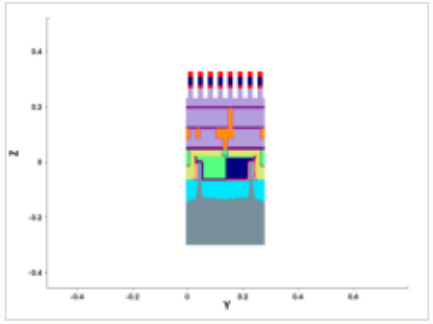

y cut at 0.211 µm

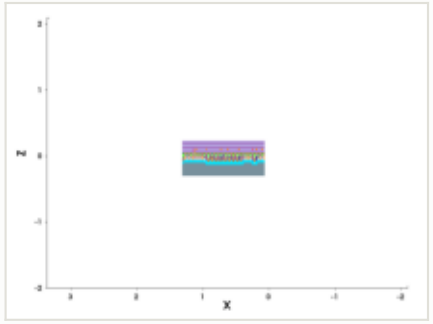

mask for this step

no mask for this step

steps by process area

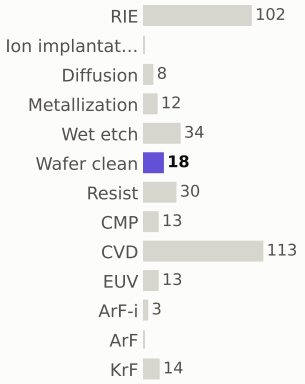

materials deposited (g)



gases emitted (g)



Step #3950: Metallization

depo_ellipsoidal · Metallization

1.2	347.4	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

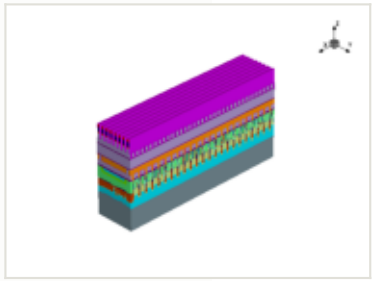

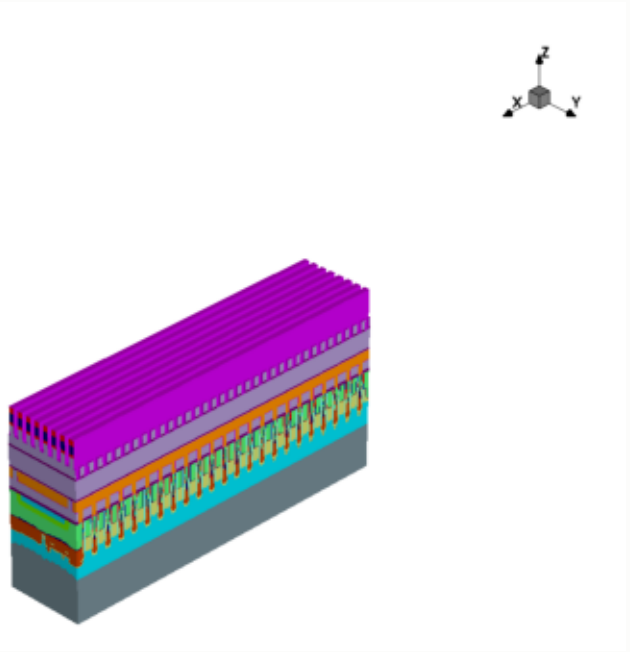

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

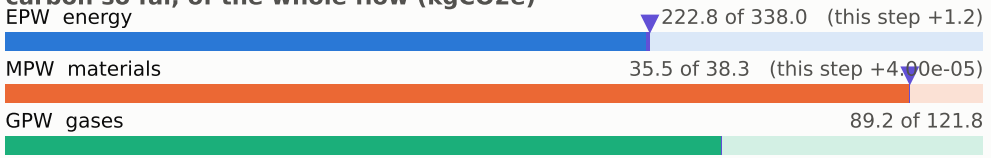

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

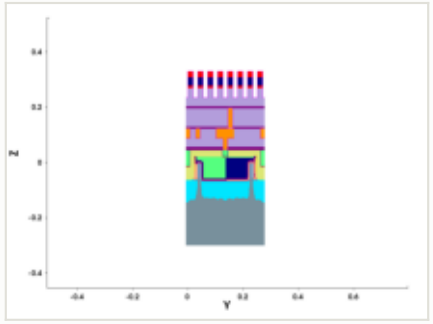

y cut at 0.211 µm

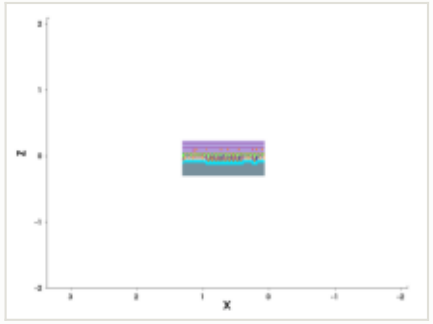

mask for this step

no mask for this step

steps by process area

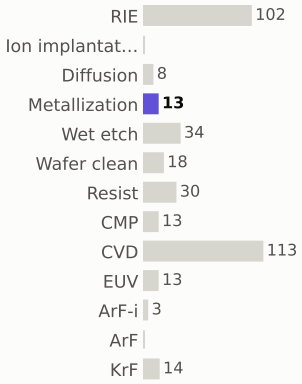

materials deposited (g)

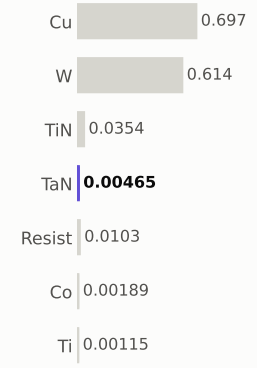

gases emitted (g)



Step #3960: Metallization

depo_fill · Metallization

1.21	348.6	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

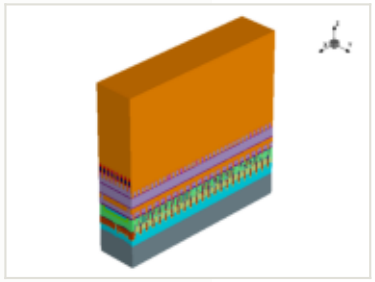

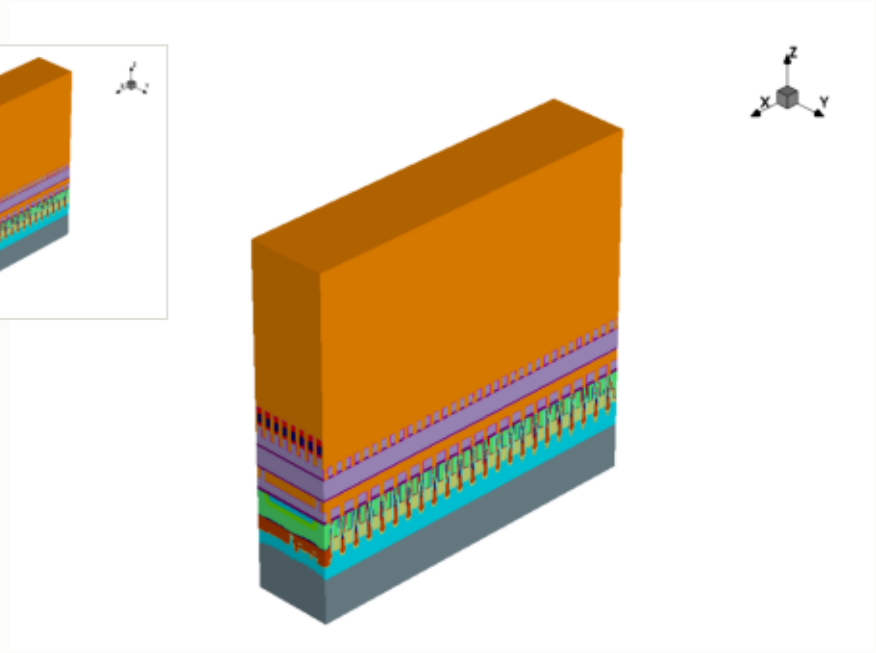

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

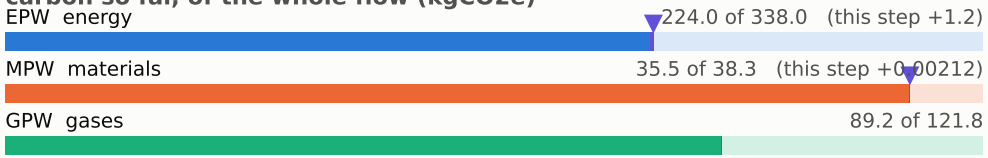

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

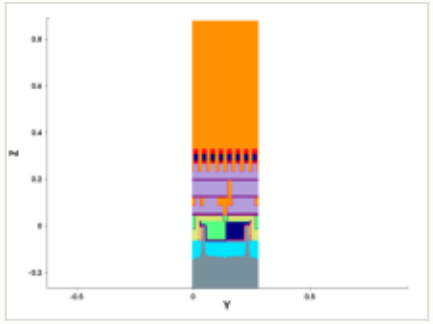

y cut at 0.211 µm

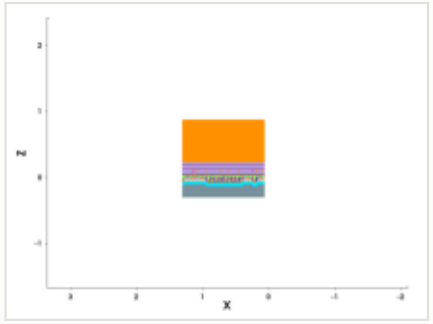

mask for this step

no mask for this step

steps by process area

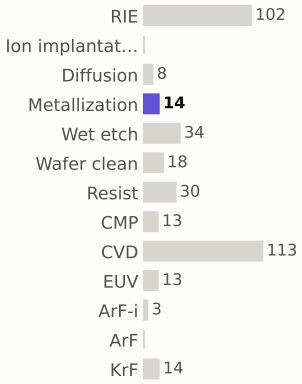

materials deposited (g)

gases emitted (g)



Step #3970: Diffusion

treatment · Diffusion

0.801	349.4	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

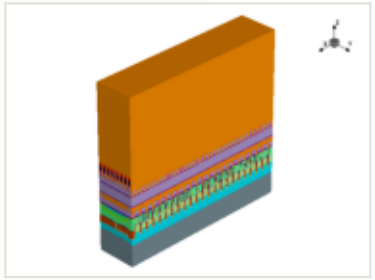

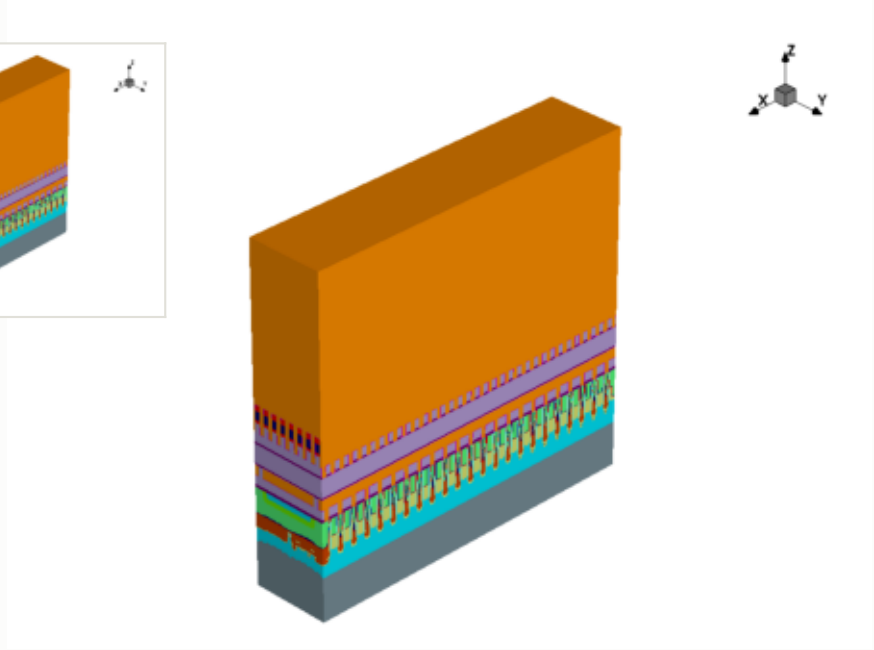

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

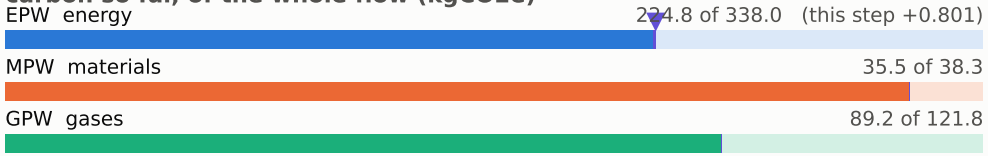

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

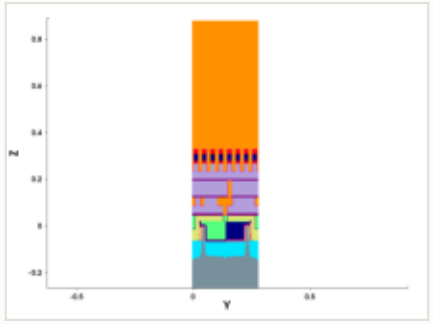

y cut at 0.211 µm

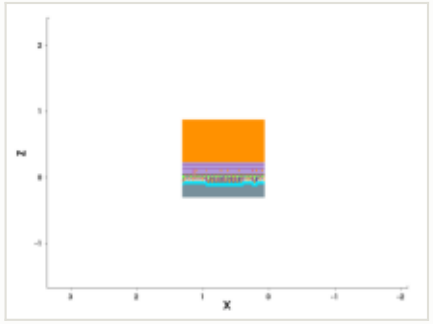

mask for this step

no mask for this step

steps by process area

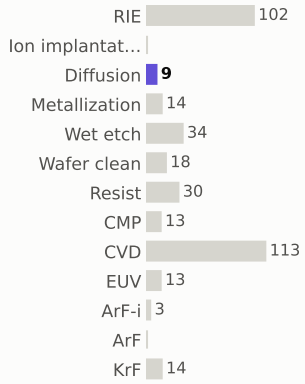

materials deposited (g)



gases emitted (g)



Step #3980: CMP

etch_cmp · CMP

0.169	349.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

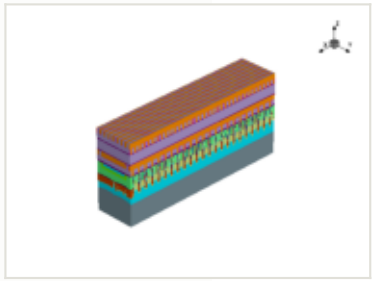

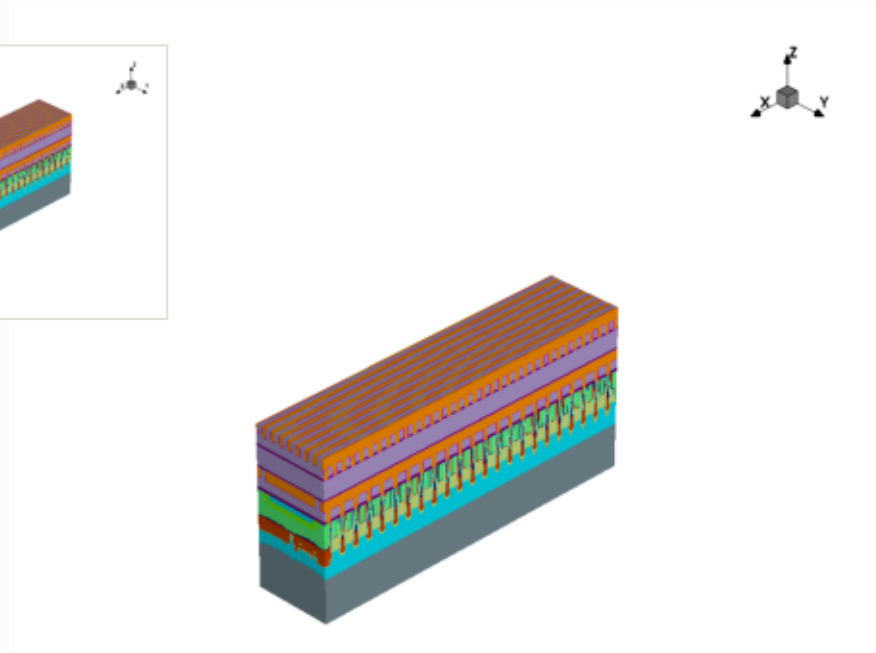

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

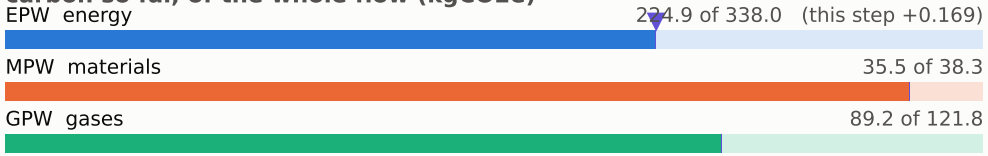

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

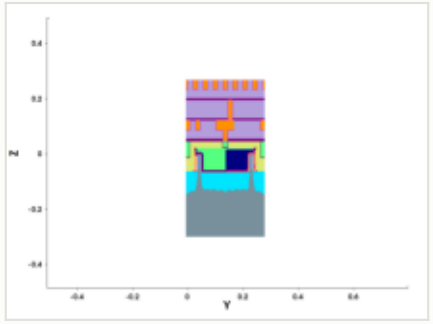

y cut at 0.211 µm

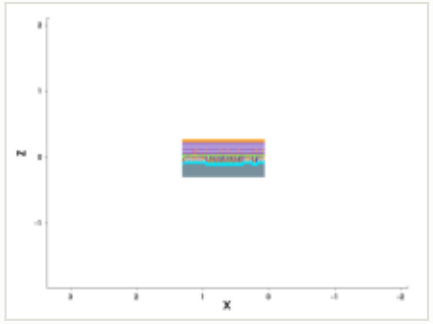

mask for this step

no mask for this step

steps by process area

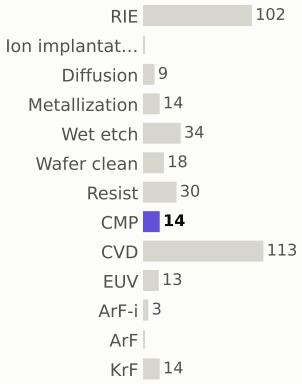

materials deposited (g)



gases emitted (g)



Step #3990: Metallization

depo_isotropic · Metallization

1.2	350.8	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

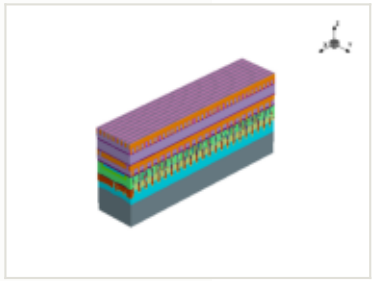

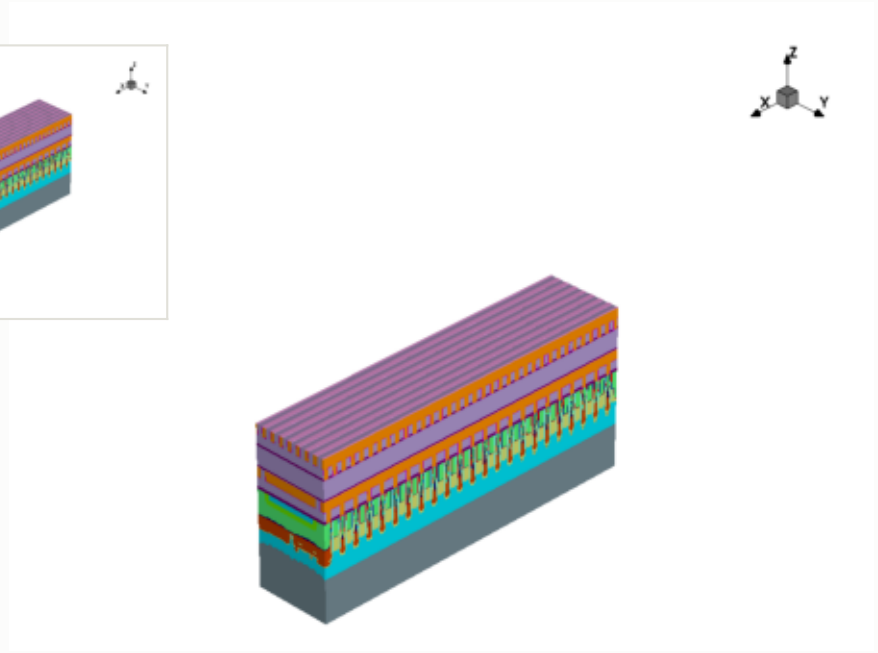

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

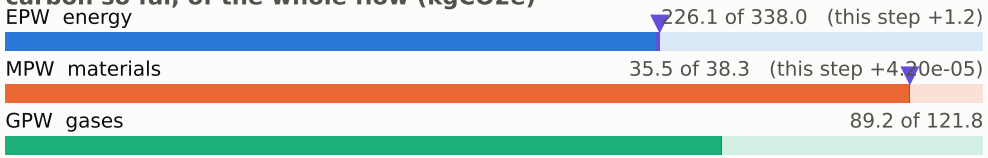

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

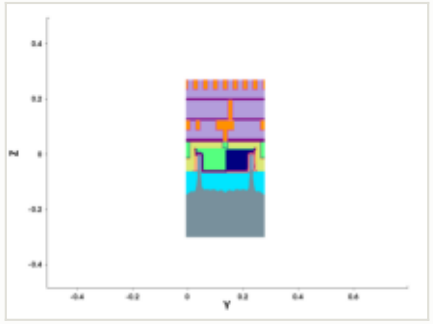

y cut at 0.211 µm

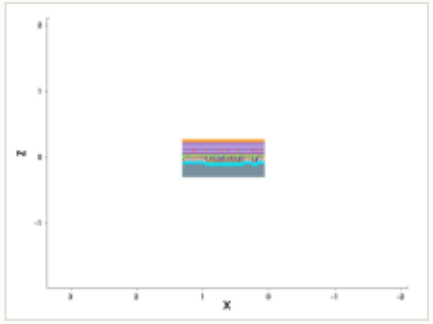

mask for this step

no mask for this step

steps by process area

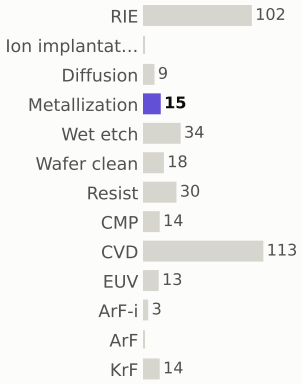

materials deposited (g)



gases emitted (g)



Step #4010: CVD

depo_fill · CVD

1.31	352.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

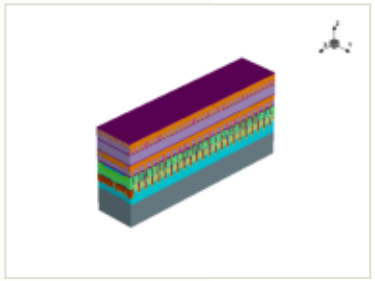

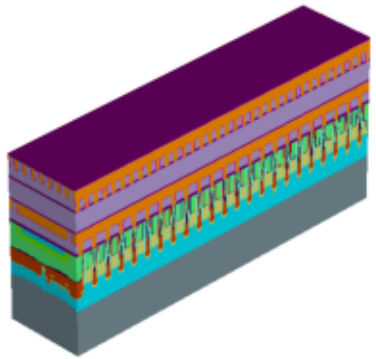

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

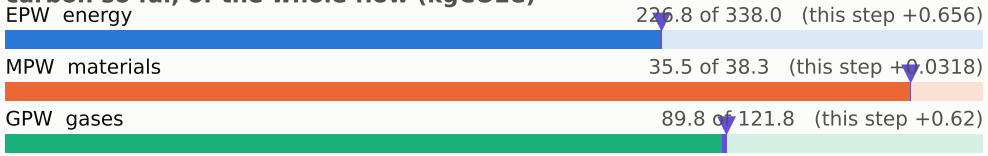

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

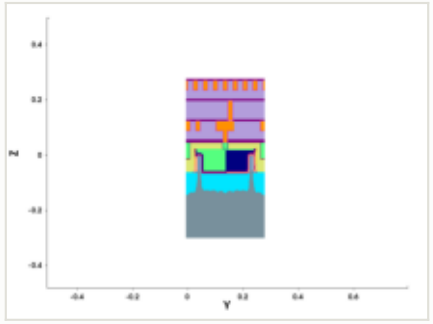

y cut at 0.211 µm

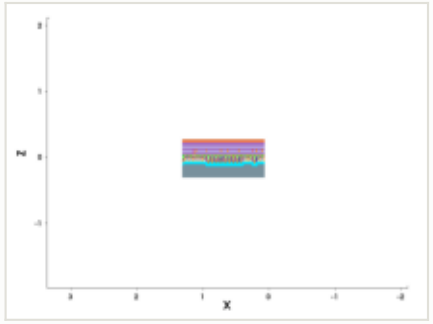

mask for this step

no mask for this step

steps by process area

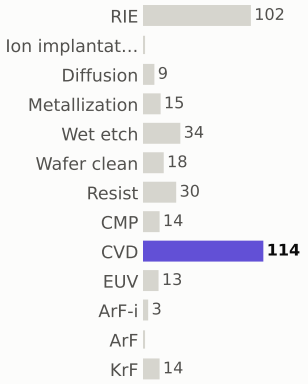

materials deposited (g)



gases emitted (g)



Step #4020: CVD

depo_fill · CVD

1.31	353.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

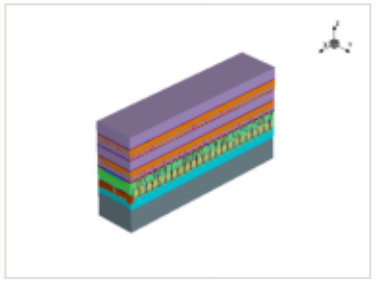

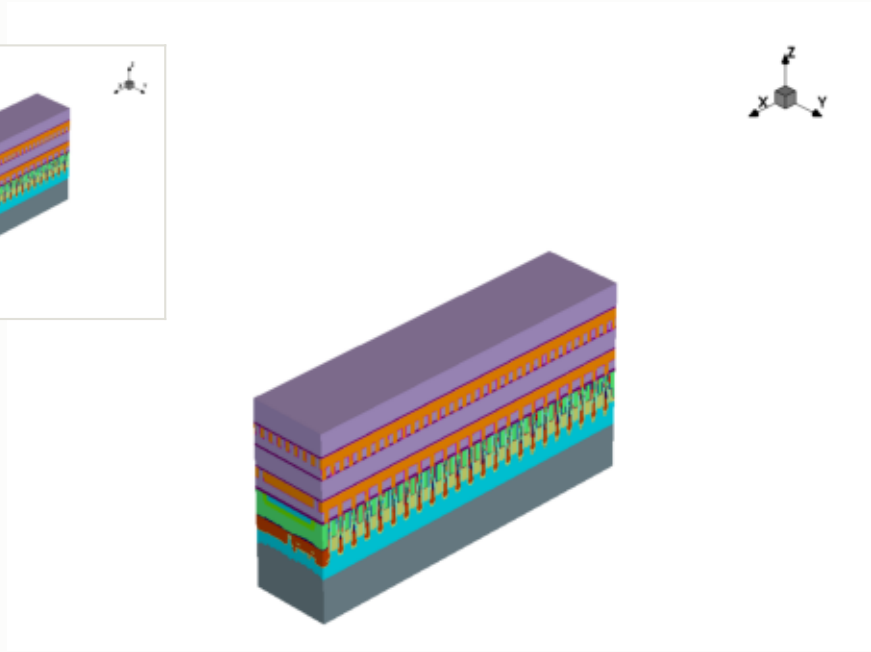

this step

process area	CVD
material	—
thickness	0.078 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

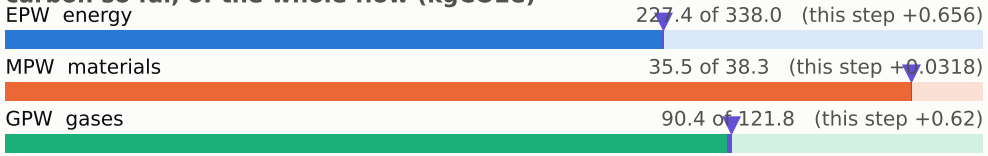

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

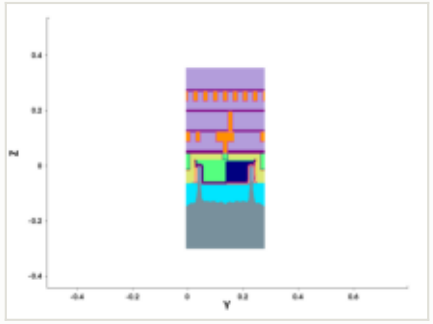

y cut at 0.211 µm

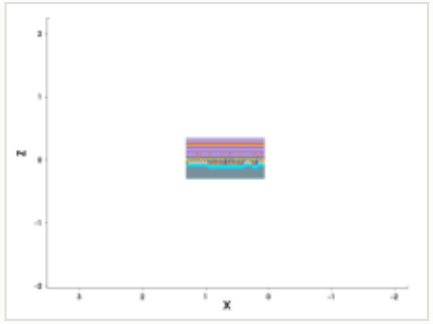

mask for this step

no mask for this step

steps by process area

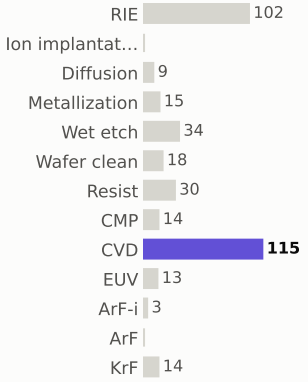

materials deposited (g)



gases emitted (g)



Step #4030: Diffusion

treatment · Diffusion

0.801	354.2	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

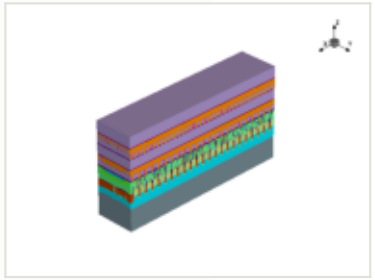

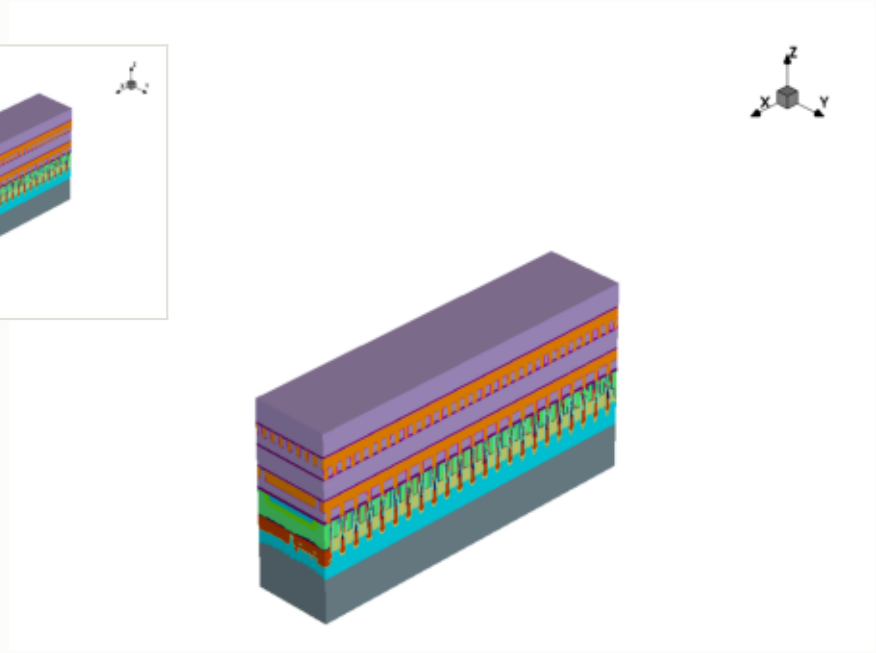

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

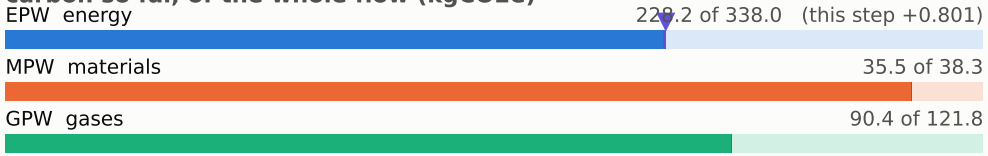

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

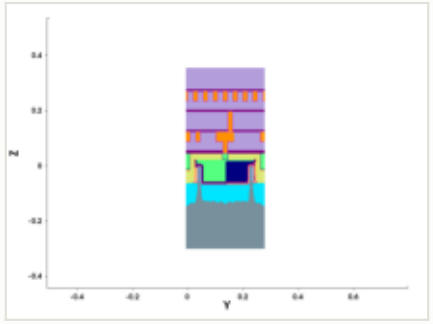

y cut at 0.211 µm

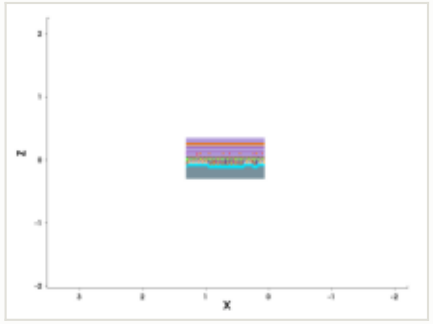

mask for this step

no mask for this step

steps by process area

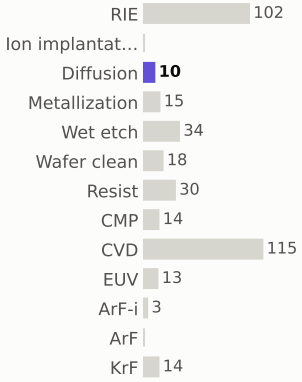

materials deposited (g)



gases emitted (g)



Step #4040: Wafer_clean

clean · Wafer_clean

0.169	354.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

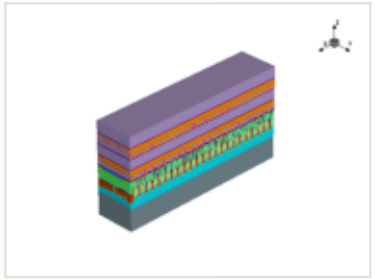

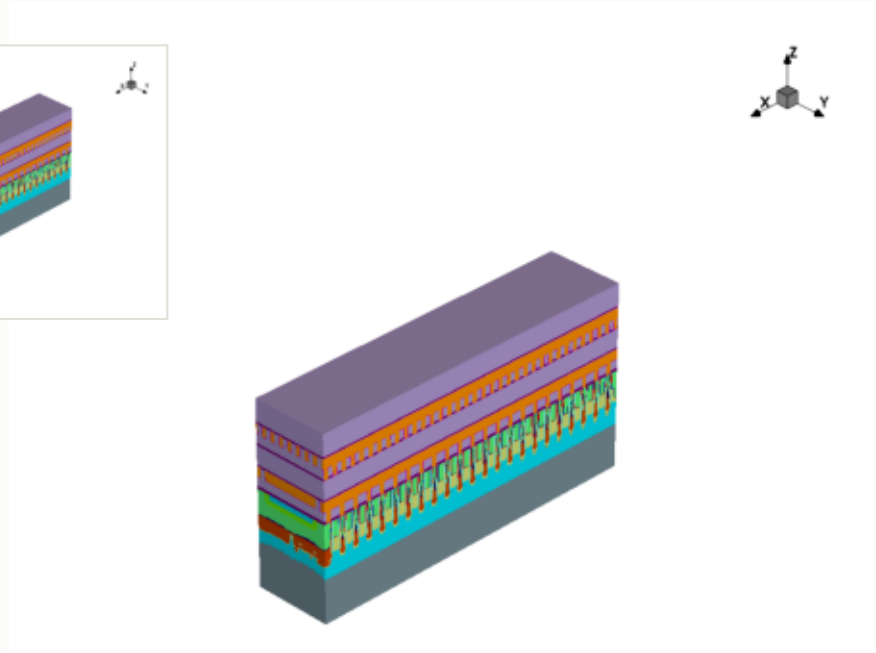

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

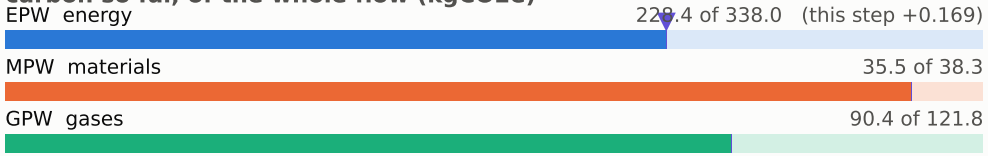

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

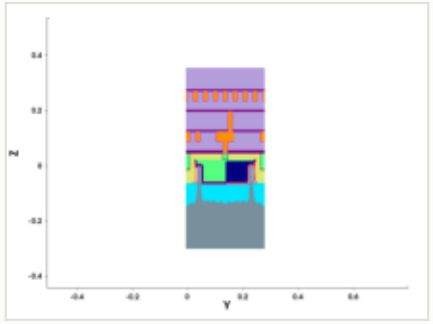

y cut at 0.211 µm

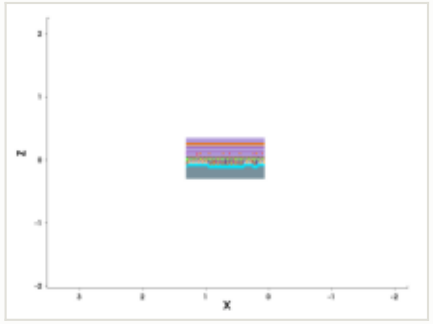

mask for this step

no mask for this step

steps by process area

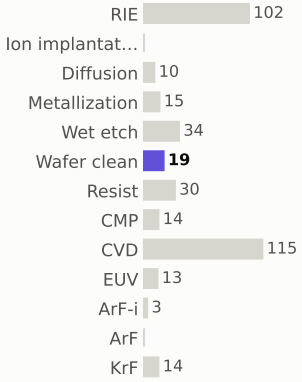

materials deposited (g)



gases emitted (g)



Step #4050: CVD

depo_fill · CVD

1.31	355.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

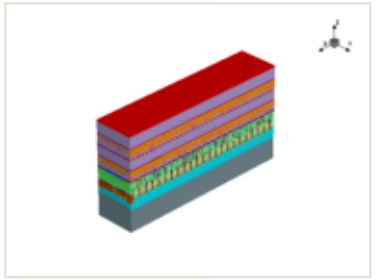

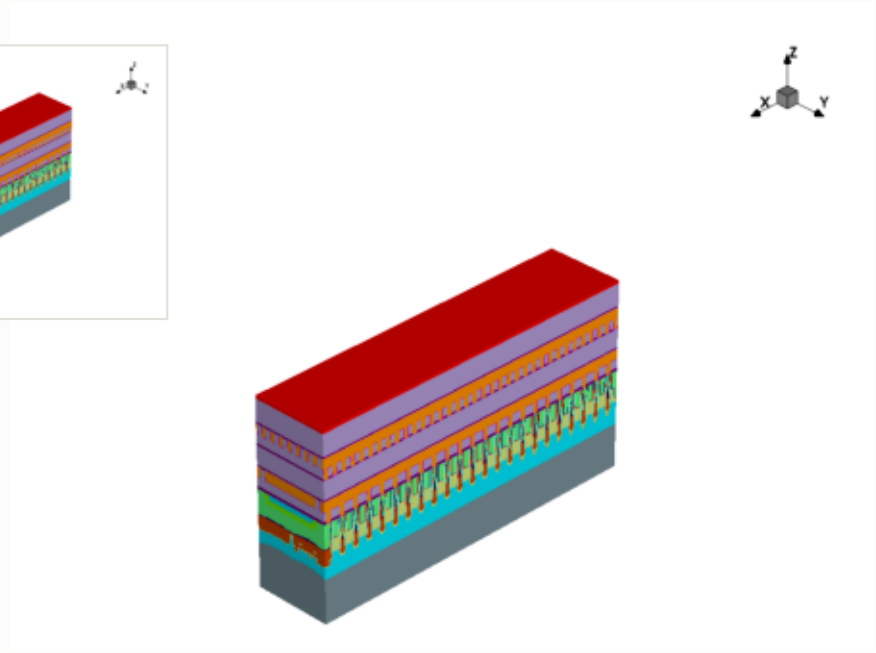

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

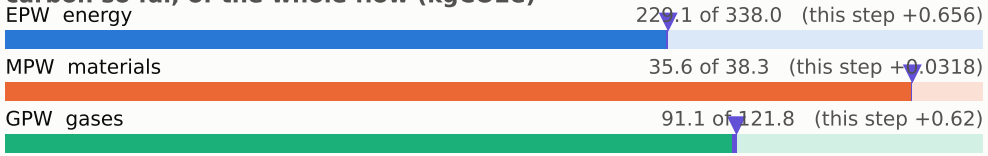

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

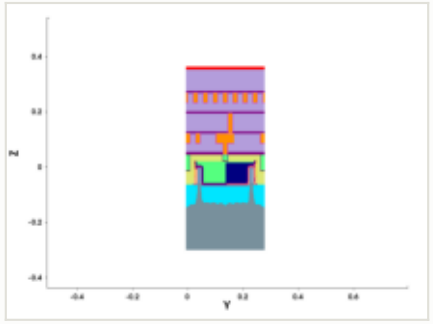

y cut at 0.211 µm

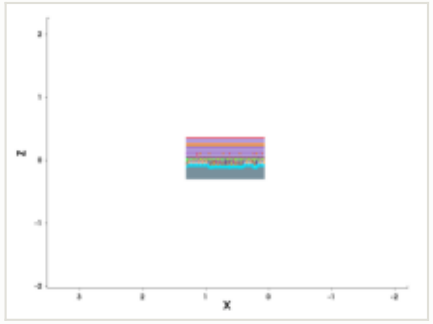

mask for this step

no mask for this step

steps by process area

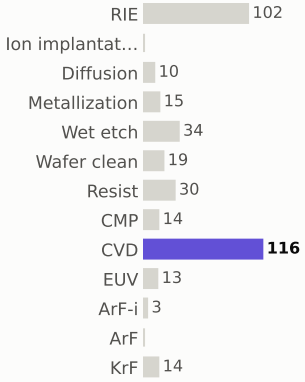

materials deposited (g)



gases emitted (g)



Step #4060: CVD

depo_fill · CVD

1.31	357.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

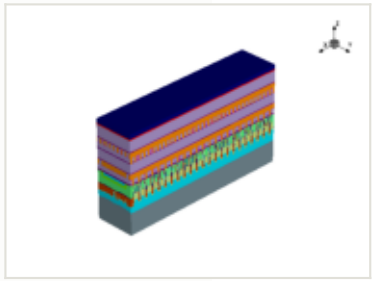

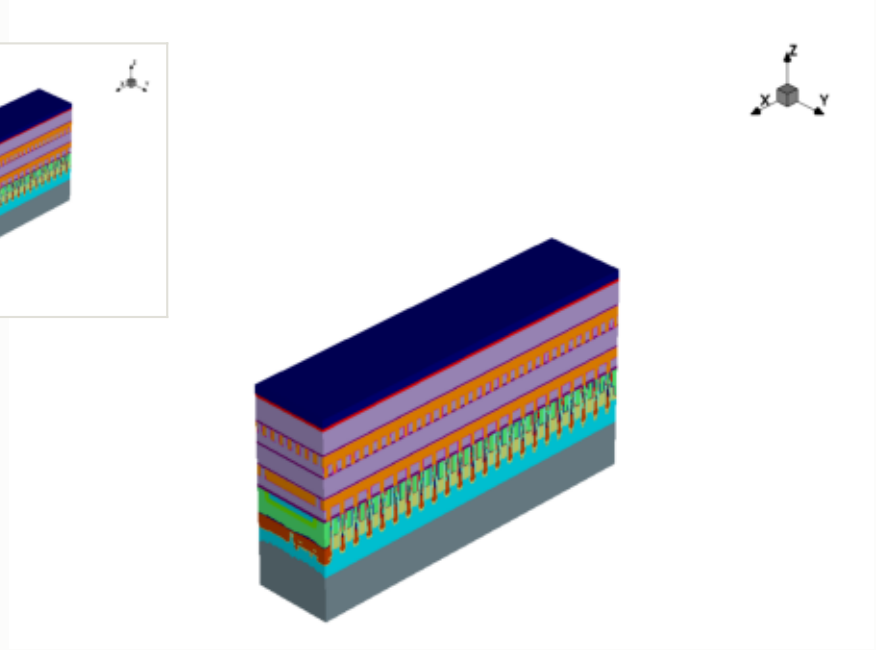

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

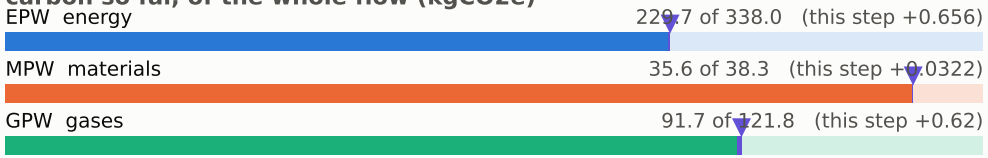

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

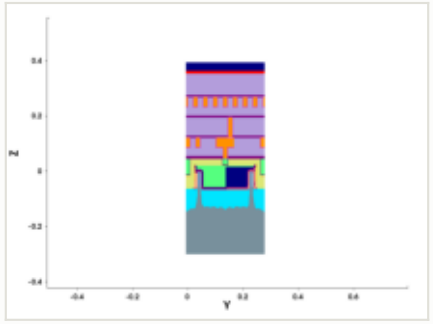

y cut at 0.211 µm

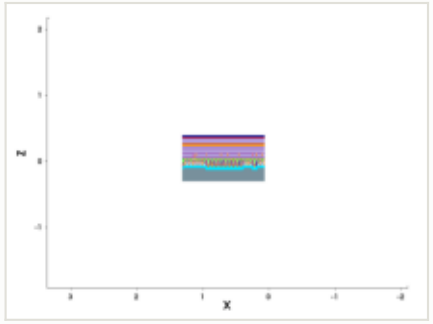

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #4070: Wafer_clean

clean · Wafer_clean

0.169	357.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

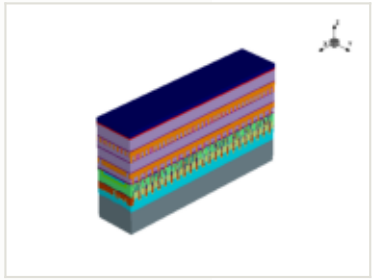

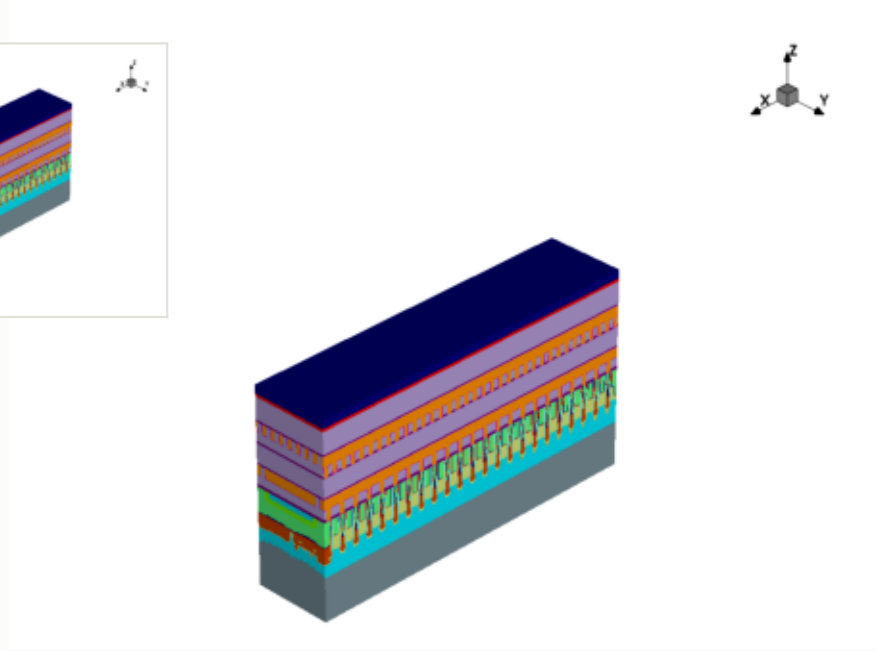

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

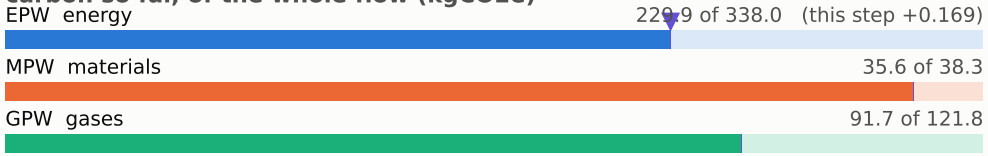

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

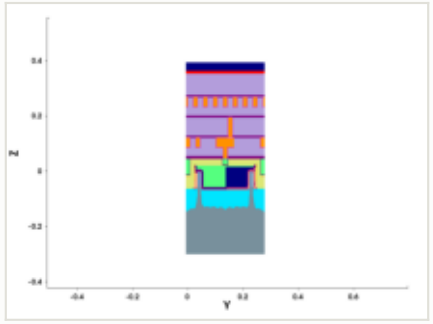

y cut at 0.211 µm

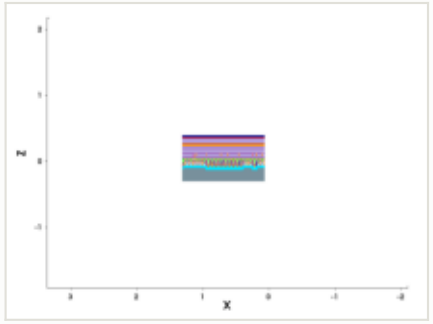

mask for this step

no mask for this step

steps by process area

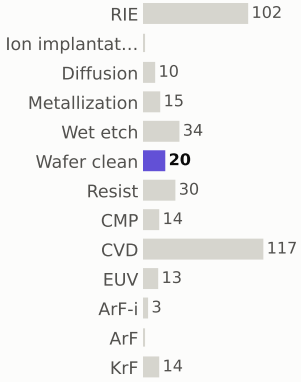

materials deposited (g)



gases emitted (g)



Step #4080: CVD

depo_fill · CVD

1.31	358.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

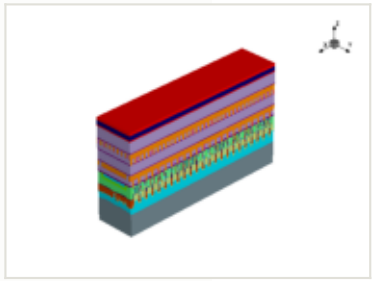

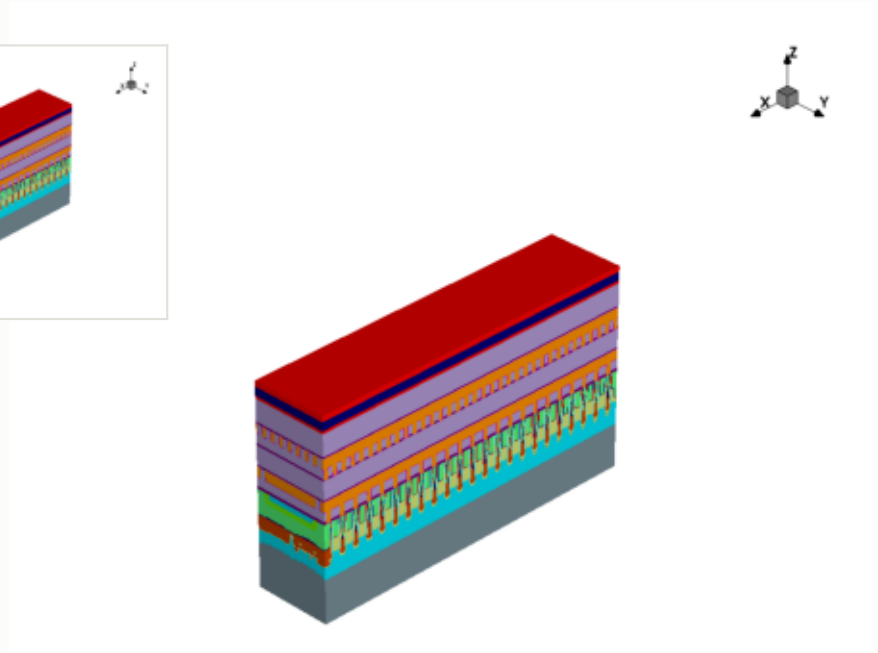

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

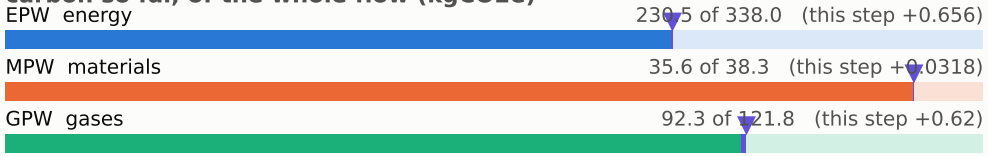

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

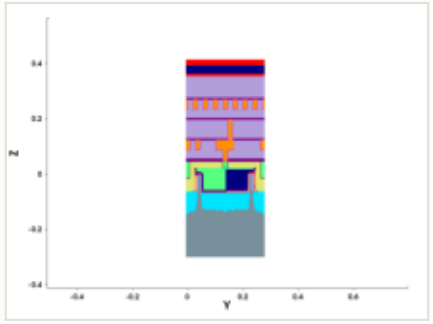

y cut at 0.211 µm

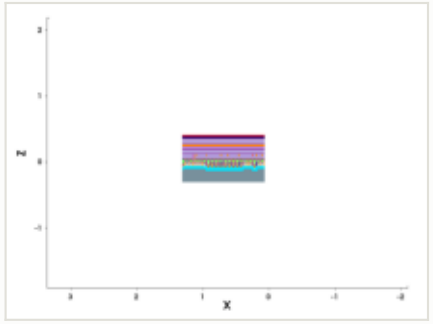

mask for this step

no mask for this step

steps by process area

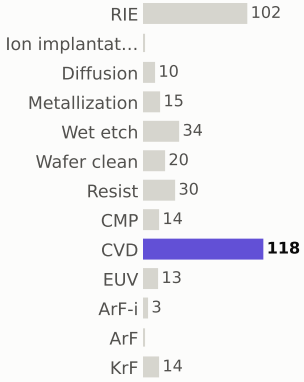

materials deposited (g)



gases emitted (g)



Step #4090: CVD

depo_fill · CVD

1.31	359.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



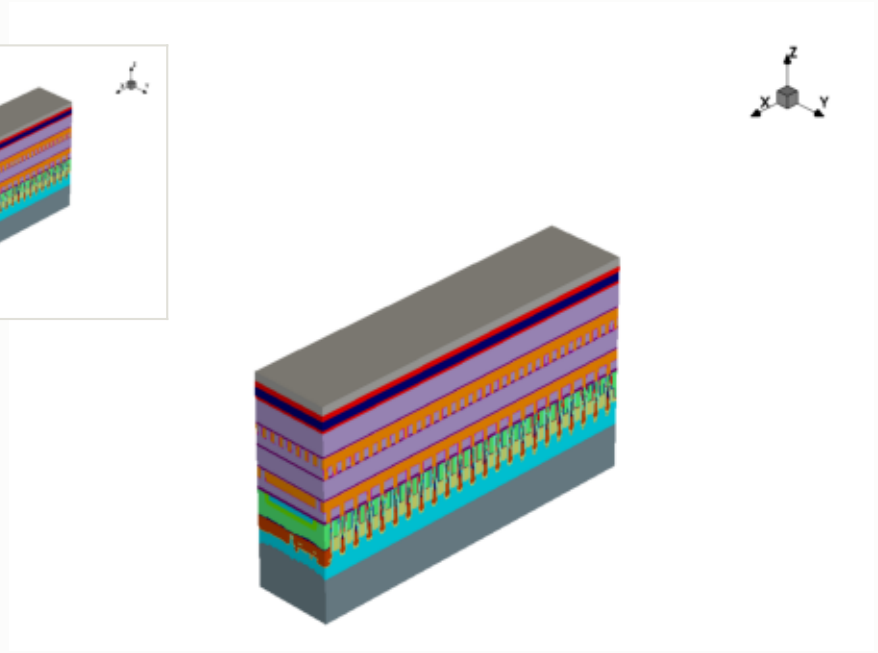

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

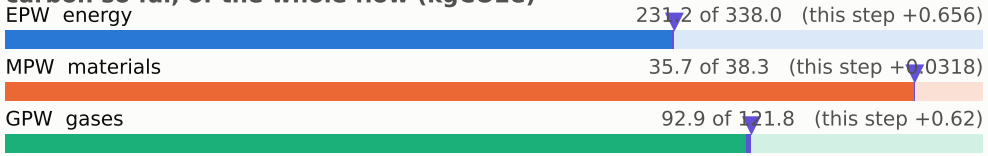

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

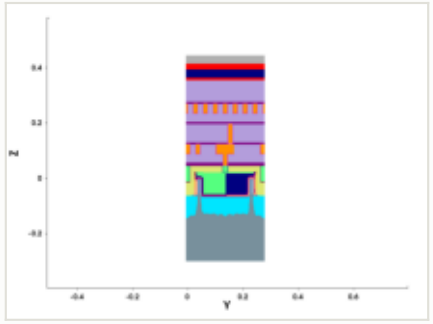

y cut at 0.211 µm

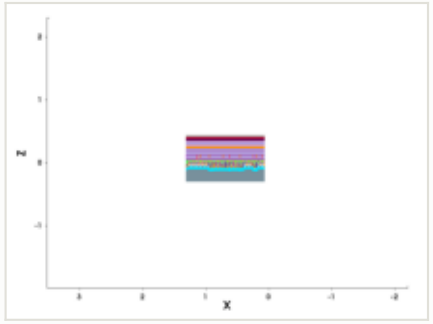

mask for this step

no mask for this step

steps by process area

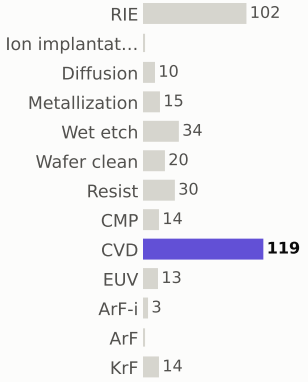

materials deposited (g)



gases emitted (g)



Step #4100: Resist

depo_fill · Resist

0.169	359.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



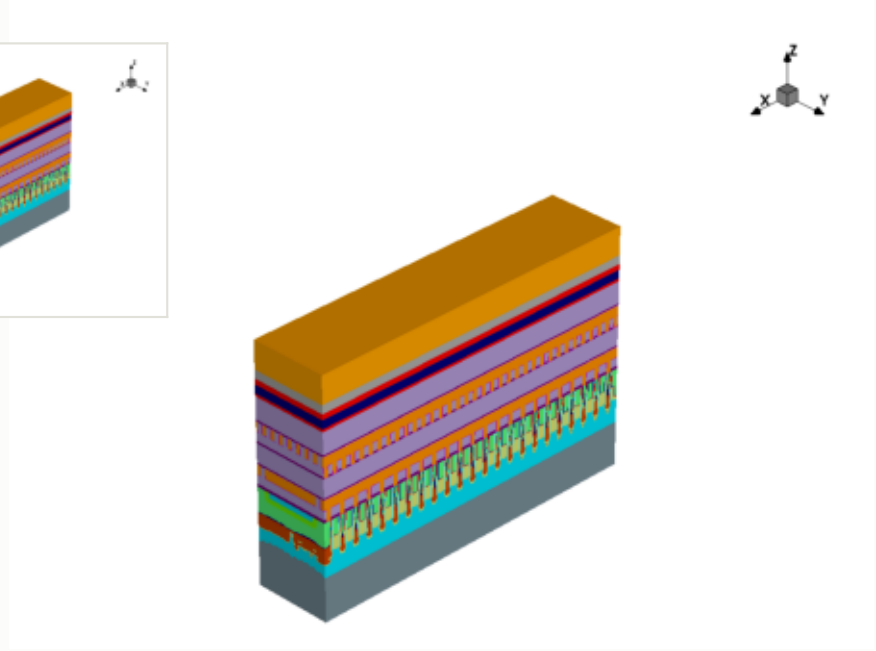

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

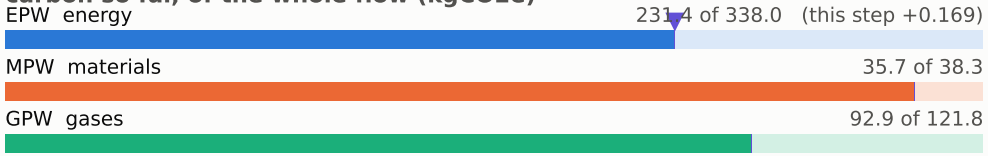

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

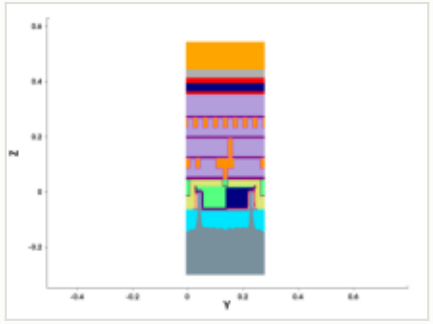

y cut at 0.211 µm

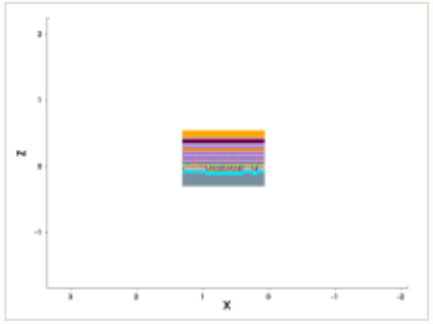

mask for this step

no mask for this step

steps by process area

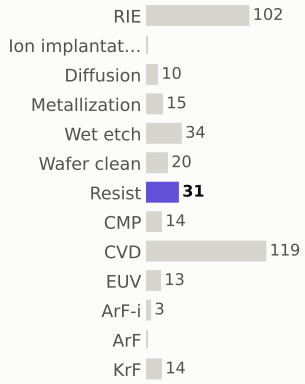

materials deposited (g)



gases emitted (g)



Step #4110: CVD

depo_fill · CVD

1.31	361.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



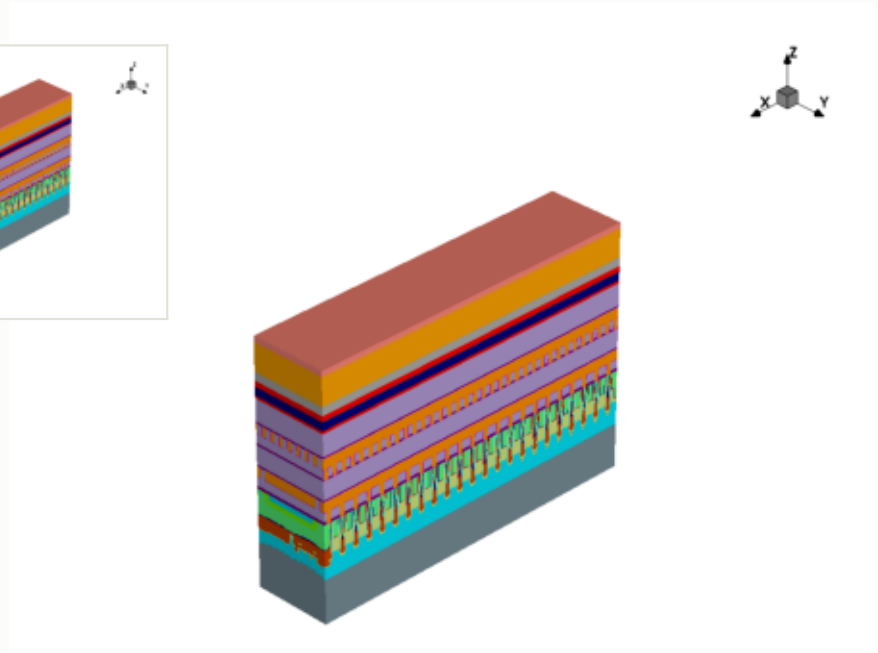

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

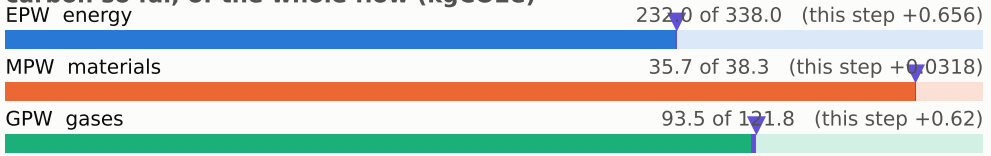

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

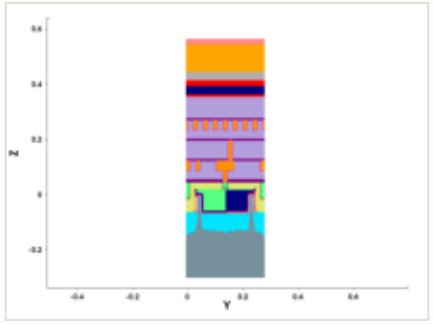

y cut at 0.211 µm

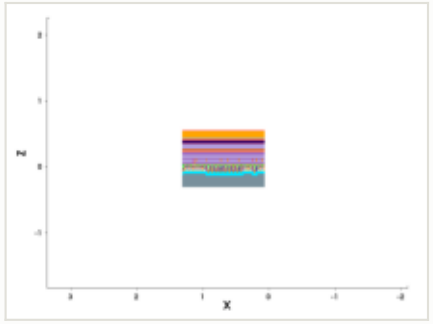

mask for this step

no mask for this step

steps by process area

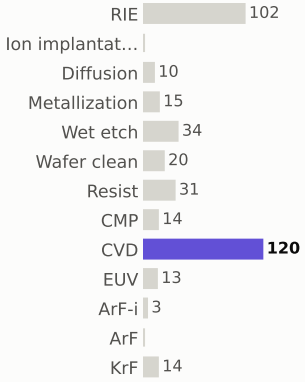

materials deposited (g)



gases emitted (g)



Step #4120: Wafer_clean

clean · Wafer_clean

0.169	361.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



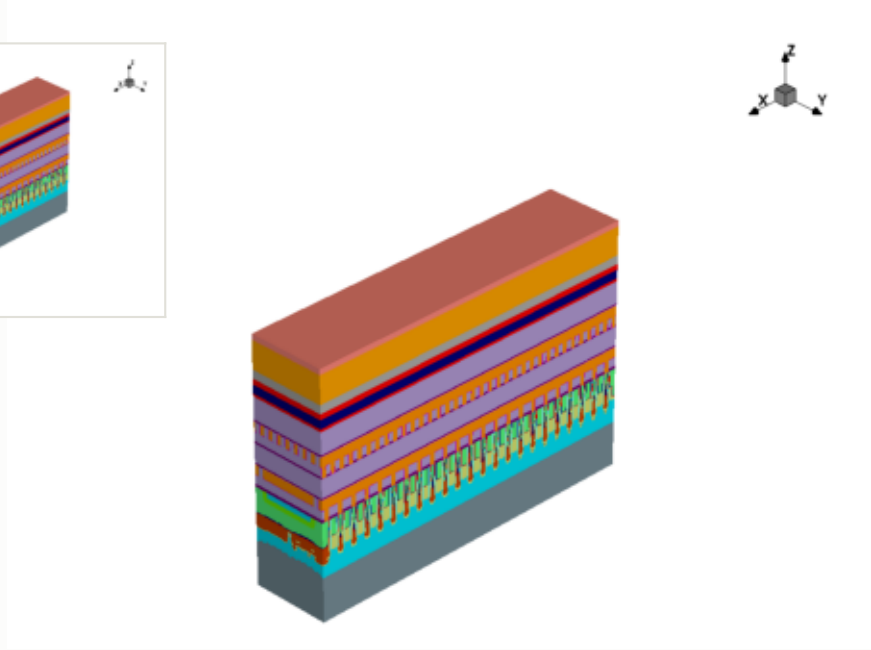

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

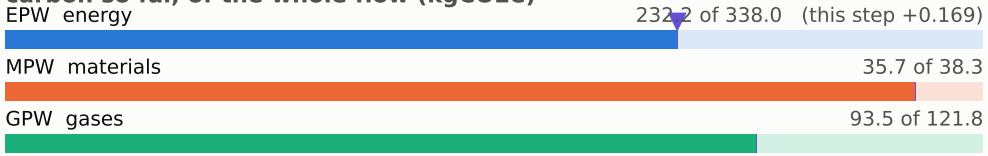

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

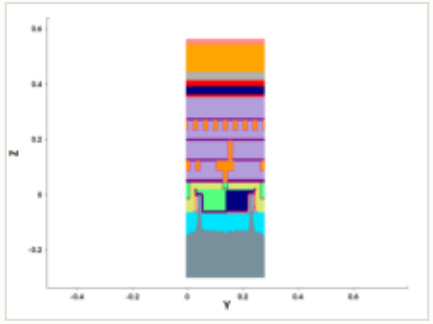

y cut at 0.211 µm

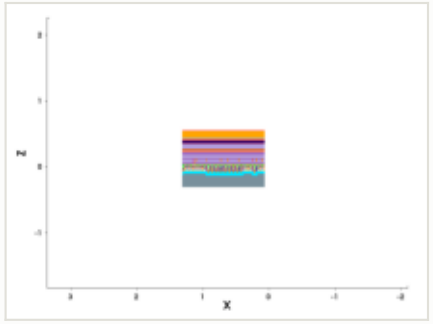

mask for this step

no mask for this step

steps by process area

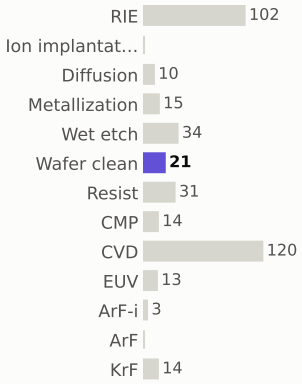

materials deposited (g)



gases emitted (g)



Step #4130: ArF-i

litho_patterning · ArF-i

0.217	361.6	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



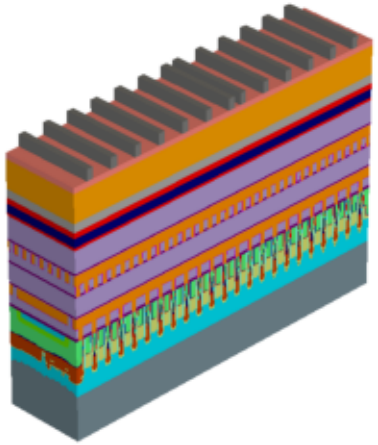

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

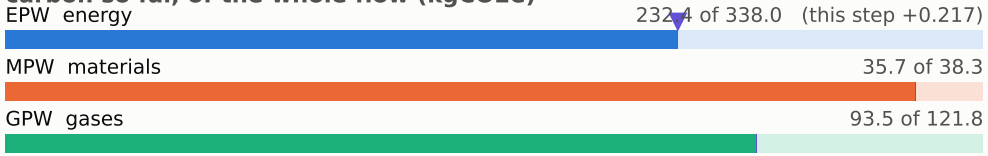

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

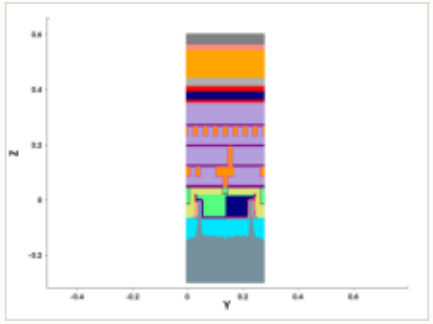

y cut at 0.211 µm

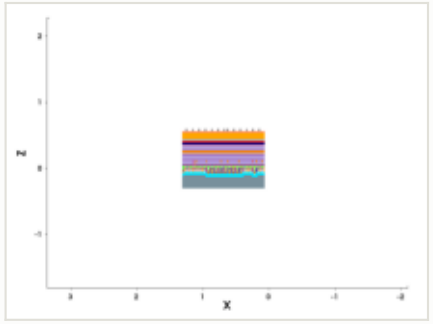

mask: layer 10401:0, positive (GDSII)

steps by process area

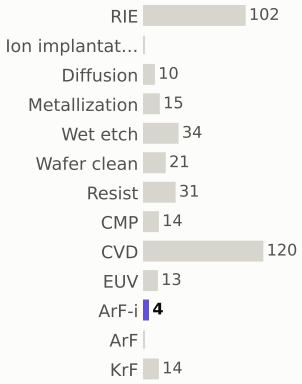

materials deposited (g)



gases emitted (g)

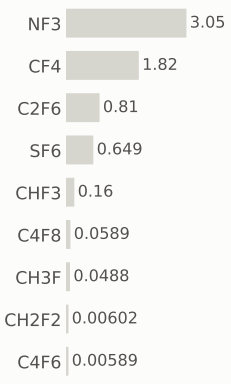

Step #4140: Ion_implantation

treatment · Ion_implantation

0.801	362.4	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



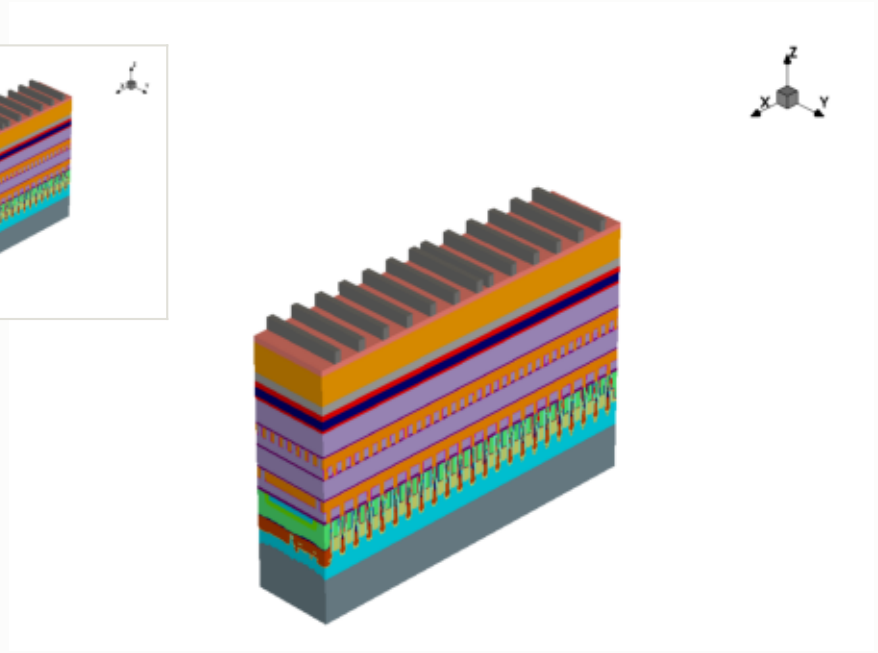

x cut at 0.677 µm

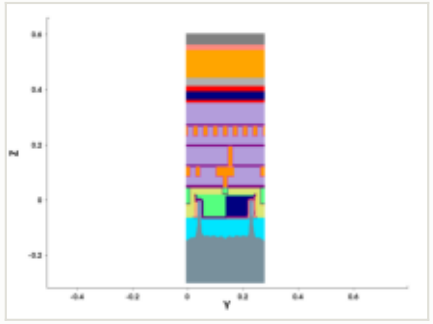

y cut at 0.211 µm

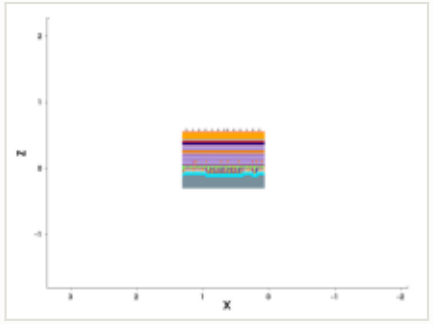

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

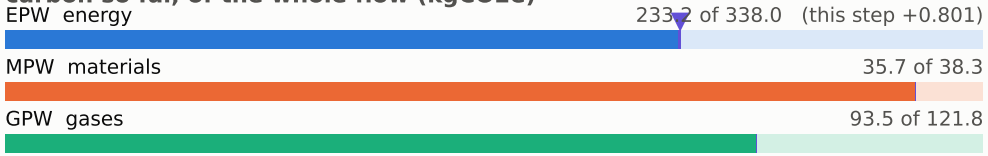

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

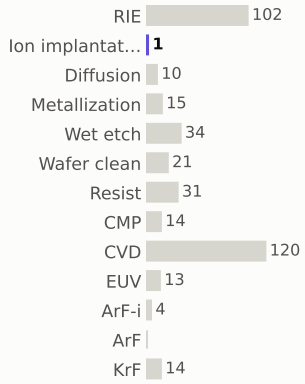

materials deposited (g)



gases emitted (g)



Step #4150: RIE

etch_anisotropic · RIE

1.04	363.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



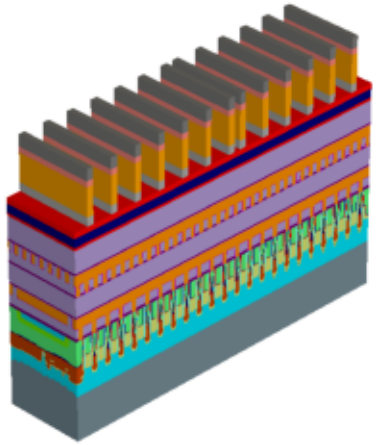

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

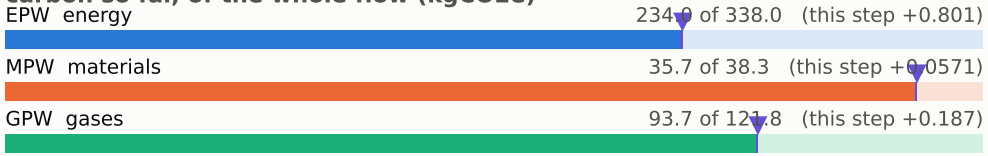

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

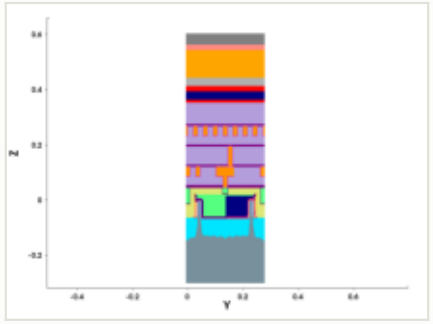

y cut at 0.211 µm

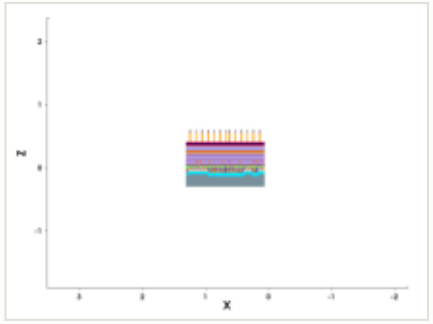

mask for this step

no mask for this step

steps by process area

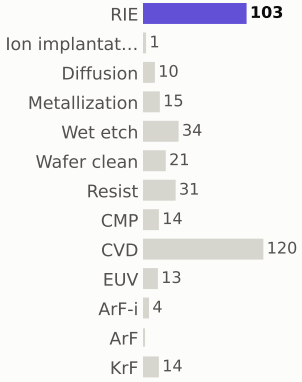

materials deposited (g)



gases emitted (g)



Step #4160: Wafer_clean

etch_strip · Wafer_clean

0.169	363.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



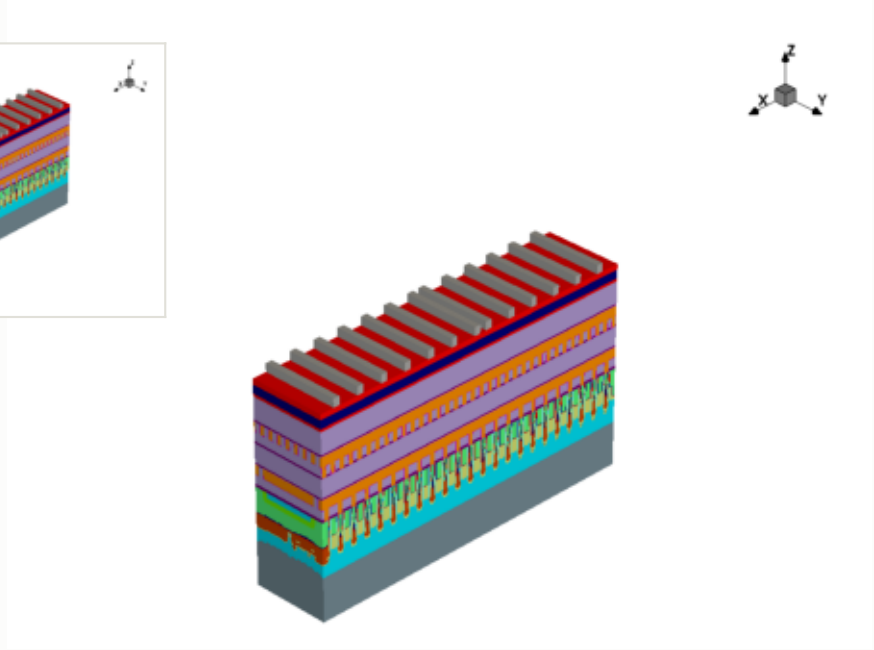

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

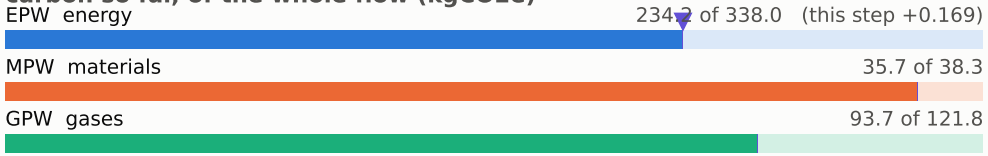

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

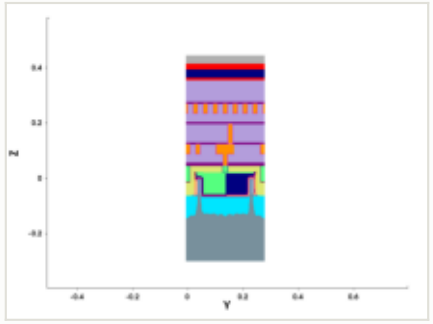

y cut at 0.211 µm

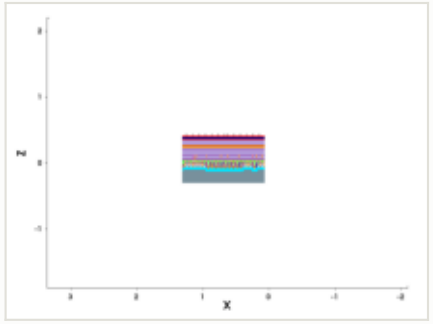

mask for this step

no mask for this step

steps by process area

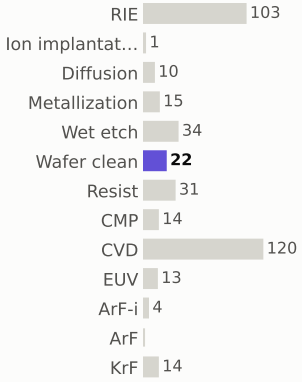

materials deposited (g)



gases emitted (g)



Step #4170: CVD

depo_isotropic · CVD

1.31	365.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



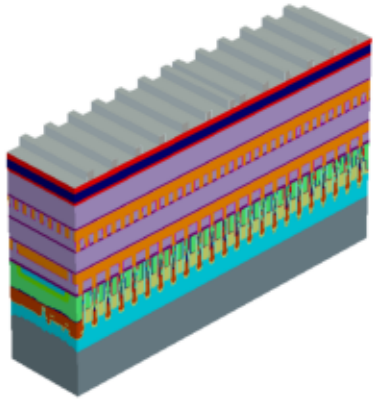

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

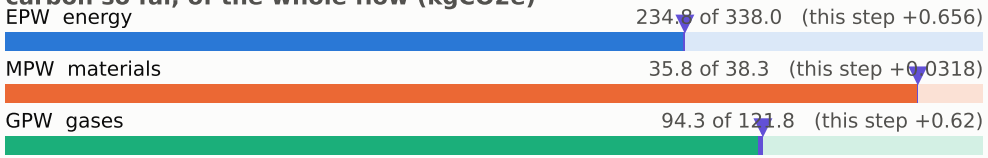

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

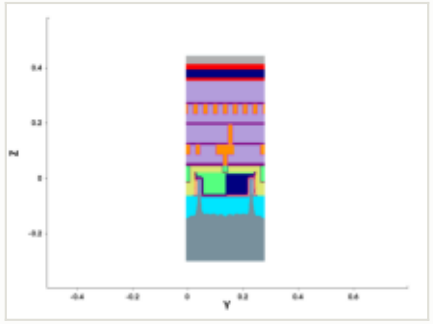

y cut at 0.211 µm

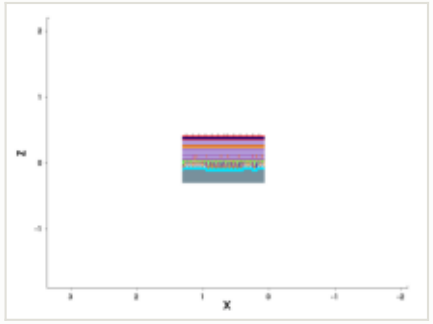

mask for this step

no mask for this step

steps by process area

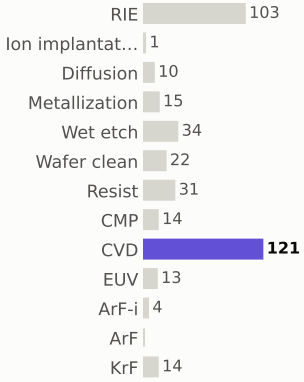

materials deposited (g)



gases emitted (g)



Step #4180: RIE

etch_anisotropic · RIE

1.04	366.0	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



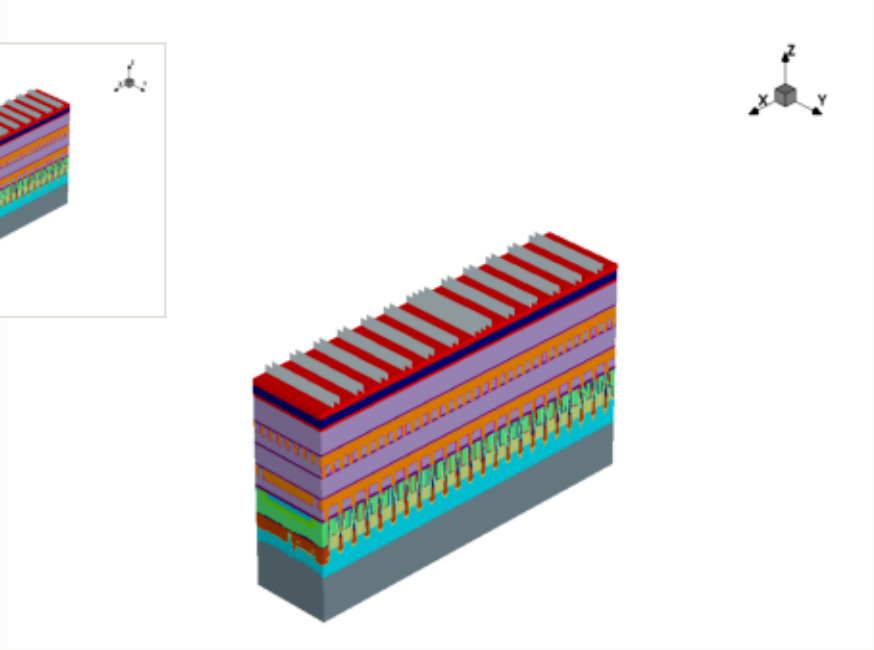

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

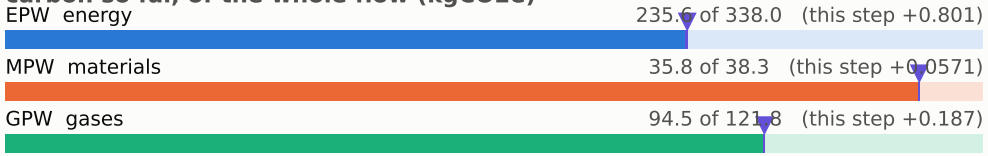

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

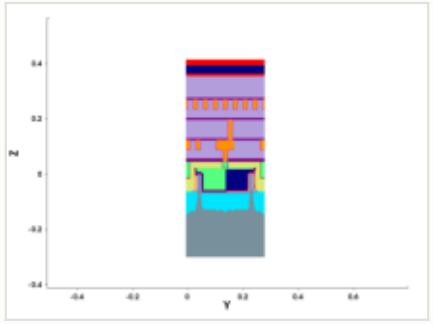

y cut at 0.211 µm

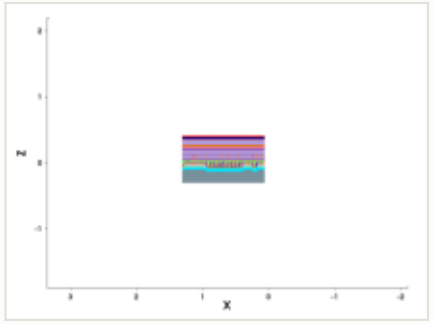

mask for this step

no mask for this step

steps by process area

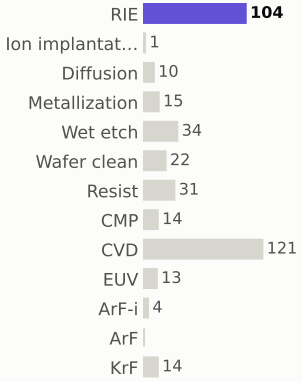

materials deposited (g)



gases emitted (g)



Step #4190: Wafer_clean

etch_strip · Wafer_clean

0.169	366.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



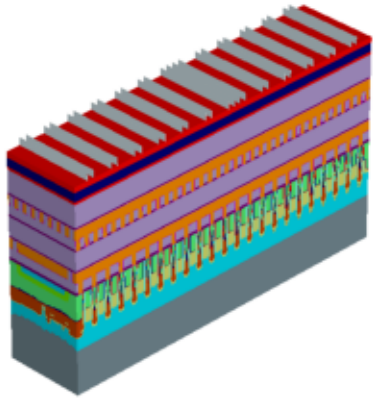

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

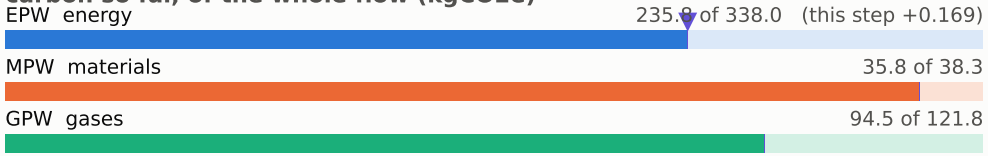

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

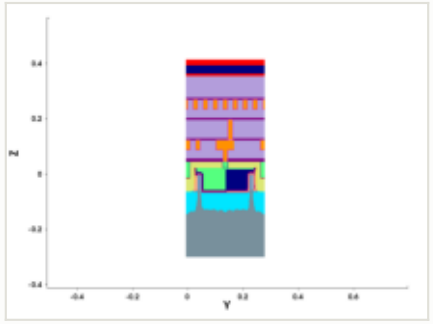

y cut at 0.211 µm

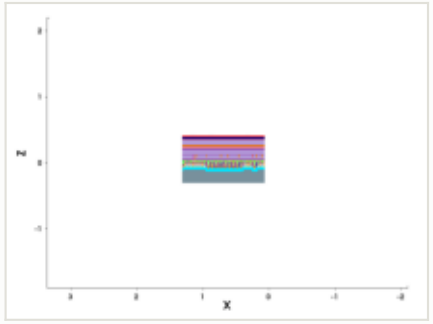

mask for this step

no mask for this step

steps by process area

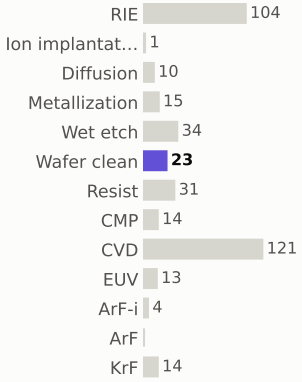

materials deposited (g)



gases emitted (g)



Step #4200: Resist

depo_fill · Resist

0.169	366.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



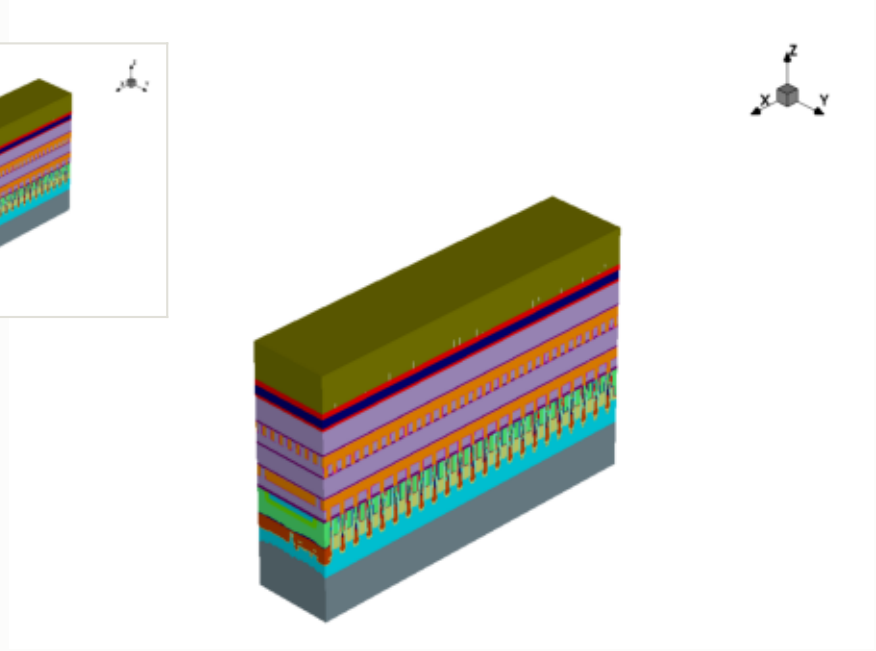

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

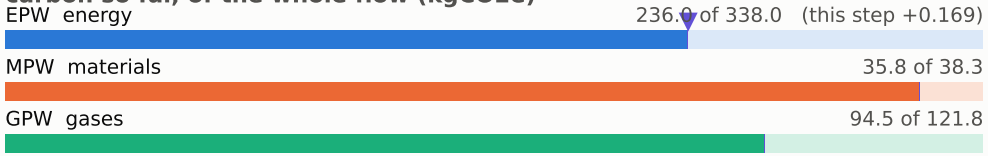

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

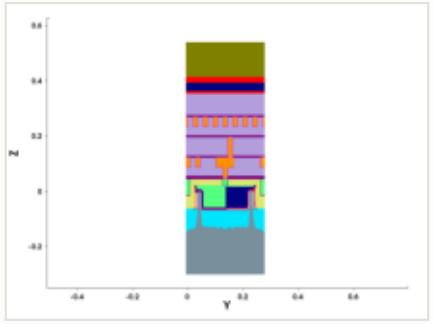

y cut at 0.211 µm

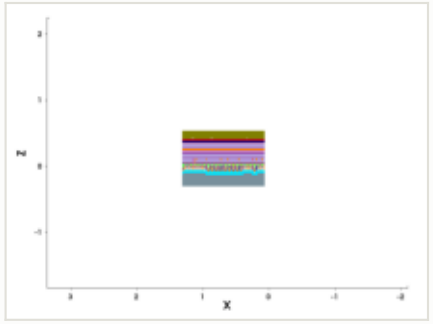

mask for this step

no mask for this step

steps by process area

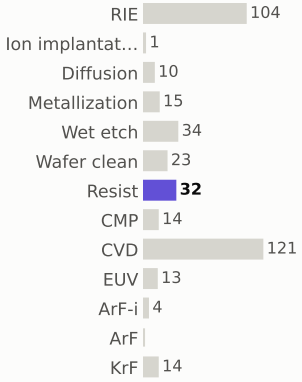

materials deposited (g)



gases emitted (g)



Step #4210: Wafer_clean

clean · Wafer_clean

0.169	366.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



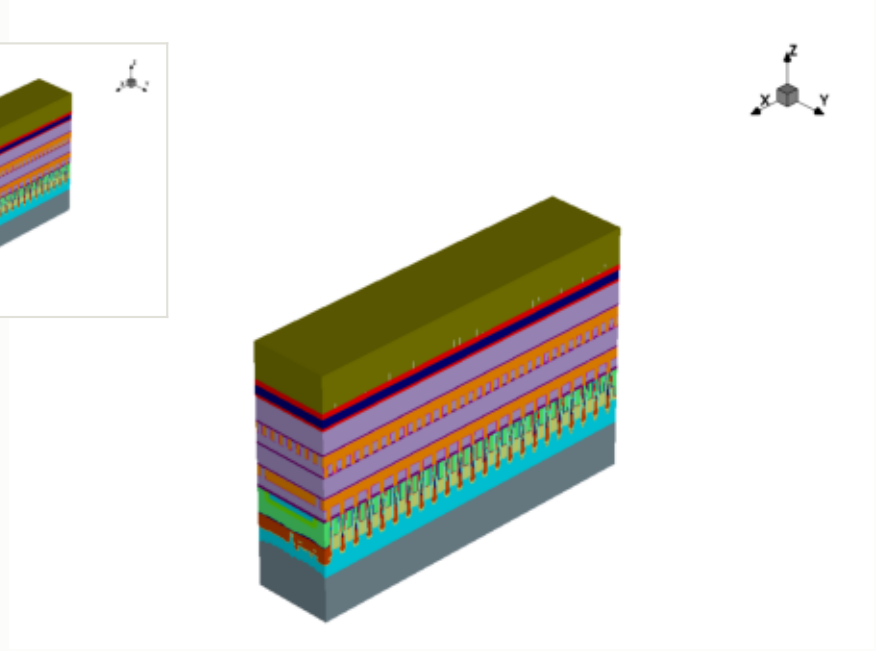

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

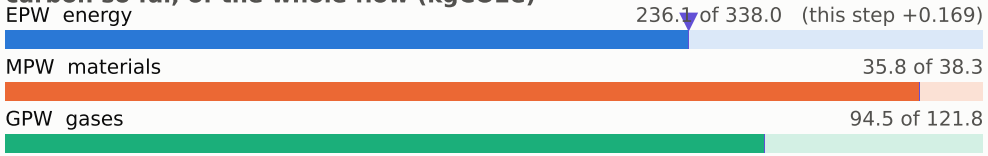

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

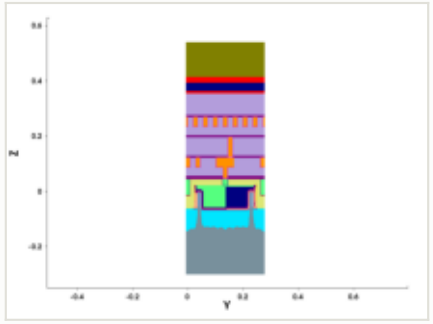

y cut at 0.211 µm

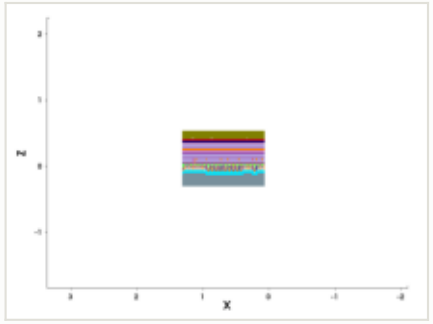

mask for this step

no mask for this step

steps by process area

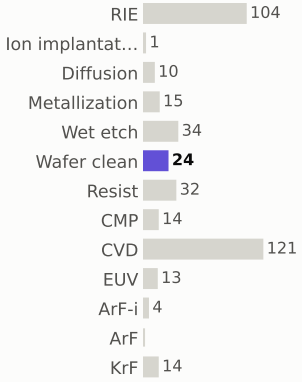

materials deposited (g)



gases emitted (g)



Step #4220: ArF-i

litho_patterning · ArF-i

0.217	366.7	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



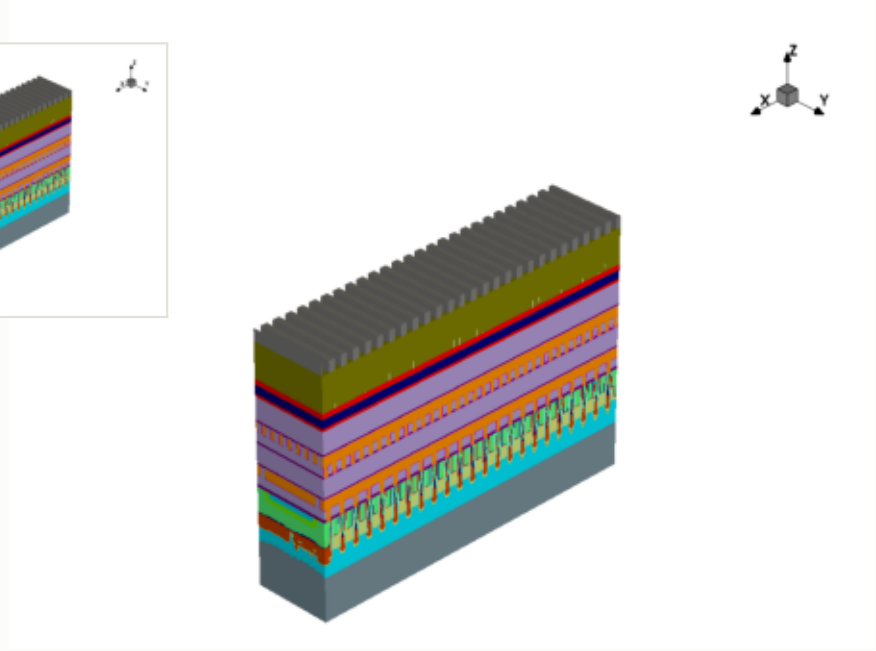

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

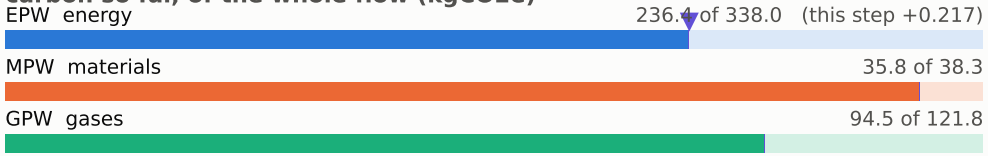

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

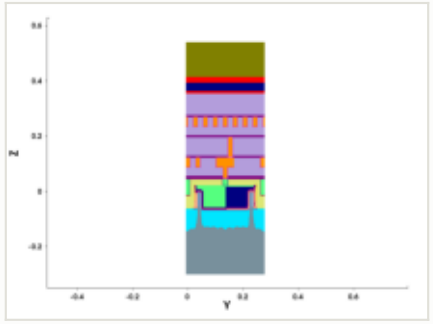

y cut at 0.211 µm

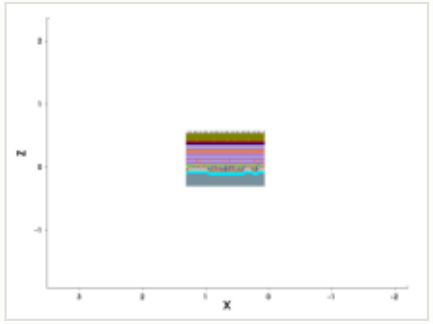

mask: layer 40:0 (GDSII)

steps by process area

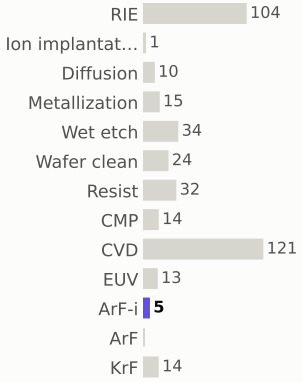

materials deposited (g)



gases emitted (g)



Step #4230: RIE

etch_anisotropic · RIE

1.04	367.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



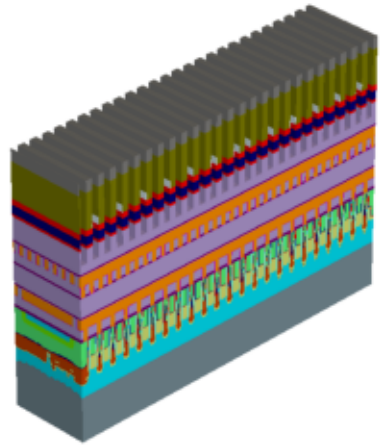

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

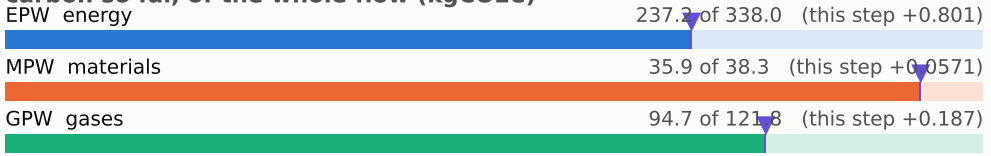

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

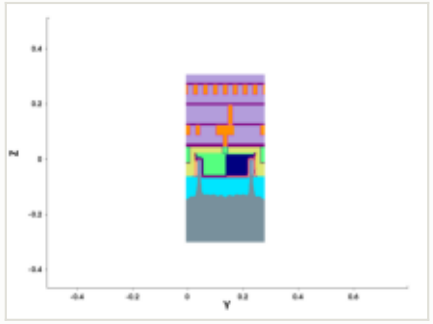

y cut at 0.211 µm

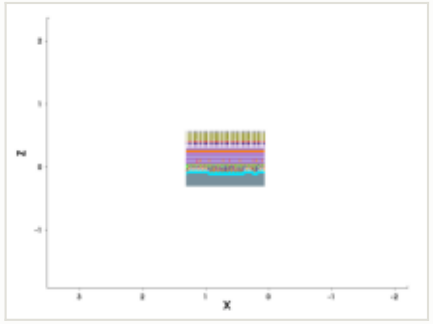

mask for this step

no mask for this step

steps by process area

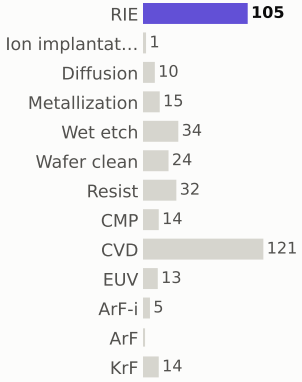

materials deposited (g)



gases emitted (g)



Step #4240: Wafer_clean

etch_strip · Wafer_clean

0.169	367.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



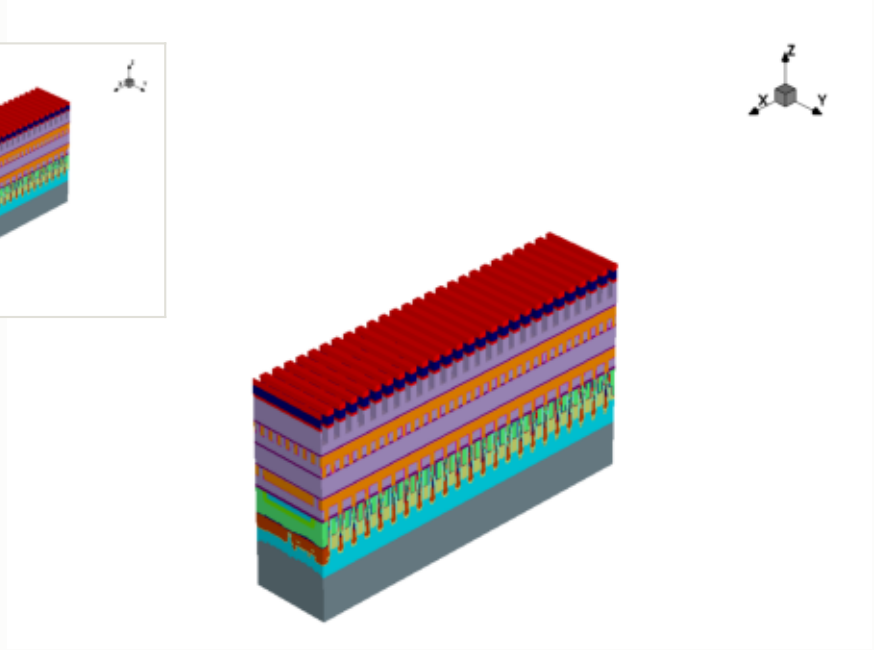

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

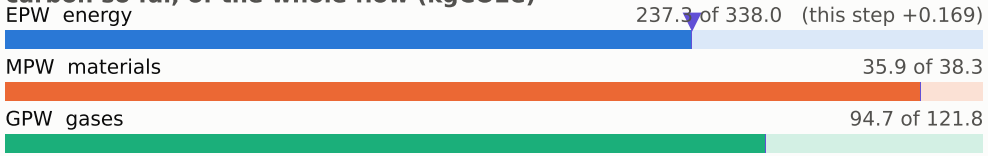

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

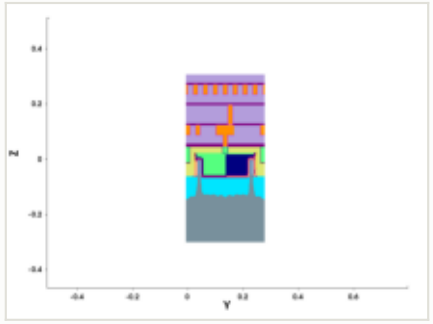

y cut at 0.211 µm

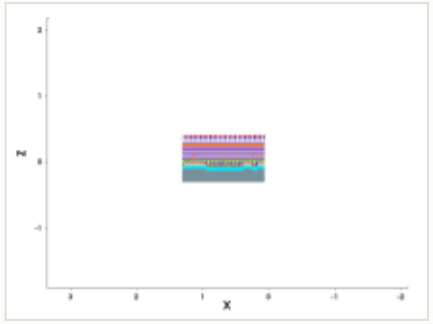

mask for this step

no mask for this step

steps by process area

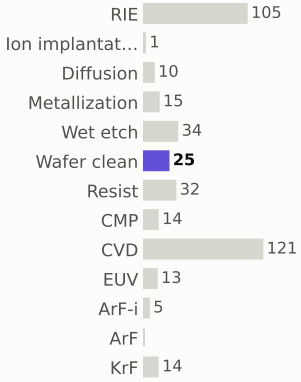

materials deposited (g)



gases emitted (g)



Step #4250: Resist

depo_fill · Resist

0.169	368.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



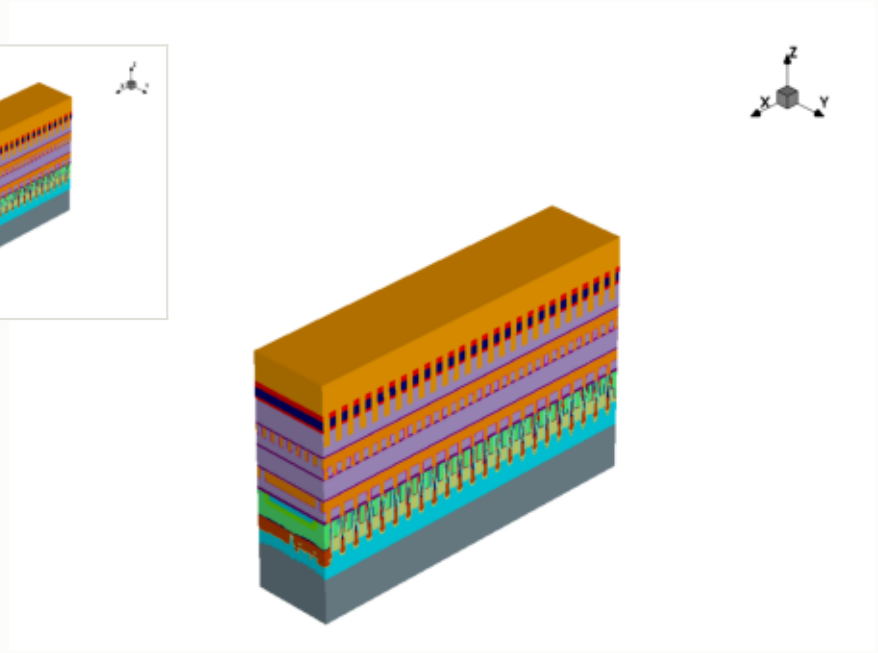

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

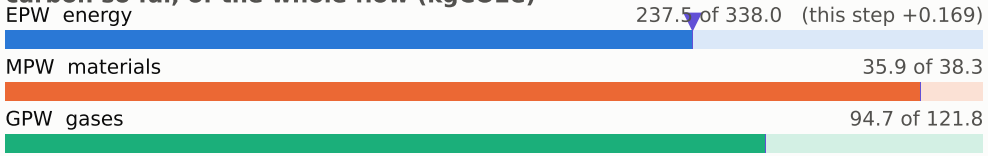

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

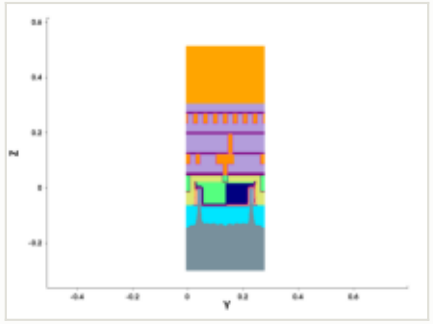

y cut at 0.211 µm

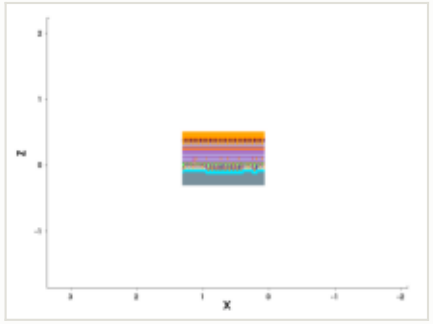

mask for this step

no mask for this step

steps by process area

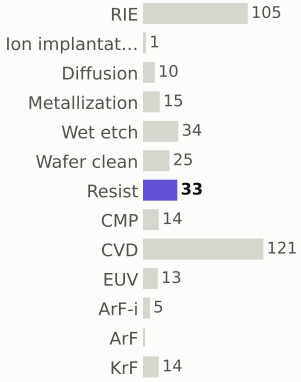

materials deposited (g)



gases emitted (g)



Step #4260: CVD

depo_fill · CVD

1.31	369.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



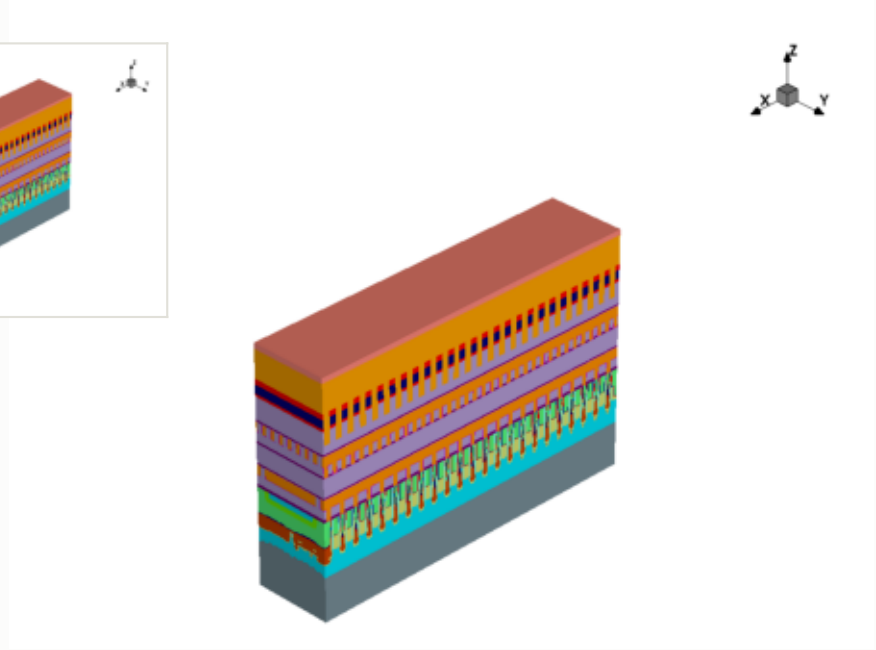

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

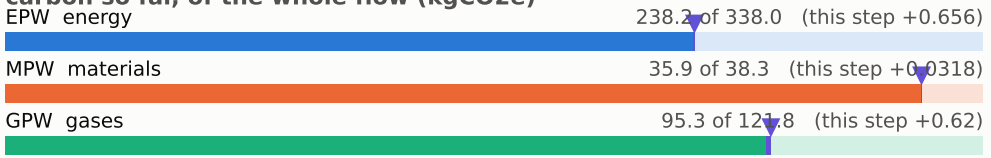

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

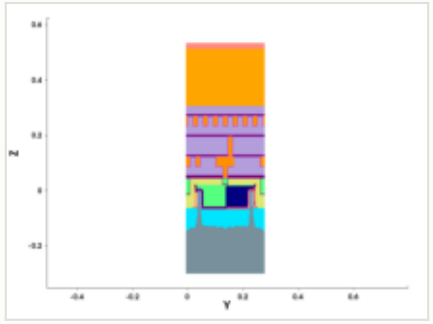

y cut at 0.211 µm

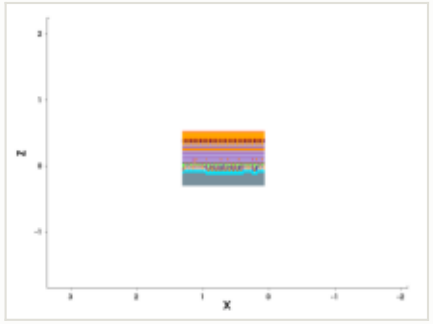

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #4270: Wafer_clean

clean · Wafer_clean

0.169	369.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



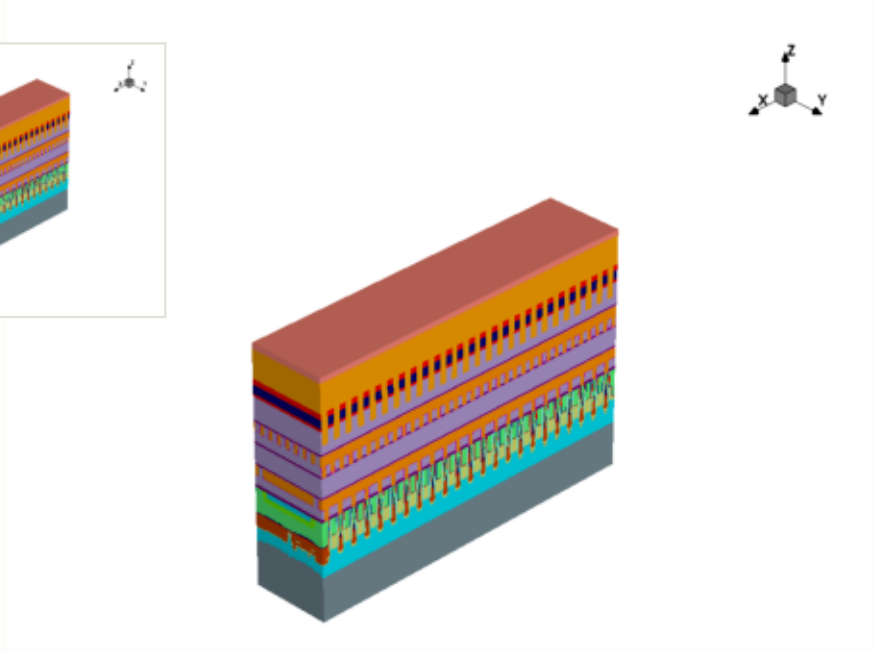

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

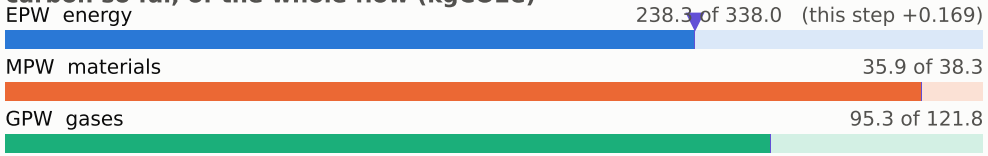

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

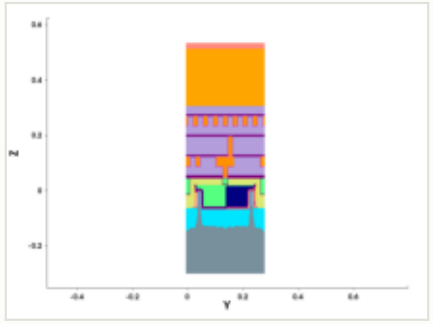

y cut at 0.211 µm

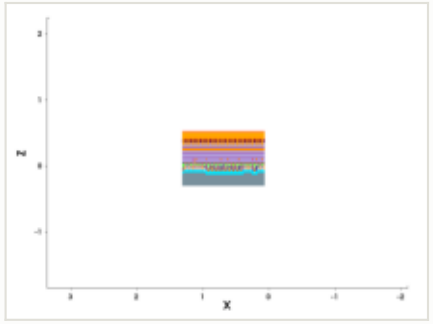

mask for this step

no mask for this step

steps by process area

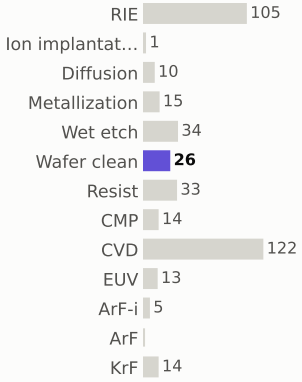

materials deposited (g)



gases emitted (g)



Step #4280: EUV

litho_patterning · EUV

1.96	371.5	0.39%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



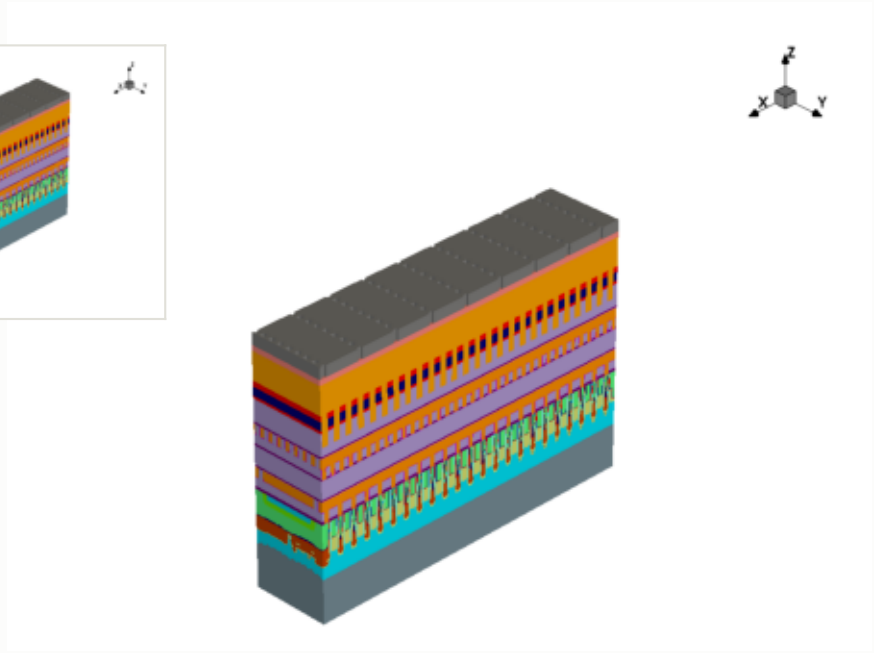

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

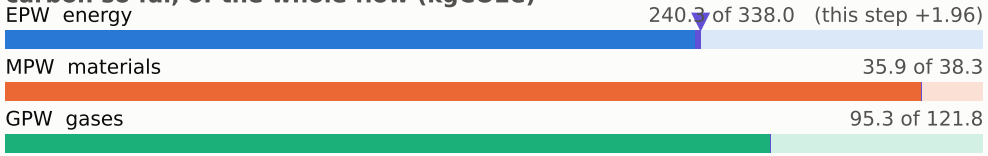

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

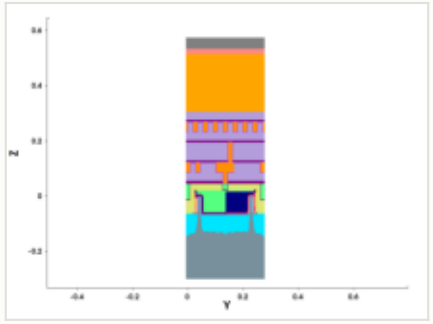

y cut at 0.211 µm

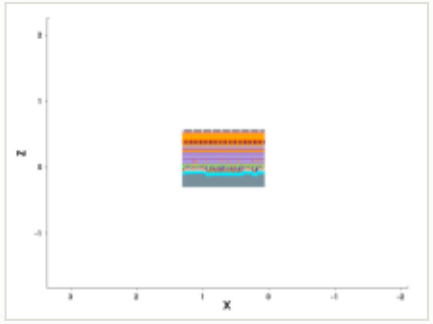

mask: layer 35:0 (GDSII)

steps by process area

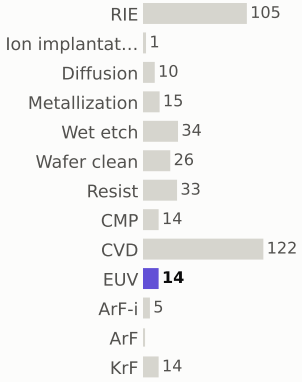

materials deposited (g)

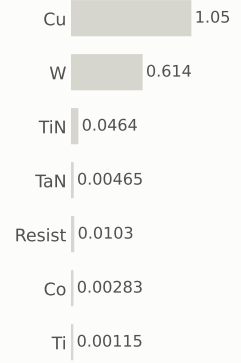

gases emitted (g)

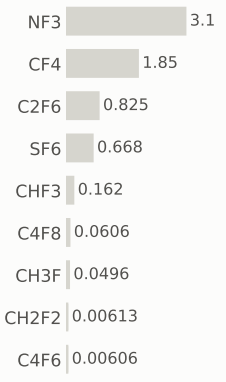

Step #4290: RIE

etch_anisotropic · RIE

1.04	372.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



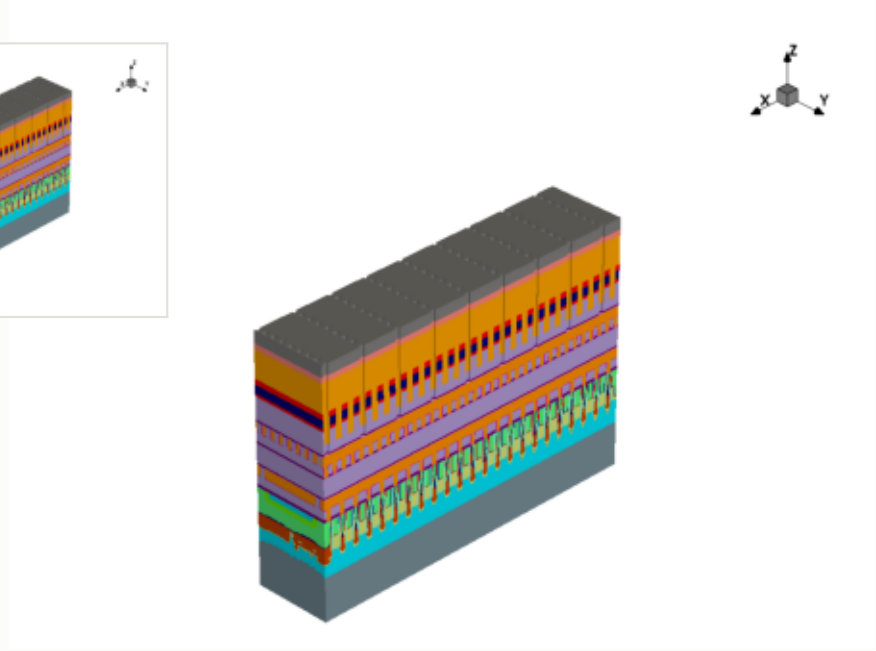

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

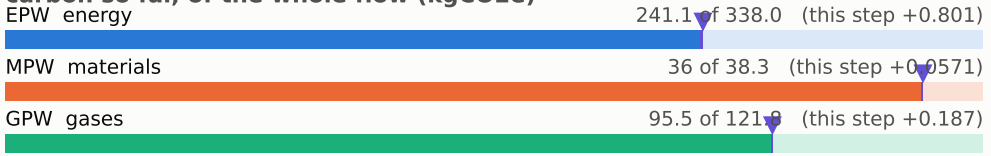

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

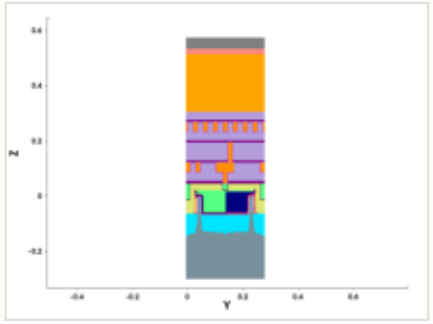

y cut at 0.211 µm

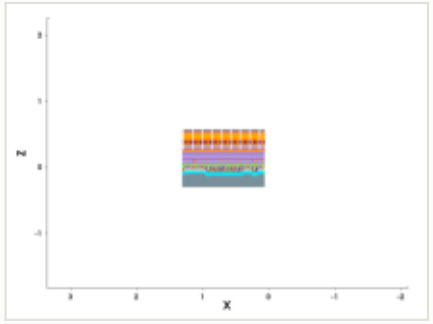

mask for this step

no mask for this step

steps by process area

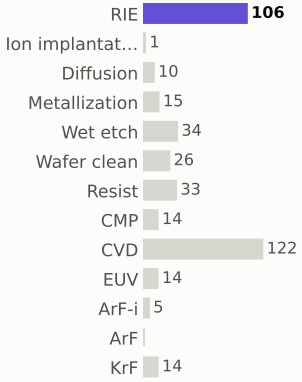

materials deposited (g)



gases emitted (g)



Step #4300: Wafer_clean

etch_strip · Wafer_clean

0.169	372.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



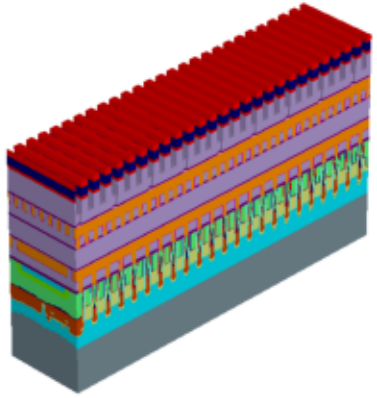

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

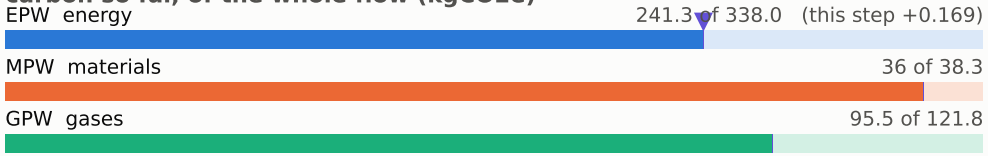

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

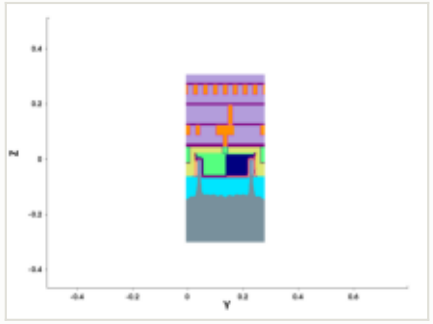

y cut at 0.211 µm

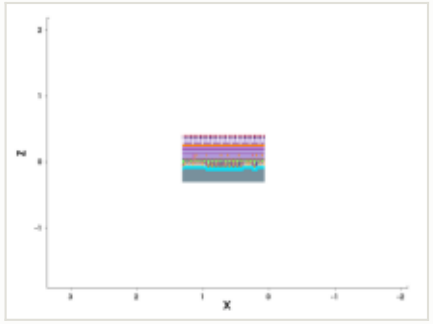

mask for this step

no mask for this step

steps by process area

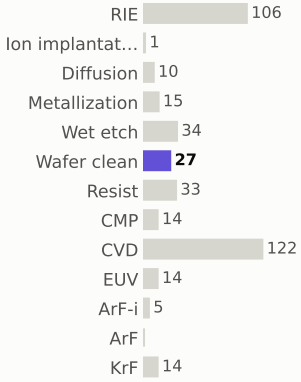

materials deposited (g)



gases emitted (g)



Step #4310: Metallization

depo_ellipsoidal · Metallization

1.2	374.0	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



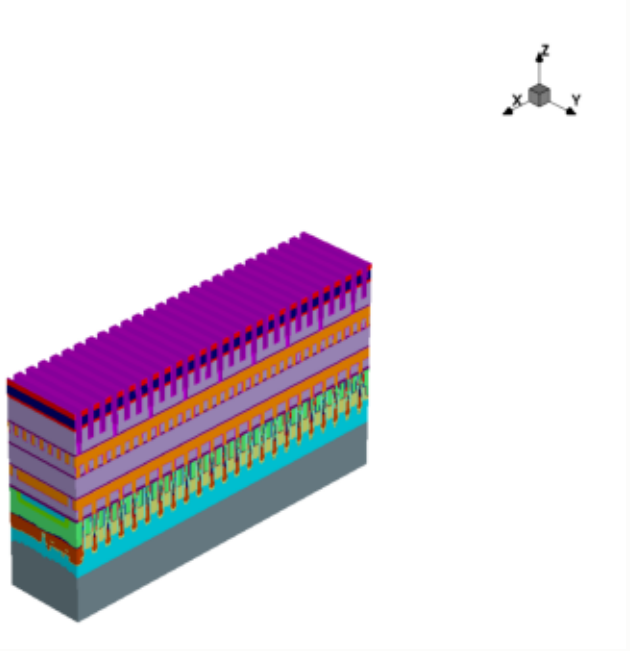

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

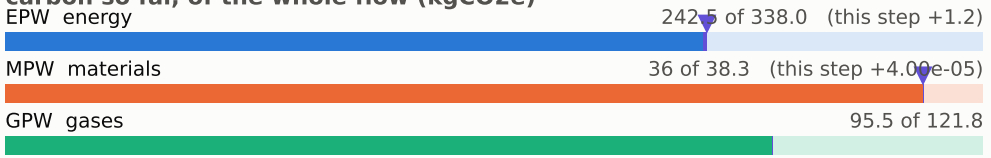

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

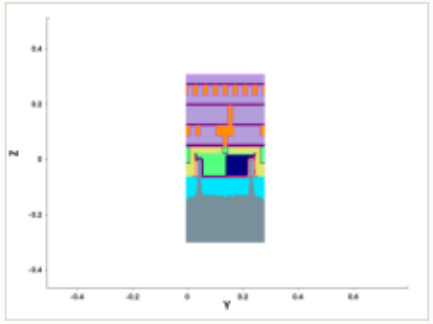

y cut at 0.211 µm

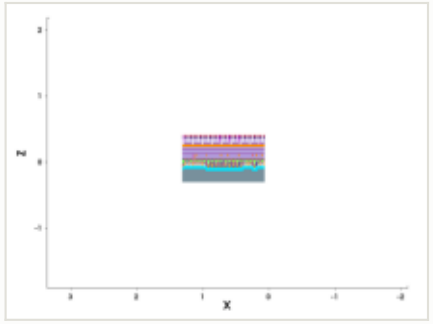

mask for this step

no mask for this step

steps by process area

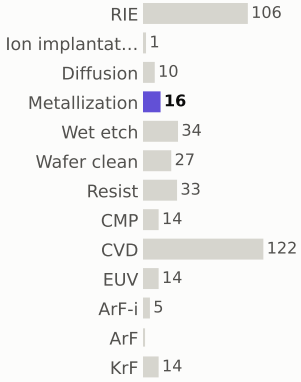

materials deposited (g)



gases emitted (g)



Step #4320: Metallization

depo_fill · Metallization

1.21	375.2	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



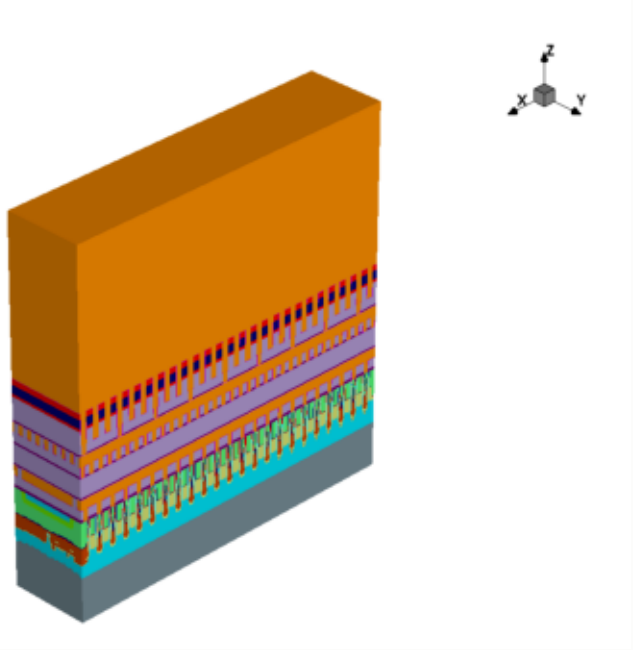

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

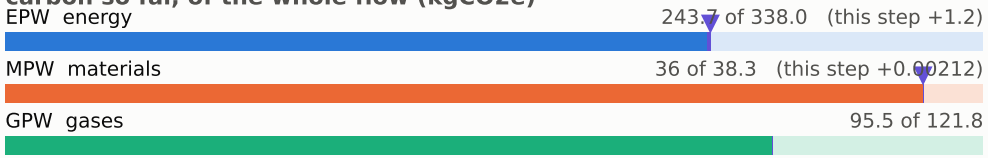

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

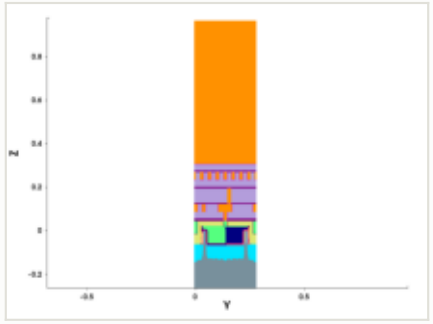

y cut at 0.211 µm

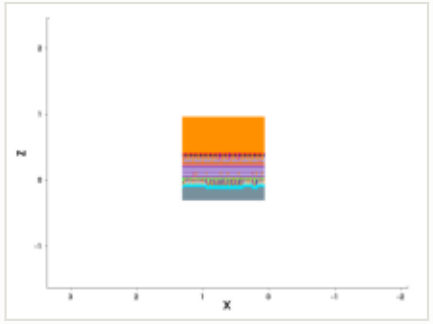

mask for this step

no mask for this step

steps by process area

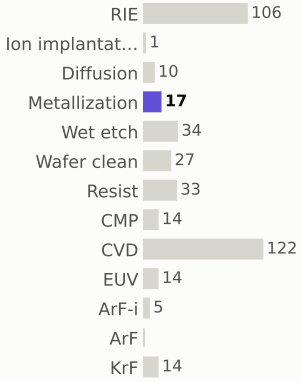

materials deposited (g)

gases emitted (g)

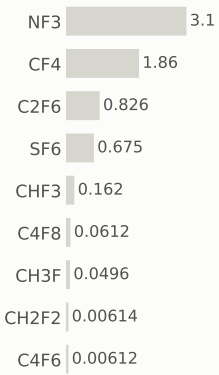

Step #4330: Diffusion

treatment · Diffusion

0.801	376.0	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



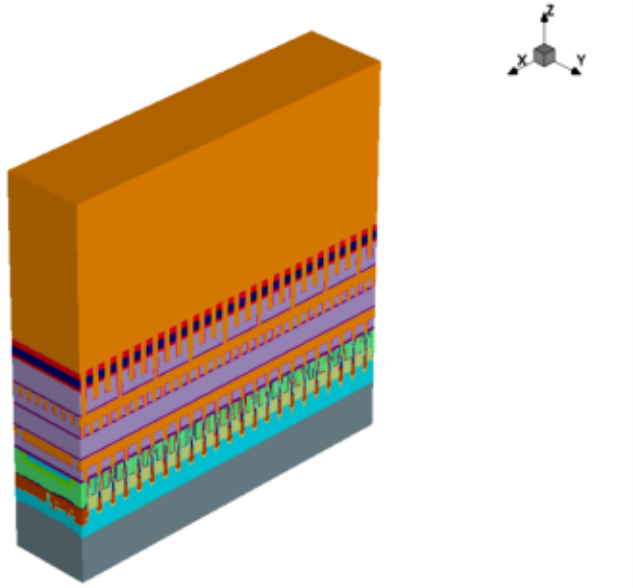

x cut at 0.677 µm

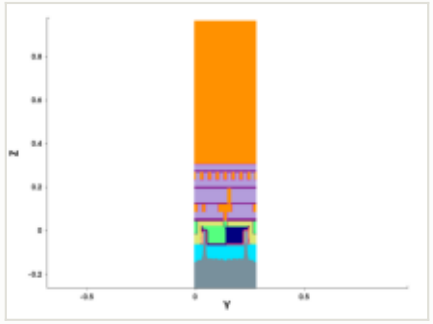

y cut at 0.211 µm

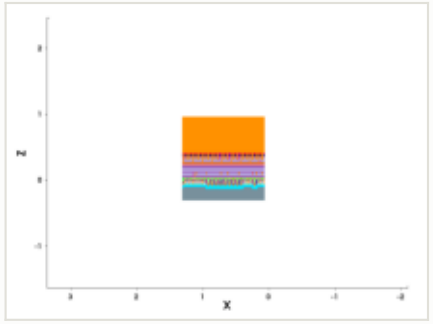

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

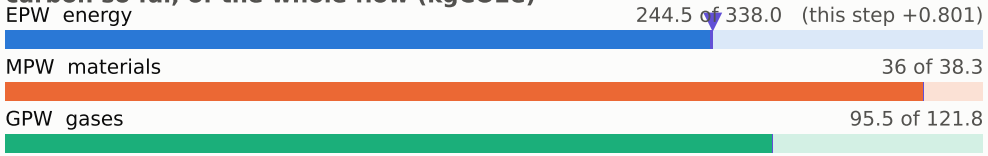

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

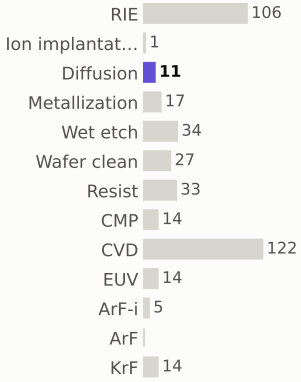

materials deposited (g)

gases emitted (g)



Step #4340: CMP

etch_cmp · CMP

0.169	376.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



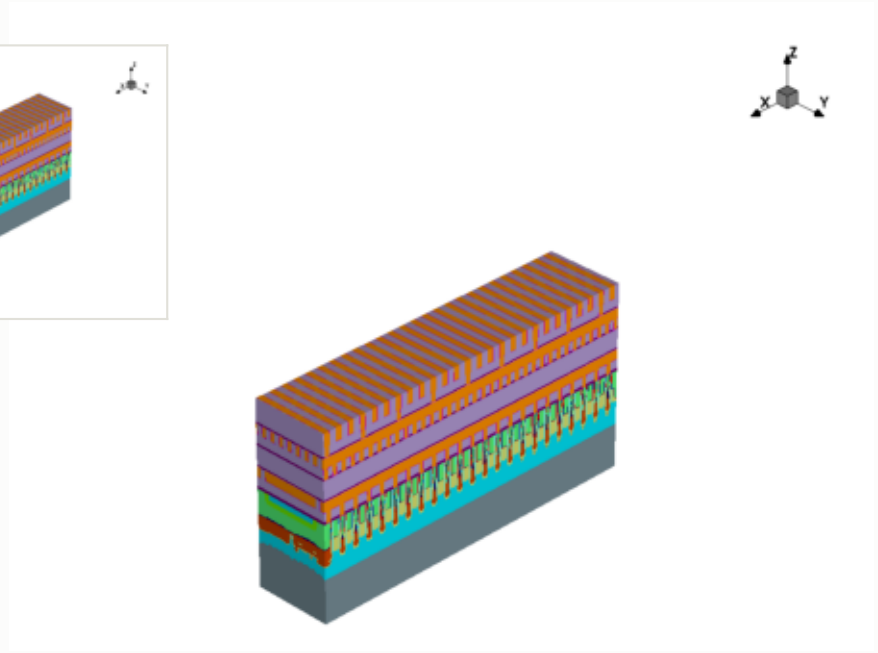

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

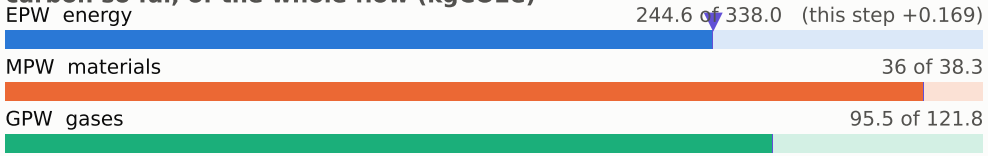

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

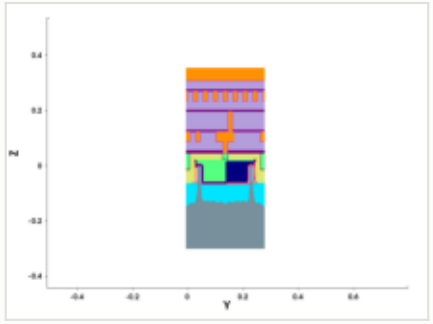

y cut at 0.211 µm

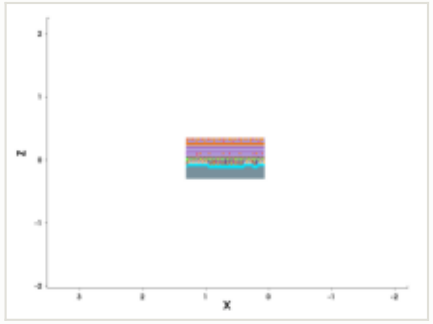

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

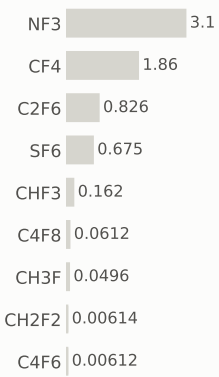

Step #4350: Metallization

depo_isotropic · Metallization

1.2	377.3	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



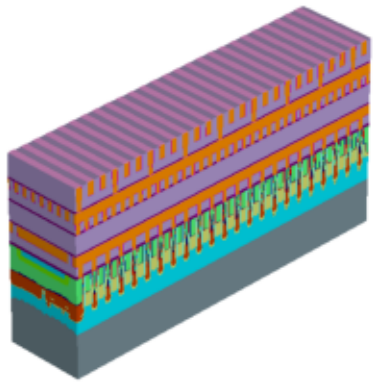

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

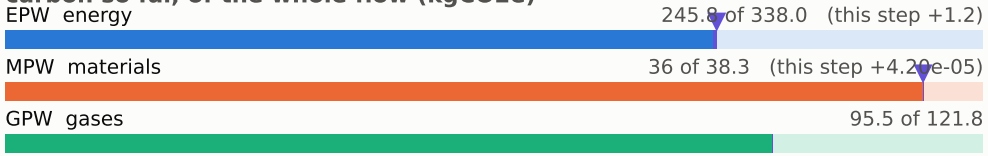

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

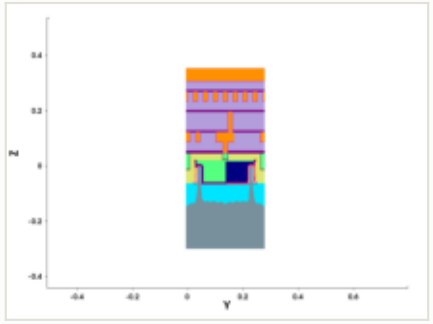

y cut at 0.211 µm

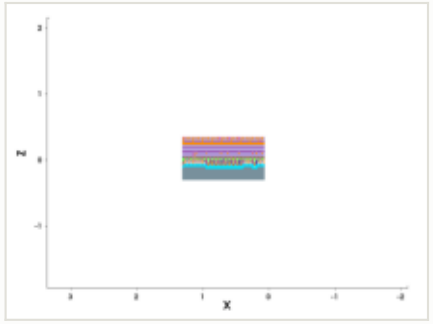

mask for this step

no mask for this step

steps by process area

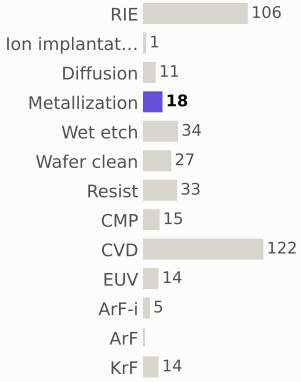

materials deposited (g)

gases emitted (g)



Step #4370: CVD

depo_fill · CVD

1.31	378.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



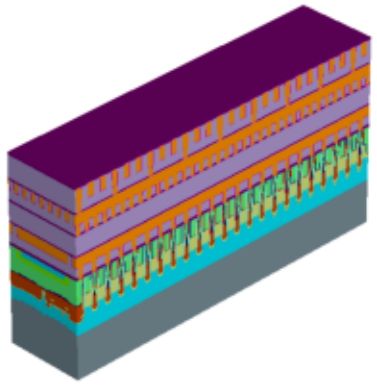

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

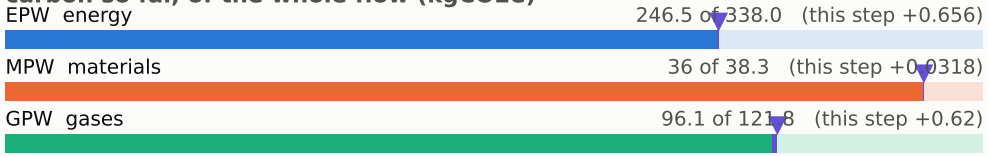

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

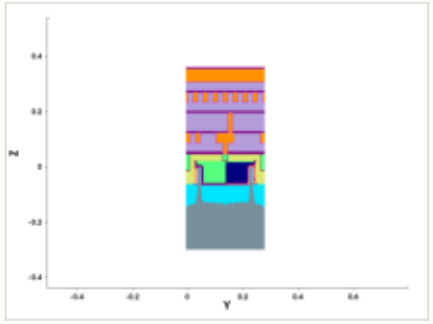

y cut at 0.211 µm

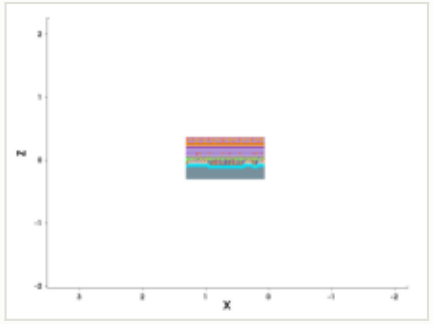

mask for this step

no mask for this step

steps by process area

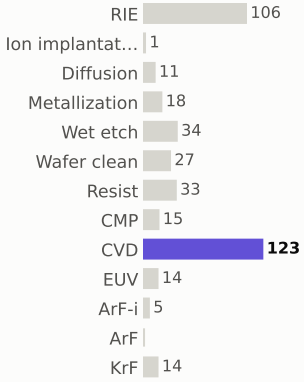

materials deposited (g)



gases emitted (g)



Step #4380: CVD

depo_fill · CVD

1.31	380.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



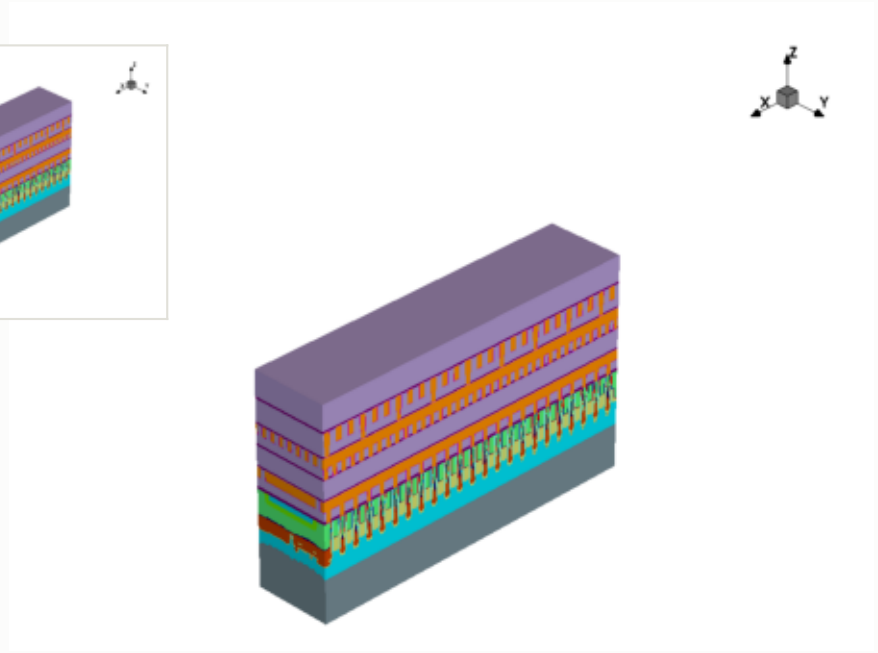

this step

process area	CVD
material	—
thickness	0.09 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

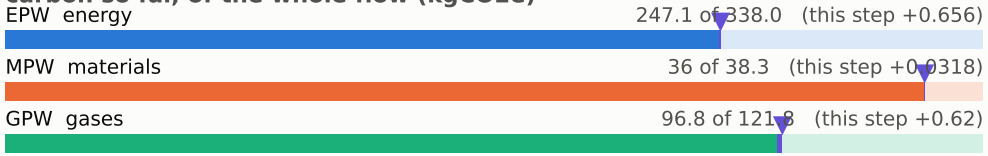

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

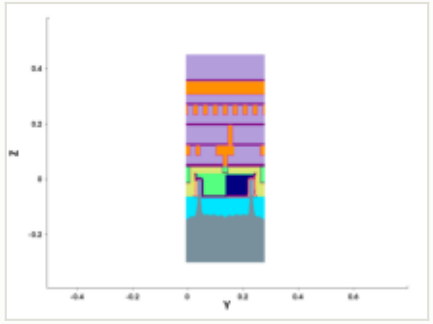

y cut at 0.211 µm

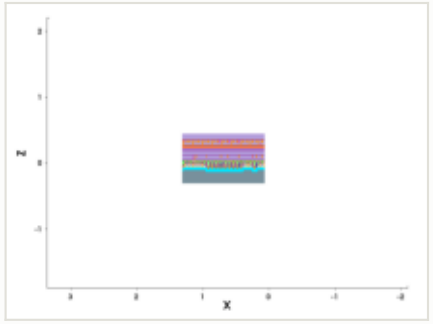

mask for this step

no mask for this step

steps by process area

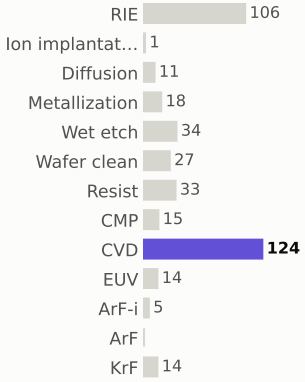

materials deposited (g)



gases emitted (g)



Step #4390: Diffusion

treatment · Diffusion

0.801	380.8	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



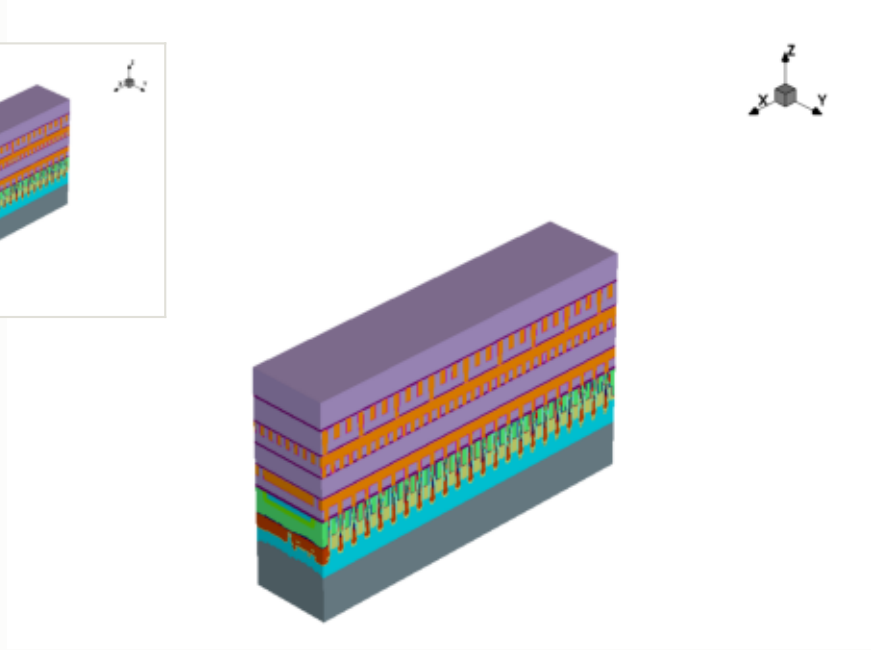

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

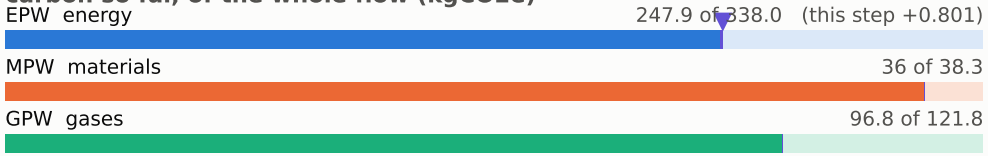

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

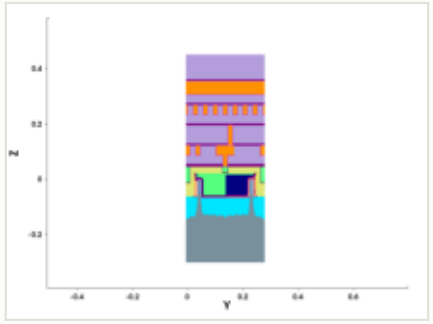

y cut at 0.211 µm

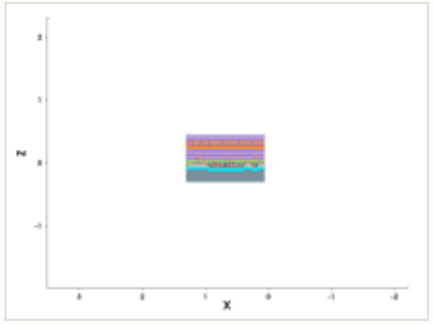

mask for this step

no mask for this step

steps by process area

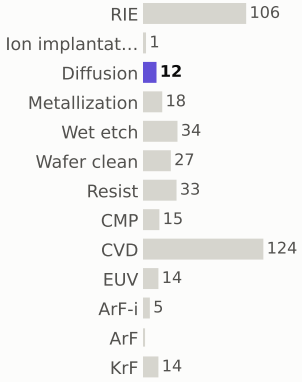

materials deposited (g)

gases emitted (g)



Step #4400: Wafer_clean

clean · Wafer_clean

0.169	380.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



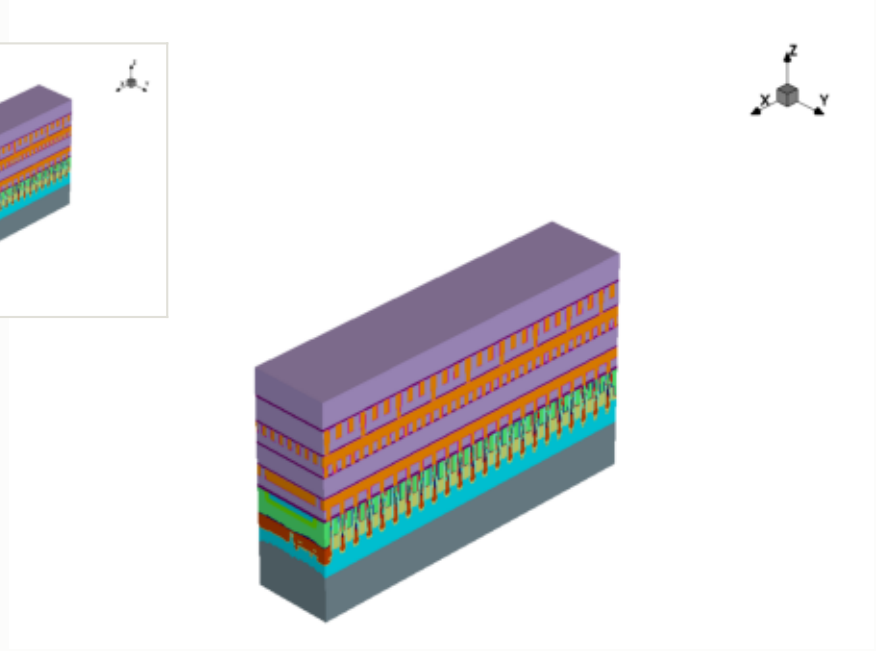

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

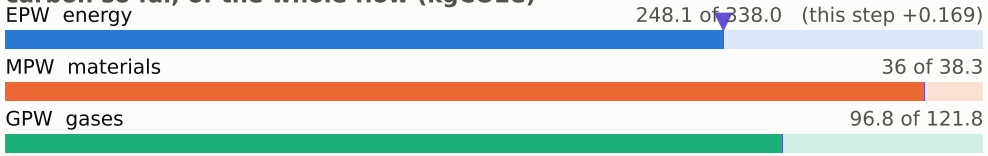

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

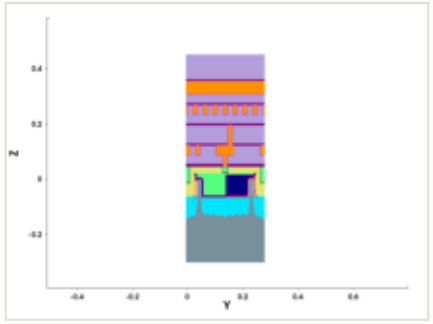

y cut at 0.211 µm

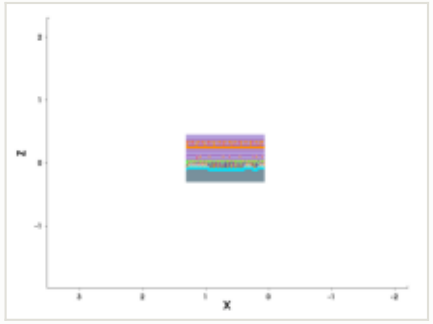

mask for this step

no mask for this step

steps by process area

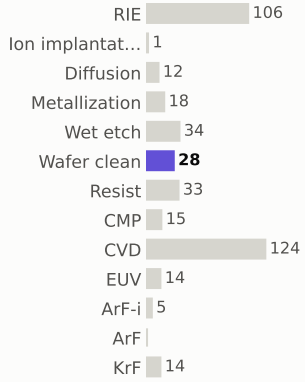

materials deposited (g)

gases emitted (g)



Step #4410: CVD

depo_fill · CVD

1.31	382.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



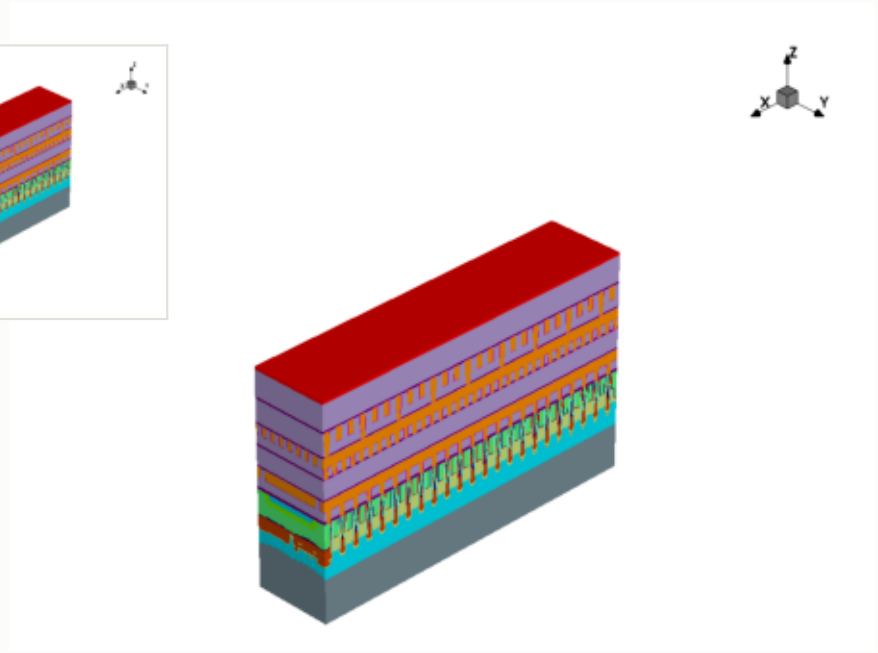

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

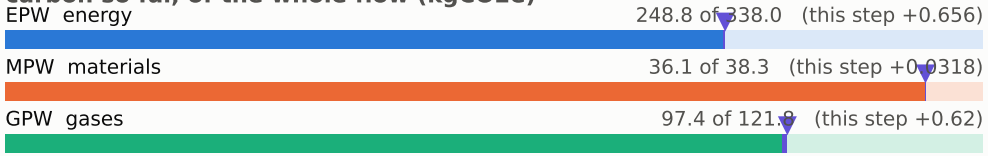

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

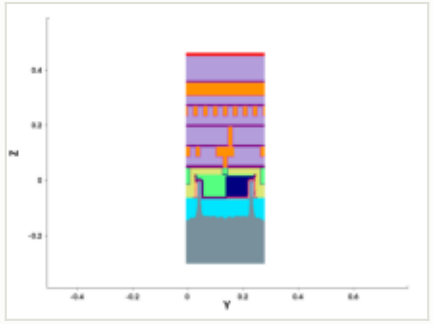

y cut at 0.211 µm

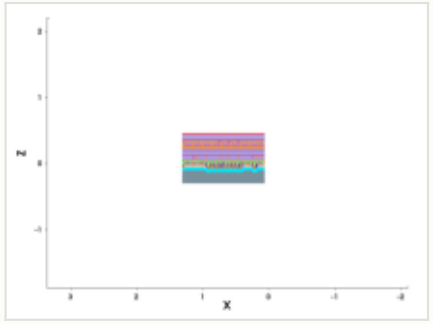

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #4420: Resist

depo_fill · Resist

0.169	382.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



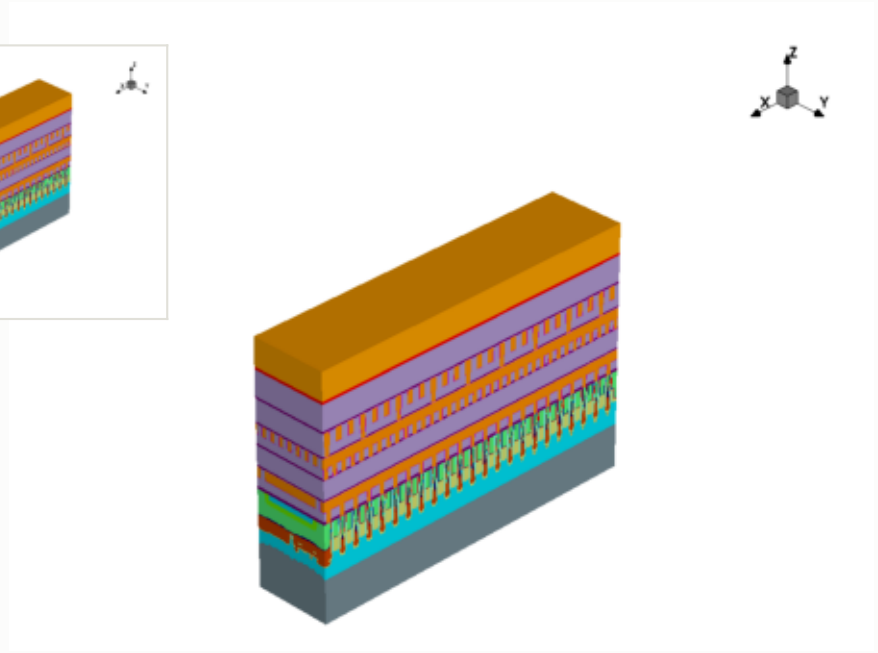

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

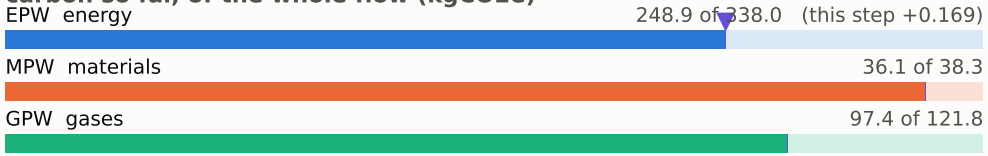

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

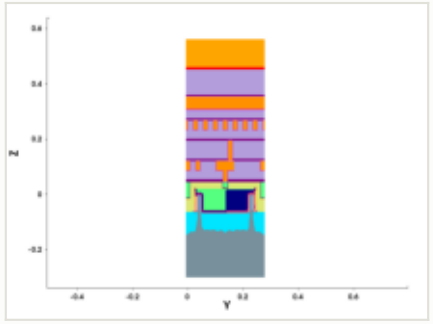

y cut at 0.211 µm

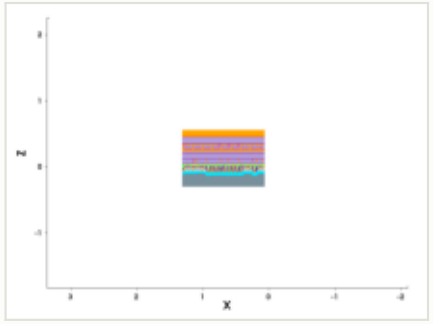

mask for this step

no mask for this step

steps by process area

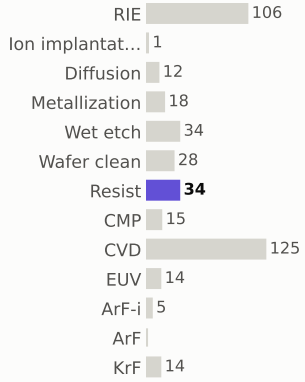

materials deposited (g)

gases emitted (g)



Step #4430: CVD

depo_fill · CVD

1.31	383.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



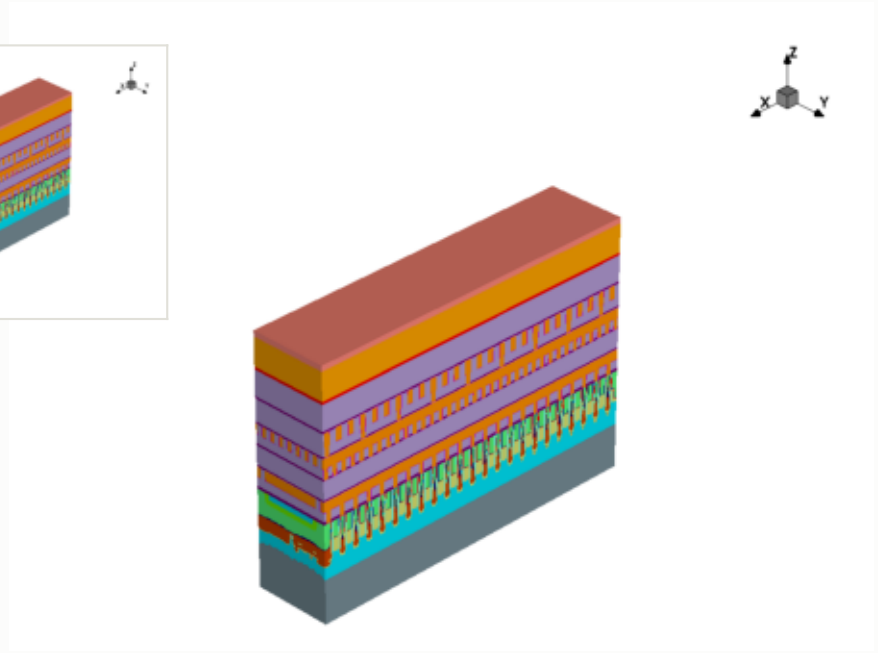

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

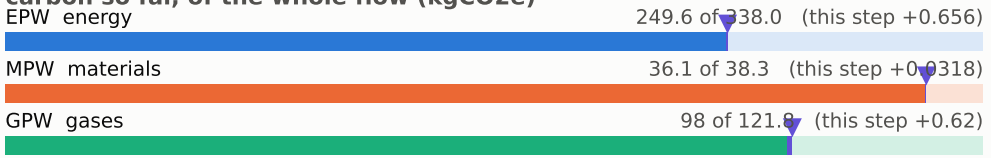

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

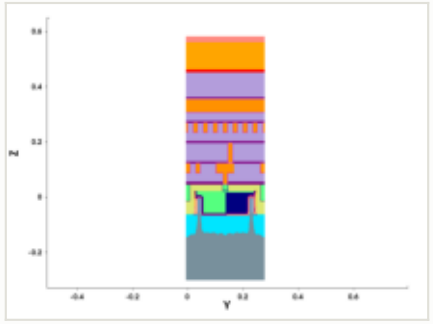

y cut at 0.211 µm

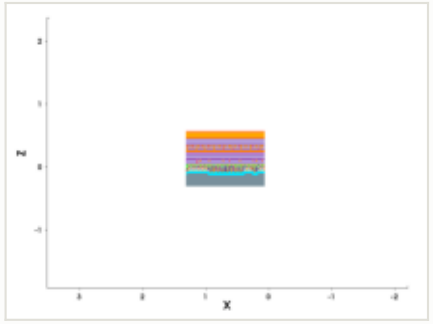

mask for this step

no mask for this step

steps by process area

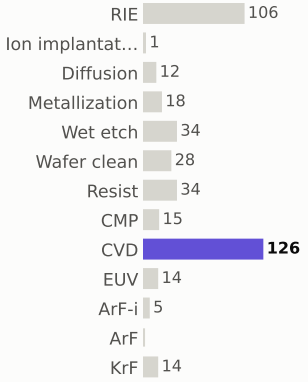

materials deposited (g)



gases emitted (g)



Step #4440: Wafer_clean

clean · Wafer_clean

0.169	383.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



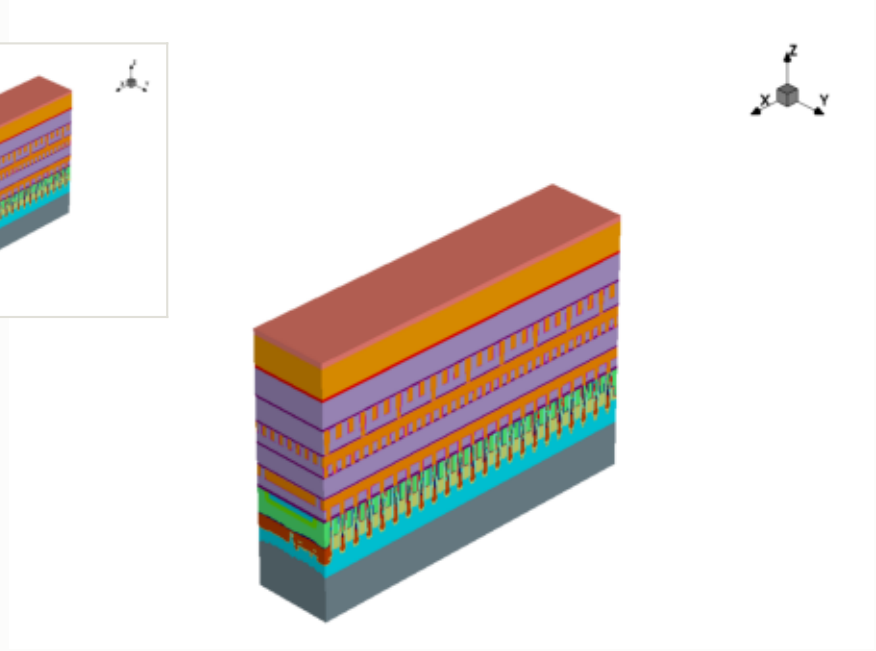

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

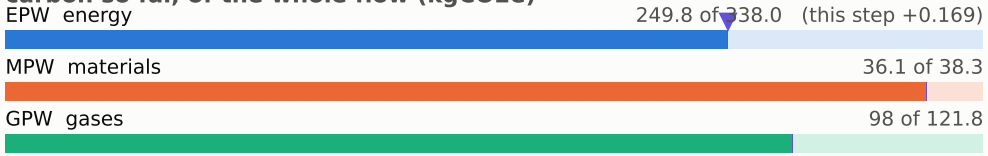

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

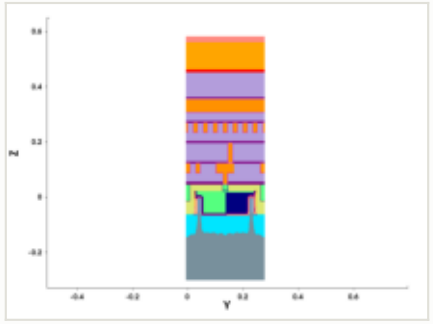

y cut at 0.211 µm

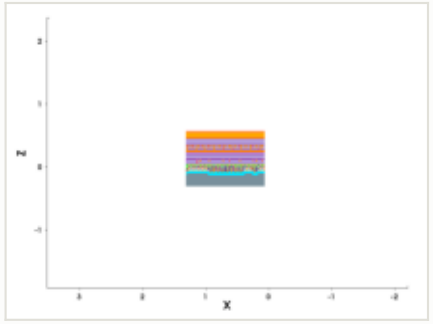

mask for this step

no mask for this step

steps by process area

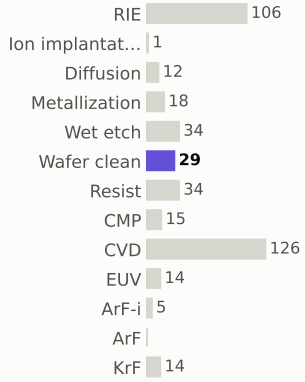

materials deposited (g)

gases emitted (g)



Step #4450: ArF-i

litho_patterning · ArF-i

0.217	384.1	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



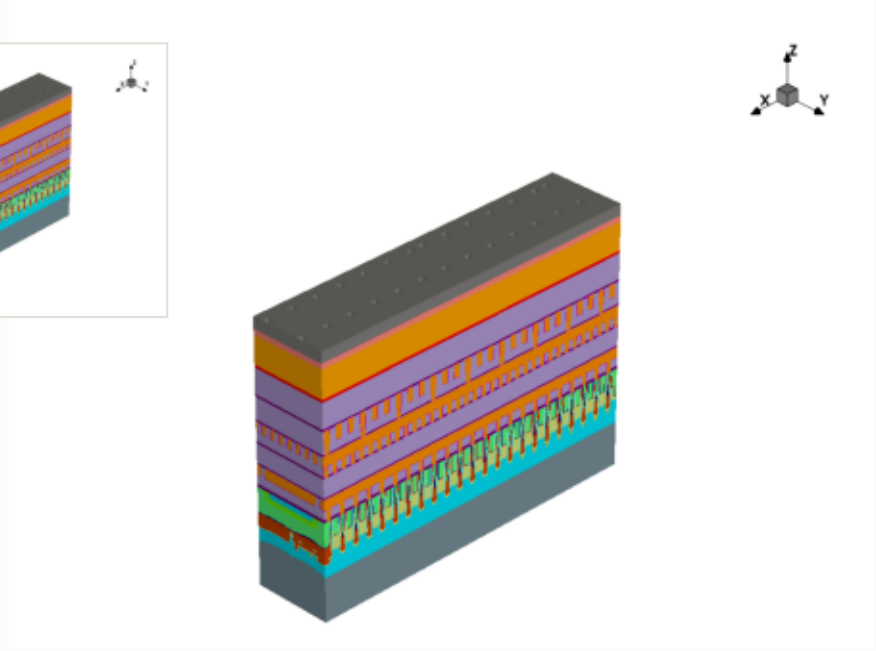

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

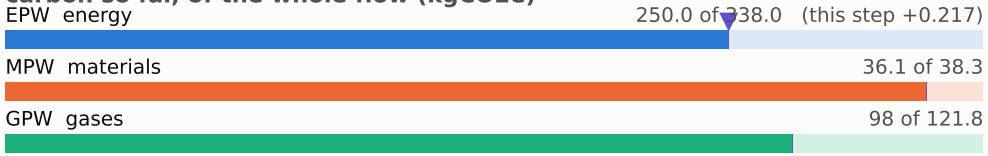

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

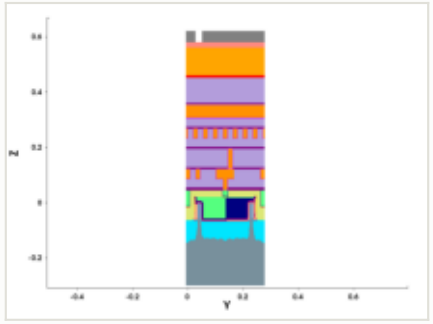

y cut at 0.211 µm

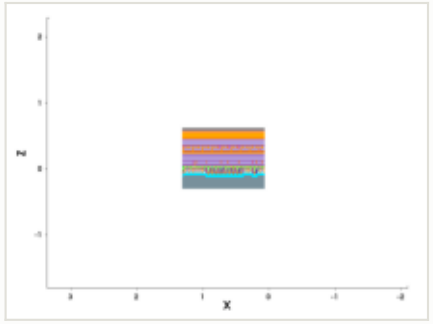

mask: layer 10451:0 (GDSII)

steps by process area

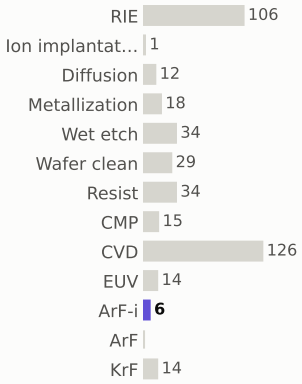

materials deposited (g)

gases emitted (g)

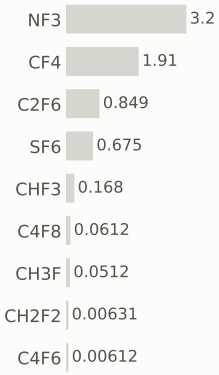

Step #4460: RIE

etch_anisotropic · RIE

1.04	385.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



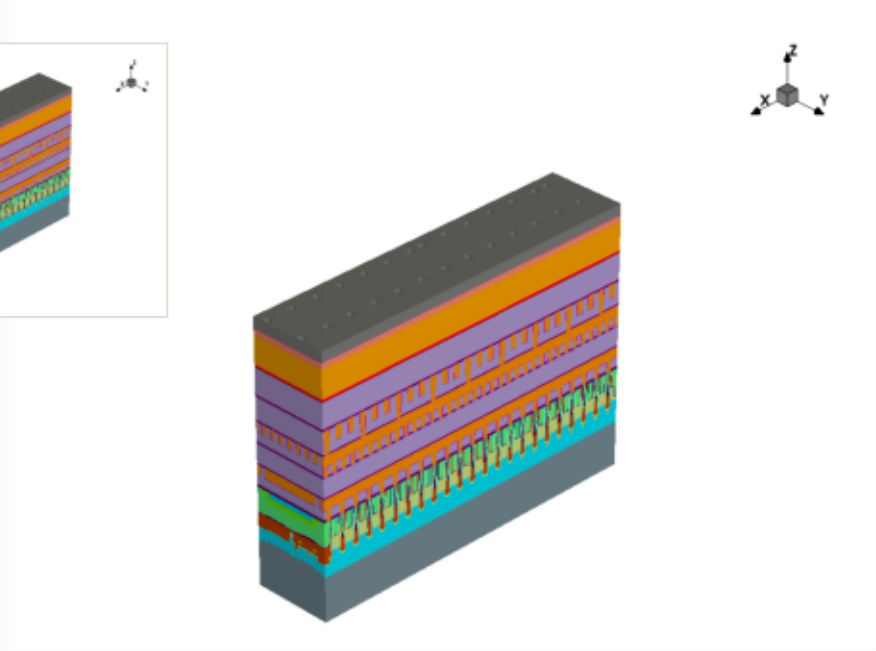

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

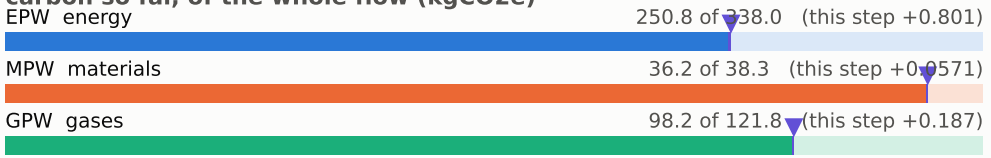

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

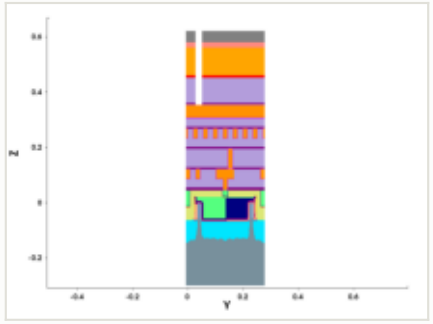

y cut at 0.211 µm

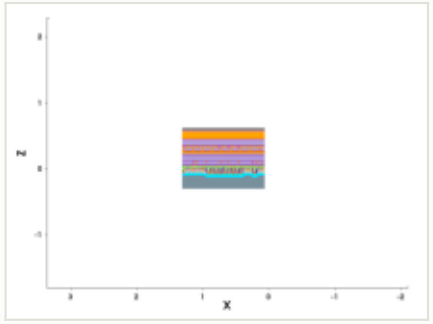

mask for this step

no mask for this step

steps by process area

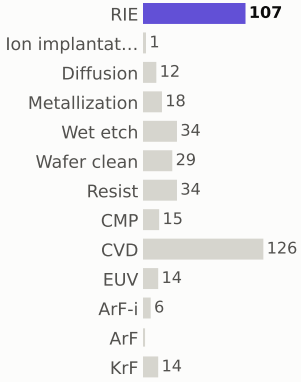

materials deposited (g)

gases emitted (g)

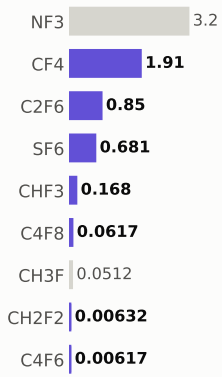

Step #4470: Wafer_clean

etch_strip · Wafer_clean

0.169	385.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



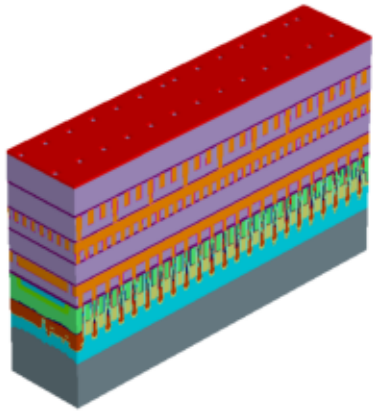

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

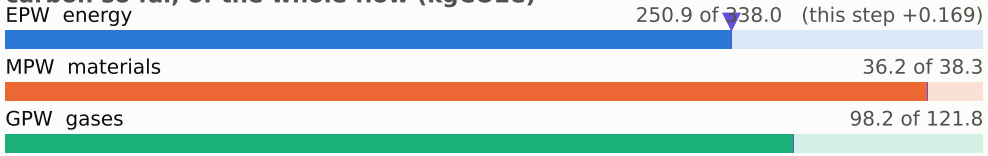

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

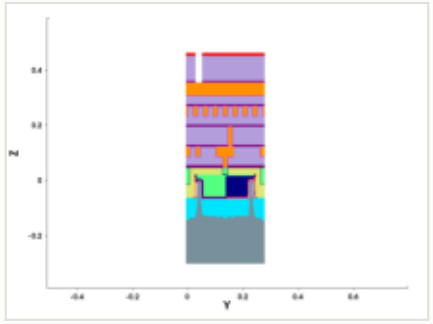

y cut at 0.211 µm

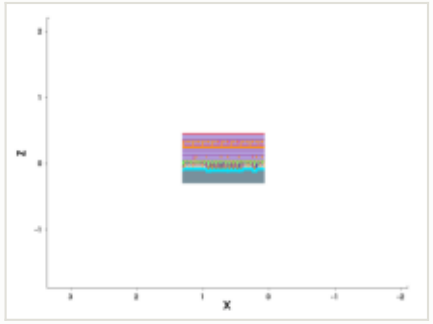

mask for this step

no mask for this step

steps by process area

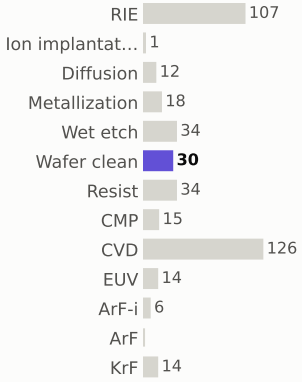

materials deposited (g)

gases emitted (g)



Step #4480: Resist

depo_fill · Resist

0.169	385.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



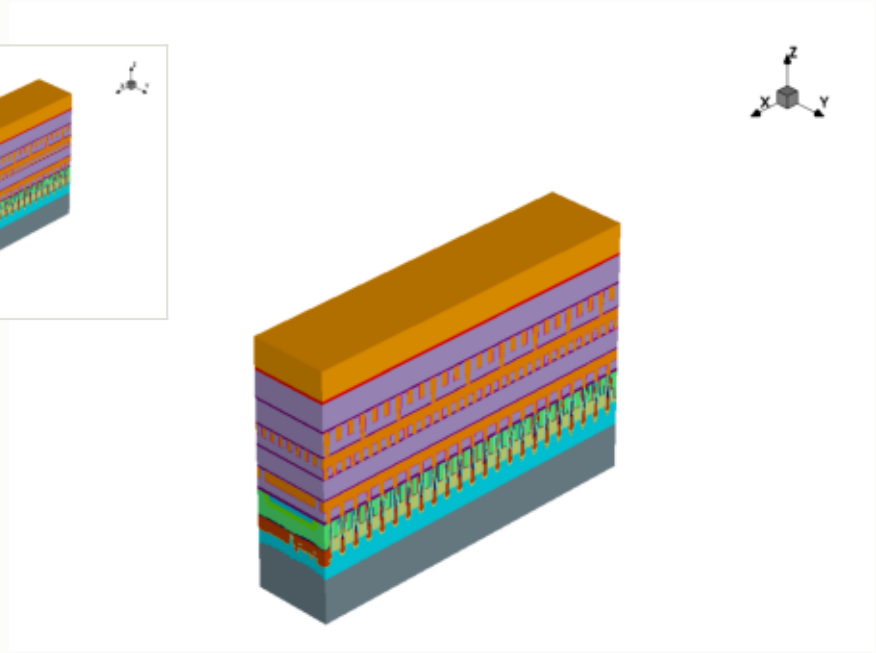

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

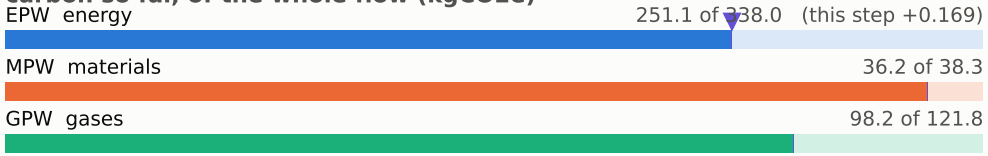

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

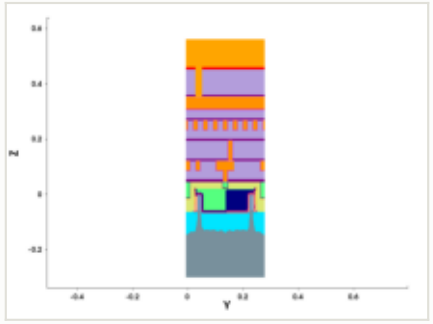

y cut at 0.211 µm

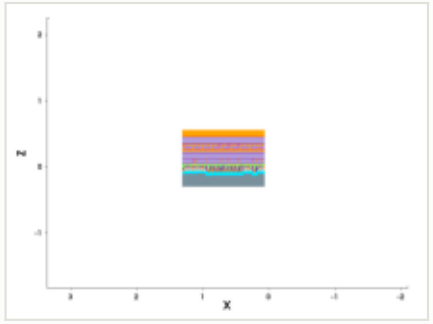

mask for this step

no mask for this step

steps by process area

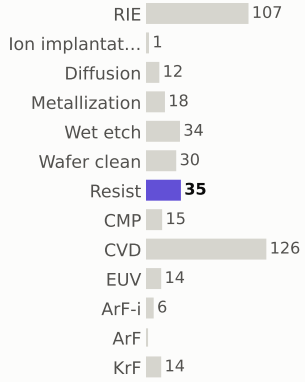

materials deposited (g)

gases emitted (g)

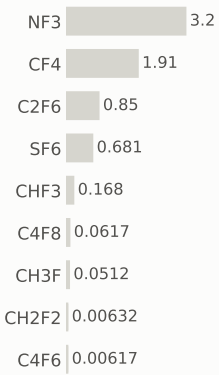

Step #4490: CVD

depo_fill · CVD

1.31	386.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



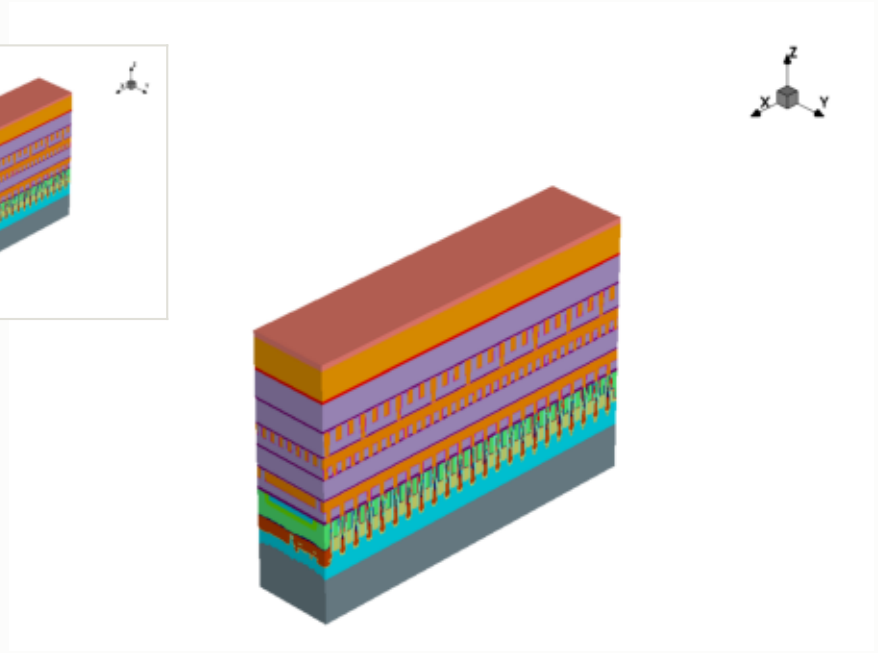

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

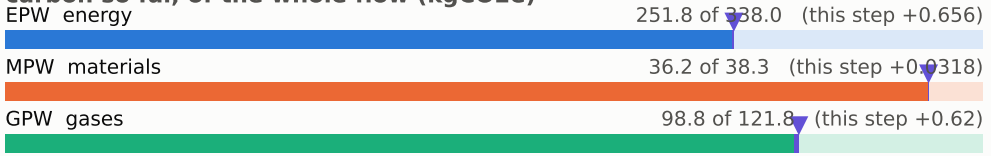

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

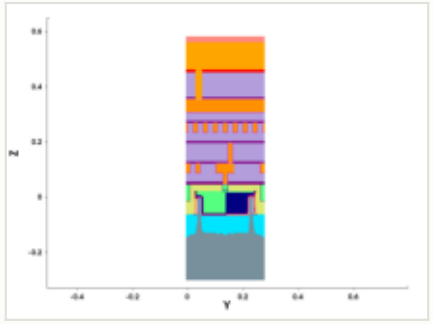

y cut at 0.211 µm

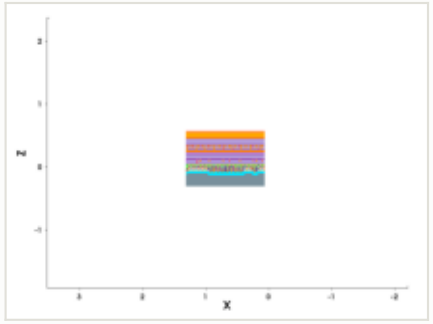

mask for this step

no mask for this step

steps by process area

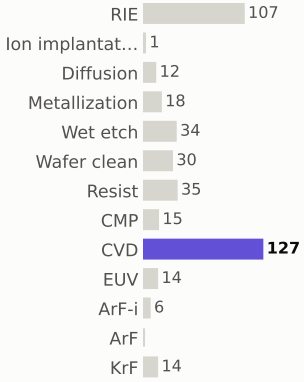

materials deposited (g)



gases emitted (g)



Step #4500: Wafer_clean

clean · Wafer_clean

0.169	387.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



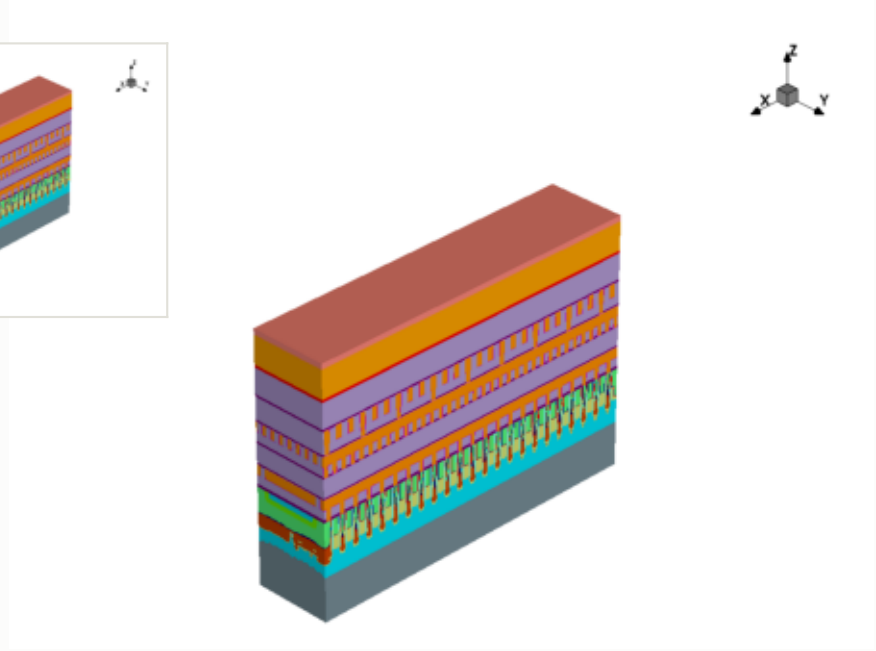

x cut at 0.677 µm

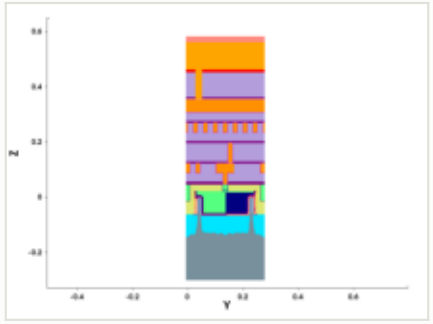

y cut at 0.211 µm

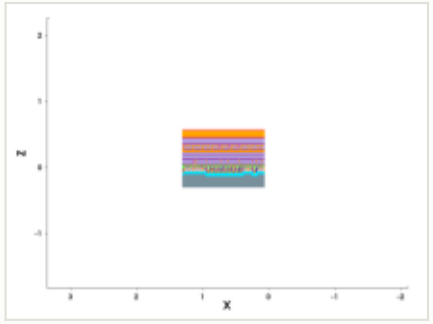

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

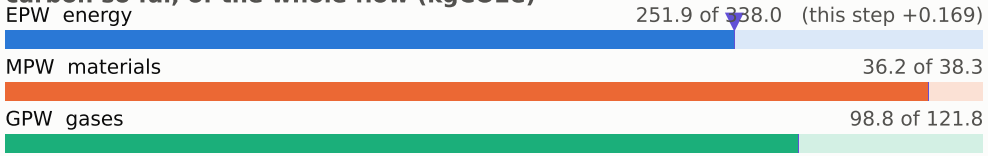

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

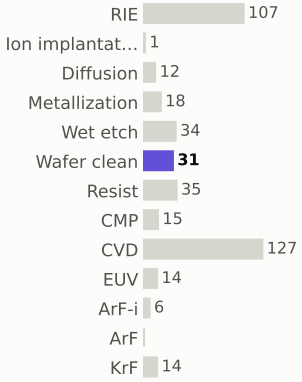

materials deposited (g)



gases emitted (g)



Step #4510: ArF-i

litho_patterning · ArF-i

0.217	387.2	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



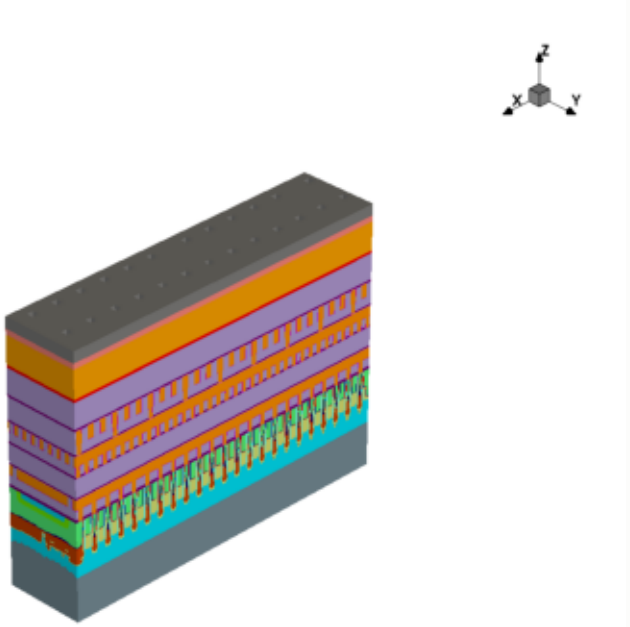

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

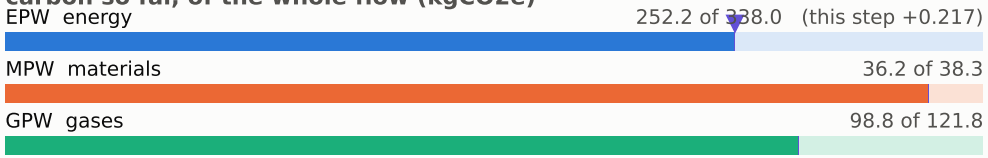

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

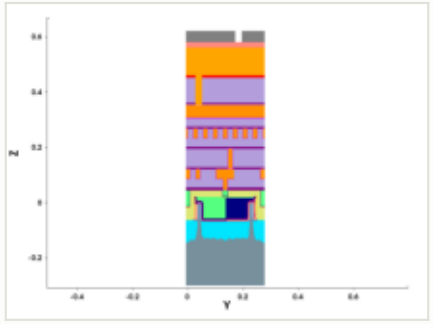

y cut at 0.211 µm

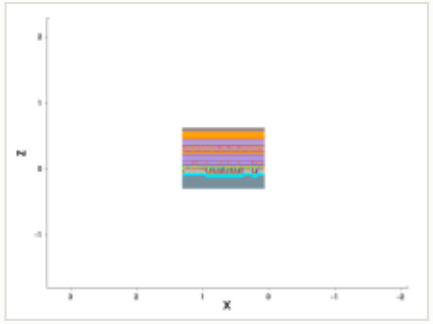

mask: layer 10452:0 (GDSII)

steps by process area

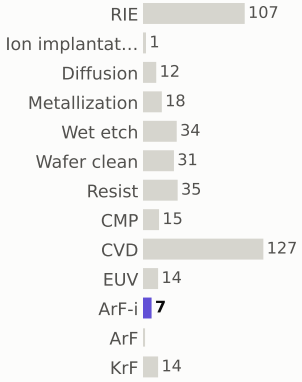

materials deposited (g)



gases emitted (g)



Step #4520: RIE

etch_anisotropic · RIE

1.04	388.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



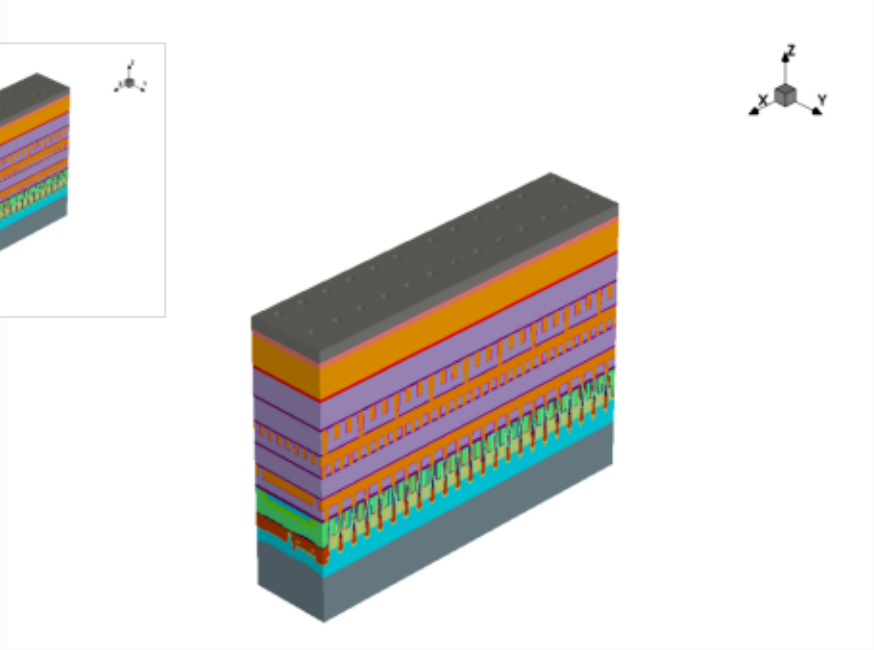

x cut at 0.677 µm

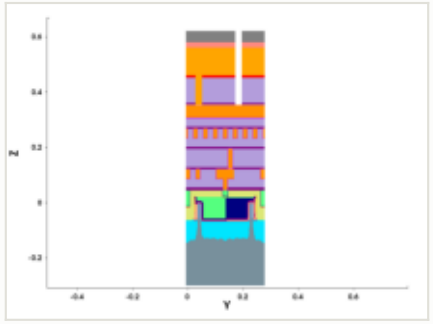

y cut at 0.211 µm

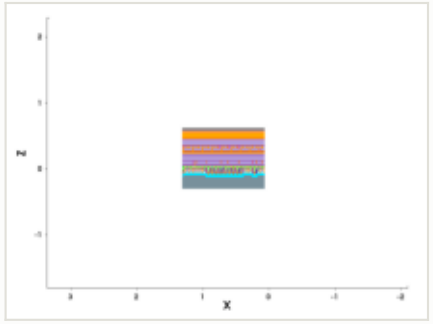

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

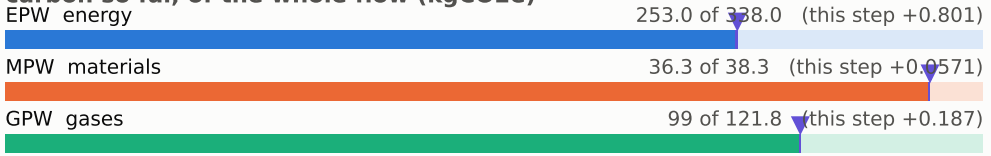

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

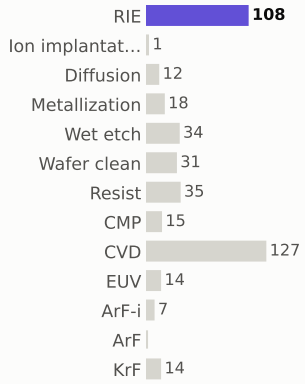

materials deposited (g)

gases emitted (g)



Step #4530: Wafer_clean

etch_strip · Wafer_clean

0.169	388.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



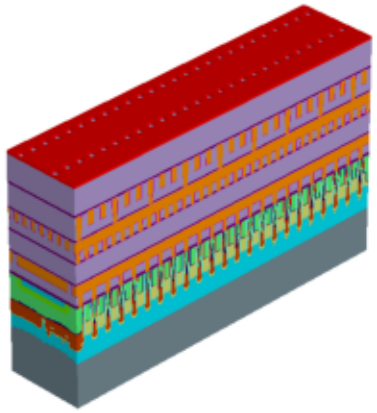

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

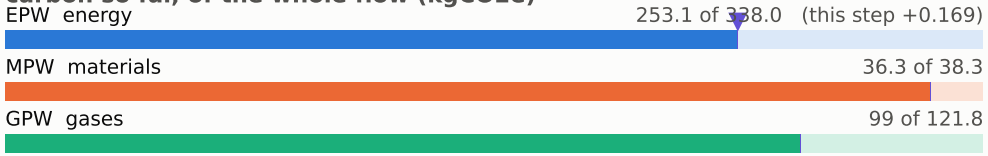

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

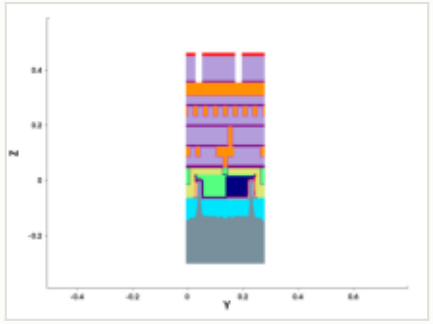

y cut at 0.211 µm

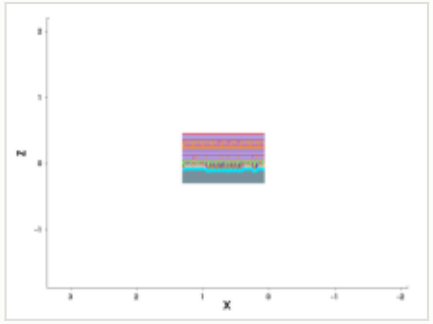

mask for this step

no mask for this step

steps by process area

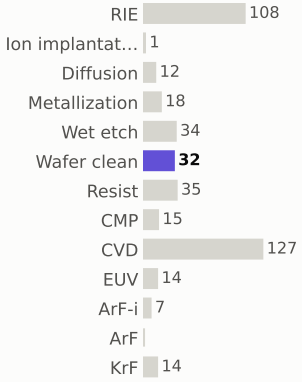

materials deposited (g)

gases emitted (g)



Step #4540: Metallization

depo_ellipsoidal · Metallization

1.2	389.6	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



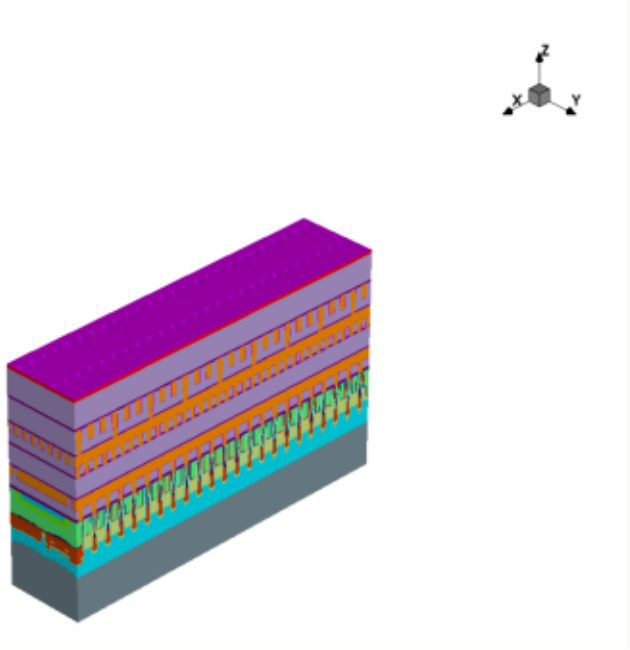

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

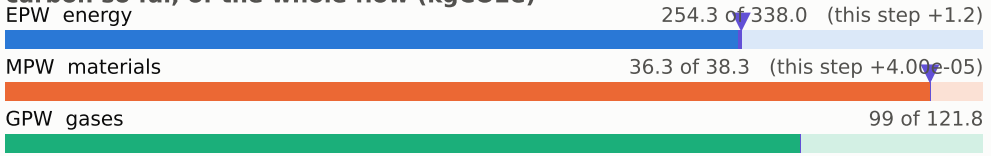

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

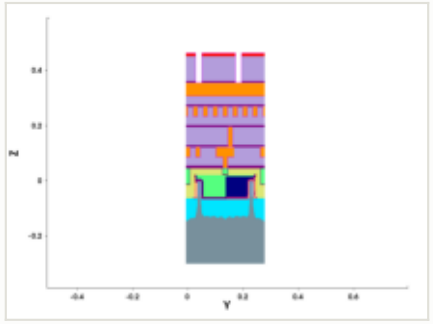

y cut at 0.211 µm

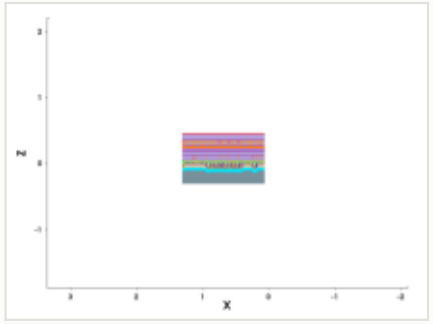

mask for this step

no mask for this step

steps by process area

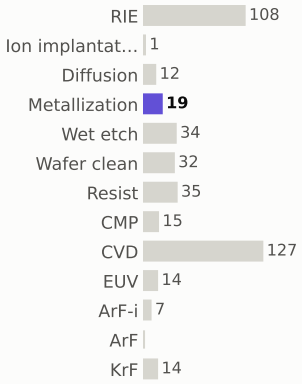

materials deposited (g)

gases emitted (g)

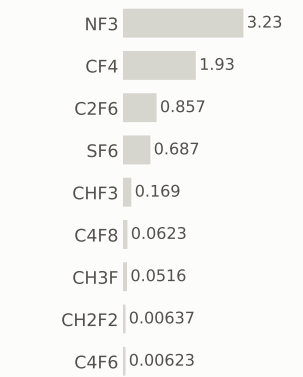

Step #4550: Metallization

depo_fill · Metallization

1.21	390.8	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



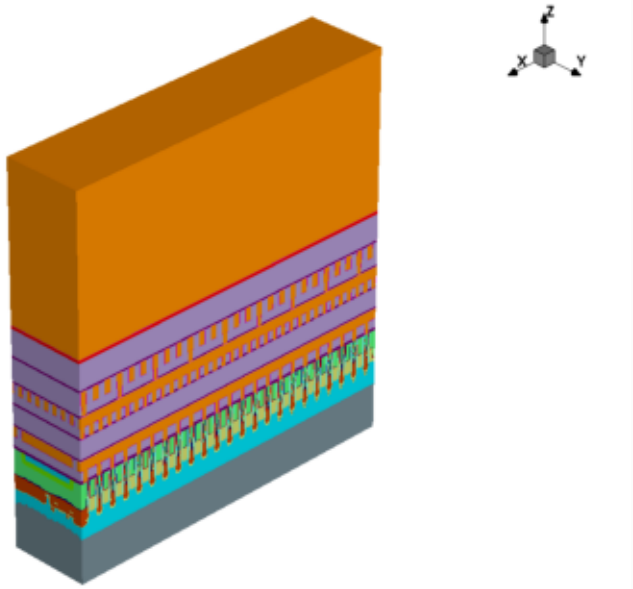

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

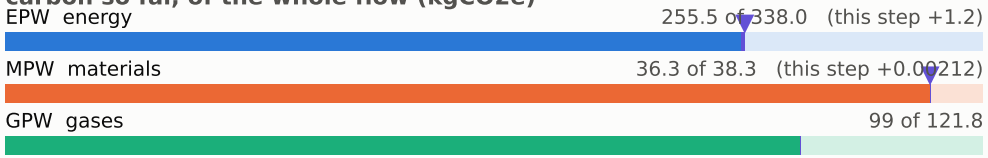

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

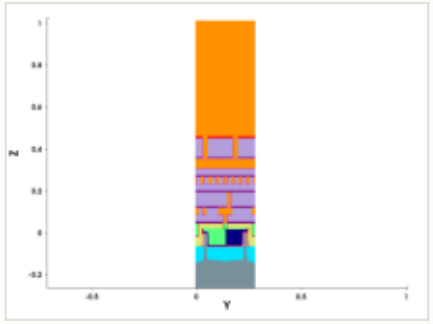

y cut at 0.211 µm

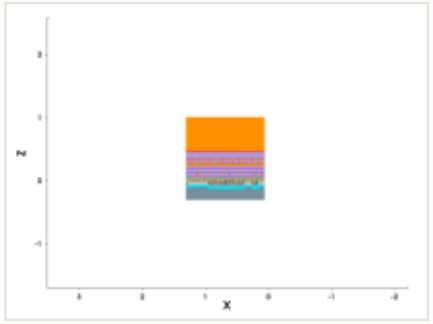

mask for this step

no mask for this step

steps by process area

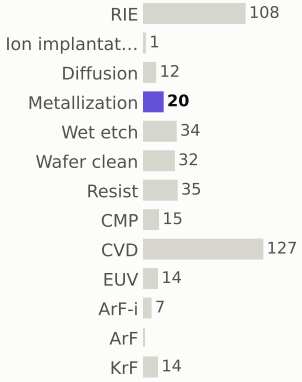

materials deposited (g)

gases emitted (g)



Step #4560: Diffusion

treatment · Diffusion

0.801	391.6	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



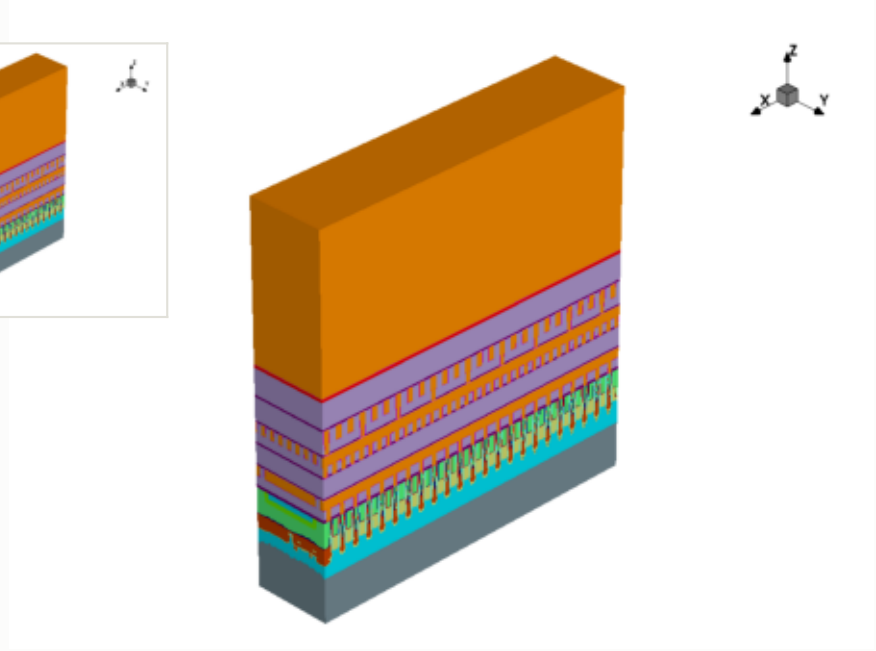

x cut at 0.677 µm

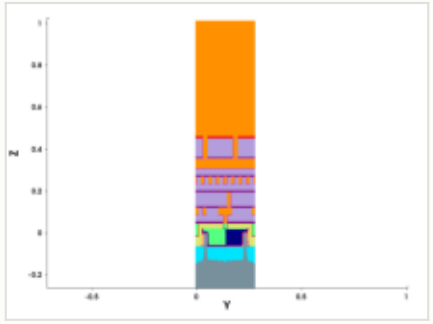

y cut at 0.211 µm

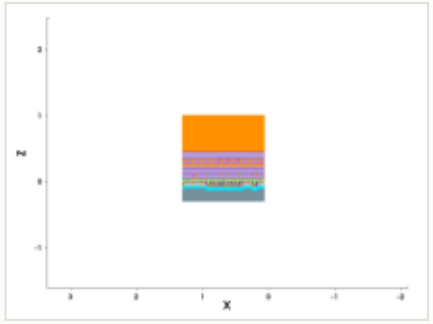

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

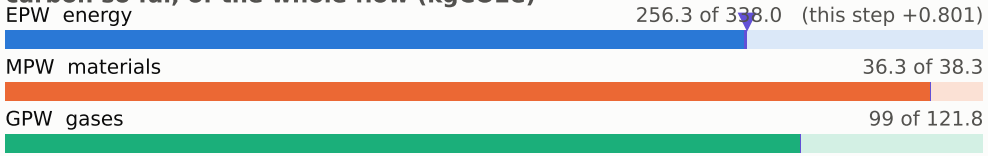

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

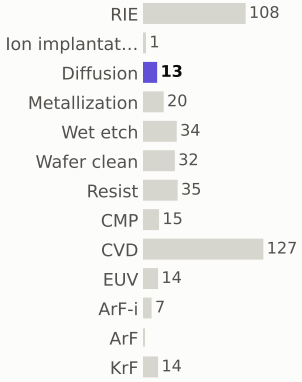

materials deposited (g)



gases emitted (g)



Step #4570: CMP

etch_cmp · CMP

0.169	391.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



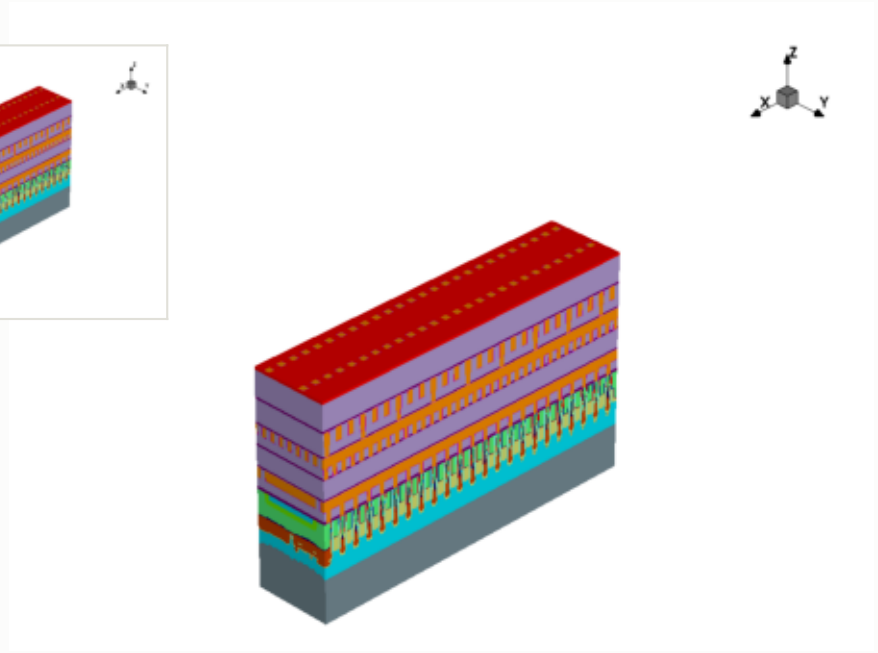

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

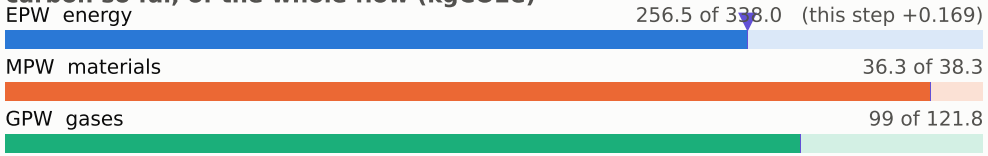

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

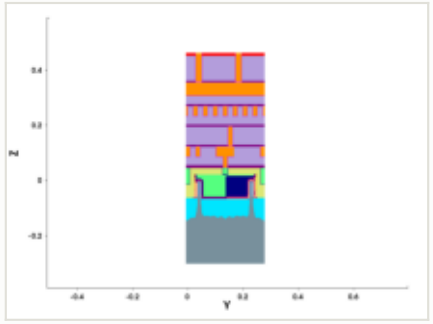

y cut at 0.211 µm

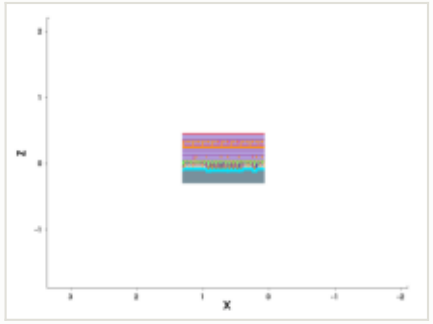

mask for this step

no mask for this step

steps by process area

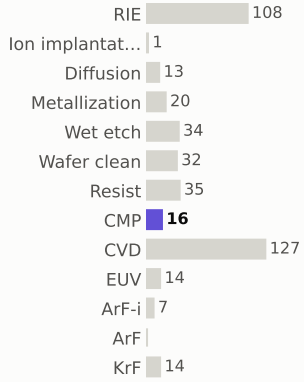

materials deposited (g)



gases emitted (g)



Step #4580: CVD

depo_fill · CVD

1.31	393.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



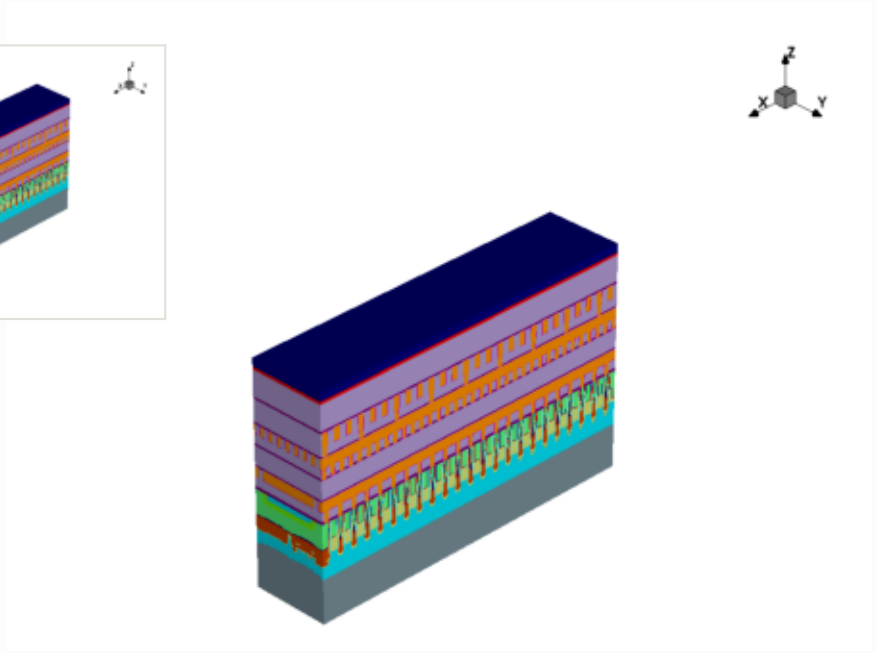

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

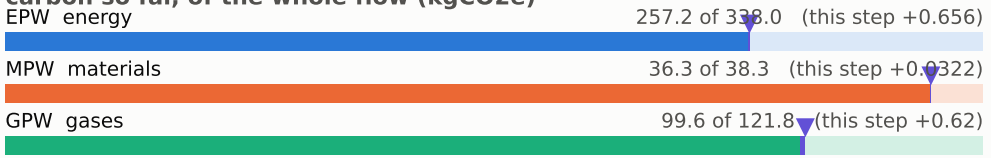

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

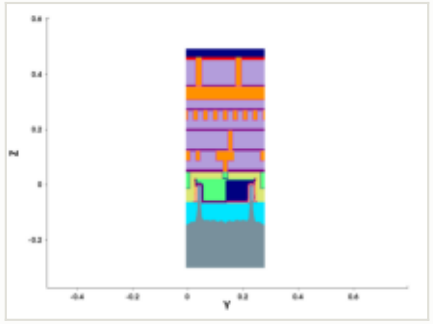

y cut at 0.211 µm

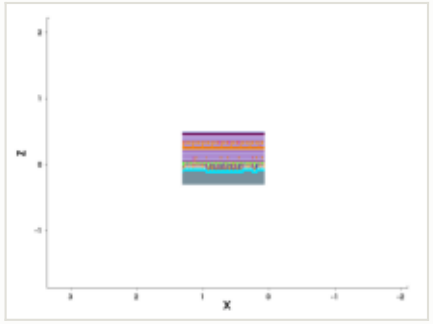

mask for this step

no mask for this step

steps by process area

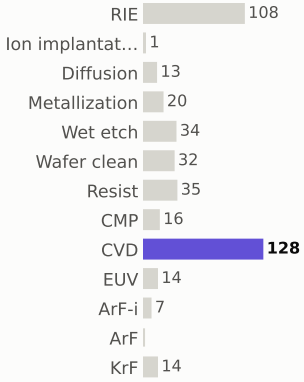

materials deposited (g)



gases emitted (g)



Step #4590: Wafer_clean

clean · Wafer_clean

0.169	393.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



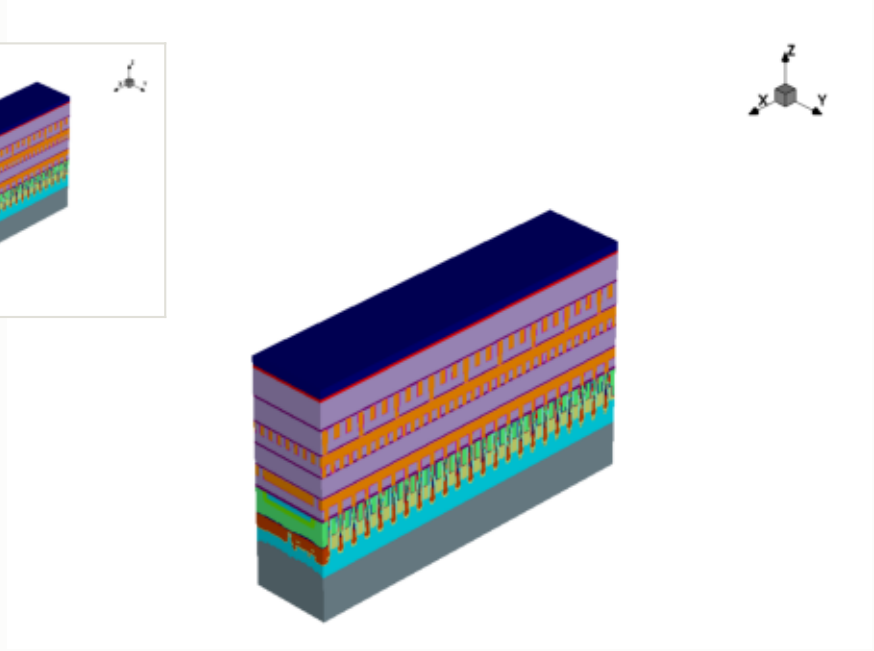

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

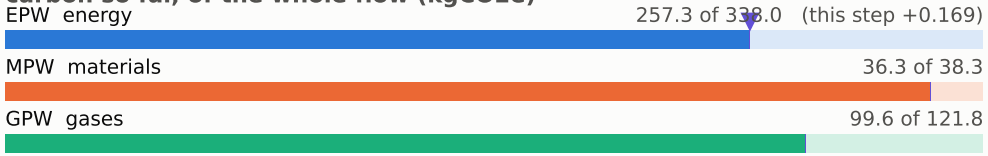

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

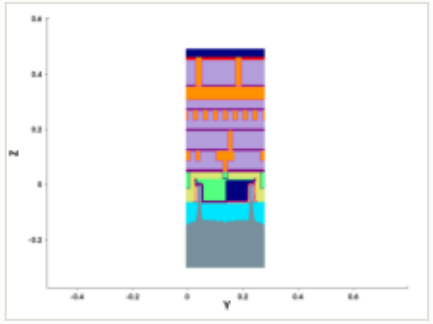

y cut at 0.211 µm

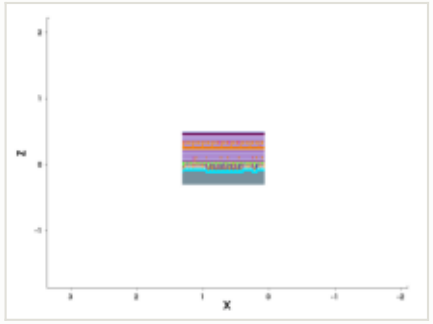

mask for this step

no mask for this step

steps by process area



materials deposited (g)

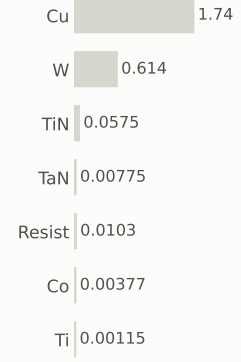

gases emitted (g)



Step #4600: CVD

depo_fill · CVD

1.31	394.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



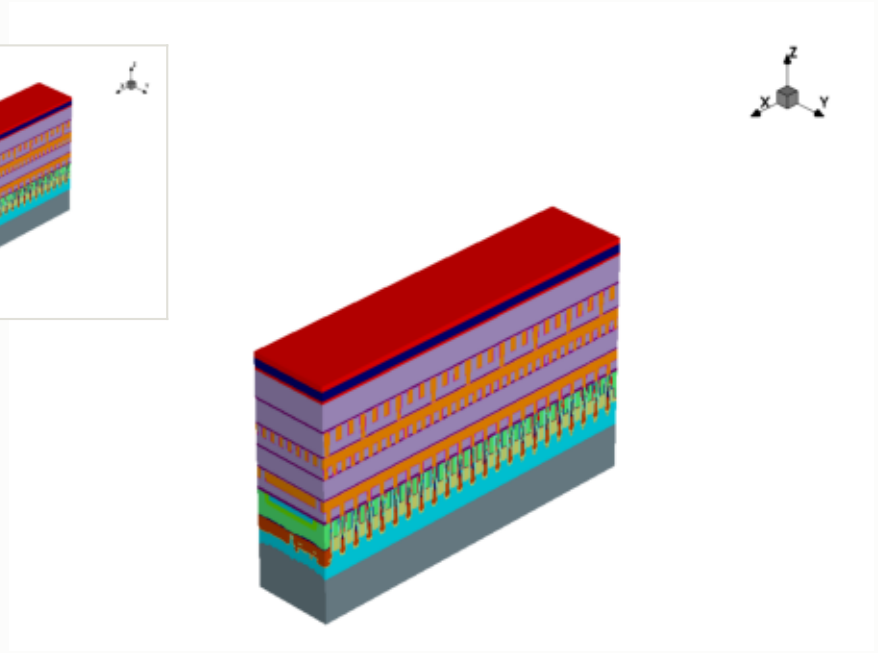

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

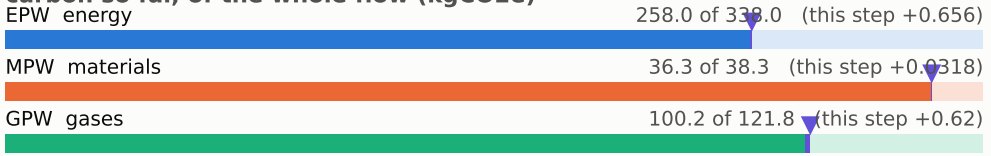

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

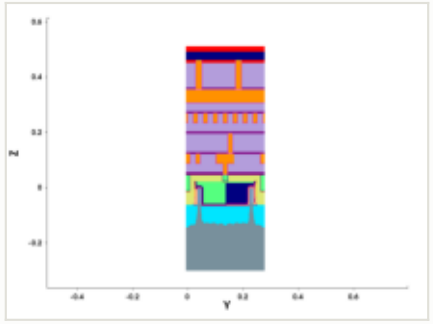

y cut at 0.211 µm

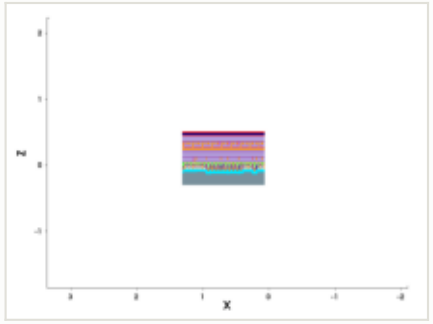

mask for this step

no mask for this step

steps by process area

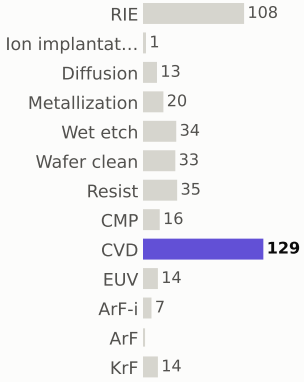

materials deposited (g)



gases emitted (g)



Step #4610: CVD

depo_fill · CVD

1.31	395.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



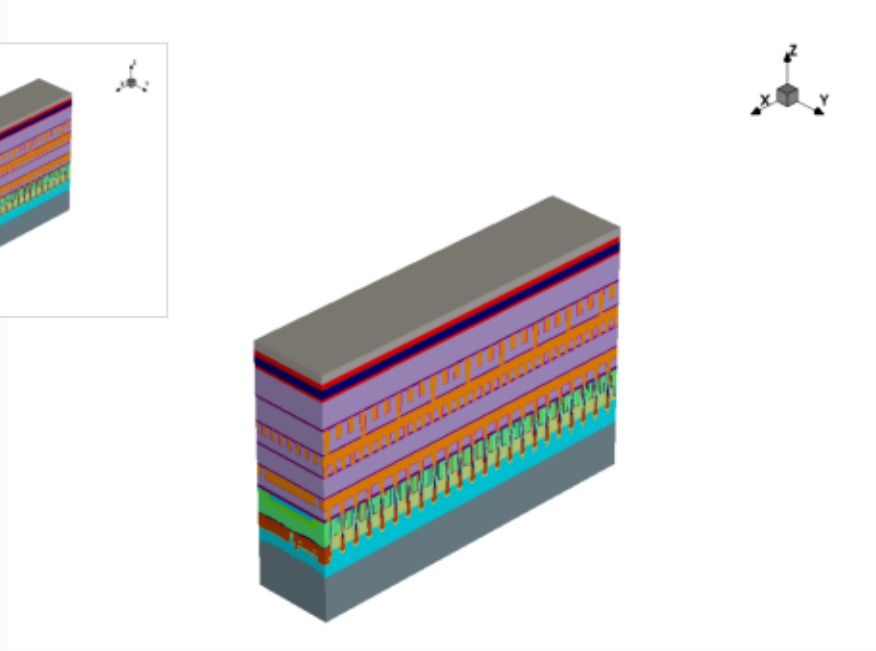

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

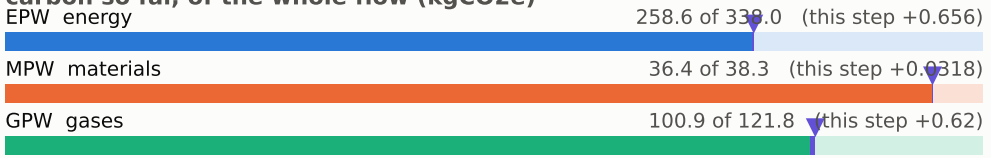

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

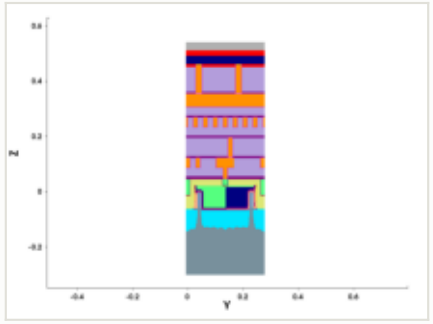

y cut at 0.211 µm

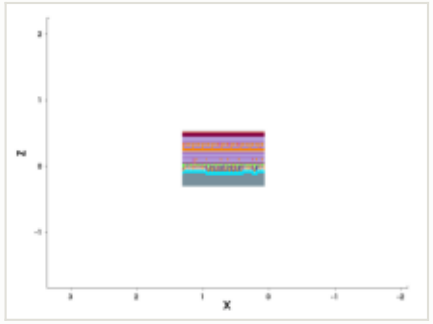

mask for this step

no mask for this step

steps by process area

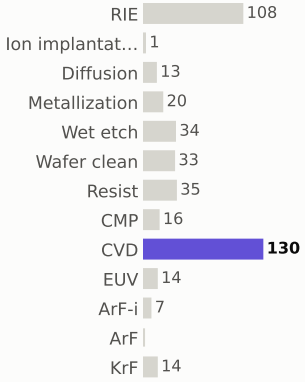

materials deposited (g)



gases emitted (g)



Step #4620: Resist

depo_fill · Resist

0.169	396.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



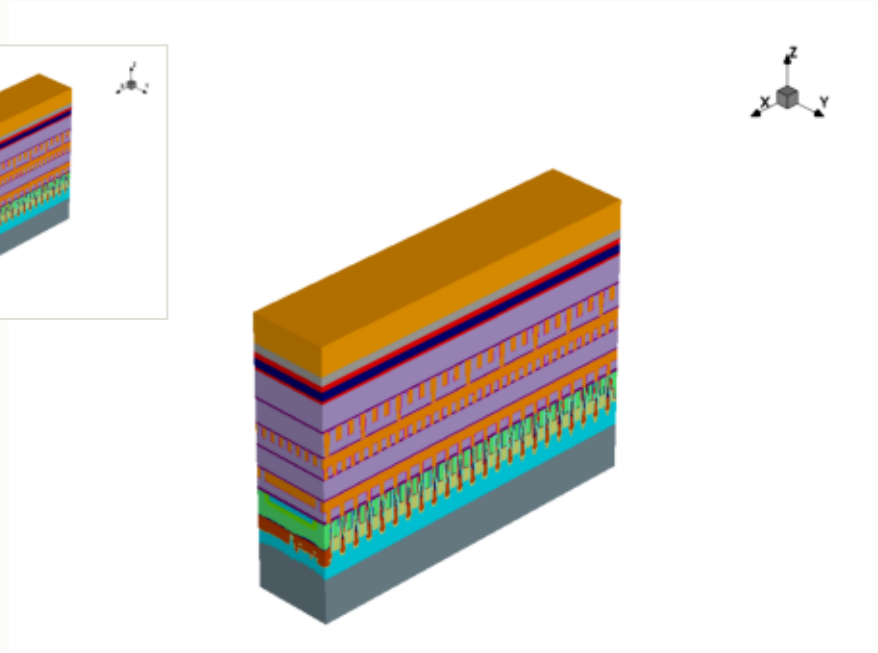

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

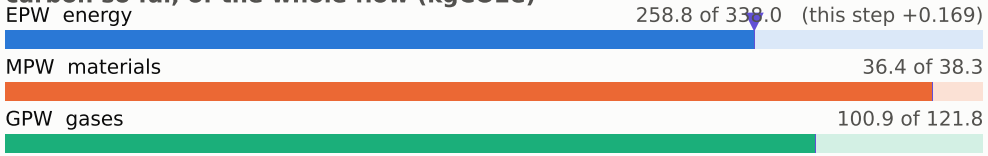

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

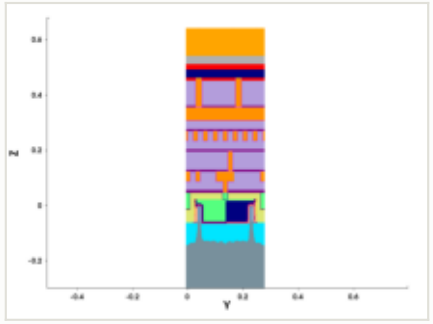

y cut at 0.211 µm

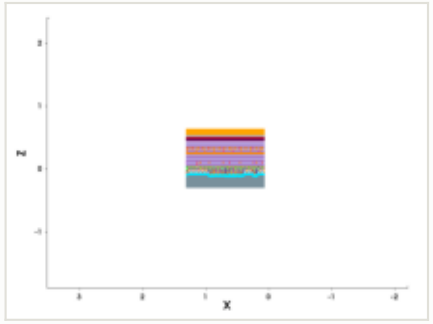

mask for this step

no mask for this step

steps by process area

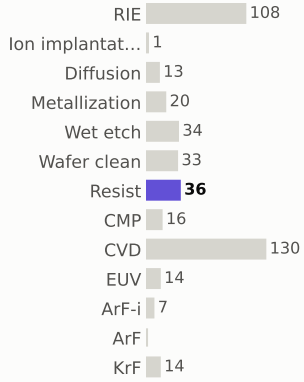

materials deposited (g)

gases emitted (g)



Step #4630: CVD

depo_fill · CVD

1.31	397.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



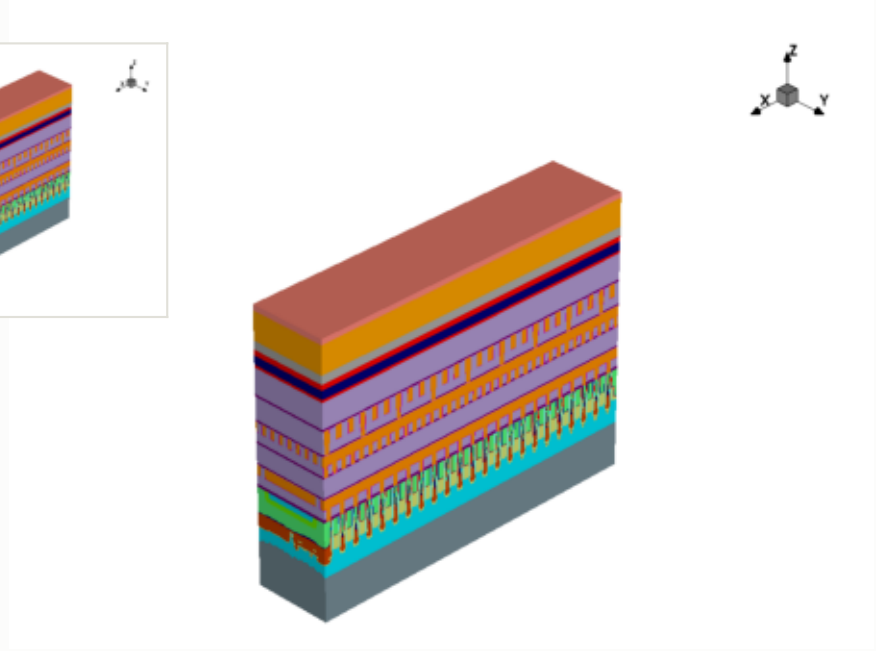

x cut at 0.677 µm

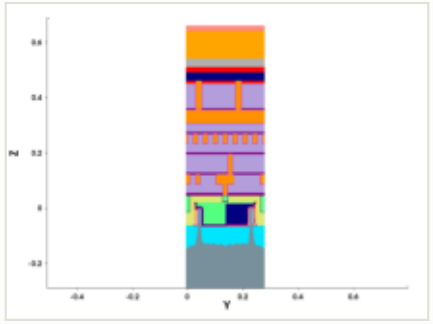

y cut at 0.211 µm

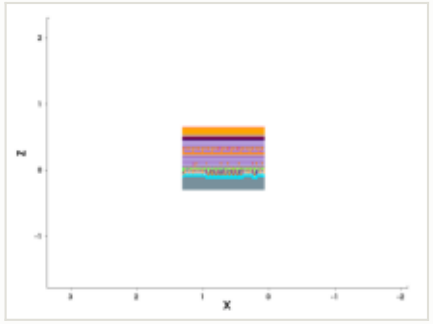

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

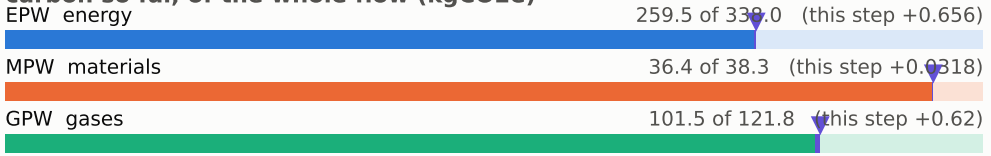

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)



Step #4640: Wafer_clean

clean · Wafer_clean

0.169	397.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



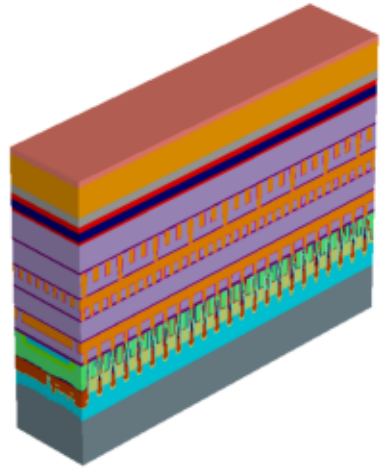

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

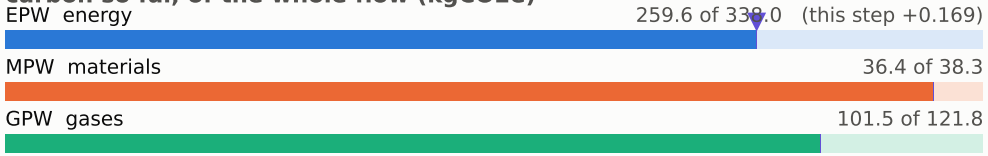

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

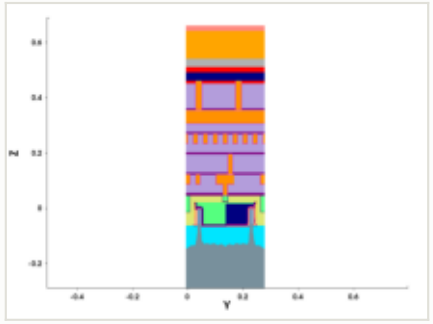

y cut at 0.211 µm

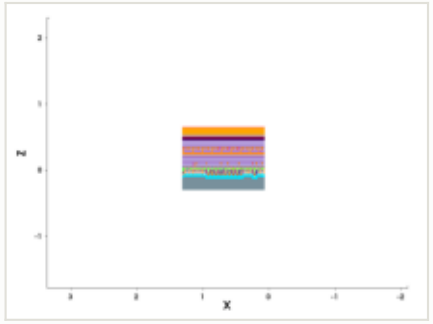

mask for this step

no mask for this step

steps by process area

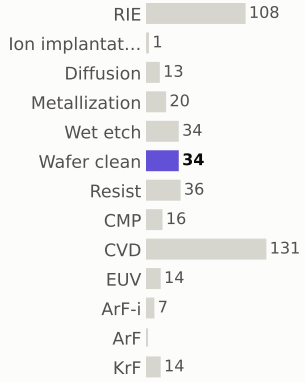

materials deposited (g)



gases emitted (g)



Step #4650: ArF-i

litho_patterning · ArF-i

0.217	397.7	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



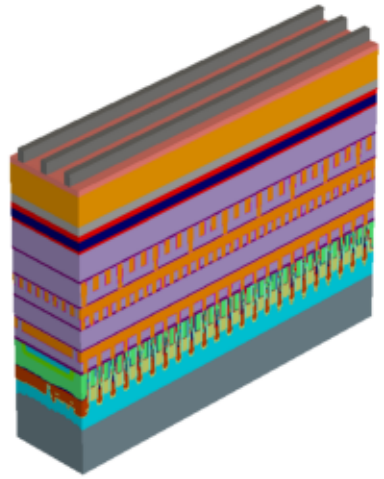

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

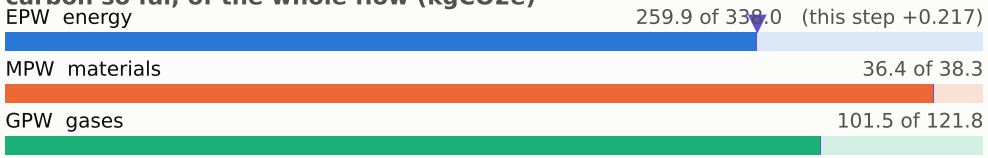

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

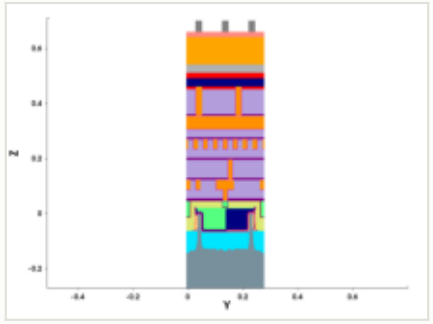

y cut at 0.211 µm

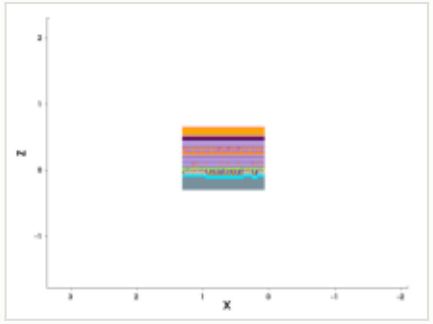

mask: layer 10501:0, positive (GDSII)

steps by process area

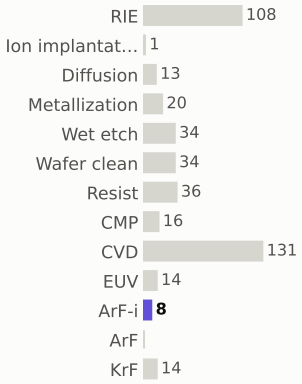

materials deposited (g)

gases emitted (g)



Step #4660: Ion_implantation

treatment · Ion_implantation

0.801	398.5	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



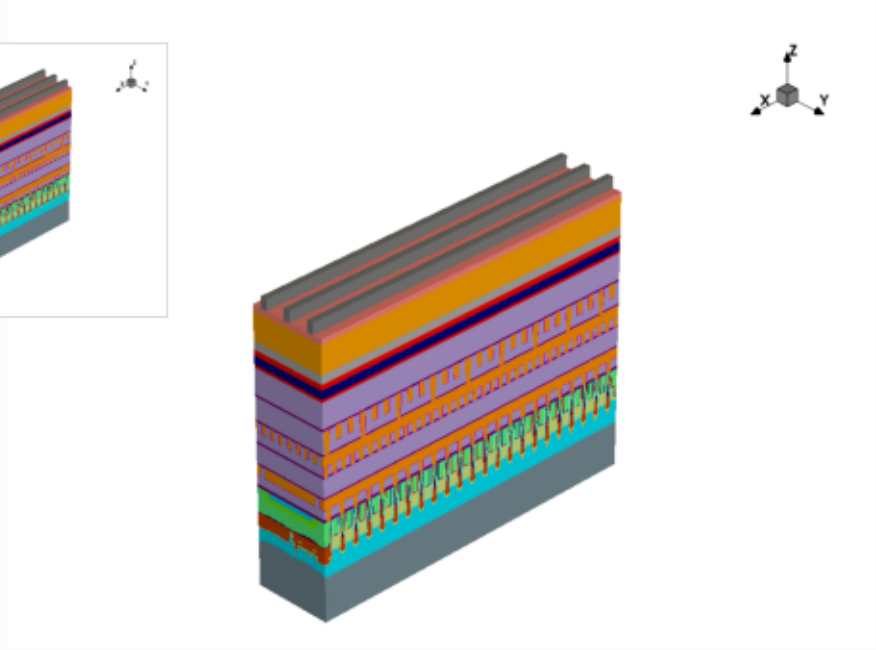

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

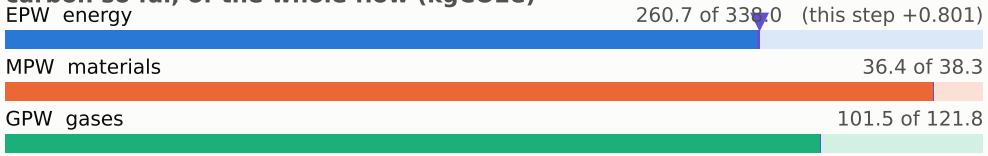

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

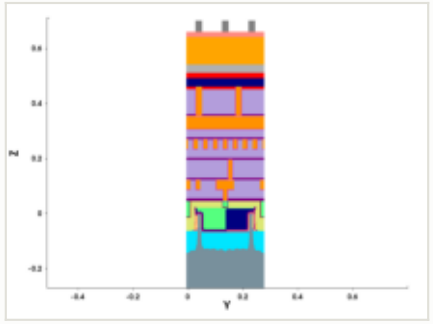

y cut at 0.211 µm

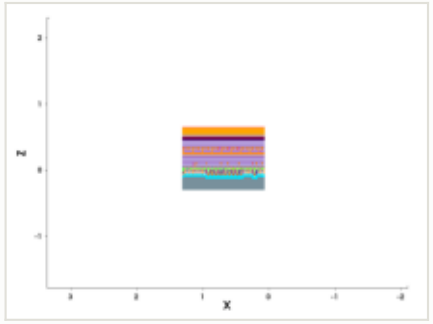

mask for this step

no mask for this step

steps by process area

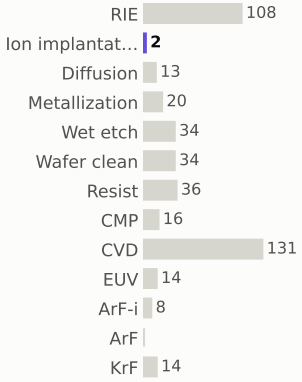

materials deposited (g)

gases emitted (g)



Step #4670: RIE

etch_anisotropic · RIE

1.04	399.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



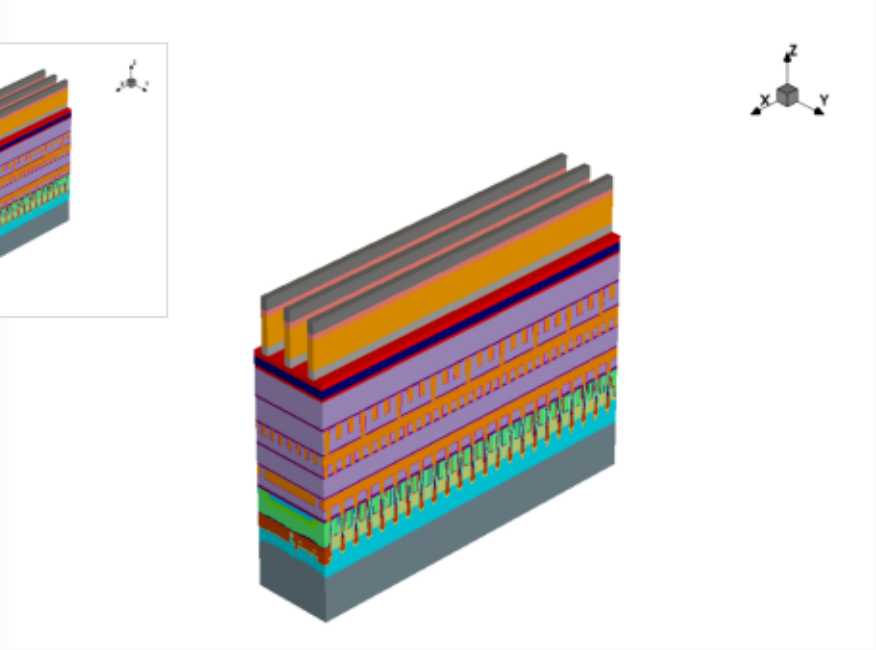

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

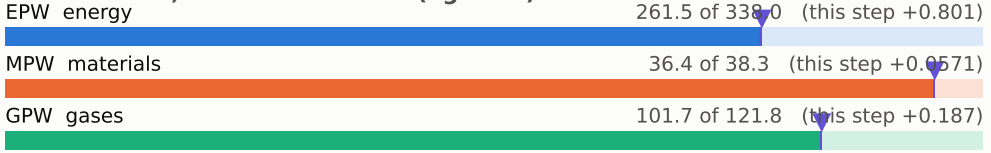

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

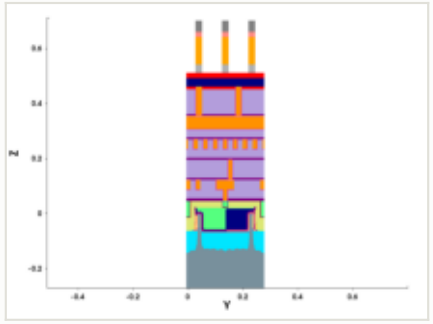

y cut at 0.211 µm

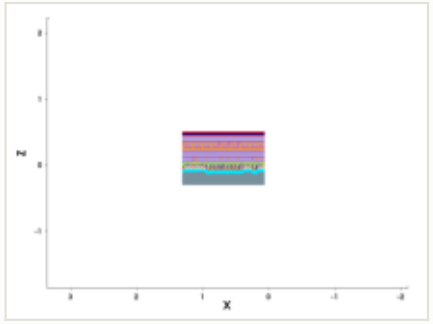

mask for this step

no mask for this step

steps by process area

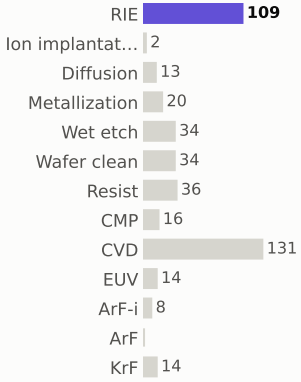

materials deposited (g)

gases emitted (g)



Step #4680: Wafer_clean

etch_strip · Wafer_clean

0.169	399.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



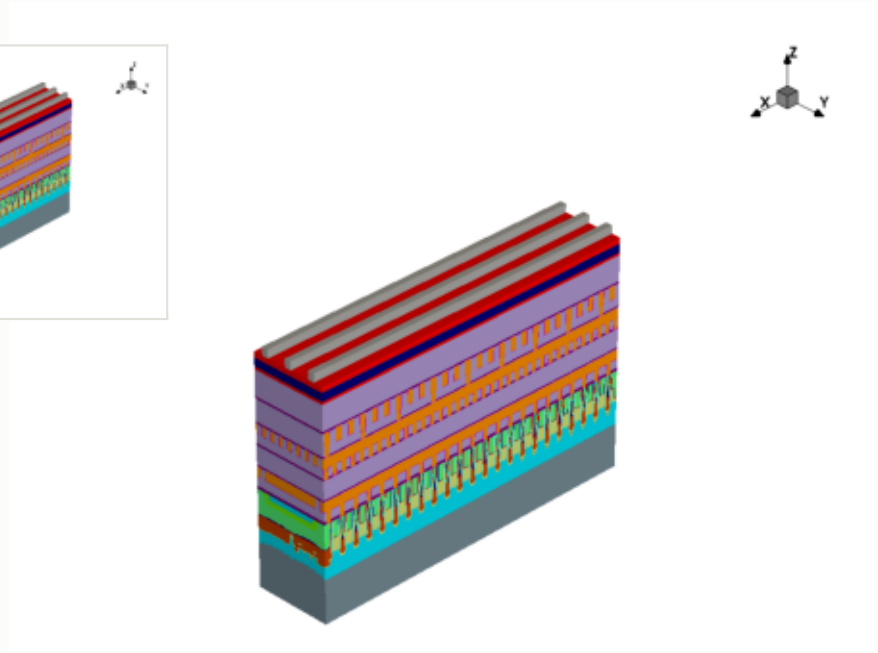

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

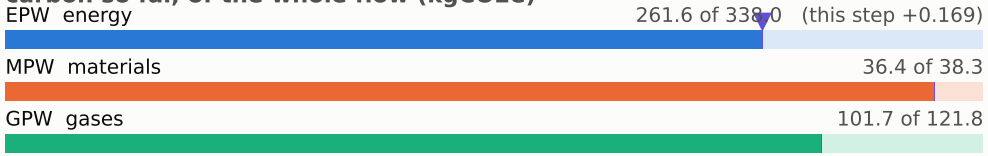

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

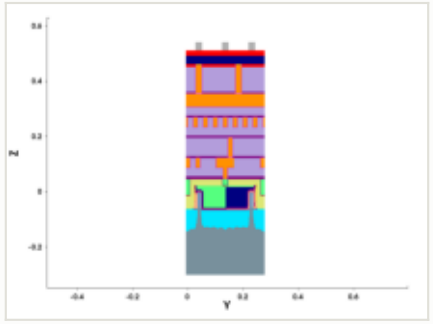

y cut at 0.211 µm

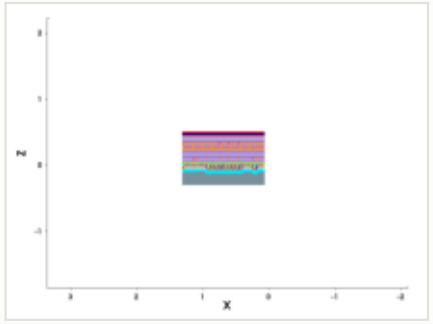

mask for this step

no mask for this step

steps by process area

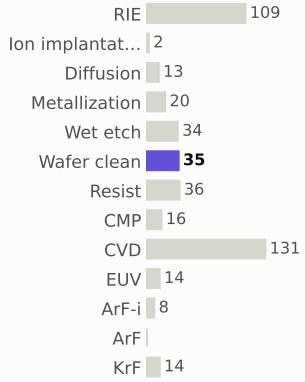

materials deposited (g)



gases emitted (g)



Step #4690: CVD

depo_isotropic · CVD

1.31	401.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



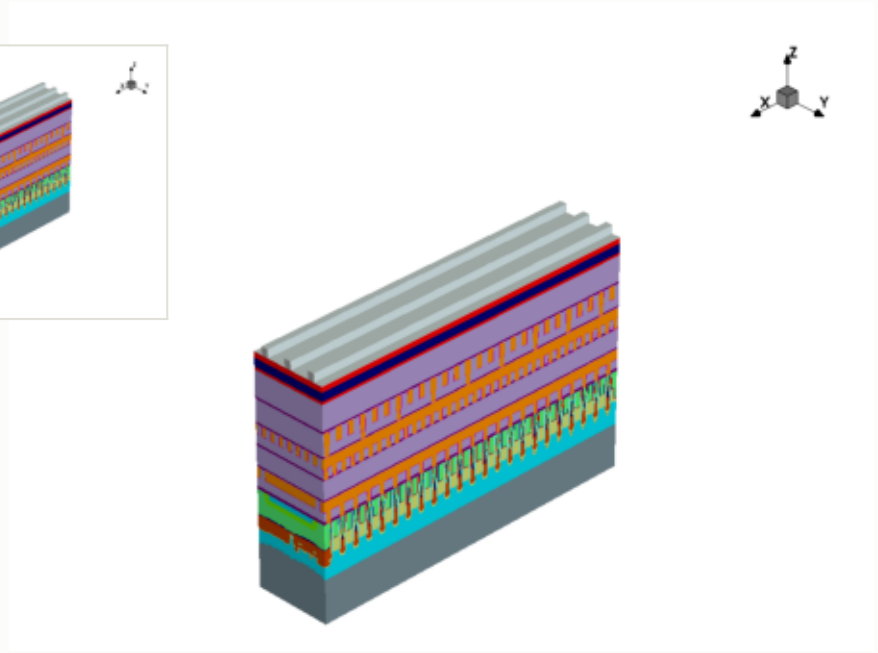

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

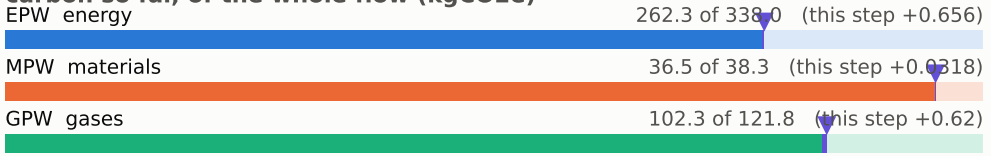

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

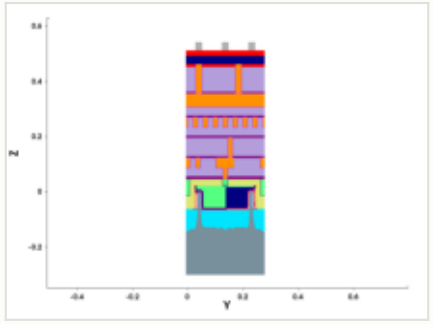

y cut at 0.211 µm

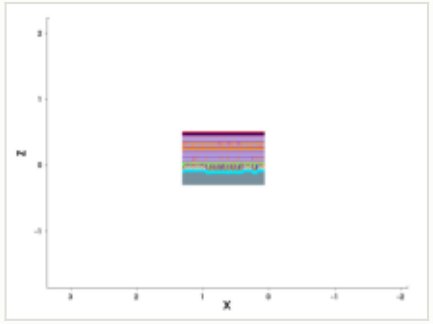

mask for this step

no mask for this step

steps by process area

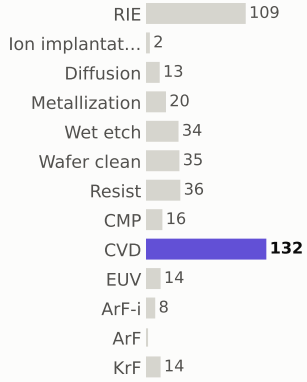

materials deposited (g)



gases emitted (g)



Step #4700: RIE

etch_anisotropic · RIE

1.04	402.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



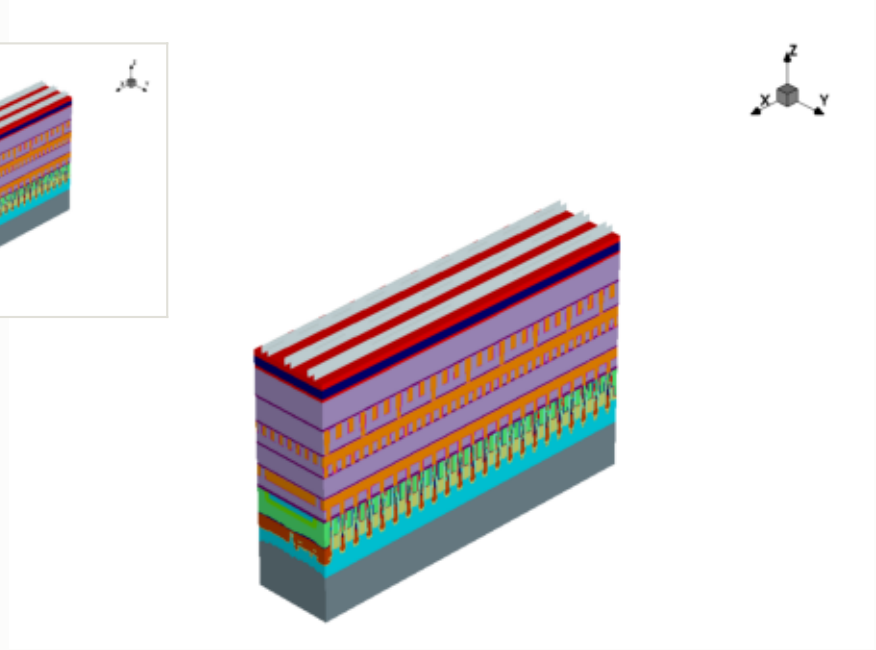

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

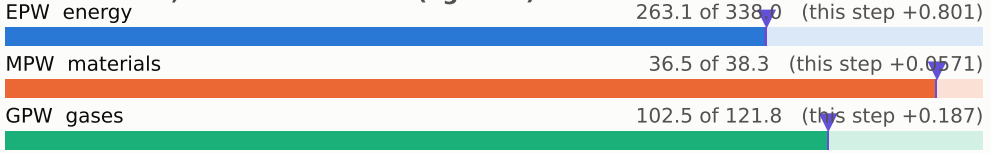

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

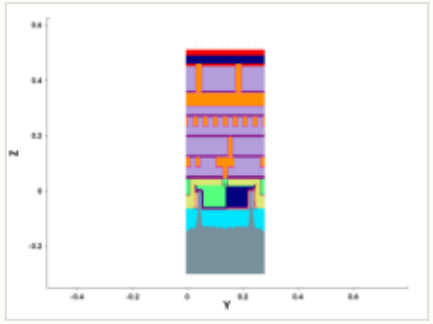

y cut at 0.211 µm

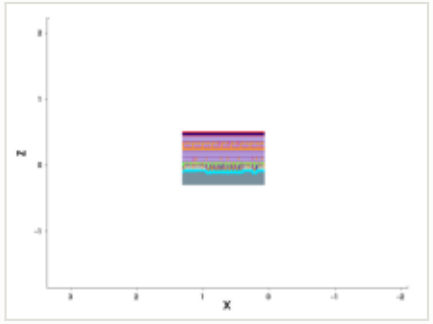

mask for this step

no mask for this step

steps by process area

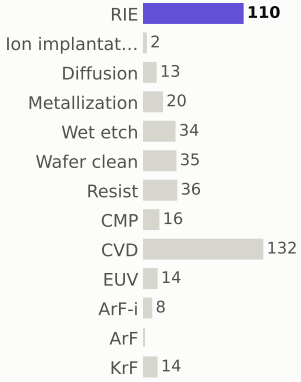

materials deposited (g)

gases emitted (g)



Step #4710: Wafer_clean

etch_strip · Wafer_clean

0.169	402.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



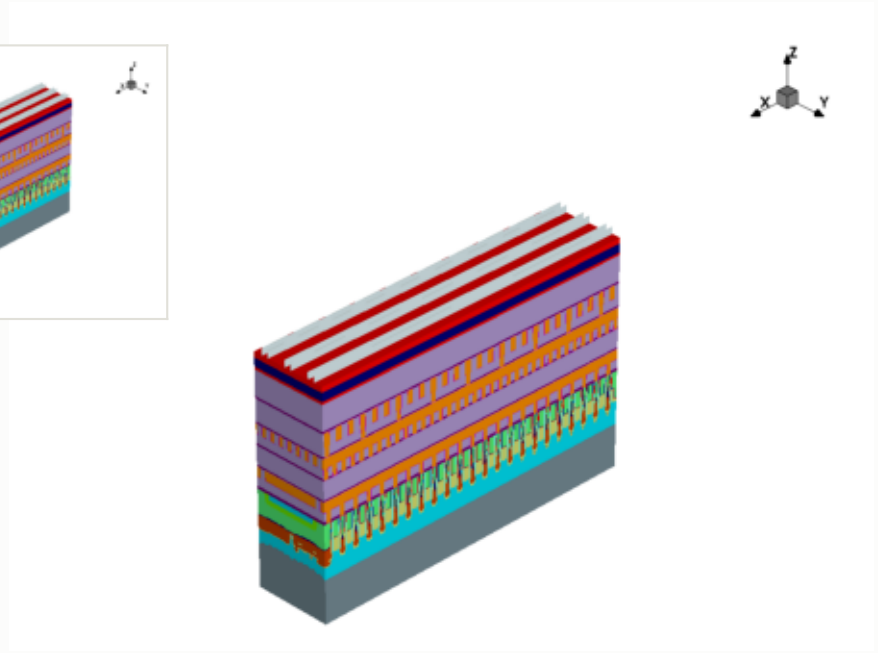

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

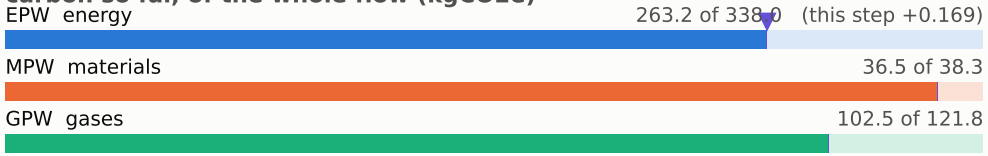

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

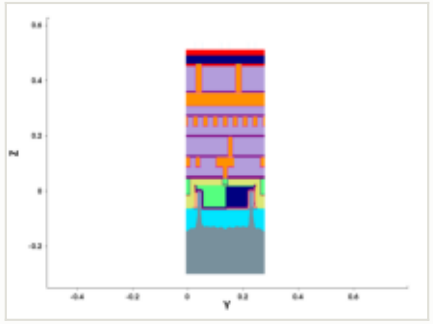

y cut at 0.211 µm

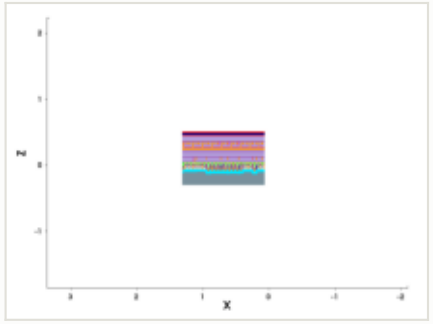

mask for this step

no mask for this step

steps by process area

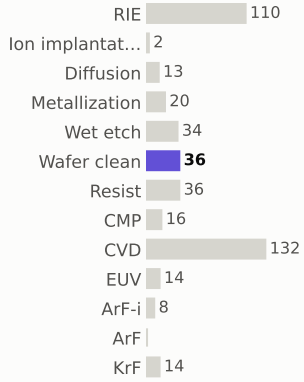

materials deposited (g)

gases emitted (g)



Step #4720: Resist

depo_fill · Resist

0.169	402.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



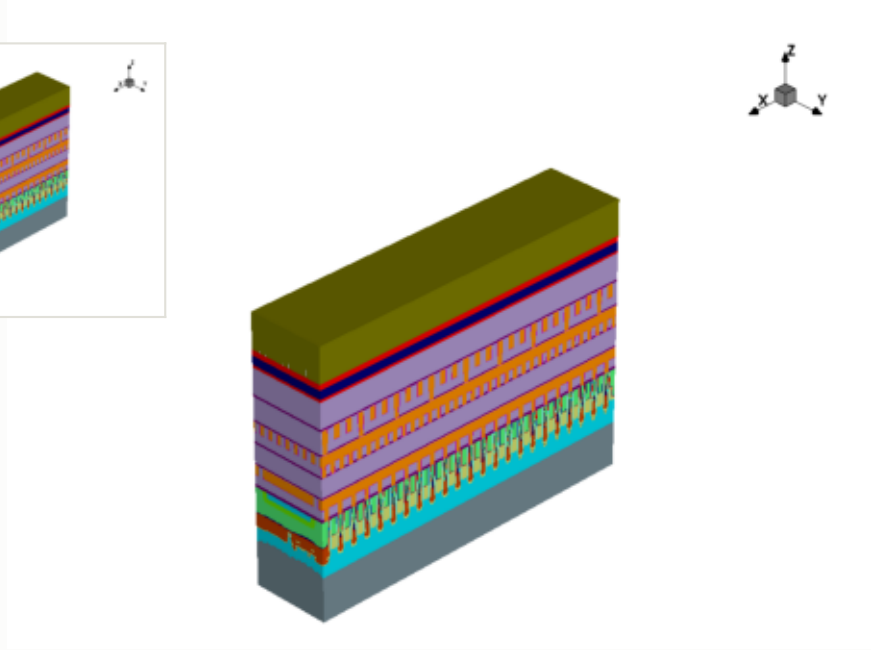

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

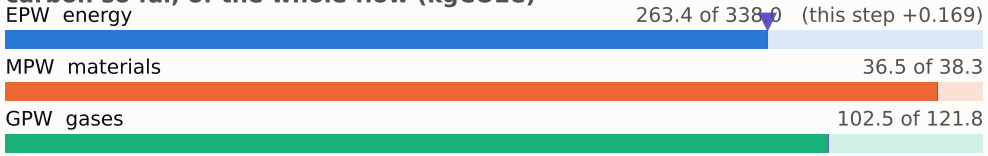

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

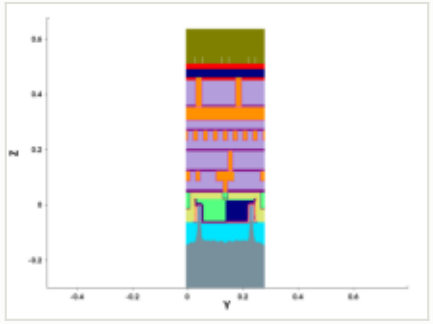

y cut at 0.211 µm

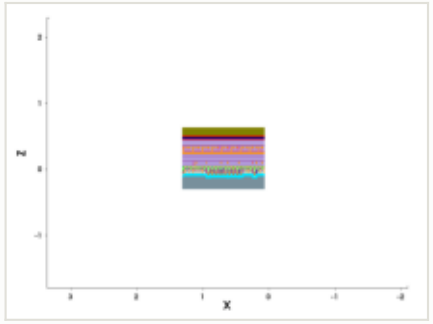

mask for this step

no mask for this step

steps by process area

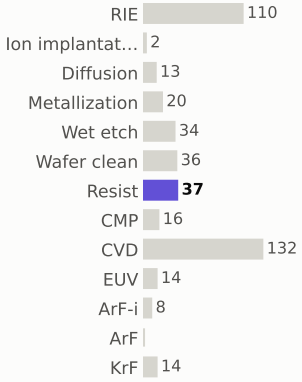

materials deposited (g)

gases emitted (g)



Step #4730: Wafer_clean

clean · Wafer_clean

0.169	402.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



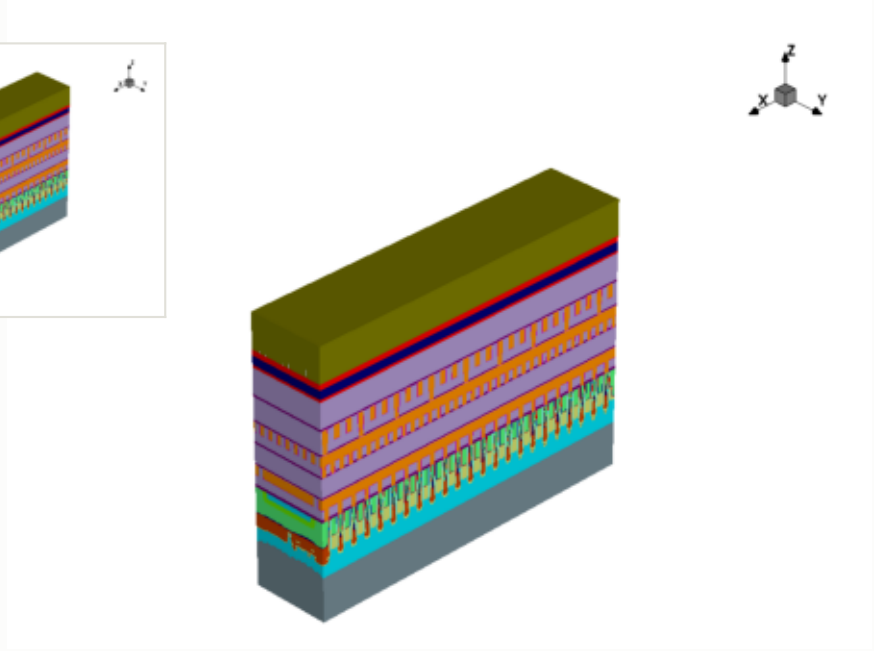

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

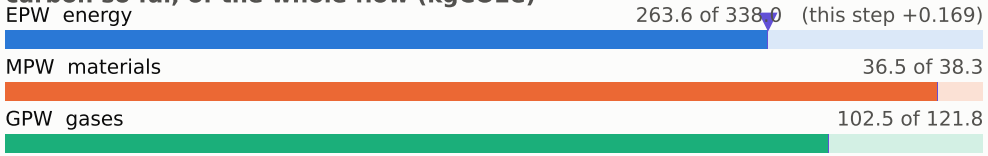

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

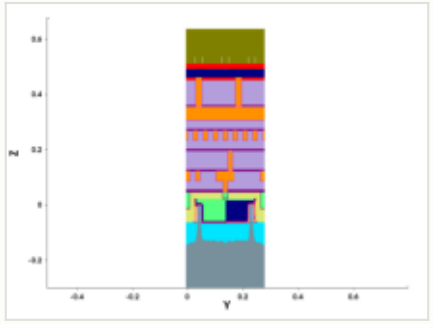

y cut at 0.211 µm

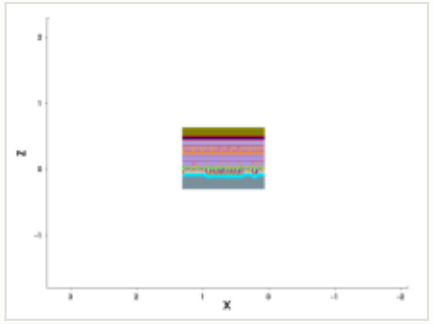

mask for this step

no mask for this step

steps by process area

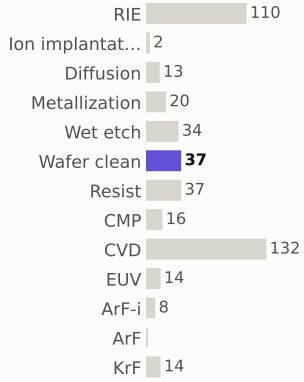

materials deposited (g)



gases emitted (g)



Step #4740: ArF-i

litho_patterning · ArF-i

0.217	402.8	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



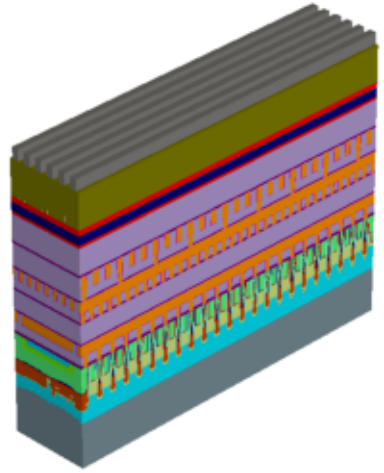

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

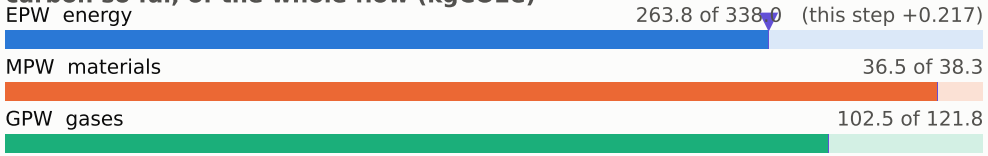

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

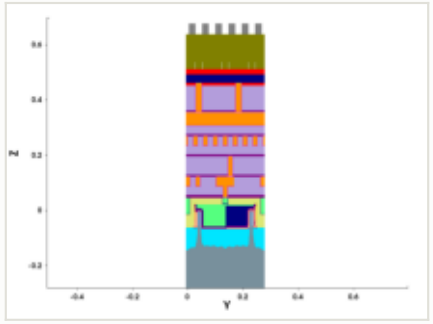

y cut at 0.211 µm

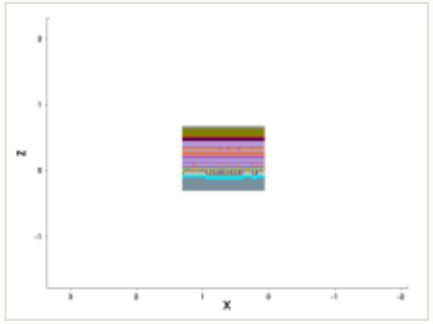

mask: layer 50:0 (GDSII)



steps by process area

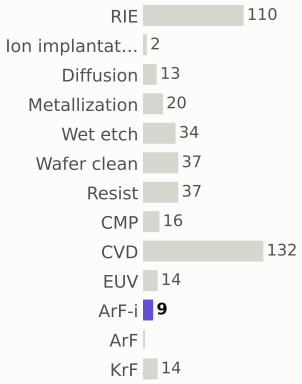

materials deposited (g)

gases emitted (g)



Step #4750: RIE

etch_anisotropic · RIE

1.04	403.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



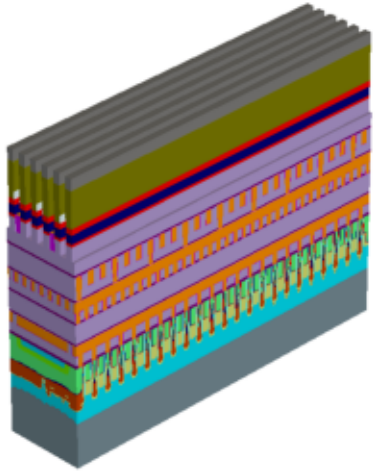

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

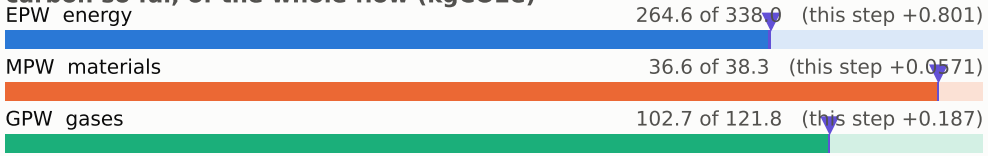

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

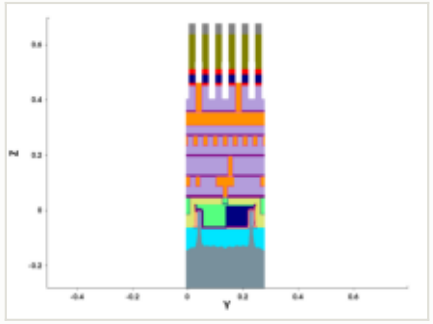

y cut at 0.211 µm

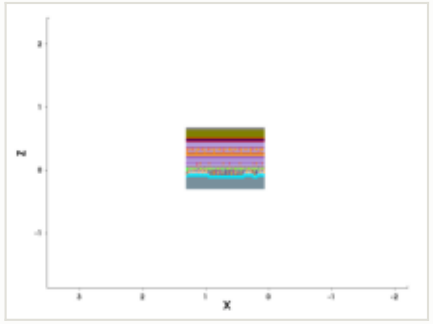

mask for this step

no mask for this step

steps by process area

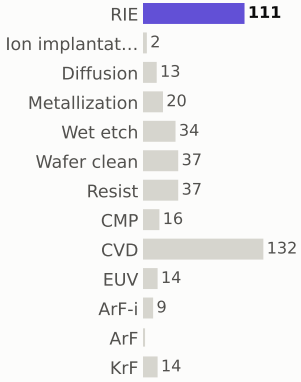

materials deposited (g)

gases emitted (g)



Step #4760: Wafer_clean

etch_strip · Wafer_clean

0.169	404.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



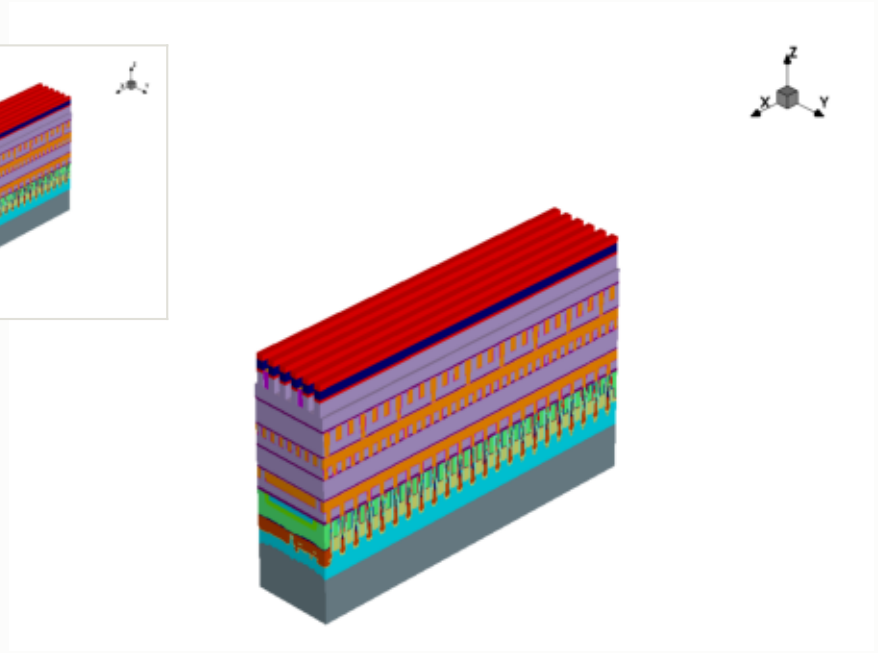

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

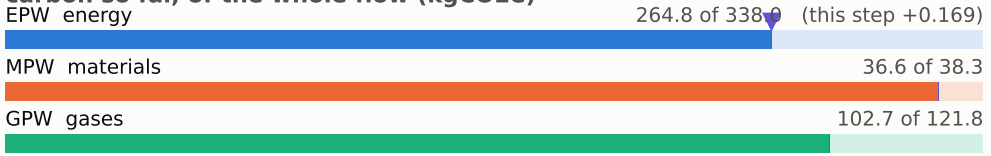

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

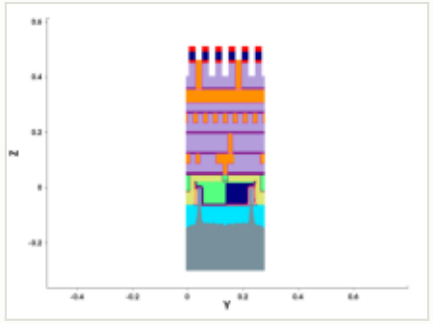

y cut at 0.211 µm

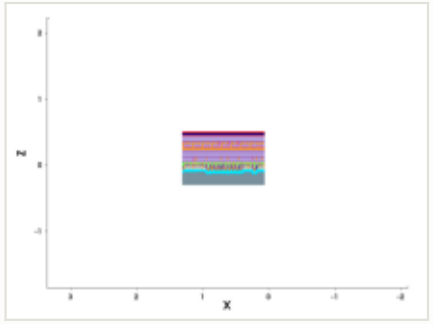

mask for this step

no mask for this step

steps by process area

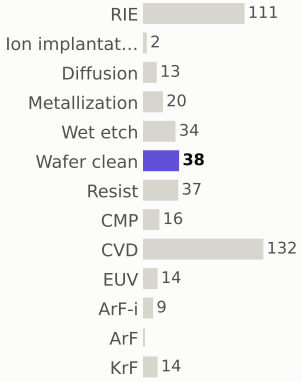

materials deposited (g)



gases emitted (g)



Step #4770: Metallization

depo_ellipsoidal · Metallization

1.2	405.2	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



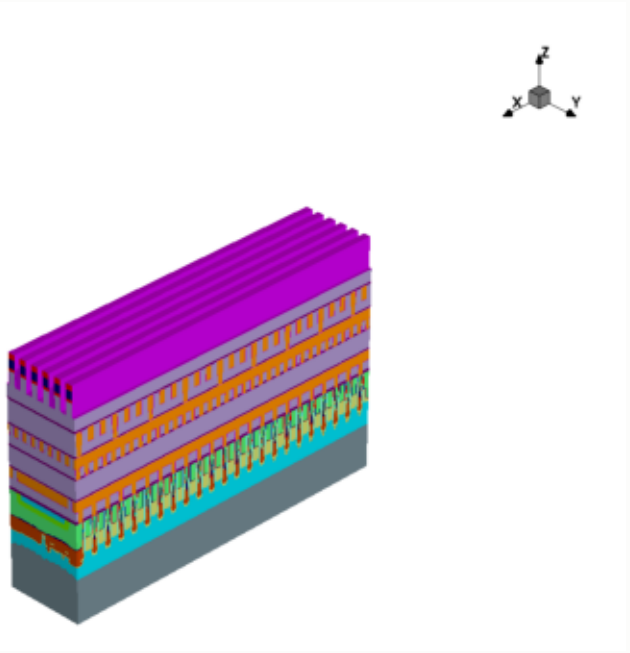

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

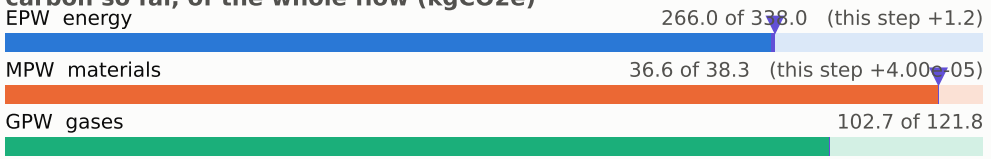

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

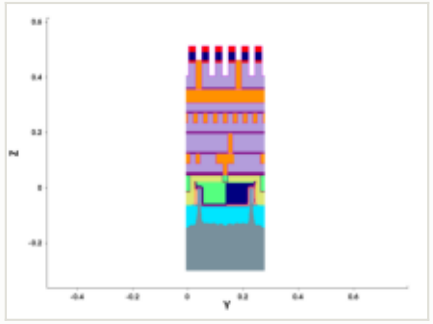

y cut at 0.211 µm

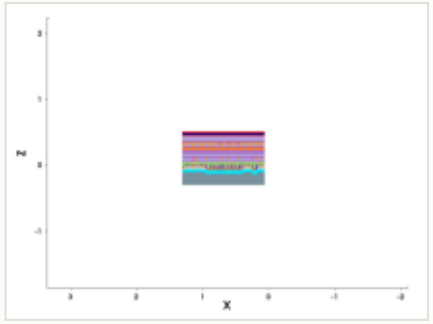

mask for this step

no mask for this step

steps by process area

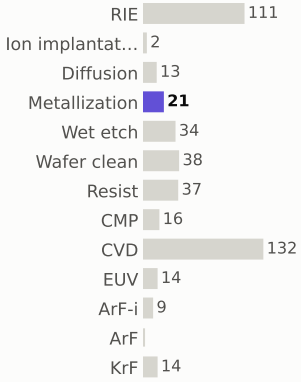

materials deposited (g)

gases emitted (g)



Step #4780: Metallization

depo_fill · Metallization

1.21	406.4	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



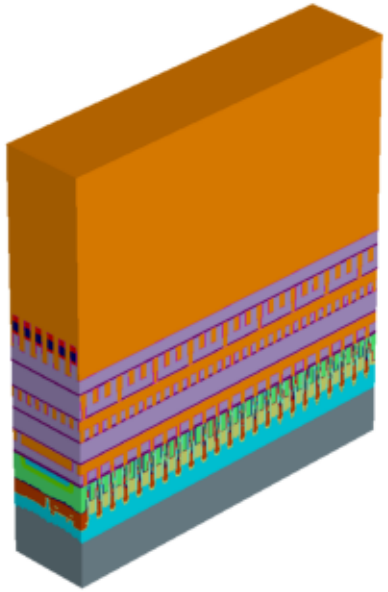

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

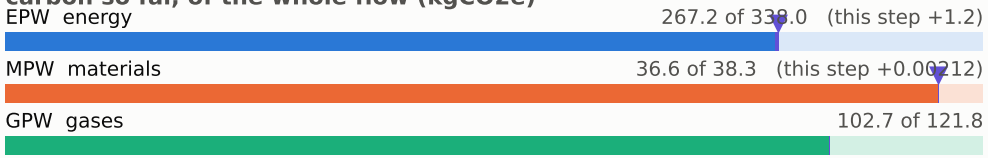

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

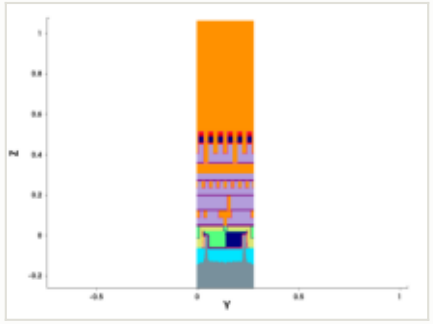

y cut at 0.211 µm

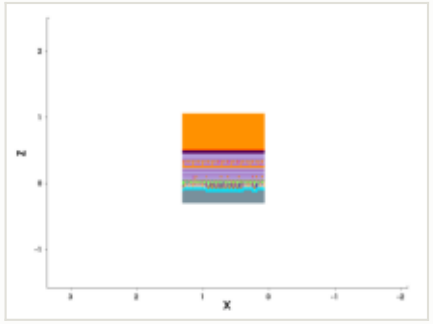

mask for this step

no mask for this step

steps by process area

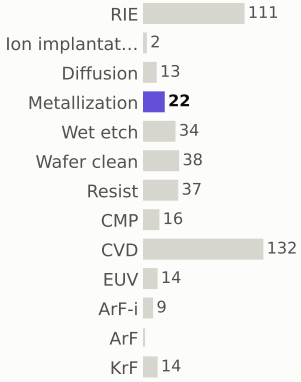

materials deposited (g)



gases emitted (g)



Step #4790: Diffusion

treatment · Diffusion

0.801	407.2	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



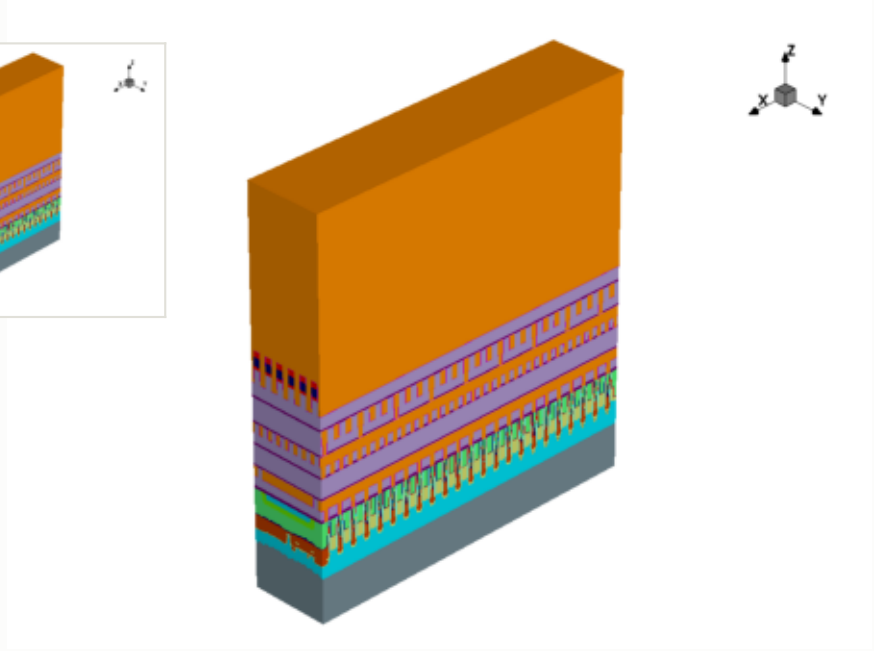

x cut at 0.677 µm

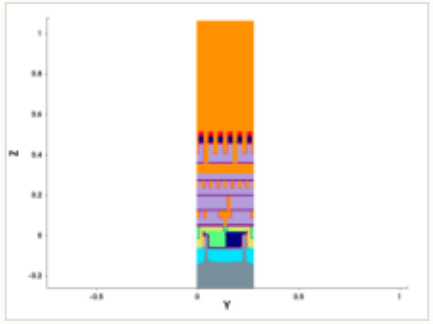

y cut at 0.211 µm

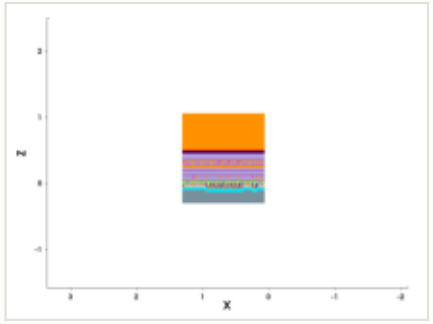

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

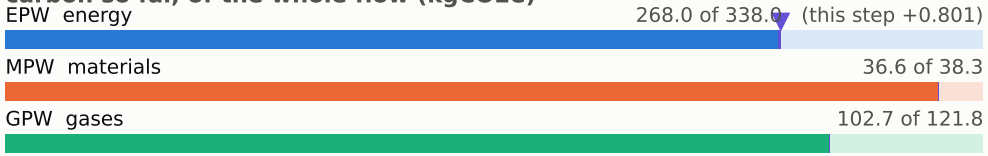

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

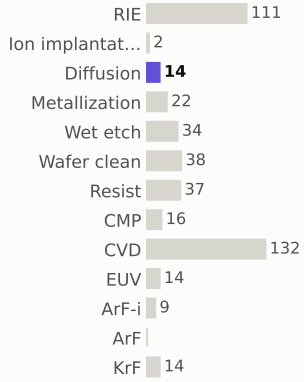

materials deposited (g)



gases emitted (g)

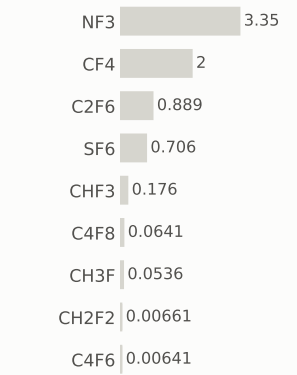

Step #4800: CMP

etch_cmp · CMP

0.169	407.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



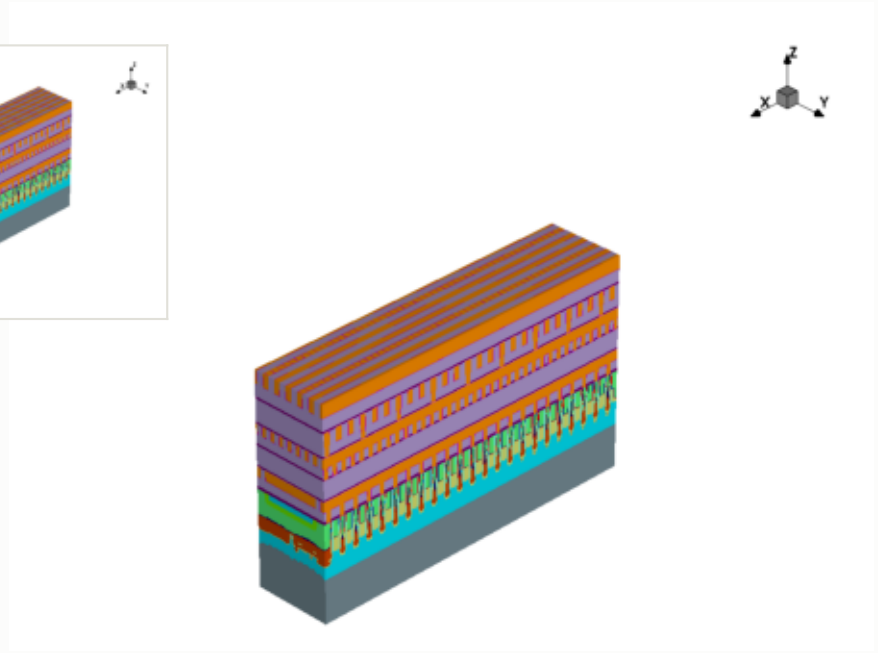

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

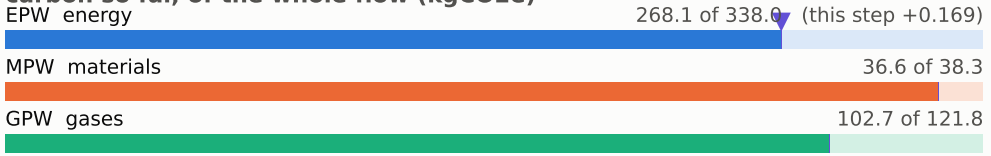

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

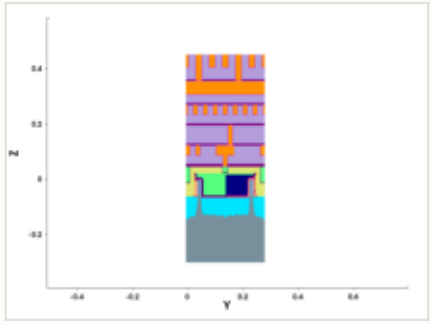

y cut at 0.211 µm

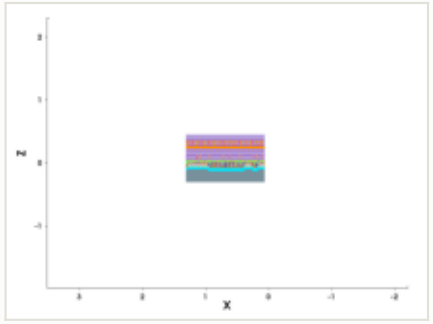

mask for this step

no mask for this step

steps by process area

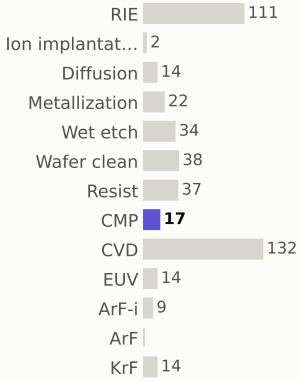

materials deposited (g)

gases emitted (g)



Step #4810: Metallization

depo_isotropic · Metallization

1.2	408.6	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



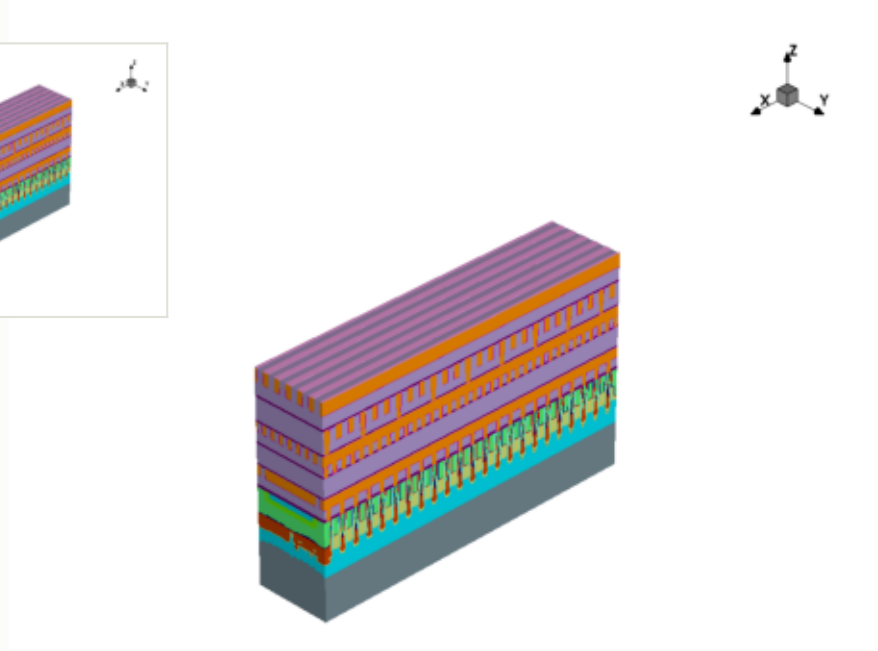

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

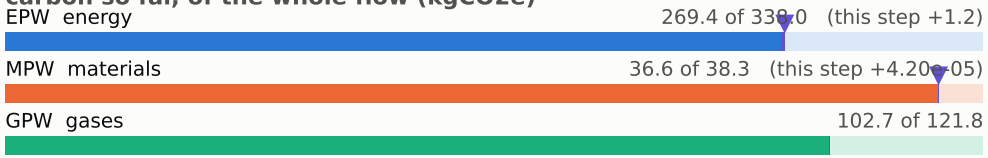

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

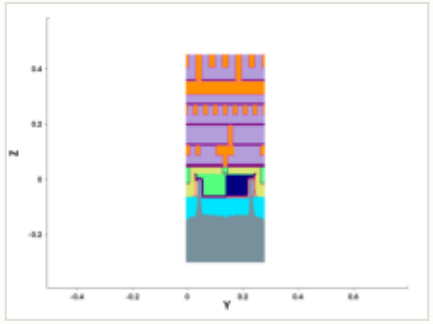

y cut at 0.211 µm

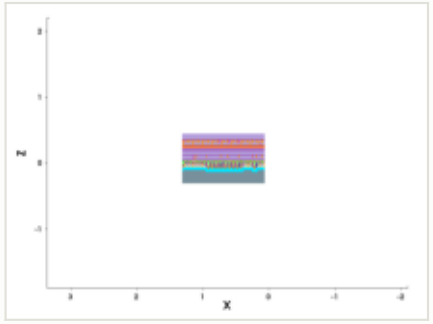

mask for this step

no mask for this step

steps by process area

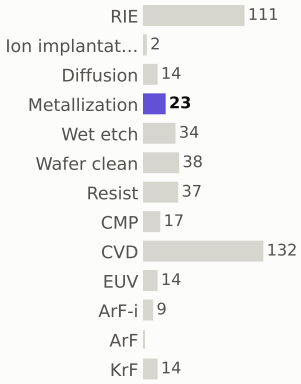

materials deposited (g)

gases emitted (g)



Step #4830: CVD

depo_fill · CVD

1.31	409.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



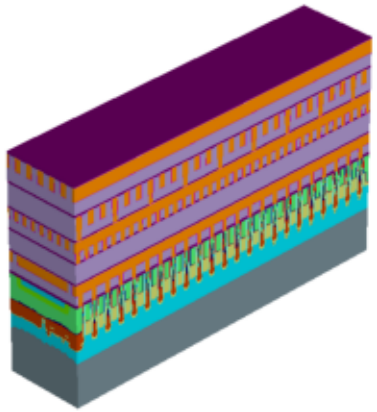

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

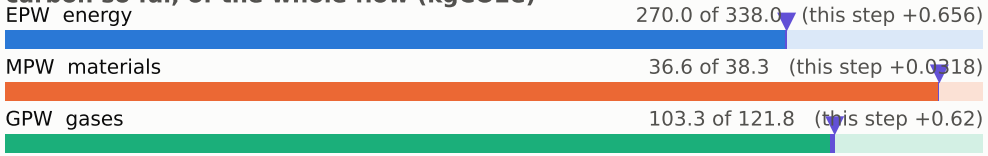

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

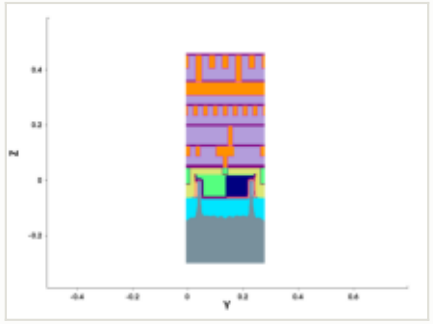

y cut at 0.211 µm

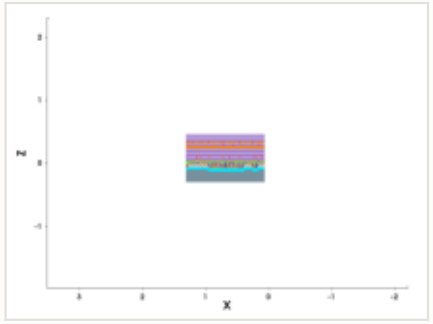

mask for this step

no mask for this step

steps by process area

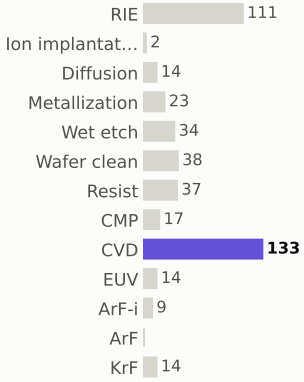

materials deposited (g)

gases emitted (g)



Step #4840: CVD

depo_fill · CVD

1.31	411.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



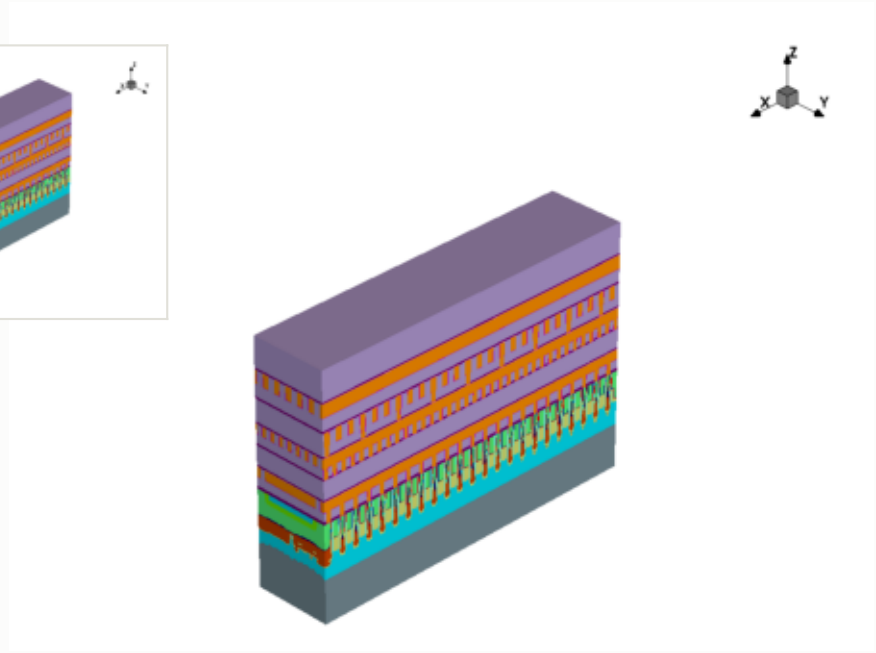

this step

process area	CVD
material	—
thickness	0.106 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

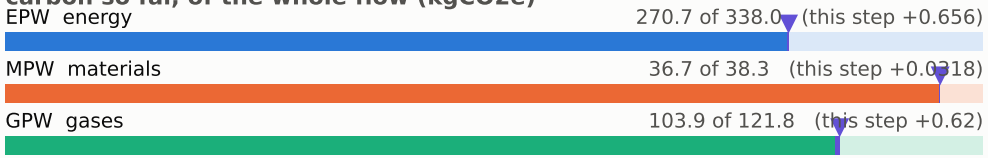

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

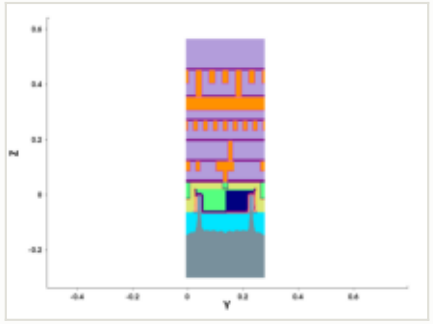

y cut at 0.211 µm

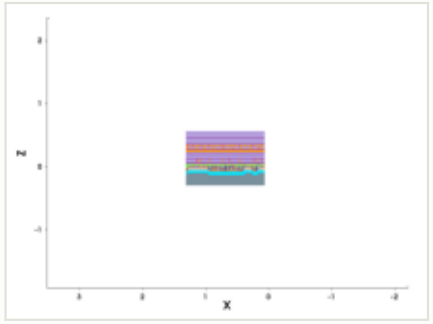

mask for this step

no mask for this step

steps by process area

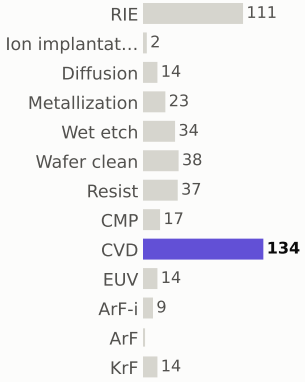

materials deposited (g)

gases emitted (g)



Step #4850: Diffusion

treatment · Diffusion

0.801	412.0	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



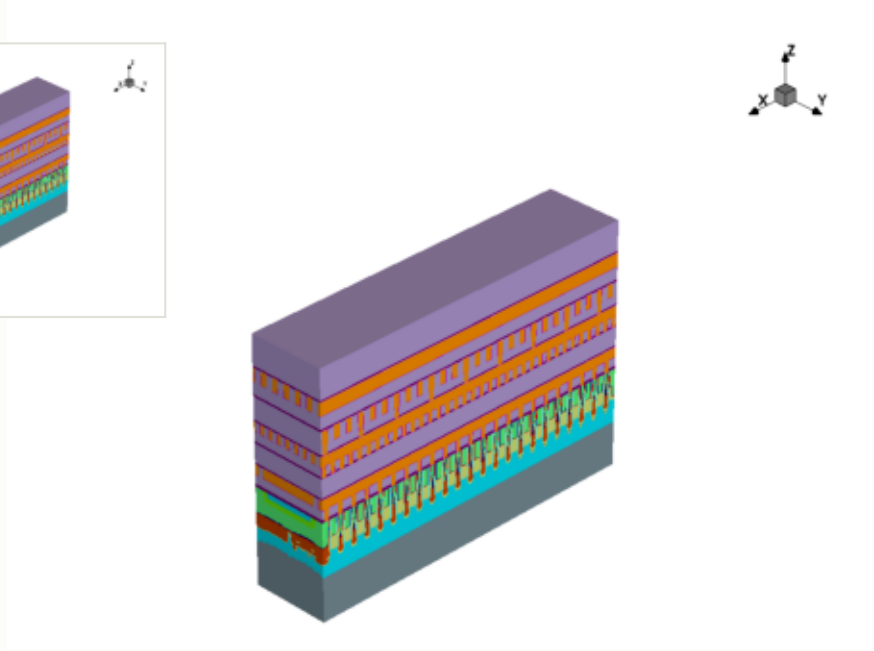

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

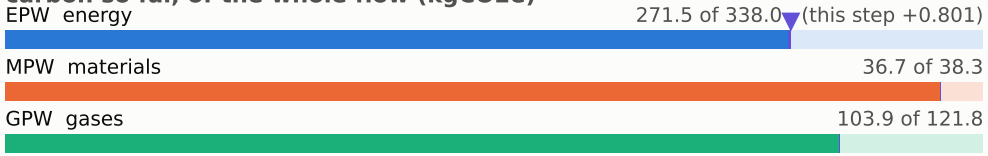

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

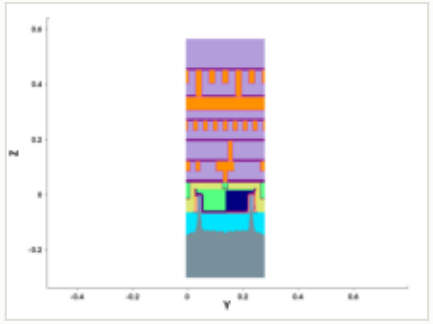

y cut at 0.211 µm

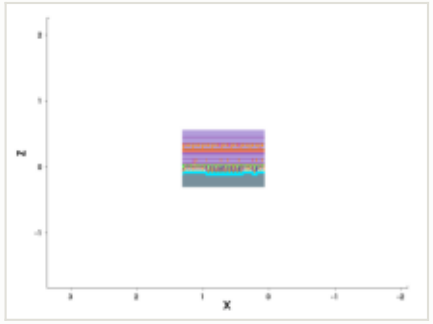

mask for this step

no mask for this step

steps by process area

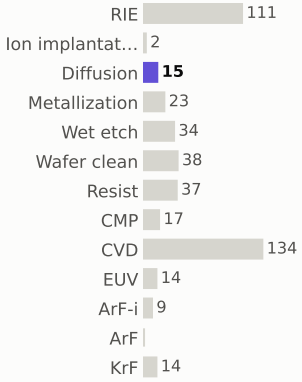

materials deposited (g)

gases emitted (g)



Step #4860: Wafer_clean

clean · Wafer_clean

0.169	412.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



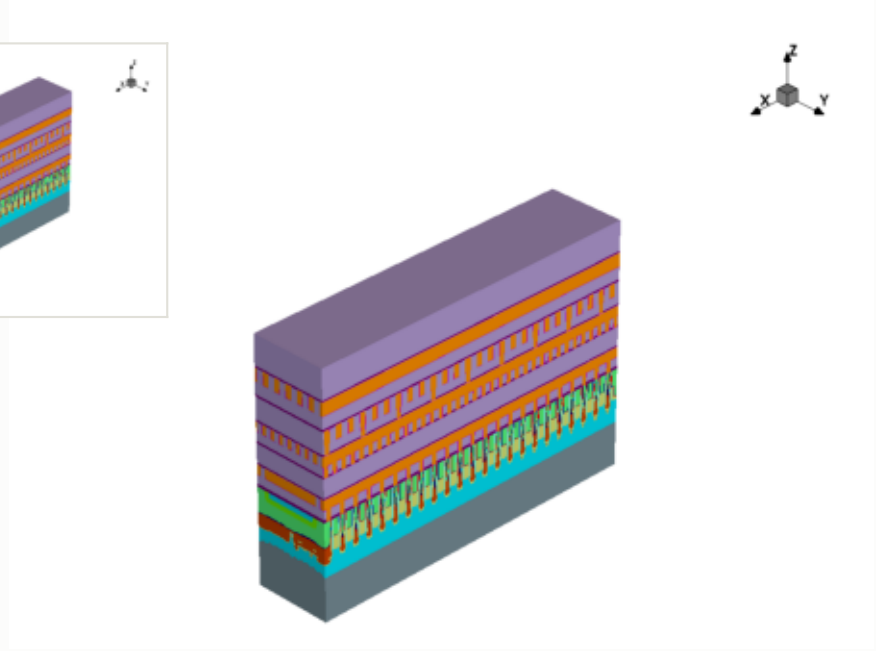

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

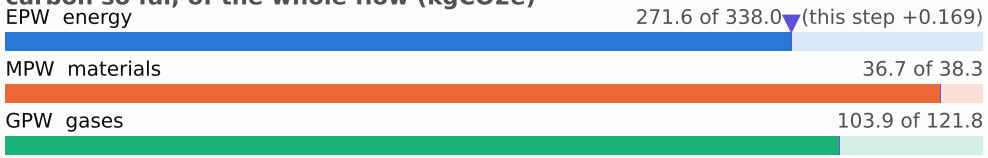

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

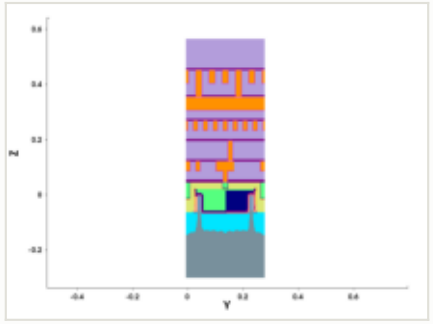

y cut at 0.211 µm

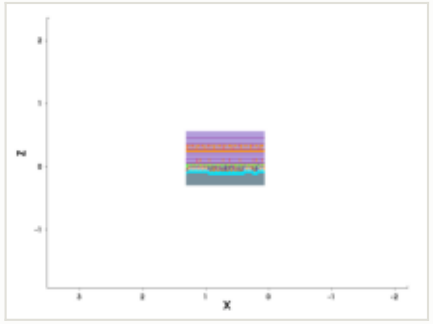

mask for this step

no mask for this step

steps by process area

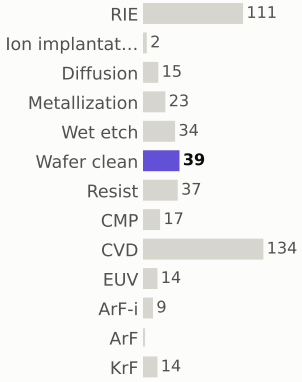

materials deposited (g)

gases emitted (g)



Step #4870: CVD

depo_fill · CVD

1.31	413.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



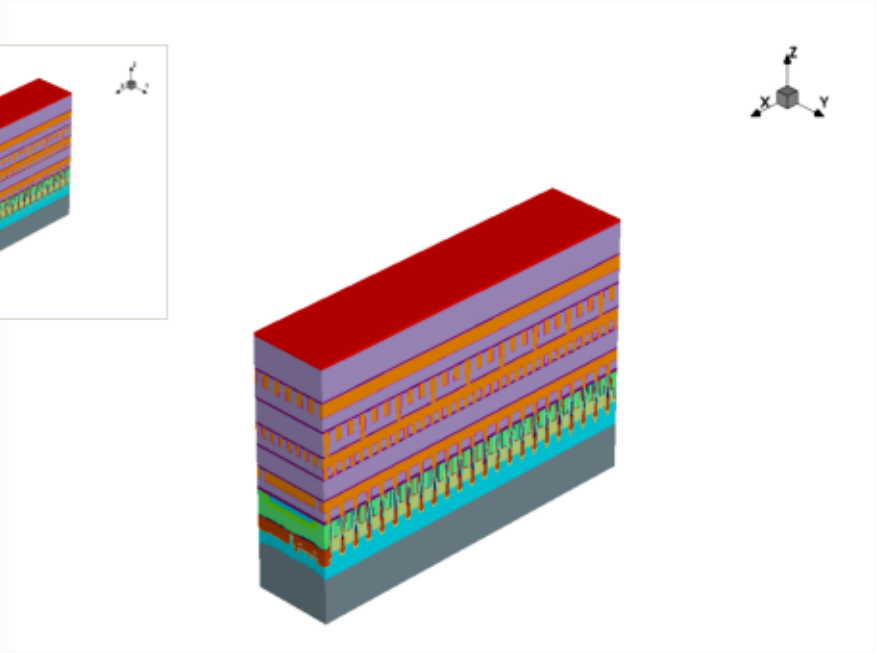

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

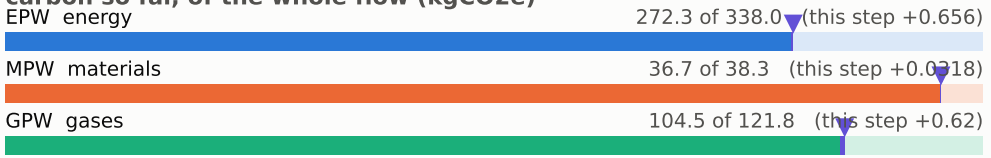

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

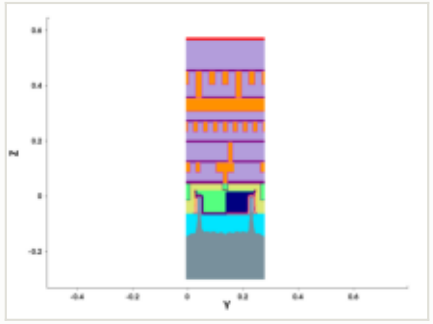

y cut at 0.211 µm

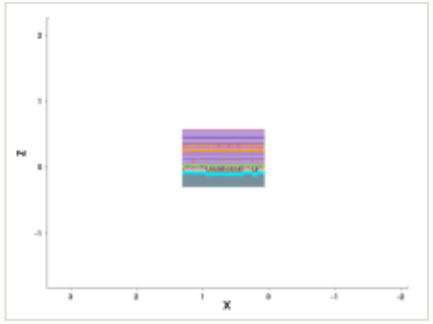

mask for this step

no mask for this step

steps by process area

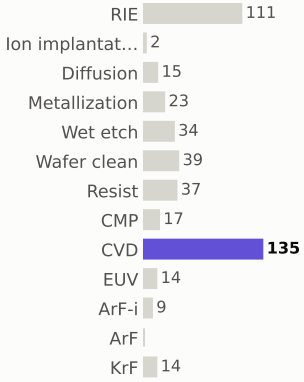

materials deposited (g)

gases emitted (g)



Step #4880: Resist

depo_fill · Resist

0.169	413.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



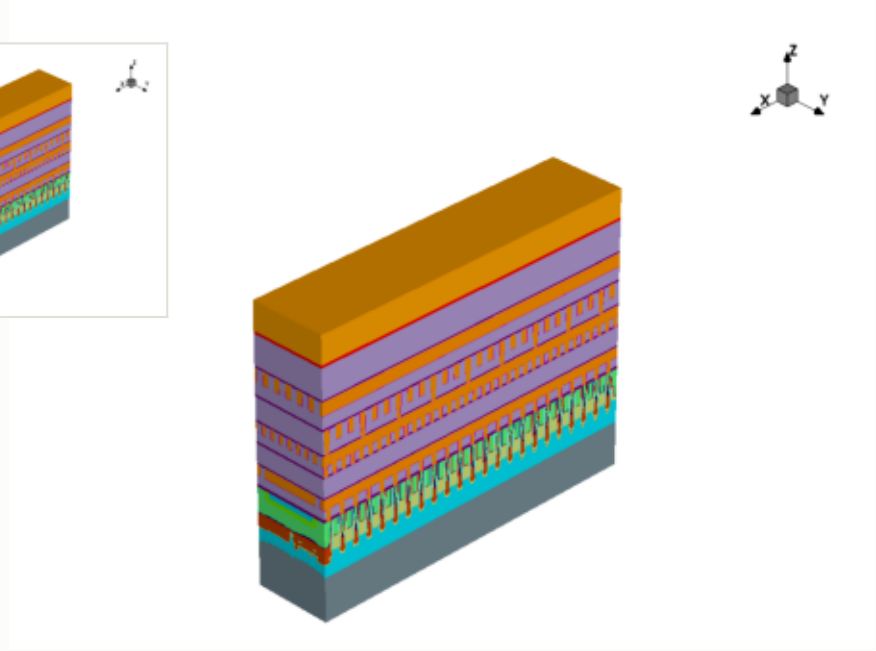

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

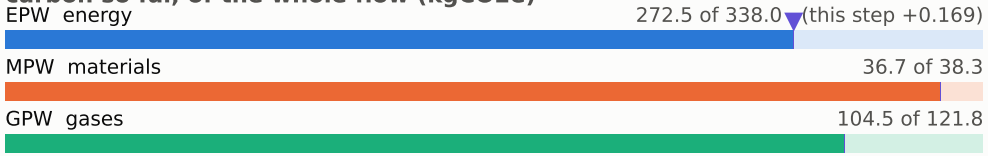

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

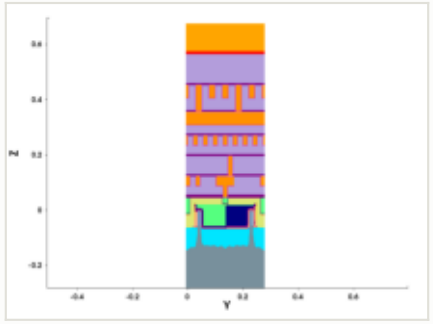

y cut at 0.211 µm

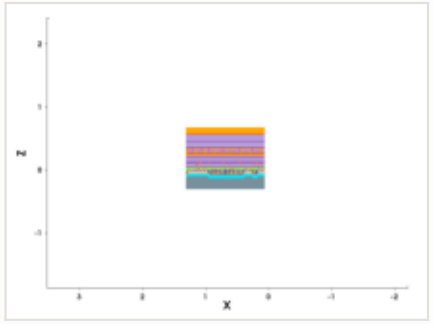

mask for this step

no mask for this step

steps by process area

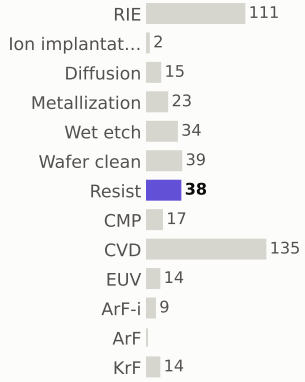

materials deposited (g)



gases emitted (g)



Step #4890: CVD

depo_fill · CVD

1.31	415.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



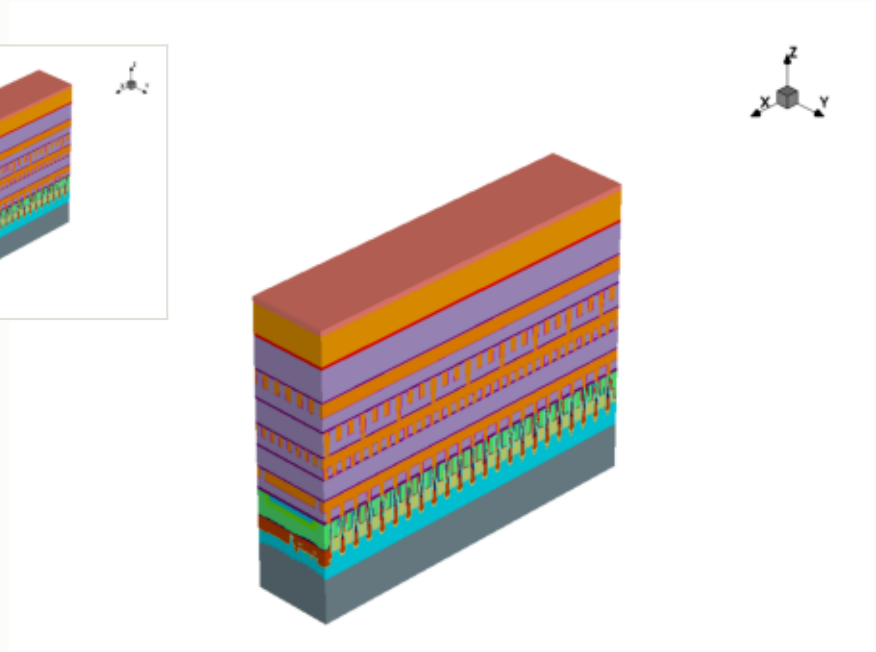

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

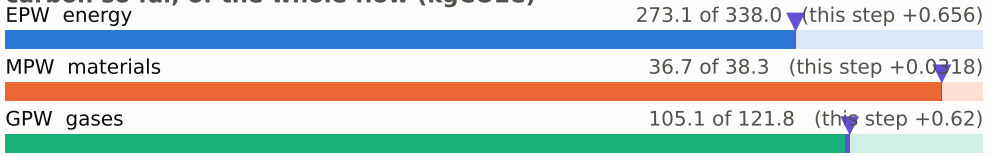

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

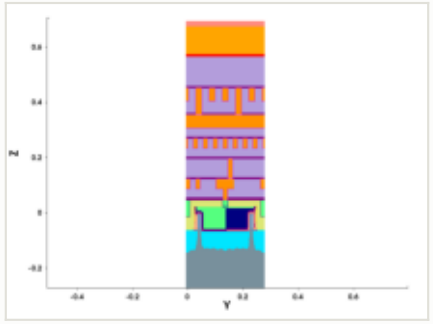

y cut at 0.211 µm

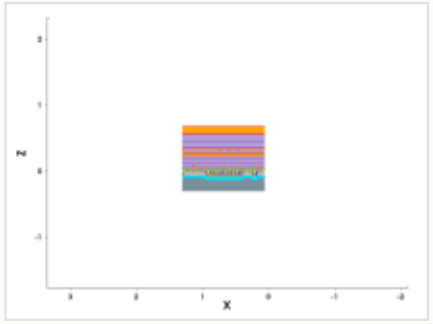

mask for this step

no mask for this step

steps by process area

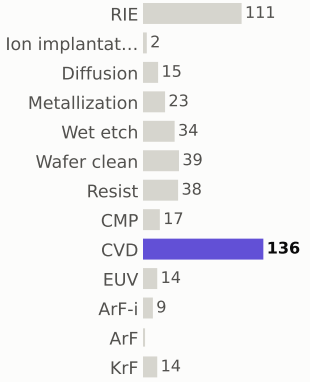

materials deposited (g)

gases emitted (g)



Step #4900: Wafer_clean

clean · Wafer_clean

0.169	415.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



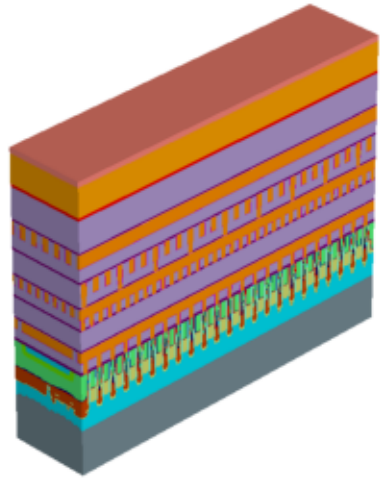

x cut at 0.677 µm

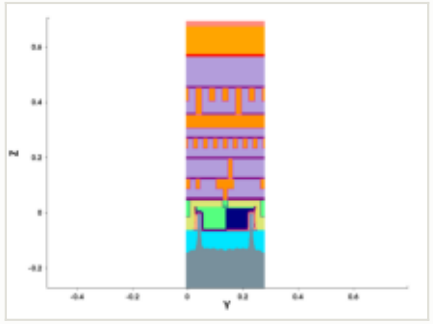

y cut at 0.211 µm

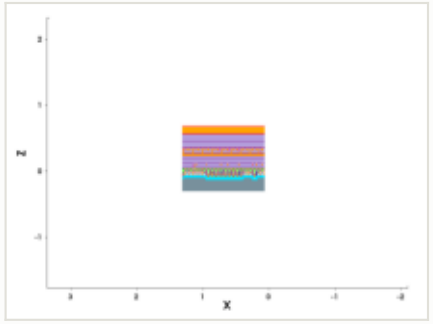

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

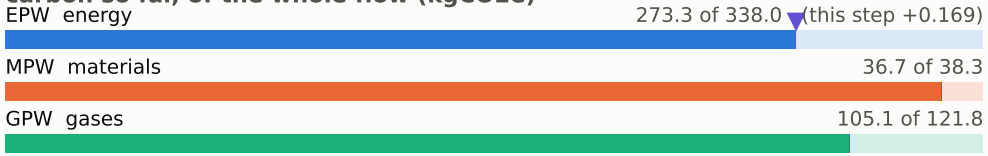

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

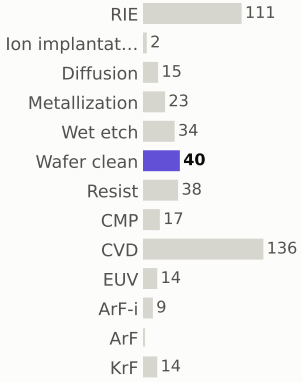

materials deposited (g)

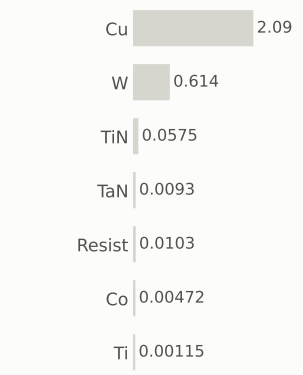

gases emitted (g)



Step #4910: ArF-i

litho_patterning · ArF-i

0.217	415.4	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



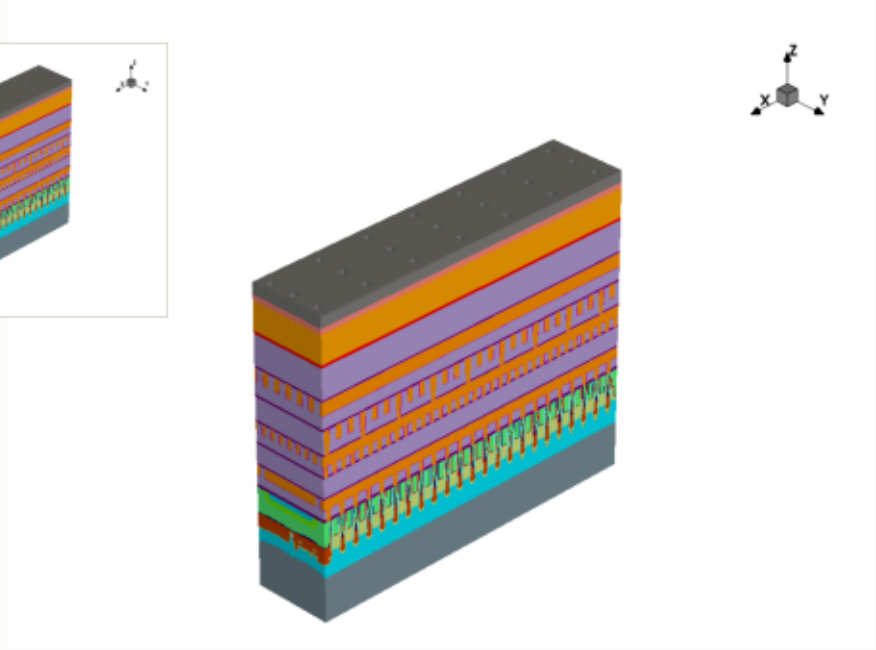

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

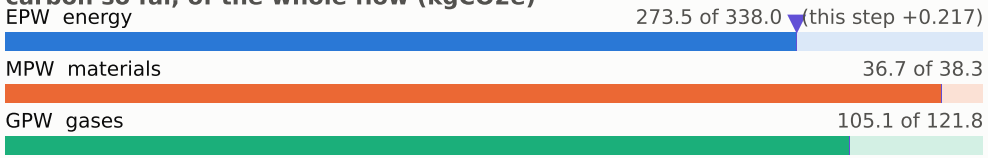

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

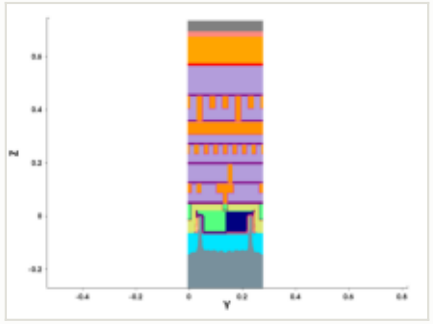

y cut at 0.211 µm

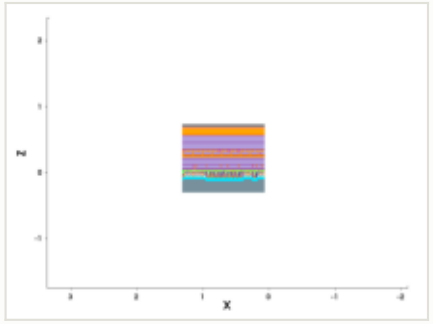

mask: layer 10551:0 (GDSII)

steps by process area

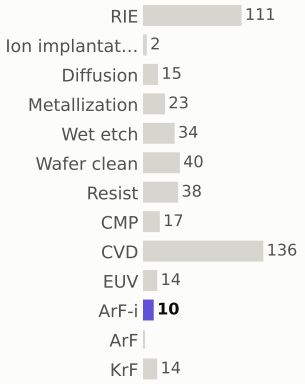

materials deposited (g)

gases emitted (g)



Step #4920: RIE

etch_anisotropic · RIE

1.04	416.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



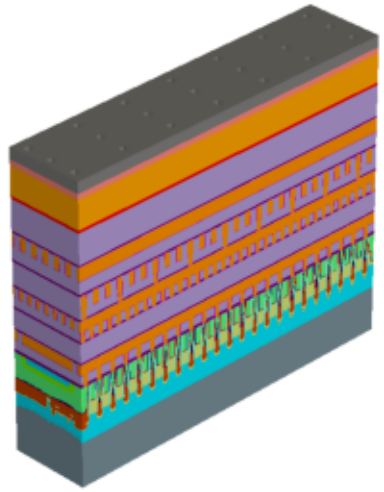

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

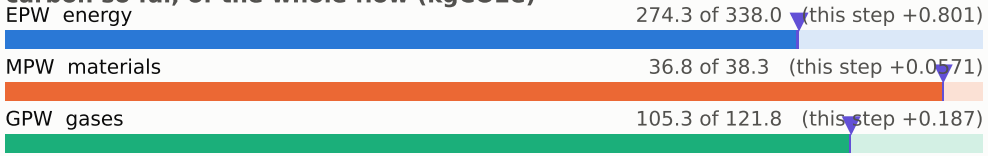

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

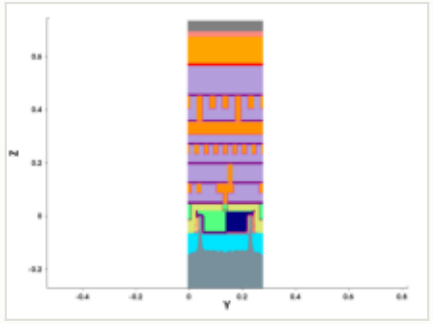

y cut at 0.211 µm

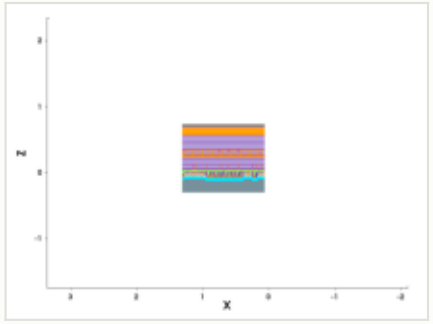

mask for this step

no mask for this step

steps by process area

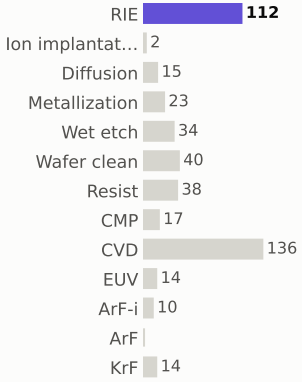

materials deposited (g)

gases emitted (g)

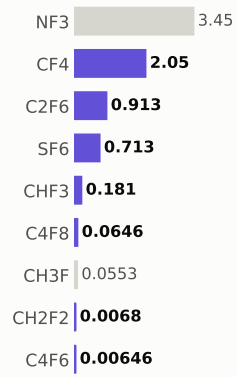

Step #4930: Wafer_clean

etch_strip · Wafer_clean

0.169	416.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



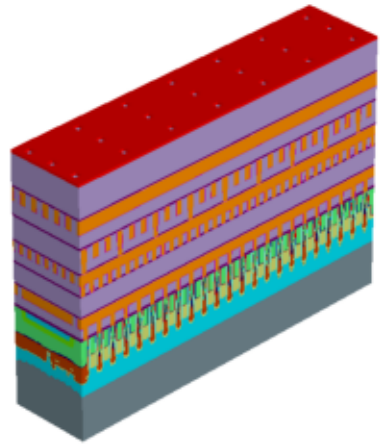

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

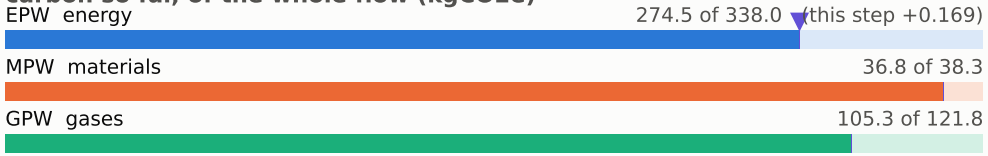

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

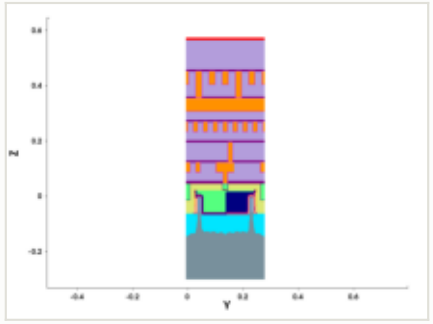

y cut at 0.211 µm

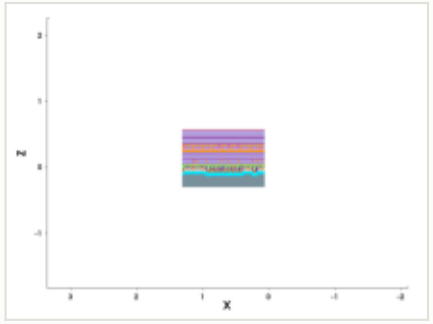

mask for this step

no mask for this step

steps by process area

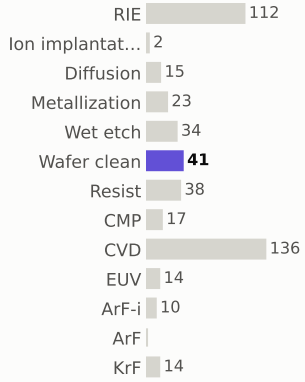

materials deposited (g)



gases emitted (g)



Step #4940: Resist

depo_fill · Resist

0.169	416.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



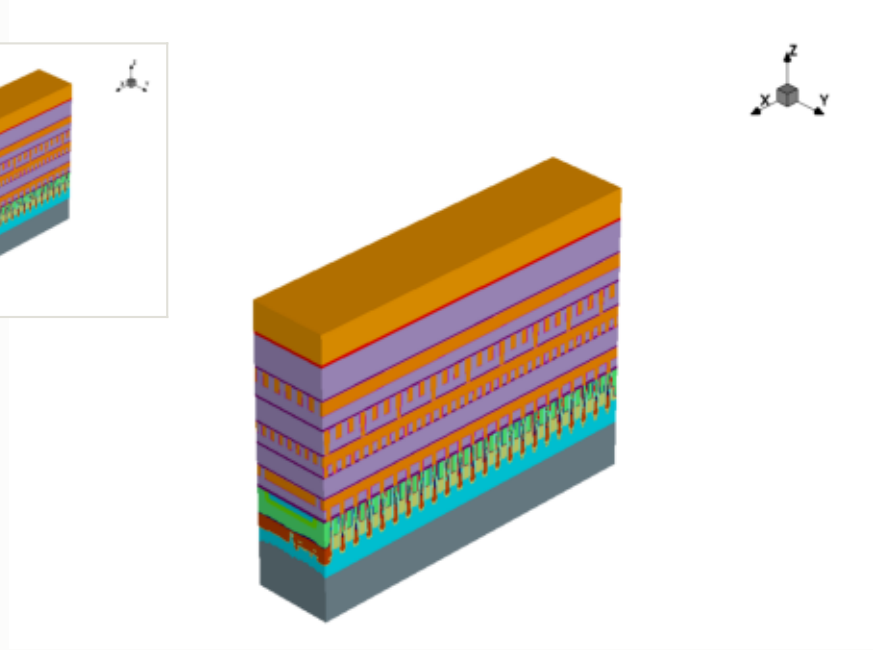

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

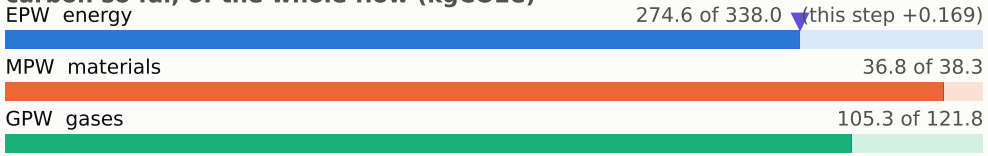

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

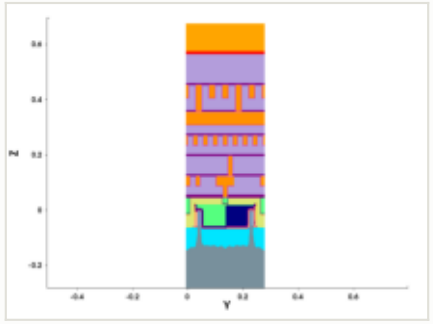

y cut at 0.211 µm

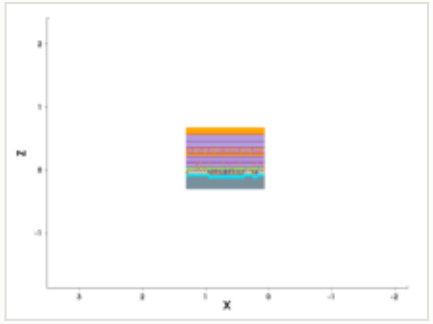

mask for this step

no mask for this step

steps by process area

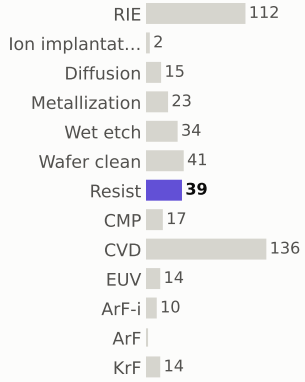

materials deposited (g)

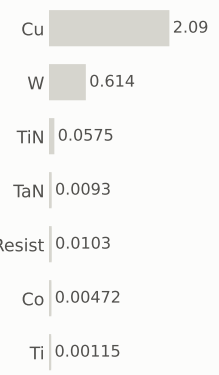

gases emitted (g)



Step #4950: CVD

depo_fill · CVD

1.31	418.0	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



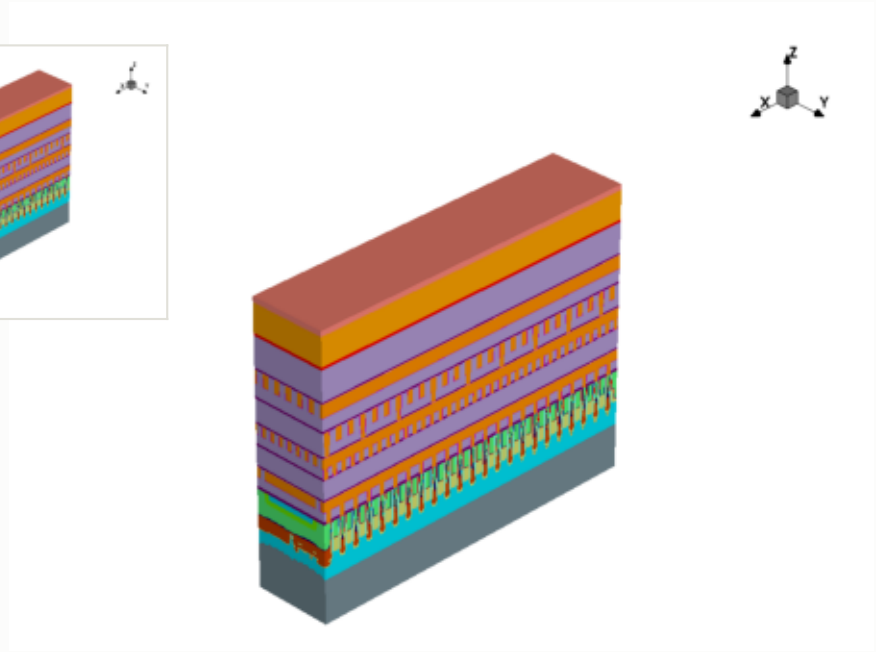

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

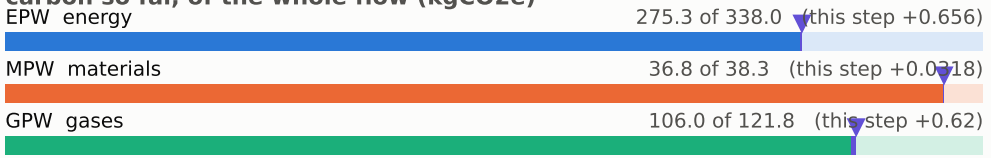

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

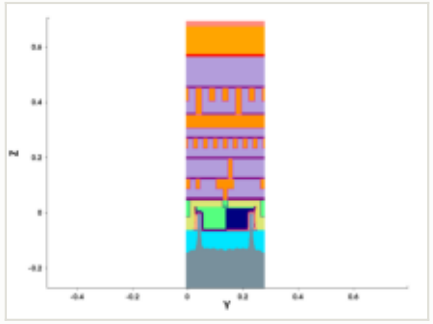

y cut at 0.211 µm

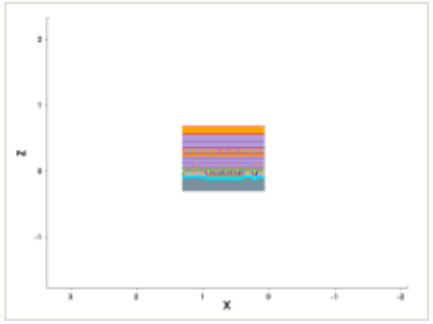

mask for this step

no mask for this step

steps by process area

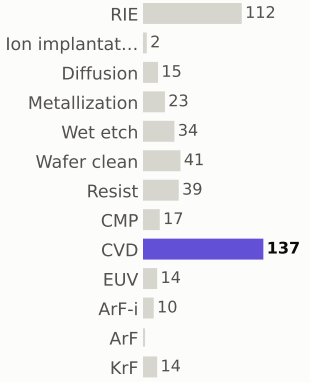

materials deposited (g)

gases emitted (g)



Step #4960: Wafer_clean

clean · Wafer_clean

0.169	418.2	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



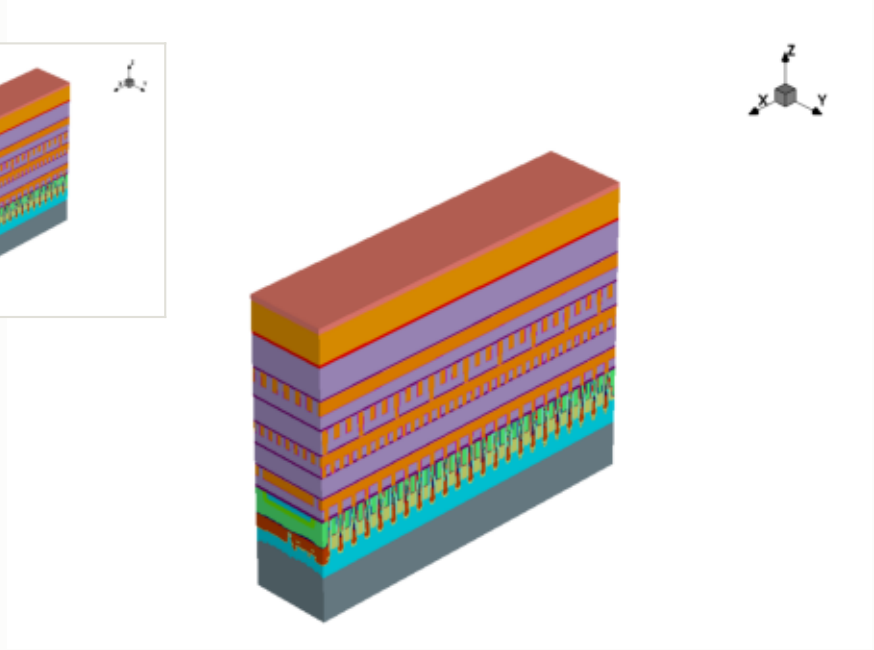

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

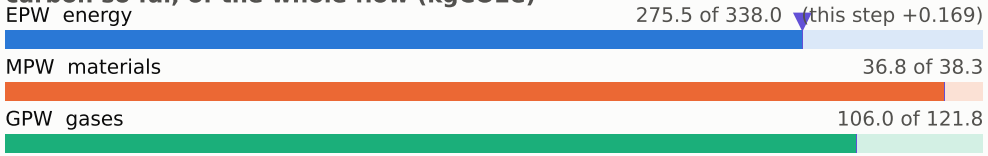

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

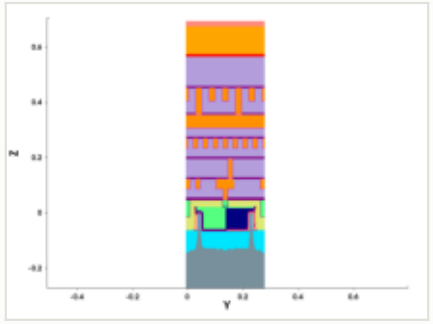

y cut at 0.211 µm

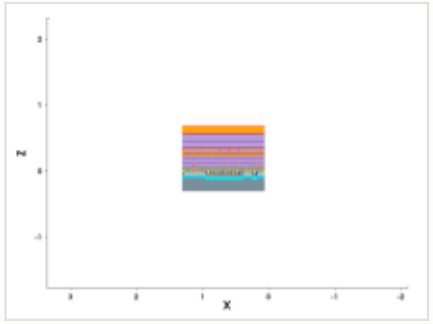

mask for this step

no mask for this step

steps by process area

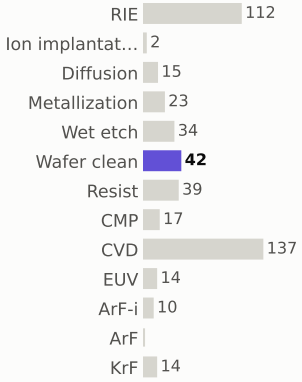

materials deposited (g)

gases emitted (g)



Step #4970: ArF-i

litho_patterning · ArF-i

0.217	418.4	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



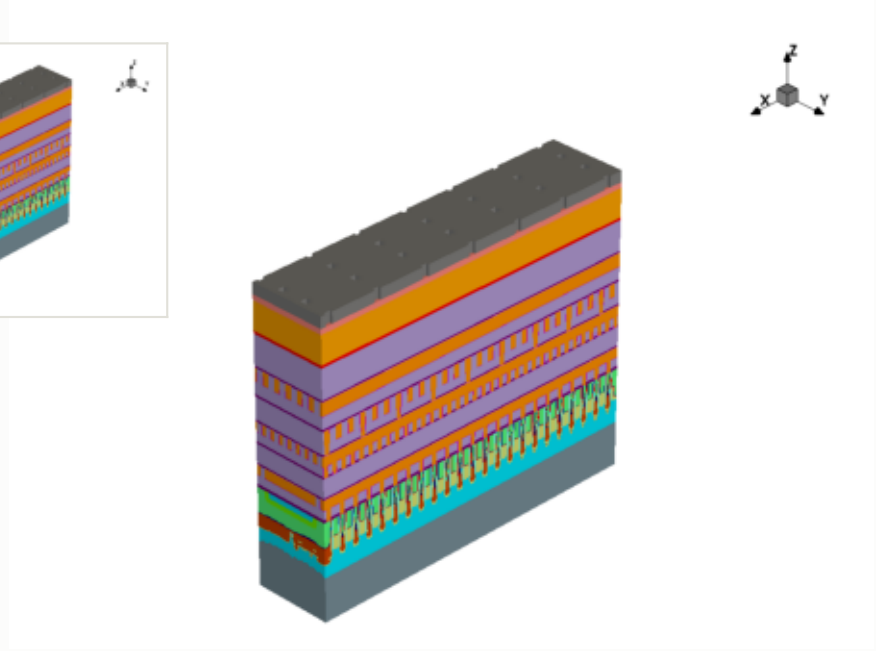

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

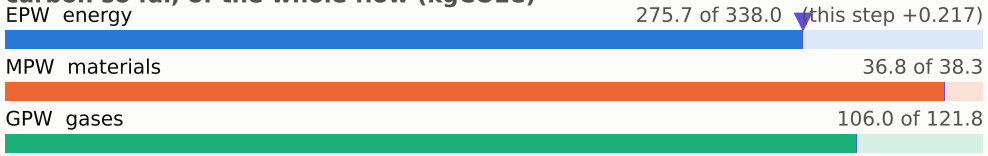

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

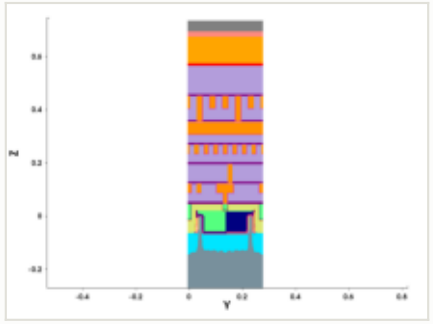

y cut at 0.211 µm

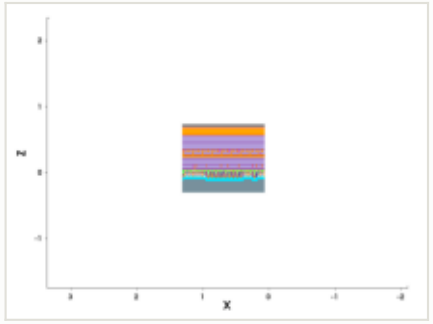

mask: layer 10552:0 (GDSII)

steps by process area

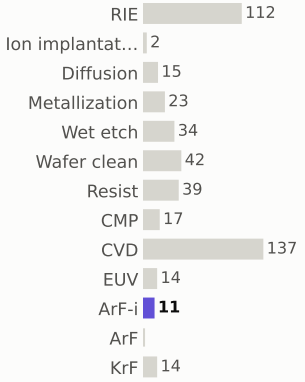

materials deposited (g)

gases emitted (g)



Step #4980: RIE

etch_anisotropic · RIE

1.04	419.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



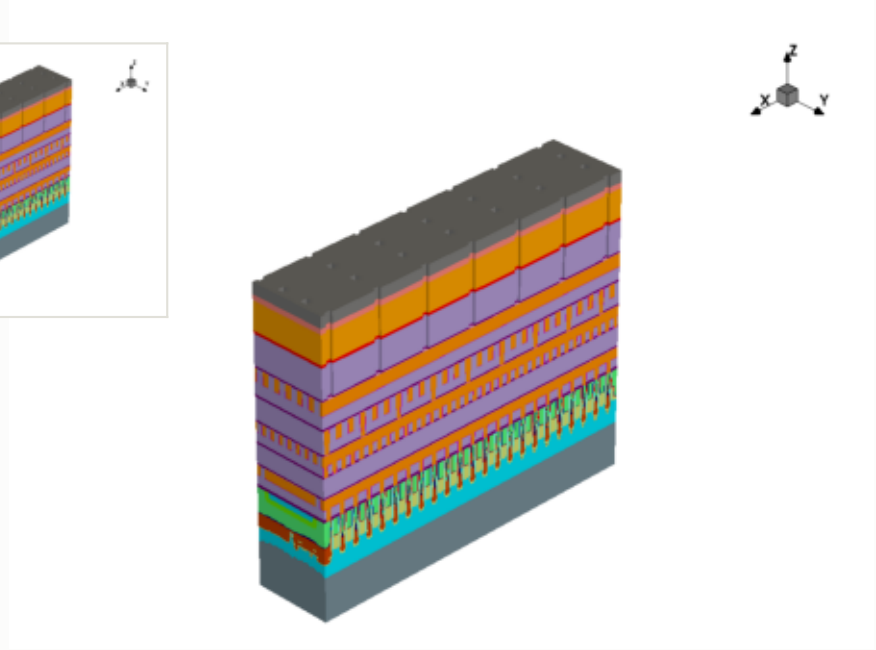

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

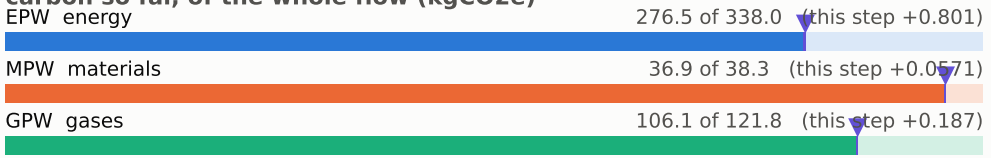

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

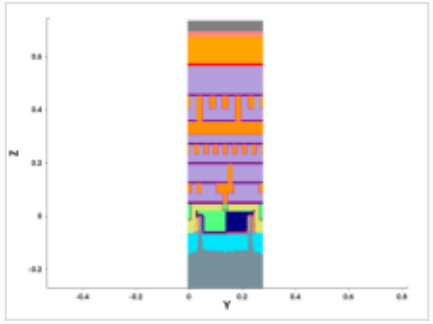

y cut at 0.211 µm

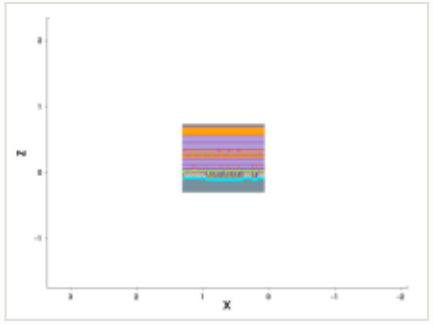

mask for this step

no mask for this step

steps by process area

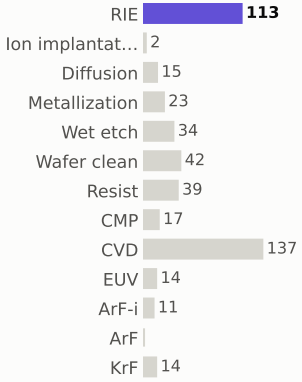

materials deposited (g)

gases emitted (g)



Step #4990: Wafer_clean

etch_strip · Wafer_clean

0.169	419.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



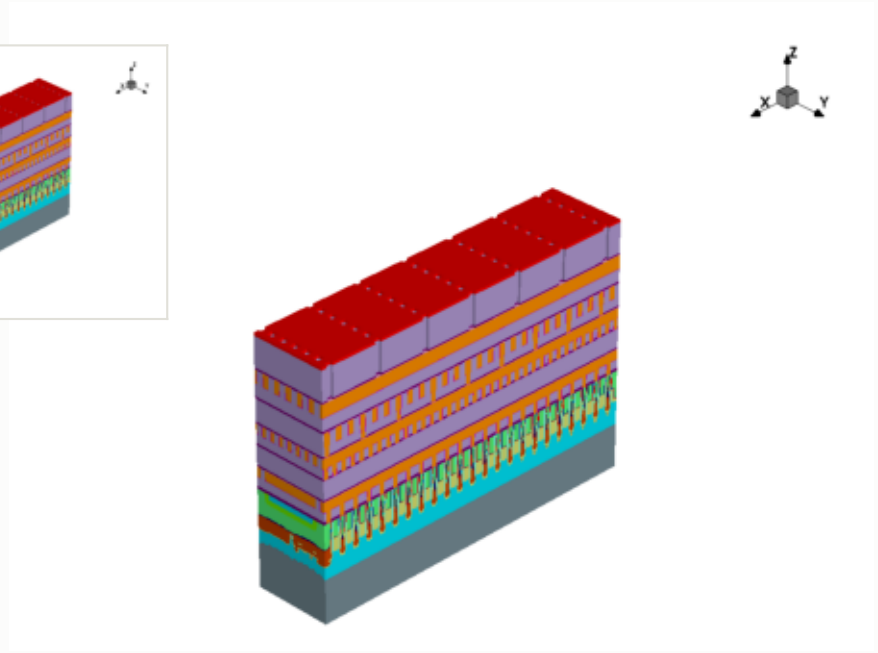

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

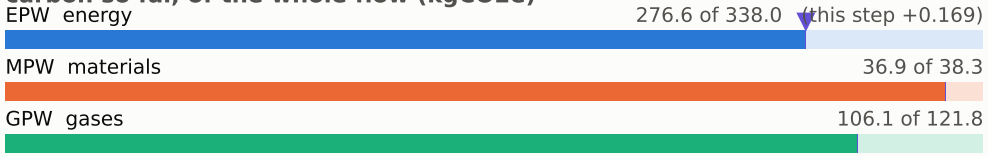

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

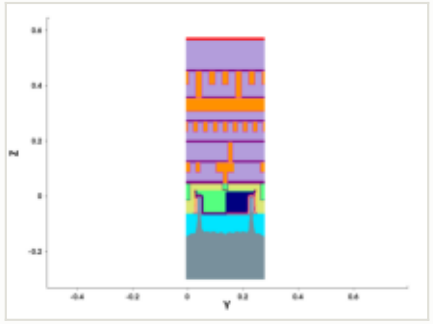

y cut at 0.211 µm

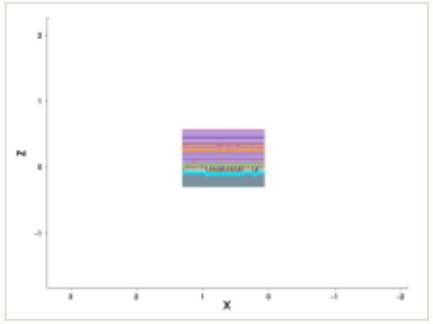

mask for this step

no mask for this step

steps by process area

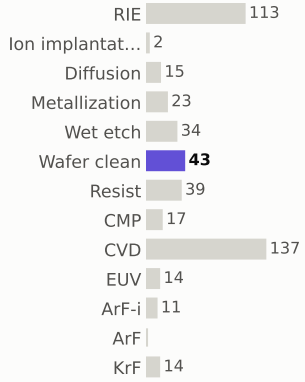

materials deposited (g)



gases emitted (g)



Step #5000: Metallization

depo_ellipsoidal · Metallization

1.2	420.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



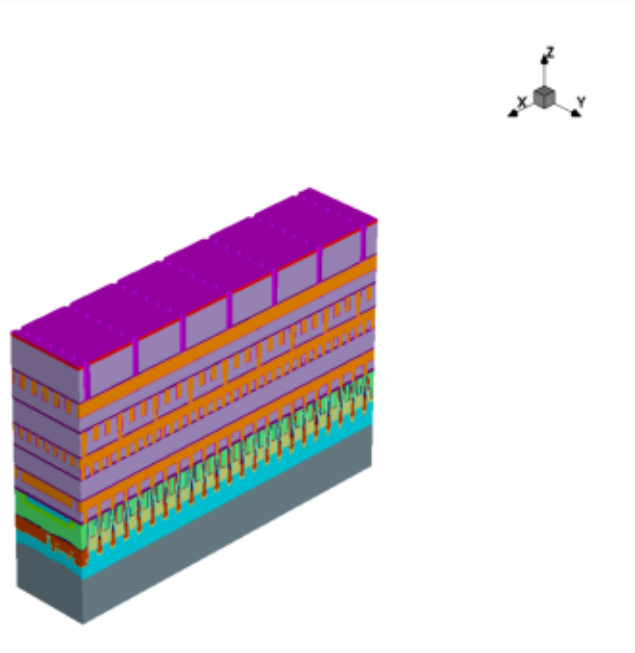

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

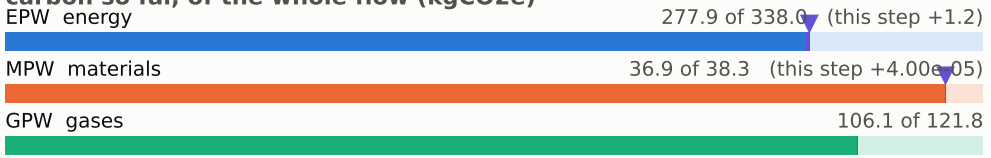

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

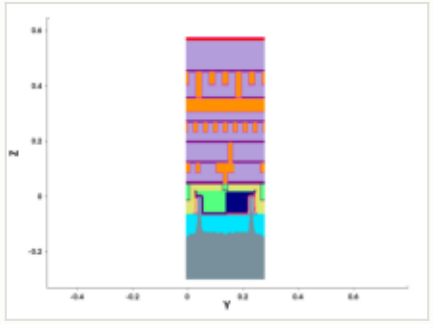

y cut at 0.211 µm

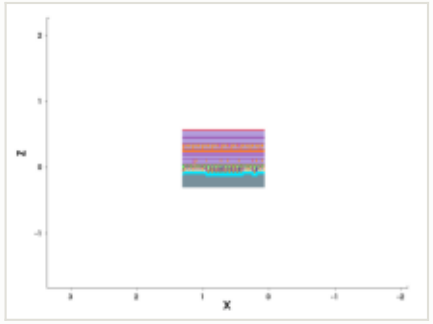

mask for this step

no mask for this step

steps by process area

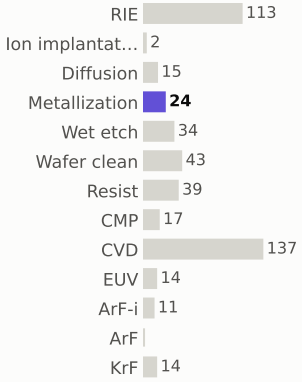

materials deposited (g)

gases emitted (g)



Step #5010: Metallization

depo_fill · Metallization

1.21	422.1	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



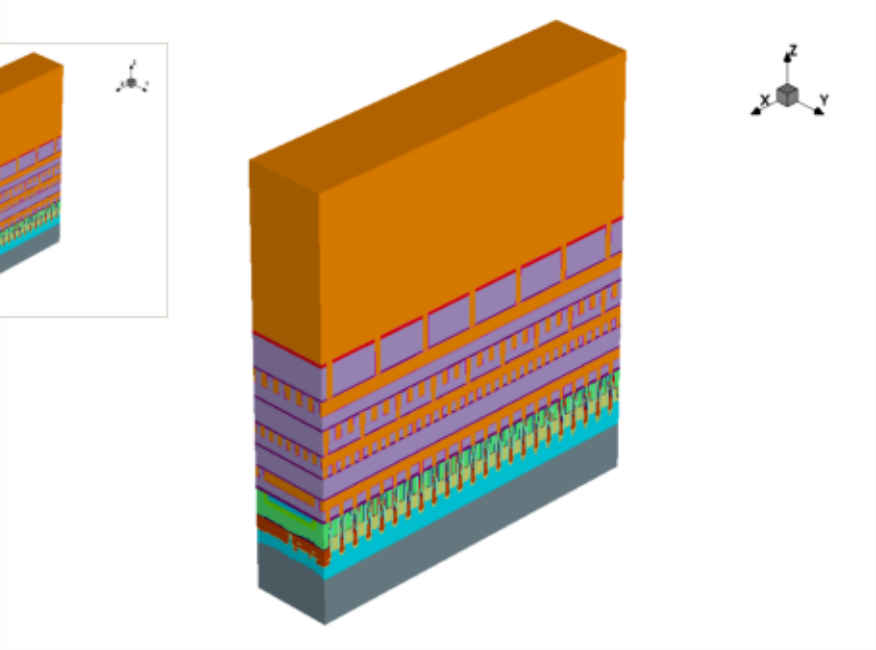

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

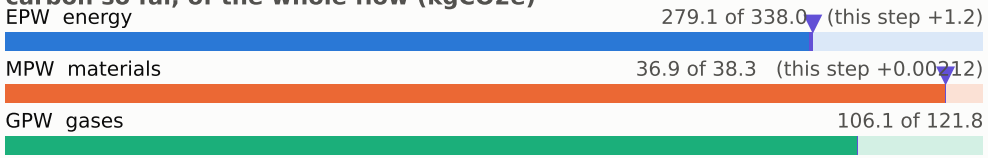

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

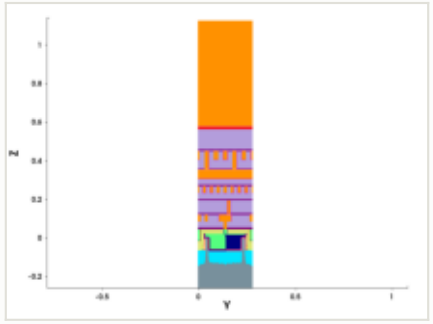

y cut at 0.211 µm

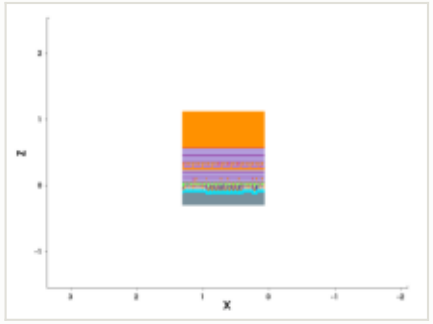

mask for this step

no mask for this step

steps by process area

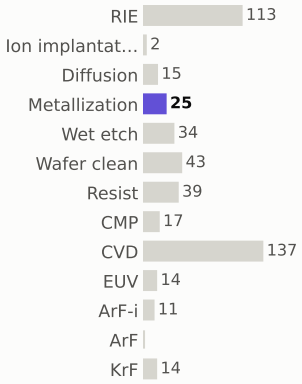

materials deposited (g)



gases emitted (g)



Step #5020: Diffusion

treatment · Diffusion

0.801	422.9	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



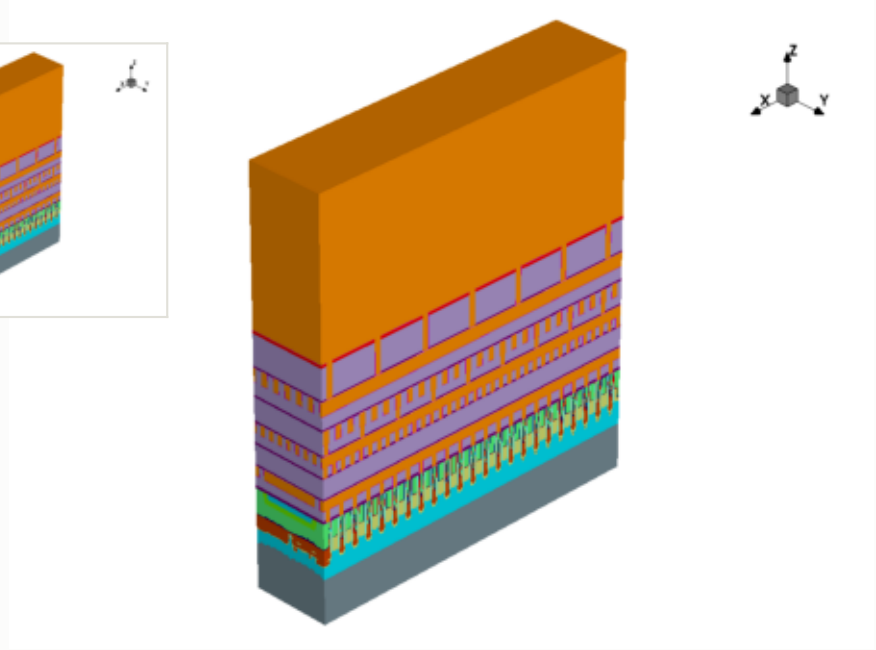

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

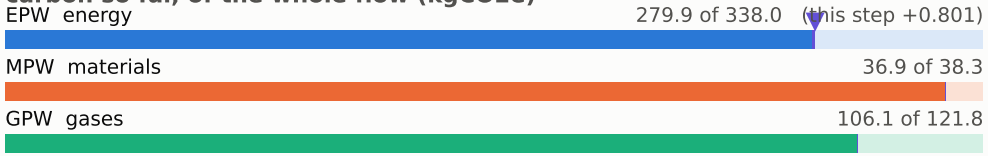

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

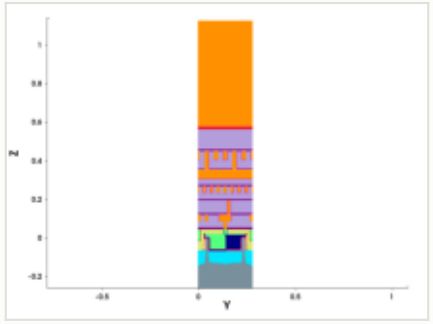

y cut at 0.211 µm

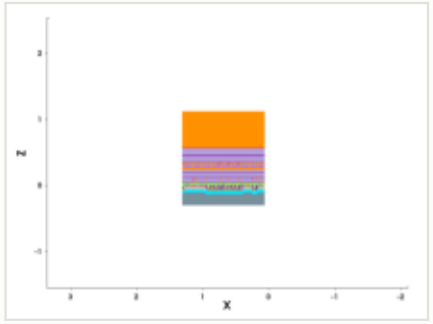

mask for this step

no mask for this step

steps by process area

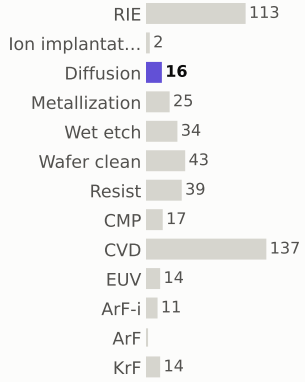

materials deposited (g)



gases emitted (g)



Step #5030: CMP

etch_cmp · CMP

0.169	423.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



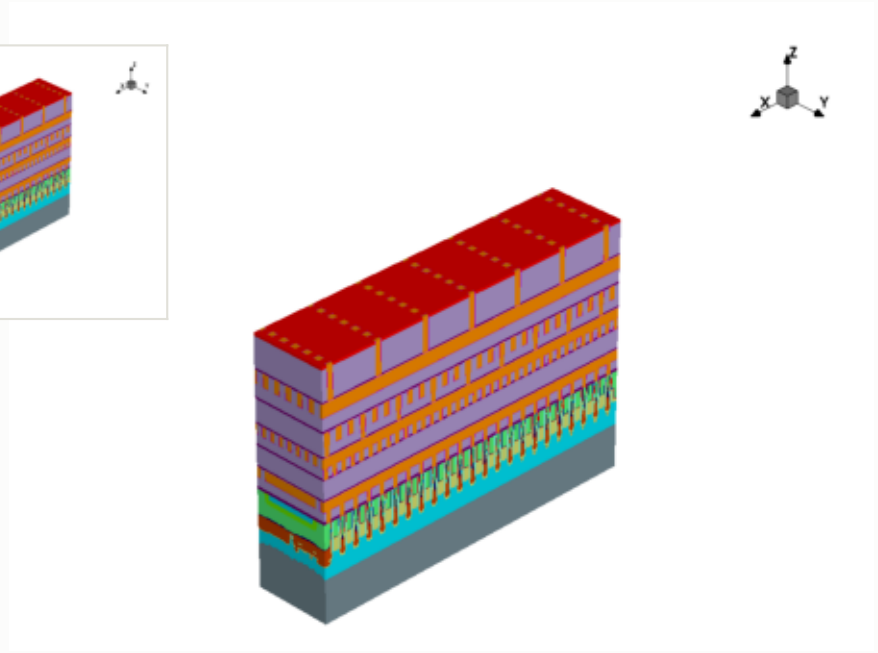

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

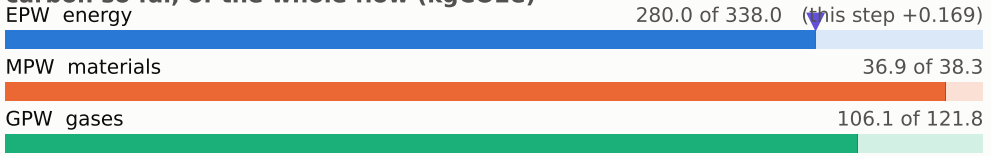

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

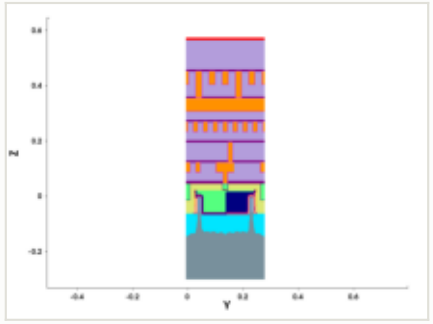

y cut at 0.211 µm

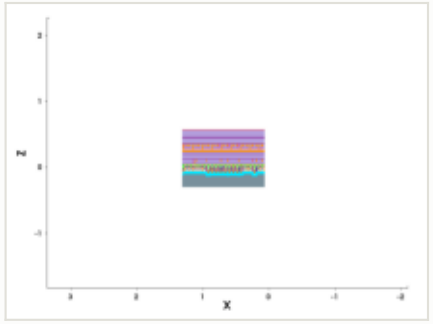

mask for this step

no mask for this step

steps by process area

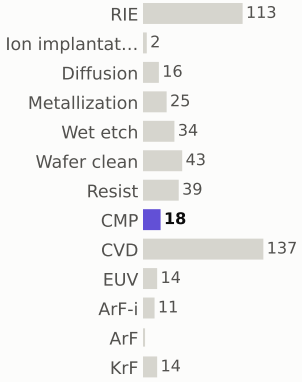

materials deposited (g)

gases emitted (g)



Step #5040: CVD

depo_fill · CVD

1.31	424.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



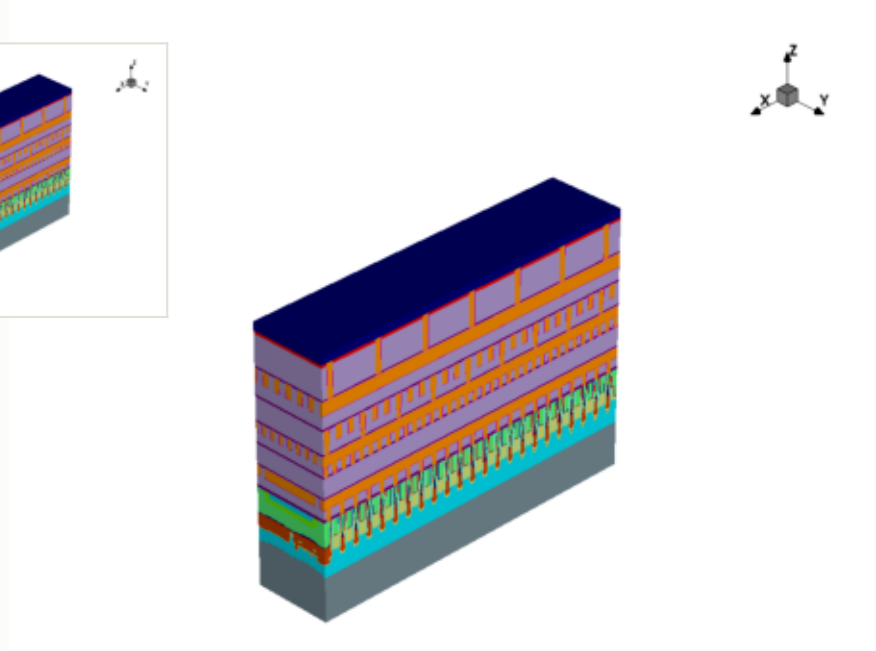

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0322 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

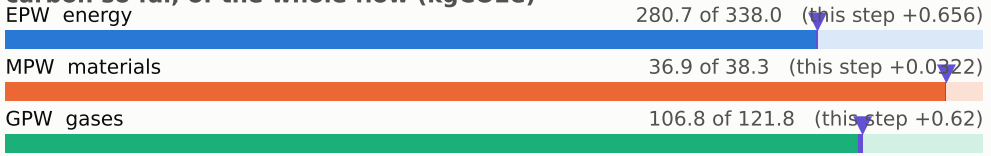

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

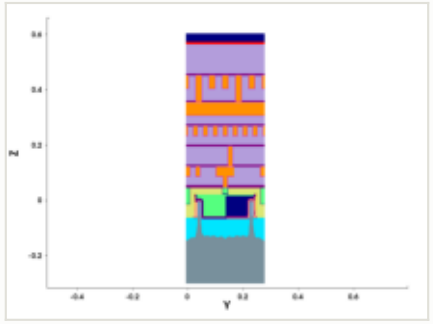

y cut at 0.211 µm

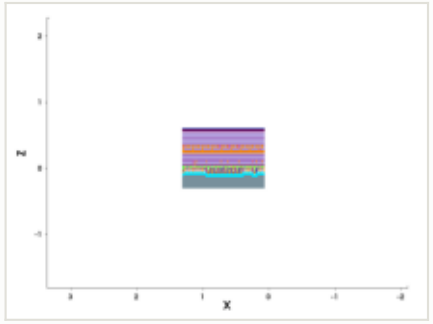

mask for this step

no mask for this step

steps by process area

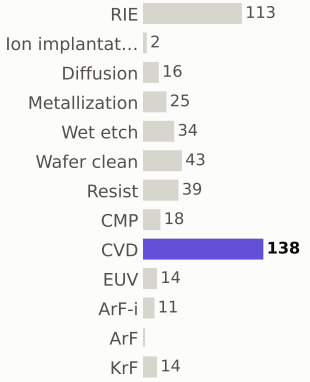

materials deposited (g)



gases emitted (g)



Step #5050: Wafer_clean

clean · Wafer_clean

0.169	424.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



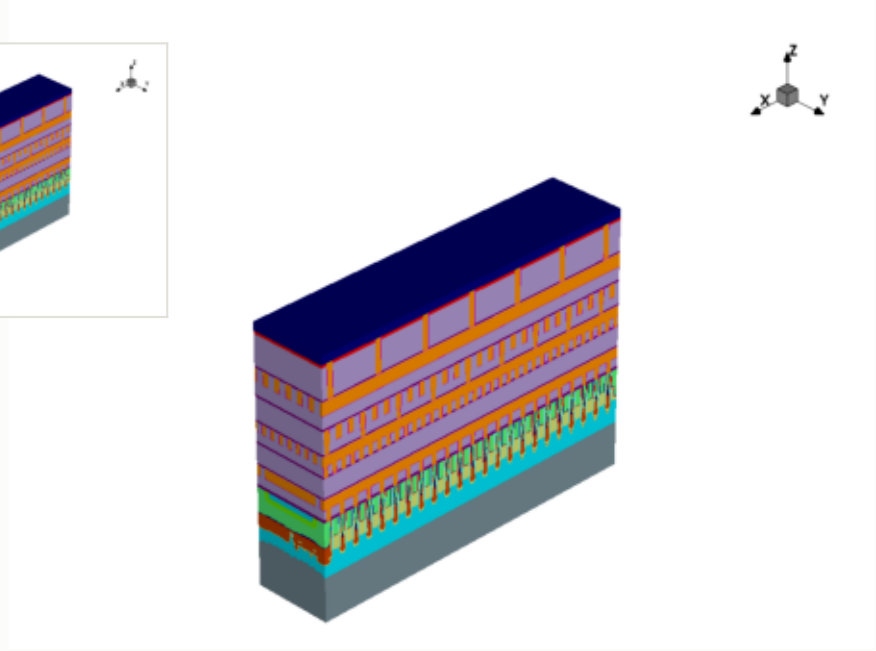

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

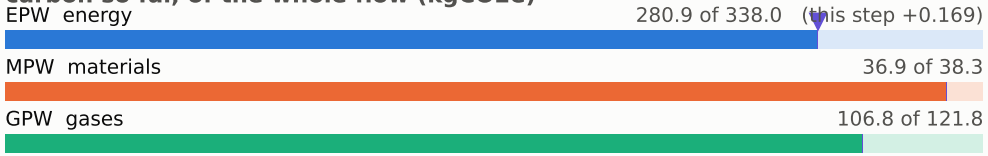

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

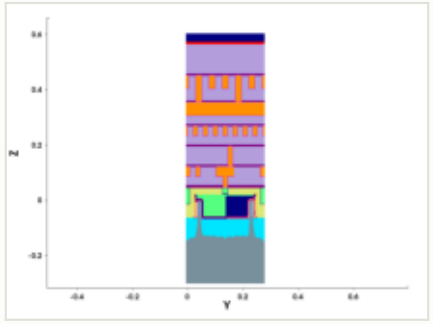

y cut at 0.211 µm

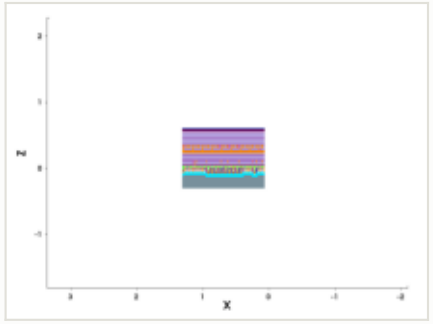

mask for this step

no mask for this step

steps by process area

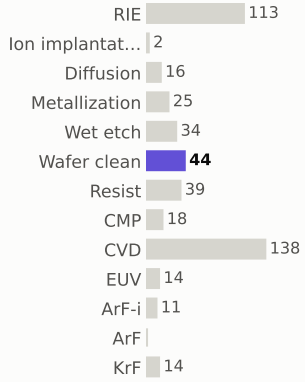

materials deposited (g)

gases emitted (g)



Step #5060: CVD

depo_fill · CVD

1.31	425.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



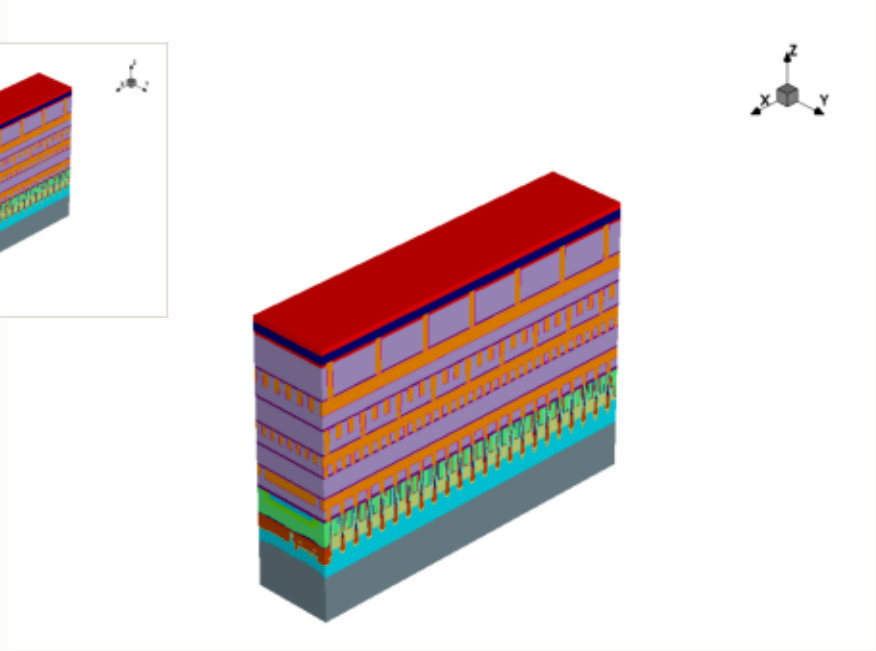

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

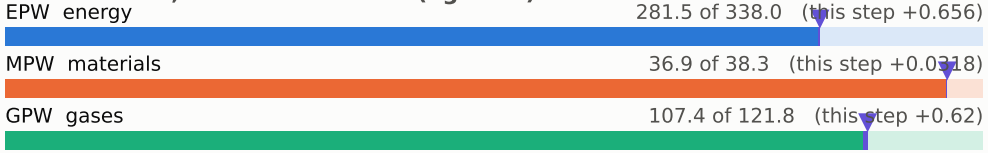

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

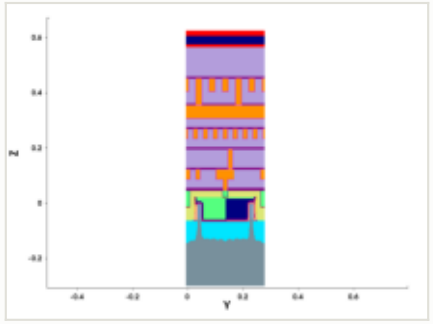

y cut at 0.211 µm

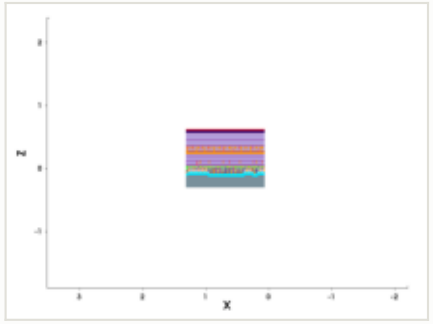

mask for this step

no mask for this step

steps by process area

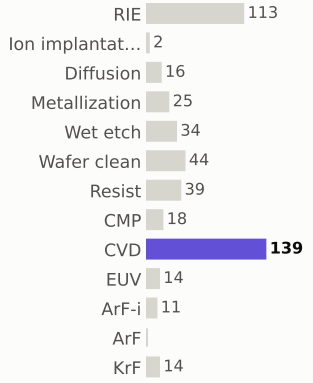

materials deposited (g)

gases emitted (g)



Step #5070: CVD

depo_fill · CVD

1.31	427.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



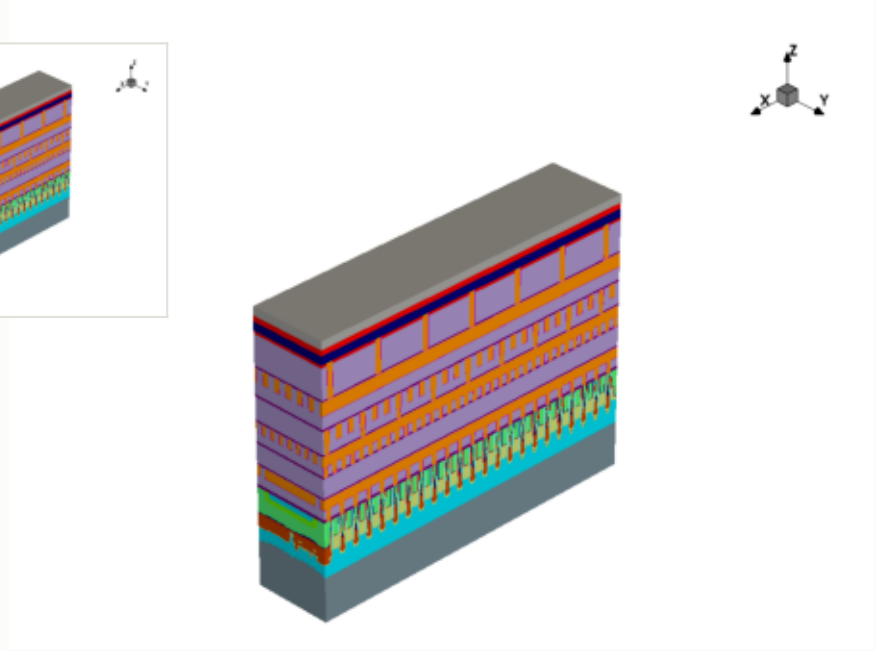

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

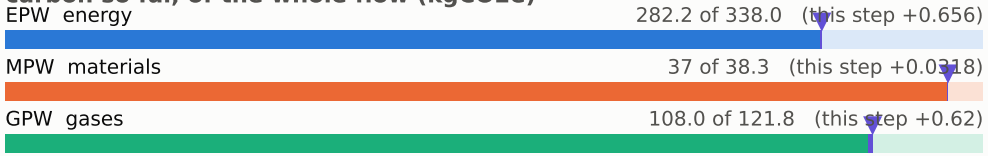

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

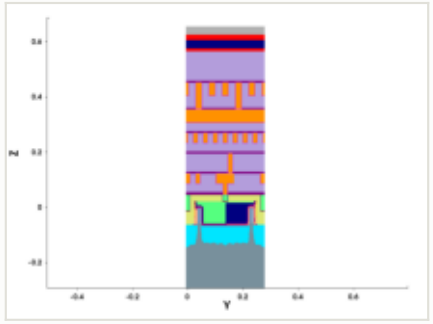

y cut at 0.211 µm

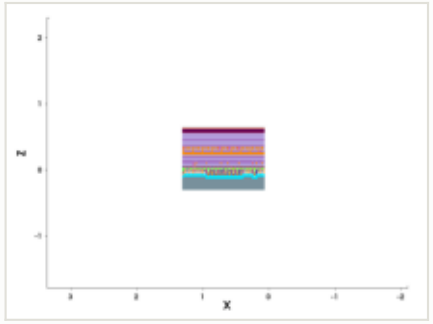

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #5080: Resist

depo_fill · Resist

0.169	427.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



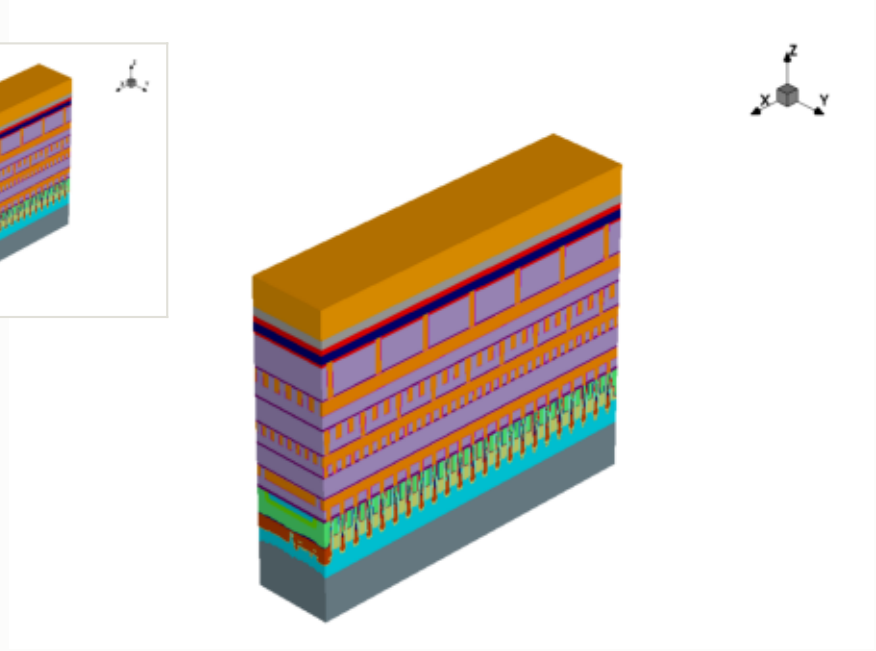

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

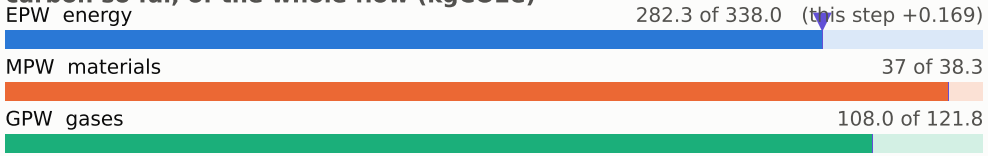

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

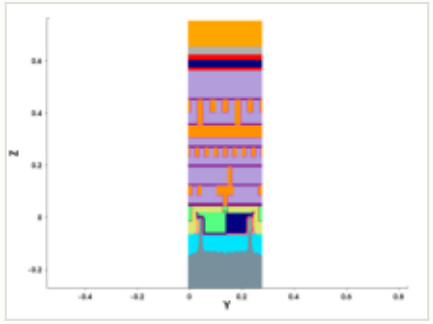

y cut at 0.211 µm

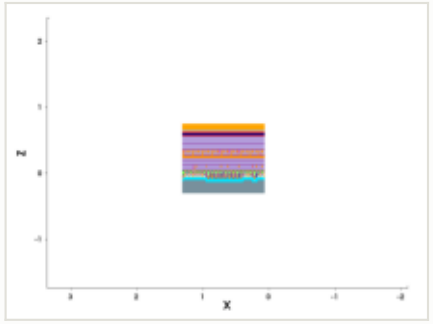

mask for this step

no mask for this step

steps by process area

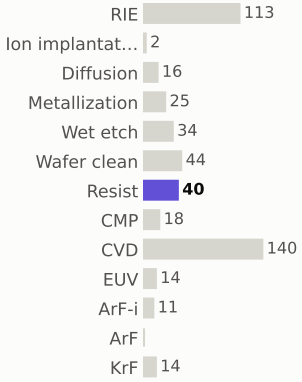

materials deposited (g)

gases emitted (g)



Step #5090: CVD

depo_fill · CVD

1.31	428.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



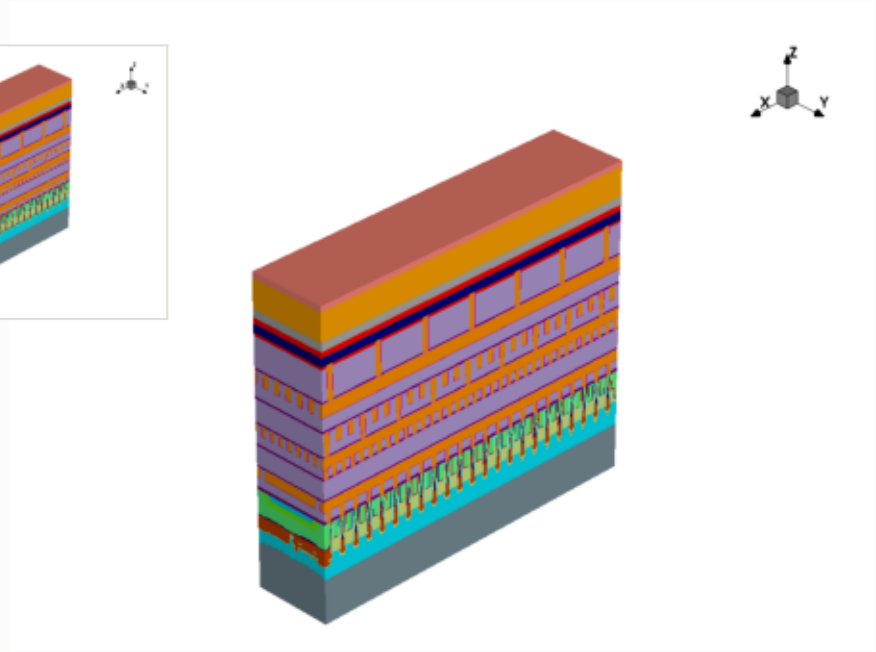

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

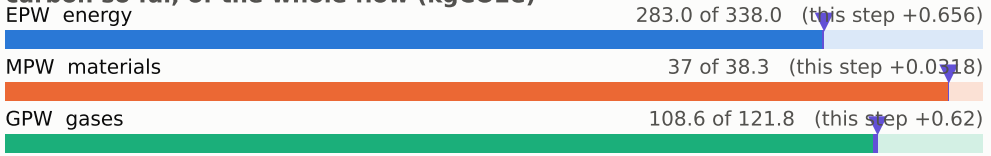

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

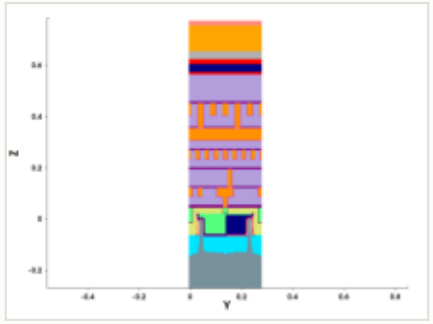

y cut at 0.211 µm

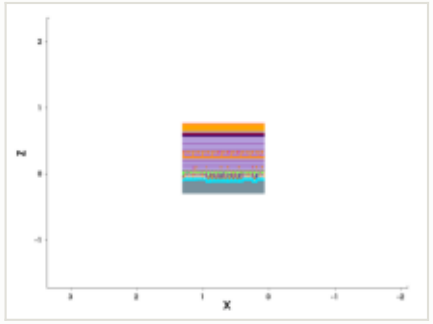

mask for this step

no mask for this step

steps by process area

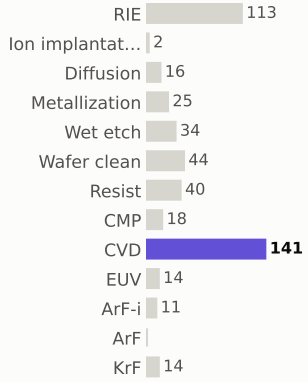

materials deposited (g)

gases emitted (g)



Step #5100: Wafer_clean

clean · Wafer_clean

0.169	428.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



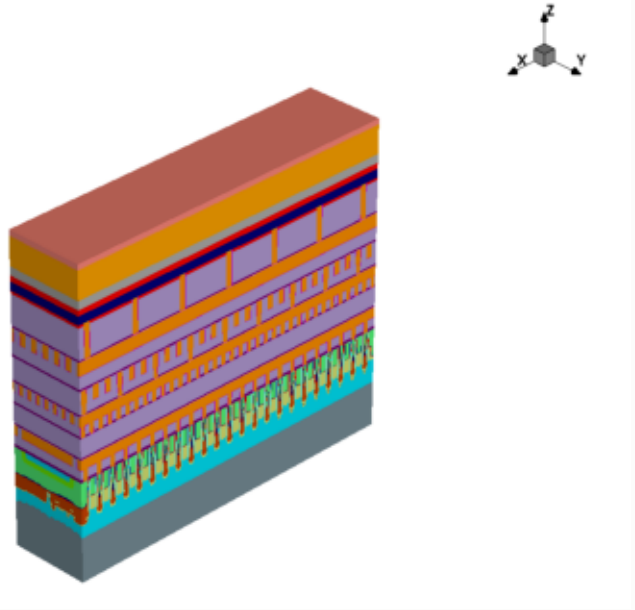

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

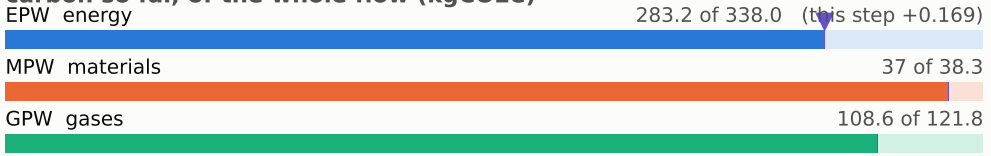

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

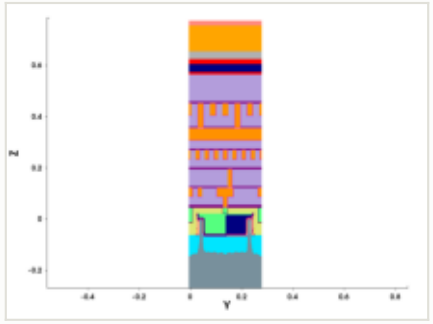

y cut at 0.211 µm

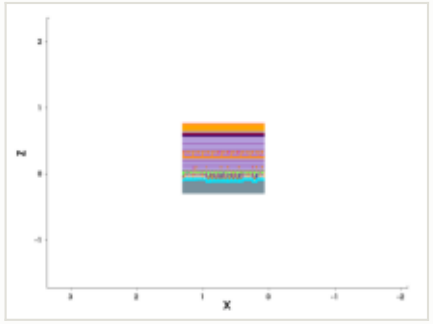

mask for this step

no mask for this step

steps by process area

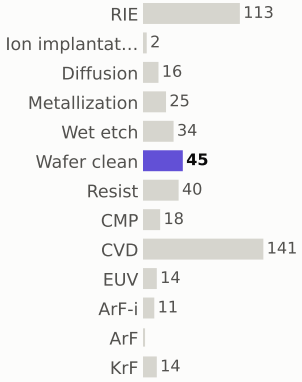

materials deposited (g)

gases emitted (g)



Step #5110: ArF-i

litho_patterning · ArF-i

0.217	429.0	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



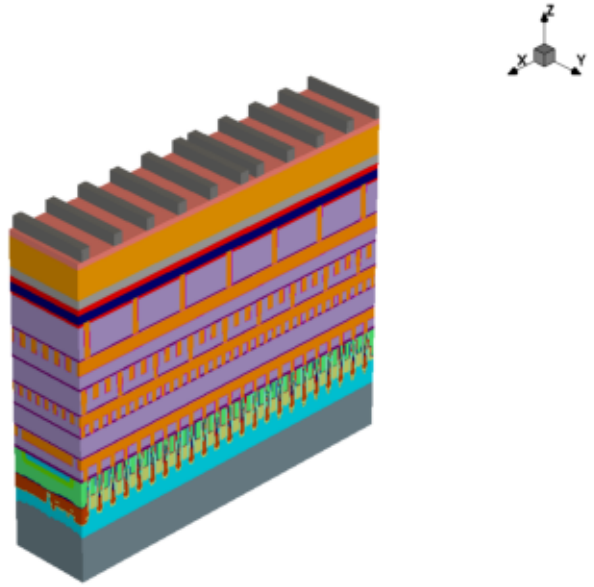

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

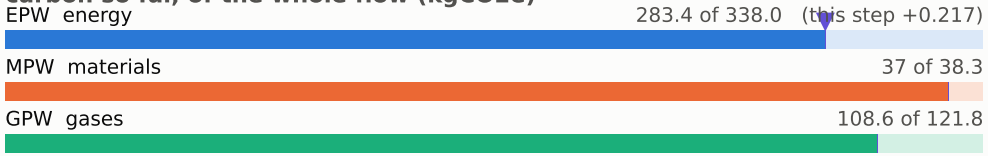

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

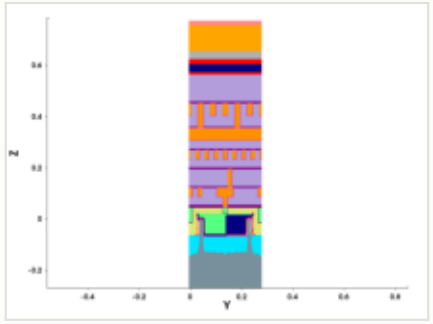

y cut at 0.211 µm

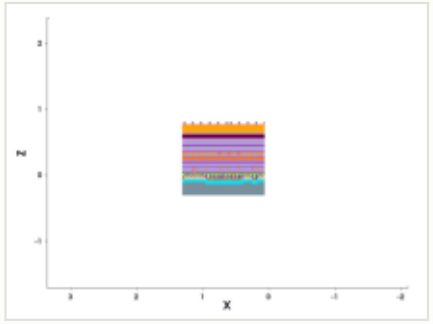

mask: layer 10601:0, positive (GDSII)

steps by process area

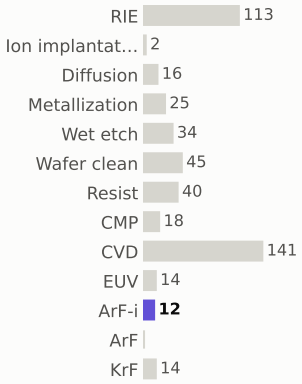

materials deposited (g)

gases emitted (g)



Step #5120: Ion_implantation

treatment · Ion_implantation

0.801	429.8	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



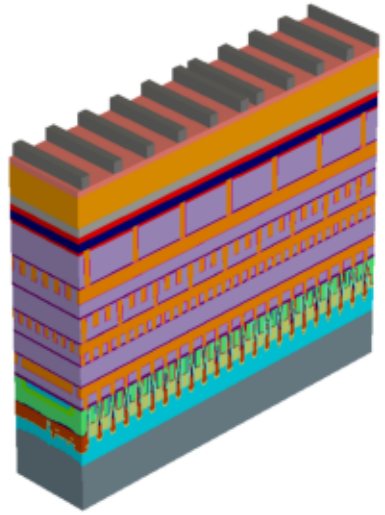

x cut at 0.677 µm

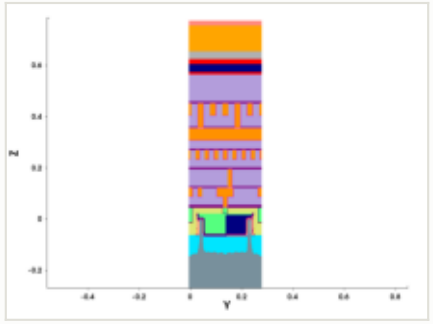

y cut at 0.211 µm

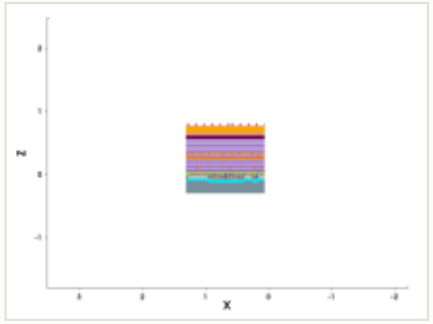

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

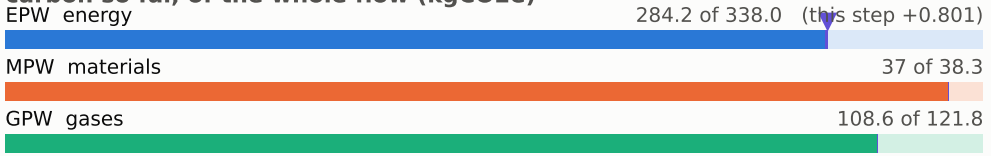

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

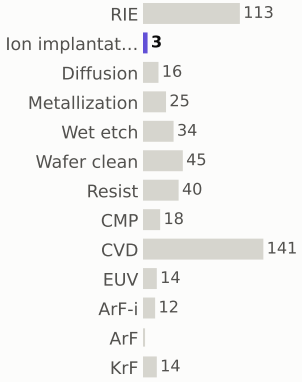

materials deposited (g)

gases emitted (g)



Step #5130: RIE

etch_anisotropic · RIE

1.04	430.8	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



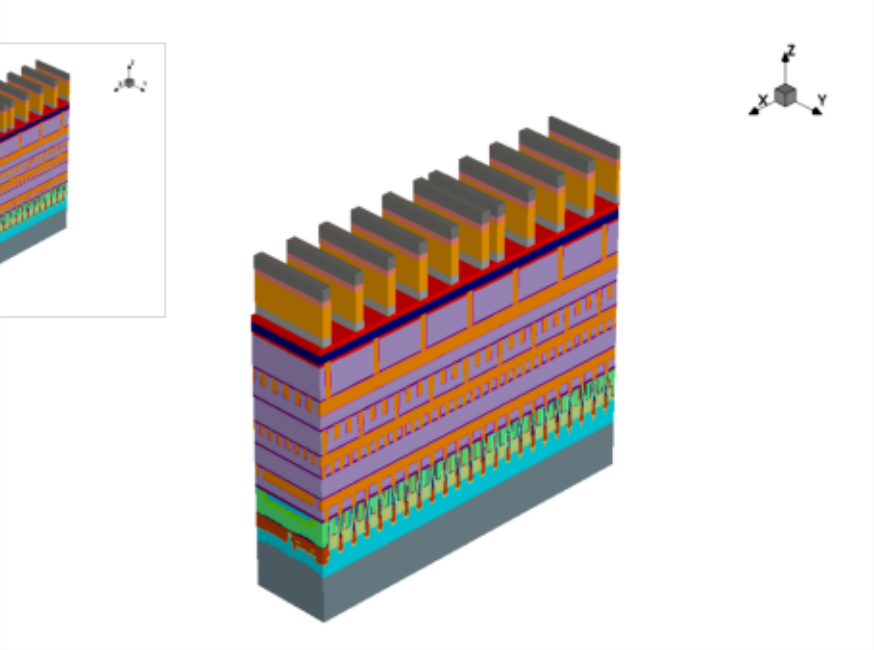

x cut at 0.677 µm

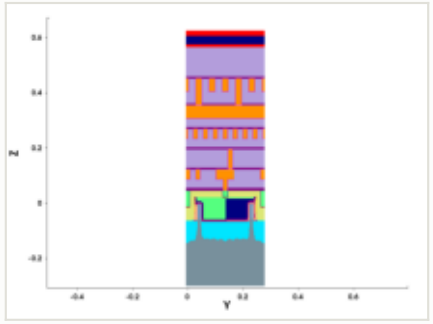

y cut at 0.211 µm

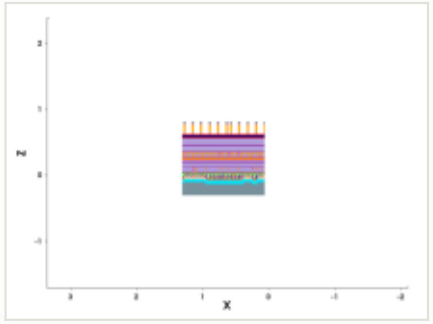

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

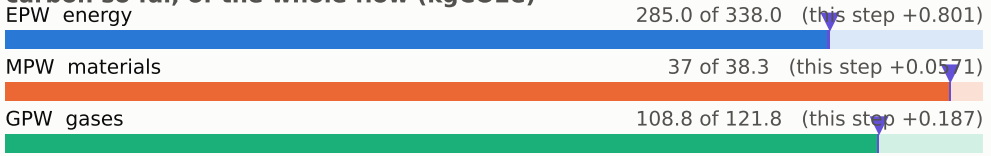

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

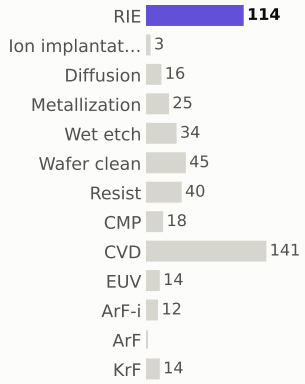

materials deposited (g)

gases emitted (g)



Step #5140: Wafer_clean

etch_strip · Wafer_clean

0.169	431.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



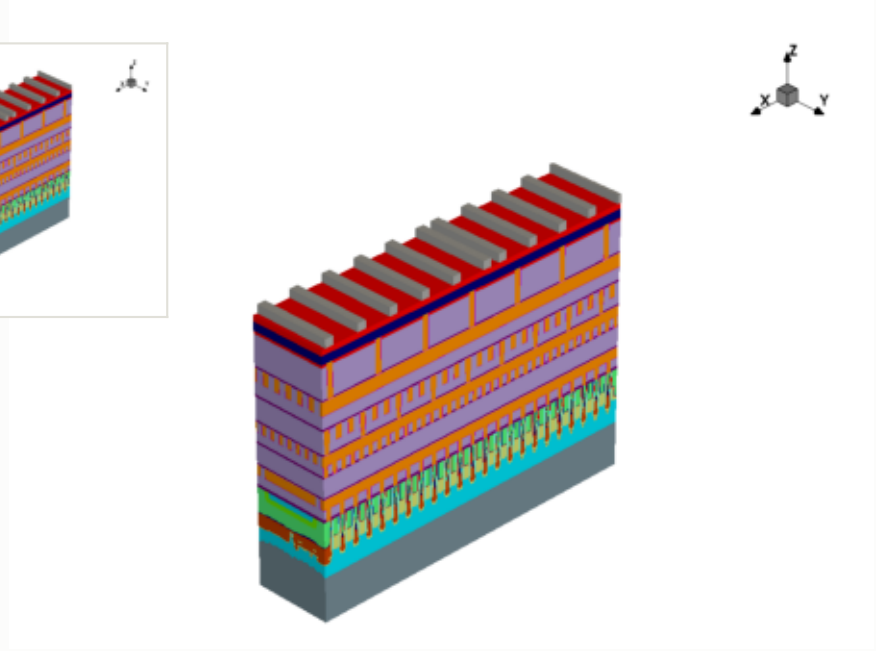

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

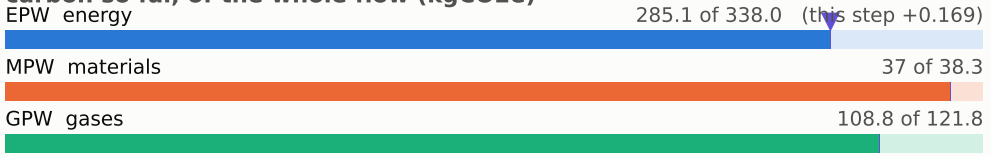

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

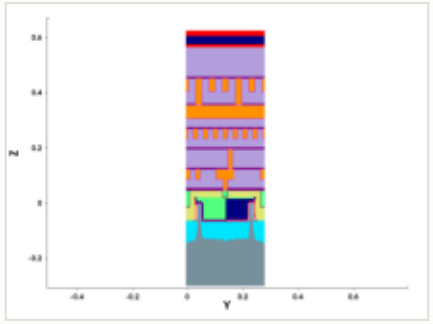

y cut at 0.211 µm

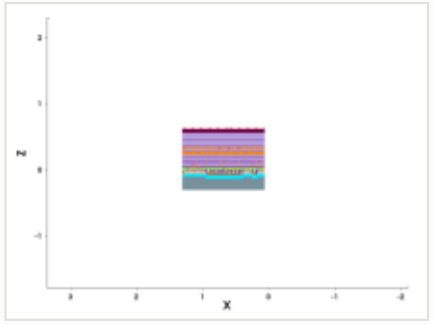

mask for this step

no mask for this step

steps by process area

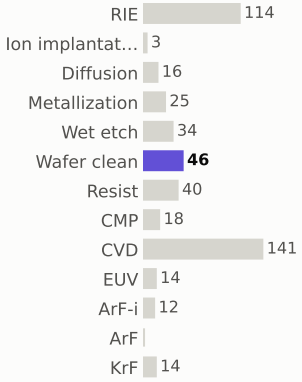

materials deposited (g)

gases emitted (g)



Step #5150: CVD

depo_isotropic · CVD

1.31	432.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



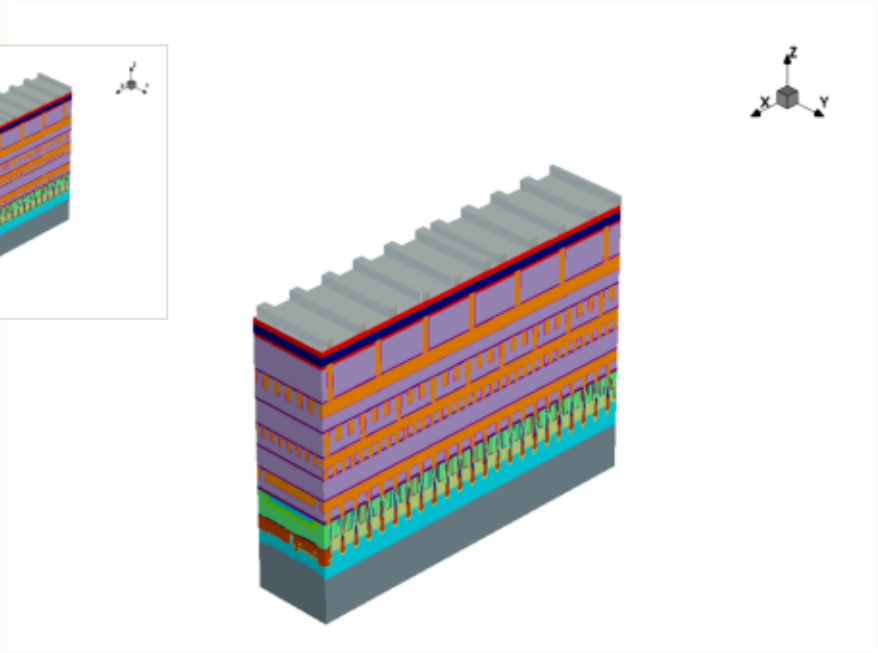

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

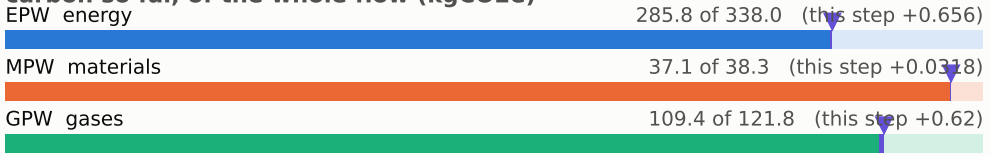

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

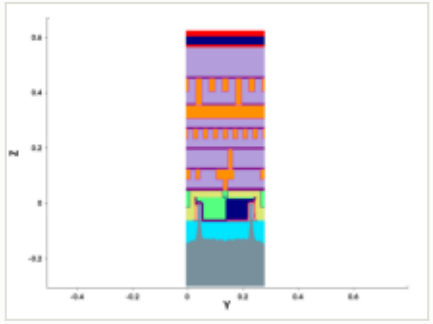

y cut at 0.211 µm

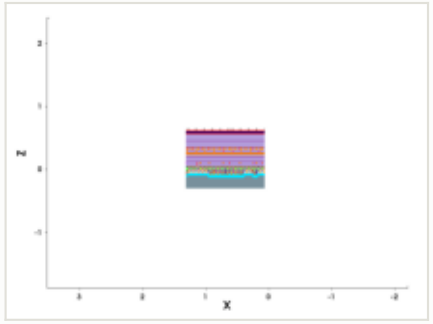

mask for this step

no mask for this step

steps by process area

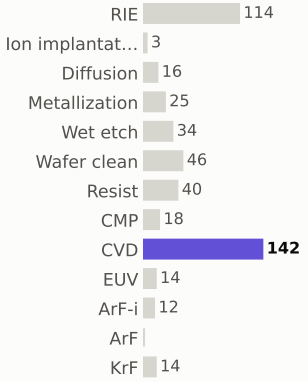

materials deposited (g)



gases emitted (g)



Step #5160: RIE

etch_anisotropic · RIE

1.04	433.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



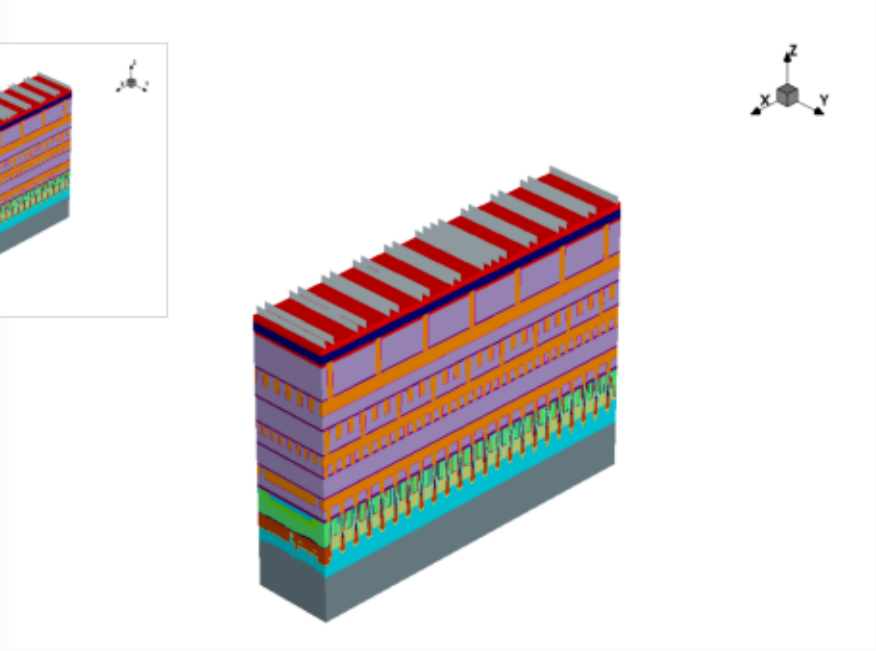

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

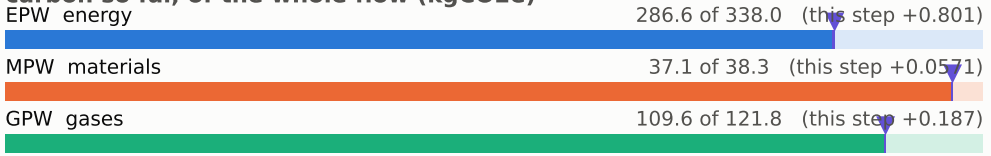

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

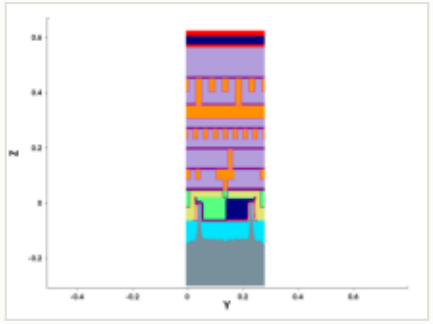

y cut at 0.211 µm

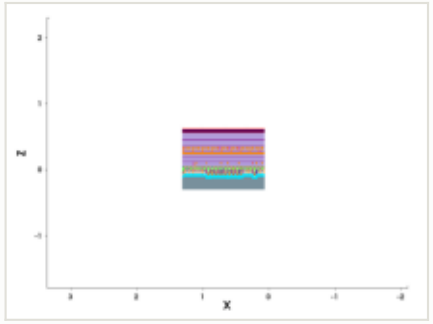

mask for this step

no mask for this step

steps by process area

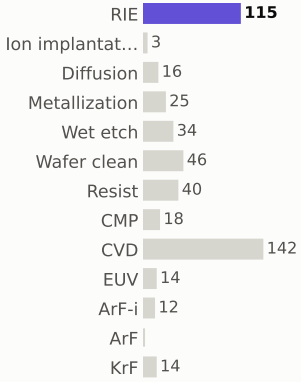

materials deposited (g)

gases emitted (g)



Step #5170: Wafer_clean

etch_strip · Wafer_clean

0.169	433.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



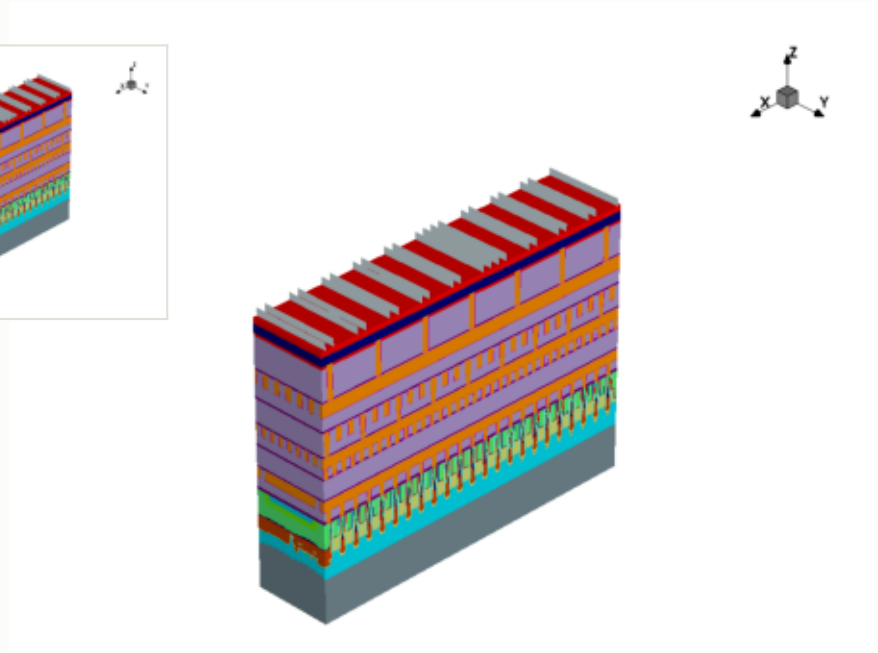

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

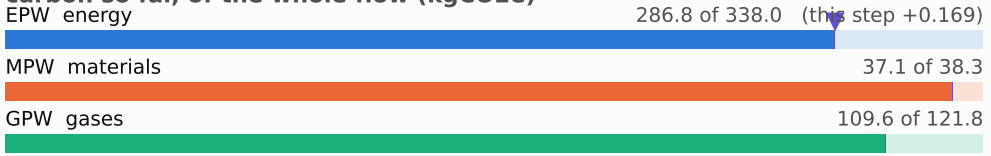

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

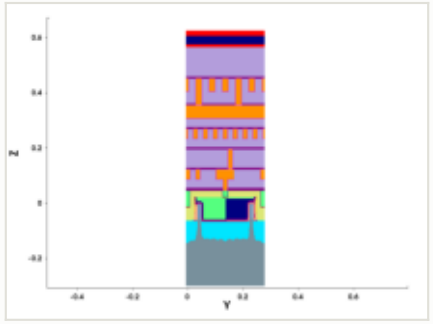

y cut at 0.211 µm

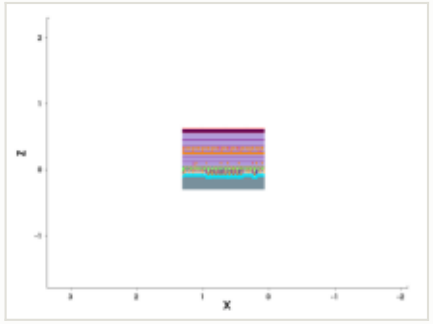

mask for this step

no mask for this step

steps by process area

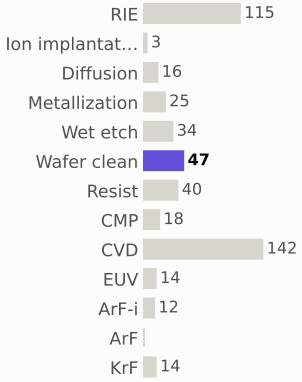

materials deposited (g)

gases emitted (g)



Step #5180: Resist

depo_fill · Resist

0.169	433.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



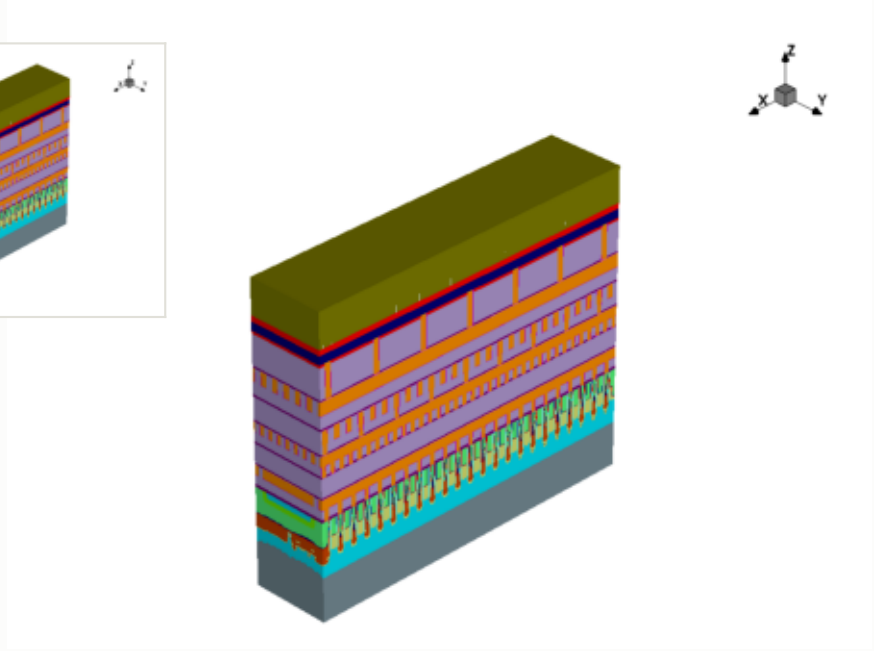

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

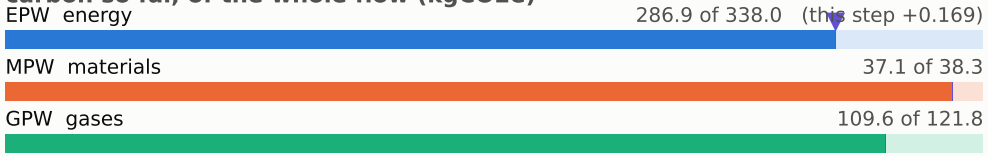

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

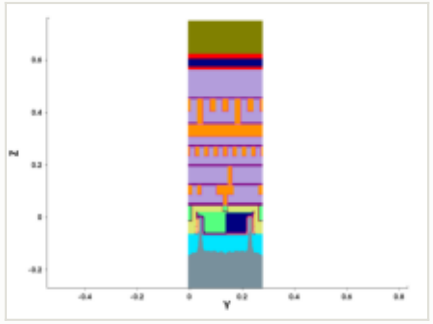

y cut at 0.211 µm

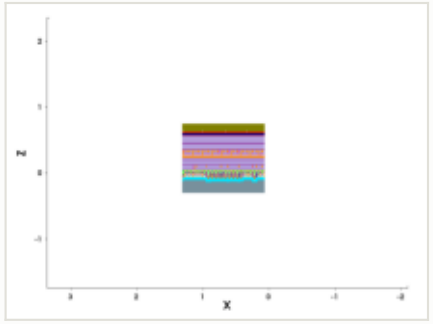

mask for this step

no mask for this step

steps by process area

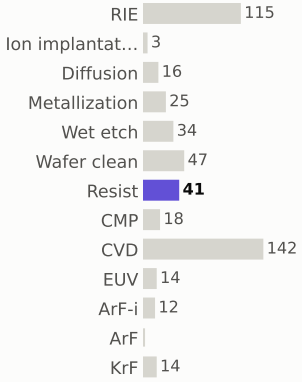

materials deposited (g)

gases emitted (g)



Step #5190: Wafer_clean

clean · Wafer_clean

0.169	433.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



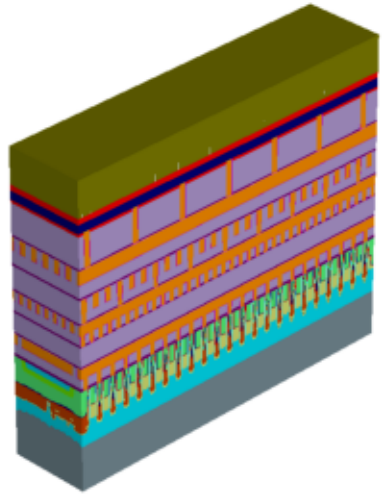

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

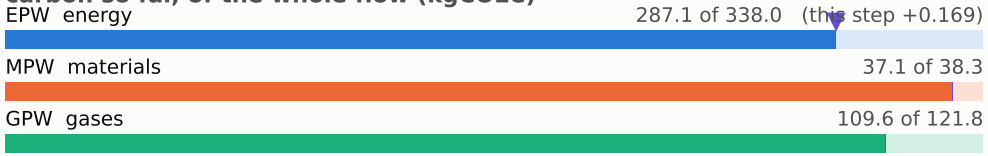

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

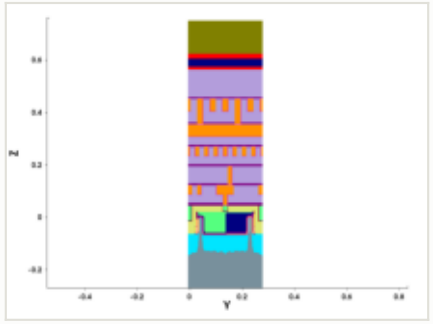

y cut at 0.211 µm

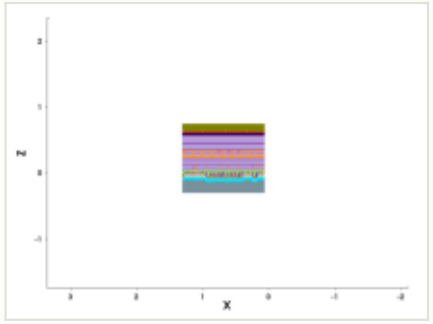

mask for this step

no mask for this step

steps by process area

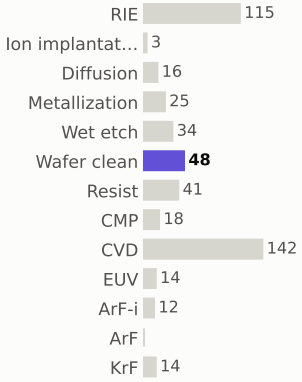

materials deposited (g)

gases emitted (g)

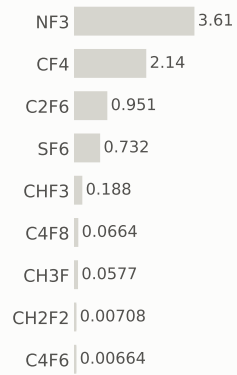

Step #5200: ArF-i

litho_patterning · ArF-i

0.217	434.1	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



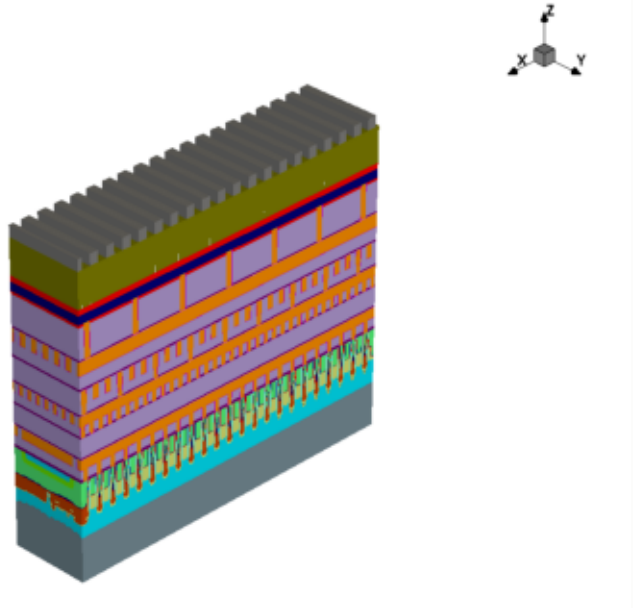

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

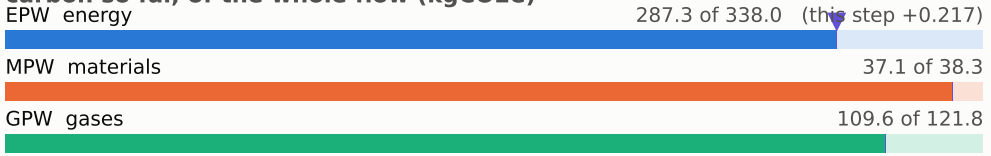

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

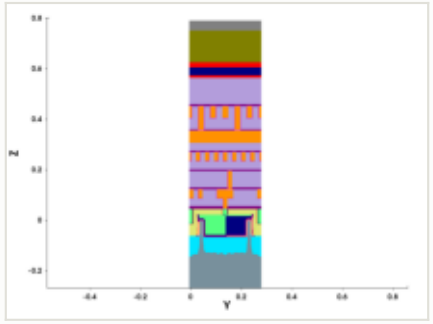

y cut at 0.211 µm

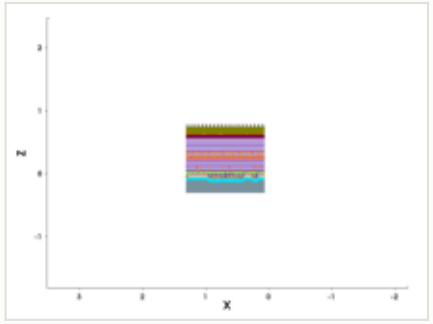

mask: layer 60:0 (GDSII)

steps by process area

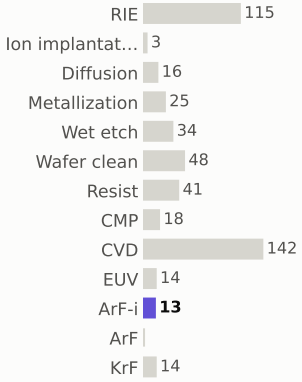

materials deposited (g)



gases emitted (g)



Step #5210: RIE

etch_anisotropic · RIE

1.04	435.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



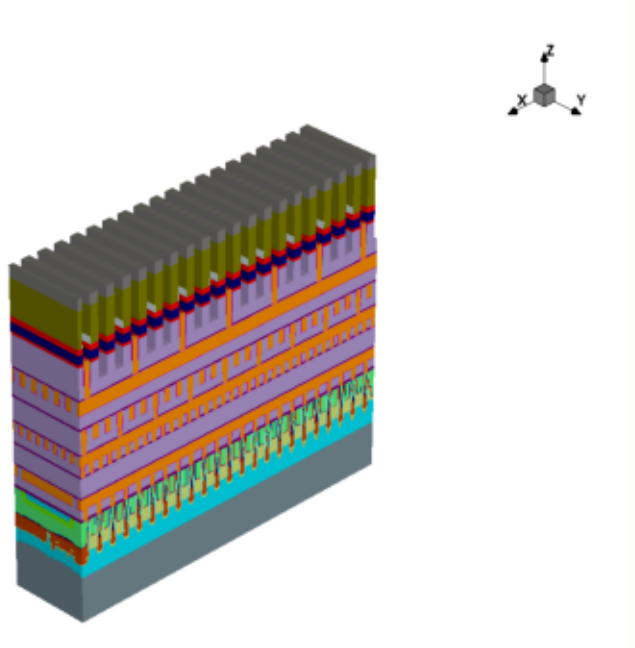

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

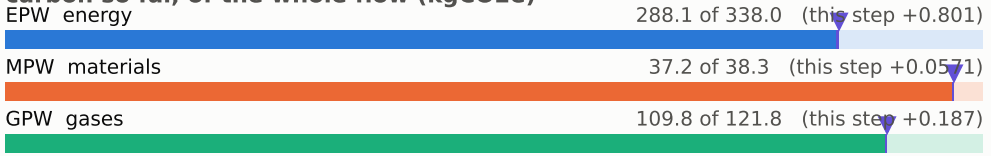

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

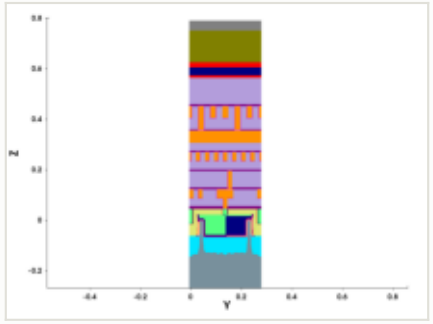

y cut at 0.211 µm

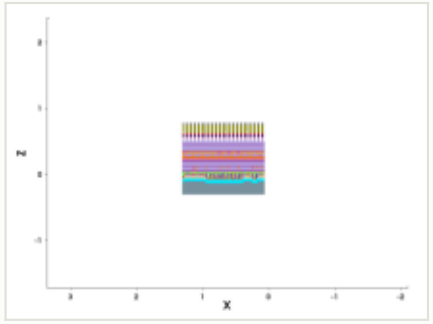

mask for this step

no mask for this step

steps by process area

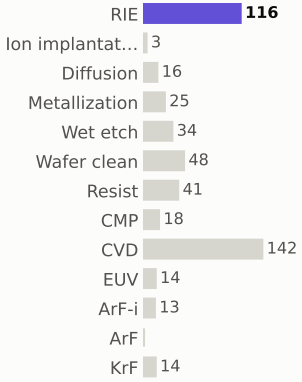

materials deposited (g)

gases emitted (g)



Step #5220: Wafer_clean

etch_strip · Wafer_clean

0.169	435.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



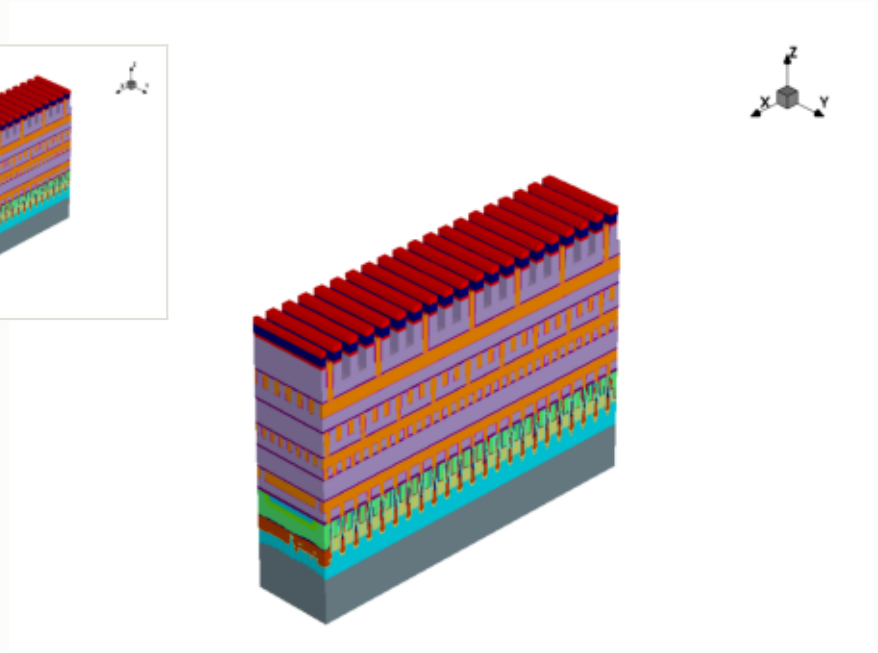

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

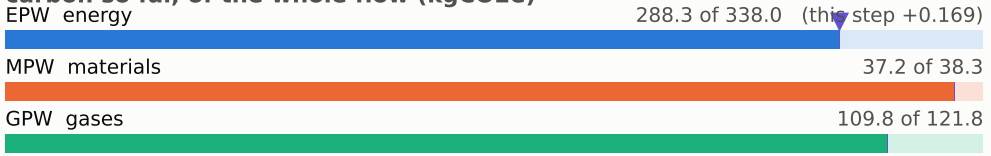

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

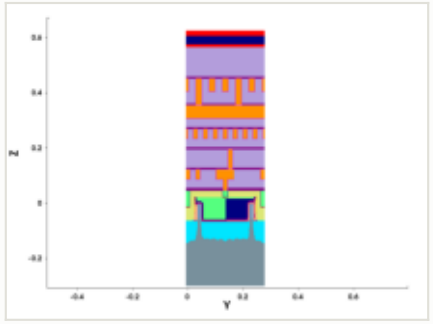

y cut at 0.211 µm

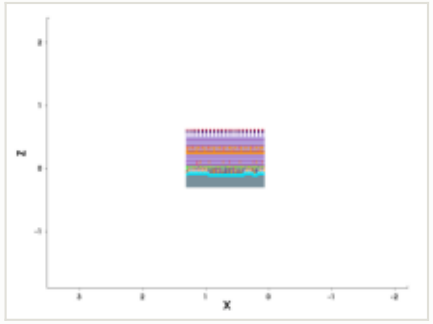

mask for this step

no mask for this step

steps by process area

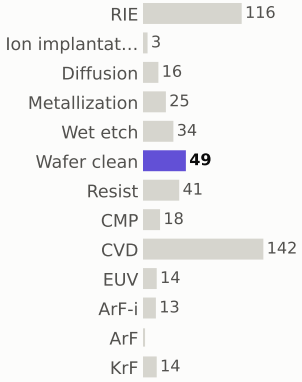

materials deposited (g)



gases emitted (g)



Step #5230: Metallization

depo_ellipsoidal · Metallization

1.2	436.5	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



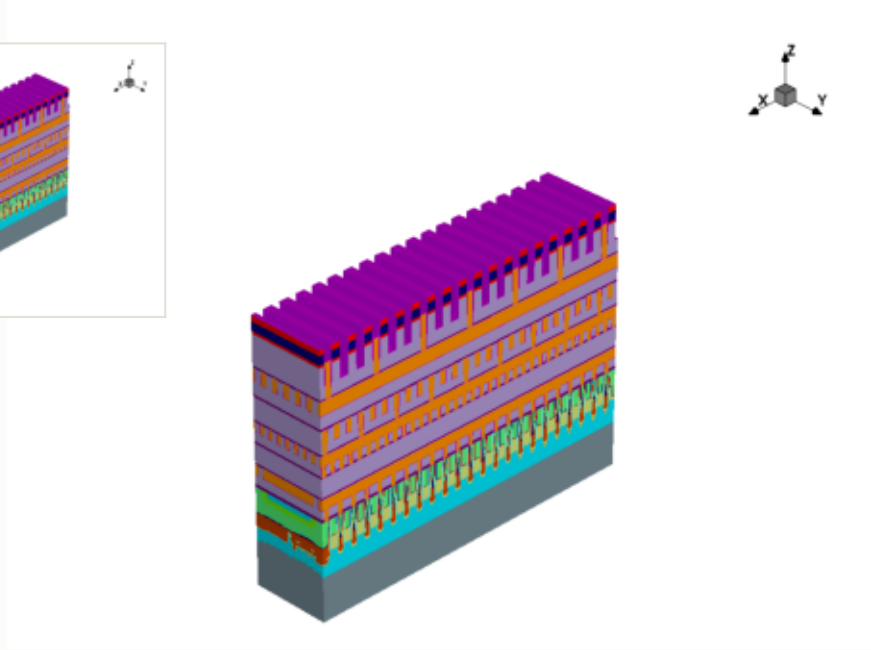

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

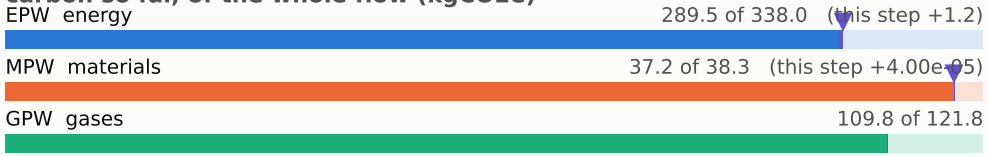

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

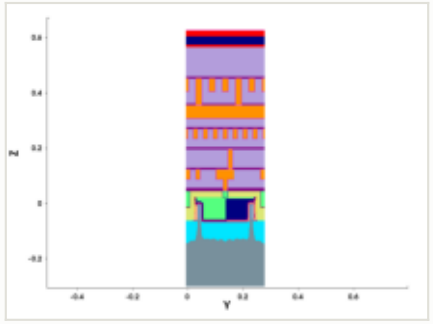

y cut at 0.211 µm

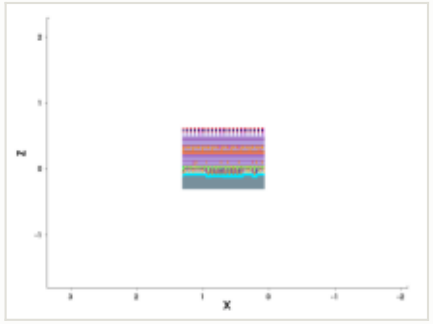

mask for this step

no mask for this step

steps by process area

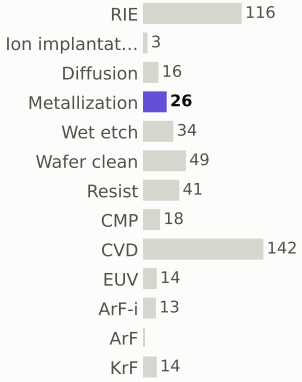

materials deposited (g)

gases emitted (g)



Step #5240: Metallization

depo_fill · Metallization

1.21	437.7	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



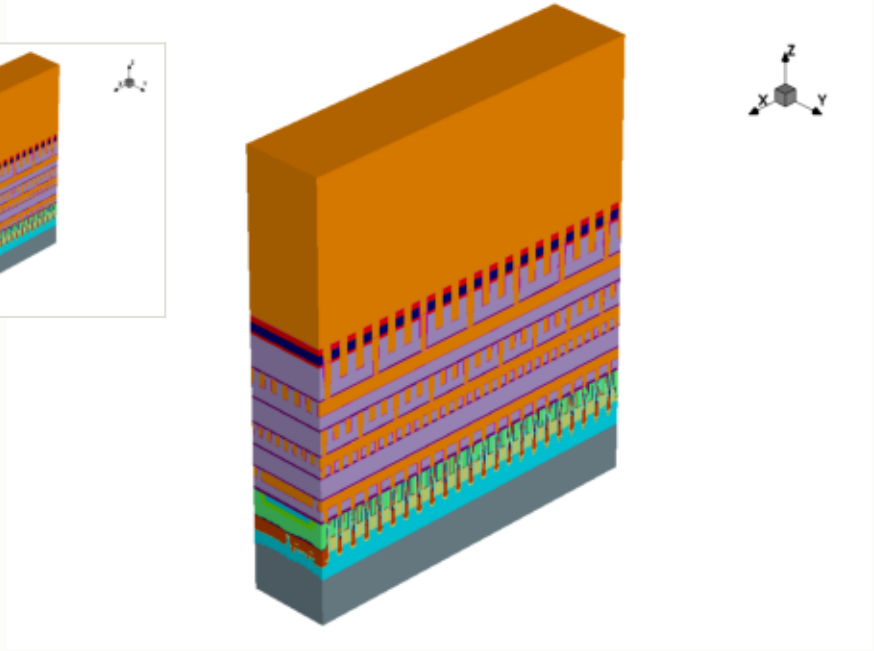

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

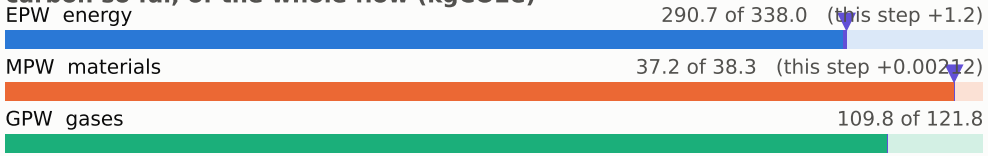

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

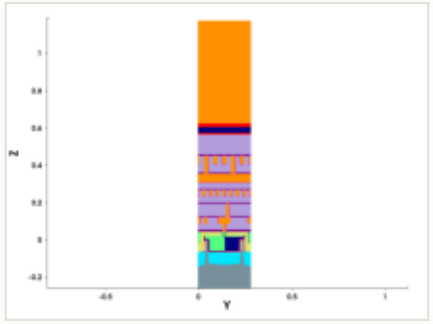

y cut at 0.211 µm

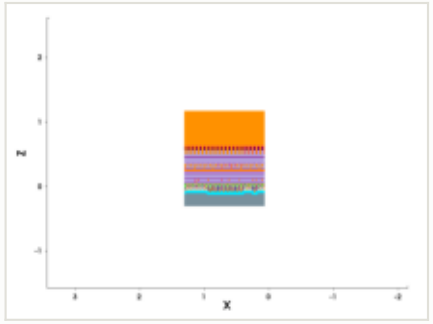

mask for this step

no mask for this step

steps by process area

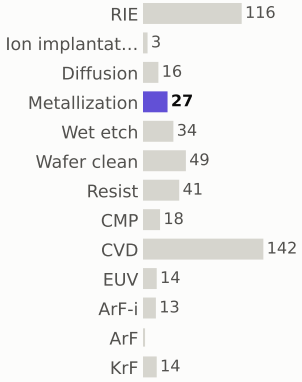

materials deposited (g)

gases emitted (g)



Step #5250: Diffusion

treatment · Diffusion

0.801	438.5	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



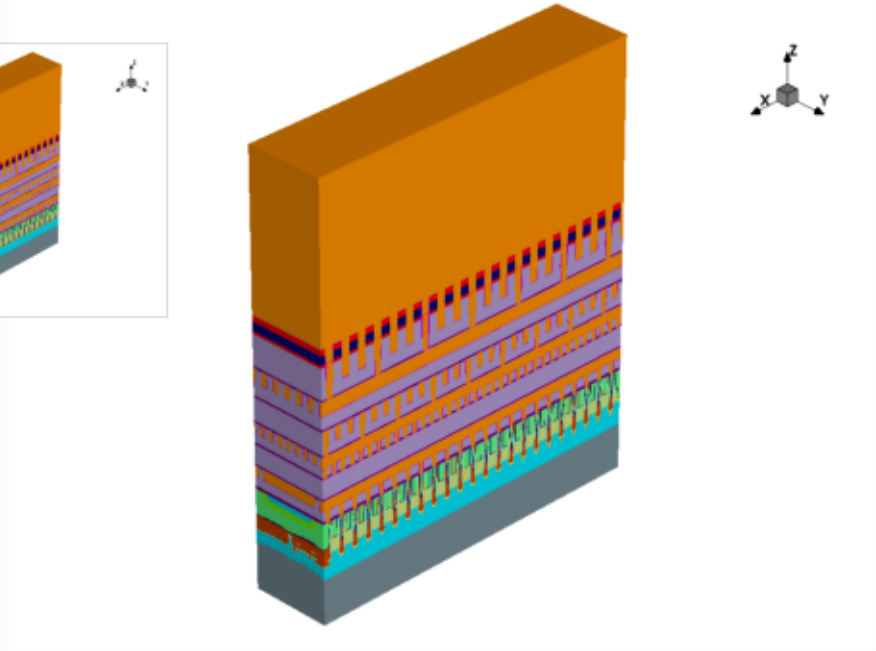

x cut at 0.677 µm

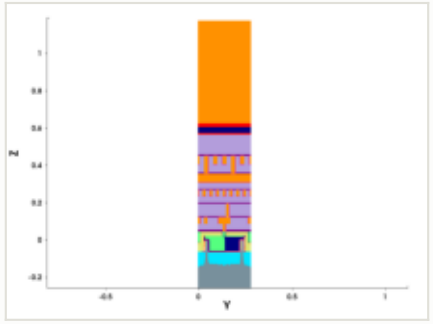

y cut at 0.211 µm

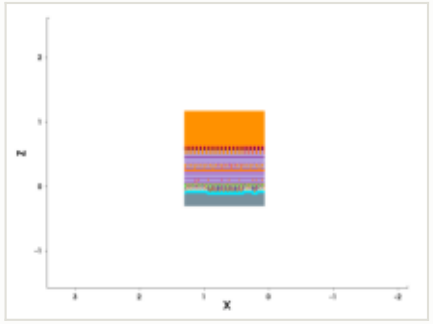

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

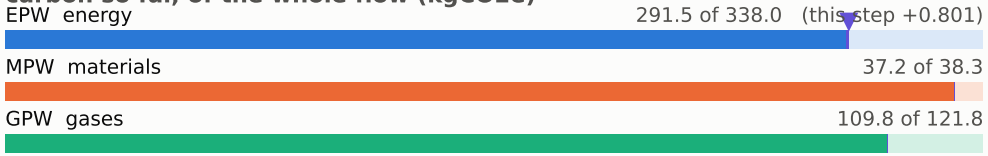

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

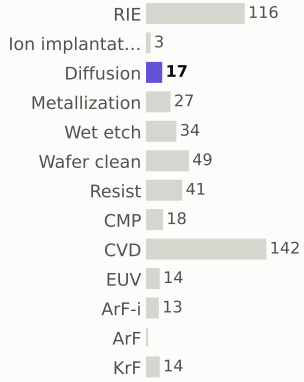

materials deposited (g)



gases emitted (g)



Step #5260: CMP

etch_cmp · CMP

0.169	438.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



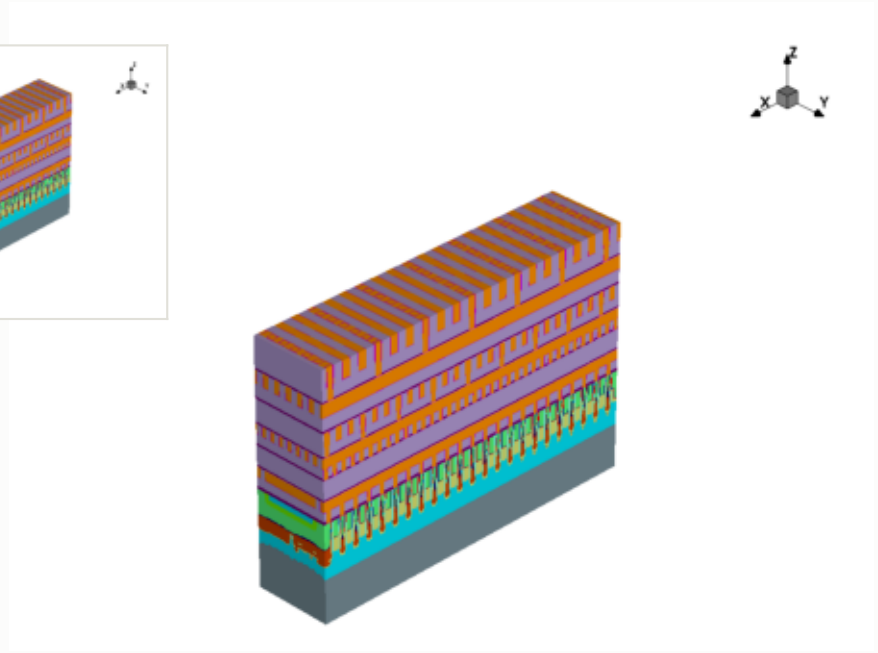

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

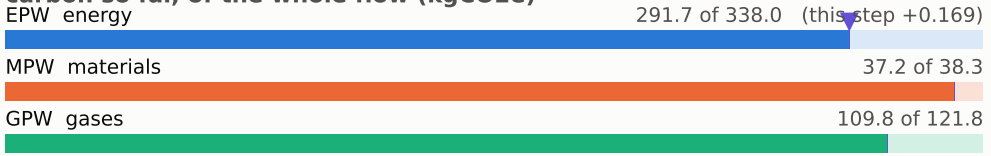

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

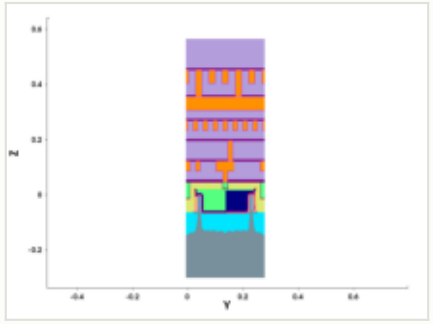

y cut at 0.211 µm

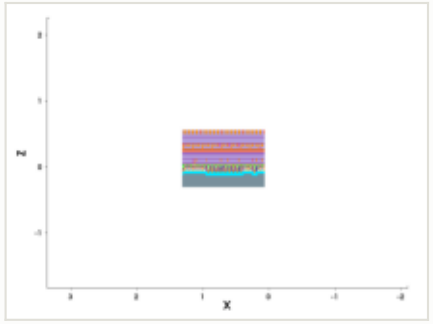

mask for this step

no mask for this step

steps by process area

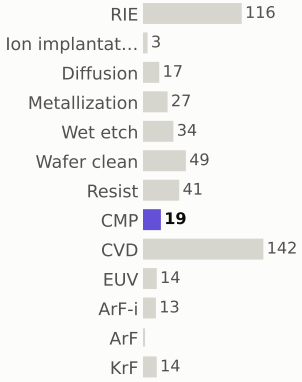

materials deposited (g)

gases emitted (g)



Step #5270: Metallization

depo_isotropic · Metallization

1.2	439.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



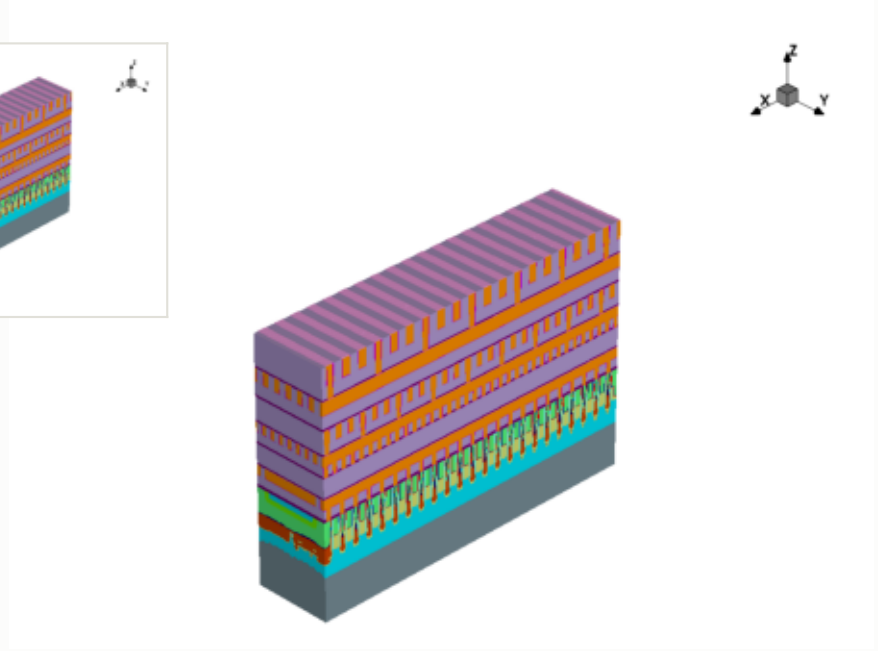

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

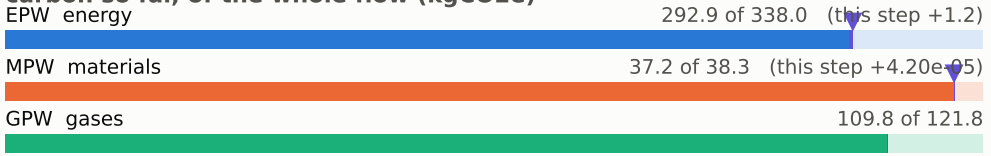

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

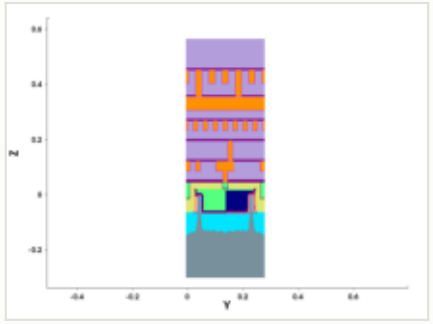

y cut at 0.211 µm

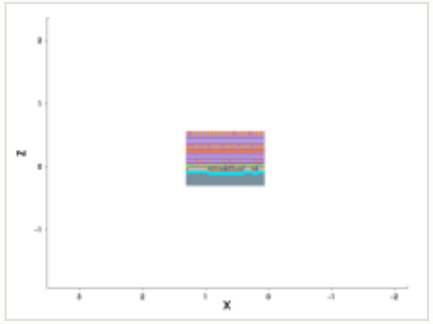

mask for this step

no mask for this step

steps by process area

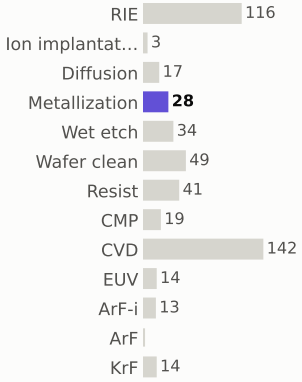

materials deposited (g)

gases emitted (g)



Step #5290: CVD

depo_fill · CVD

1.31	441.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



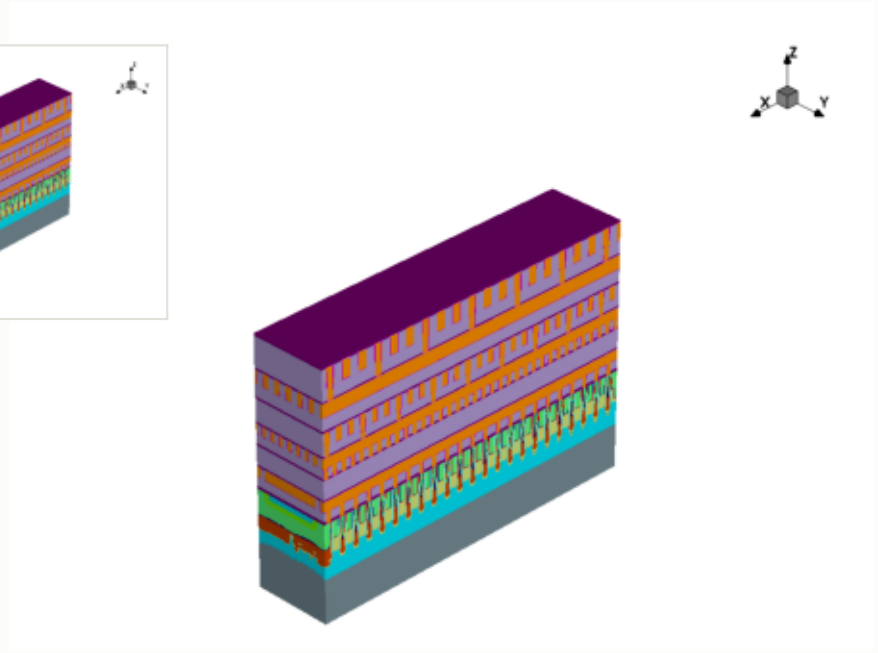

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

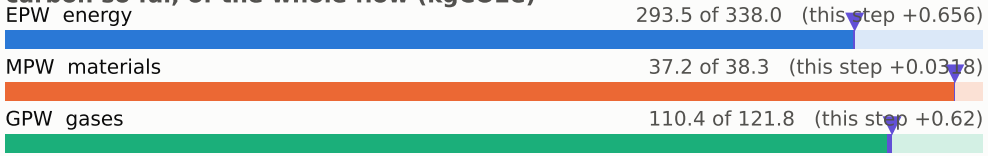

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

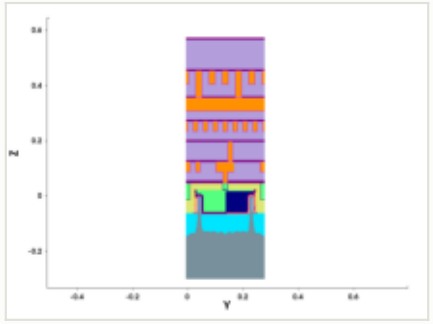

y cut at 0.211 µm

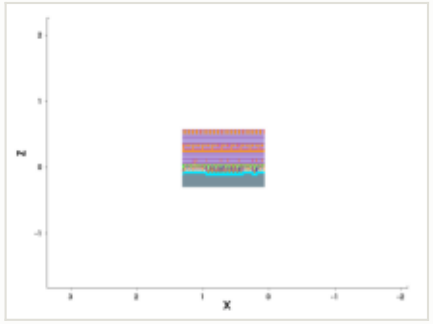

mask for this step

no mask for this step

steps by process area

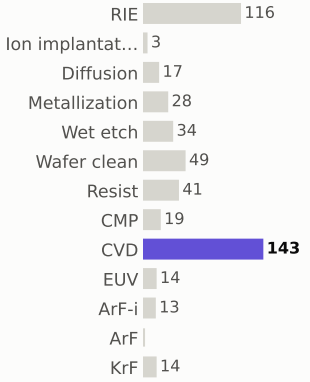

materials deposited (g)



gases emitted (g)



Step #5300: CVD

depo_fill · CVD

1.31	442.5	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



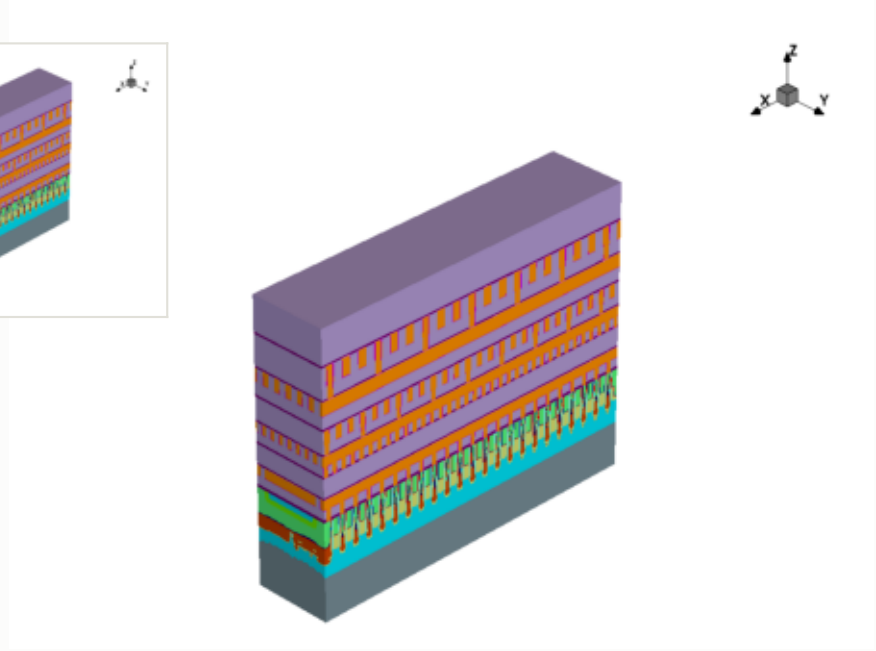

this step

process area	CVD
material	—
thickness	0.122 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

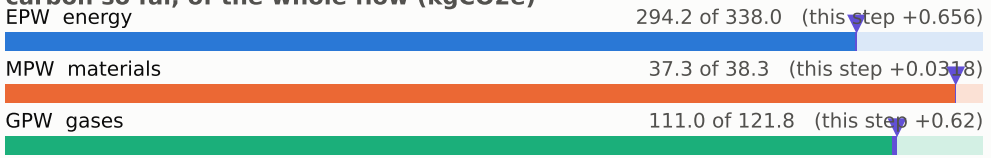

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

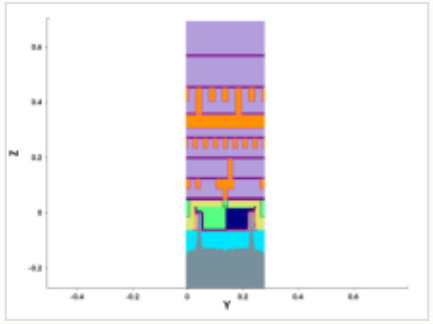

y cut at 0.211 µm

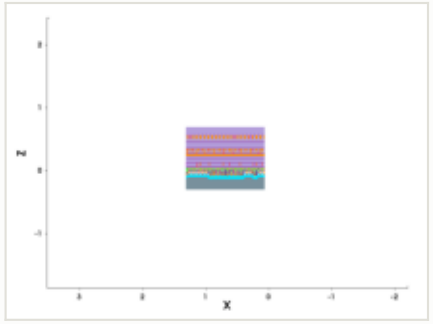

mask for this step

no mask for this step

steps by process area



materials deposited (g)

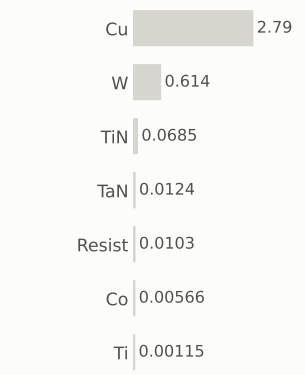

gases emitted (g)



Step #5310: Diffusion

treatment · Diffusion

0.801	443.3	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



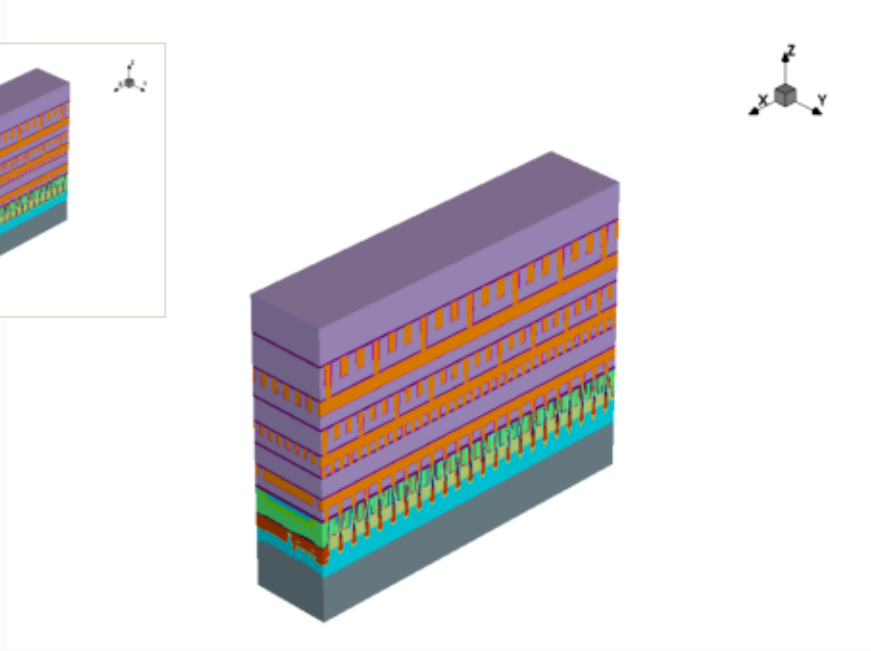

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

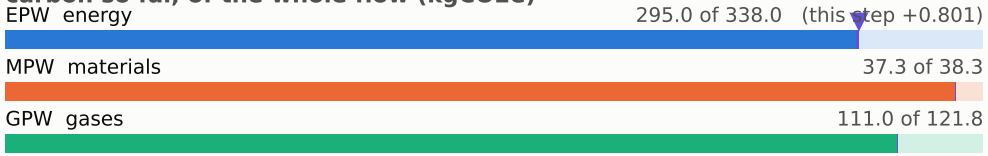

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

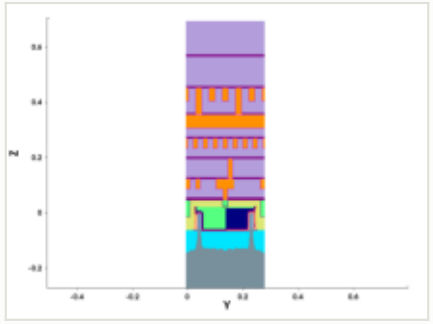

y cut at 0.211 µm

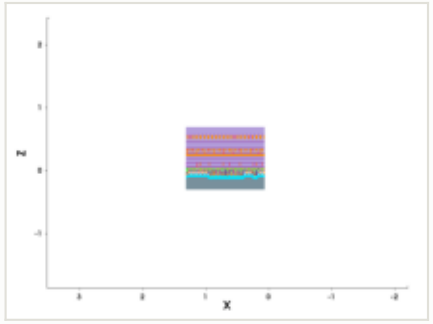

mask for this step

no mask for this step

steps by process area

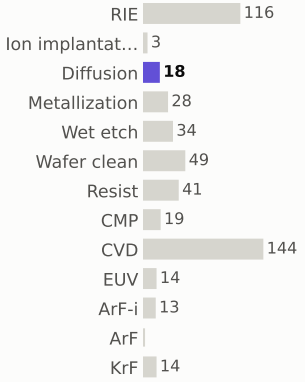

materials deposited (g)



gases emitted (g)



Step #5320: Wafer_clean

clean · Wafer_clean

0.169	443.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



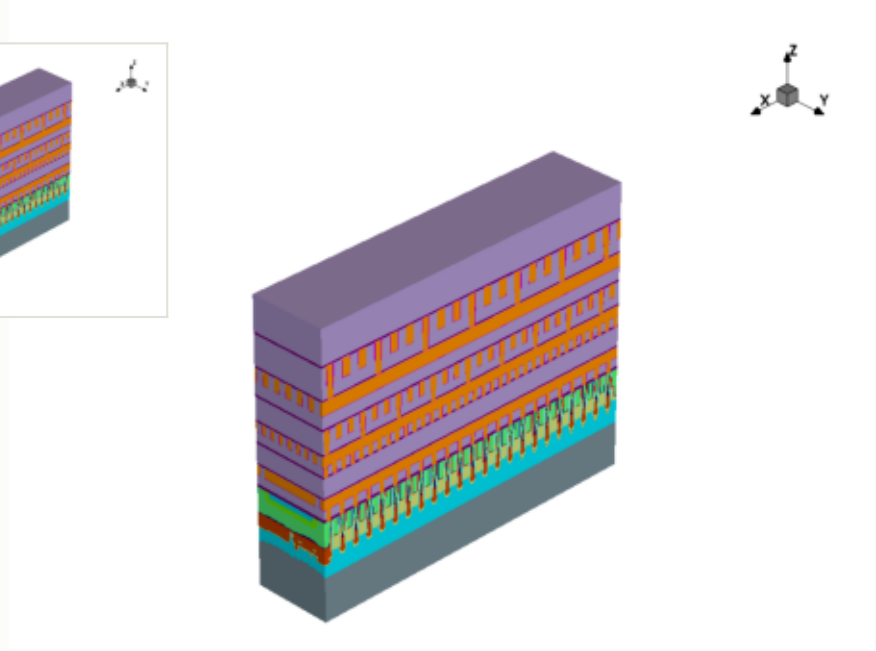

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

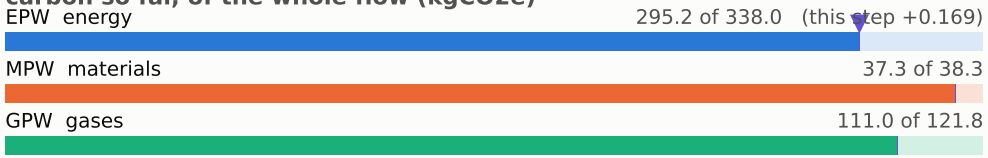

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

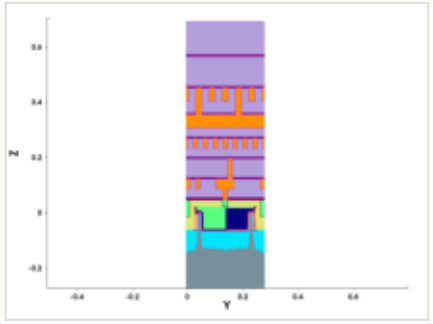

y cut at 0.211 µm

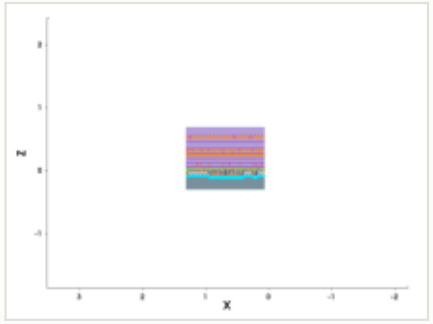

mask for this step

no mask for this step

steps by process area

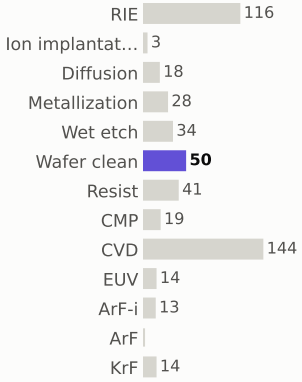

materials deposited (g)

gases emitted (g)



Step #5330: CVD

depo_fill · CVD

1.31	444.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



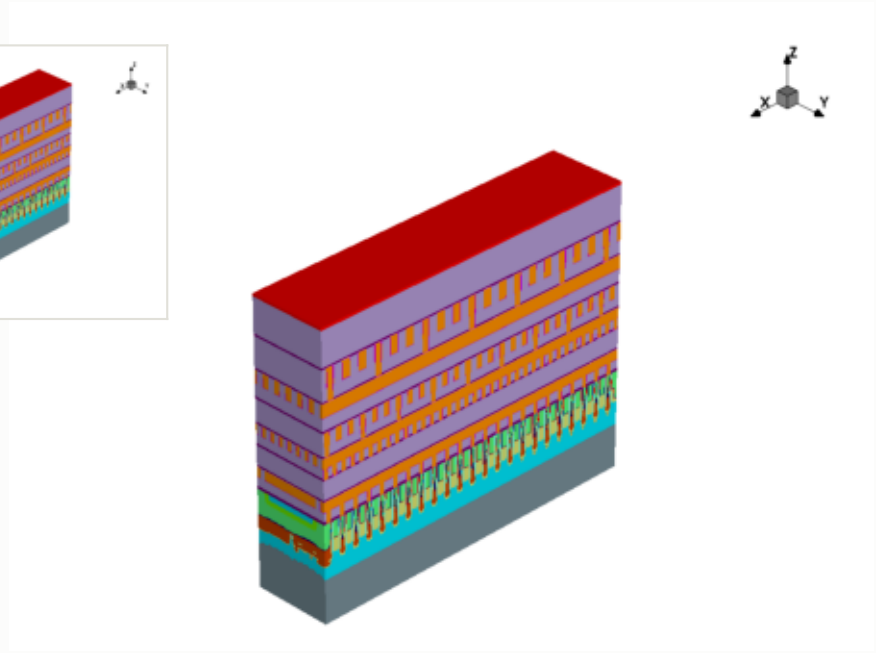

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

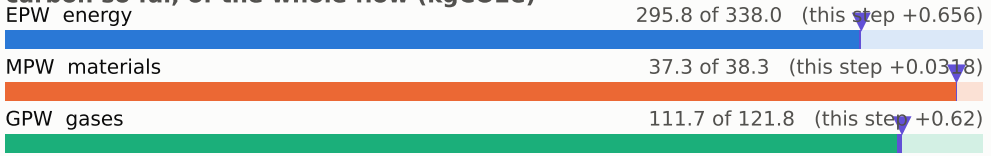

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

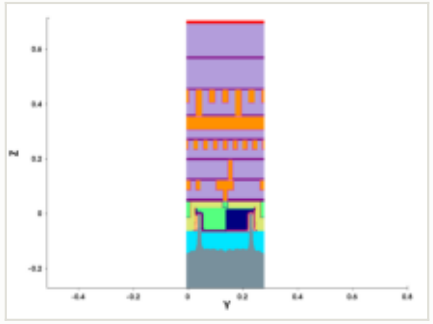

y cut at 0.211 µm

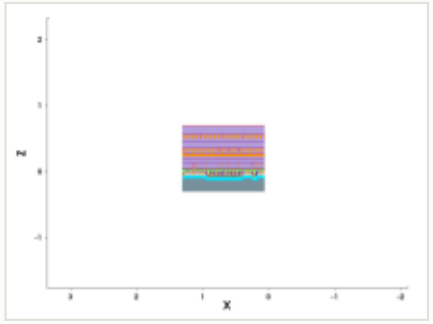

mask for this step

no mask for this step

steps by process area

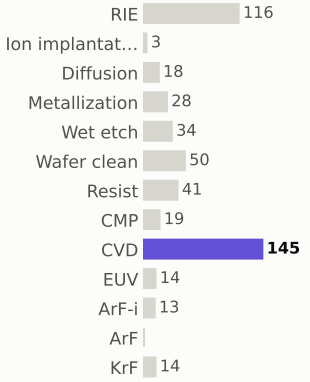

materials deposited (g)

gases emitted (g)



Step #5340: Resist

depo_fill · Resist

0.169	444.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



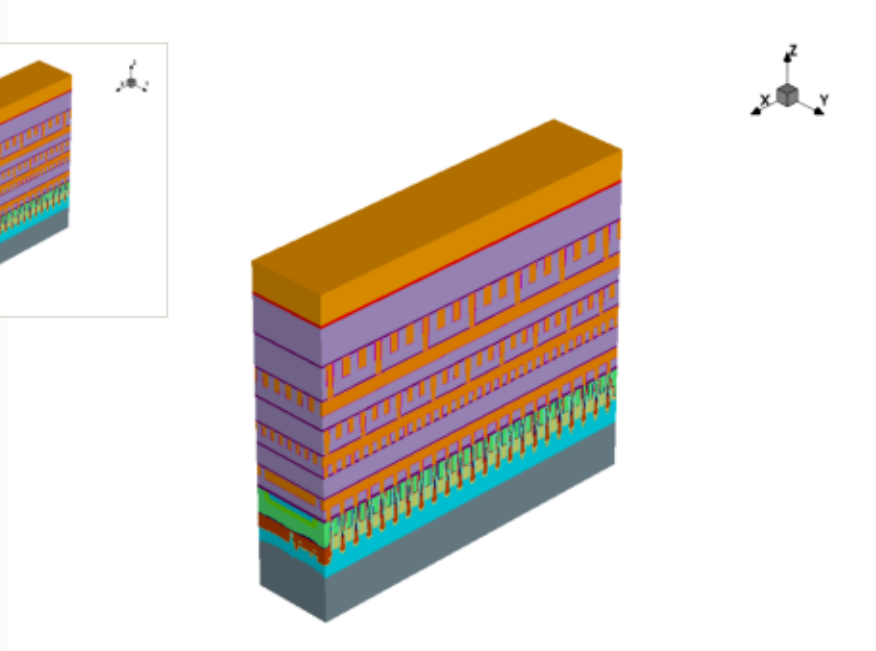

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

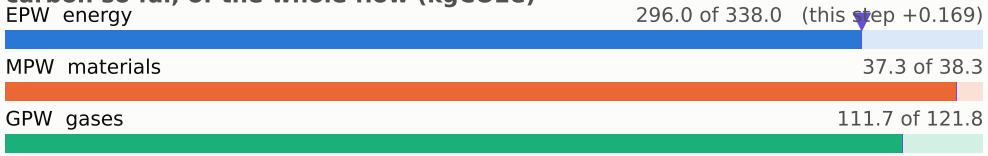

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

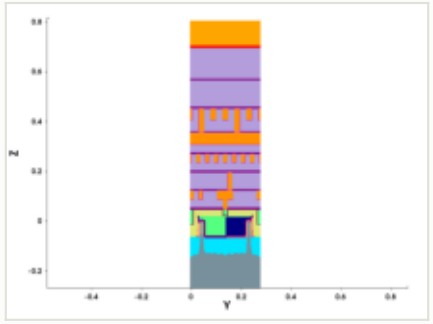

y cut at 0.211 µm

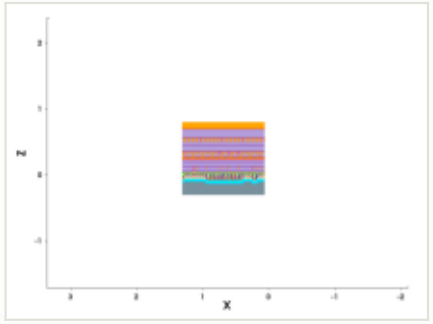

mask for this step

no mask for this step

steps by process area

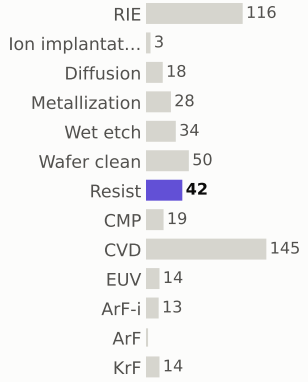

materials deposited (g)



gases emitted (g)



Step #5350: CVD

depo_fill · CVD

1.31	446.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



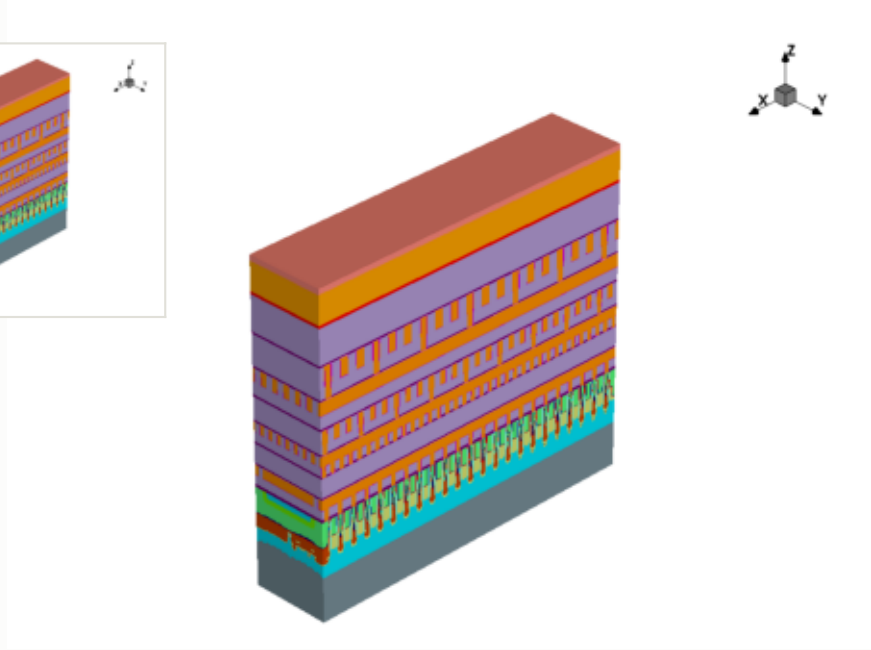

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

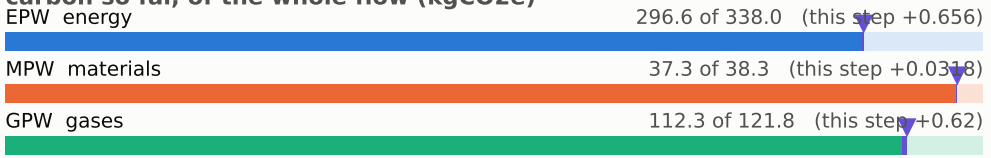

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

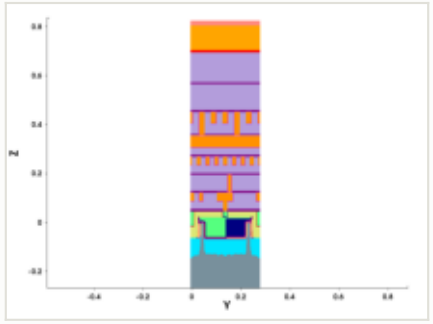

y cut at 0.211 µm

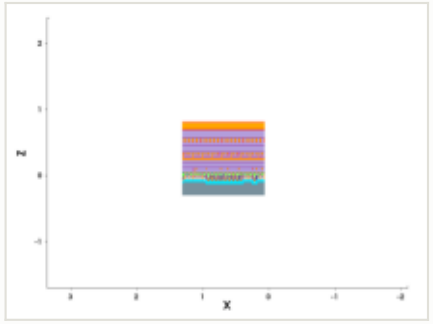

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #5360: Wafer_clean

clean · Wafer_clean

0.169	446.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



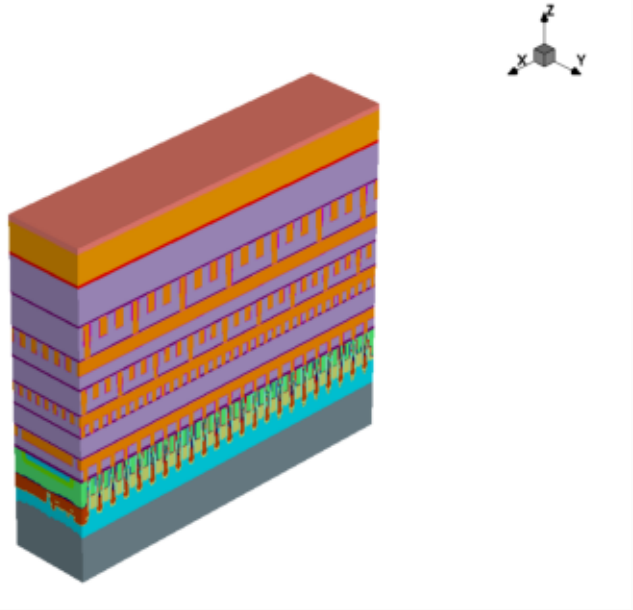

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

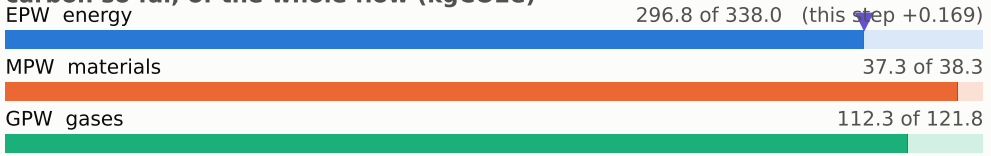

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

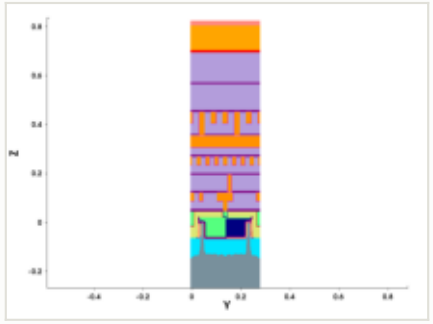

y cut at 0.211 µm

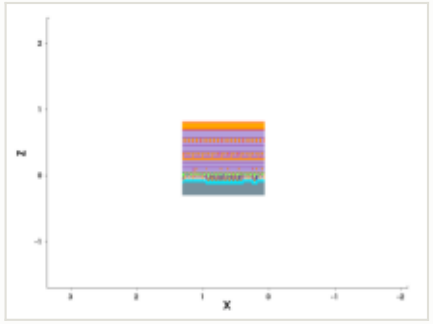

mask for this step

no mask for this step

steps by process area

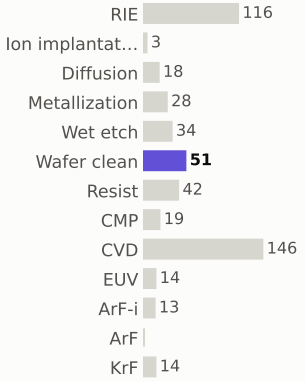

materials deposited (g)



gases emitted (g)



Step #5370: ArF-i

litho_patterning · ArF-i

0.217	446.6	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



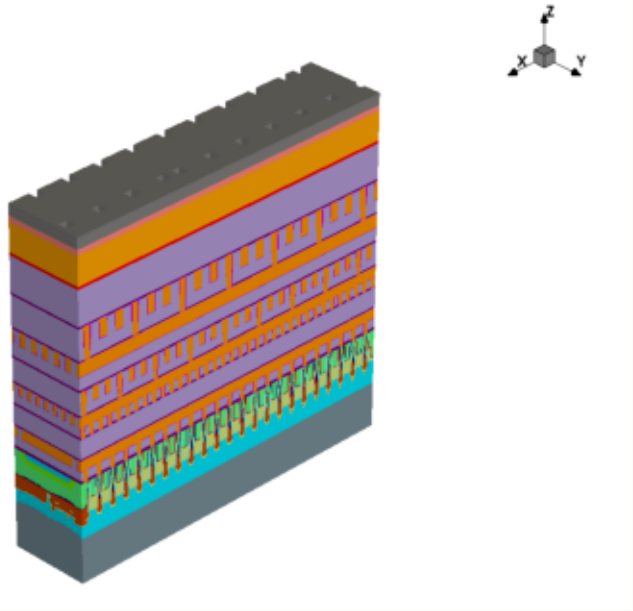

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

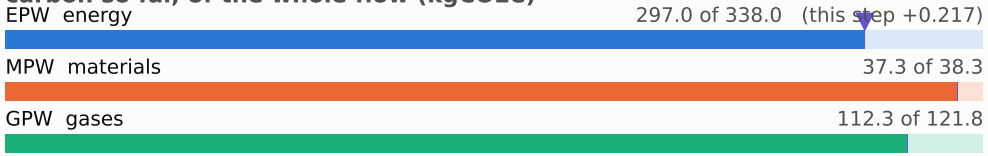

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

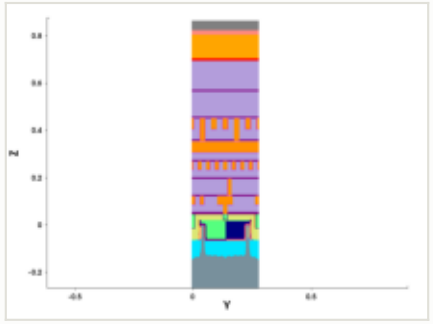

y cut at 0.211 µm

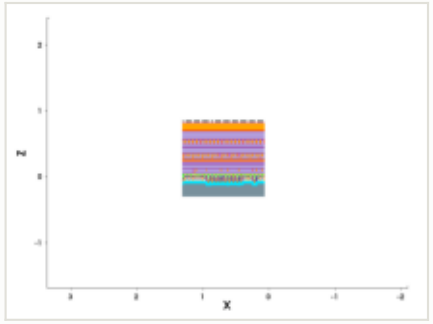

mask: layer 10651:0 (GDSII)

steps by process area

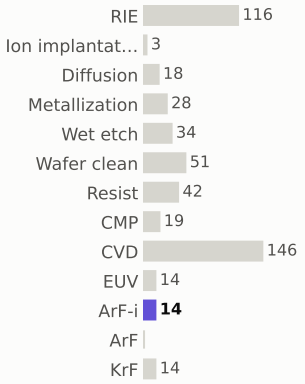

materials deposited (g)

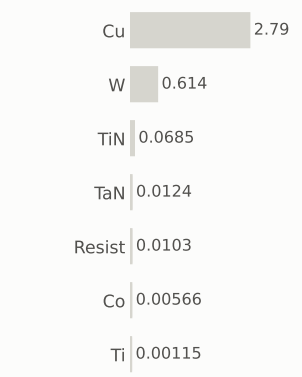

gases emitted (g)

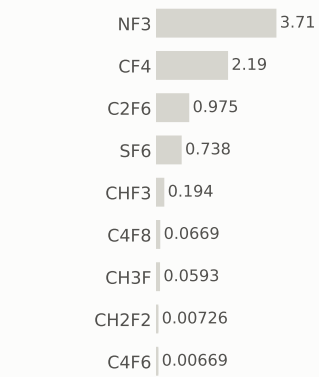

Step #5380: RIE

etch_anisotropic · RIE

1.04	447.7	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



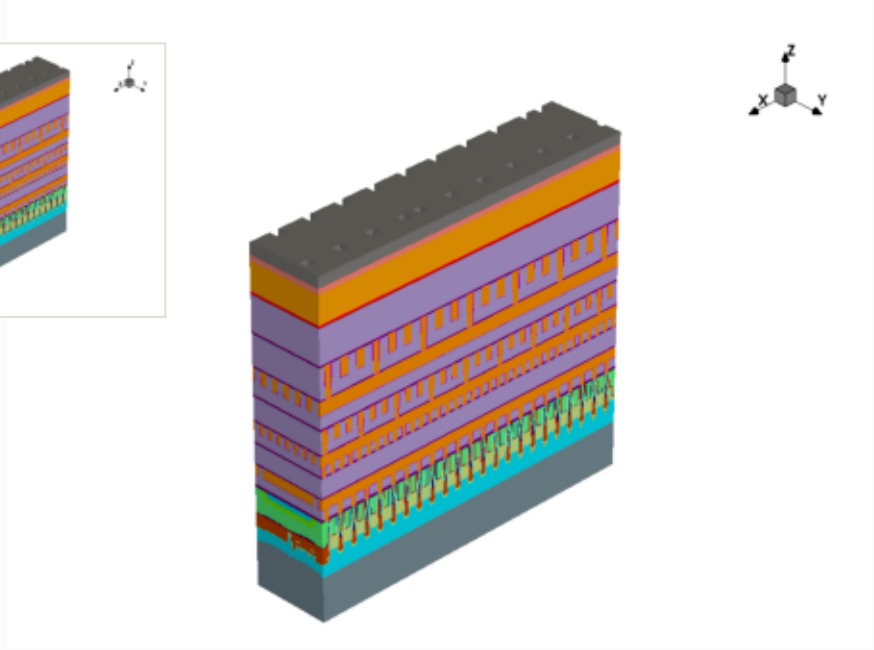

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

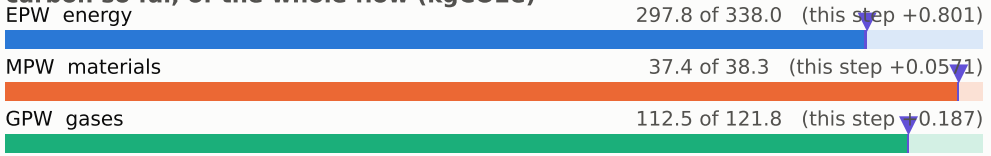

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

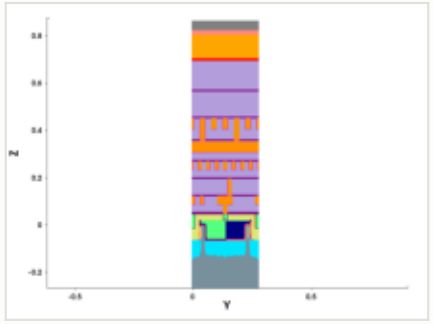

y cut at 0.211 µm

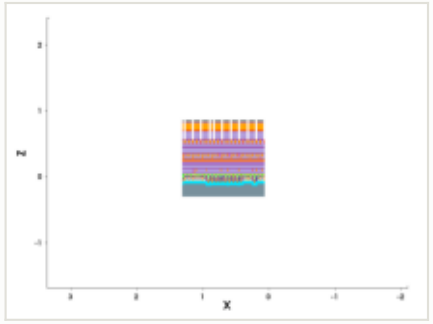

mask for this step

no mask for this step

steps by process area

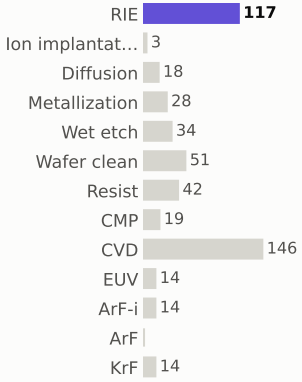

materials deposited (g)



gases emitted (g)



Step #5390: Wafer_clean

etch_strip · Wafer_clean

0.169	447.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



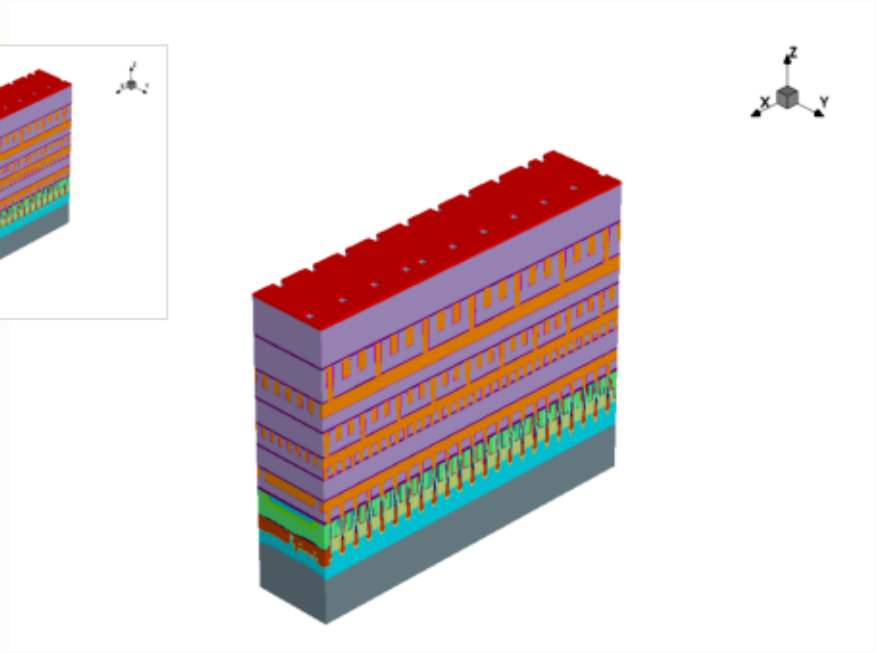

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

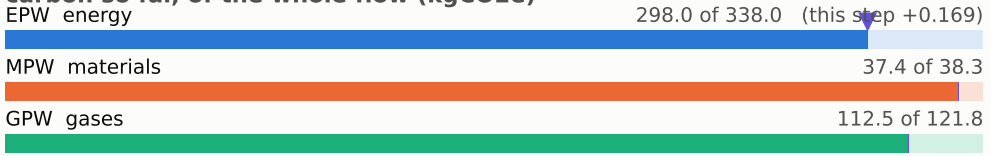

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

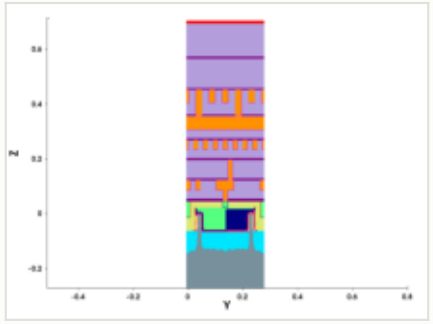

y cut at 0.211 µm

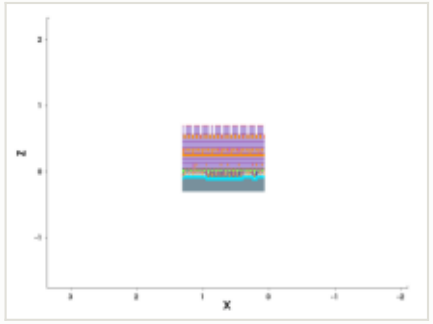

mask for this step

no mask for this step

steps by process area

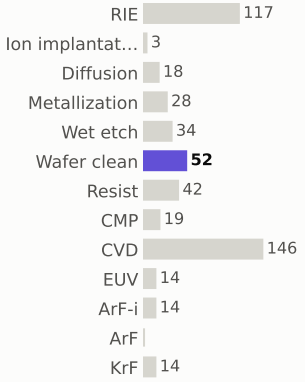

materials deposited (g)

gases emitted (g)



Step #5400: Resist

depo_fill · Resist

0.169	448.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



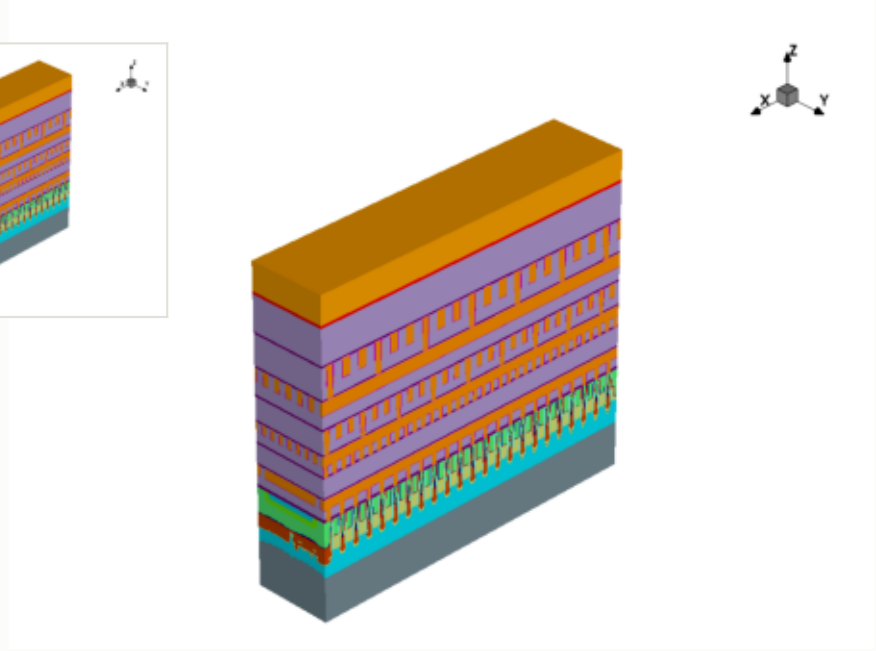

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

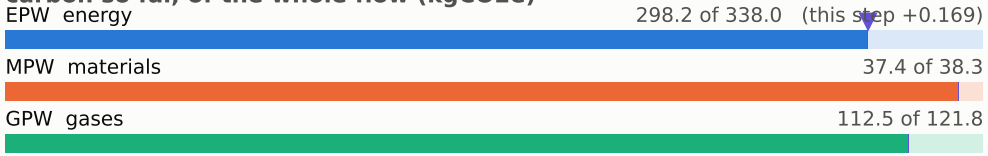

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

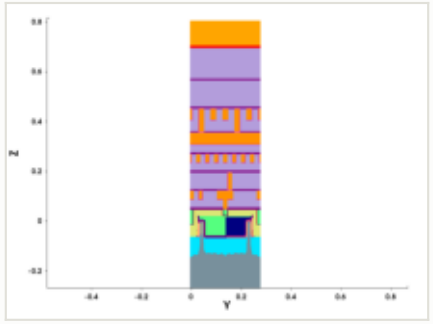

y cut at 0.211 µm

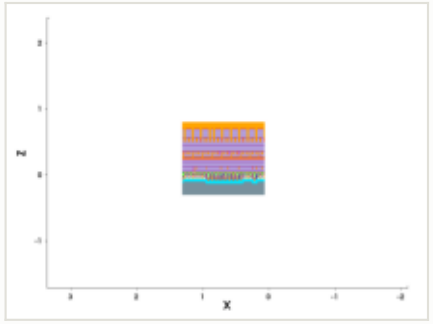

mask for this step

no mask for this step

steps by process area

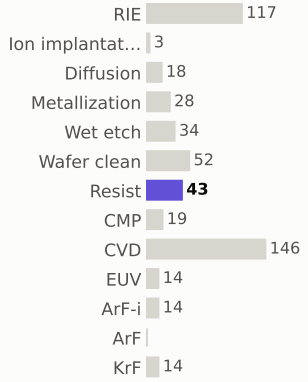

materials deposited (g)

gases emitted (g)



Step #5410: CVD

depo_fill · CVD

1.31	449.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



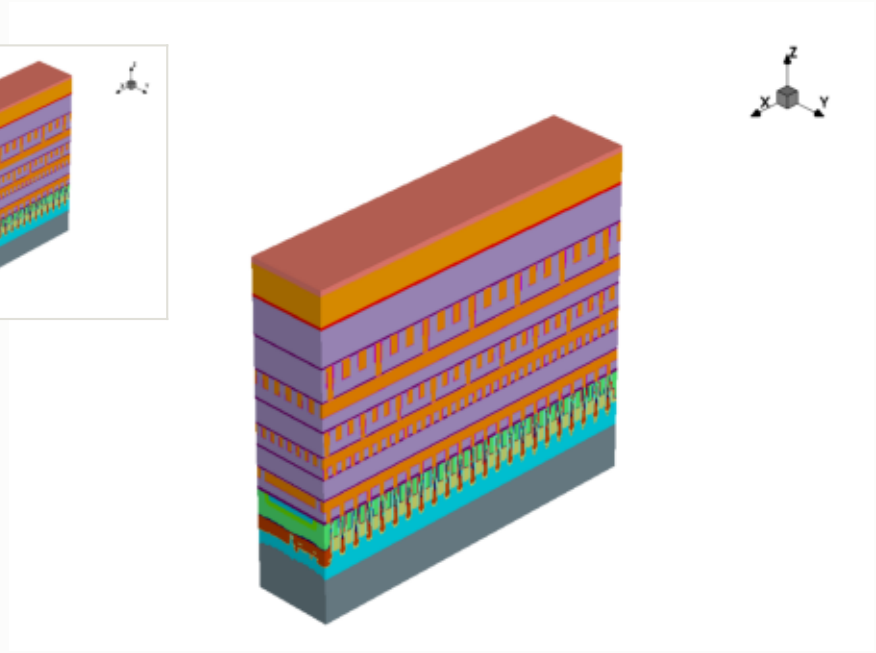

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

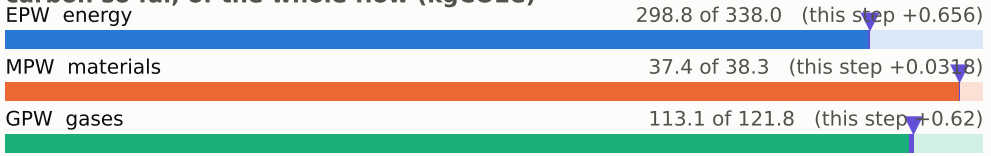

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

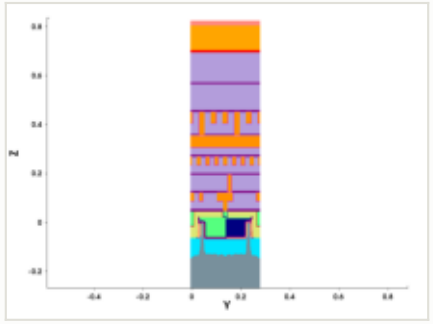

y cut at 0.211 µm

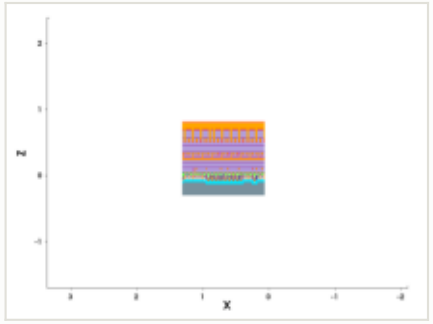

mask for this step

no mask for this step

steps by process area

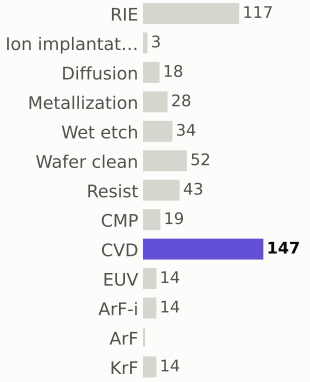

materials deposited (g)



gases emitted (g)



Step #5420: Wafer_clean

clean · Wafer_clean

0.169	449.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



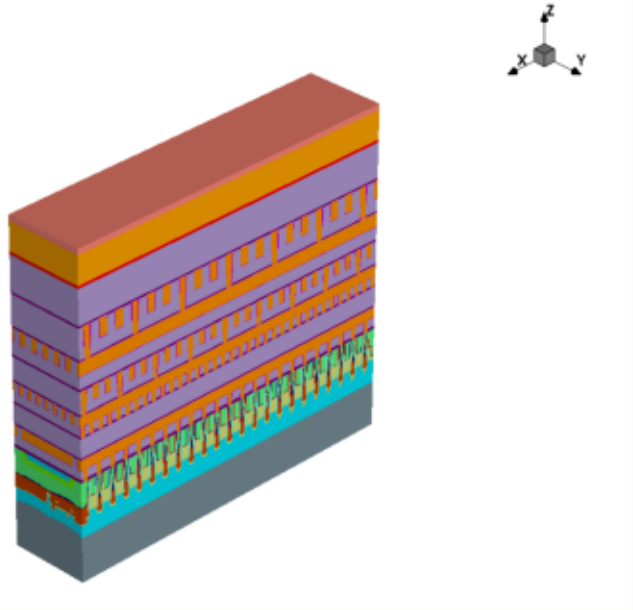

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

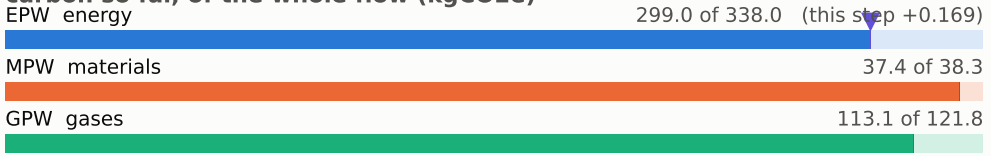

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

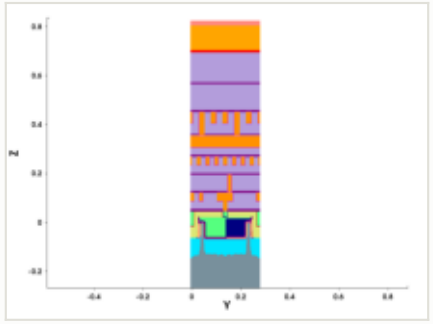

y cut at 0.211 µm

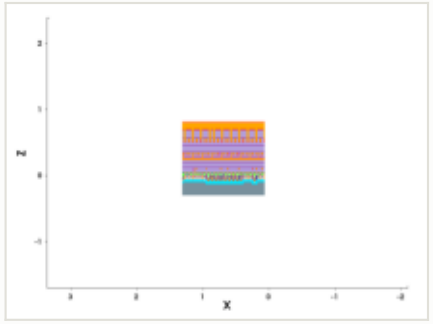

mask for this step

no mask for this step

steps by process area

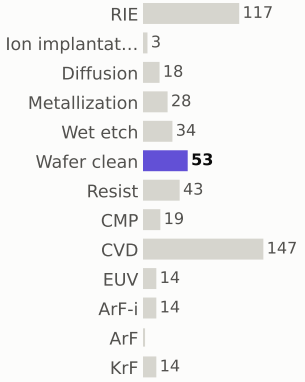

materials deposited (g)

gases emitted (g)



Step #5430: ArF-i

litho_patterning · ArF-i

0.217	449.7	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



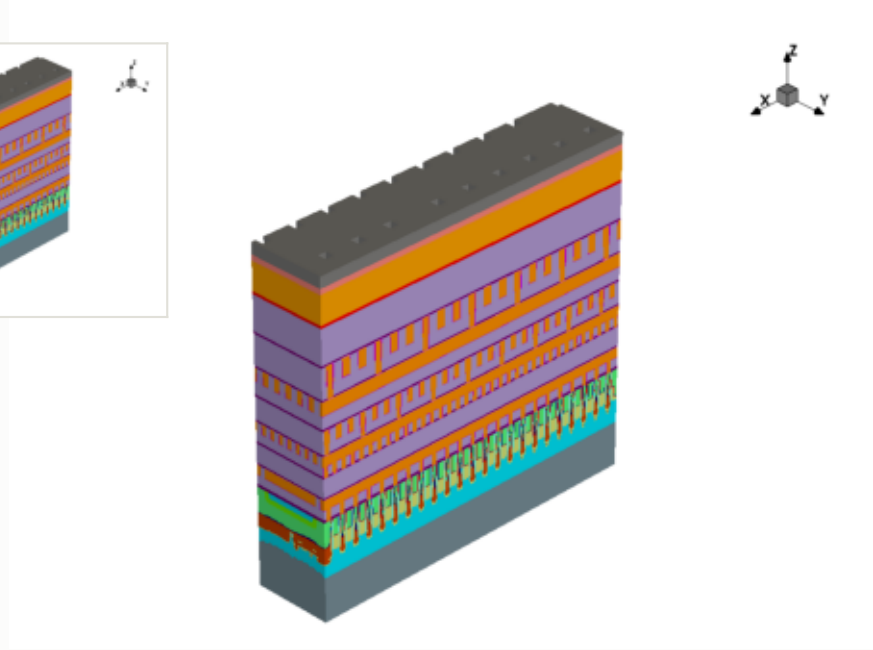

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

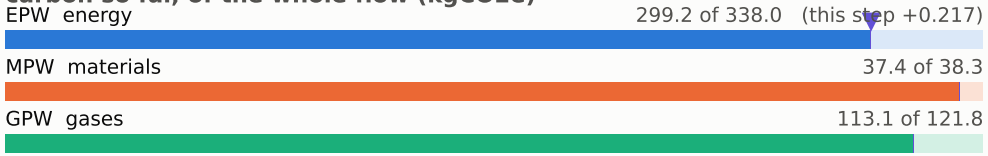

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

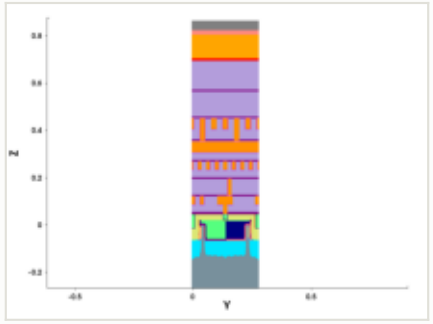

y cut at 0.211 µm

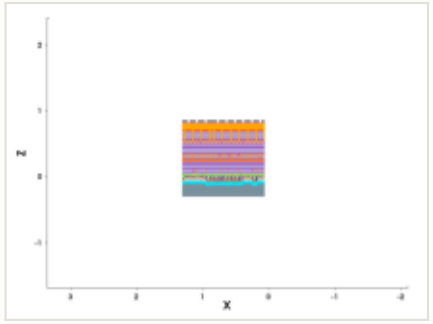

mask: layer 10652:0 (GDSII)

steps by process area

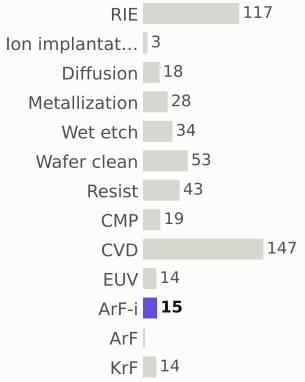

materials deposited (g)

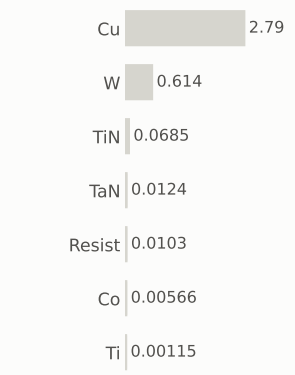

gases emitted (g)

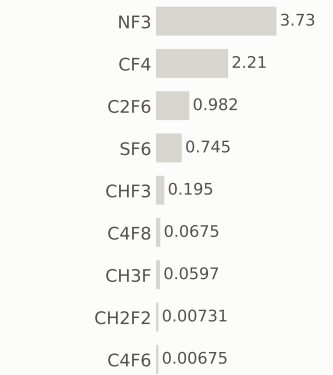

Step #5440: RIE

etch_anisotropic · RIE

1.04	450.7	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



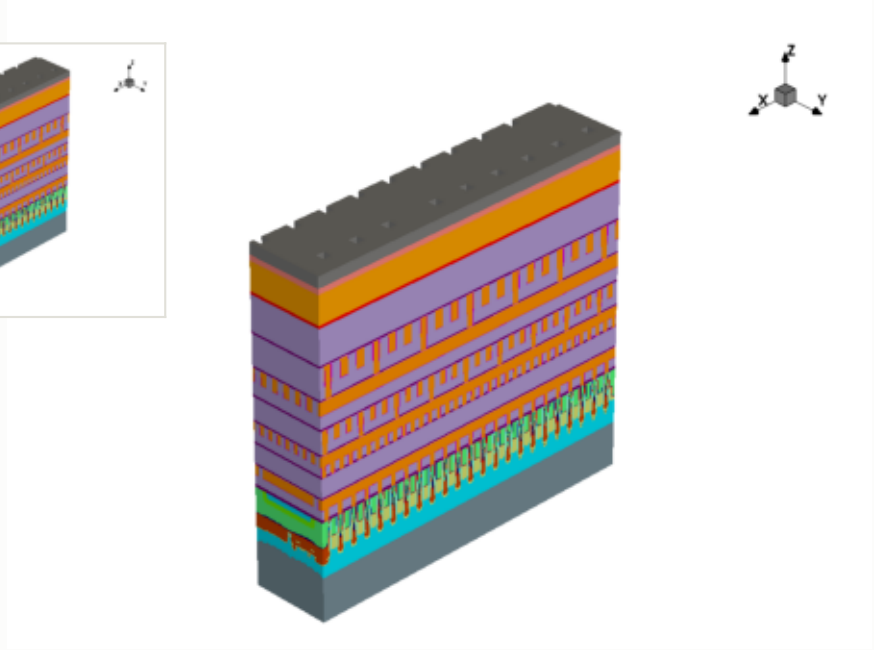

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

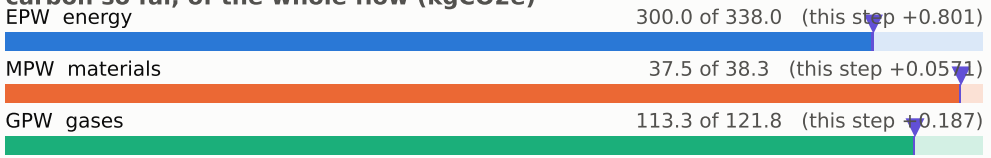

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

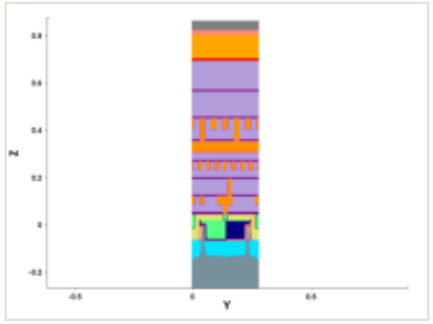

y cut at 0.211 µm

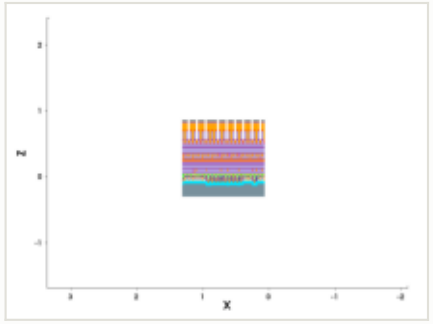

mask for this step

no mask for this step

steps by process area

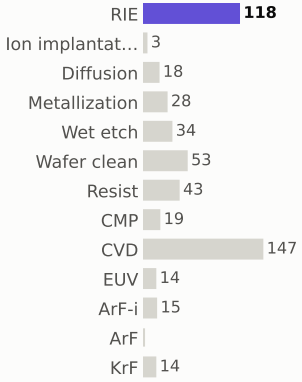

materials deposited (g)

gases emitted (g)



Step #5450: Wafer_clean

etch_strip · Wafer_clean

0.169	450.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



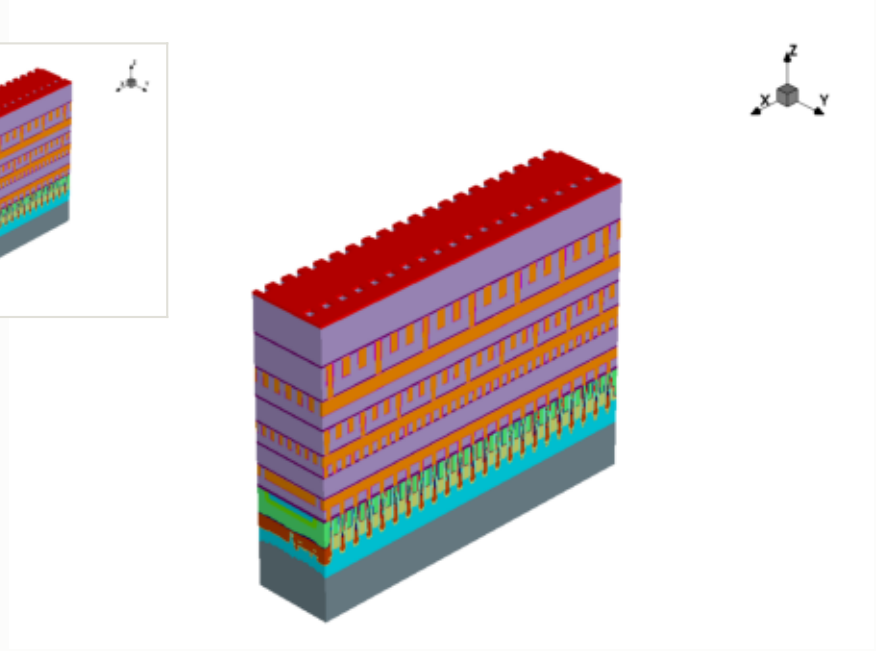

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

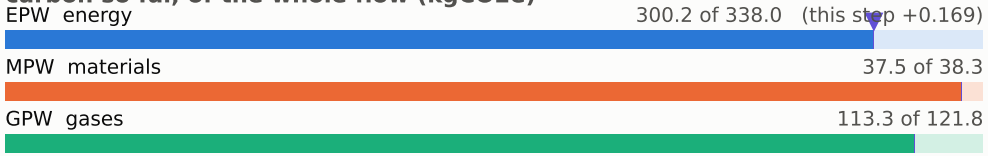

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

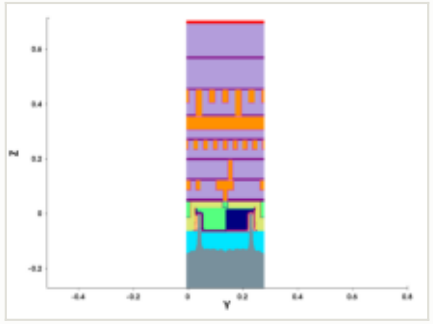

y cut at 0.211 µm

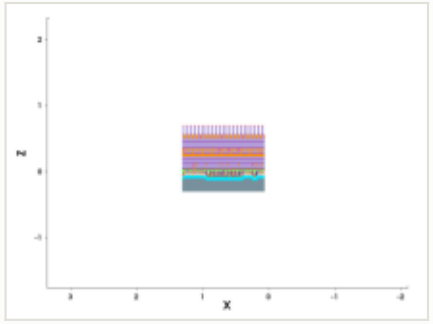

mask for this step

no mask for this step

steps by process area

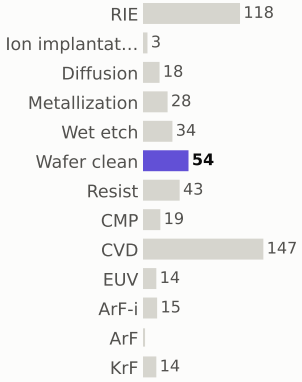

materials deposited (g)

gases emitted (g)



Step #5460: Metallization

depo_ellipsoidal · Metallization

1.2	452.1	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



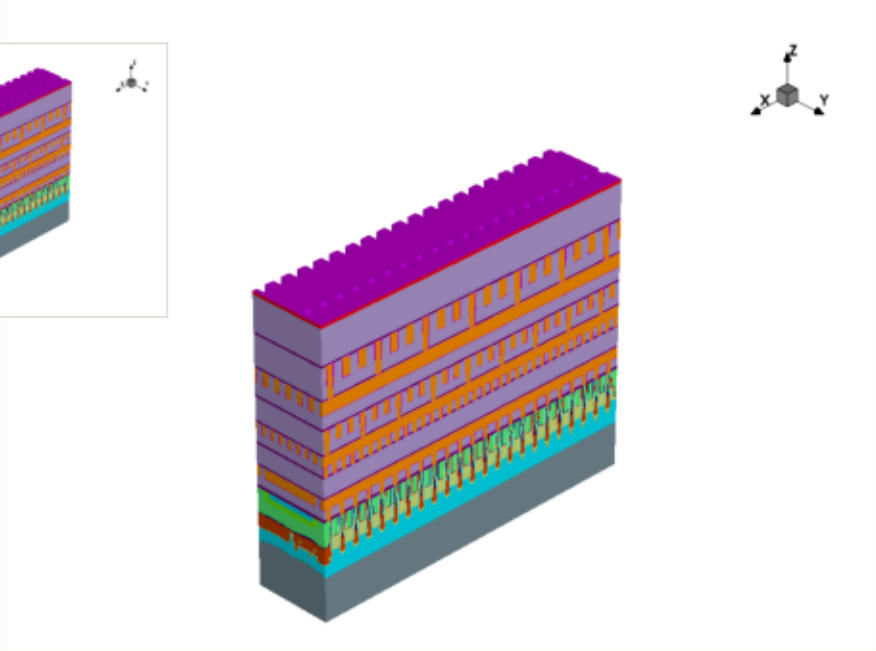

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

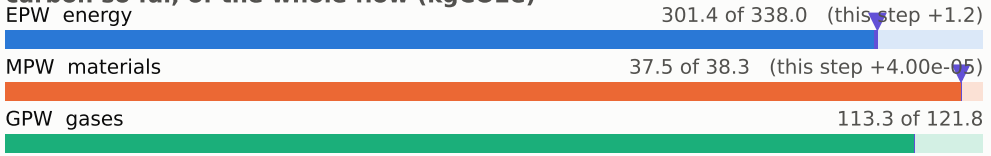

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

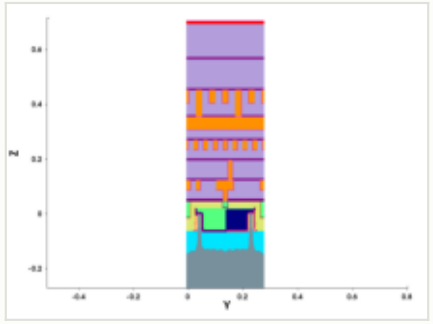

y cut at 0.211 µm

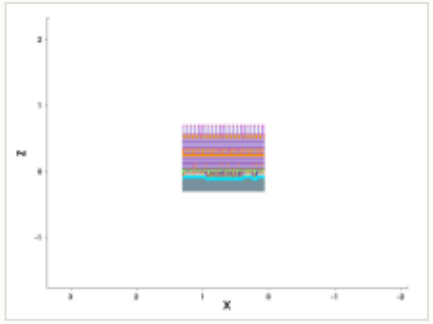

mask for this step

no mask for this step

steps by process area

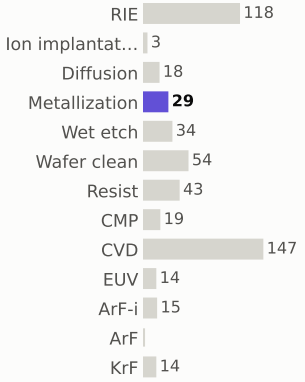

materials deposited (g)



gases emitted (g)



Step #5470: Metallization

depo_fill · Metallization

1.21	453.3	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



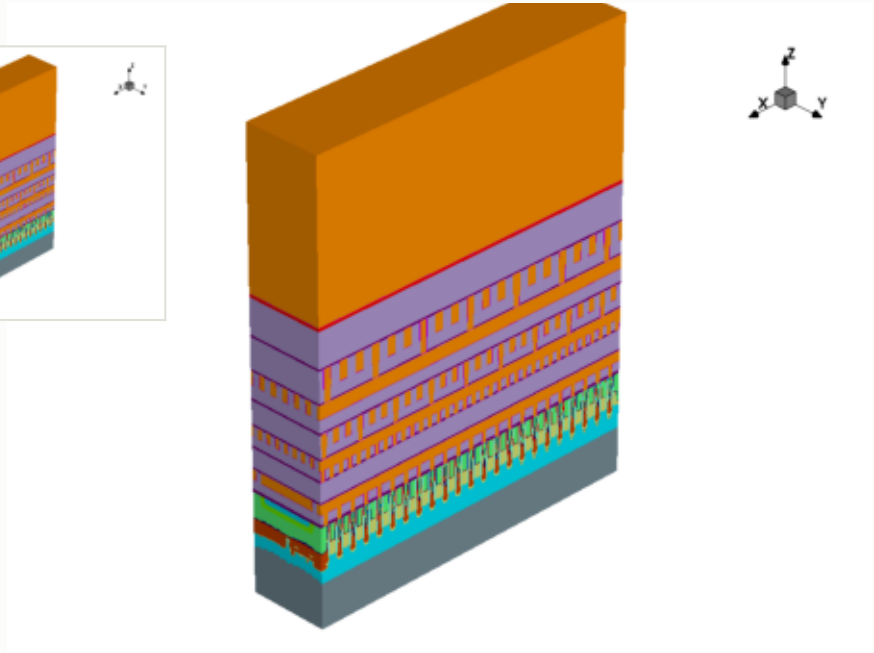

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

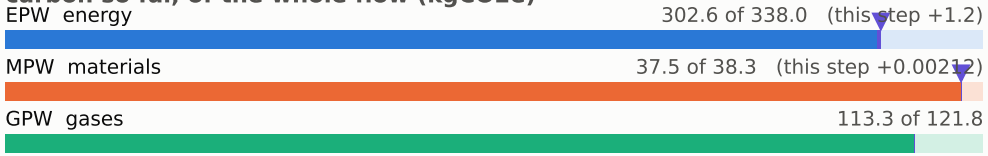

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

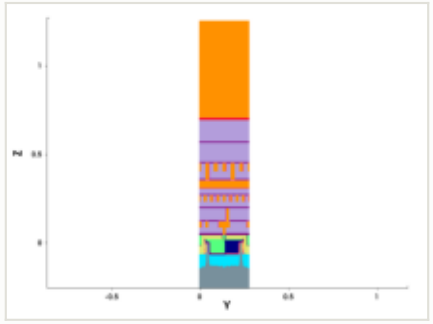

y cut at 0.211 µm

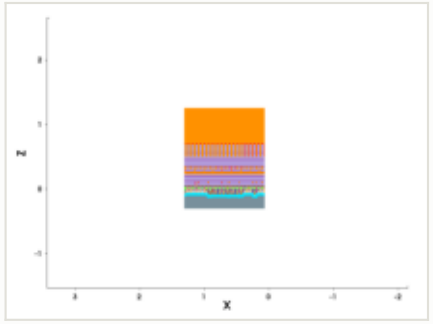

mask for this step

no mask for this step

steps by process area

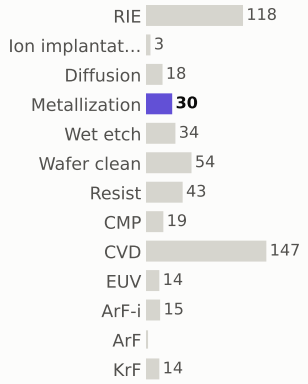

materials deposited (g)

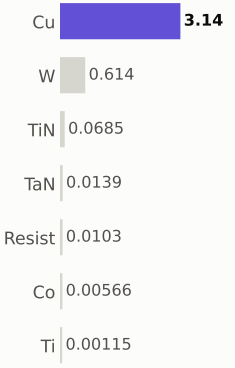

gases emitted (g)



Step #5480: Diffusion

treatment · Diffusion

0.801	454.1	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



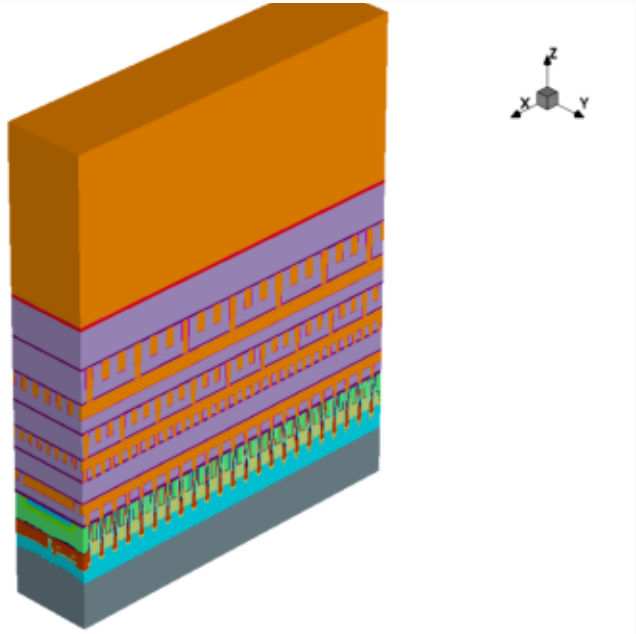

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

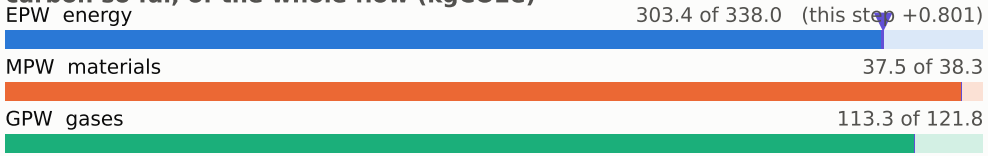

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

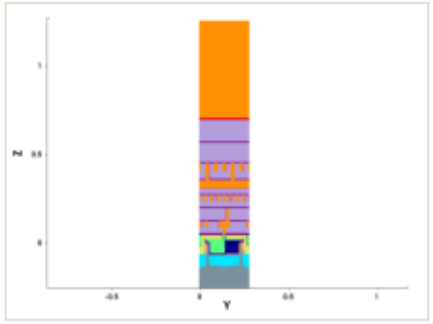

y cut at 0.211 µm

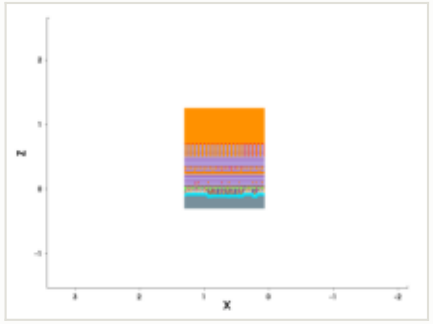

mask for this step

no mask for this step

steps by process area

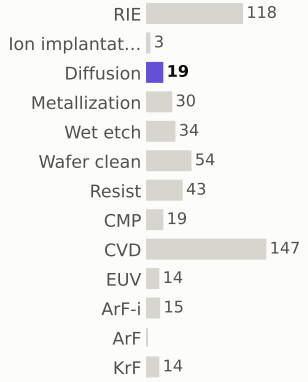

materials deposited (g)

gases emitted (g)



Step #5490: CMP

etch_cmp · CMP

0.169	454.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



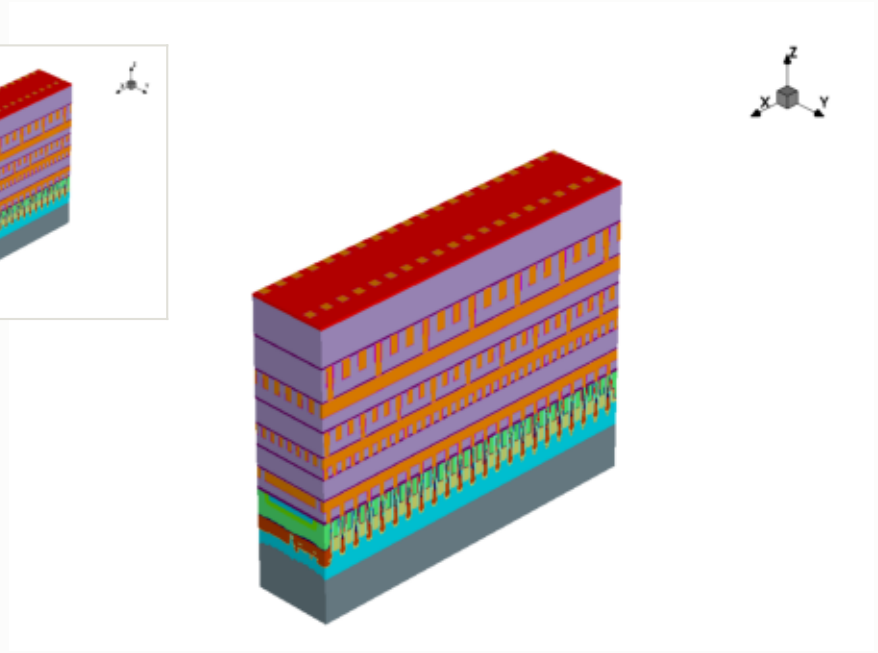

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

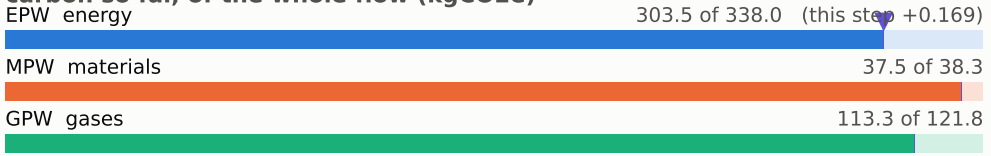

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

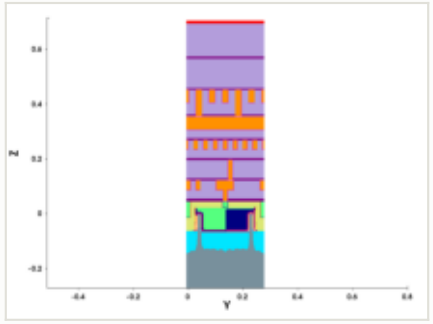

y cut at 0.211 µm

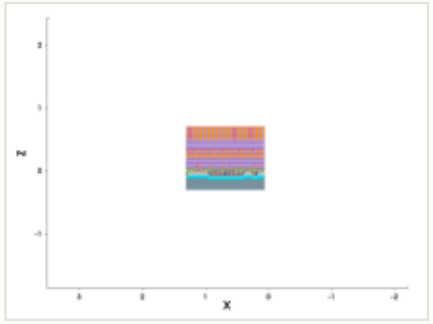

mask for this step

no mask for this step

steps by process area

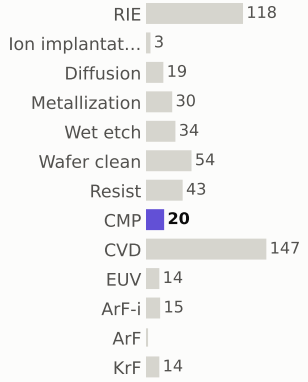

materials deposited (g)

gases emitted (g)



Step #5500: CVD

depo_fill · CVD

1.31	455.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



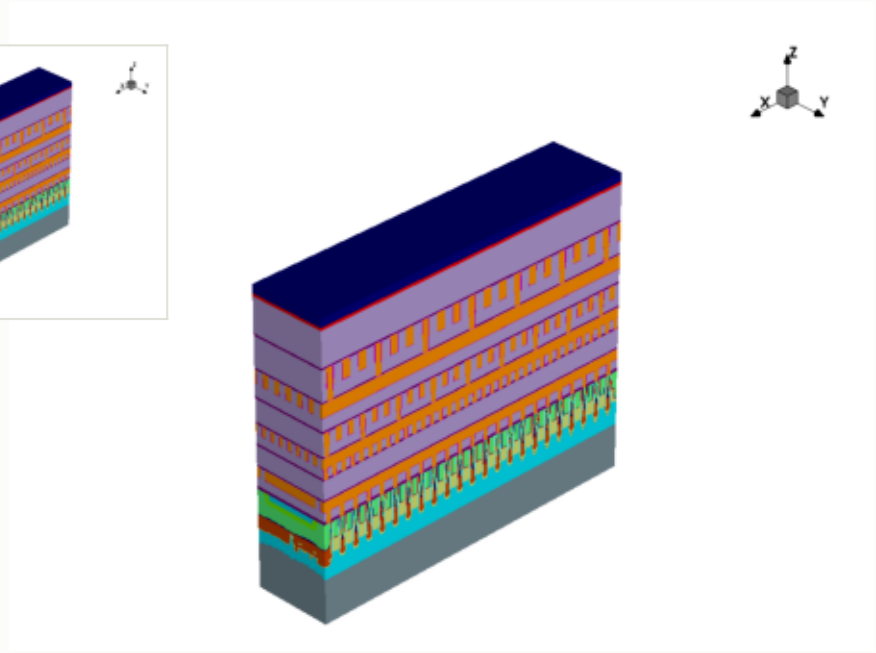

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0322 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

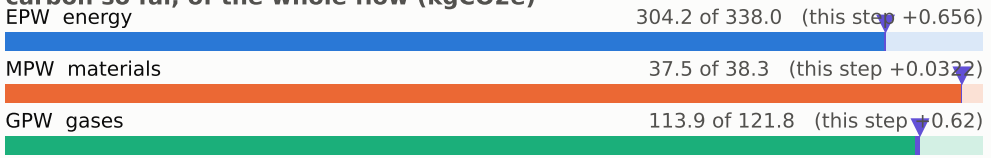

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

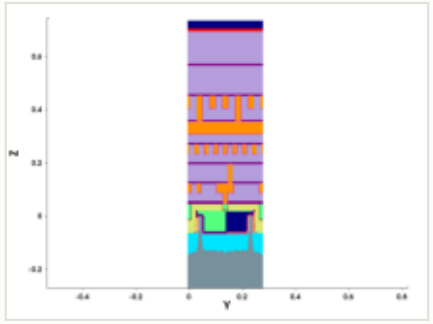

y cut at 0.211 µm

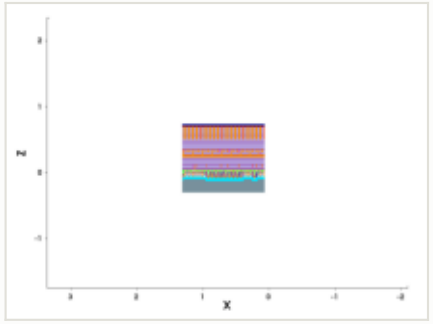

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)



Step #5510: Wafer_clean

clean · Wafer_clean

0.169	455.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



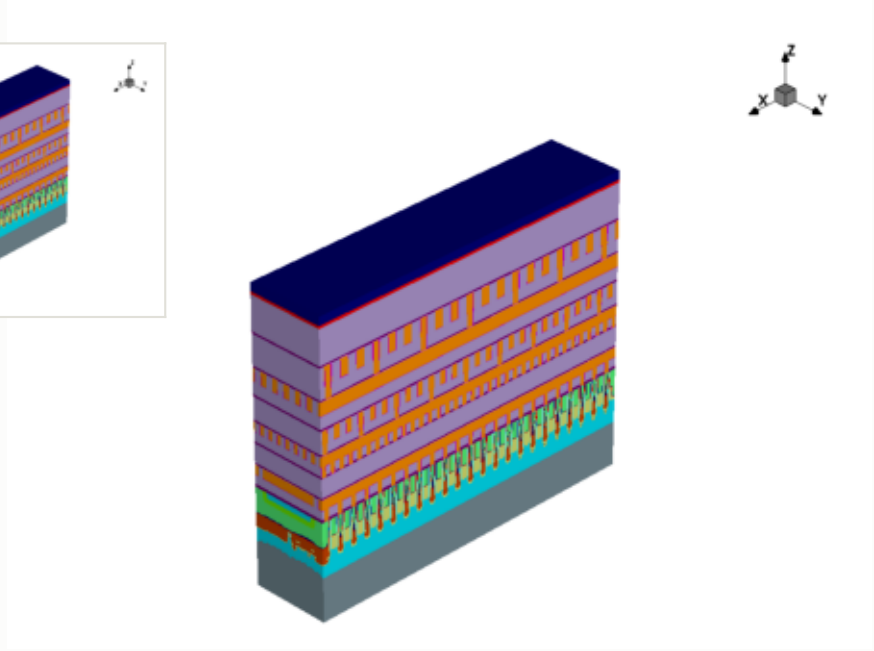

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

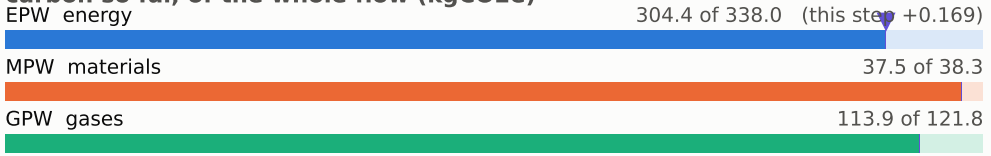

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

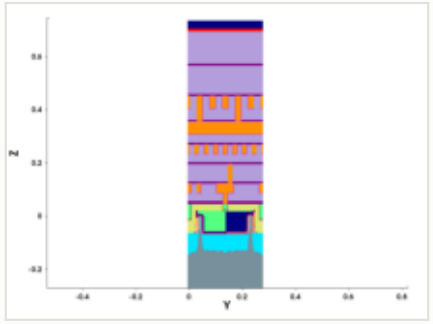

y cut at 0.211 µm

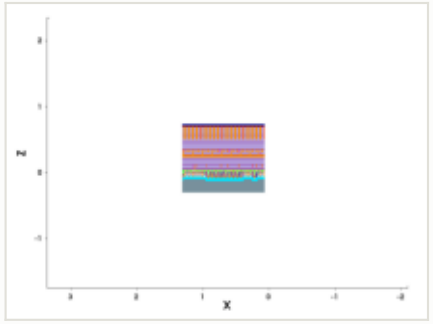

mask for this step

no mask for this step

steps by process area

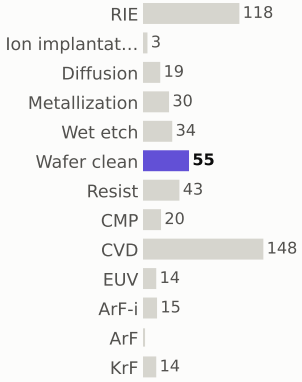

materials deposited (g)

gases emitted (g)



Step #5520: CVD

depo_fill · CVD

1.31	457.1	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



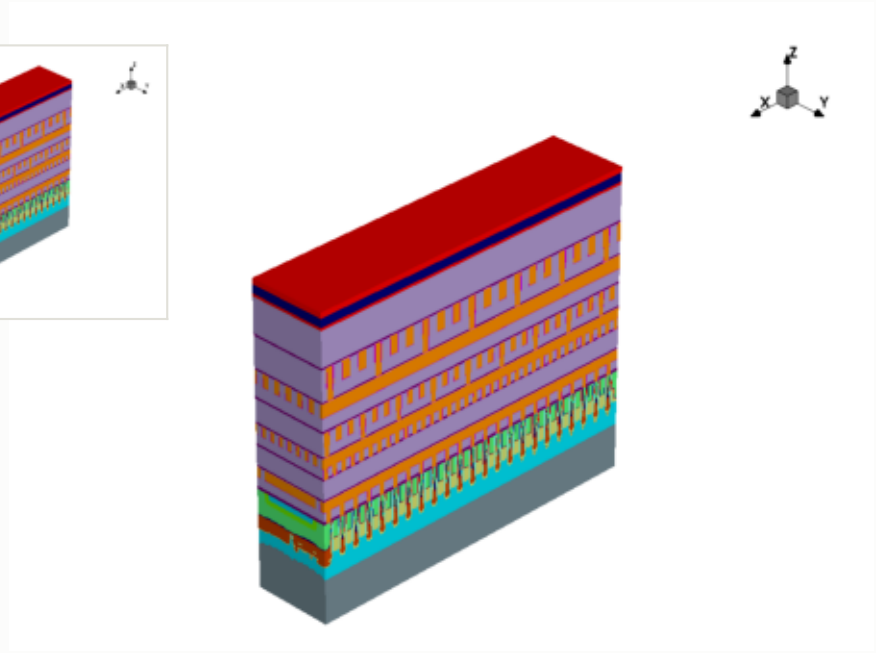

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

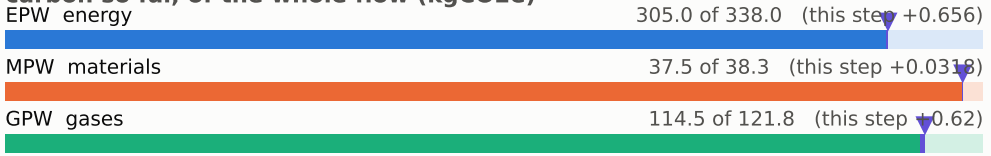

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

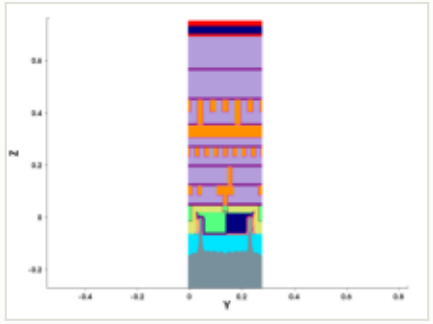

y cut at 0.211 µm

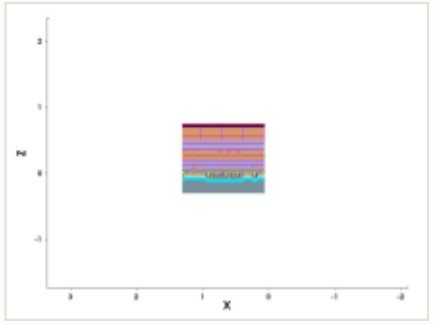

mask for this step

no mask for this step

steps by process area

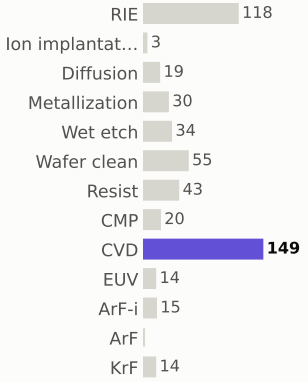

materials deposited (g)

gases emitted (g)



Step #5530: CVD

depo_fill · CVD

1.31	458.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



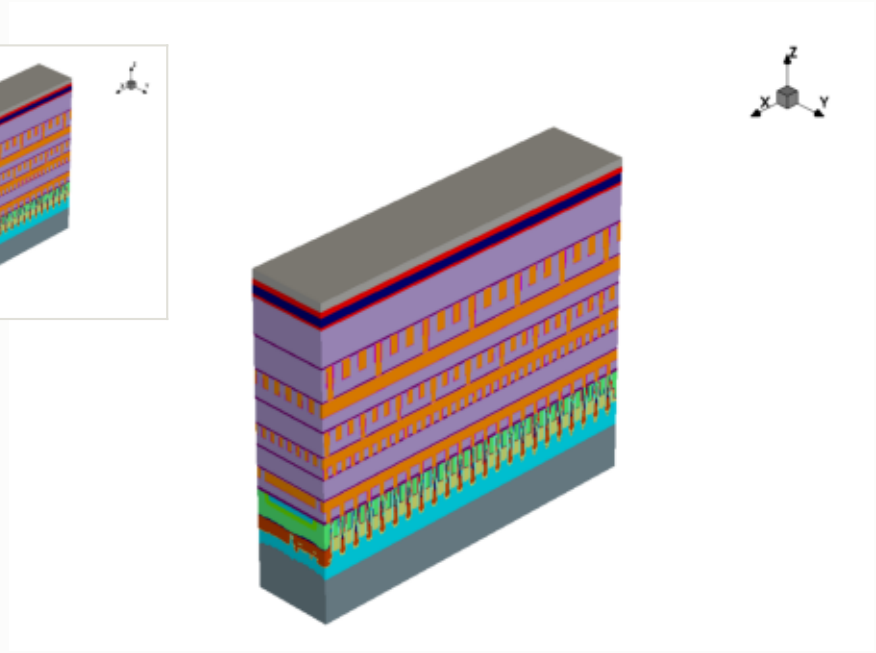

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

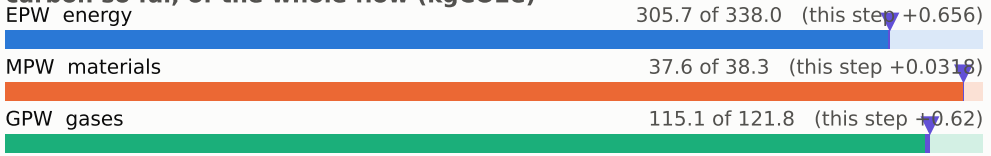

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

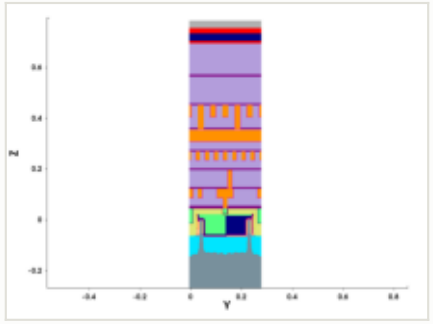

y cut at 0.211 µm

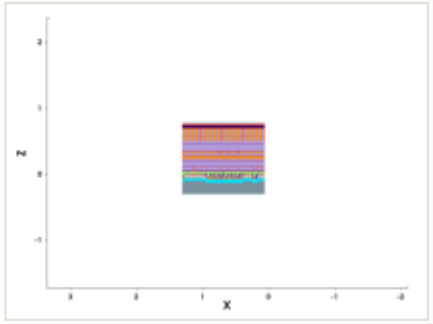

mask for this step

no mask for this step

steps by process area

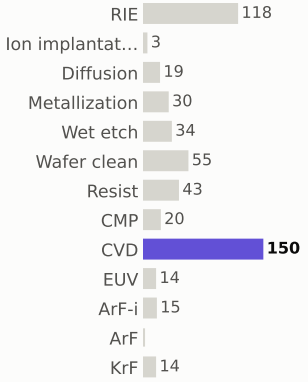

materials deposited (g)

gases emitted (g)



Step #5540: Resist

depo_fill · Resist

0.169	458.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



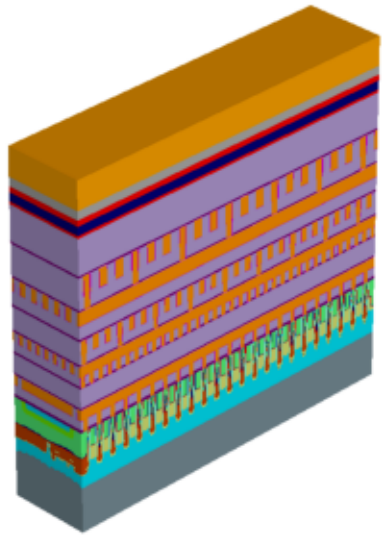

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

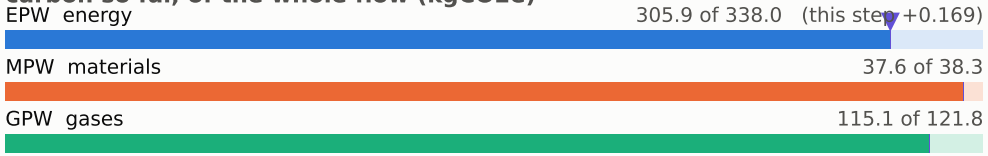

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

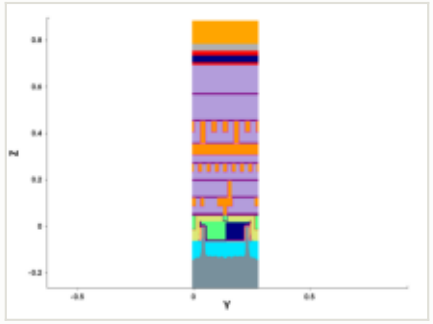

y cut at 0.211 µm

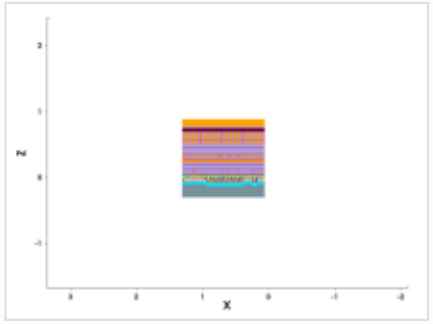

mask for this step

no mask for this step

steps by process area

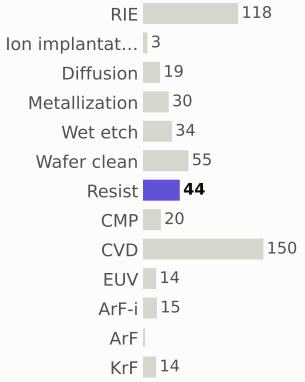

materials deposited (g)

gases emitted (g)



Step #5550: CVD

depo_fill · CVD

1.31	459.9	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



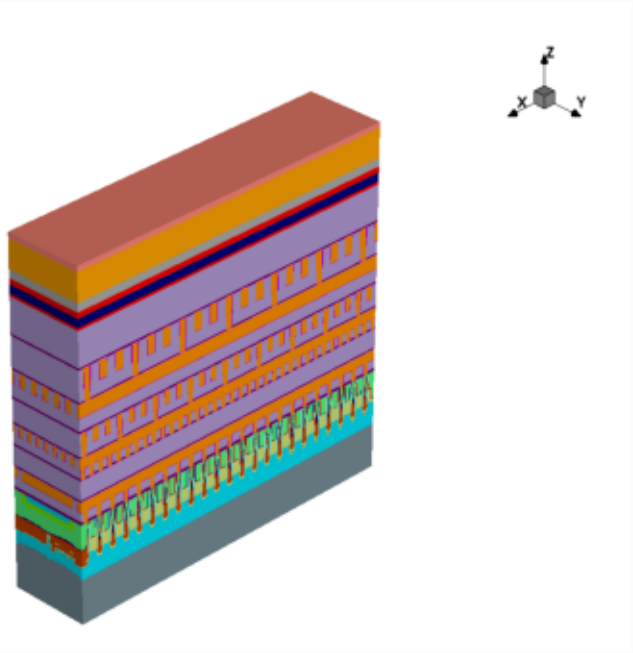

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

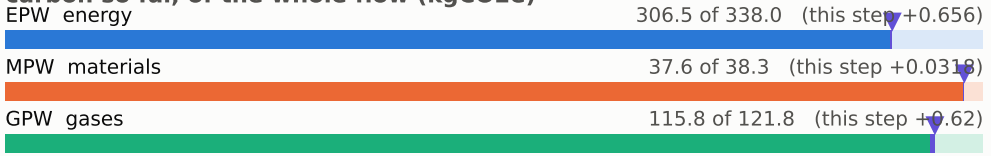

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

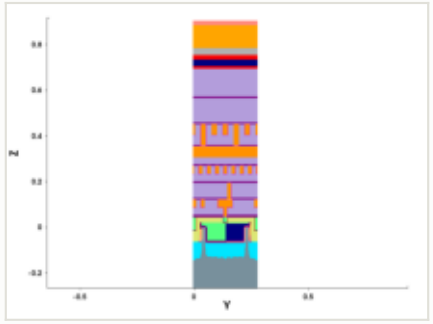

y cut at 0.211 µm

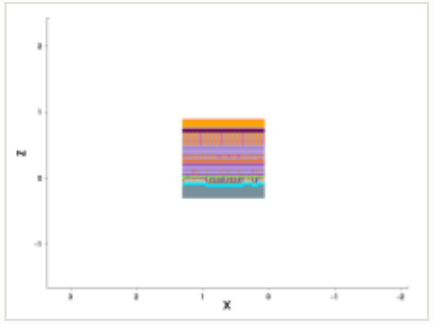

mask for this step

no mask for this step

steps by process area

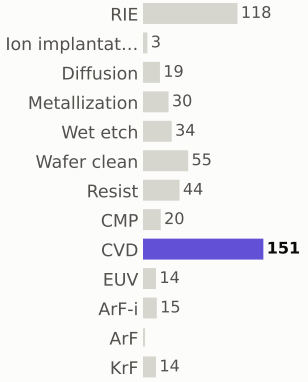

materials deposited (g)

gases emitted (g)



Step #5560: Wafer_clean

clean · Wafer_clean

0.169	460.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



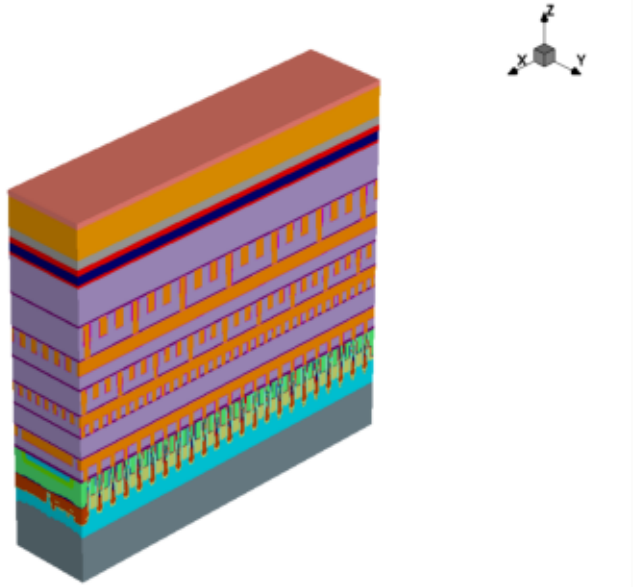

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

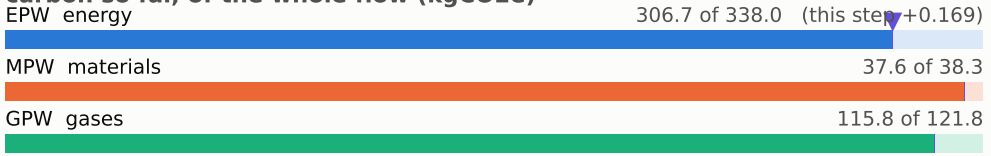

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

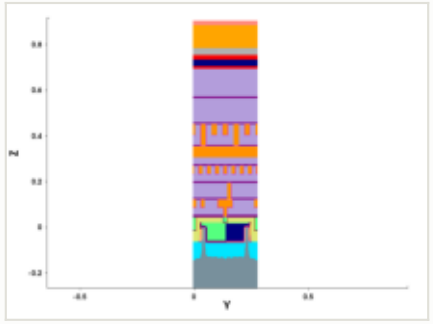

y cut at 0.211 µm

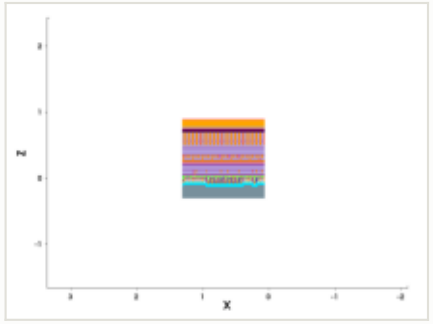

mask for this step

no mask for this step

steps by process area

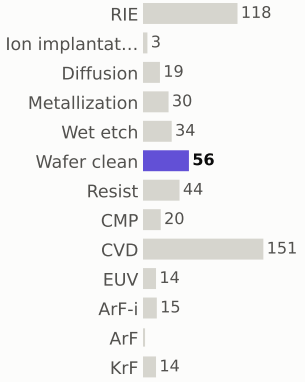

materials deposited (g)

gases emitted (g)



Step #5570: ArF-i

litho_patterning · ArF-i

0.217	460.3	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



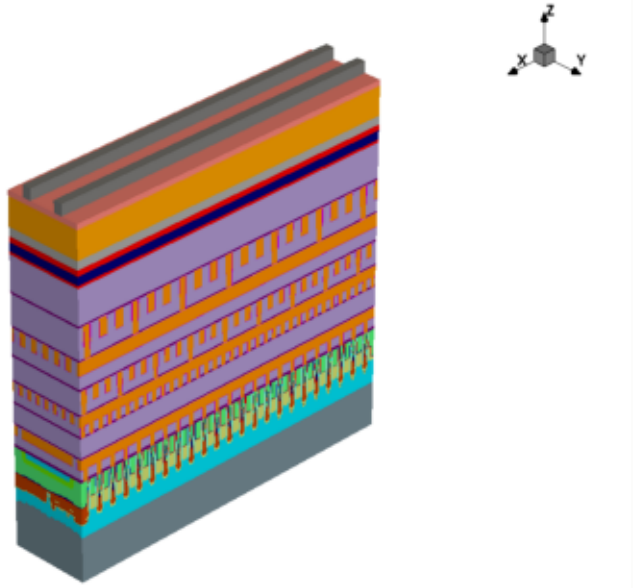

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

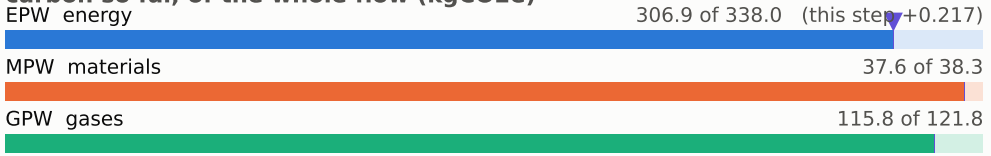

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

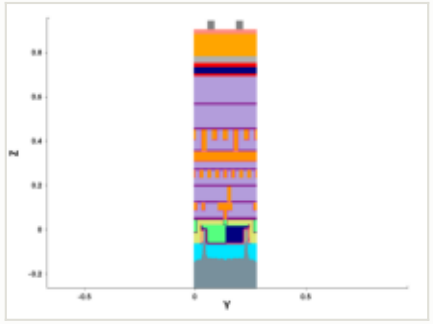

y cut at 0.211 µm

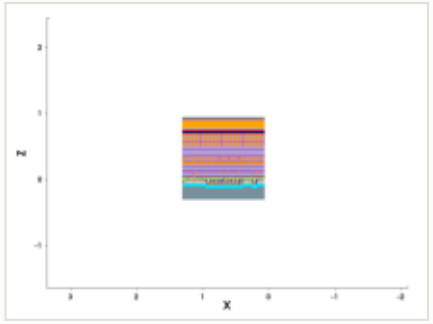

mask: layer 10701:0, positive (GDSII)



steps by process area

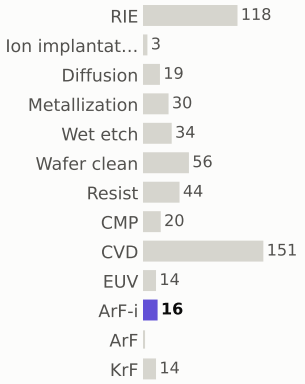

materials deposited (g)

gases emitted (g)



Step #5580: Ion_implantation

treatment · Ion_implantation

0.801	461.1	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



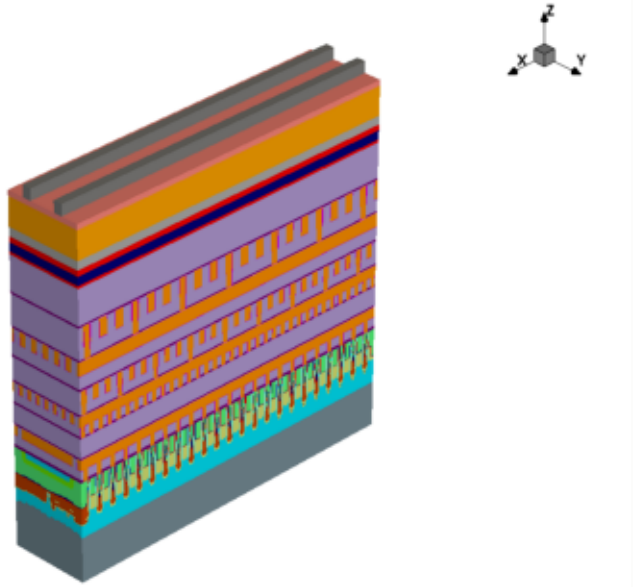

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

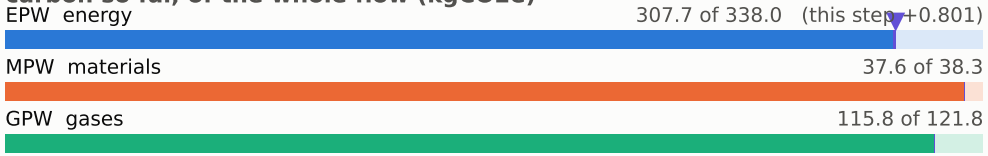

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

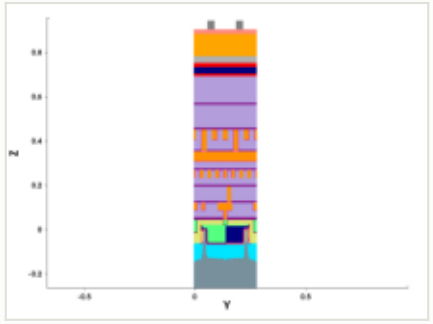

y cut at 0.211 µm

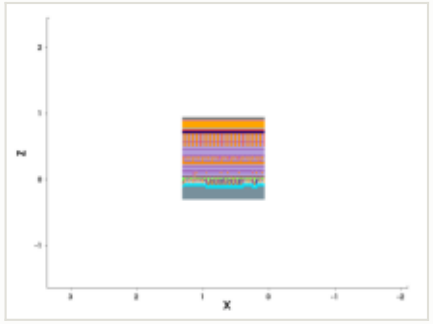

mask for this step

no mask for this step

steps by process area

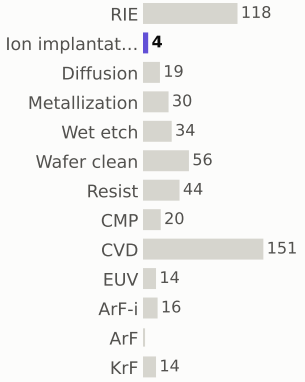

materials deposited (g)

gases emitted (g)



Step #5590: RIE

etch_anisotropic · RIE

1.04	462.1	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



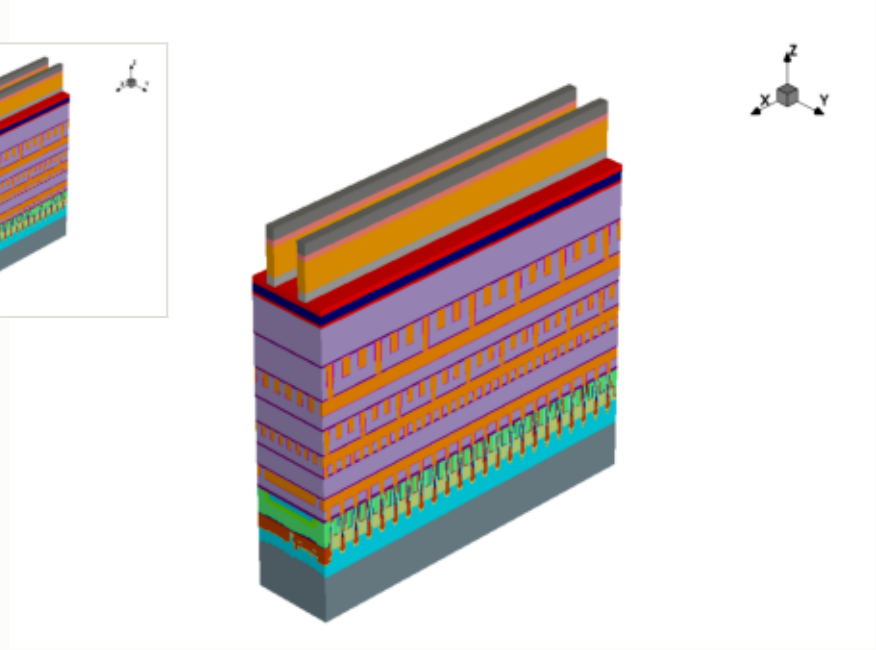

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

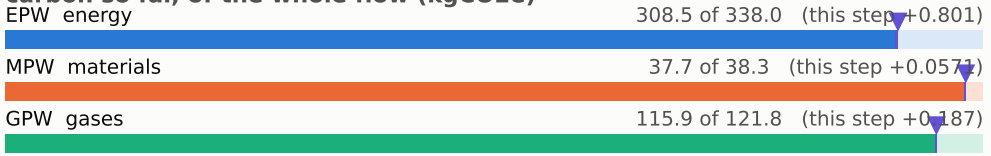

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

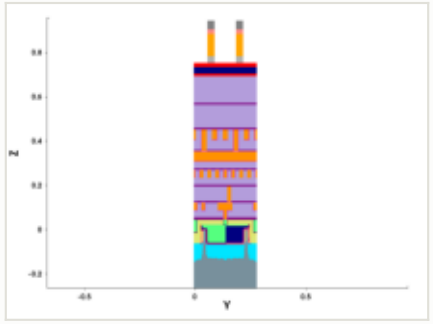

y cut at 0.211 µm

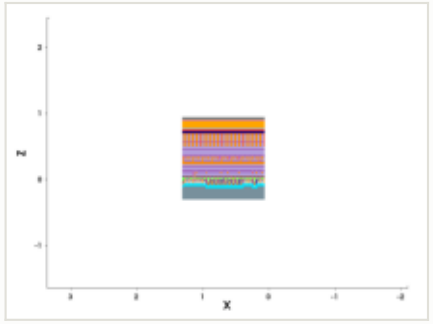

mask for this step

no mask for this step

steps by process area

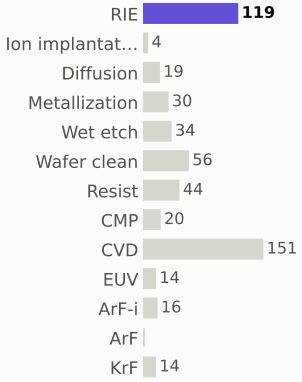

materials deposited (g)

gases emitted (g)



Step #5600: Wafer_clean

etch_strip · Wafer_clean

0.169	462.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



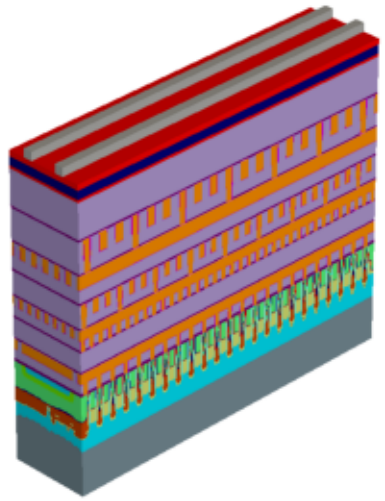

x cut at 0.677 µm

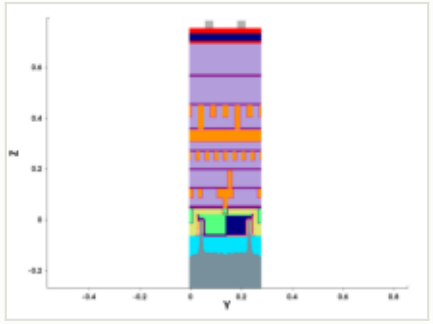

y cut at 0.211 µm

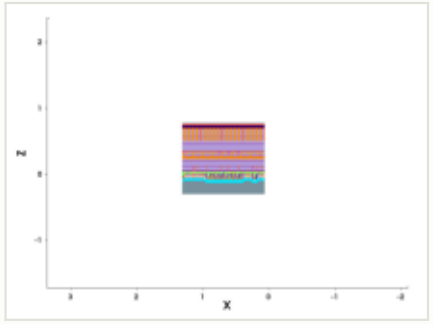

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

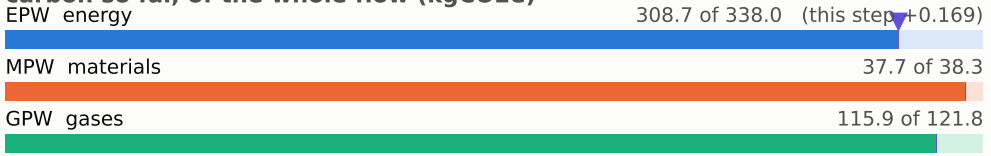

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

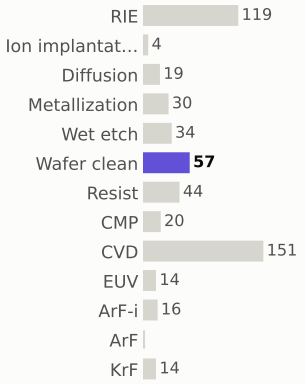

materials deposited (g)

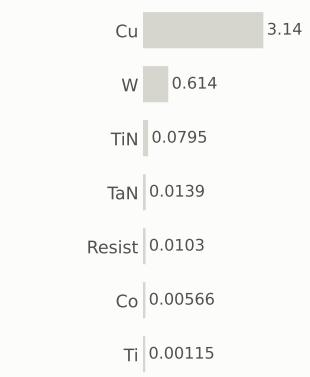

gases emitted (g)

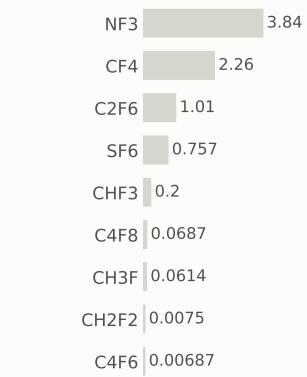

Step #5610: CVD

depo_isotropic · CVD

1.31	463.6	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



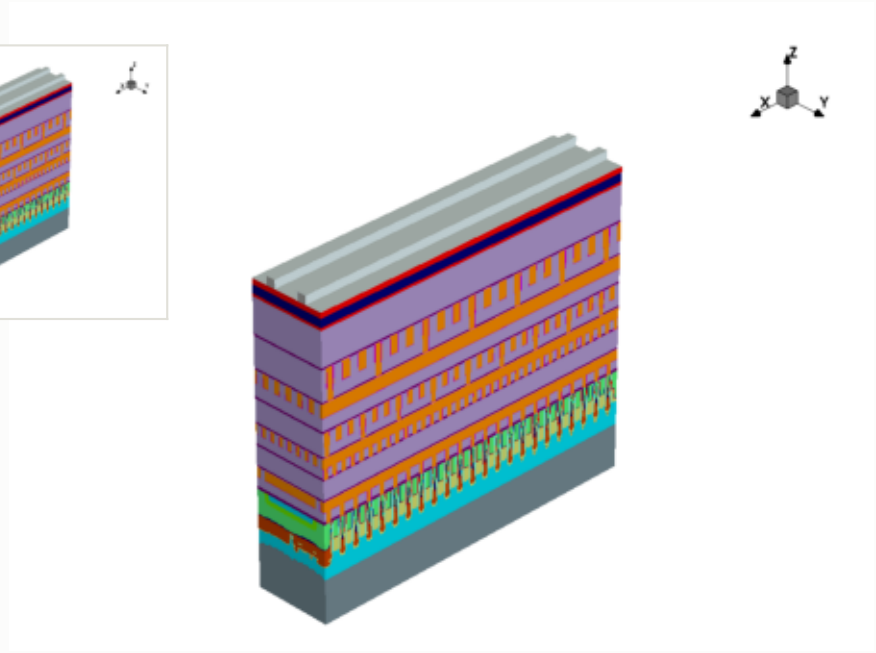

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

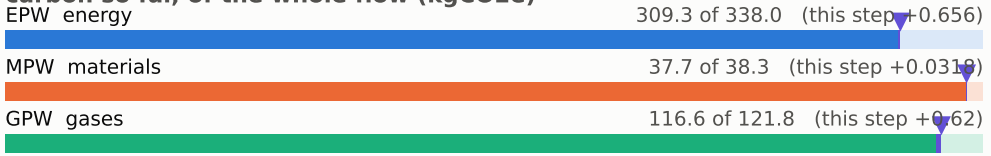

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

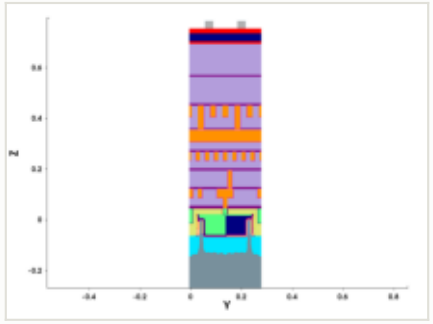

y cut at 0.211 µm

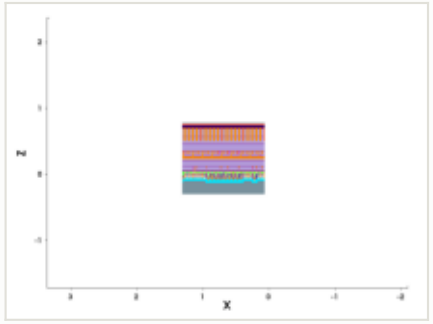

mask for this step

no mask for this step

steps by process area

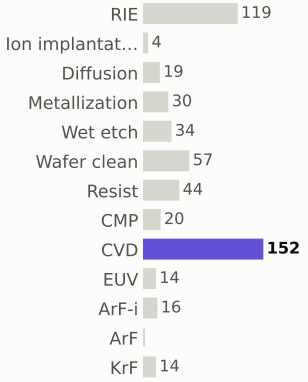

materials deposited (g)

gases emitted (g)



Step #5620: RIE

etch_anisotropic · RIE

1.04	464.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



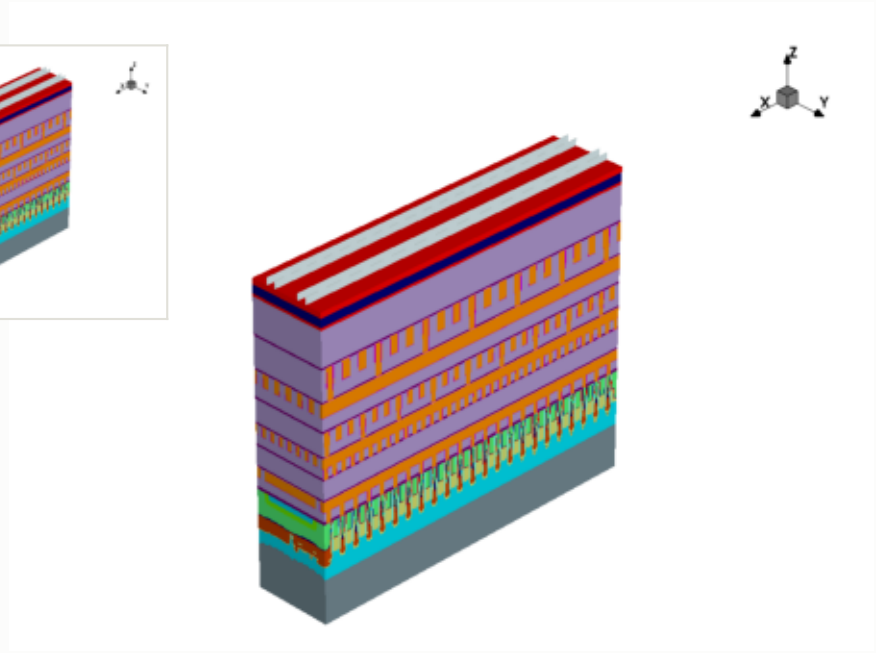

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

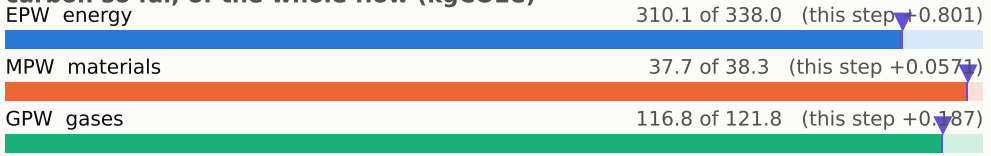

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

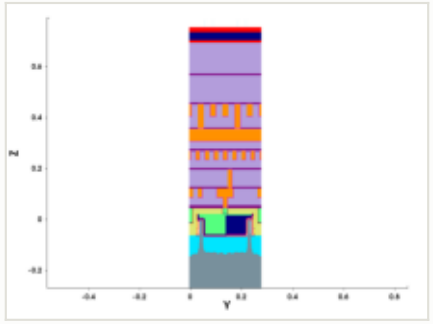

y cut at 0.211 µm

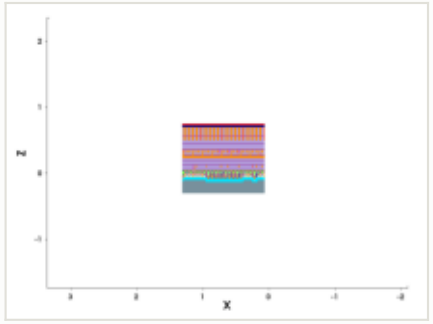

mask for this step

no mask for this step

steps by process area

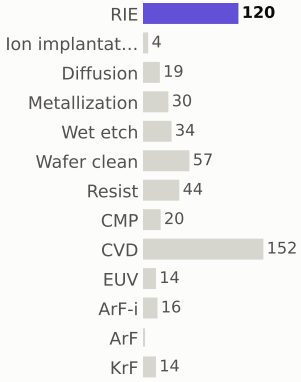

materials deposited (g)

gases emitted (g)



Step #5630: Wafer_clean

etch_strip · Wafer_clean

0.169	464.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



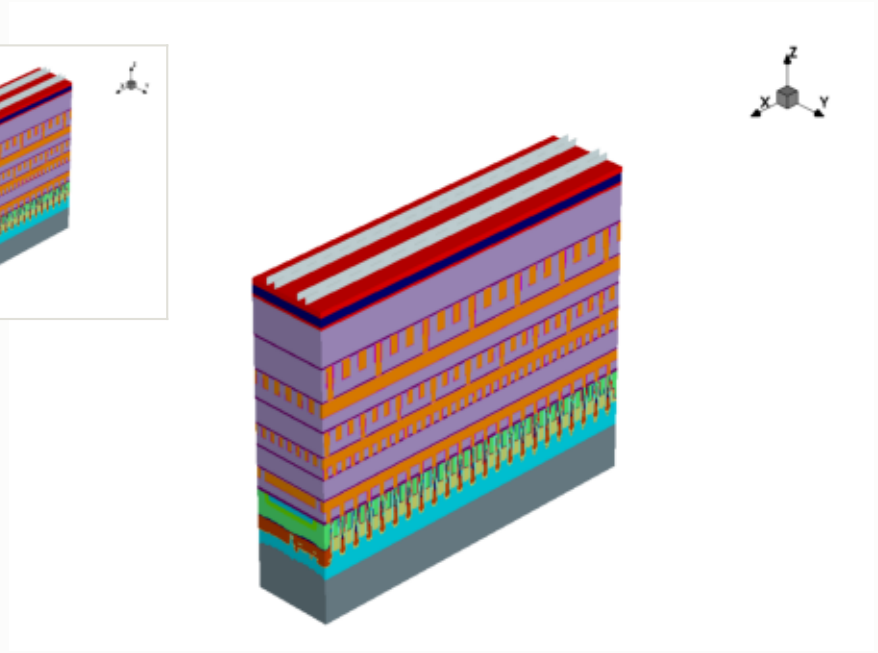

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

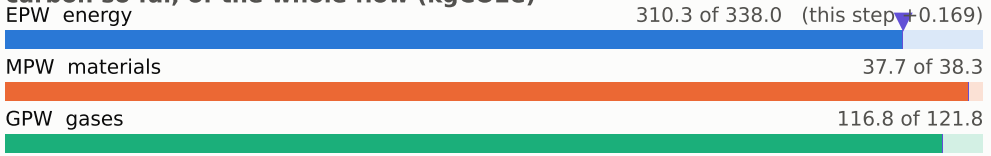

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

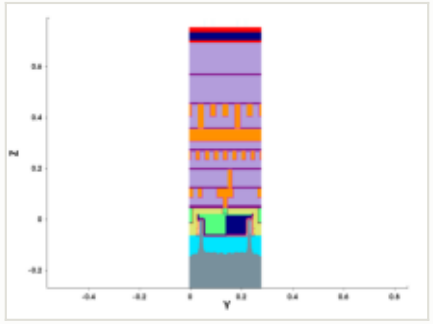

y cut at 0.211 µm

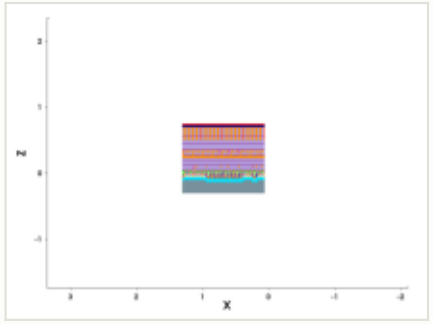

mask for this step

no mask for this step

steps by process area

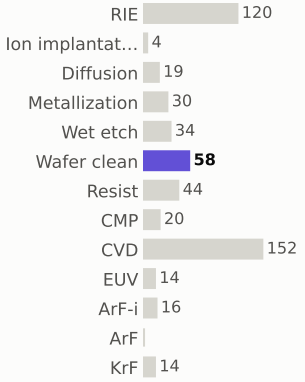

materials deposited (g)

gases emitted (g)



Step #5640: Resist

depo_fill · Resist

0.169	465.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



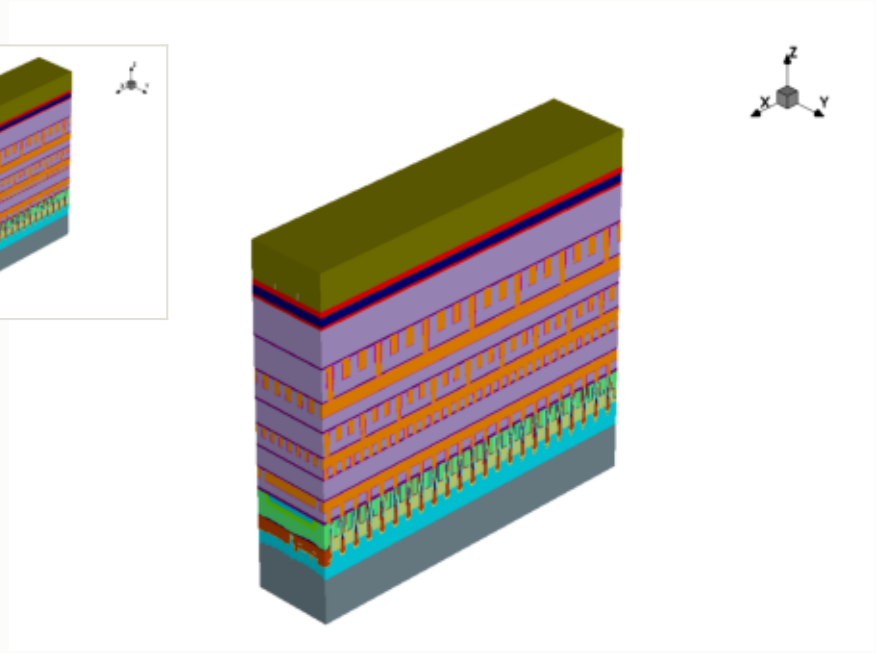

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

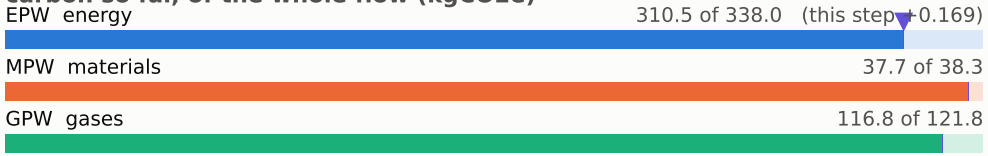

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

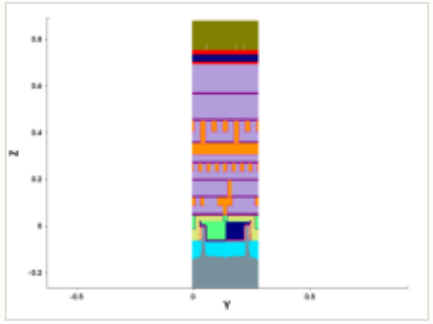

y cut at 0.211 µm

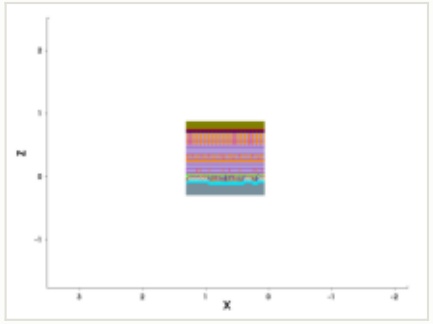

mask for this step

no mask for this step

steps by process area

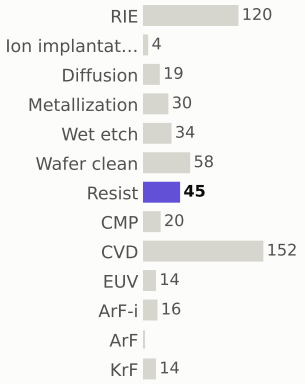

materials deposited (g)



gases emitted (g)

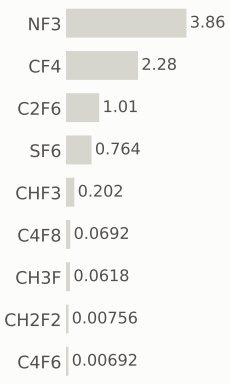

Step #5650: Wafer_clean

clean · Wafer_clean

0.169	465.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



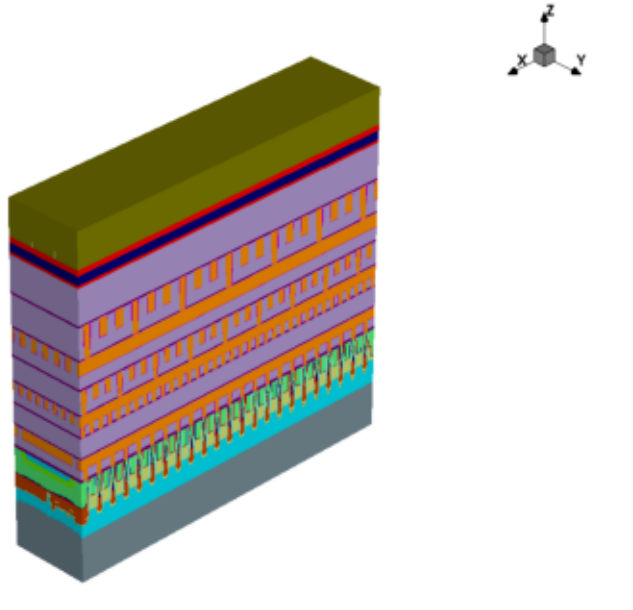

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

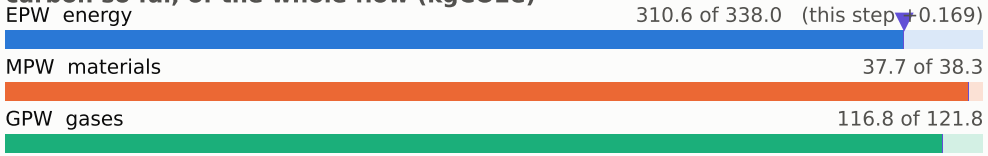

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

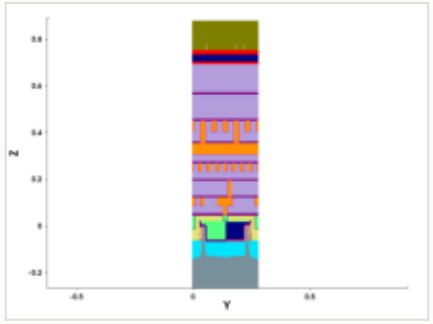

y cut at 0.211 µm

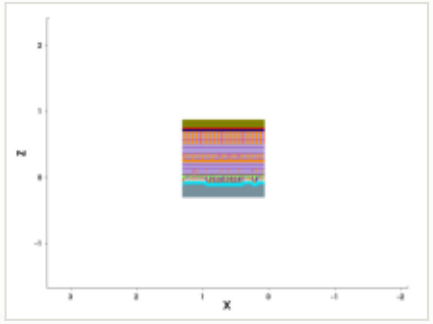

mask for this step

no mask for this step

steps by process area

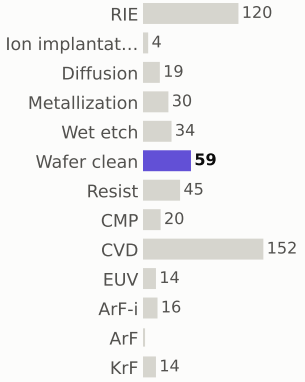

materials deposited (g)

gases emitted (g)



Step #5660: ArF-i

litho_patterning · ArF-i

0.217	465.3	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



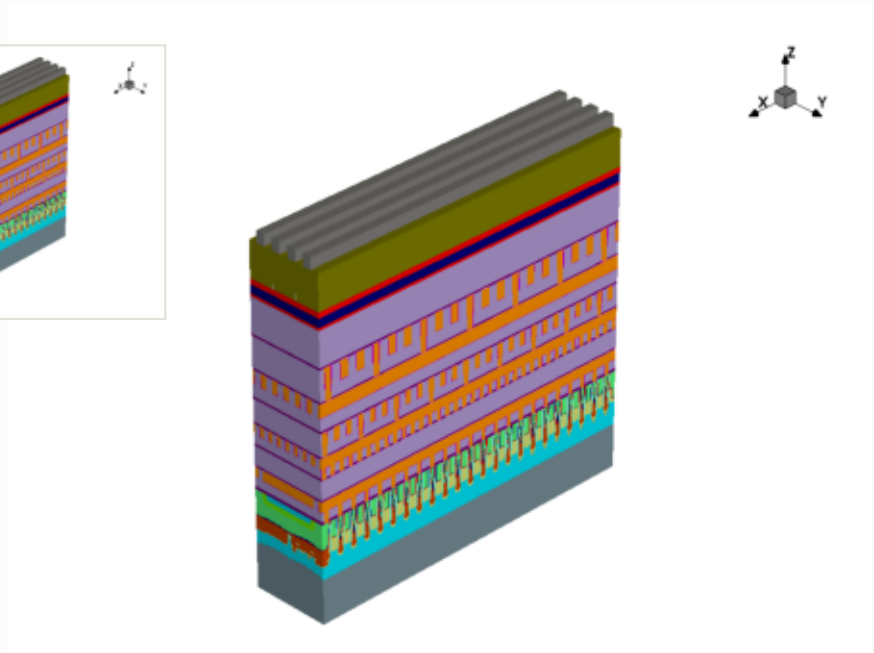

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

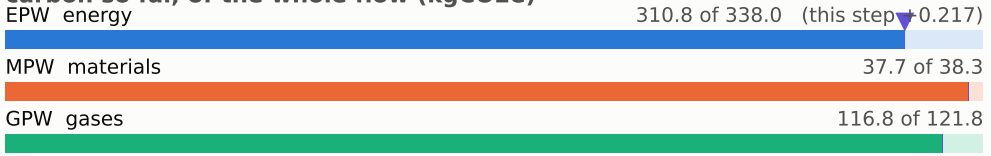

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

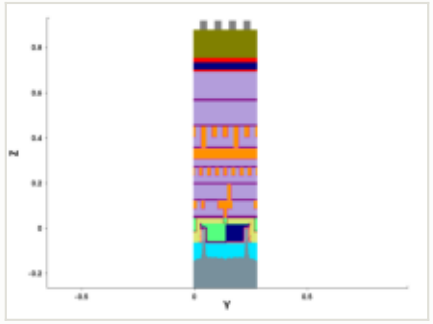

y cut at 0.211 µm

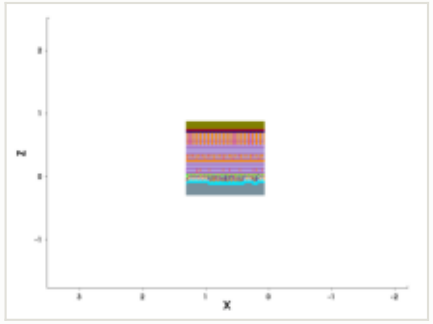

mask: layer 70:0 (GDSII)

steps by process area

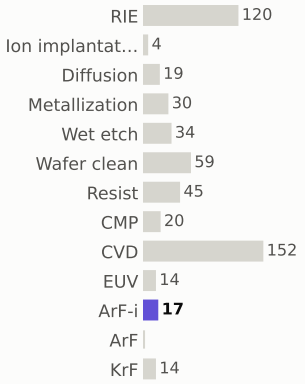

materials deposited (g)



gases emitted (g)



Step #5670: RIE

etch_anisotropic · RIE

1.04	466.4	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



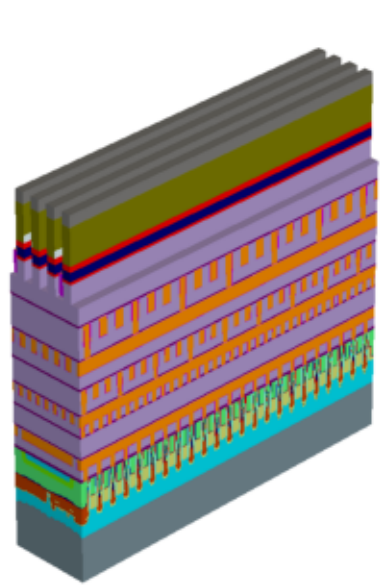

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

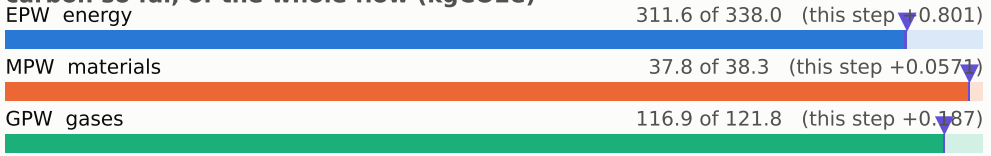

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

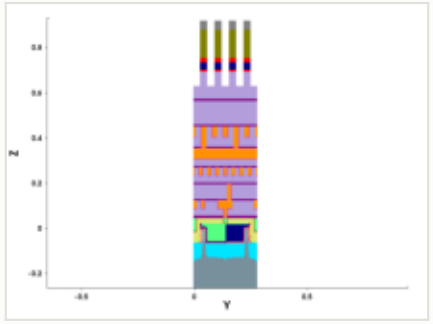

y cut at 0.211 µm

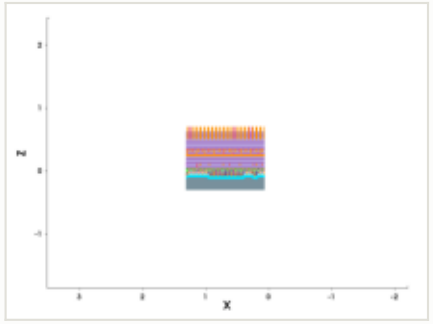

mask for this step

no mask for this step

steps by process area

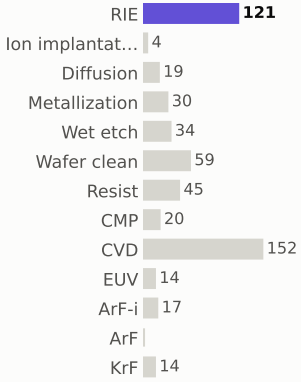

materials deposited (g)

gases emitted (g)



Step #5680: Wafer_clean

etch_strip · Wafer_clean

0.169	466.6	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



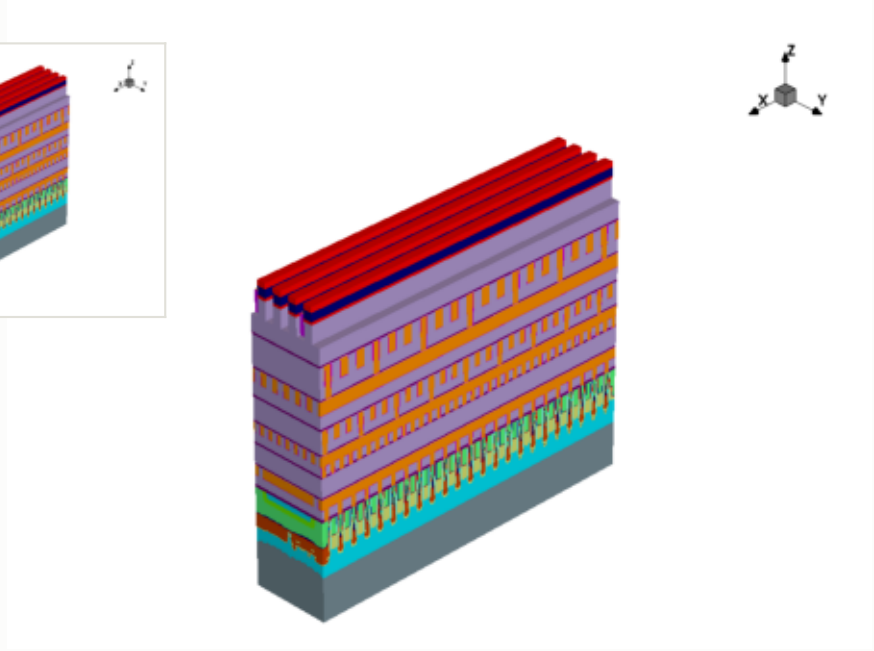

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

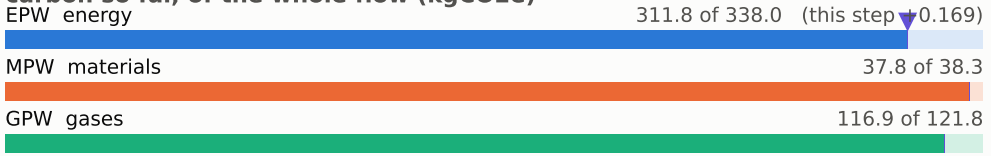

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

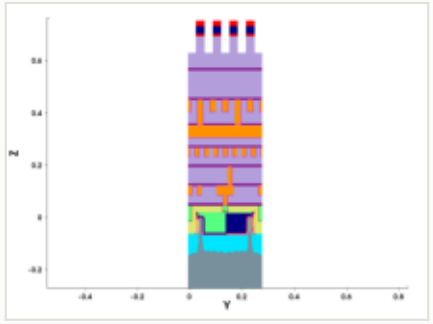

y cut at 0.211 µm

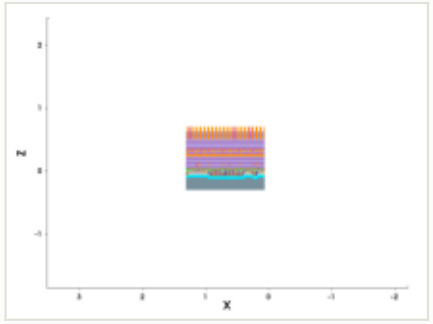

mask for this step

no mask for this step

steps by process area

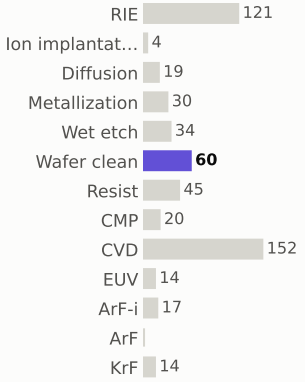

materials deposited (g)

gases emitted (g)



Step #5690: Metallization

depo_ellipsoidal · Metallization

1.2	467.8	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



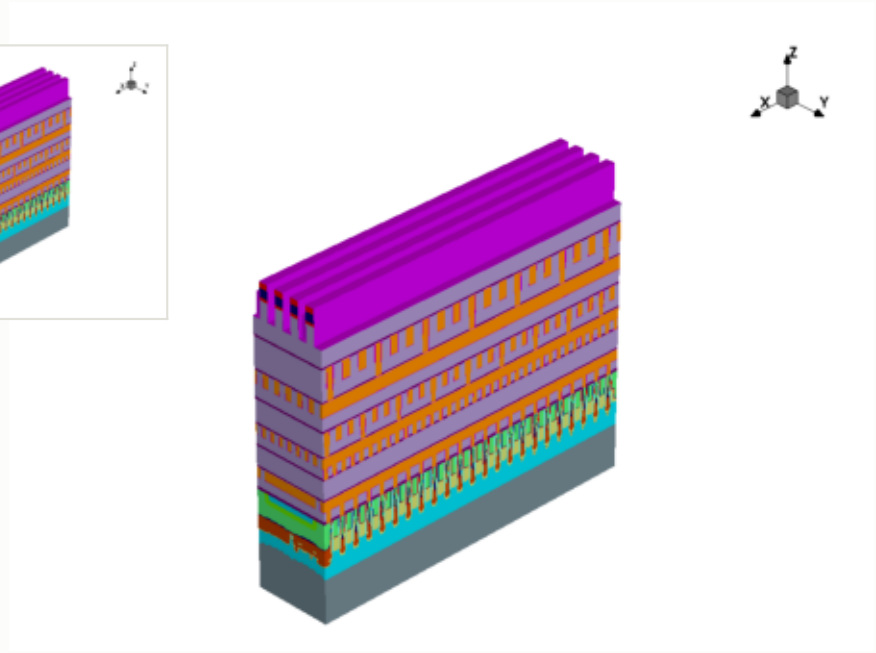

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

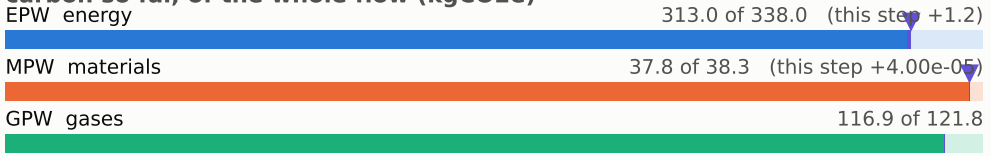

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

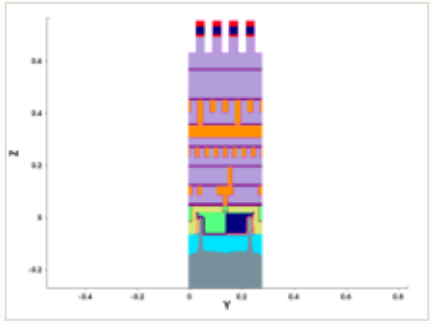

y cut at 0.211 µm

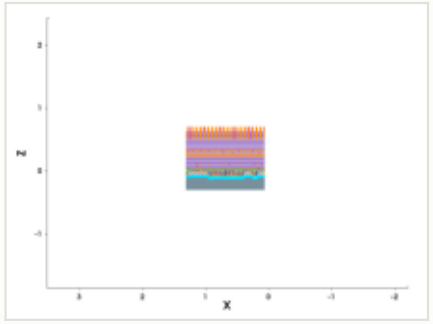

mask for this step

no mask for this step

steps by process area

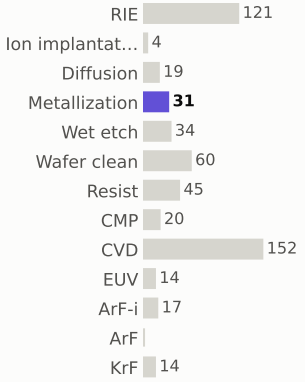

materials deposited (g)

gases emitted (g)



Step #5700: Metallization

depo_fill · Metallization

1.21	469.0	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



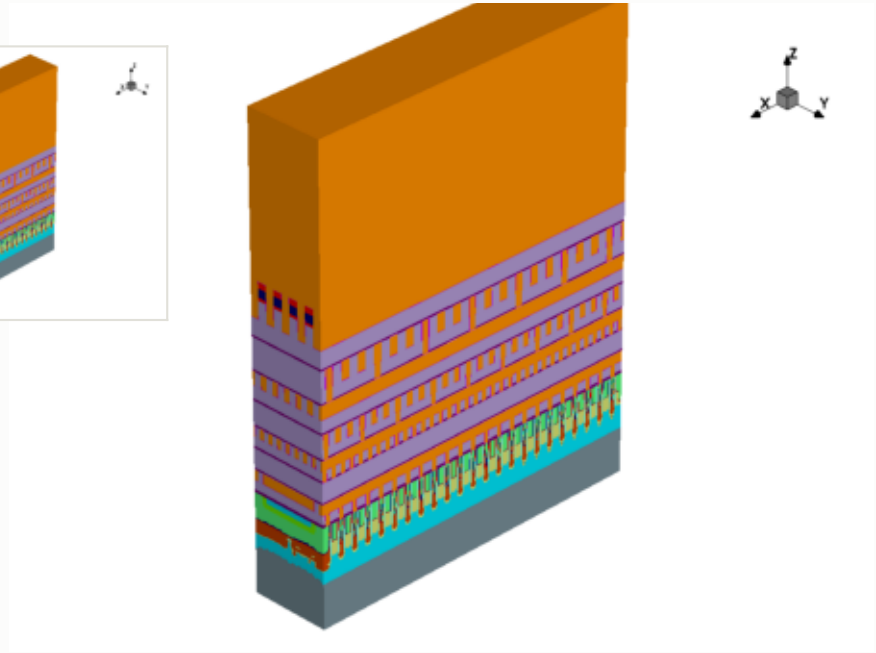

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

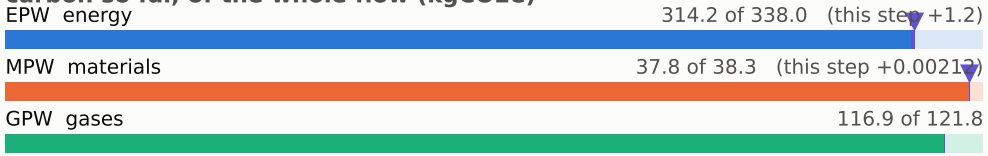

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

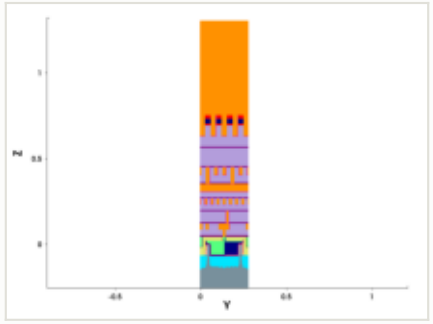

y cut at 0.211 µm

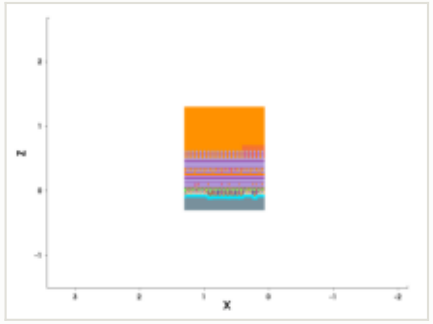

mask for this step

no mask for this step

steps by process area

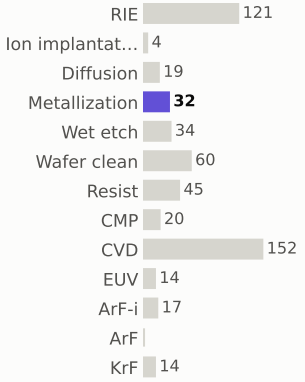

materials deposited (g)

gases emitted (g)



Step #5710: Diffusion

treatment · Diffusion

0.801	469.8	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



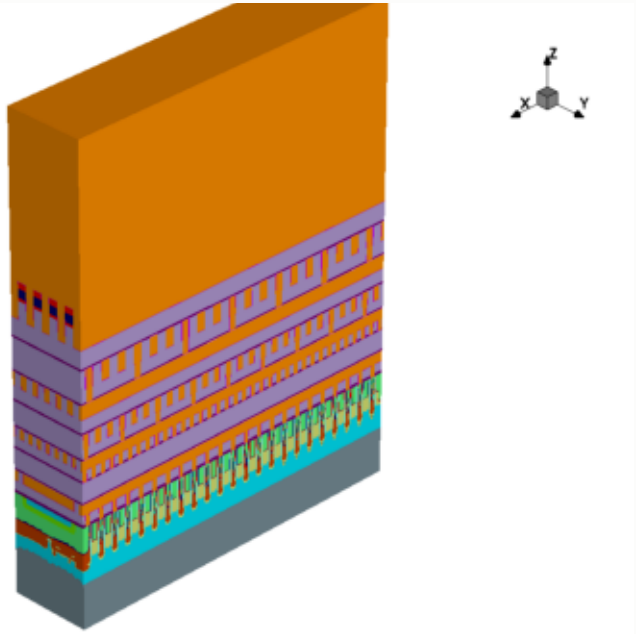

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

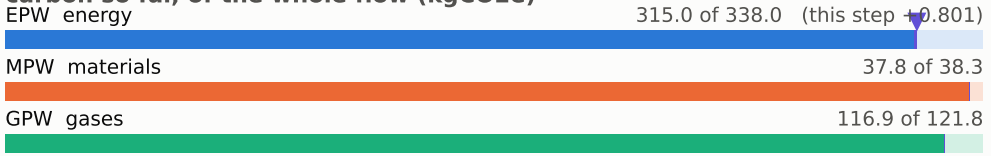

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

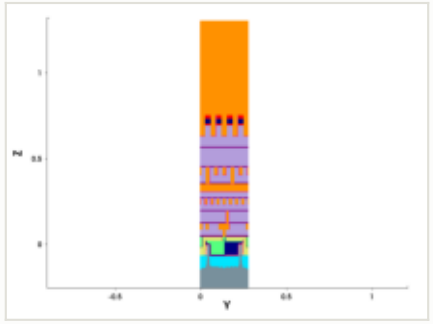

y cut at 0.211 µm

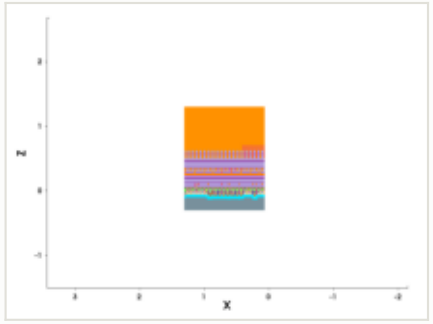

mask for this step

no mask for this step

steps by process area

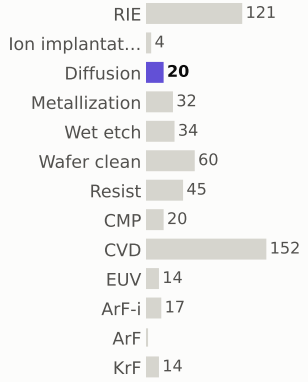

materials deposited (g)

gases emitted (g)



Step #5720: CMP

etch_cmp · CMP

0.169	469.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



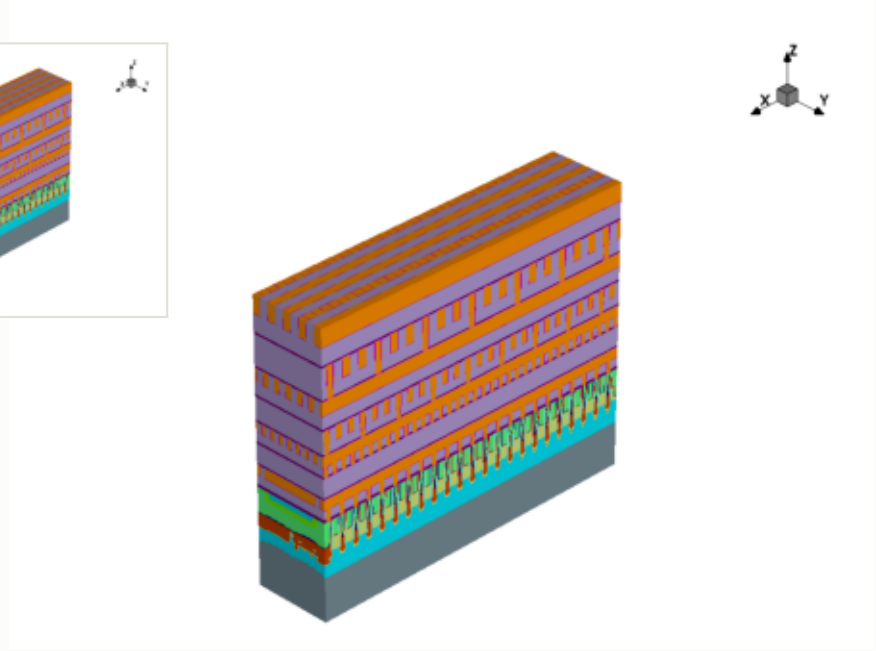

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

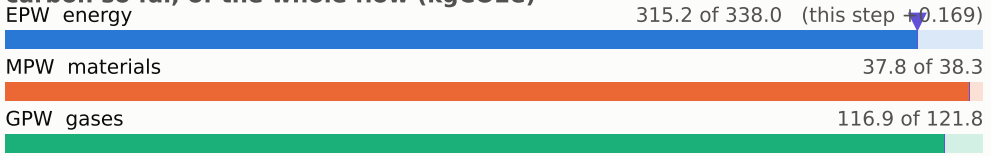

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

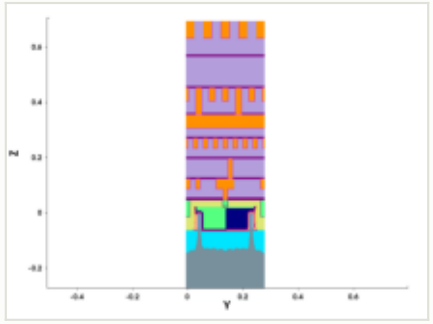

y cut at 0.211 µm

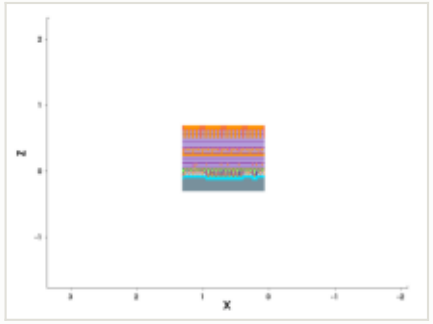

mask for this step

no mask for this step

steps by process area

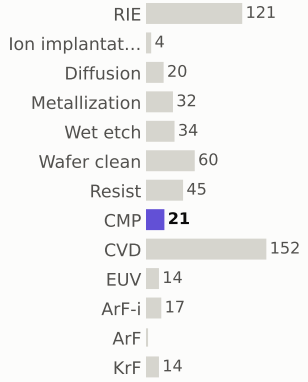

materials deposited (g)

gases emitted (g)



Step #5730: Metallization

depo_isotropic · Metallization

1.2	471.1	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



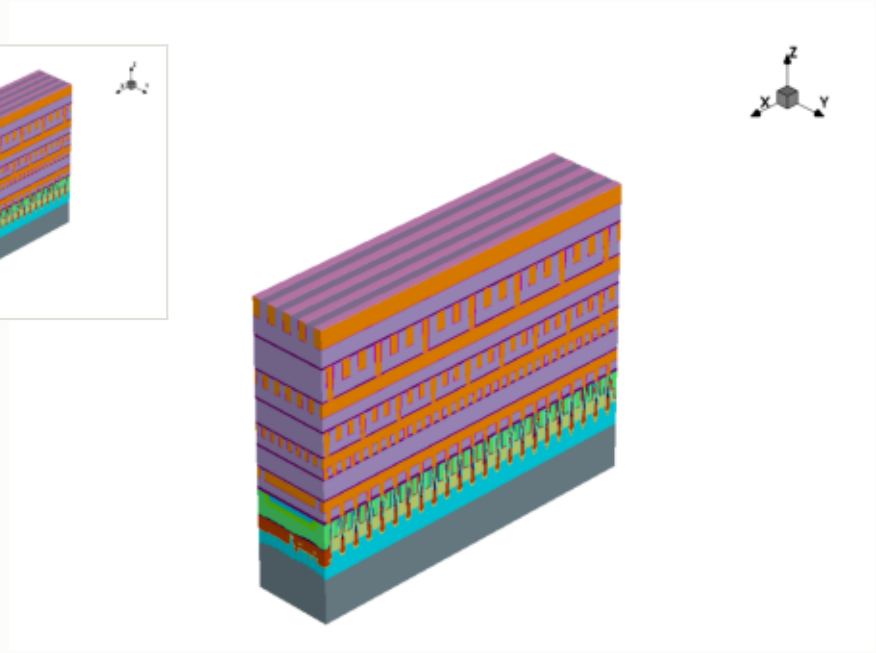

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

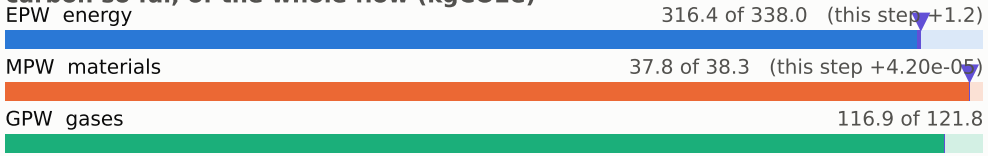

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

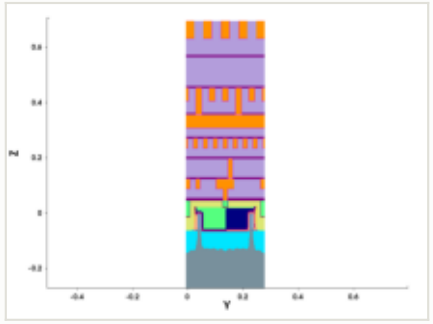

y cut at 0.211 µm

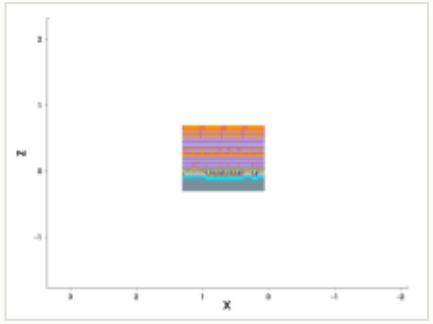

mask for this step

no mask for this step

steps by process area

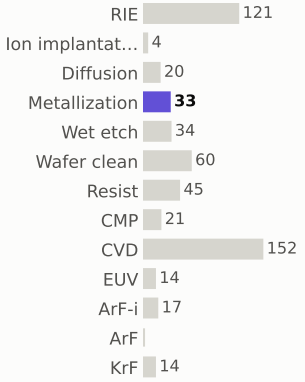

materials deposited (g)



gases emitted (g)



Step #5750: CVD

depo_fill · CVD

1.31	472.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



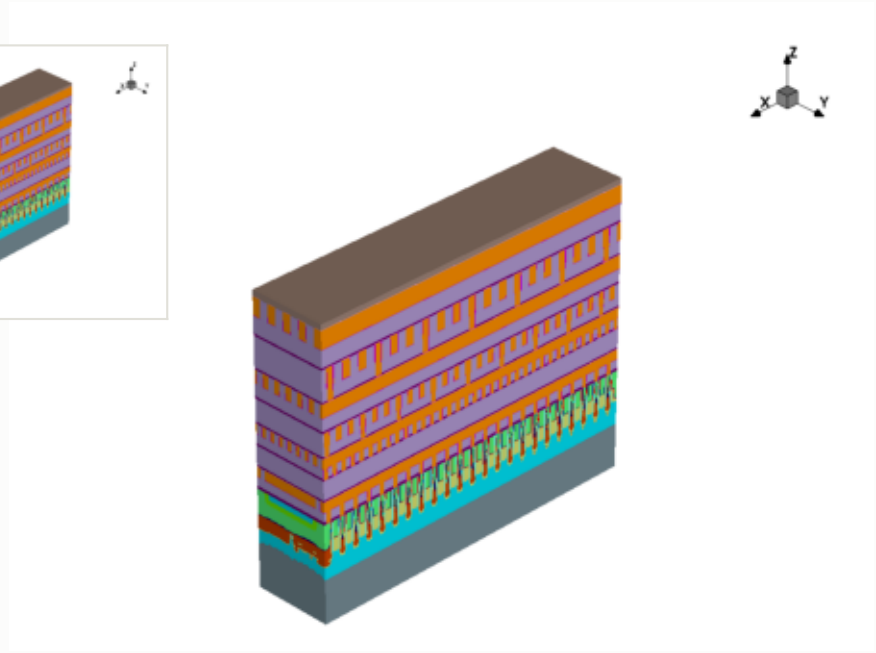

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

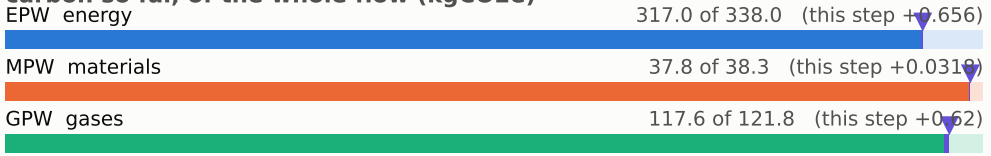

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

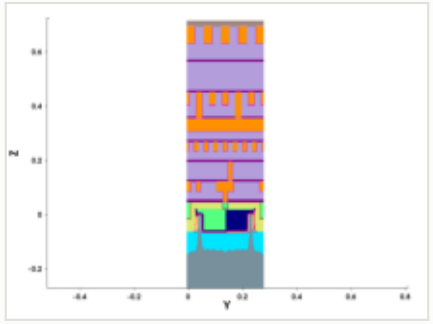

y cut at 0.211 µm

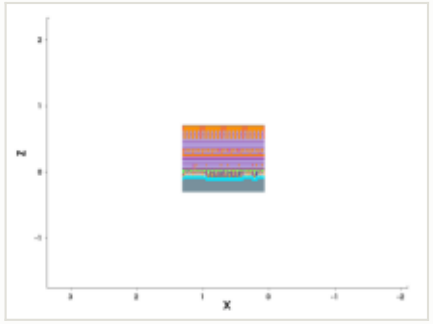

mask for this step

no mask for this step

steps by process area

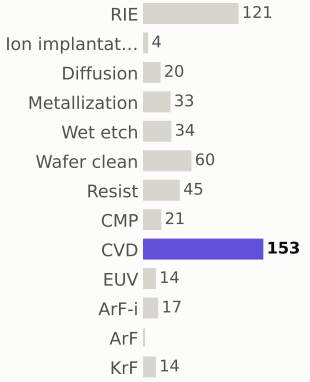

materials deposited (g)

gases emitted (g)



Step #5760: CVD

depo_fill · CVD

1.31	473.8	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



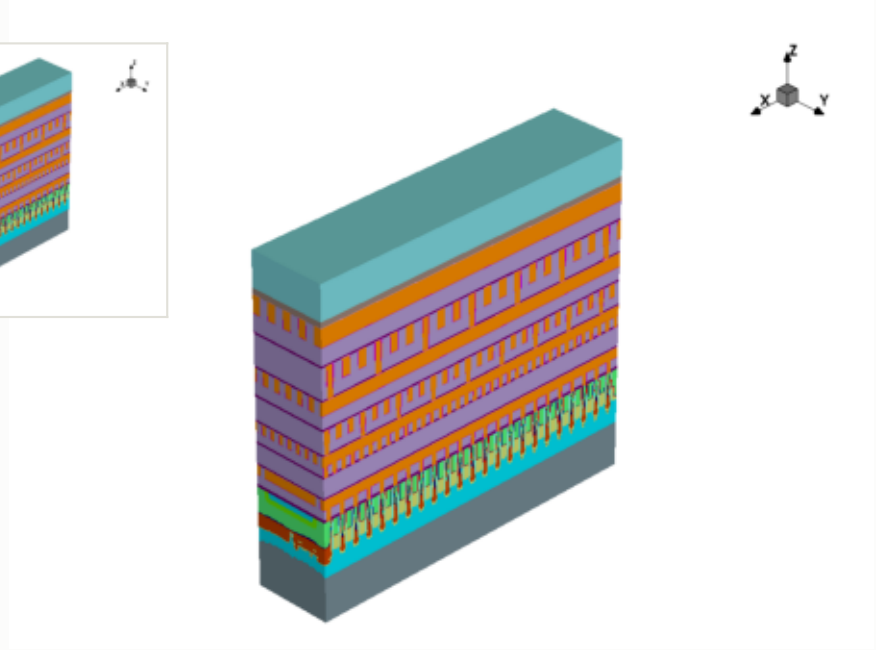

this step

process area	CVD
material	—
thickness	0.124 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

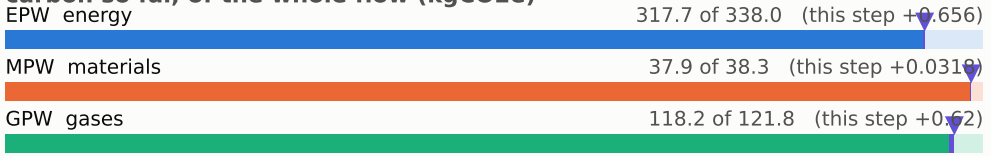

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

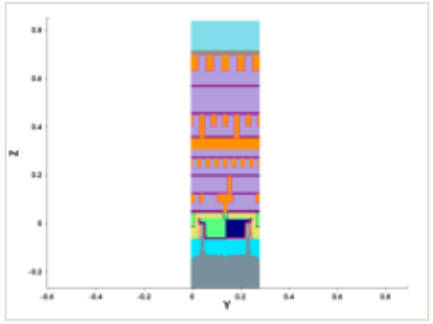

y cut at 0.211 µm

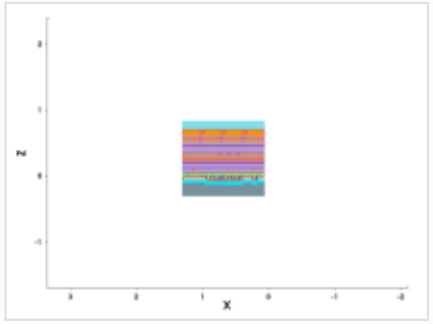

mask for this step

no mask for this step

steps by process area

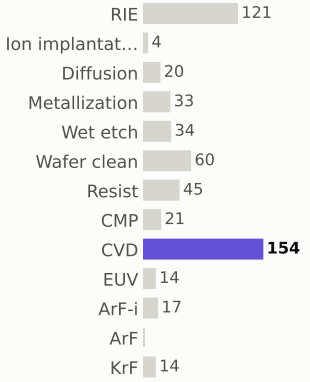

materials deposited (g)

gases emitted (g)



Step #5770: Resist

depo_fill · Resist

0.169	473.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



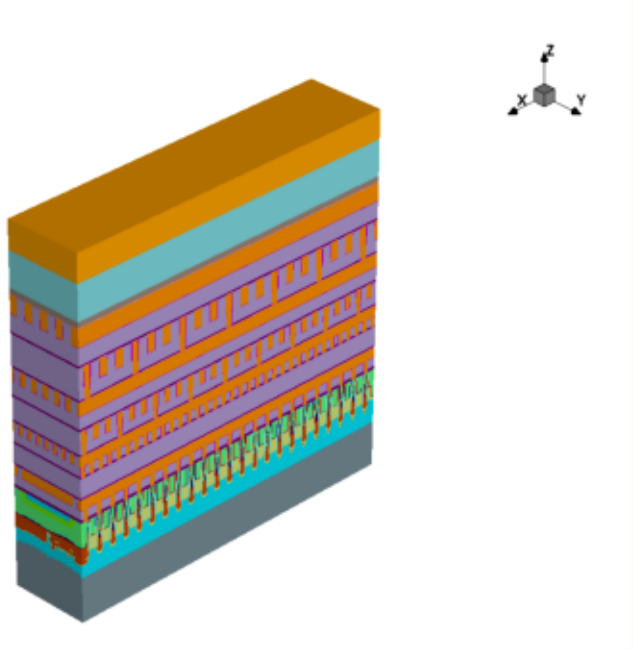

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

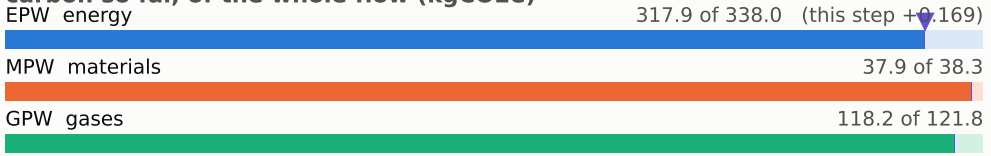

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

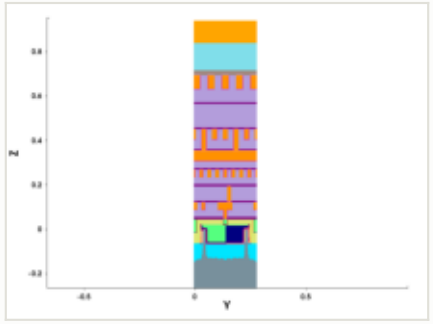

y cut at 0.211 µm

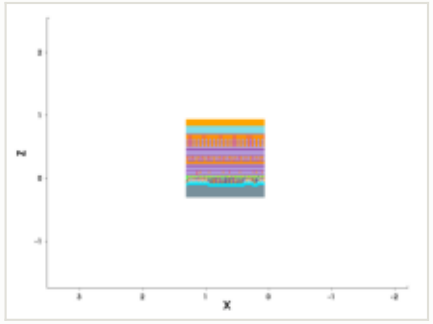

mask for this step

no mask for this step

steps by process area

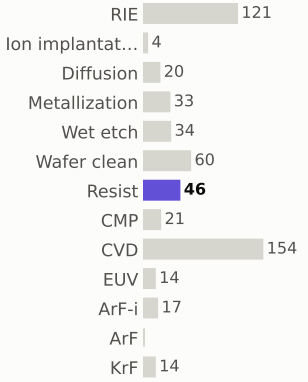

materials deposited (g)

gases emitted (g)



Step #5780: CVD

depo_fill · CVD

1.31	475.2	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



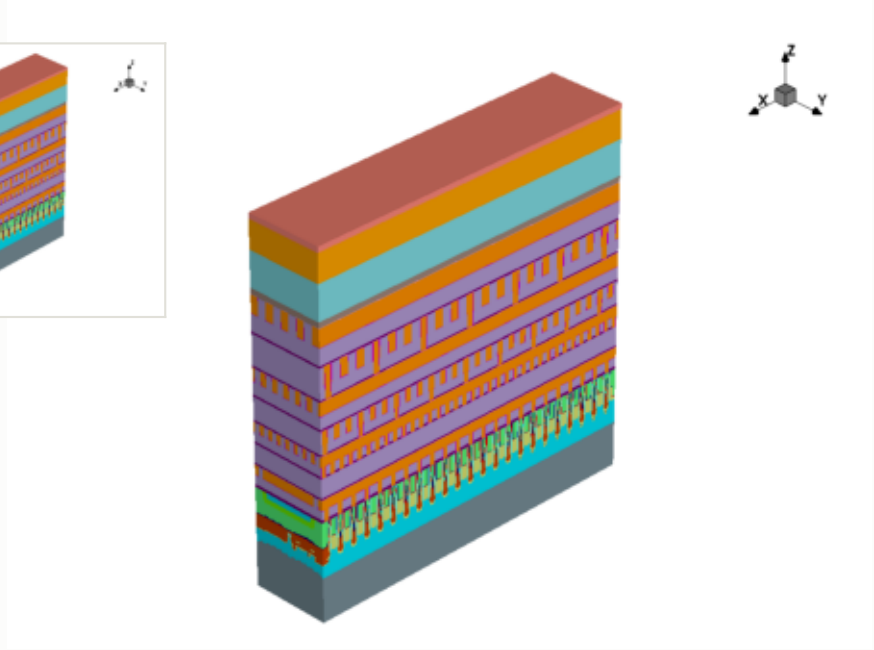

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

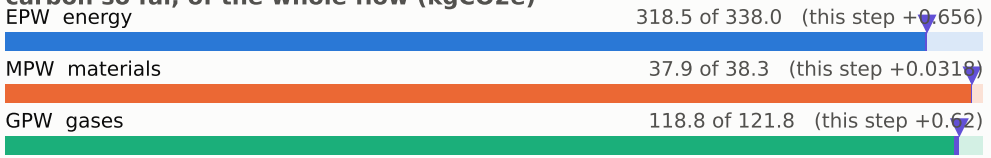

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

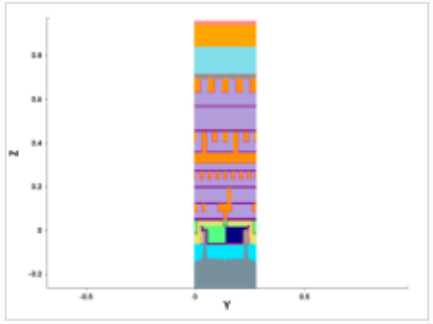

y cut at 0.211 µm

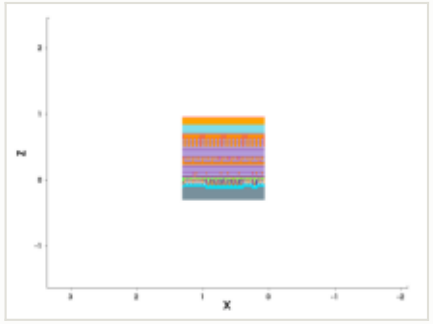

mask for this step

no mask for this step

steps by process area

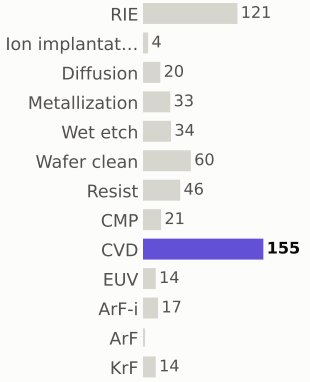

materials deposited (g)

gases emitted (g)



Step #5790: Wafer_clean

clean · Wafer_clean

0.169	475.4	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



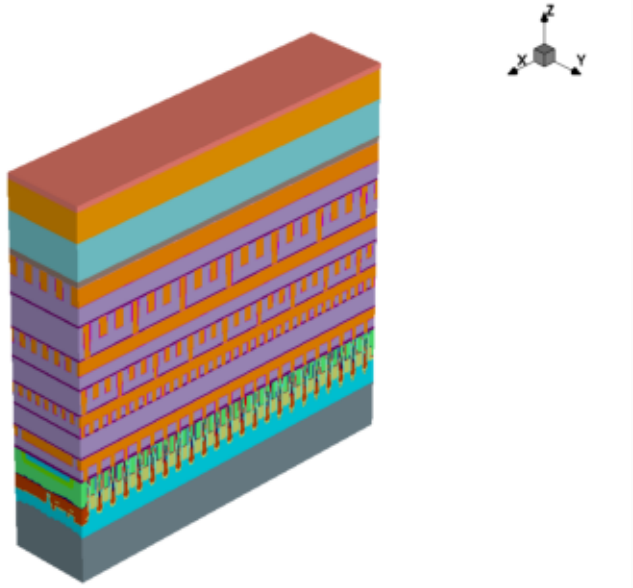

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

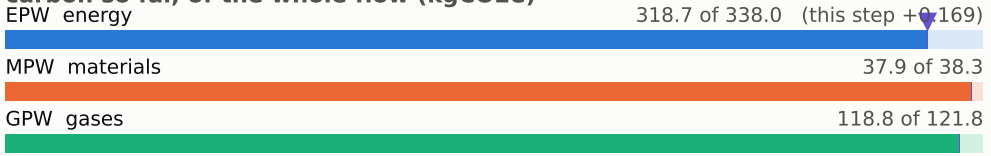

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

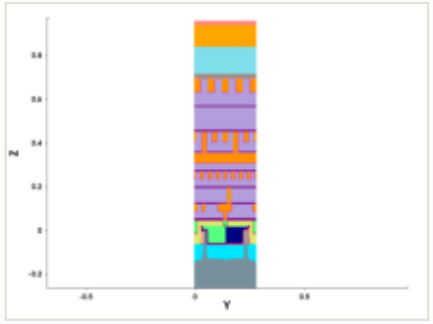

y cut at 0.211 µm

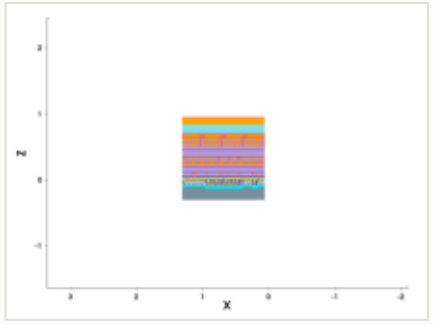

mask for this step

no mask for this step

steps by process area

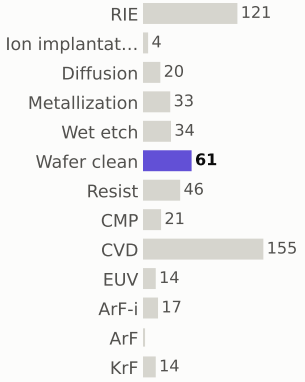

materials deposited (g)

gases emitted (g)



Step #5800: ArF-i

litho_patterning · ArF-i

0.217	475.6	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



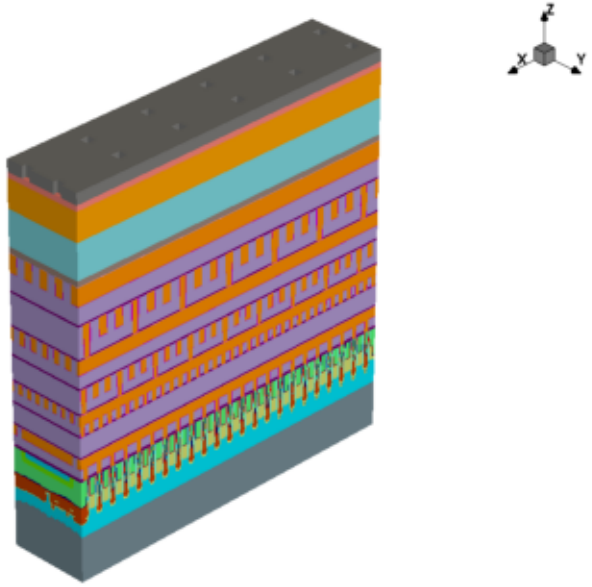

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

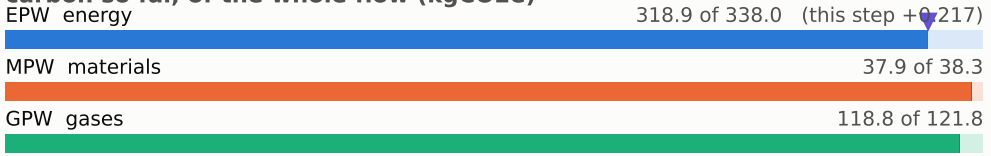

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

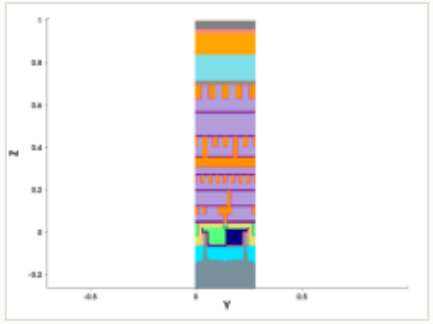

y cut at 0.211 µm

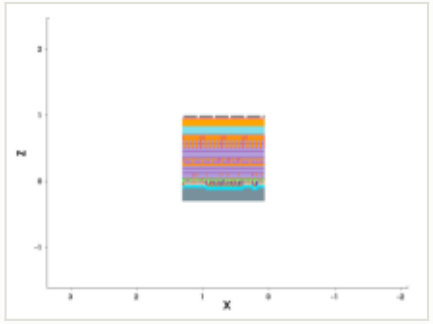

mask: layer 10751:0 (GDSII)

steps by process area

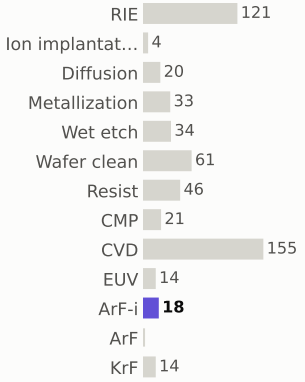

materials deposited (g)

gases emitted (g)



Step #5810: RIE

etch_anisotropic · RIE

1.04	476.7	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



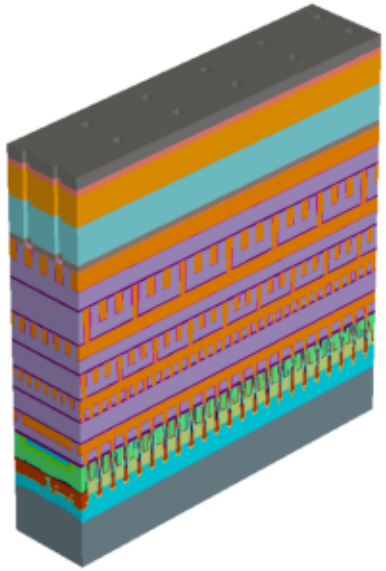

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

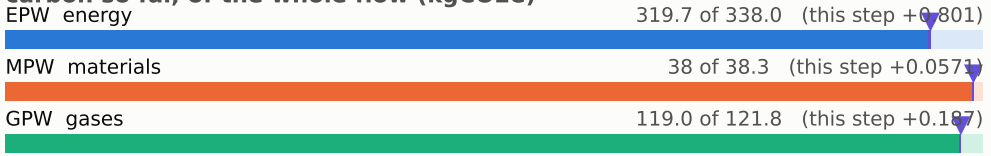

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

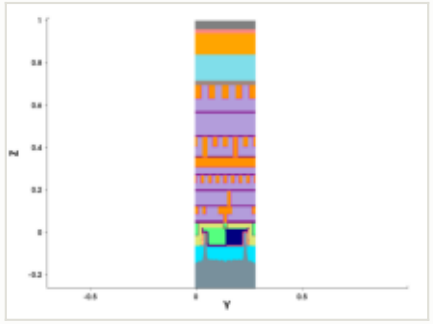

y cut at 0.211 µm

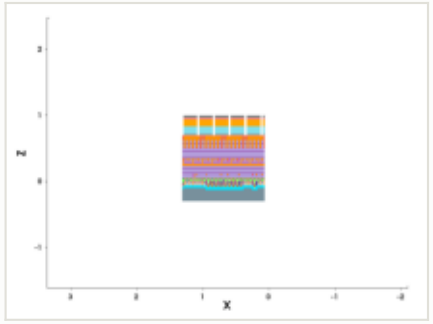

mask for this step

no mask for this step

steps by process area

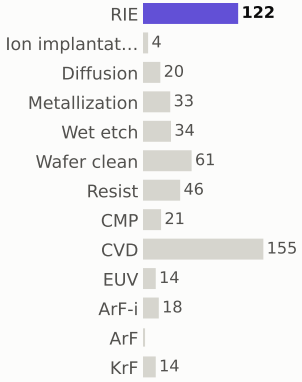

materials deposited (g)

gases emitted (g)



Step #5820: Wafer_clean

etch_strip · Wafer_clean

0.169	476.8	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



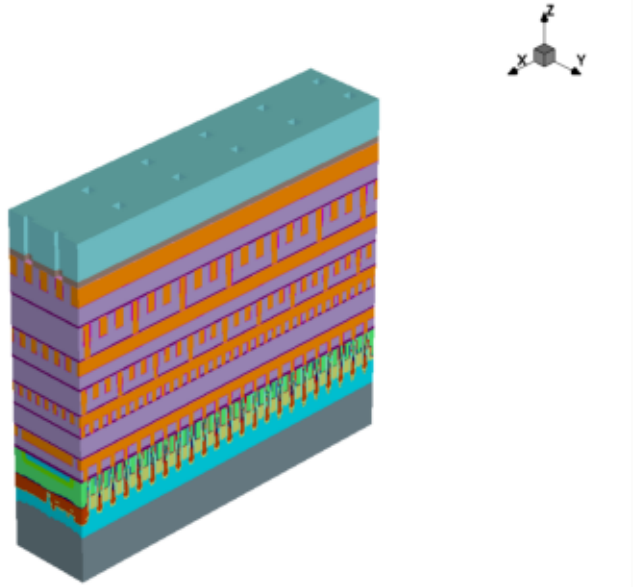

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

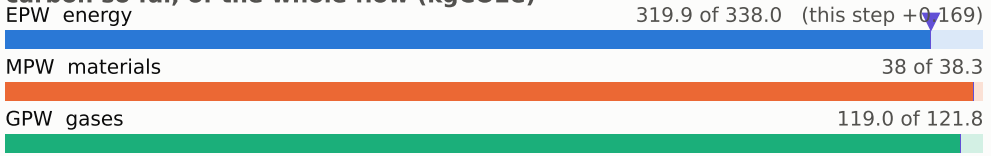

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

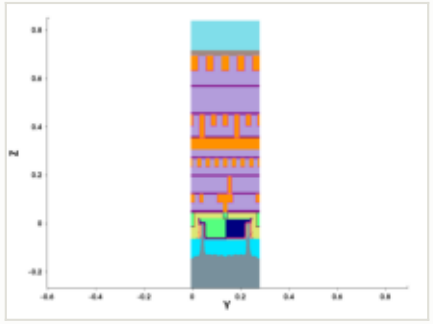

y cut at 0.211 µm

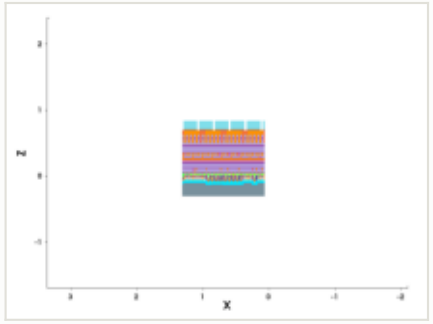

mask for this step

no mask for this step

steps by process area

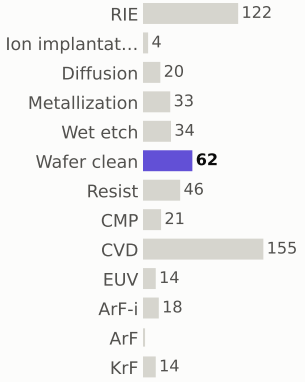

materials deposited (g)

gases emitted (g)



Step #5830: Resist

depo_fill · Resist

0.169	477.0	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



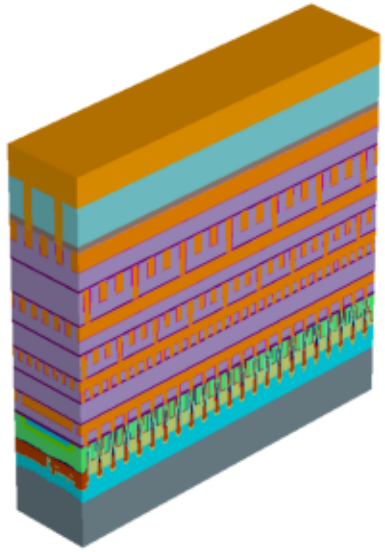

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

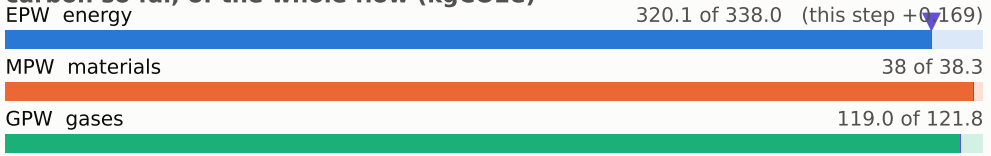

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

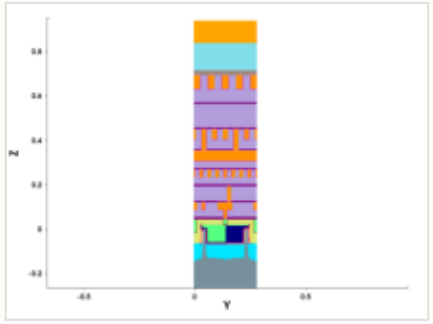

y cut at 0.211 µm

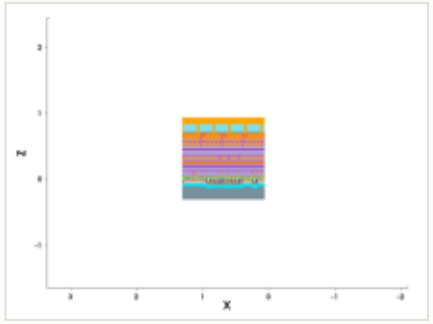

mask for this step

no mask for this step

steps by process area

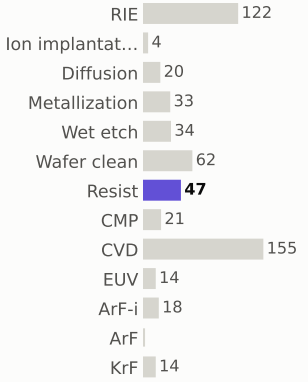

materials deposited (g)

gases emitted (g)



Step #5840: CVD

depo_fill · CVD

1.31	478.3	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



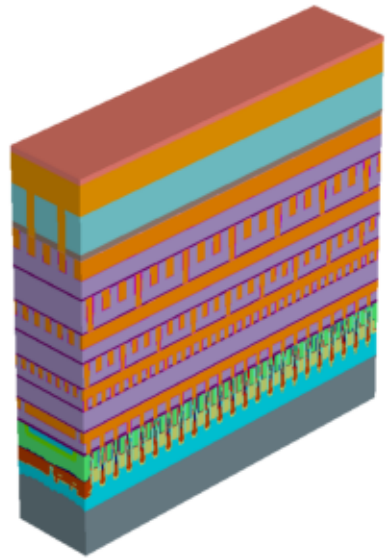

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

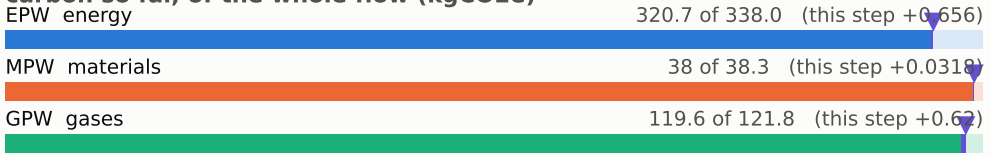

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

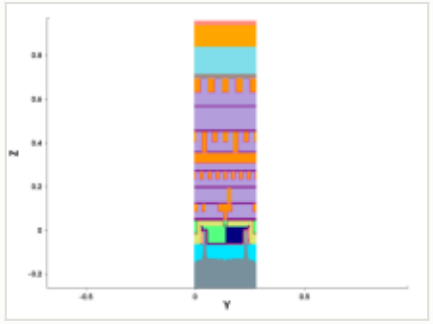

y cut at 0.211 µm

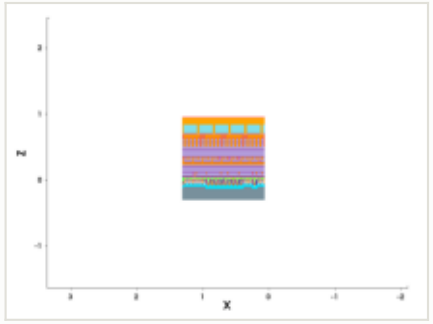

mask for this step

no mask for this step

steps by process area

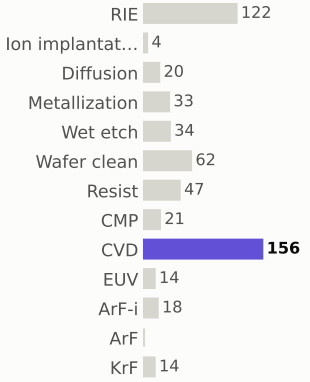

materials deposited (g)

gases emitted (g)



Step #5850: Wafer_clean

clean · Wafer_clean

0.169	478.5	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



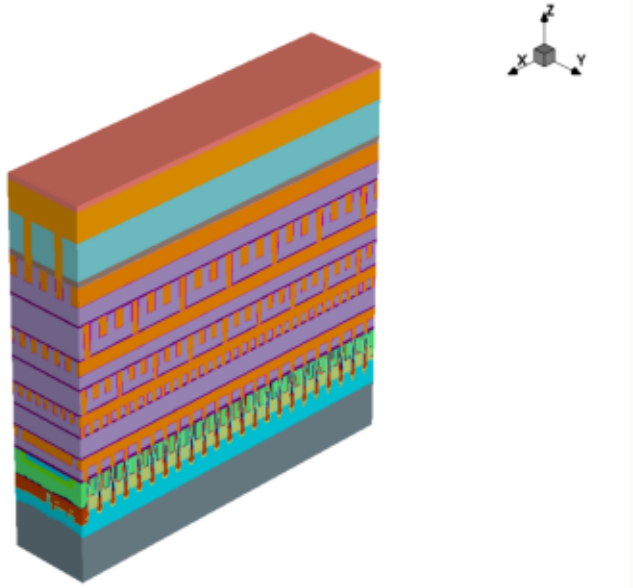

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

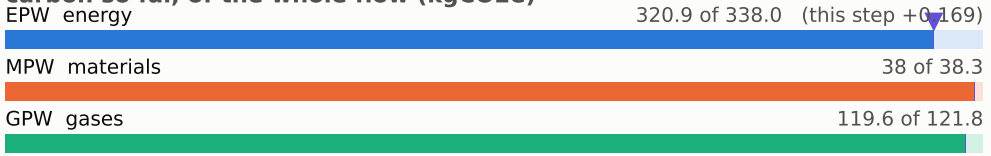

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

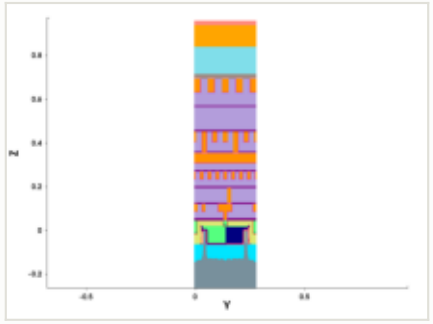

y cut at 0.211 µm

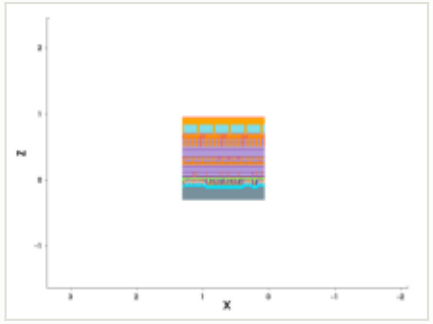

mask for this step

no mask for this step

steps by process area

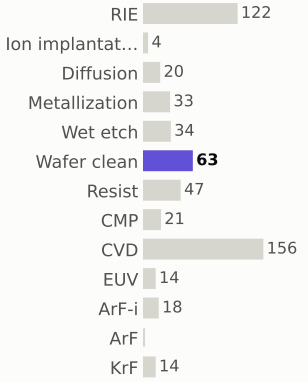

materials deposited (g)

gases emitted (g)



Step #5860: ArF-i

litho_patterning · ArF-i

0.217	478.7	0.044%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



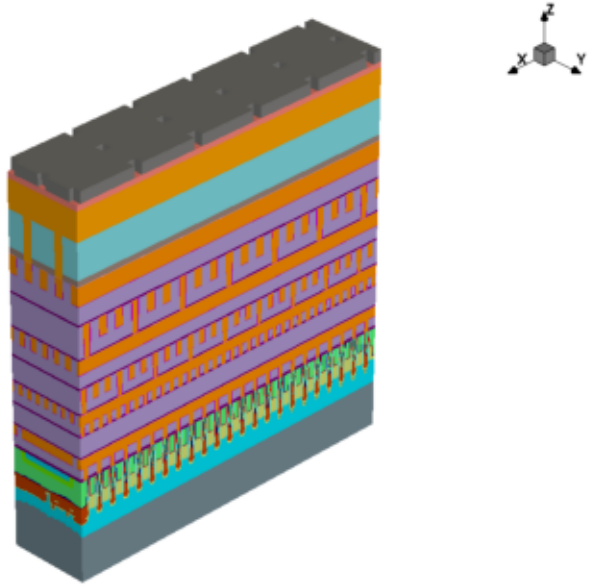

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

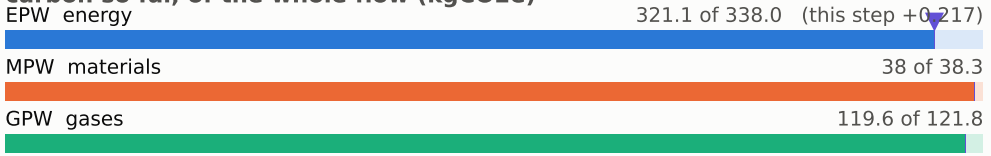

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

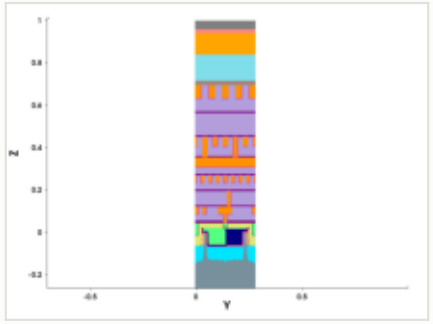

y cut at 0.211 µm

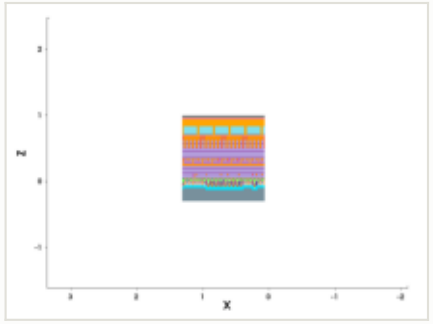

mask: layer 10752:0 (GDSII)

steps by process area

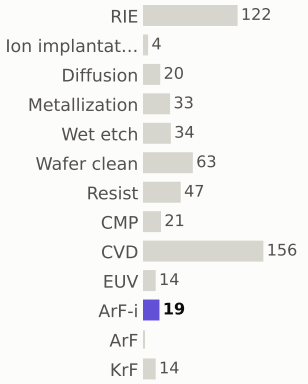

materials deposited (g)

gases emitted (g)



Step #5870: RIE

etch_anisotropic · RIE

1.04	479.7	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



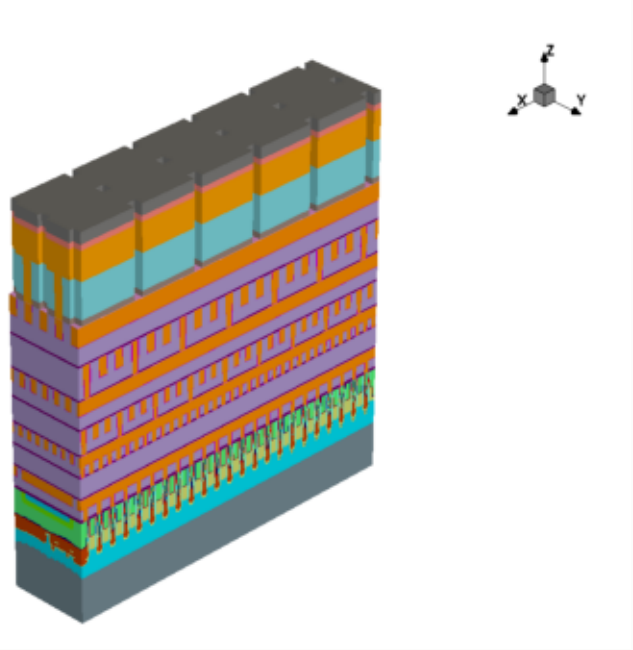

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

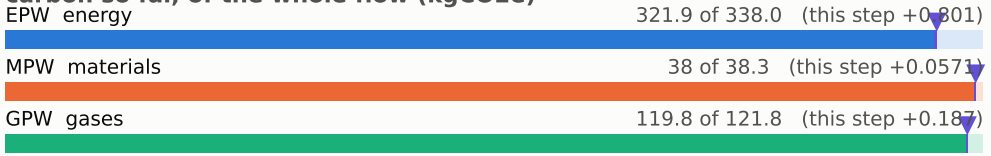

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

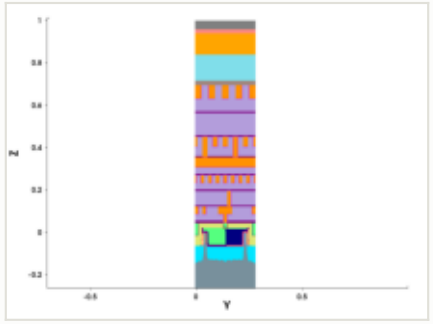

y cut at 0.211 µm

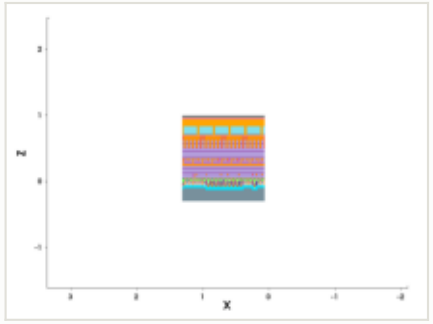

mask for this step

no mask for this step

steps by process area

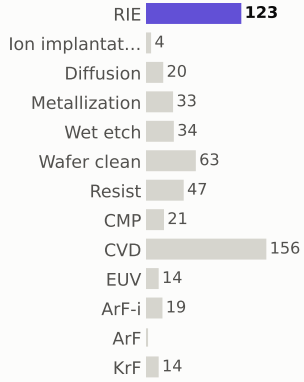

materials deposited (g)

gases emitted (g)



Step #5880: Wafer_clean

etch_strip · Wafer_clean

0.169	479.9	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



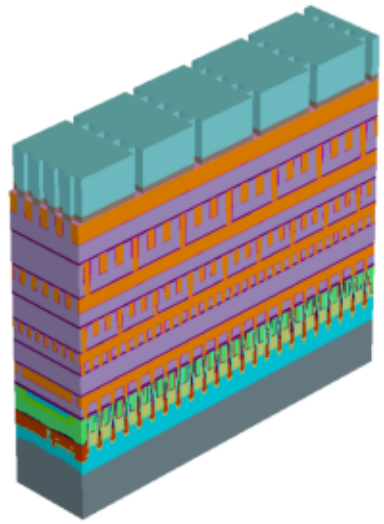

x cut at 0.677 µm

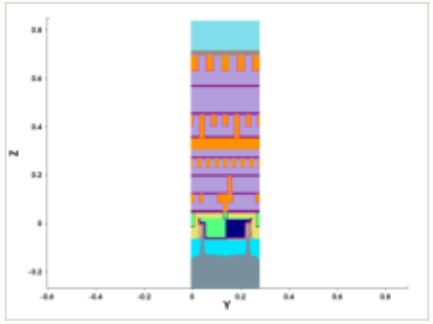

y cut at 0.211 µm

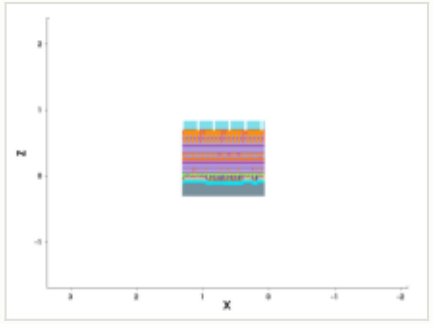

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

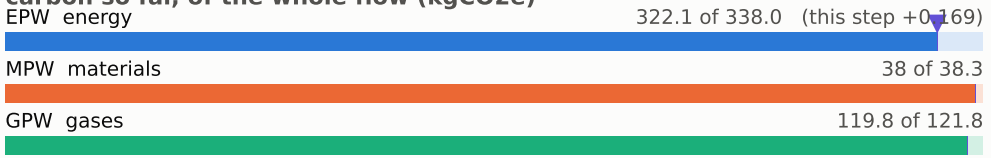

embodied carbon up to each step (kgCO2e per wafer)

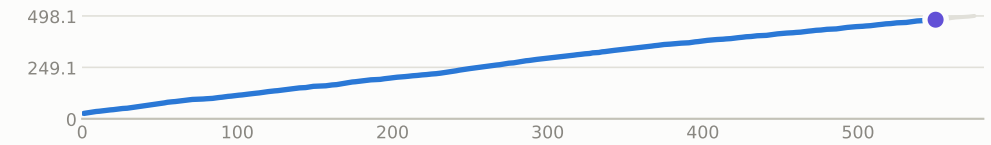

steps by process area

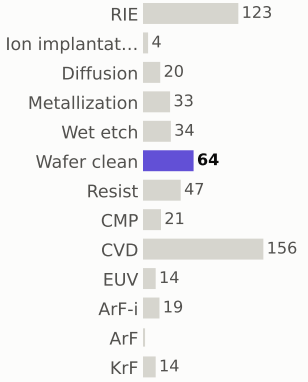

materials deposited (g)



gases emitted (g)



Step #5890: Metallization

depo_ellipsoidal · Metallization

1.2	481.1	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



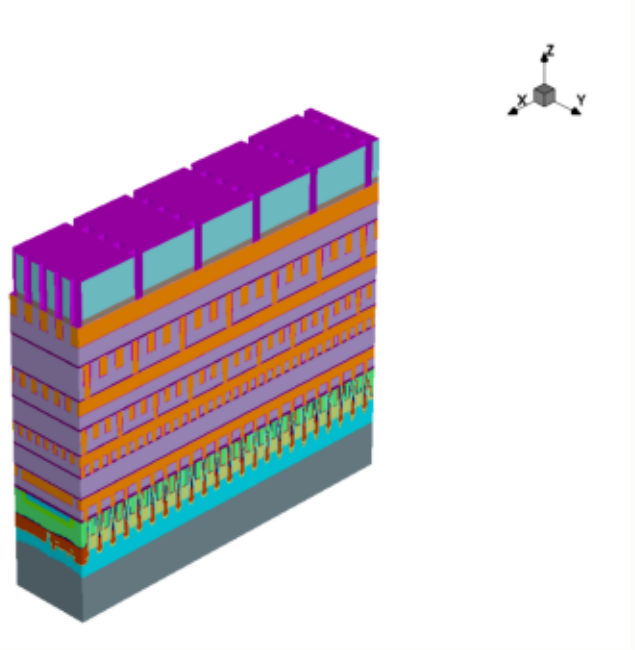

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

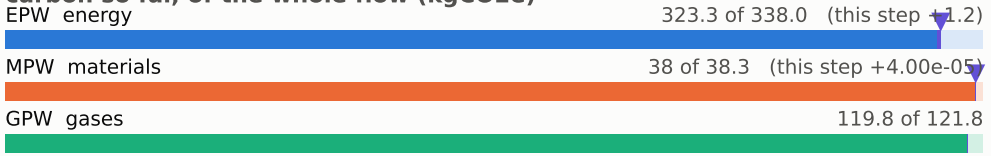

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

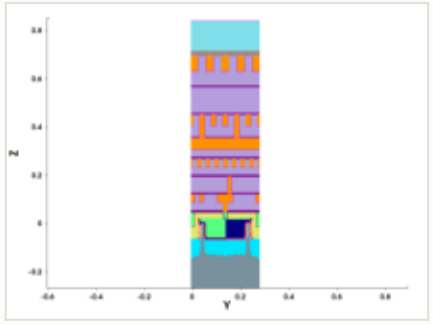

y cut at 0.211 µm

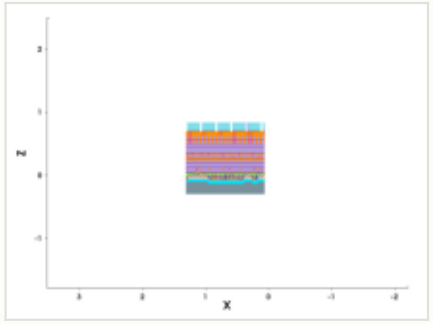

mask for this step

no mask for this step

steps by process area

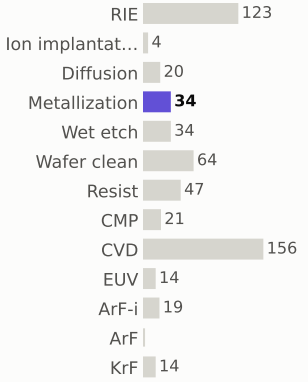

materials deposited (g)

gases emitted (g)



Step #5900: Metallization

depo_fill · Metallization

1.21	482.3	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



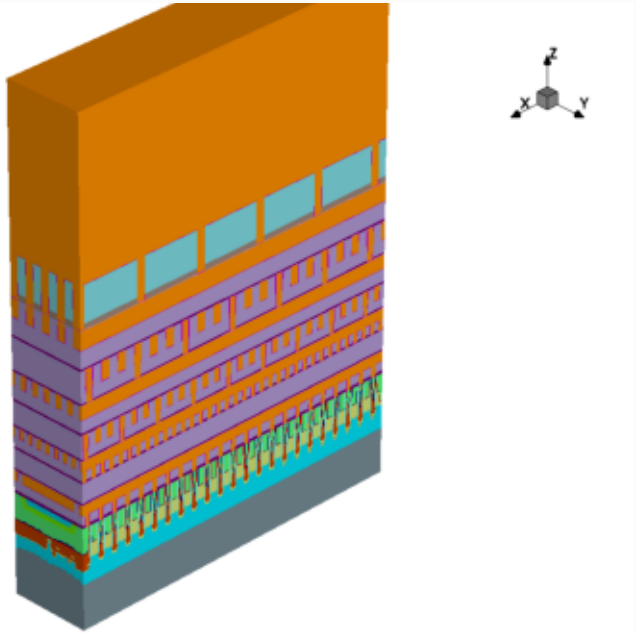

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

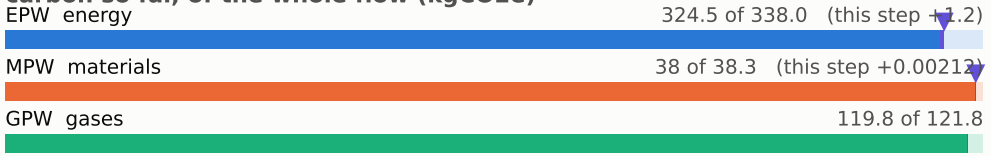

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

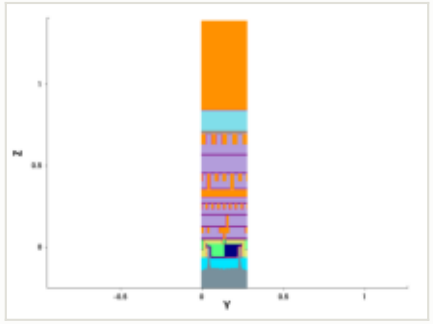

y cut at 0.211 µm

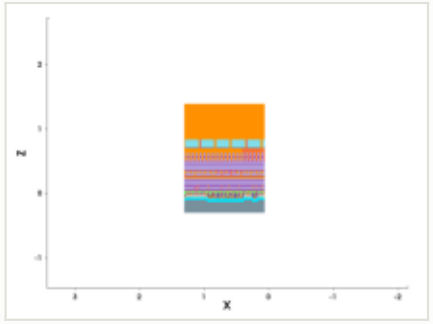

mask for this step

no mask for this step

steps by process area

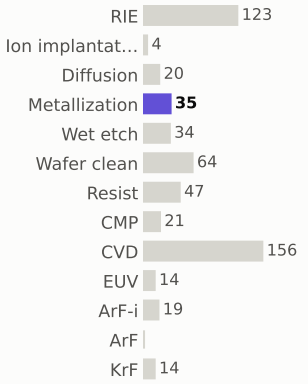

materials deposited (g)



gases emitted (g)



Step #5910: Diffusion

treatment · Diffusion

0.801	483.1	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



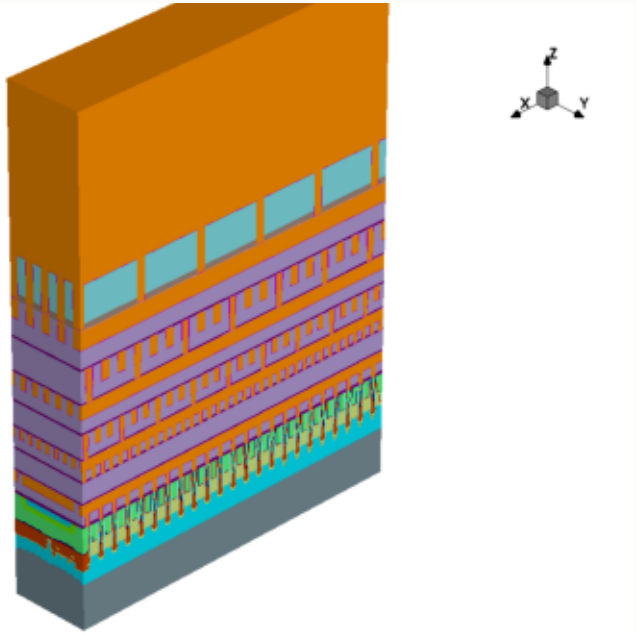

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

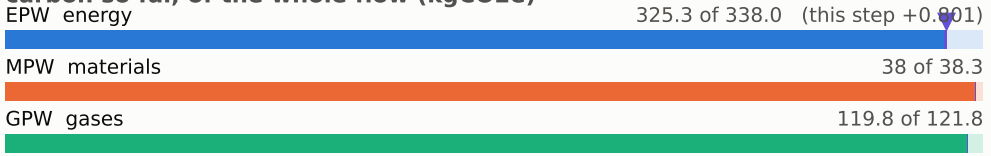

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

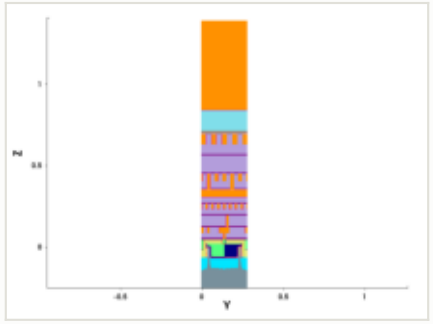

y cut at 0.211 µm

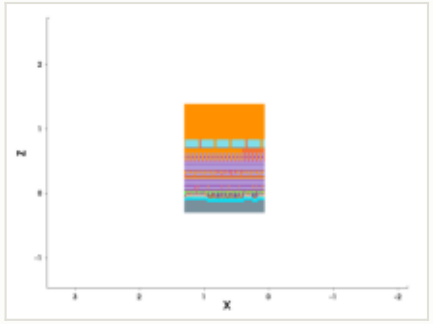

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)



Step #5920: CMP

etch_cmp · CMP

0.169	483.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



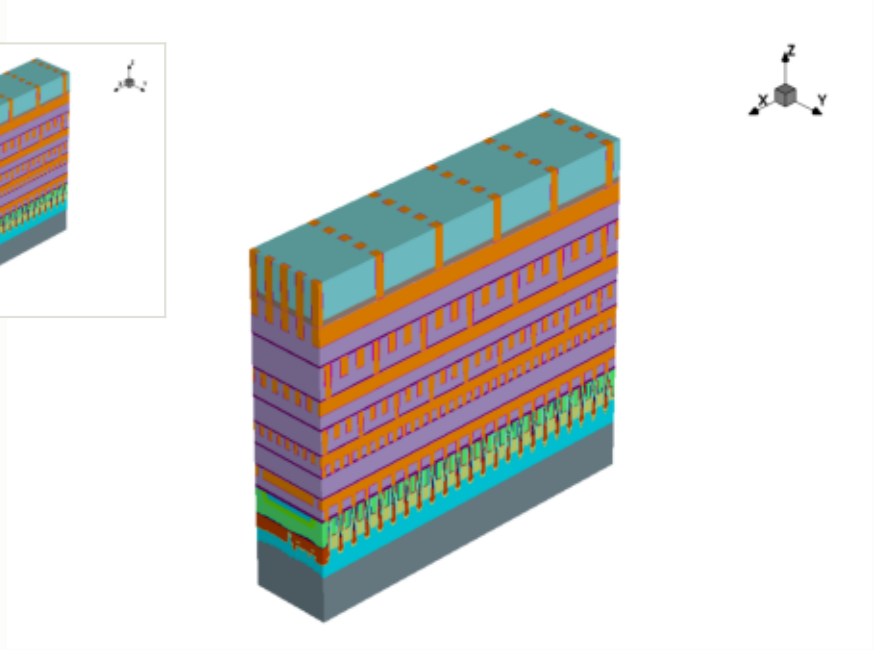

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

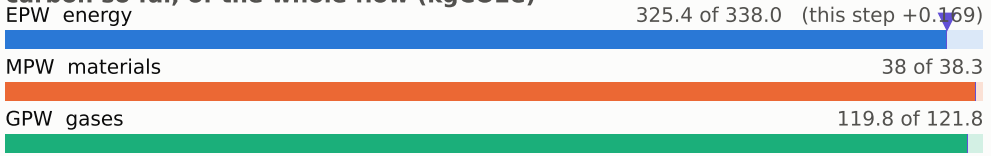

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

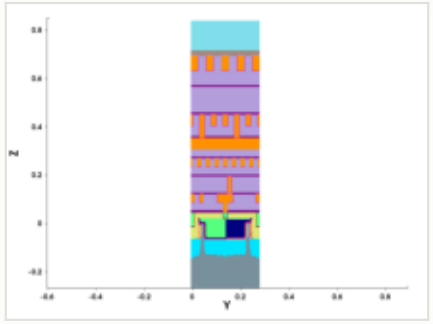

y cut at 0.211 µm

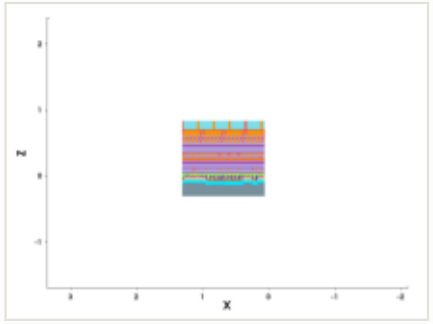

mask for this step

no mask for this step

steps by process area

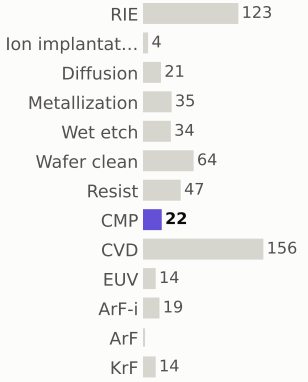

materials deposited (g)

gases emitted (g)



Step #5930: ArF

litho_patterning · ArF

0.199	483.5	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



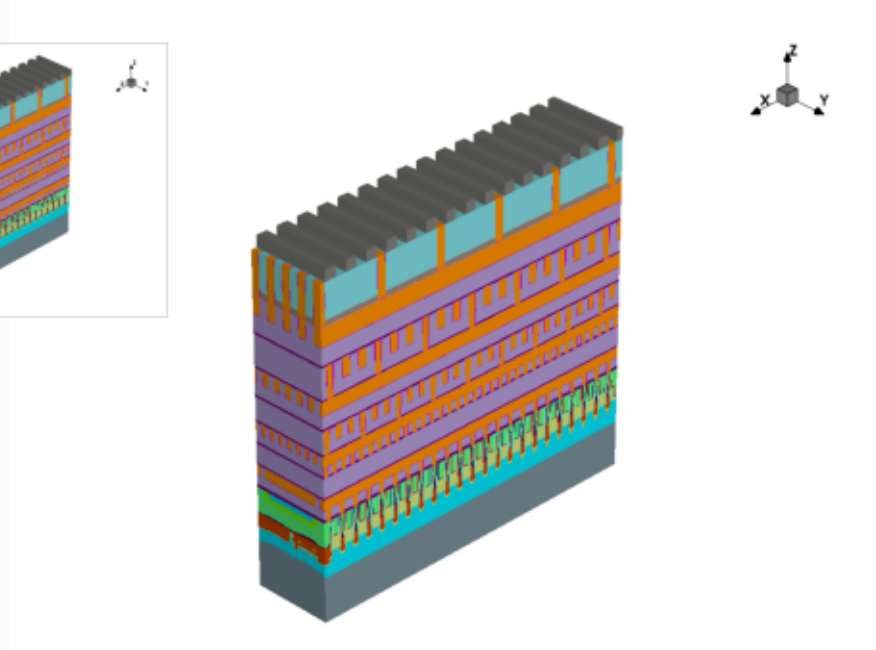

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

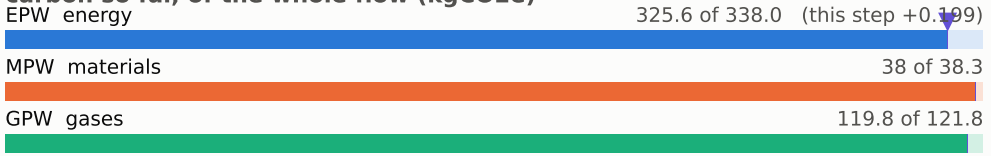

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

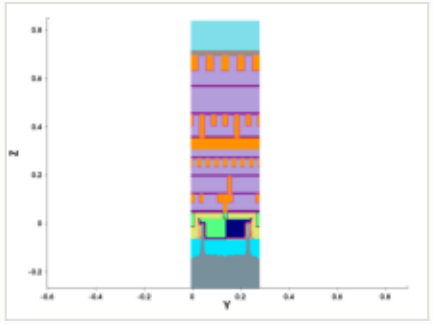

y cut at 0.211 µm

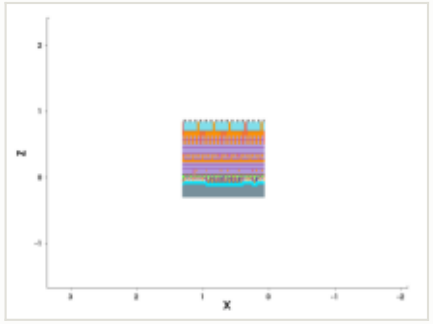

mask: layer 80:0 (GDSII)

steps by process area

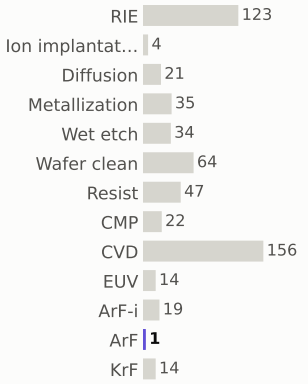

materials deposited (g)

gases emitted (g)



Step #5940: RIE

etch_anisotropic · RIE

1.04	484.5	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



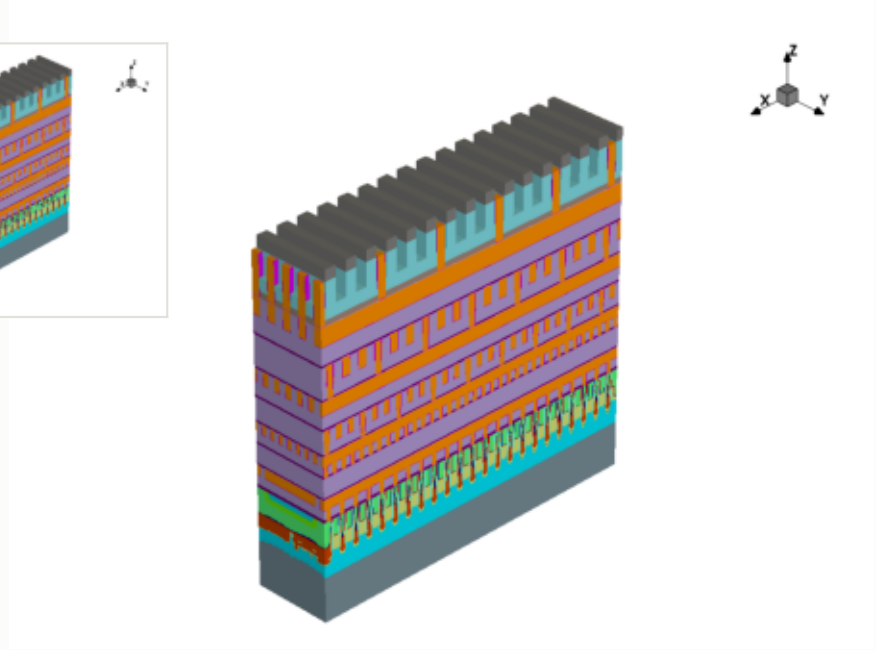

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

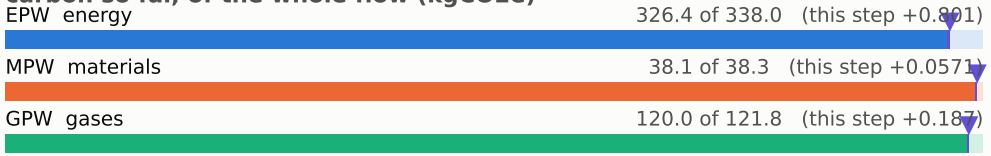

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

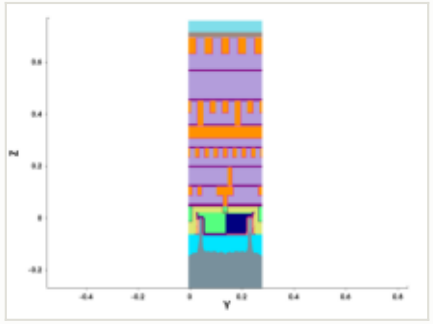

y cut at 0.211 µm

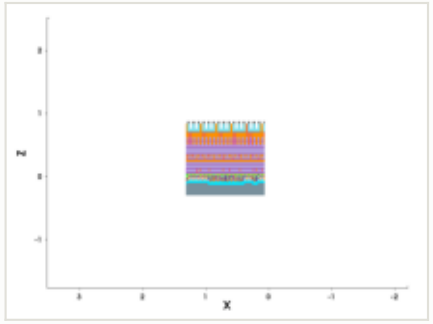

mask for this step

no mask for this step

steps by process area

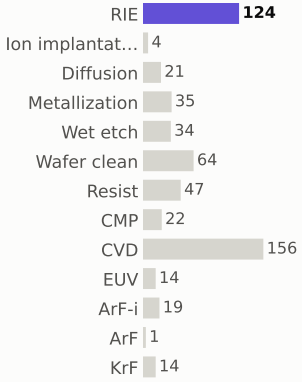

materials deposited (g)

gases emitted (g)



Step #5950: Wafer_clean

etch_strip · Wafer_clean

0.169	484.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



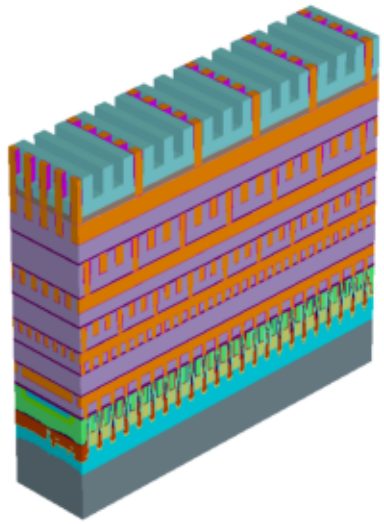

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

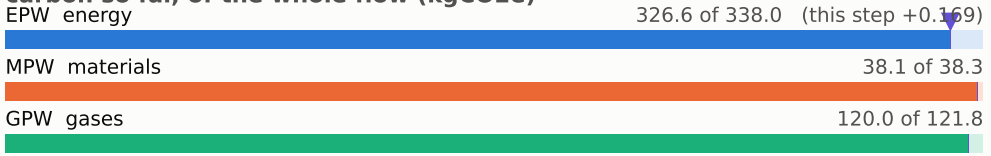

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

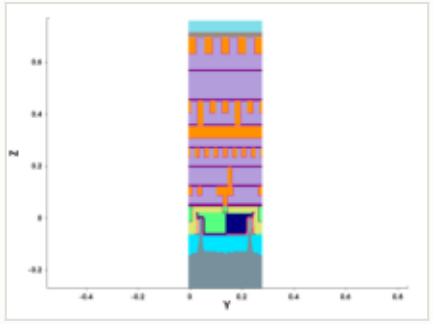

y cut at 0.211 µm

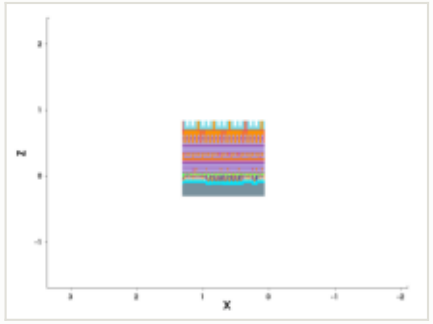

mask for this step

no mask for this step

steps by process area

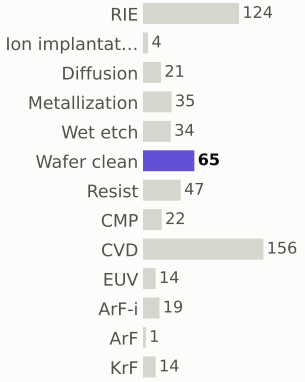

materials deposited (g)



gases emitted (g)



Step #5960: Metallization

depo_ellipsoidal · Metallization

1.2	485.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



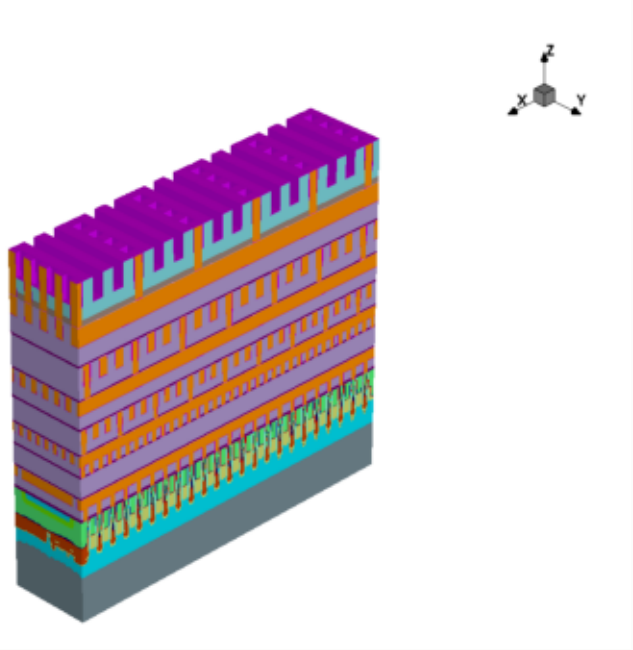

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

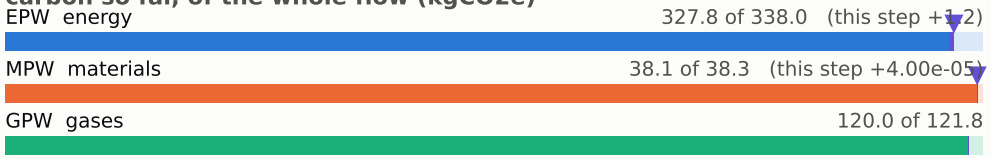

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

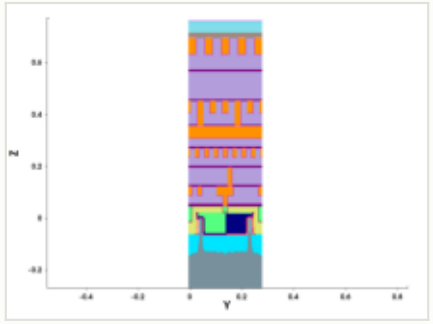

y cut at 0.211 µm

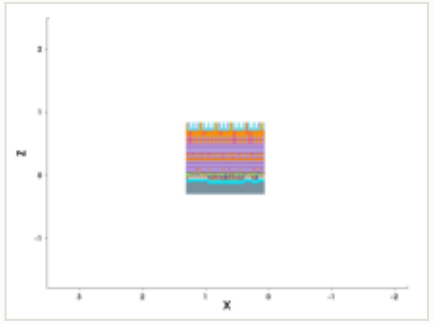

mask for this step

no mask for this step

steps by process area

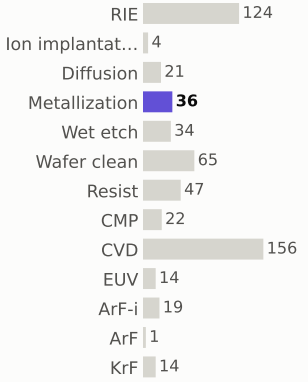

materials deposited (g)

gases emitted (g)



Step #5970: Metallization

depo_fill · Metallization

1.21	487.1	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



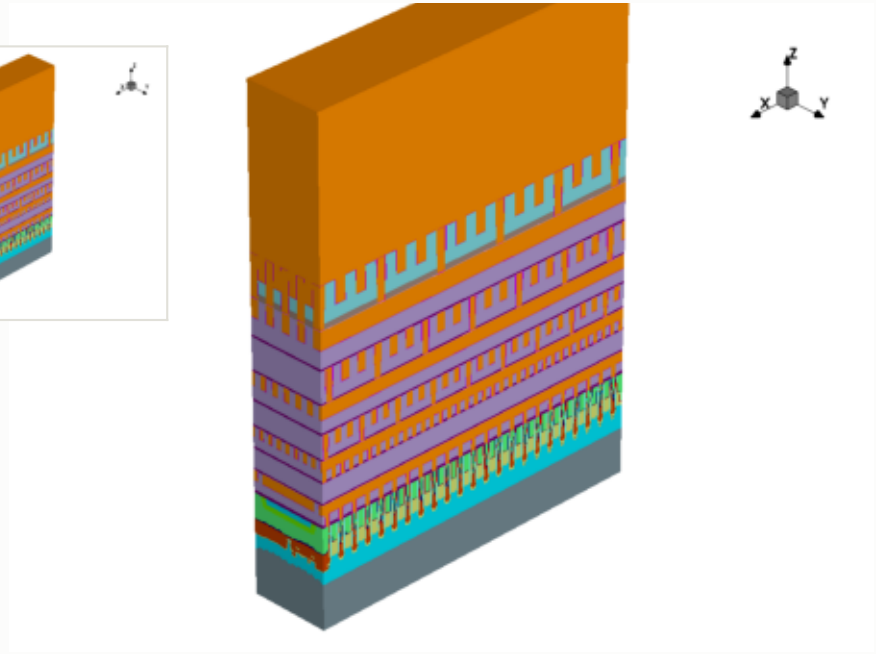

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

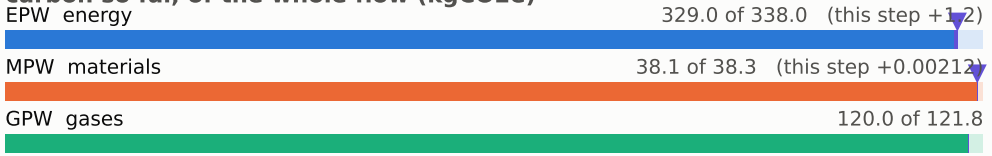

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

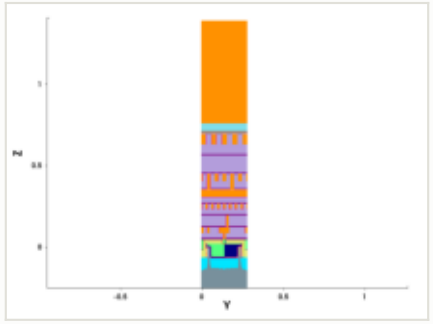

y cut at 0.211 µm

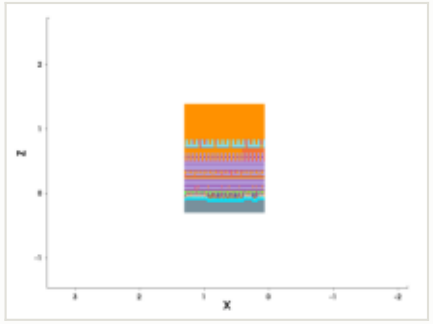

mask for this step

no mask for this step

steps by process area

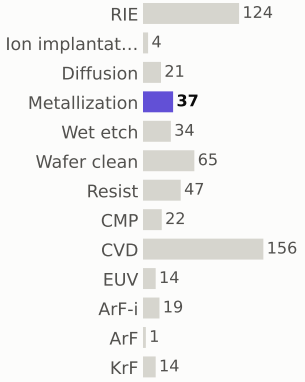

materials deposited (g)

gases emitted (g)



Step #5980: Diffusion

treatment · Diffusion

0.801	487.9	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



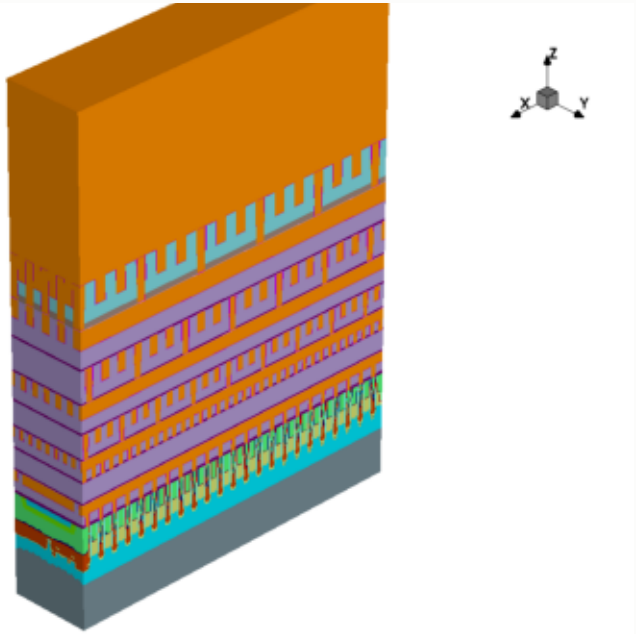

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

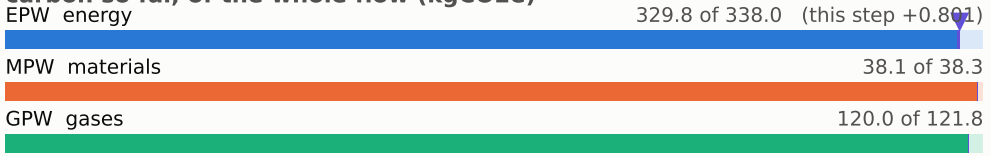

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

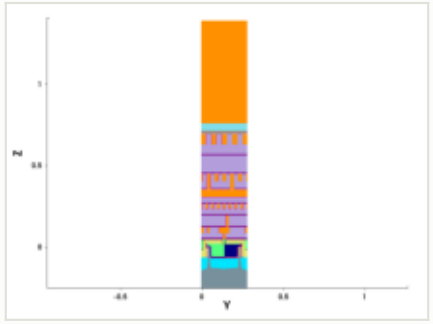

y cut at 0.211 µm

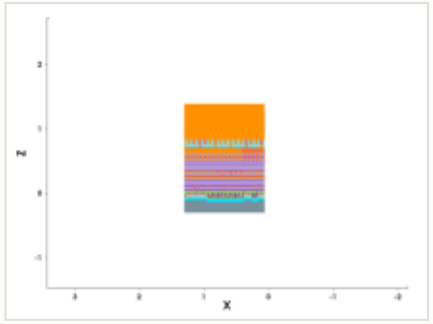

mask for this step

no mask for this step

steps by process area

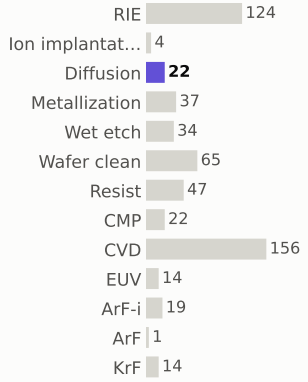

materials deposited (g)

gases emitted (g)



Step #5990: CMP

etch_cmp · CMP

0.169	488.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



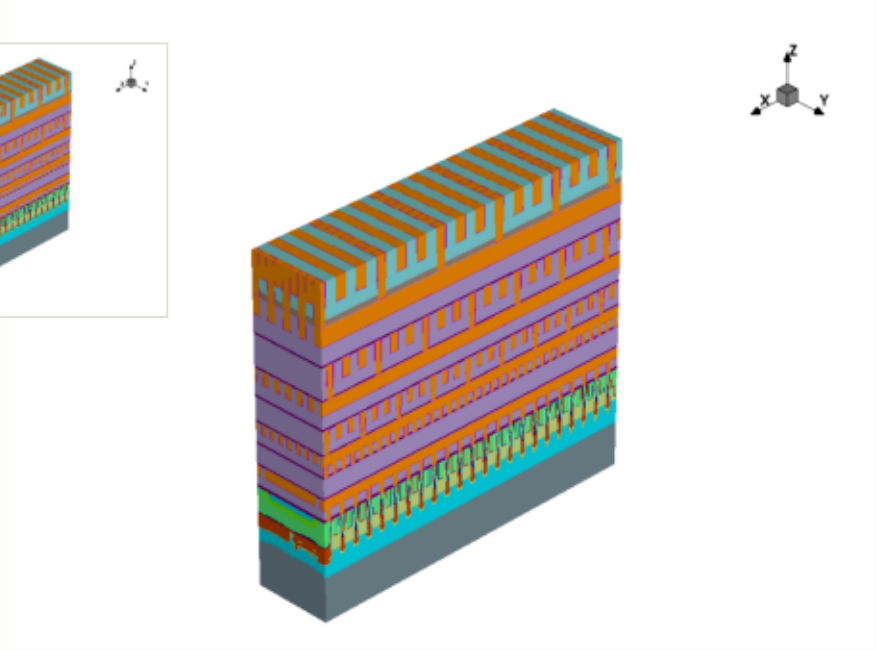

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

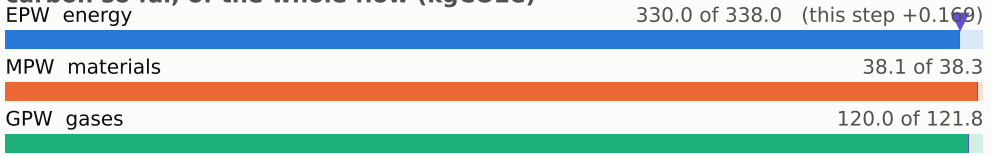

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

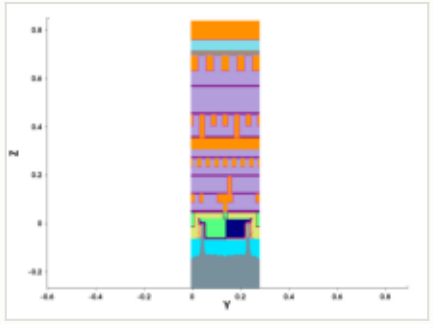

y cut at 0.211 µm

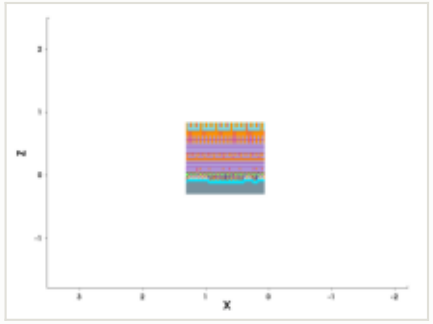

mask for this step

no mask for this step

steps by process area

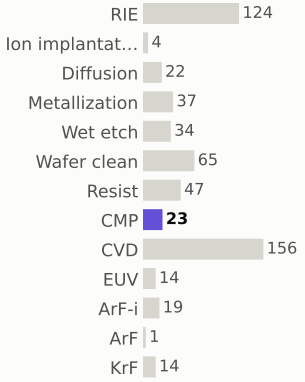

materials deposited (g)

gases emitted (g)



Step #6010: CVD

depo_fill · CVD

1.31	489.4	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



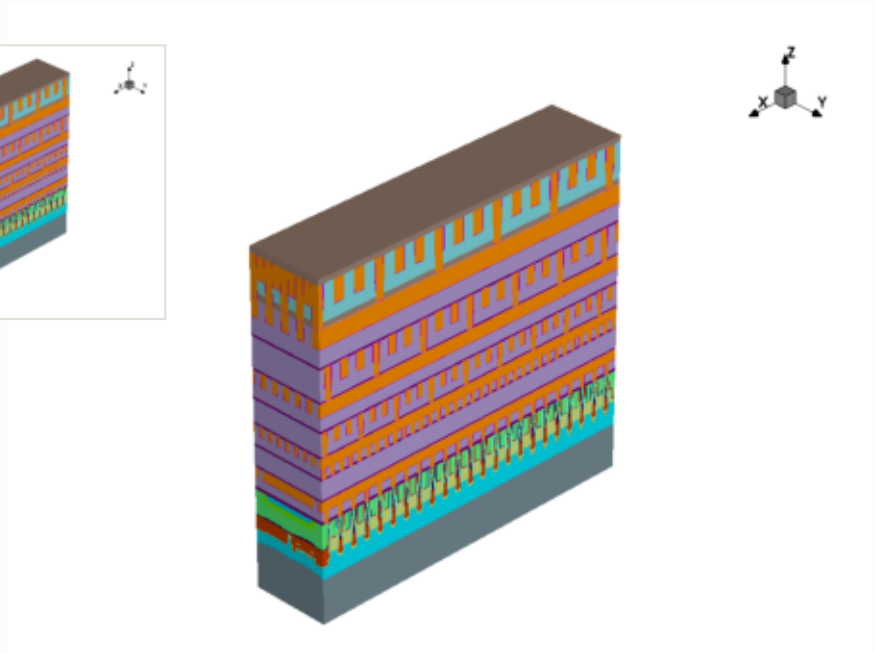

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

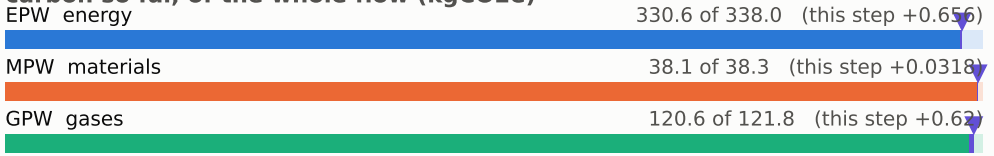

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

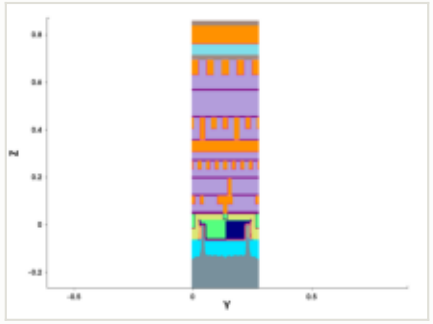

y cut at 0.211 µm

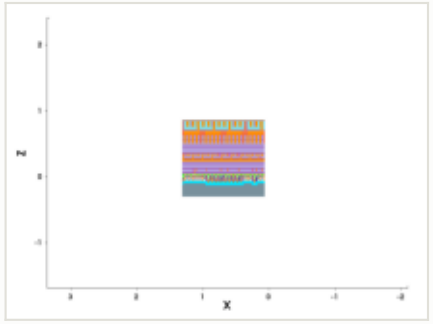

mask for this step

no mask for this step

steps by process area

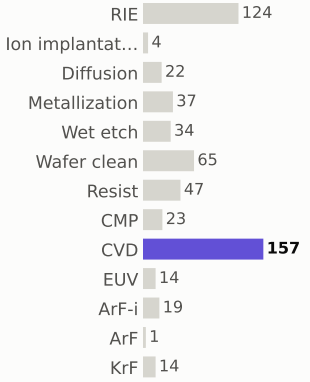

materials deposited (g)

gases emitted (g)



Step #6020: CVD

depo_fill · CVD

1.31	490.7	0.26%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



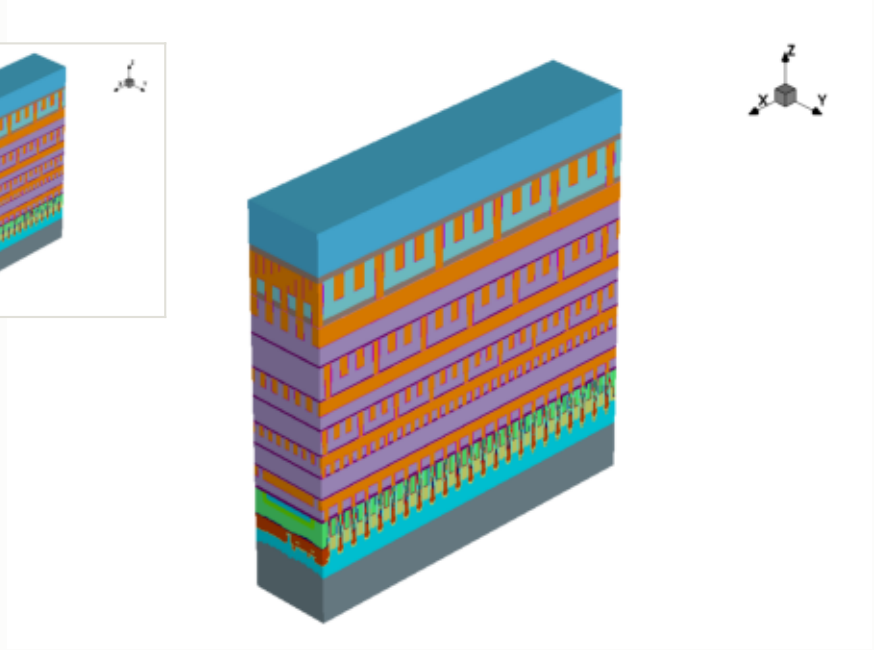

this step

process area	CVD
material	—
thickness	0.14 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

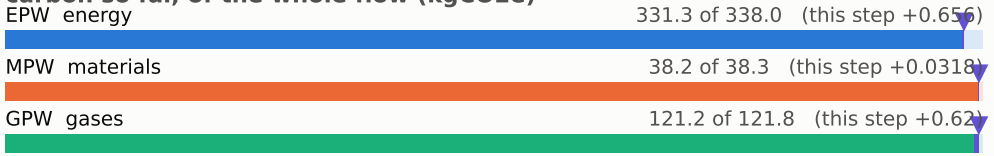

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

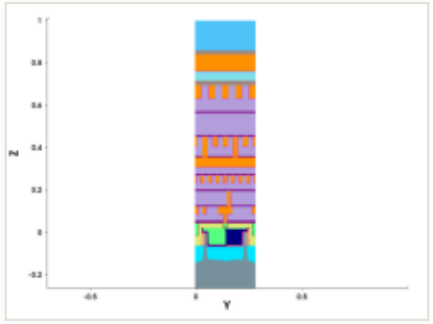

y cut at 0.211 µm

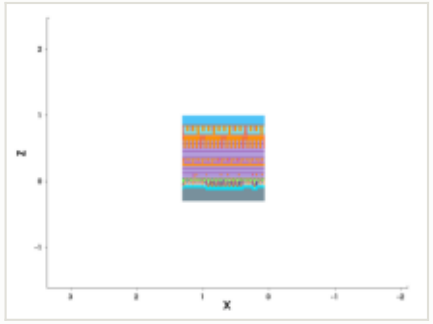

mask for this step

no mask for this step

steps by process area

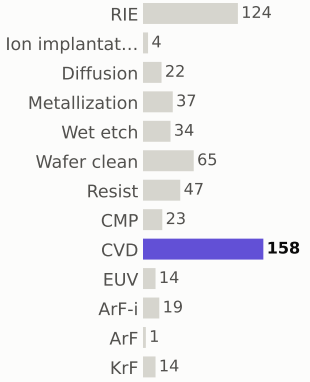

materials deposited (g)

gases emitted (g)



Step #6030: ArF

litho_patterning · ArF

0.199	490.9	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



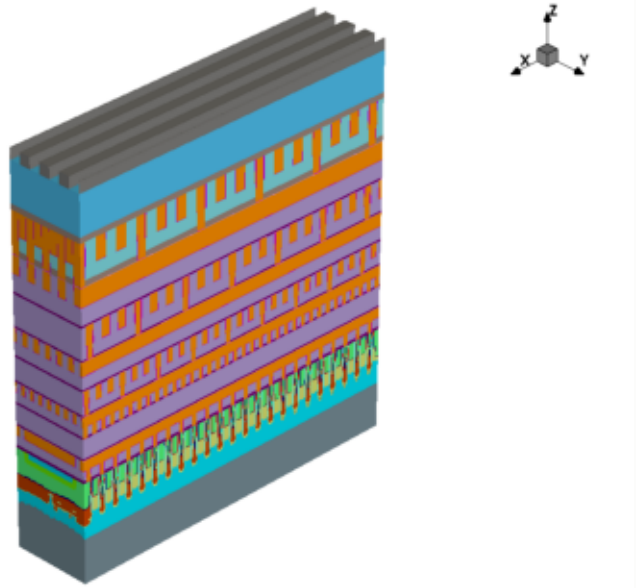

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

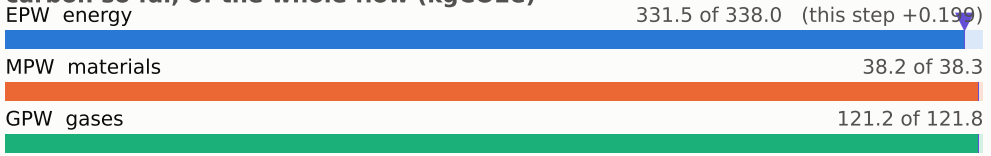

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

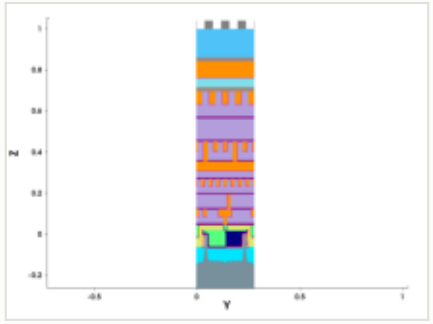

y cut at 0.211 µm

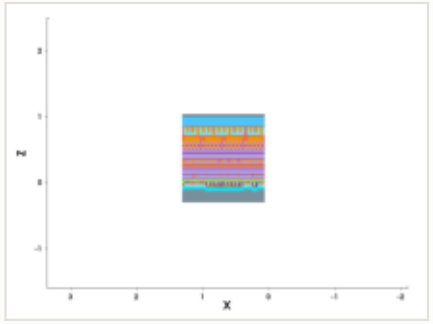

mask: layer 90:0 (GDSII)

steps by process area

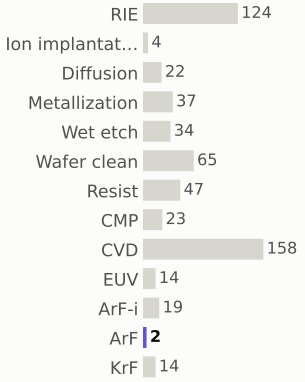

materials deposited (g)

gases emitted (g)



Step #6040: RIE

etch_anisotropic · RIE

1.04	491.9	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



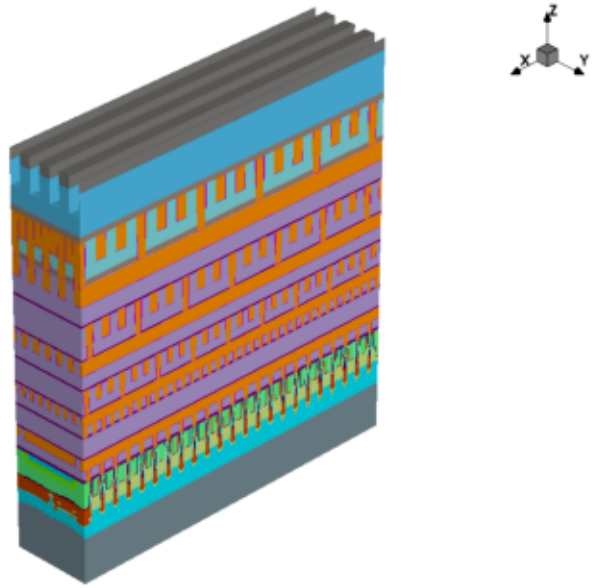

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

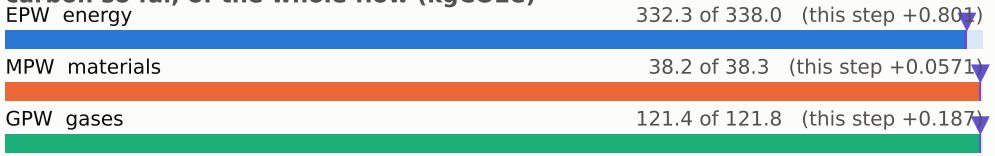

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

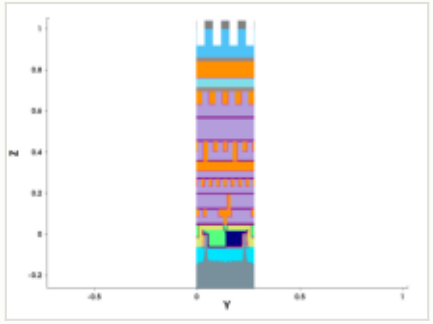

y cut at 0.211 µm

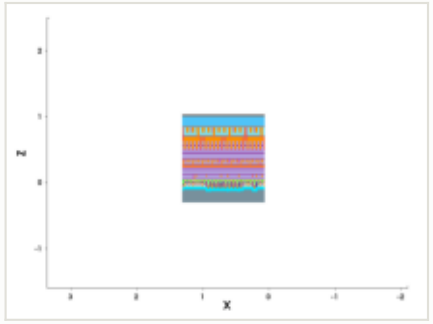

mask for this step

no mask for this step

steps by process area

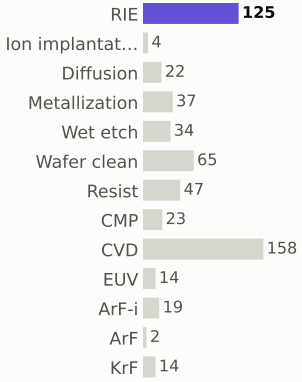

materials deposited (g)

gases emitted (g)



Step #6050: Wafer_clean

etch_strip · Wafer_clean

0.169	492.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



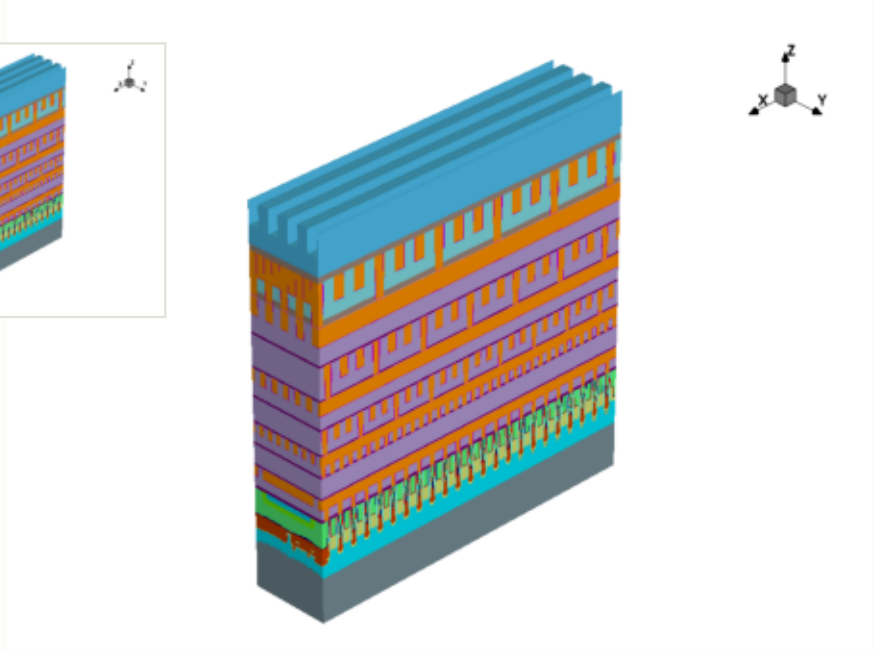

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

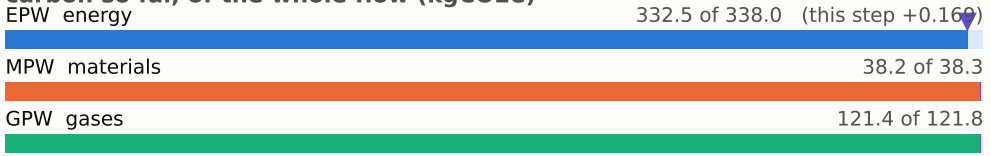

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

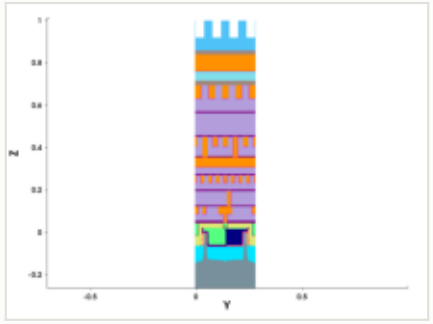

y cut at 0.211 µm

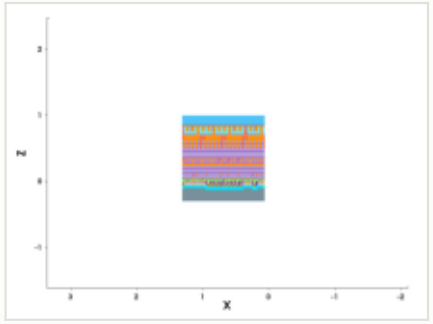

mask for this step

no mask for this step

steps by process area

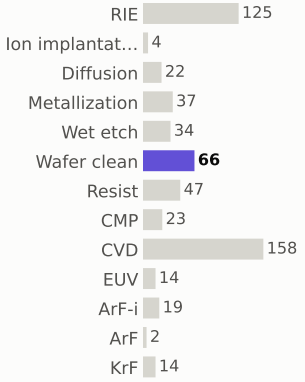

materials deposited (g)

gases emitted (g)



Step #6060: RIE

clean · RIE

1.04	493.2	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



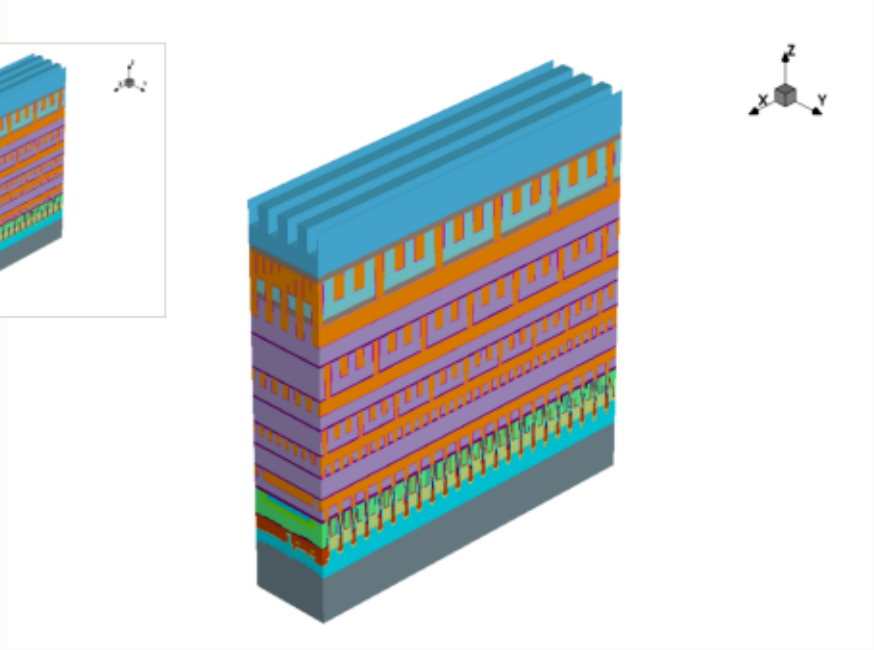

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

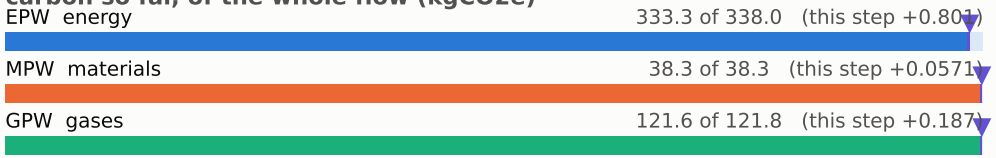

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

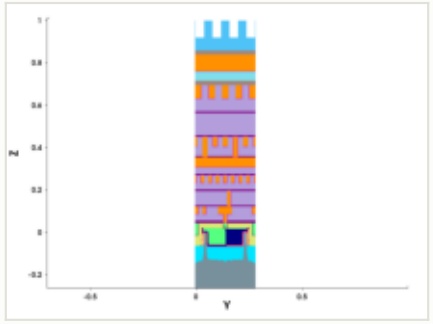

y cut at 0.211 µm

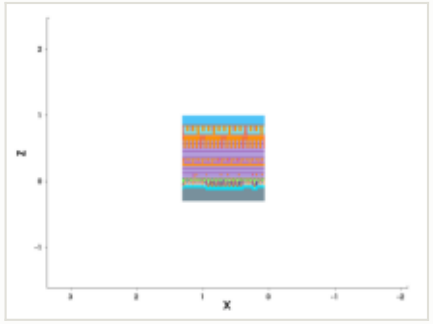

mask for this step

no mask for this step

steps by process area

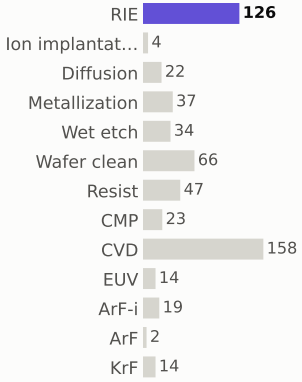

materials deposited (g)

gases emitted (g)



Step #6070: Wafer_clean

clean · Wafer_clean

0.169	493.3	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



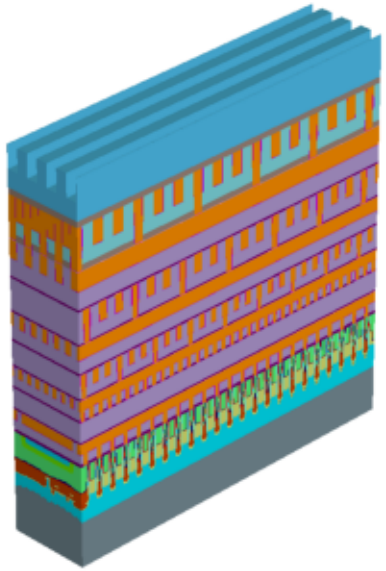

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

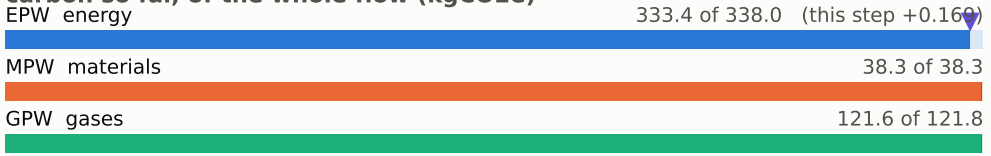

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

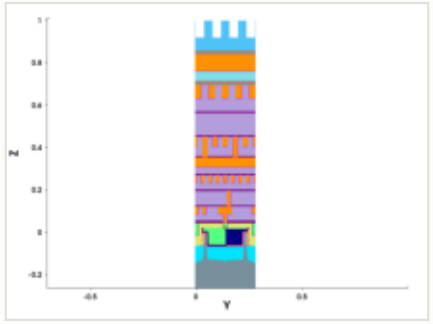

y cut at 0.211 µm

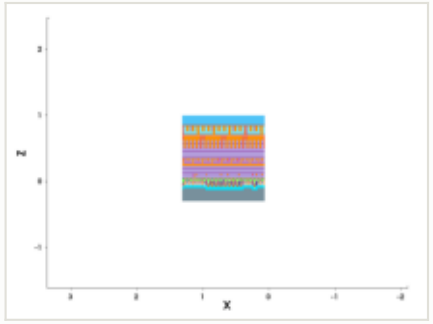

mask for this step

no mask for this step

steps by process area

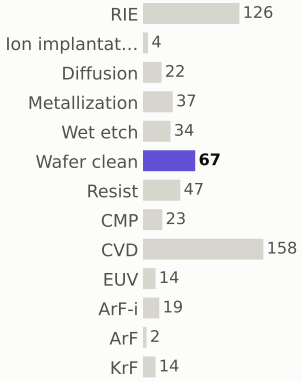

materials deposited (g)

gases emitted (g)



Step #6080: ArF

litho_patterning · ArF

0.199	493.5	0.04%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



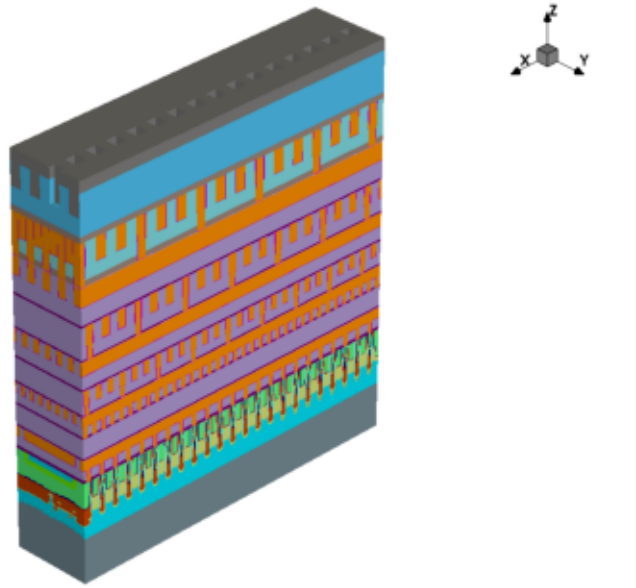

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

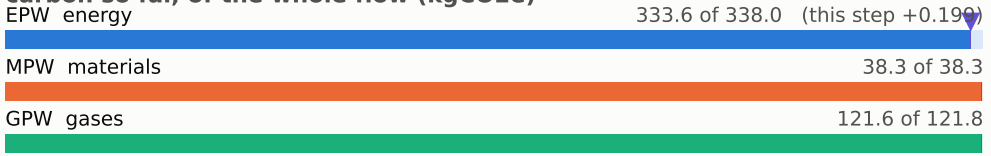

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

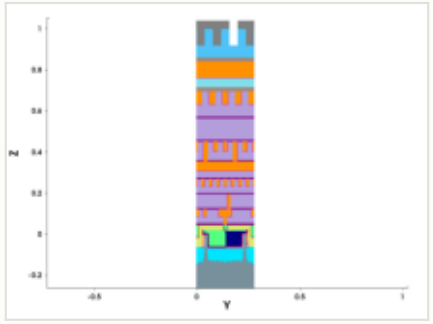

y cut at 0.211 µm

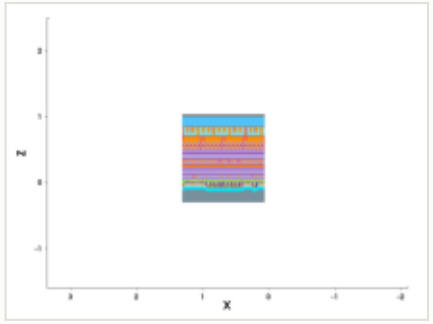

mask: layer 85:0 (GDSII)

steps by process area

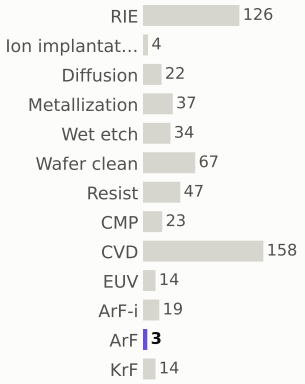

materials deposited (g)



gases emitted (g)



Step #6090: RIE

etch_anisotropic · RIE

1.04	494.6	0.21%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



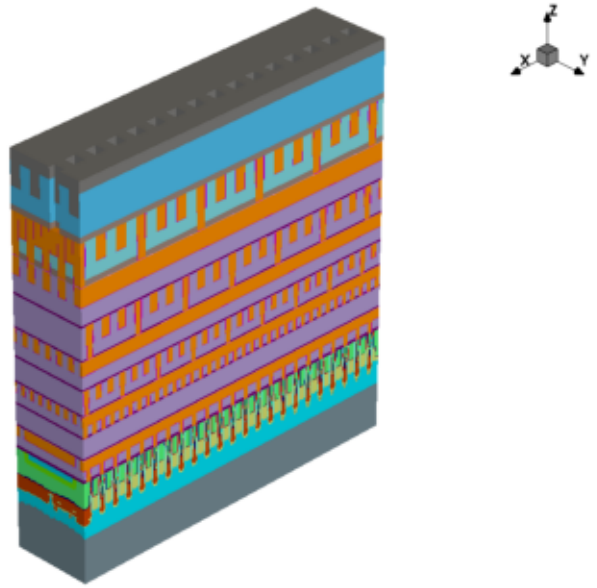

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

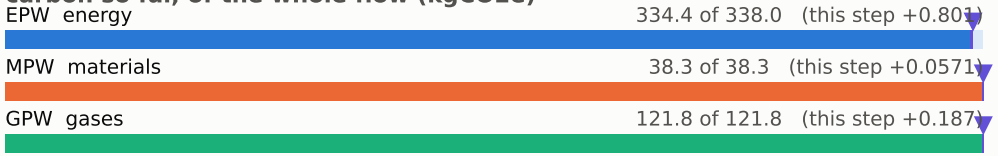

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

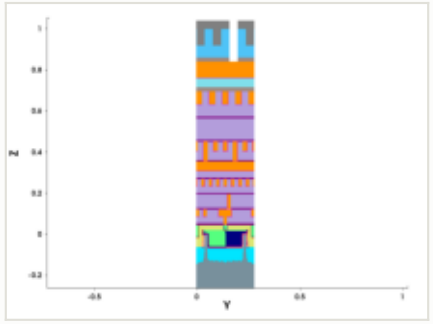

y cut at 0.211 µm

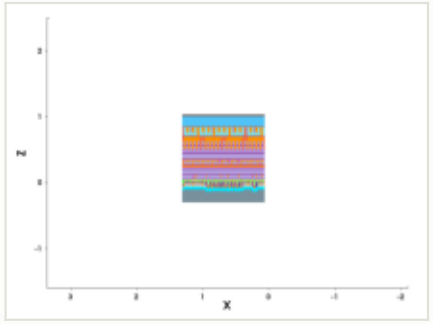

mask for this step

no mask for this step

steps by process area

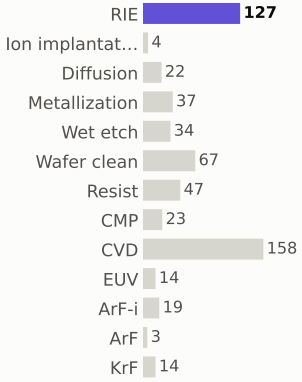

materials deposited (g)

gases emitted (g)



Step #6100: Wafer_clean

etch_strip · Wafer_clean

0.169	494.7	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



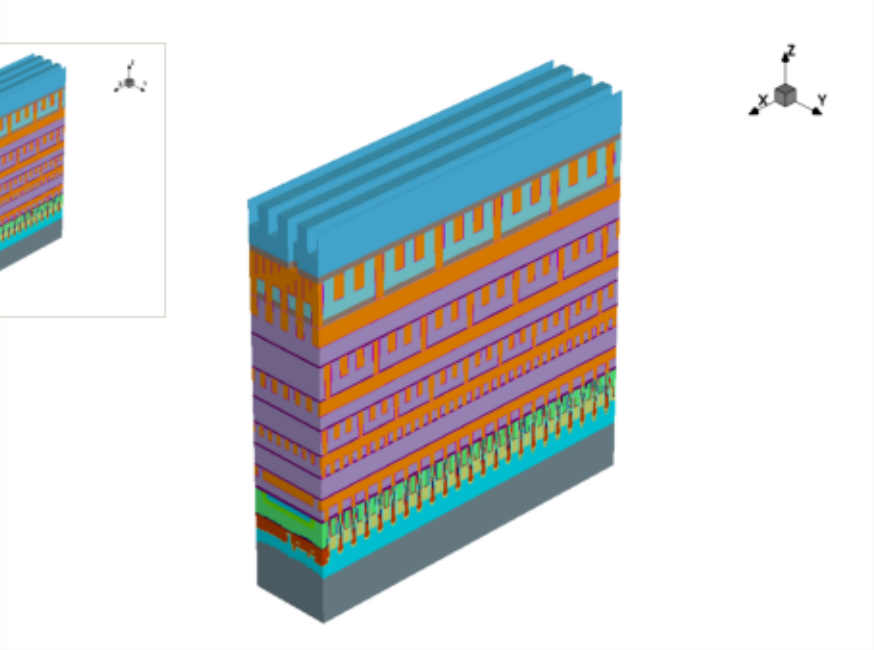

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

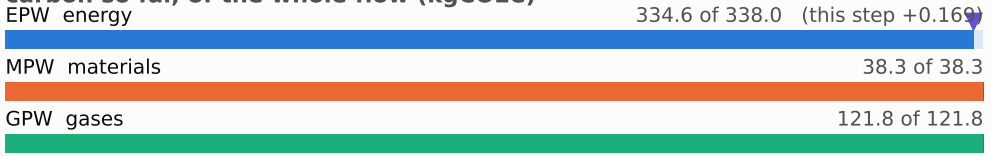

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

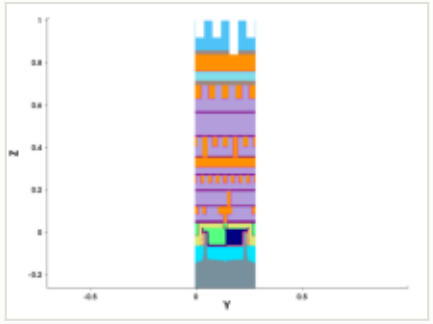

y cut at 0.211 µm

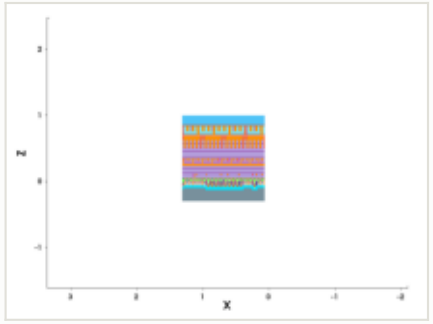

mask for this step

no mask for this step

steps by process area

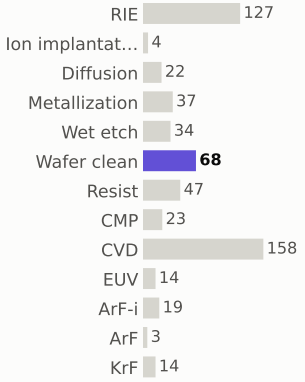

materials deposited (g)

gases emitted (g)



Step #6110: Metallization

depo_ellipsoidal · Metallization

1.2	495.9	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



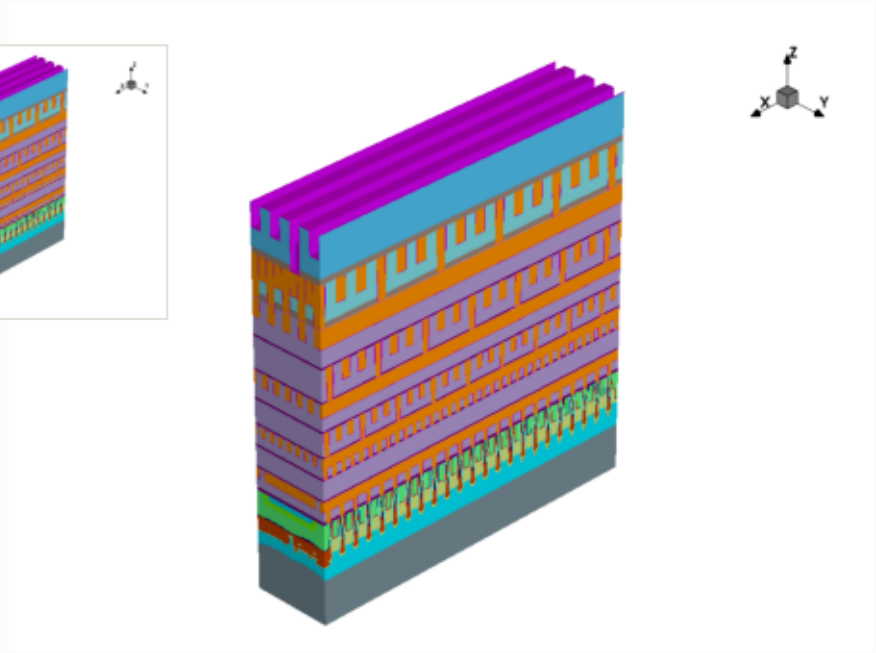

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

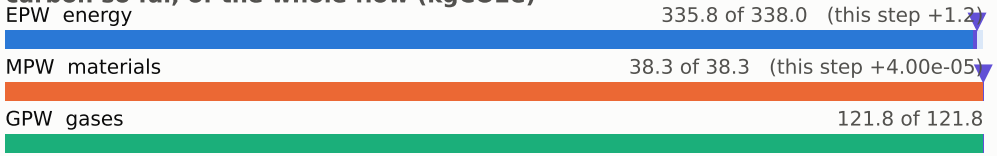

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

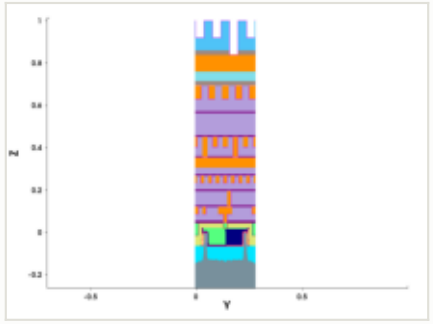

y cut at 0.211 µm

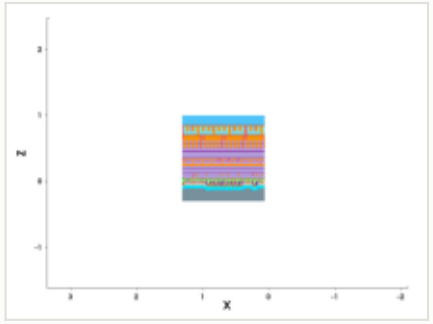

mask for this step

no mask for this step

steps by process area

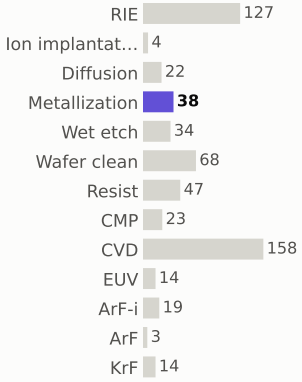

materials deposited (g)

gases emitted (g)



Step #6120: Metallization

depo_fill · Metallization

1.21	497.1	0.24%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



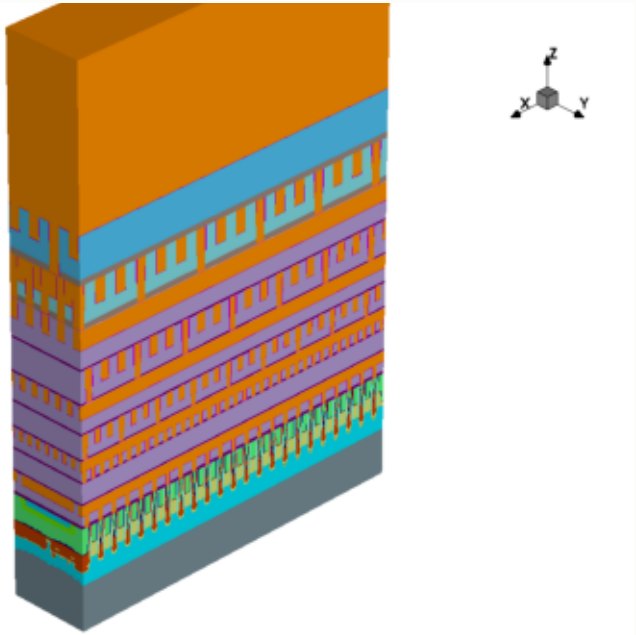

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

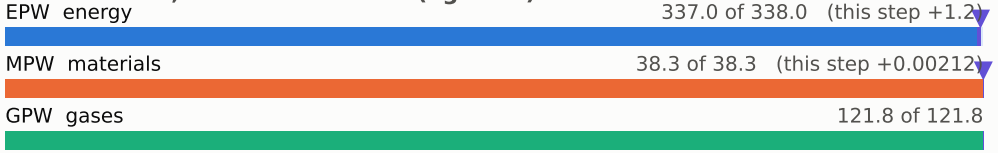

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

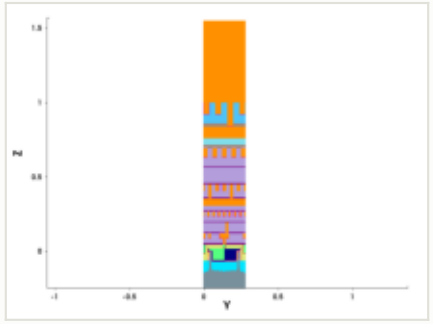

y cut at 0.211 µm

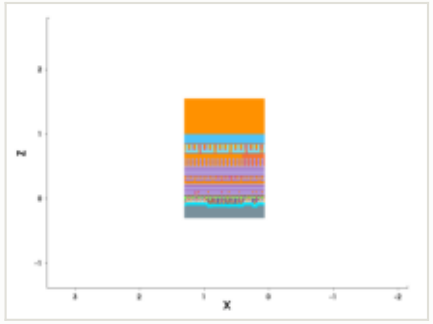

mask for this step

no mask for this step

steps by process area

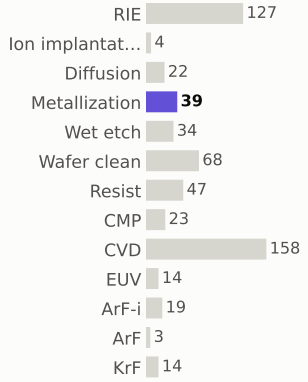

materials deposited (g)

gases emitted (g)



Step #6130: Diffusion

treatment · Diffusion

0.801	497.9	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



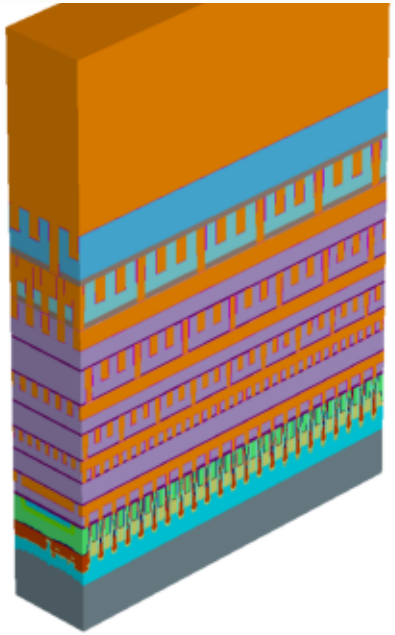

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

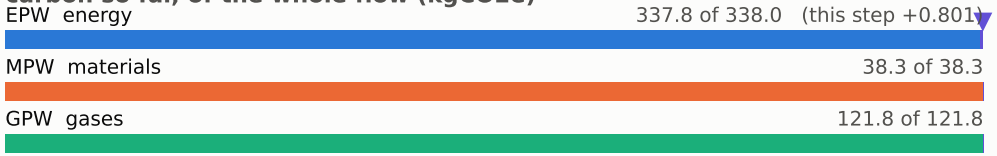

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

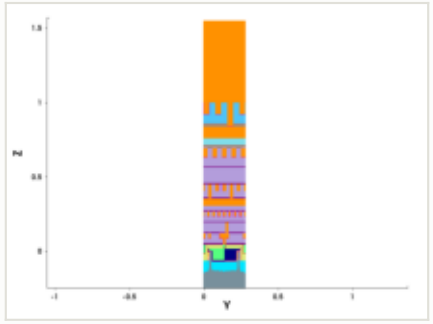

y cut at 0.211 µm

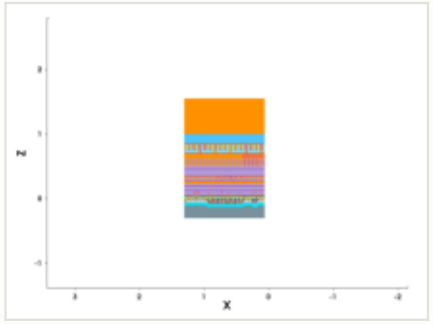

mask for this step

no mask for this step

steps by process area

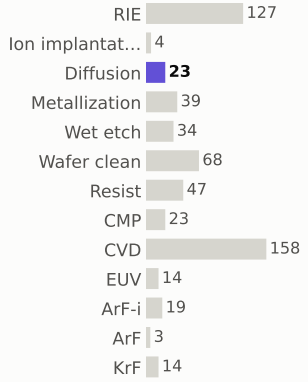

materials deposited (g)



gases emitted (g)



Step #6140: CMP

etch_cmp · CMP

0.169	498.1	0.034%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



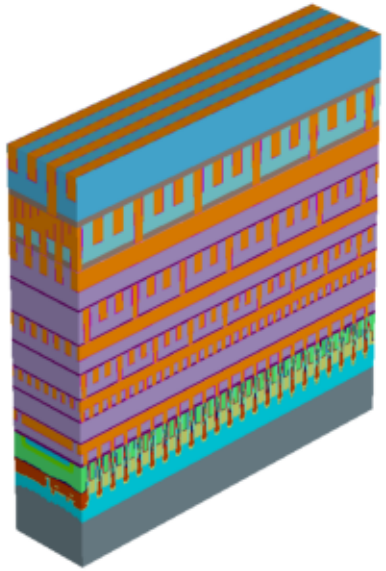

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

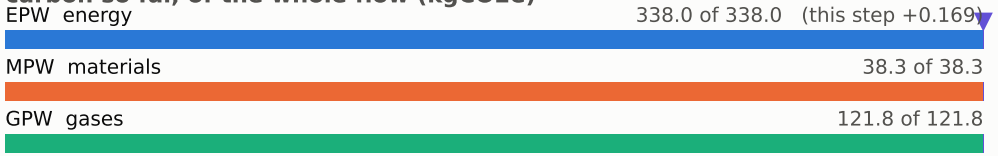

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.677 µm

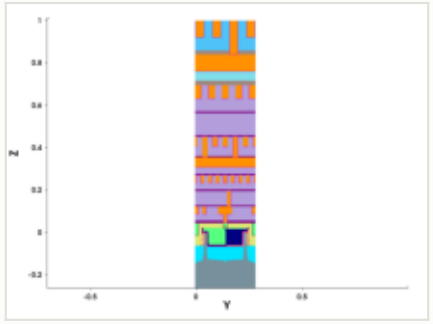

y cut at 0.211 µm

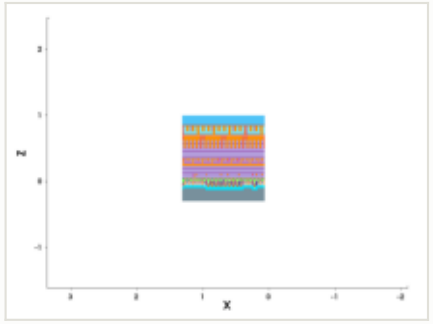

mask for this step

no mask for this step

steps by process area

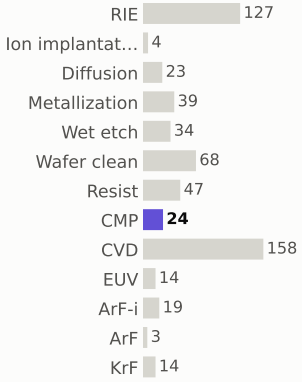

materials deposited (g)



gases emitted (g)



Carbon by module

kgCO2e per wafer, in flow order (steps in brackets)

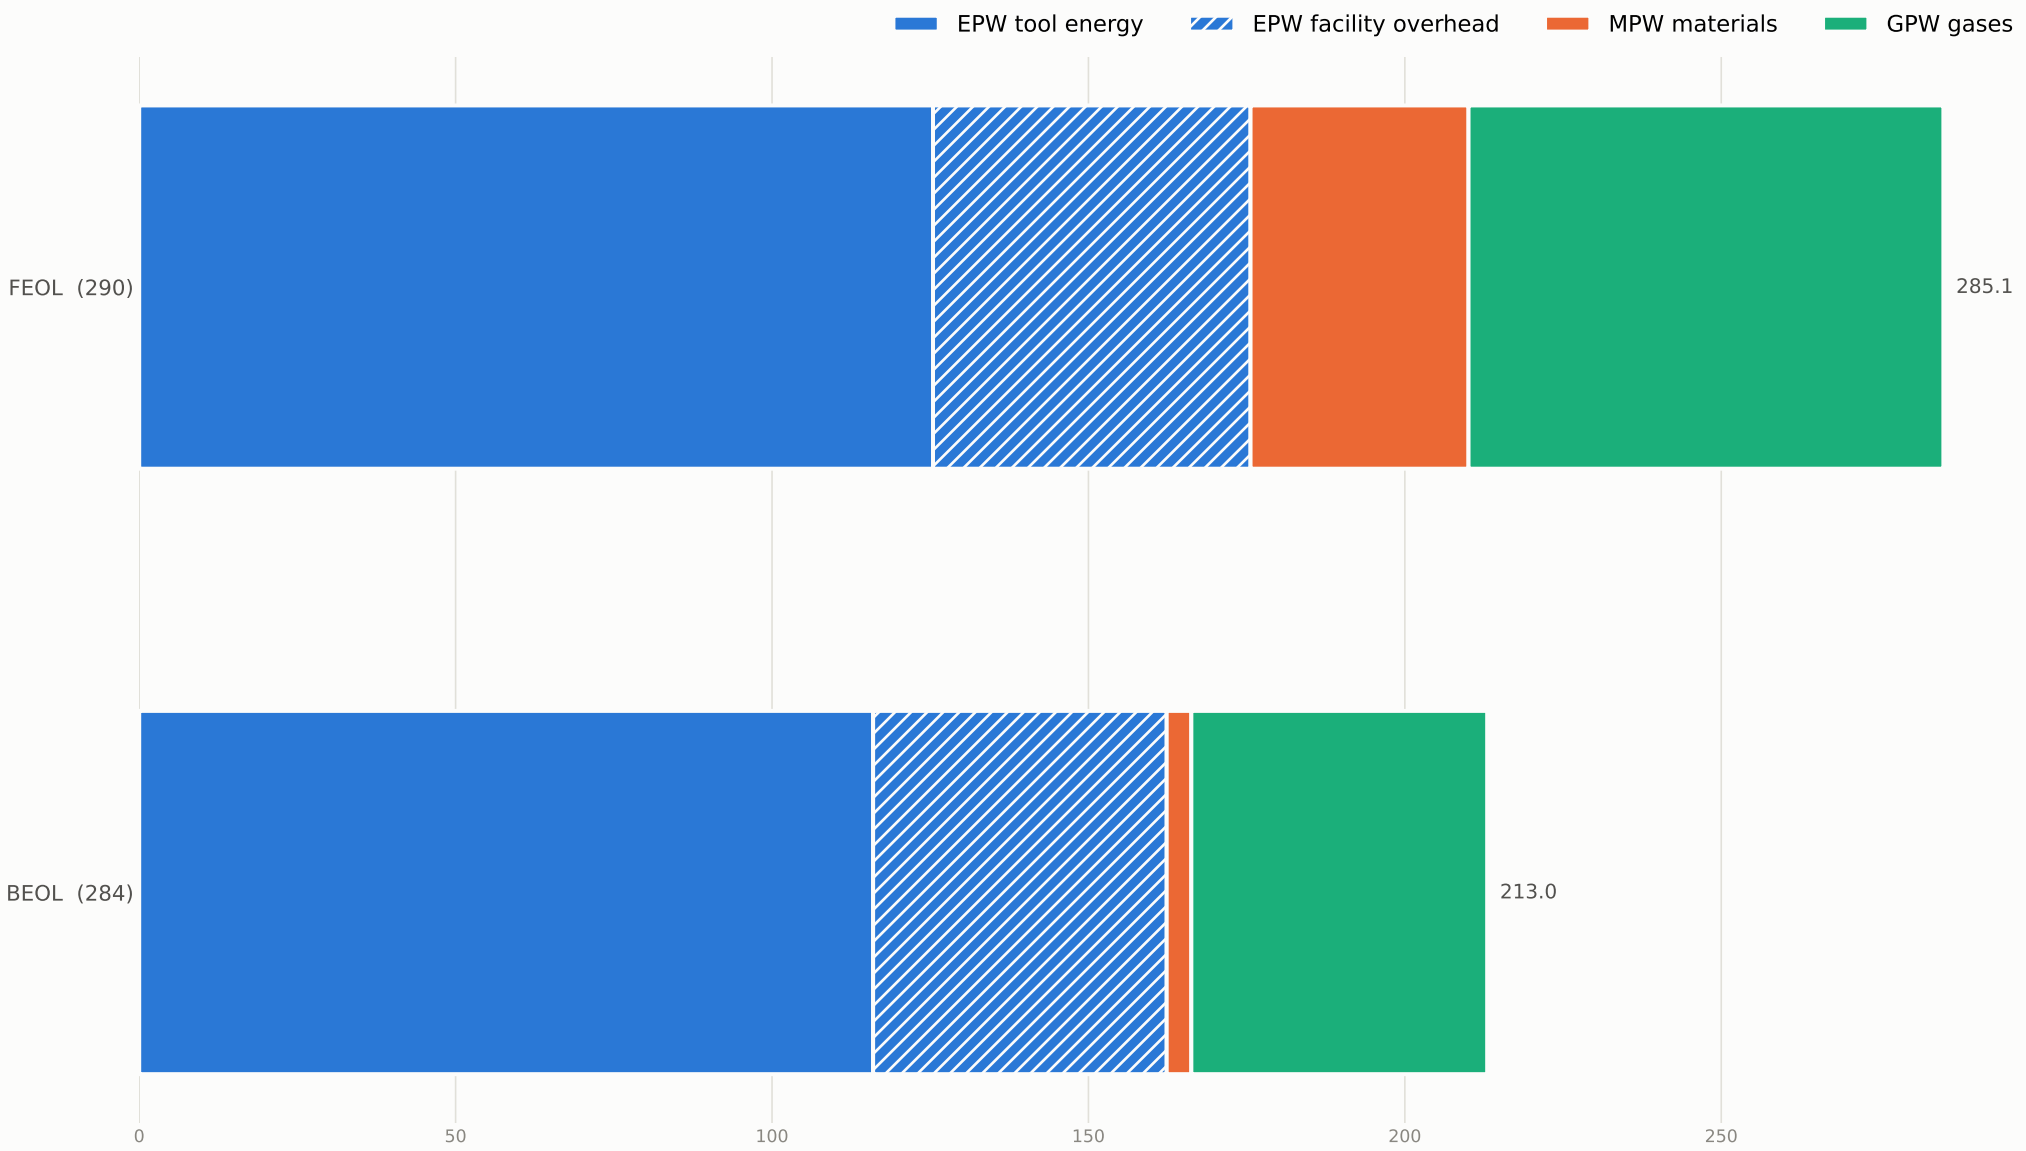

Totals by process area

kgCO2e per wafer; EPW = tool + facility overhead (overhead energy = tool energy x 0.4)

process area	steps	tool kWh	overhead kWh	EPW tool	EPW overhead	EPW	MPW	GPW	total
CVD	158	172.22	68.89	74.05	29.62	103.68	5.02	98.03	206.73
RIE	127	168.91	67.56	72.63	29.05	101.68	7.25	23.76	132.69
Metallization	39	78.00	31.20	33.54	13.42	46.96	0.07	0.00	47.03
EUV	14	45.50	18.20	19.57	7.83	27.39	0.00	0.00	27.39
Diffusion	23	30.59	12.24	13.15	5.26	18.42	0.00	0.00	18.42
Wafer_clean	68	19.04	7.62	8.19	3.27	11.46	0.00	0.00	11.46
Resist	47	13.16	5.26	5.66	2.26	7.92	0.00	0.00	7.92
Wet_etch	34	9.52	3.81	4.09	1.64	5.73	0.00	0.00	5.73
ArF-i	19	6.84	2.74	2.94	1.18	4.12	0.00	0.00	4.12
CMP	24	6.72	2.69	2.89	1.16	4.05	0.00	0.00	4.05
Ion_implantation	4	5.32	2.13	2.29	0.92	3.20	0.00	0.00	3.20
KrF	14	4.62	1.85	1.99	0.79	2.78	0.00	0.00	2.78
ArF	3	0.99	0.40	0.43	0.17	0.60	0.00	0.00	0.60
Wafer		0.00	0.00	0.00	0.00	0.00	26.00	0.00	26.00
all	574	561.43	224.57	241.41	96.57	337.98	38.34	121.79	498.11