scfet

process design review · 933 steps · generated by CarbonEDA v0 on 2026-11-09 19:58 EST

847.3

kgCO2e per wafer start

557.5
EPW energy · 66%

96.4
MPW materials · 11%

193.4
GPW gases · 23%

wafer 300 mm · yield 1 · carbon intensity 0.43 kgCO2e/kWh · facility overhead 0.4 x tool energy
EPW 557.5 = tool 398.2 + facility overhead 159.3 kgCO2e (926 + 370 kWh)

flow technologies/logic/scfet/scfet_final.csv
layout technologies/logic/scfet/scfet_layout.gds
structure images from the spx run of 2026-11-09 18:17:22

CarbonEDA parameters

config/carbon_config.yaml and materials.yaml as used for every number in this report

EPW energy

(tool + 0.4 x tool facility overhead) x 0.43 kgCO2e/kWh

process area	kWh / step	steps
RIE	1.33	175
Ion_implantation	1.33	7
Diffusion	1.33	38
Metallization	2	68
Wet_etch	0.28	4
Wafer_clean	0.28	170
Resist	0.28	75
CMP	0.28	57
CVD	1.09	259
EUV	3.25	35
ArF-i	0.36	28
ArF	0.33	8
KrF	0.33	3
Hg	0.33	6

GPW process gases

kg x (1 - utilization) x (1 - abatement) x GWP, plus byproducts kg/kg x (1 - abatement) x GWP; defaults: utilization 1.0, abatement 0.9

area	gas	g / step	upstream*	utilization	abatement	byproducts (kg per kg gas)
CVD	NF3	2.54	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
RIE	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
RIE	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05

* kgCO2e per kg of gas made, counted in MPW

GWP (kgCO2e per kg, 100-yr) and abatement of every gas emitted

gas	GWP	abatement
CF4	7390	0.89
C2F6	12200	0.95
C4F6	0	0.98
C4F8	10300	0.98
CHF3	14800	0.98
CH2F2	675	0.98
CH3F	116	0.98
NF3	17200	0.95
SF6	22800	0.95

MPW materials

blanket film over a 300 mm wafer: thickness x area x density x GWP; the wafer itself 26000 gCO2e (300 mm); yield 1

material	g/cm³	gCO2e/g
TiN	5.21	43.98
W	19.3	75.81
TEOS	0.94	2.86
TaN	13.7	25.82
Cu	8.96	6.09
Co	8.9	44.5

Step #20: Wafer

substrate · Wafer

26	52	3.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

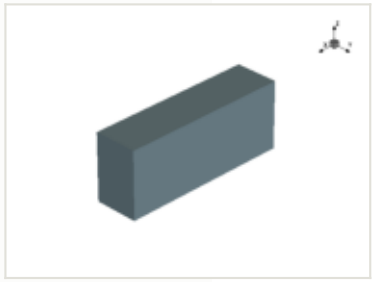

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	26 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 0 of 557.5

MPW materials 52 of 96.4 (this step +52)

GPW gases 0 of 193.4

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

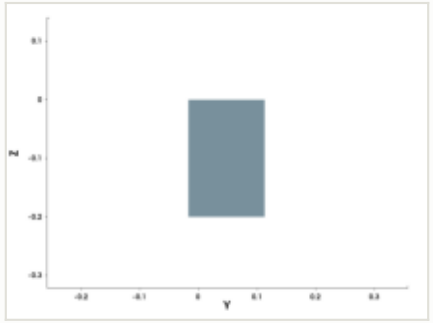

y cut at 0.049 µm

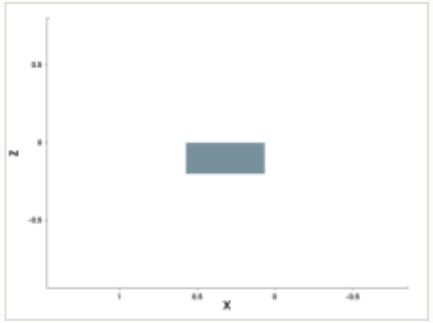

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

Step #30: CVD

depo_epi · CVD

1.31	53.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

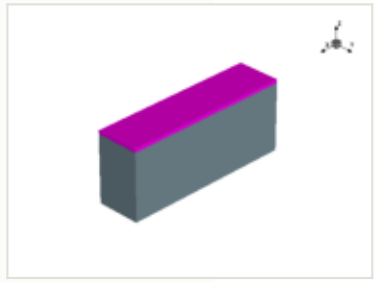

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

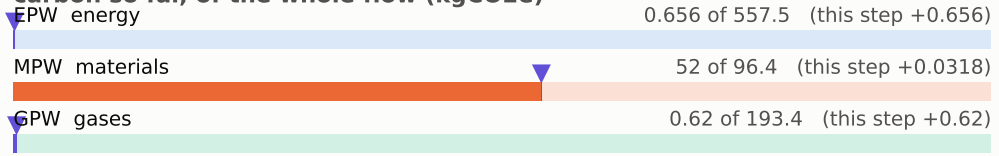

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

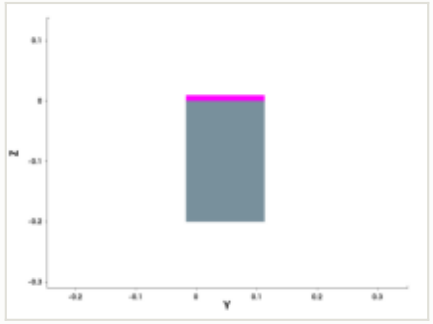

y cut at 0.049 µm

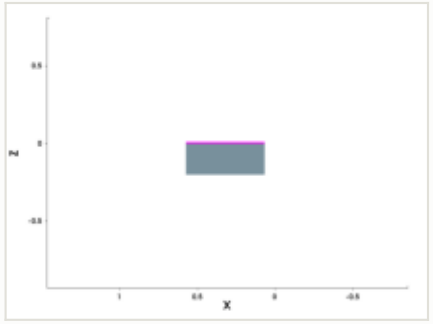

mask for this step

no mask for this step

steps by process area

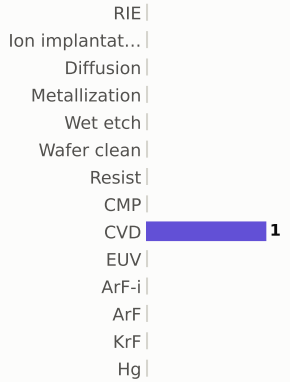

materials deposited (g)

gases emitted (g)

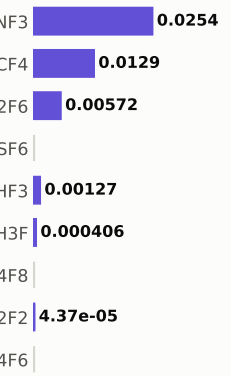

Step #40: CVD

depo_epi · CVD

1.31	54.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

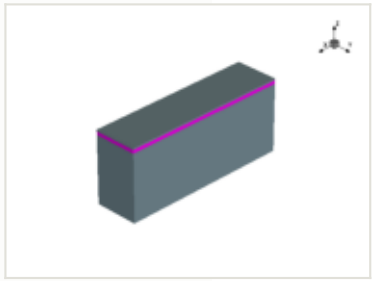

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

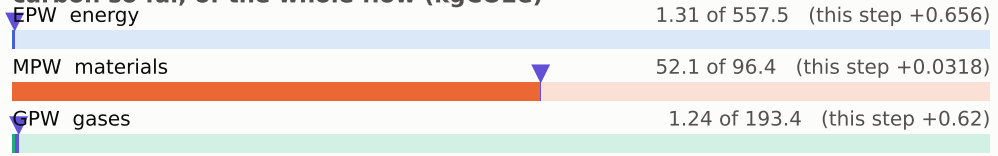

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

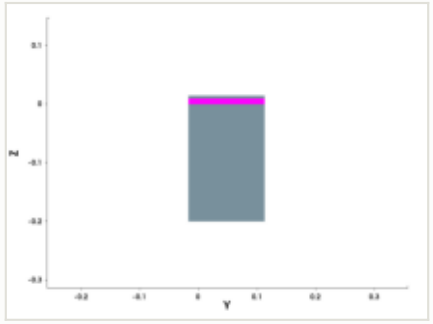

y cut at 0.049 µm

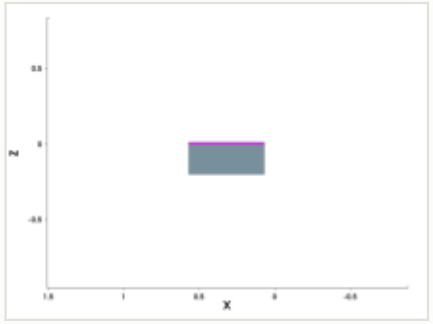

mask for this step

no mask for this step

steps by process area

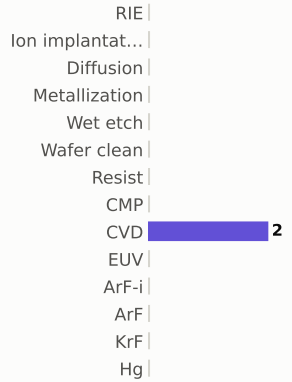

materials deposited (g)

gases emitted (g)

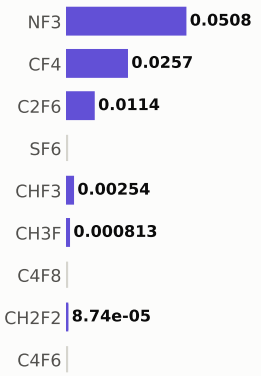

Step #50: CVD

depo_epi · CVD

1.31	55.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

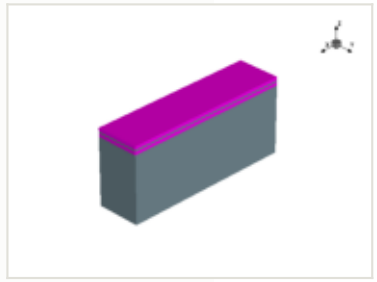

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

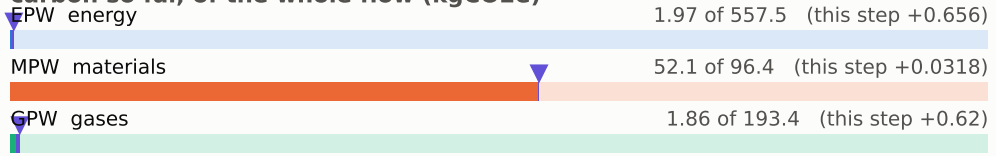

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

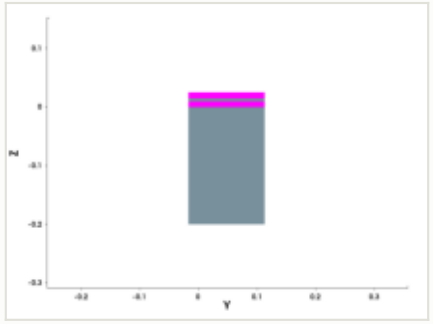

y cut at 0.049 µm

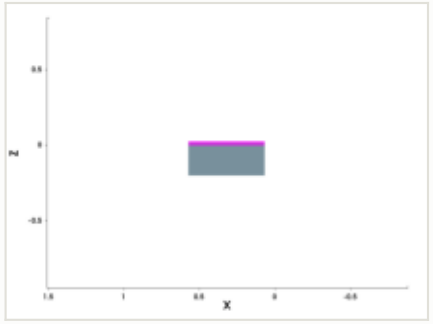

mask for this step

no mask for this step

steps by process area

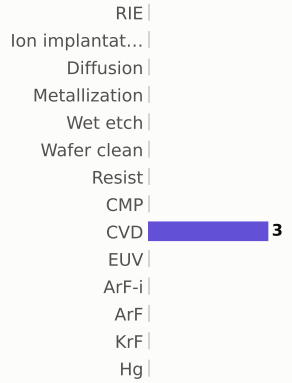

materials deposited (g)

gases emitted (g)

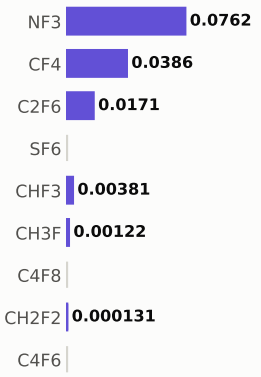

Step #60: CVD

depo_epi · CVD

1.31	57.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

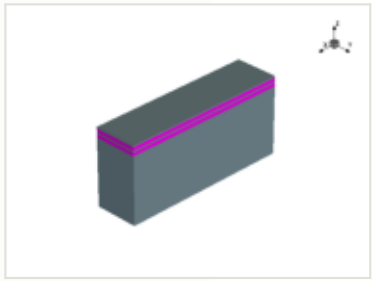

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

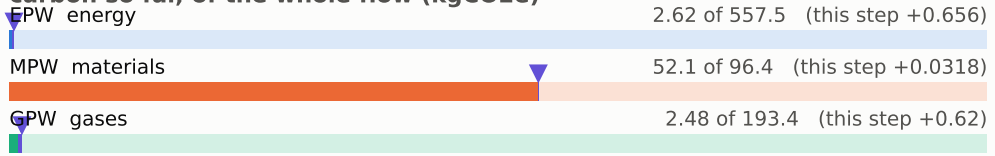

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

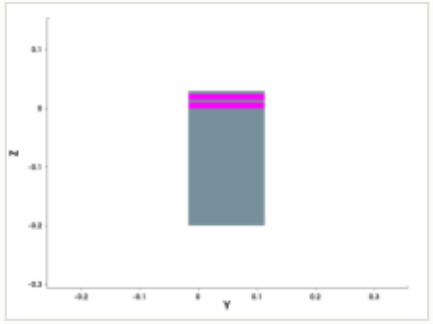

y cut at 0.049 µm

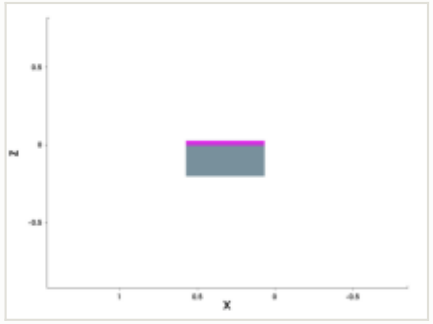

mask for this step

no mask for this step

steps by process area

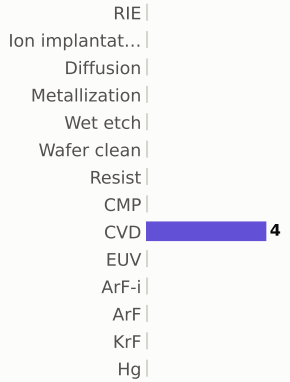

materials deposited (g)

gases emitted (g)

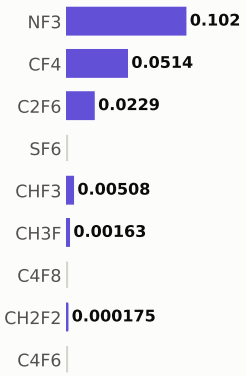

Step #70: CVD

depo_epi · CVD

1.31	58.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

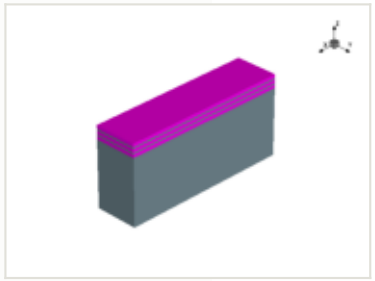

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

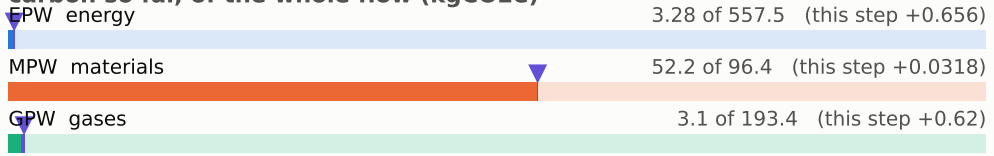

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

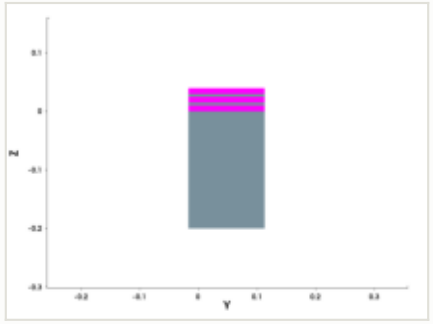

y cut at 0.049 µm

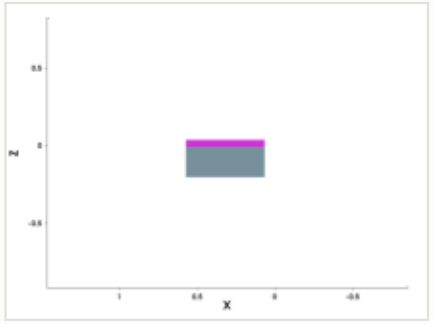

mask for this step

no mask for this step

steps by process area

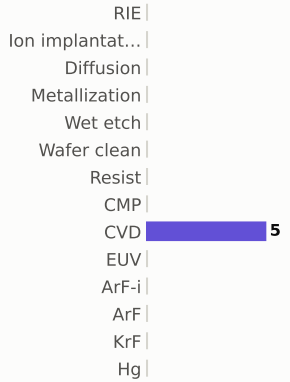

materials deposited (g)

gases emitted (g)

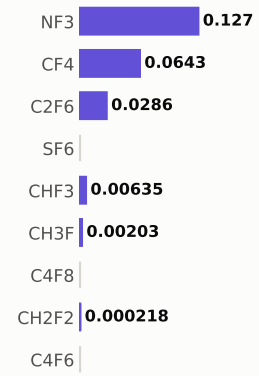

Step #80: CVD

depo_epi · CVD

1.31	59.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

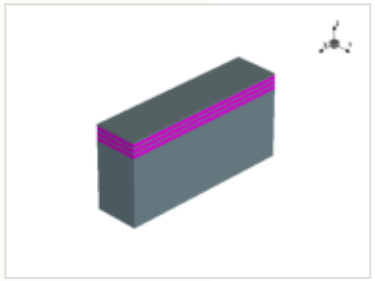

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

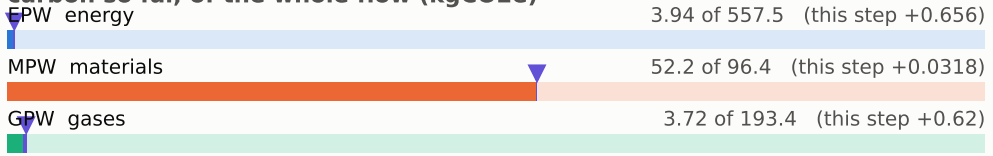

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

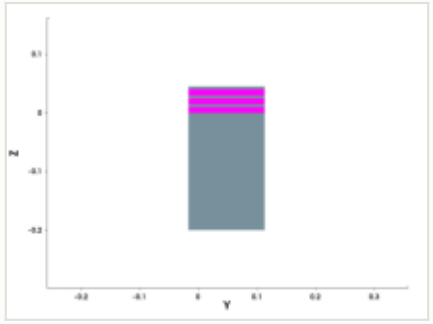

y cut at 0.049 µm

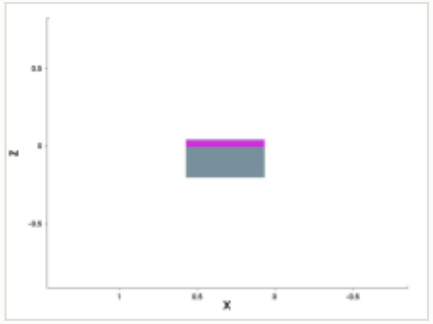

mask for this step

no mask for this step

steps by process area

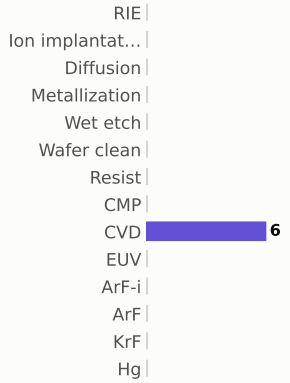

materials deposited (g)

gases emitted (g)

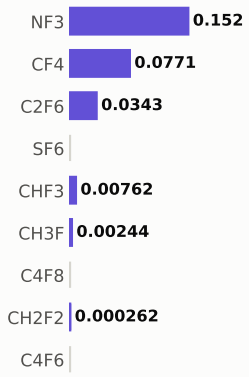

Step #90: CVD

depo_epi · CVD

1.31	61.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

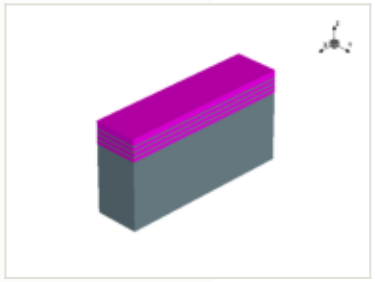

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

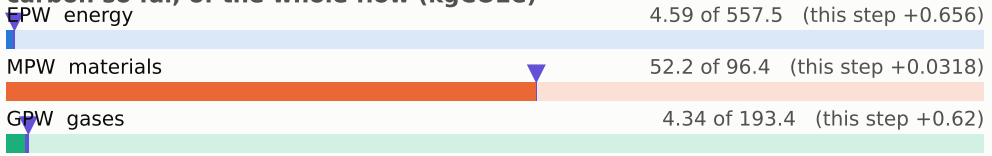

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

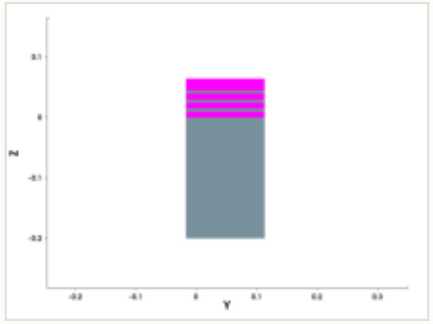

y cut at 0.049 µm

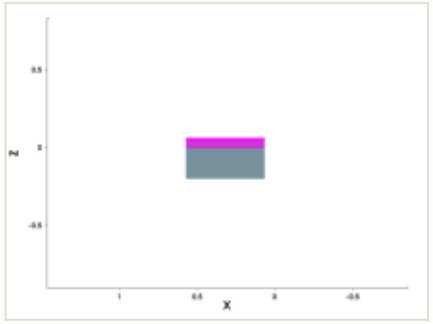

mask for this step

no mask for this step

steps by process area

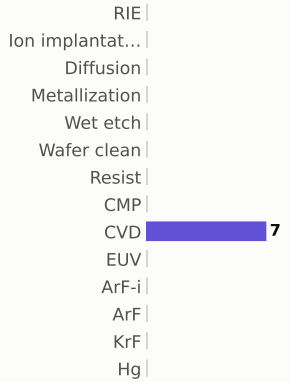

materials deposited (g)



gases emitted (g)

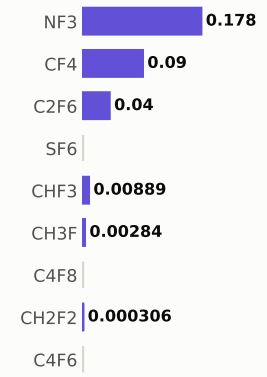

Step #110: Wafer

substrate · Wafer

26	87.2	3.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	26 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

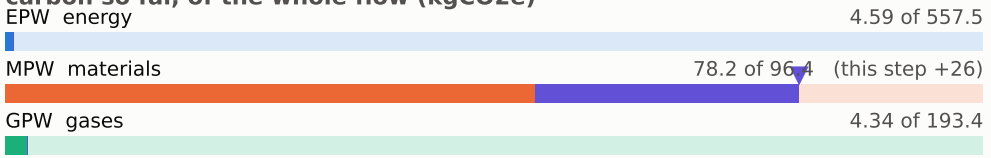

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

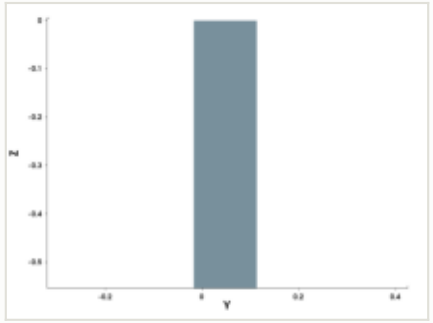

y cut at 0.049 µm

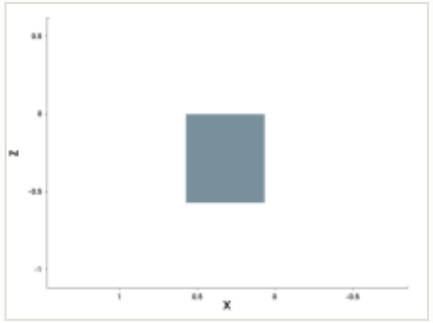

mask for this step

no mask for this step

steps by process area

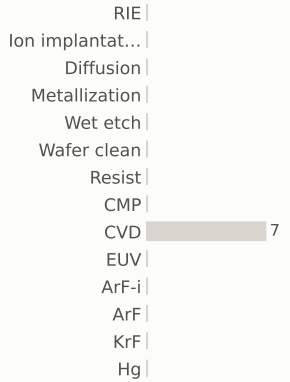

materials deposited (g)

gases emitted (g)

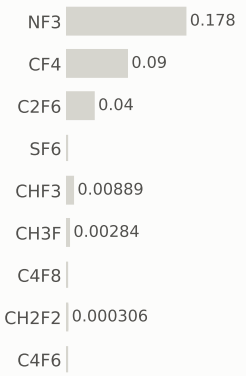

Step #130: KrF

litho_patterning · KrF

0.199	87.4	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

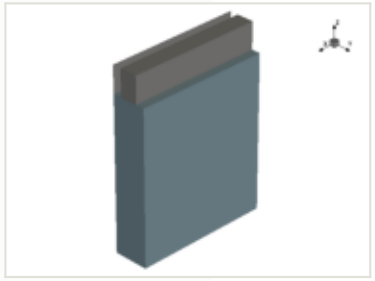

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

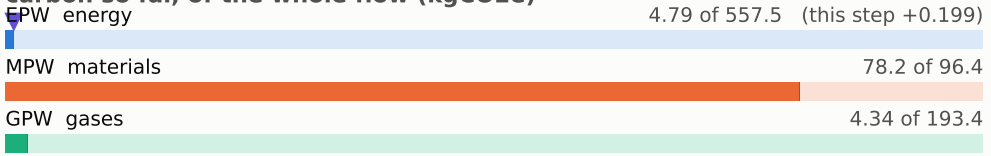

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

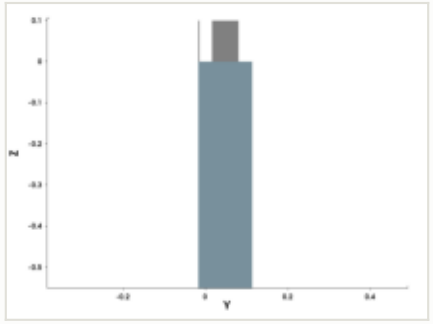

y cut at 0.049 µm

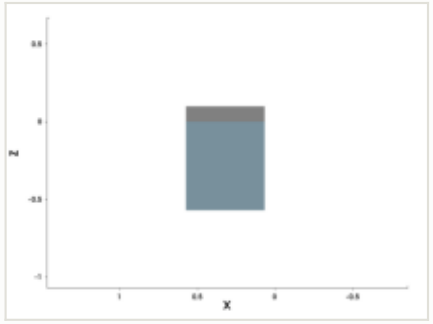

mask: layer 8:0 (GDSII)

steps by process area

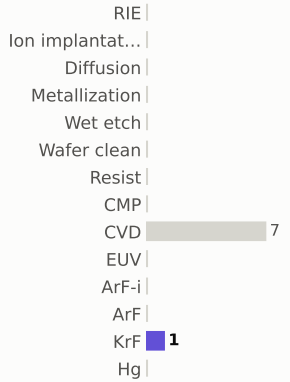

materials deposited (g)

gases emitted (g)

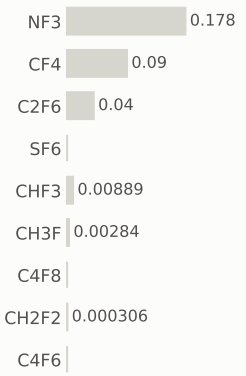

Step #140: RIE

etch_anisotropic · RIE

1.04	88.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

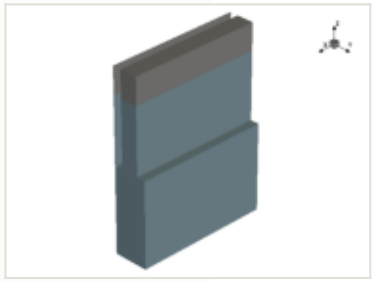

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

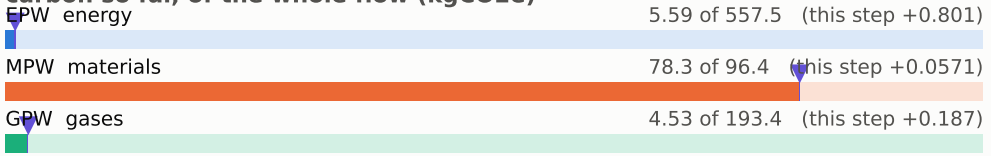

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

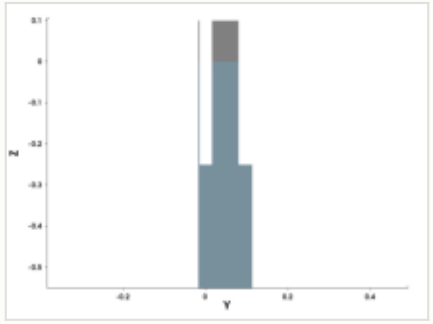

y cut at 0.049 µm

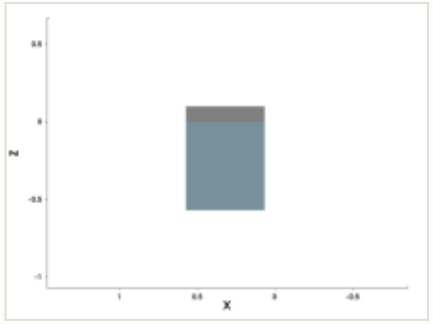

mask for this step

no mask for this step

steps by process area

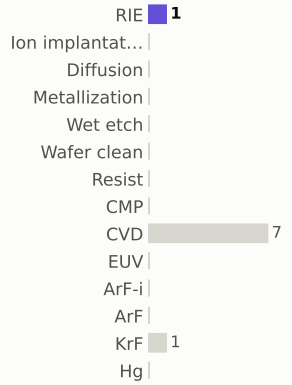

materials deposited (g)

gases emitted (g)

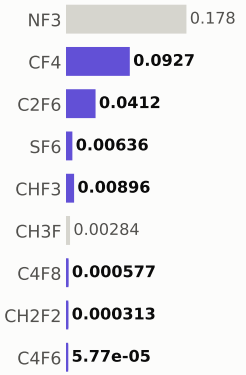

Step #150: Resist

etch_strip · Resist

0.169	88.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

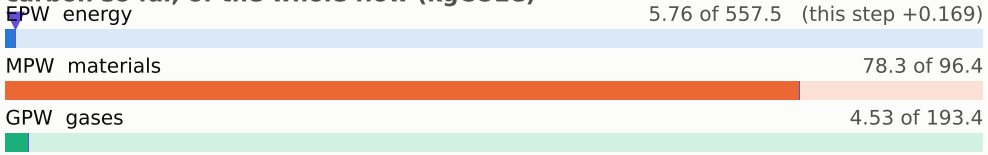

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

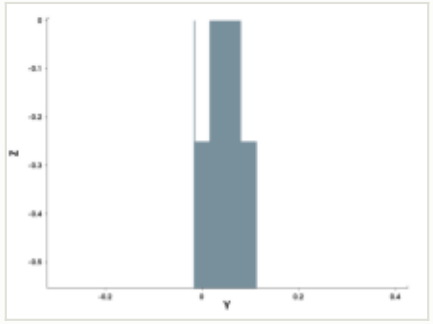

y cut at 0.049 µm

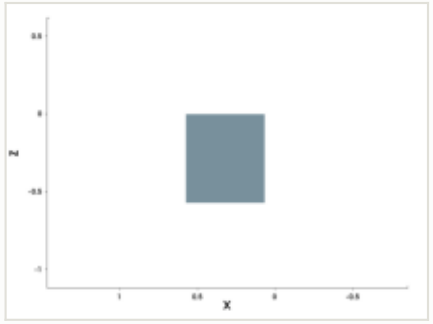

mask for this step

no mask for this step

steps by process area

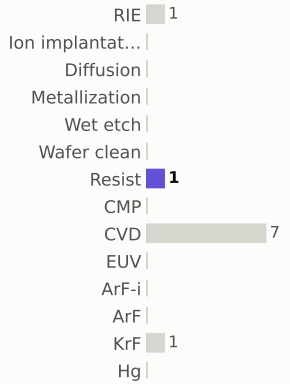

materials deposited (g)



gases emitted (g)

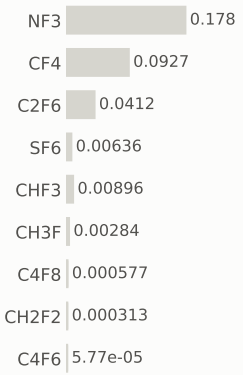

Step #160: CVD

depo_isotropic · CVD

1.31	89.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

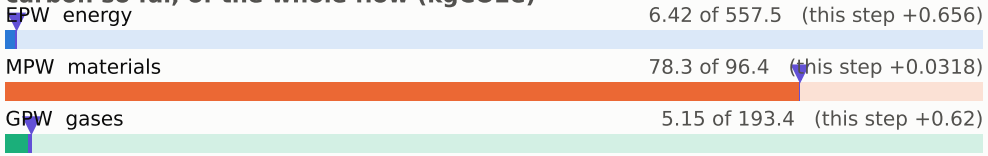

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

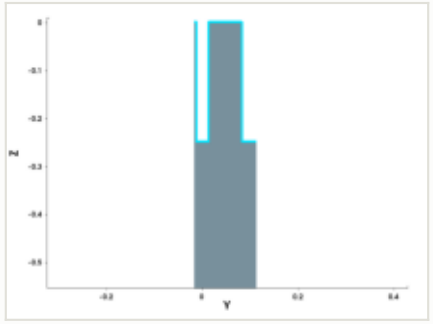

y cut at 0.049 µm

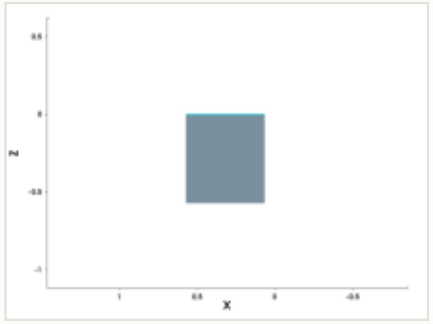

mask for this step

no mask for this step

steps by process area

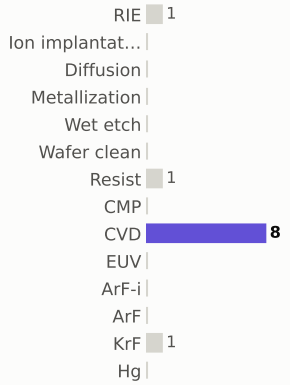

materials deposited (g)

gases emitted (g)

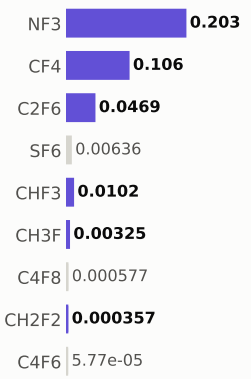

Step #170: Metallization

depo_isotropic · Metallization

1.2	91.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

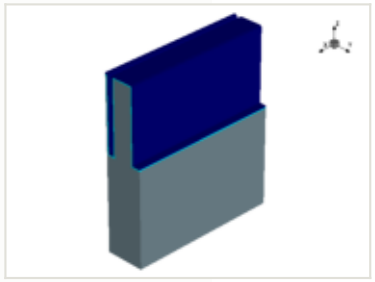

this step

process area	Metallization
material	TiN
thickness	0.005 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	8.10e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

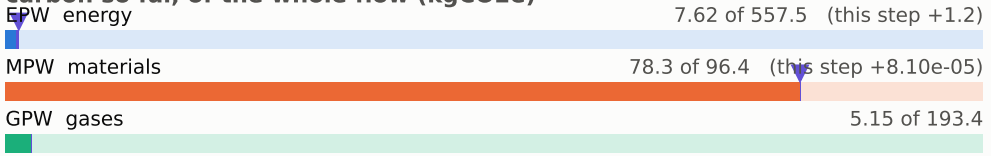

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

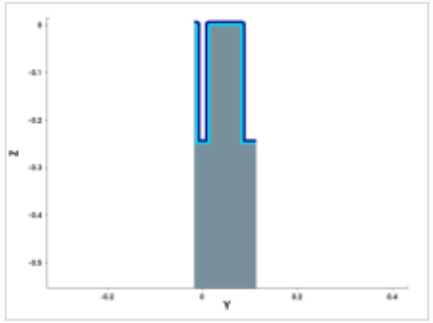

y cut at 0.049 µm

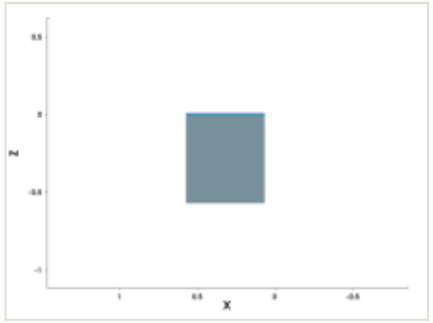

mask for this step

no mask for this step

steps by process area

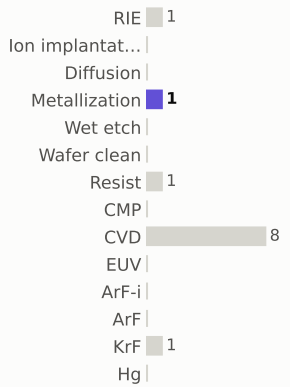

materials deposited (g)

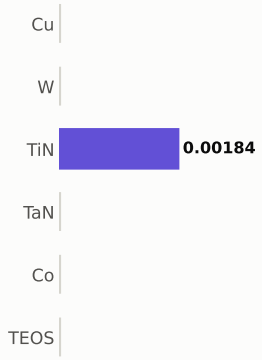

gases emitted (g)

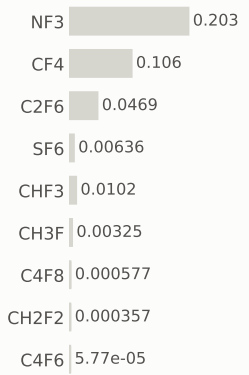

Step #180: Metallization

depo_fill · Metallization

1.2	92.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

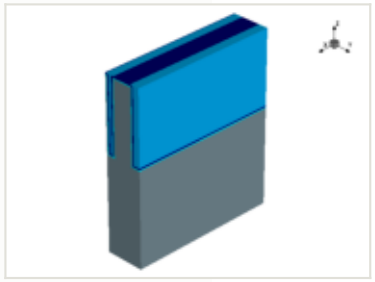

this step

process area	Metallization
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

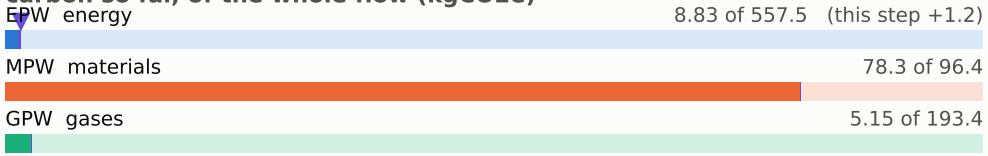

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

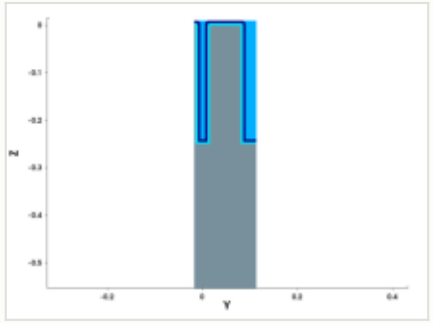

y cut at 0.049 µm

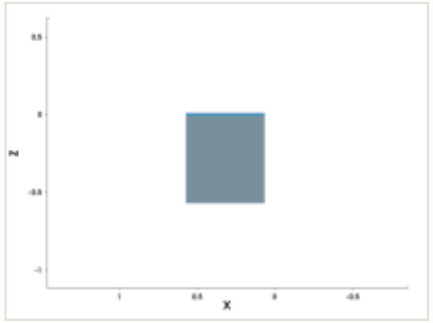

mask for this step

no mask for this step

steps by process area

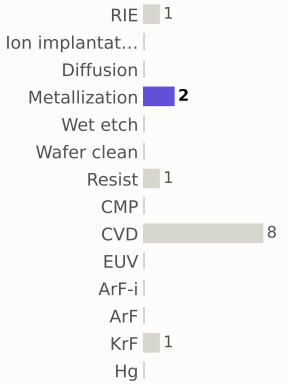

materials deposited (g)

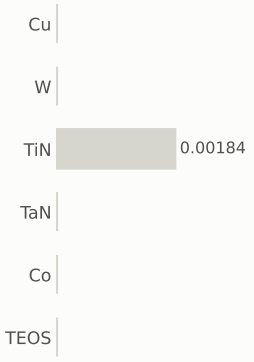

gases emitted (g)

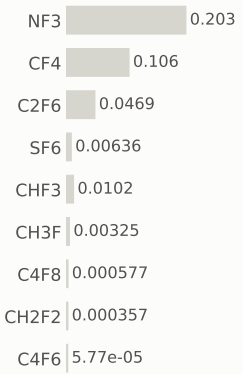

Step #190: CMP

etch_cmp · CMP

0.169	92.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

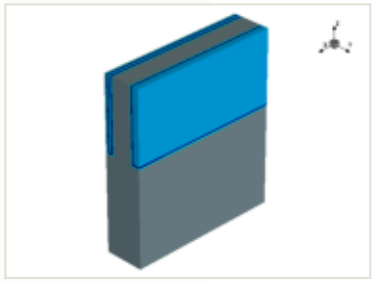

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

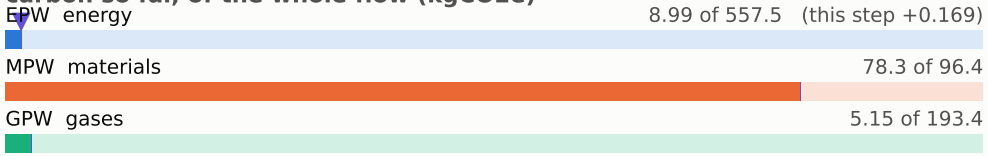

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

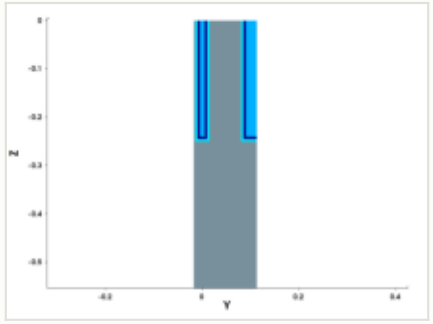

y cut at 0.049 µm

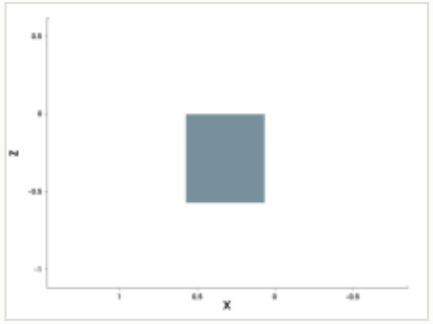

mask for this step

no mask for this step

steps by process area

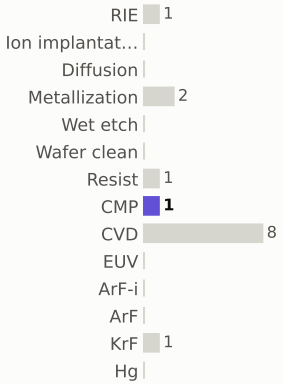

materials deposited (g)

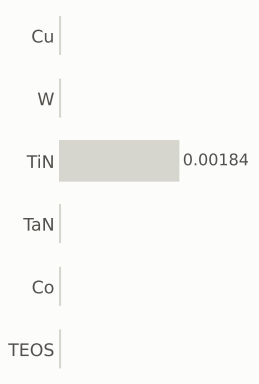

gases emitted (g)

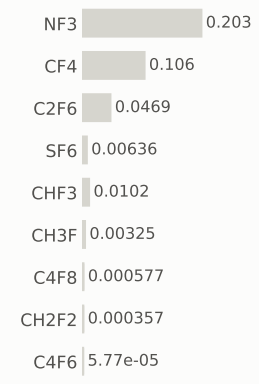

Step #200: RIE

etch_anisotropic · RIE

1.04	93.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

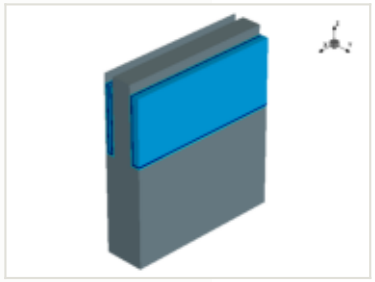

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

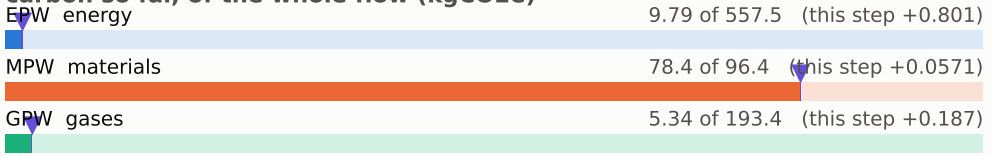

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

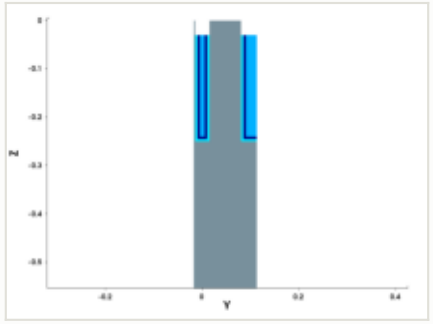

y cut at 0.049 µm

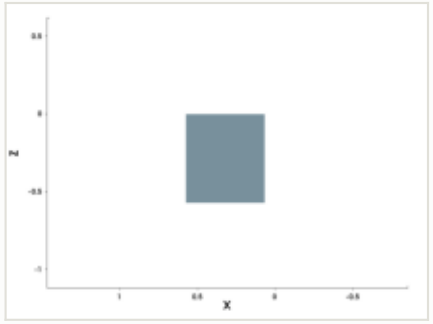

mask for this step

no mask for this step

steps by process area

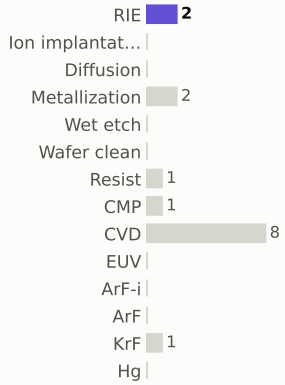

materials deposited (g)

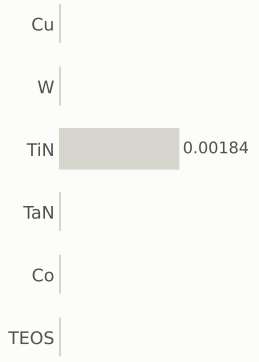

gases emitted (g)

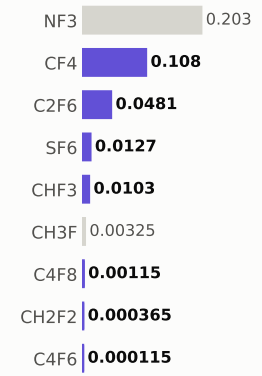

Step #210: CVD

depo_fill · CVD

1.31	94.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

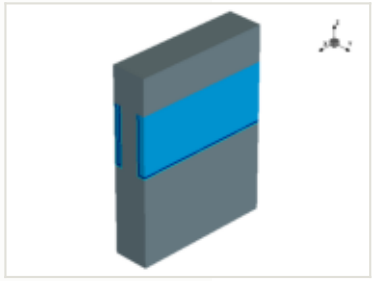

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

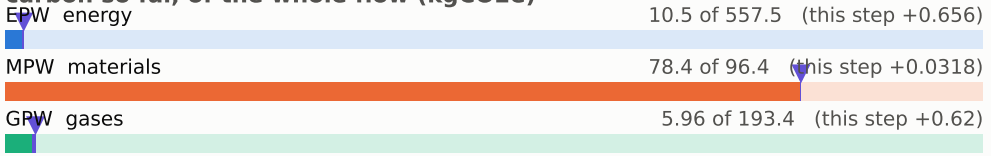

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

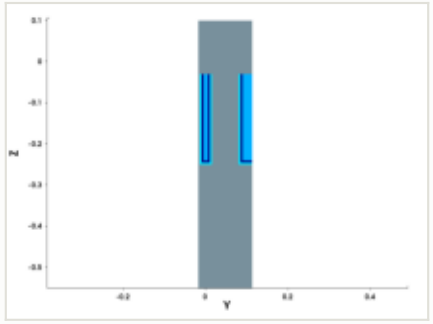

y cut at 0.049 µm

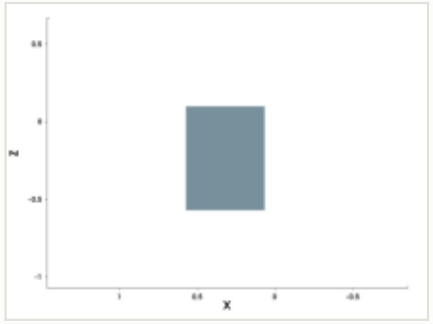

mask for this step

no mask for this step

steps by process area

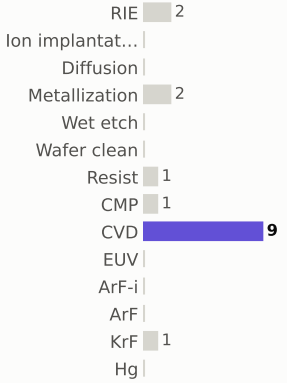

materials deposited (g)

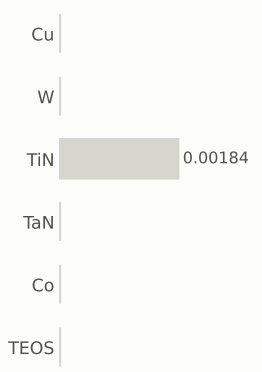

gases emitted (g)

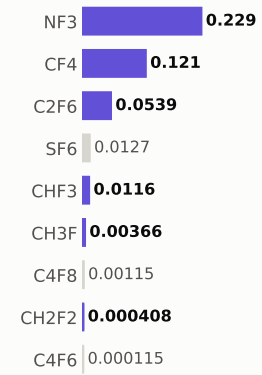

Step #230: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	95.6	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

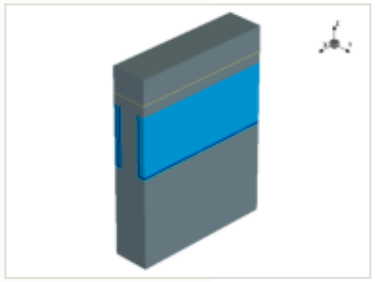

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

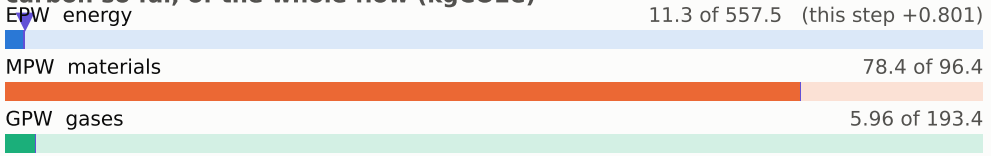

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

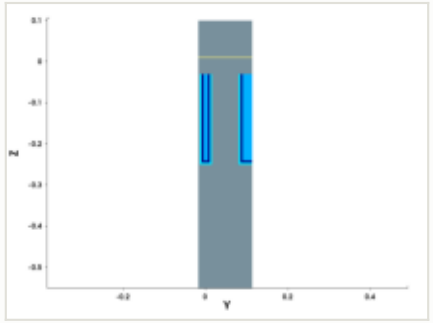

y cut at 0.049 µm

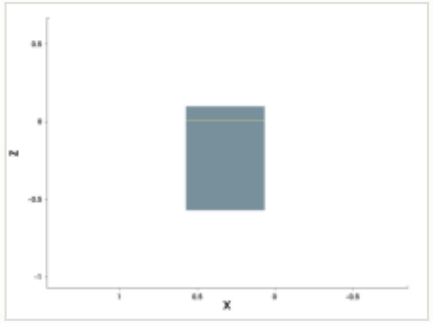

mask for this step

no mask for this step

steps by process area

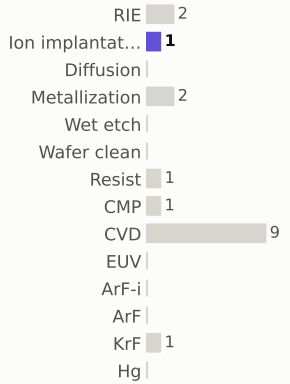

materials deposited (g)

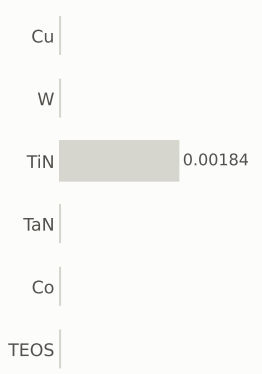

gases emitted (g)

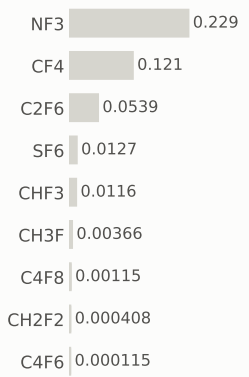

Step #250: CVD

depo_fill · CVD

1.31	96.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

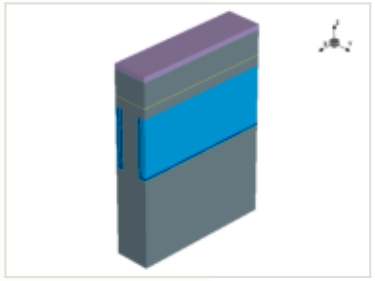

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

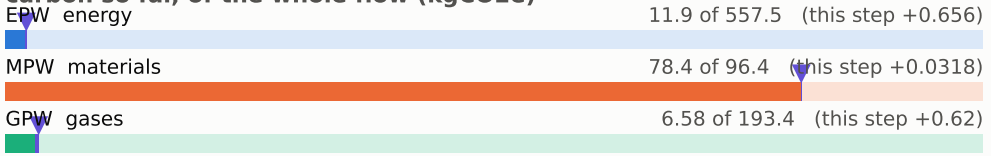

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

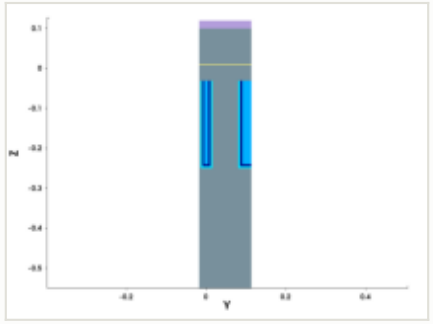

y cut at 0.049 µm

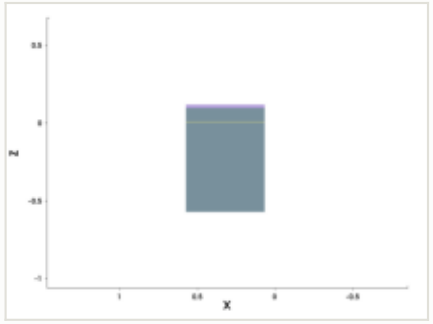

mask for this step

no mask for this step

steps by process area



materials deposited (g)

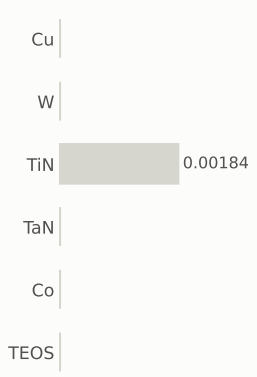

gases emitted (g)

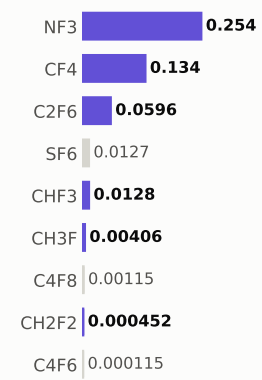

Step #260: CVD

depo_isotropic · CVD

1.31	98.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

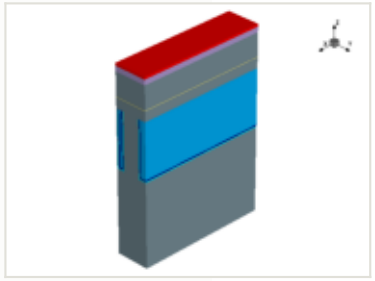

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

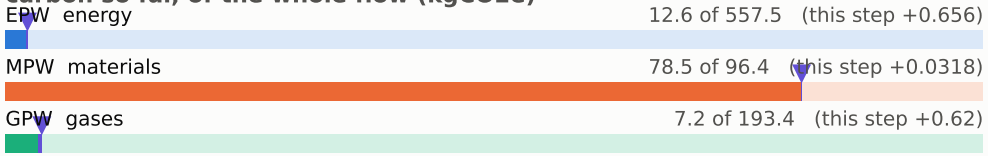

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

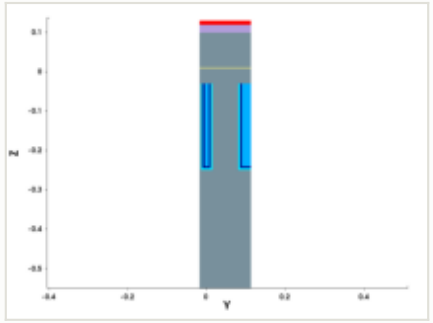

y cut at 0.049 µm

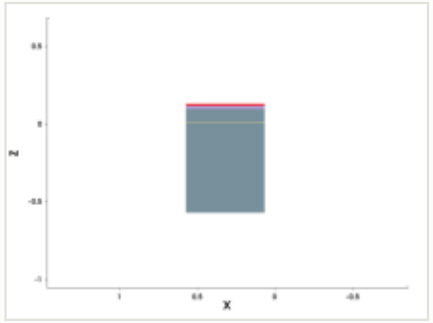

mask for this step

no mask for this step

steps by process area

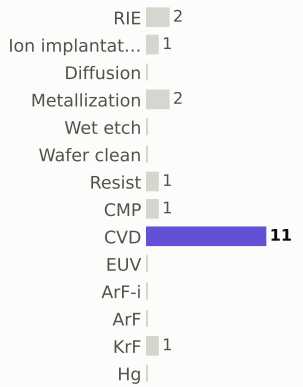

materials deposited (g)

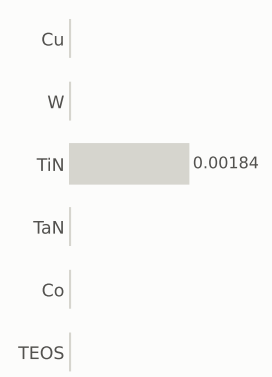

gases emitted (g)

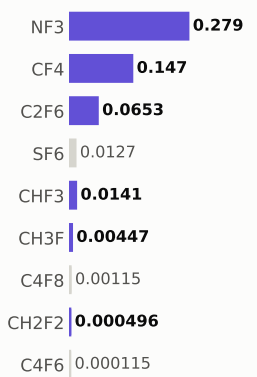

Step #270: CVD

depo_fill · CVD

1.31	99.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

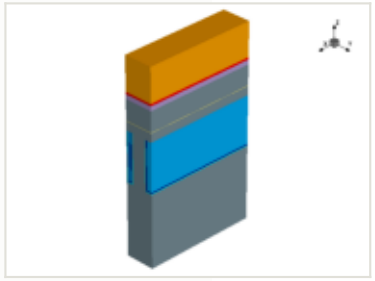

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

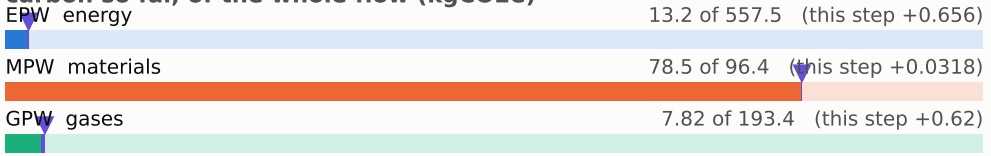

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

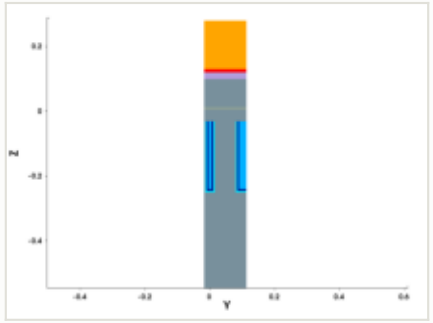

y cut at 0.049 µm

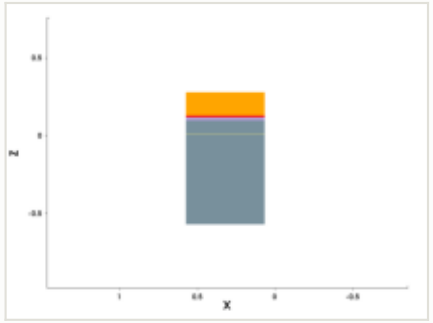

mask for this step

no mask for this step

steps by process area

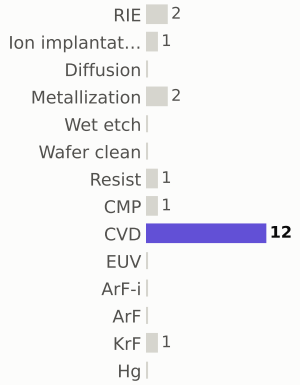

materials deposited (g)



gases emitted (g)

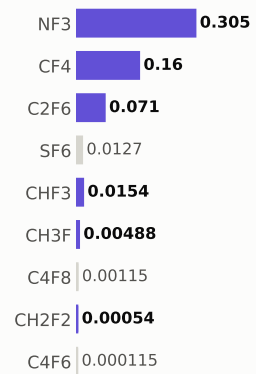

Step #280: CVD

depo_isotropic · CVD

1.31	100.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

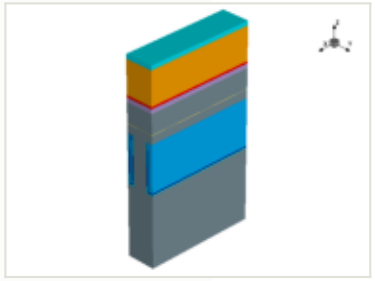

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

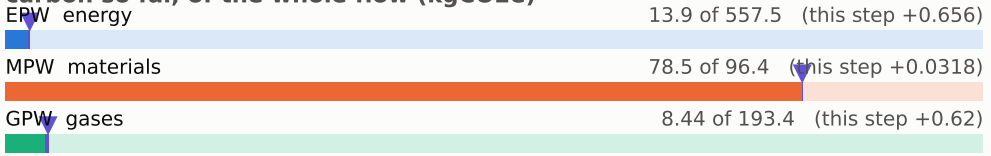

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

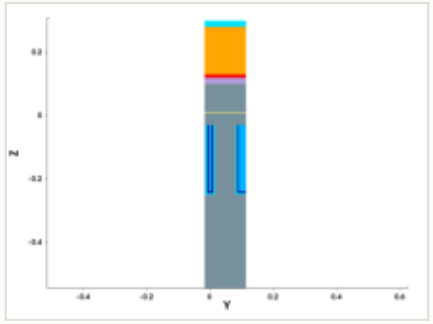

y cut at 0.049 µm

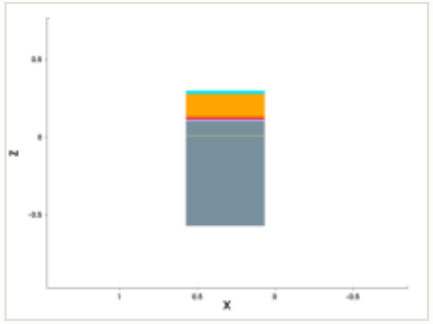

mask for this step

no mask for this step

steps by process area

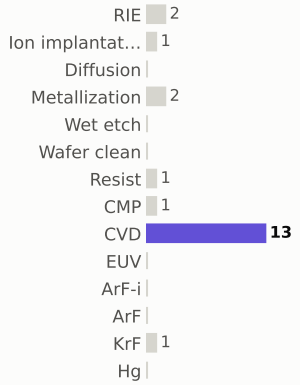

materials deposited (g)



gases emitted (g)

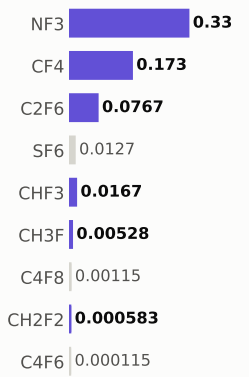

Step #290: CVD

depo_isotropic · CVD

1.31	102.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

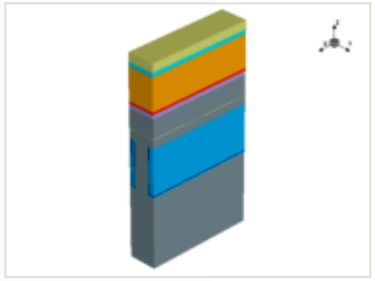

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

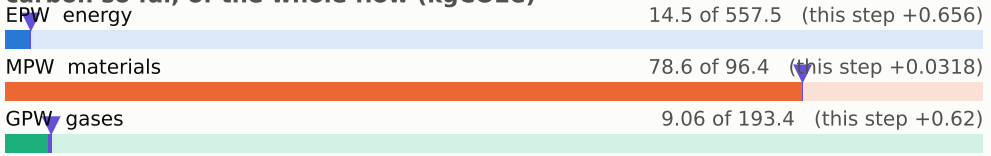

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

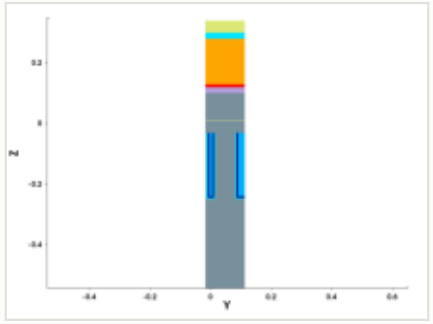

y cut at 0.049 µm

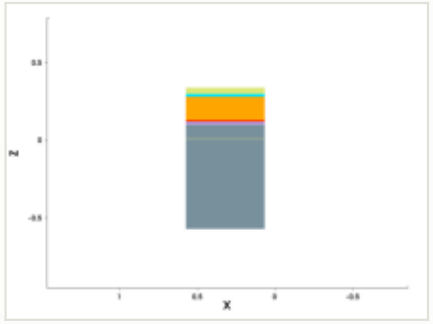

mask for this step

no mask for this step

steps by process area

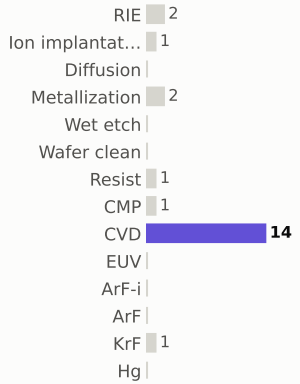

materials deposited (g)



gases emitted (g)

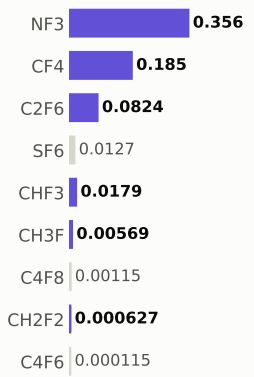

Step #300: CVD

depo_fill · CVD

1.31	103.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

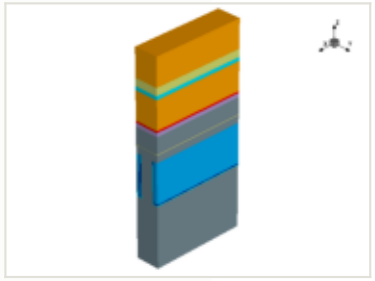

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

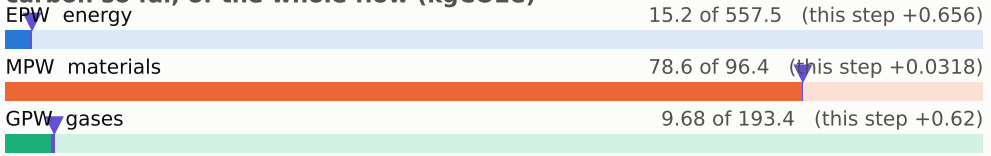

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

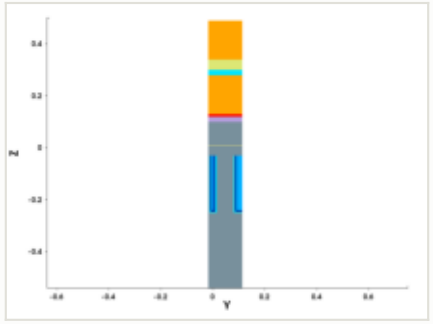

y cut at 0.049 µm

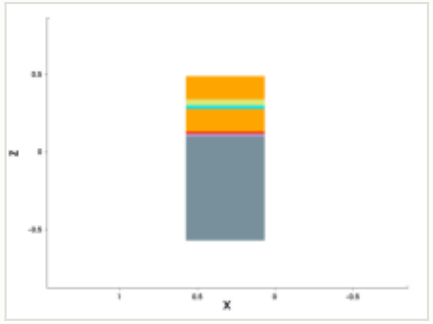

mask for this step

no mask for this step

steps by process area

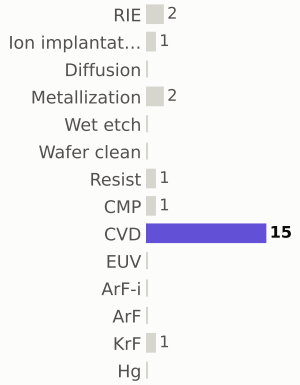

materials deposited (g)



gases emitted (g)

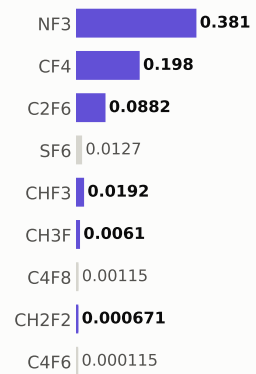

Step #310: CVD

depo_fill · CVD

1.31	104.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

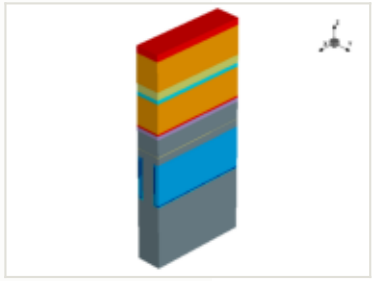

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

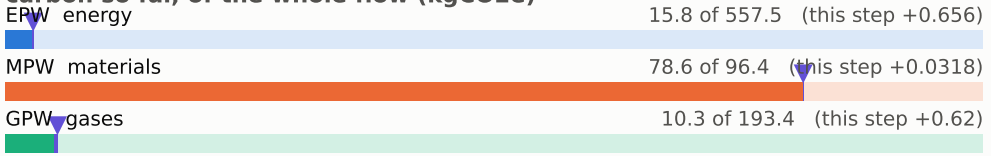

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

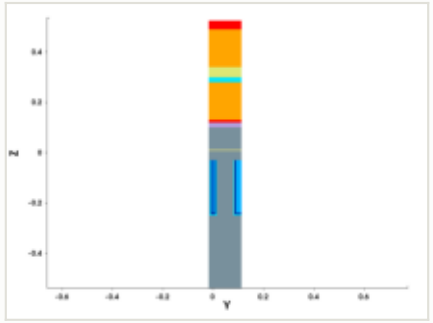

y cut at 0.049 µm

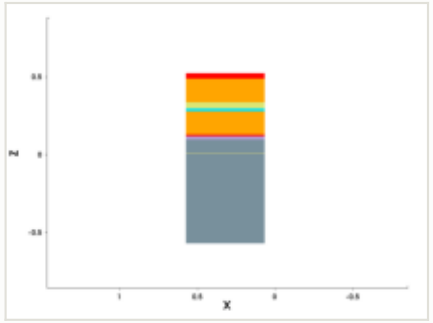

mask for this step

no mask for this step

steps by process area

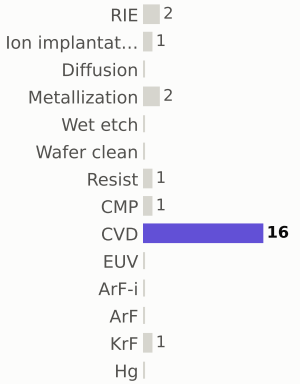

materials deposited (g)



gases emitted (g)

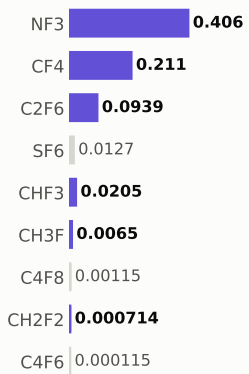

Step #320: KrF

litho_patterning · KrF

0.199	105.0	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

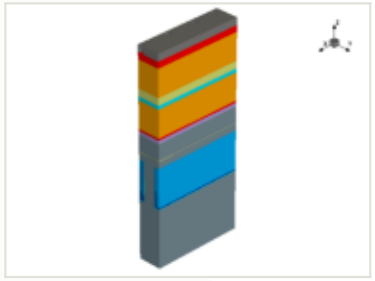

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

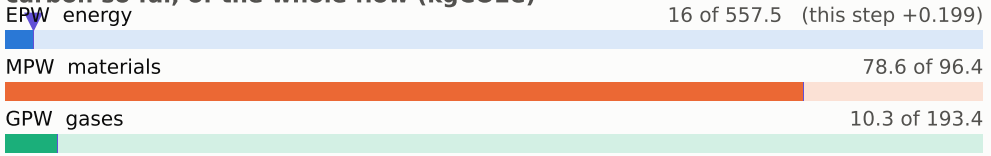

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

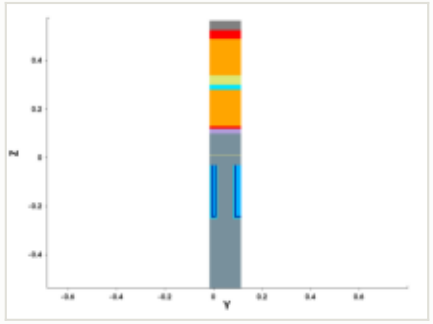

y cut at 0.049 µm

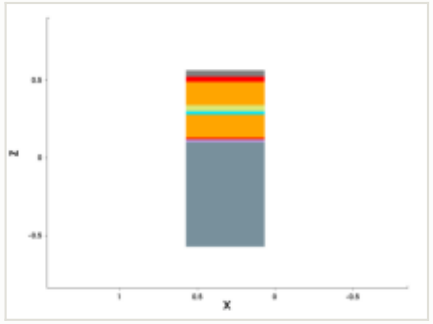

mask: layer 9:1 (GDSII)

steps by process area

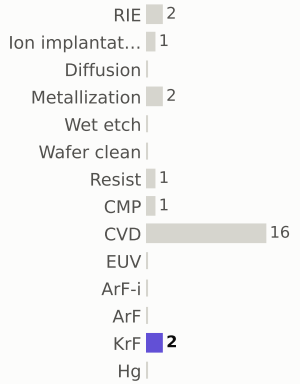

materials deposited (g)

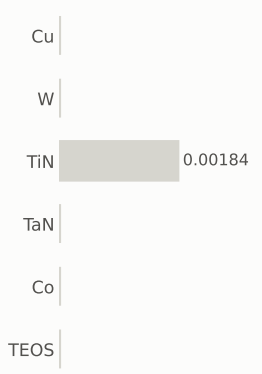

gases emitted (g)



Step #330: RIE

etch_anisotropic · RIE

1.04	106.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

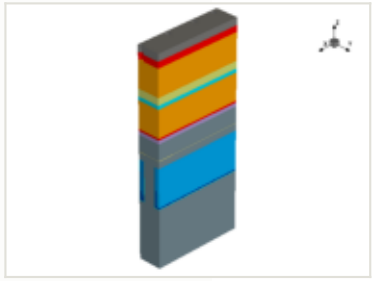

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

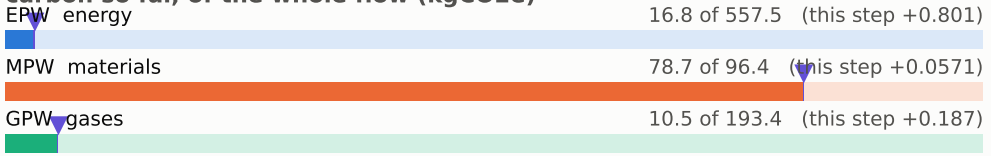

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

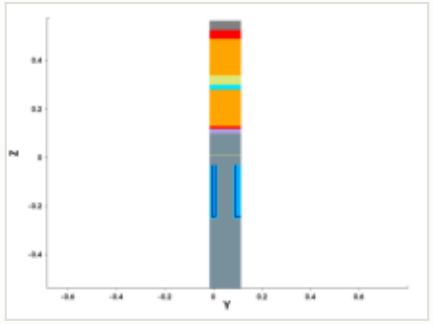

y cut at 0.049 µm

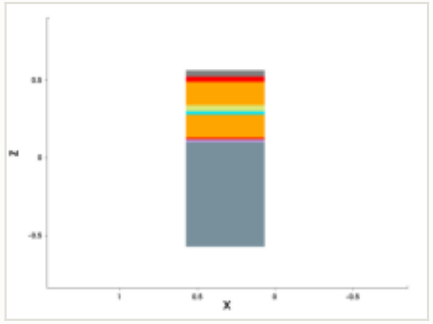

mask for this step

no mask for this step

steps by process area

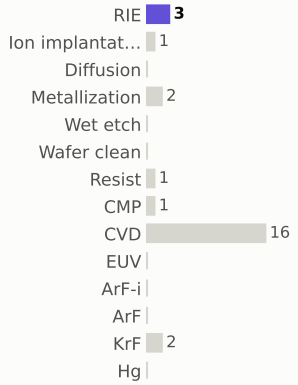

materials deposited (g)



gases emitted (g)

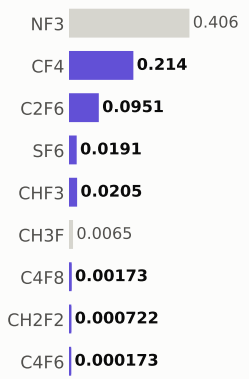

Step #340: RIE

etch_anisotropic · RIE

1.04	107.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

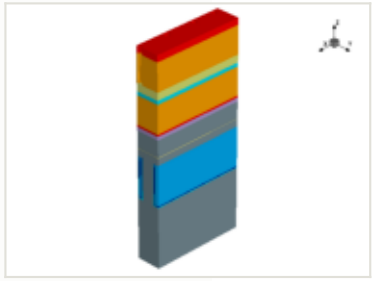

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

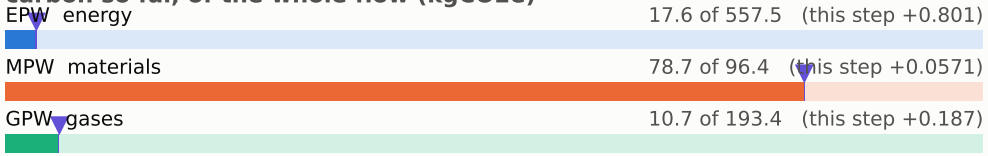

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

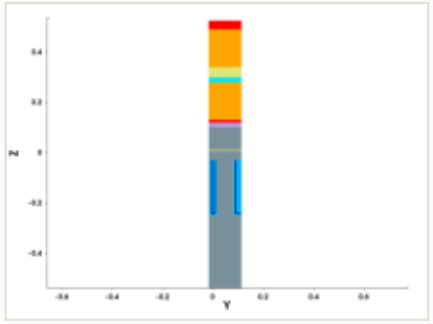

y cut at 0.049 µm

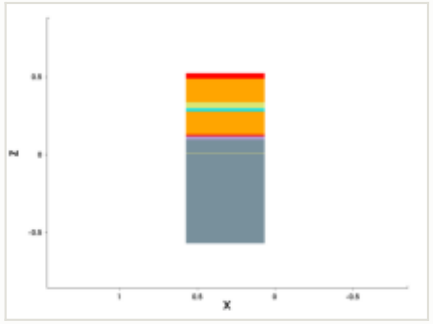

mask for this step

no mask for this step

steps by process area

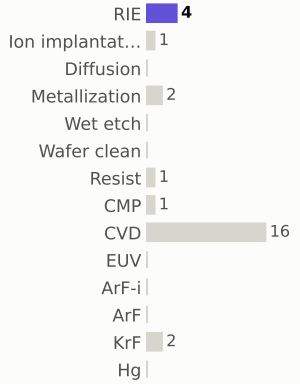

materials deposited (g)

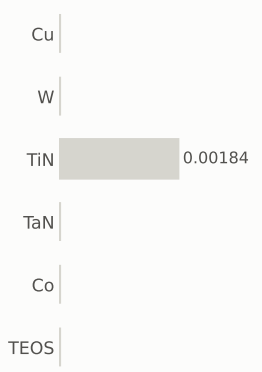

gases emitted (g)

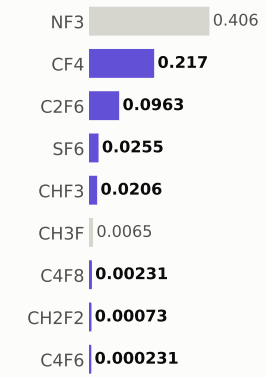

Step #350: RIE

etch_anisotropic · RIE

1.04	108.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

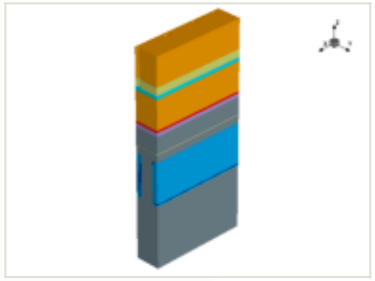

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

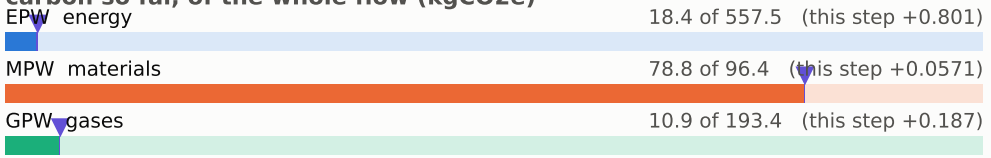

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

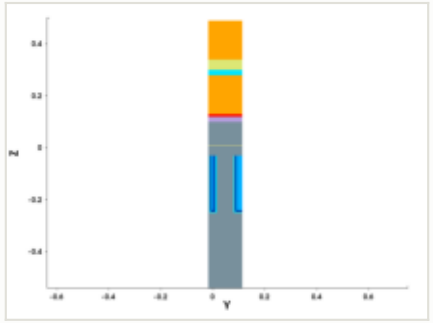

y cut at 0.049 µm

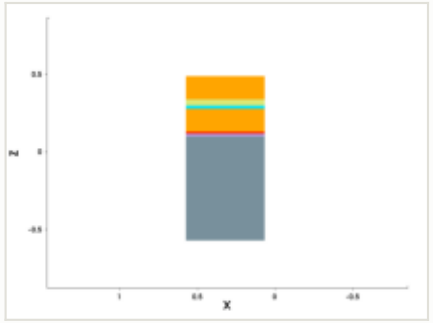

mask for this step

no mask for this step

steps by process area

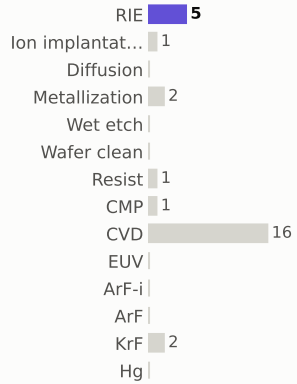

materials deposited (g)



gases emitted (g)

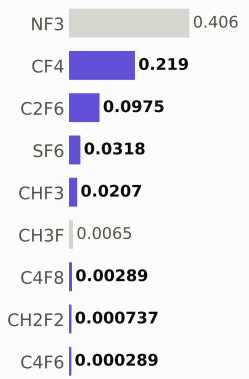

Step #360: Resist

etch_strip · Resist

0.169	108.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

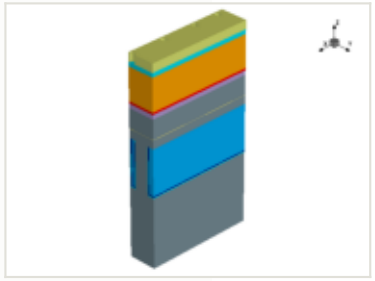

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

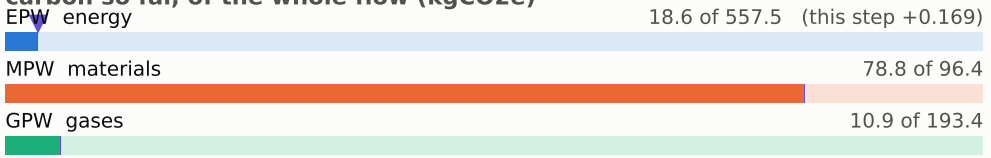

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

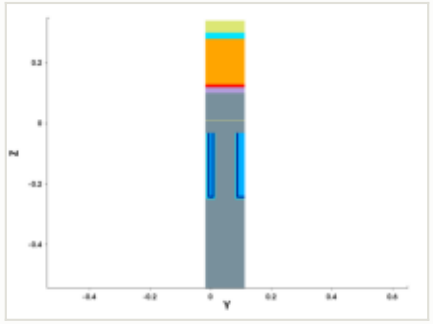

y cut at 0.049 µm

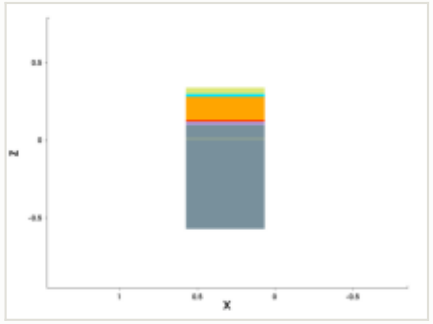

mask for this step

no mask for this step

steps by process area

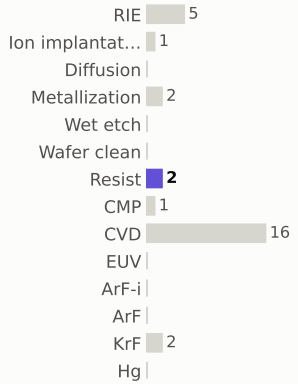

materials deposited (g)



gases emitted (g)

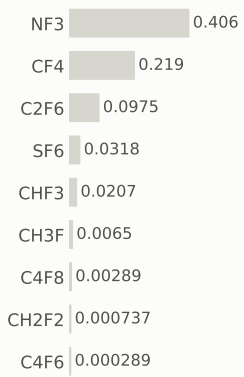

Step #370: RIE

etch_anisotropic · RIE

1.04	109.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

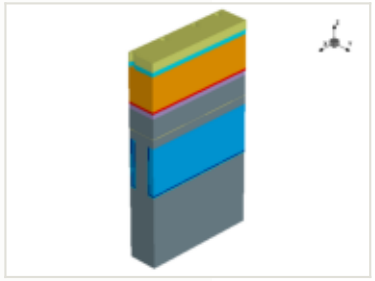

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

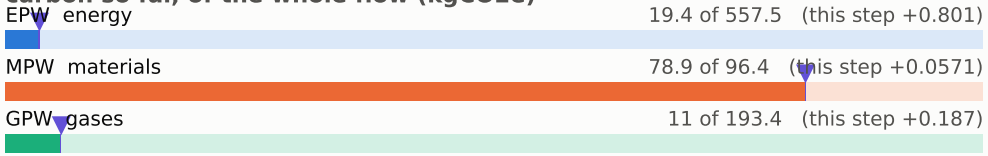

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

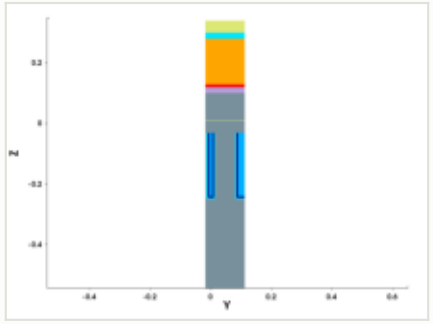

y cut at 0.049 µm

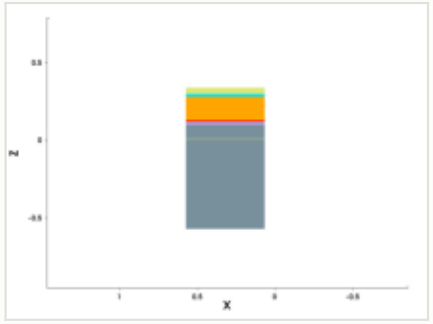

mask for this step

no mask for this step

steps by process area

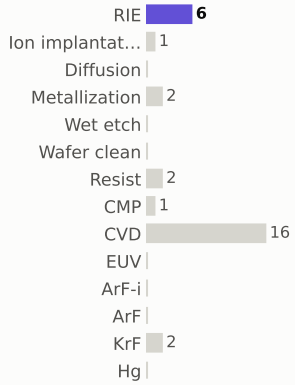

materials deposited (g)

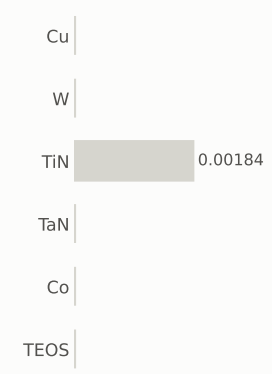

gases emitted (g)

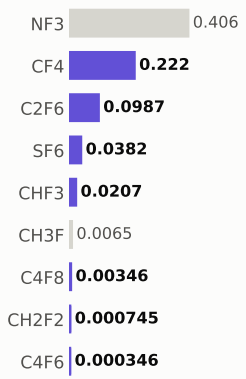

Step #380: RIE

etch_anisotropic · RIE

1.04	110.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

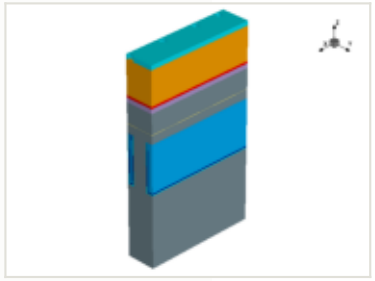

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

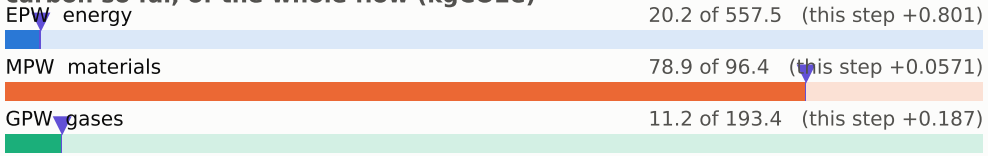

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

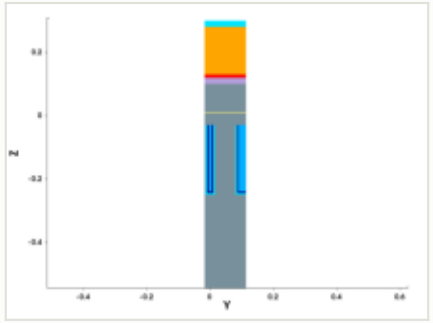

y cut at 0.049 µm

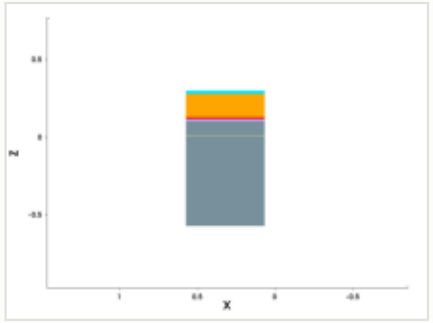

mask for this step

no mask for this step

steps by process area

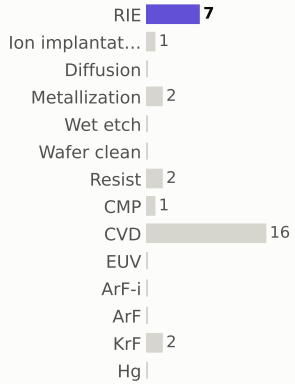

materials deposited (g)

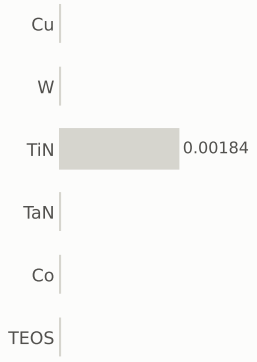

gases emitted (g)

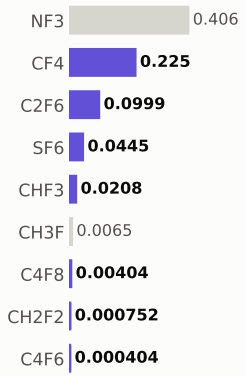

Step #390: RIE

etch_anisotropic · RIE

1.04	111.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

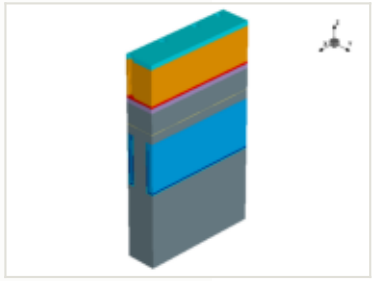

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

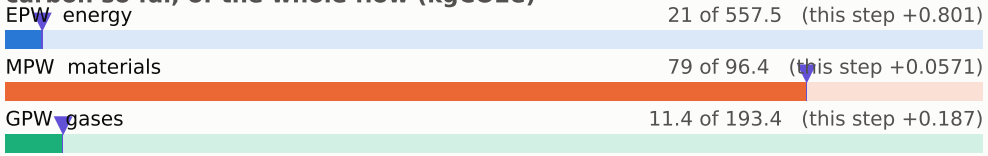

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

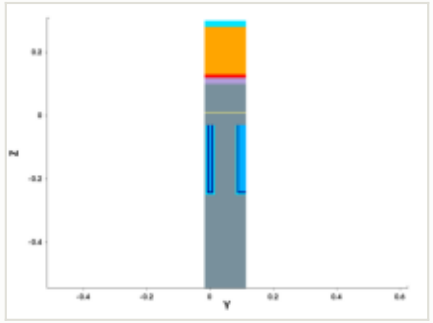

y cut at 0.049 µm

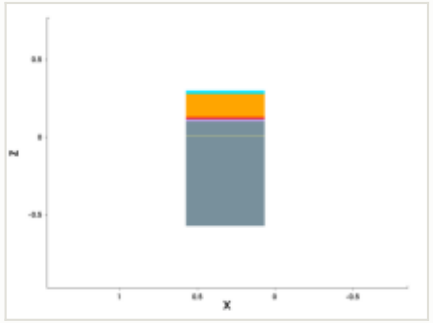

mask for this step

no mask for this step

steps by process area

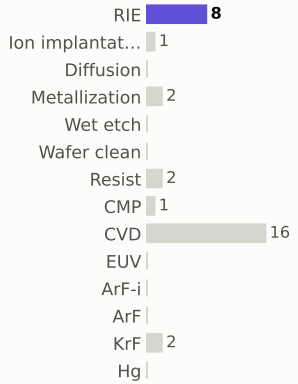

materials deposited (g)

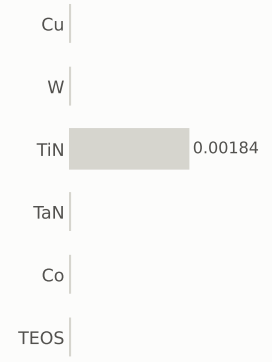

gases emitted (g)



Step #400: RIE

etch_anisotropic · RIE

1.04	112.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

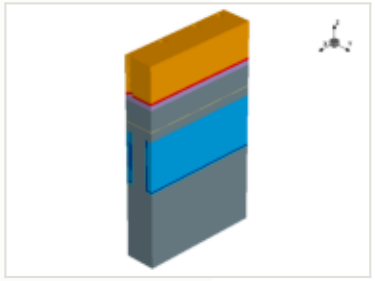

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

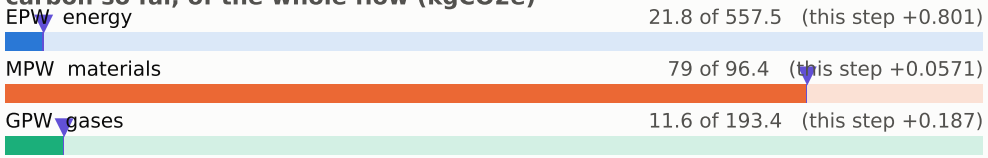

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

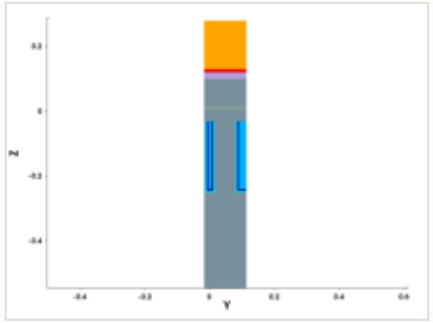

y cut at 0.049 µm

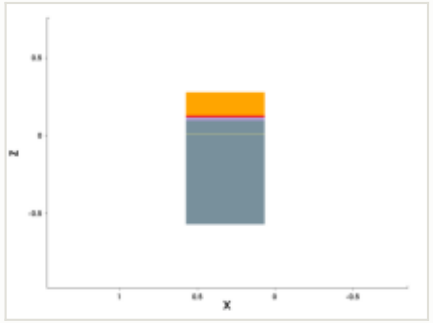

mask for this step

no mask for this step

steps by process area



materials deposited (g)

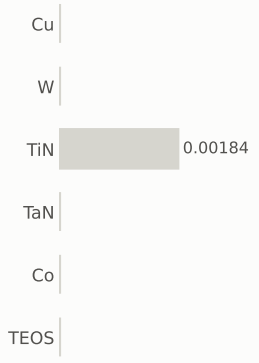

gases emitted (g)

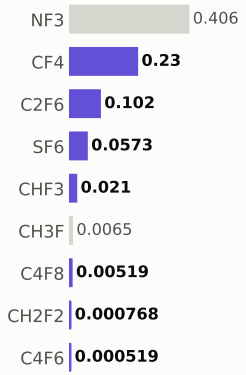

Step #410: RIE

etch_anisotropic · RIE

1.04	113.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

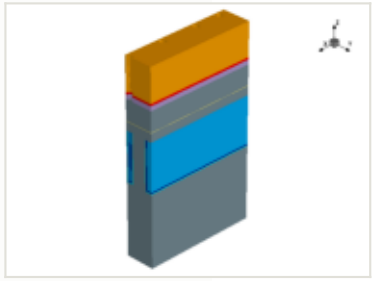

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

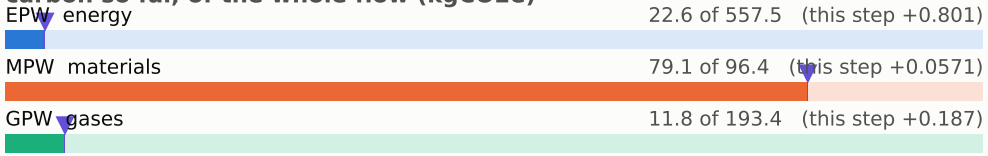

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

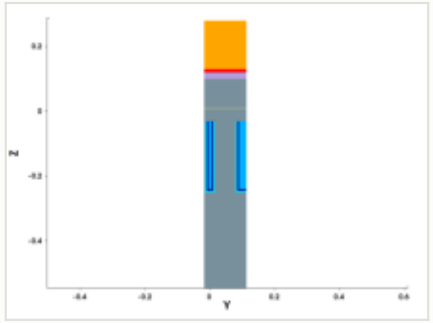

y cut at 0.049 µm

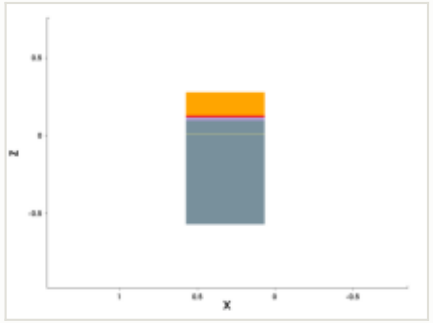

mask for this step

no mask for this step

steps by process area

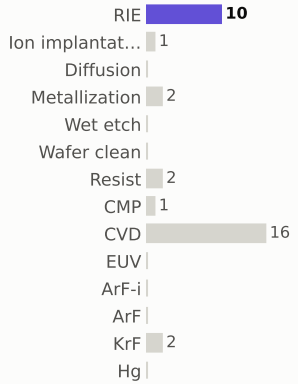

materials deposited (g)

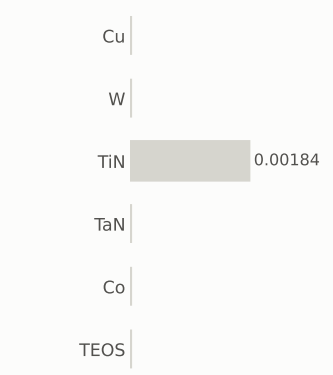

gases emitted (g)

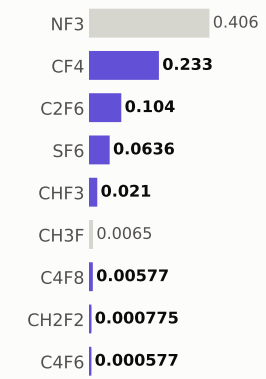

Step #420: Resist

etch_strip · Resist

0.169	113.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

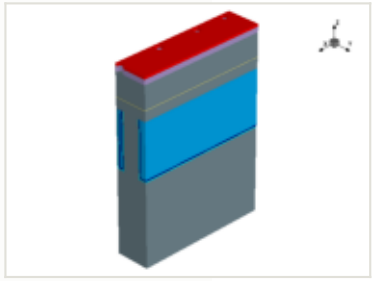

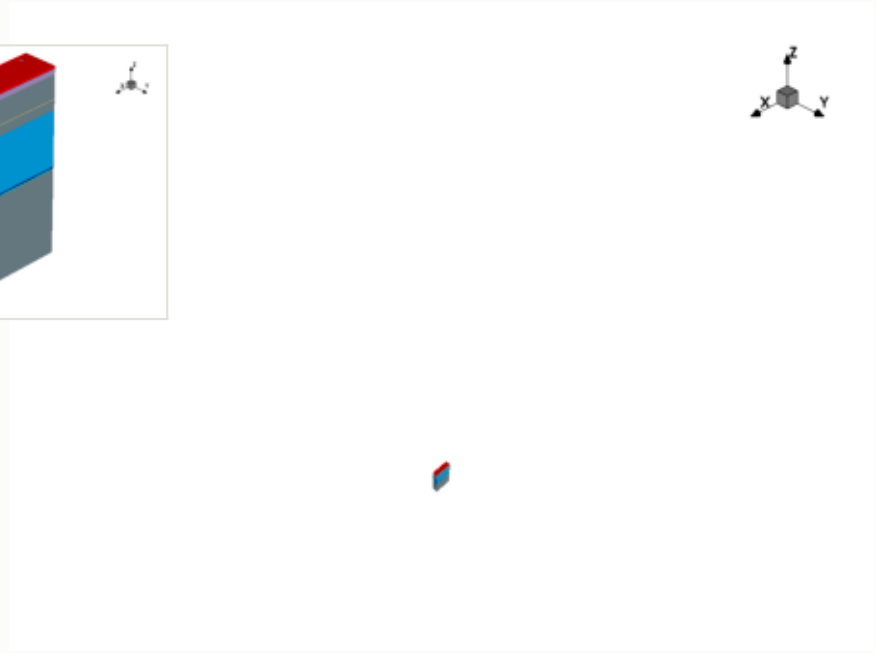

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

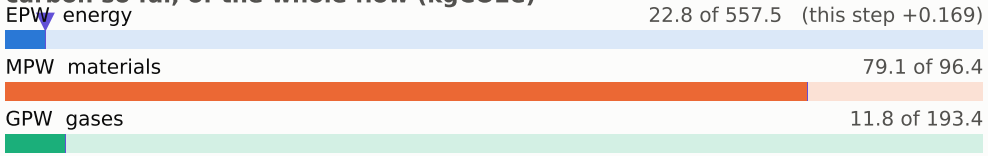

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

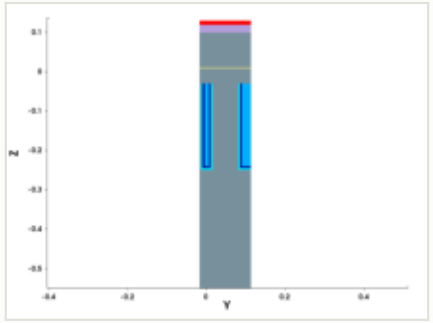

y cut at 0.049 µm

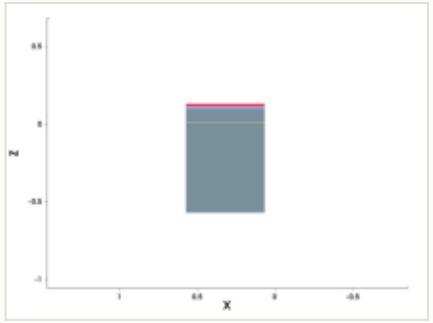

mask for this step

no mask for this step

steps by process area

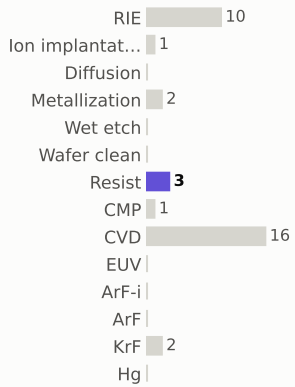

materials deposited (g)

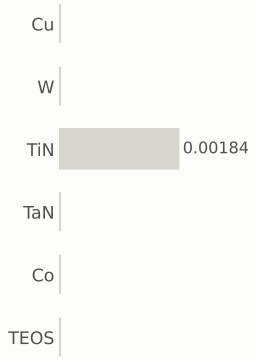

gases emitted (g)

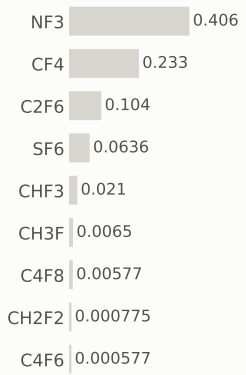

Step #430: RIE

etch_anisotropic · RIE

1.04	114.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

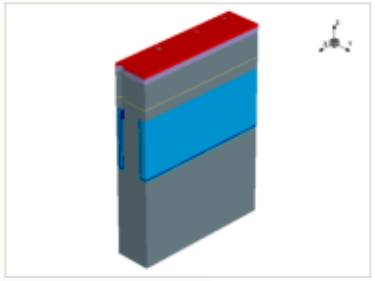

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

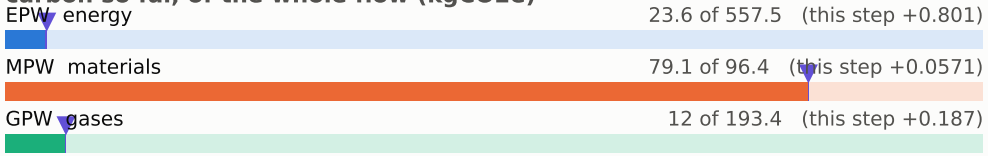

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

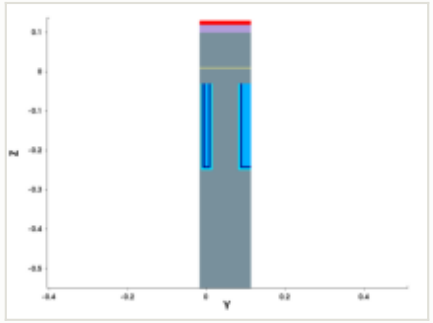

y cut at 0.049 µm

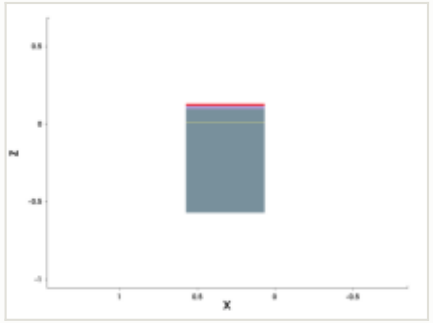

mask for this step

no mask for this step

steps by process area

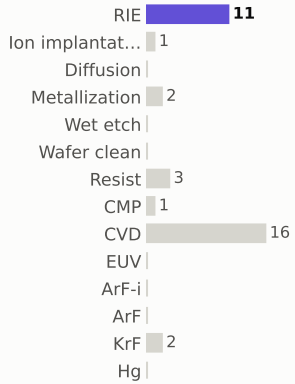

materials deposited (g)

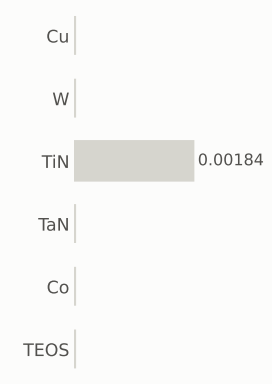

gases emitted (g)

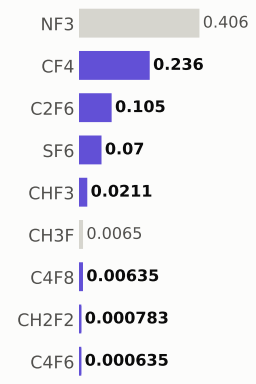

Step #440: Metallization

depo_isotropic · Metallization

1.23	115.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

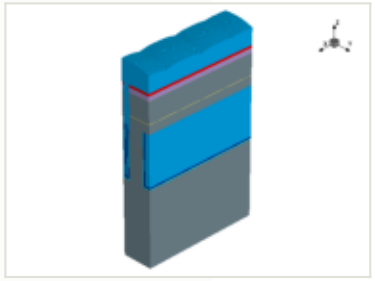

this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

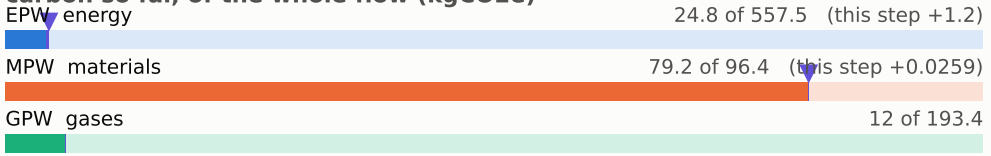

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

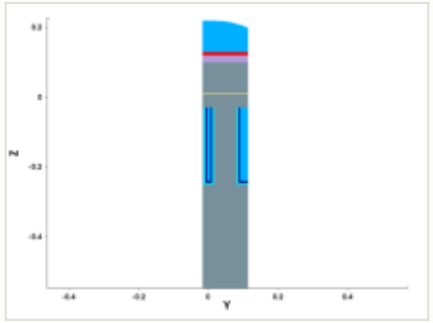

y cut at 0.049 µm

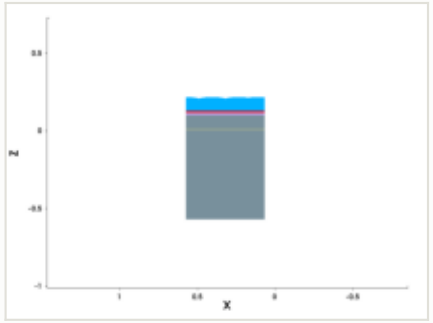

mask for this step

no mask for this step

steps by process area

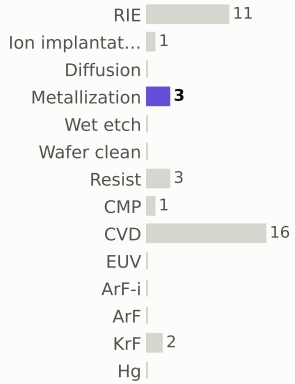

materials deposited (g)

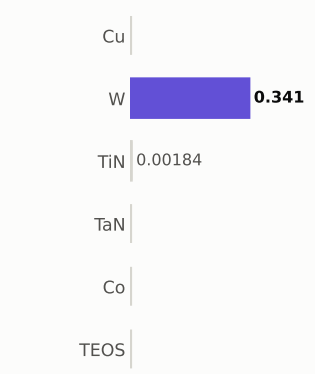

gases emitted (g)

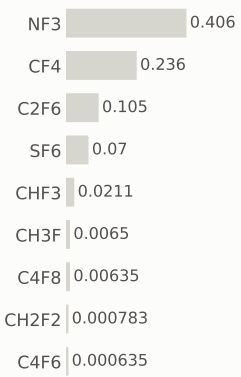

Step #450: CMP

etch_cmp · CMP

0.169	116.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

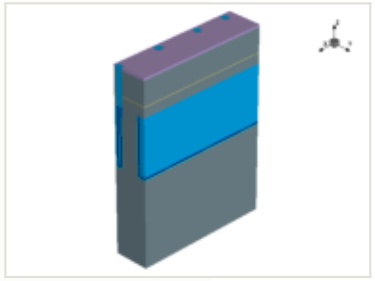

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

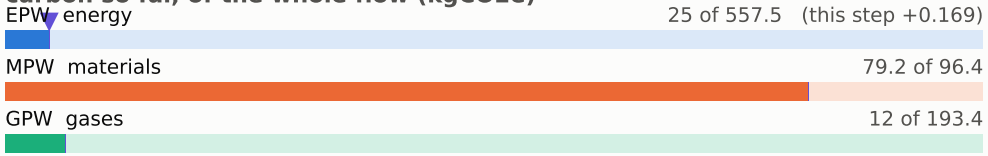

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

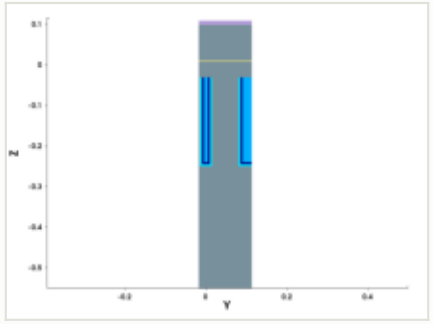

y cut at 0.049 µm

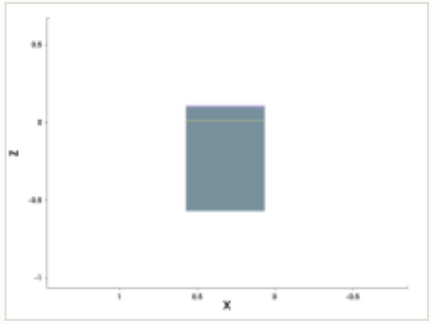

mask for this step

no mask for this step

steps by process area

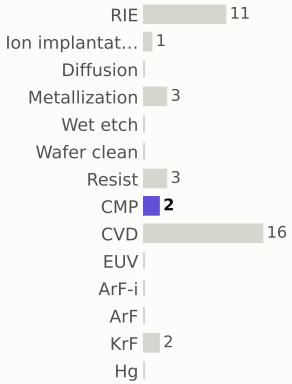

materials deposited (g)

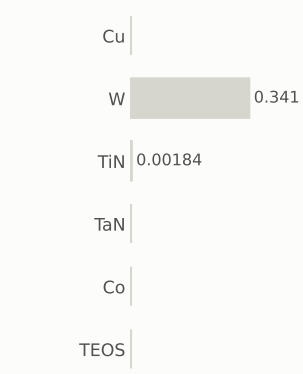

gases emitted (g)

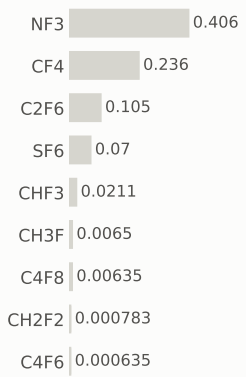

Step #460: CVD

depo_fill · CVD

1.31	117.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

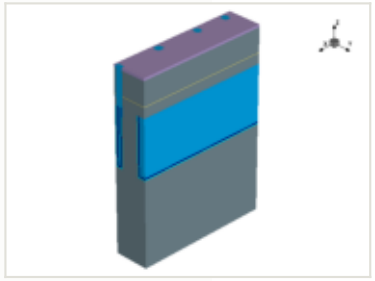

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

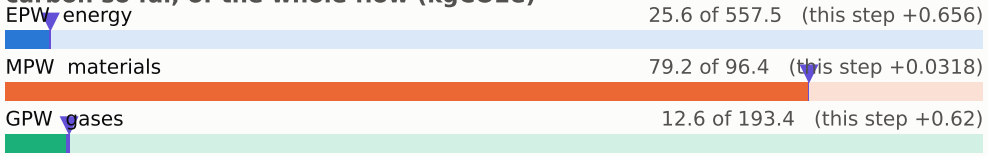

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

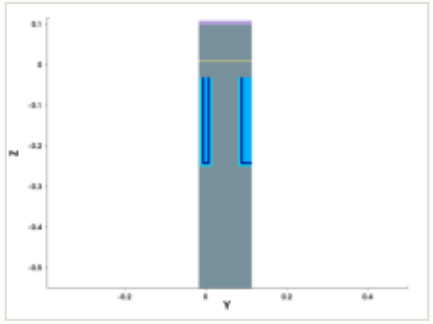

y cut at 0.049 µm

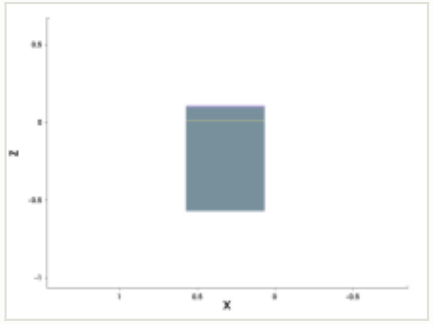

mask for this step

no mask for this step

steps by process area

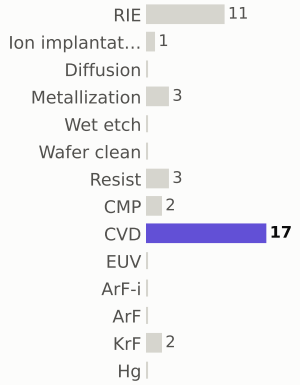

materials deposited (g)

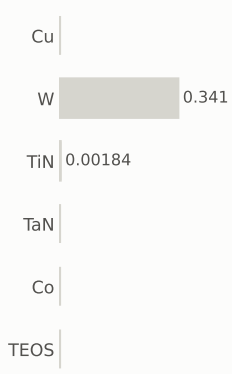

gases emitted (g)

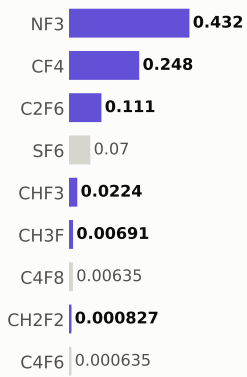

Step #480: CVD

depo_epi · CVD

1.31	118.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

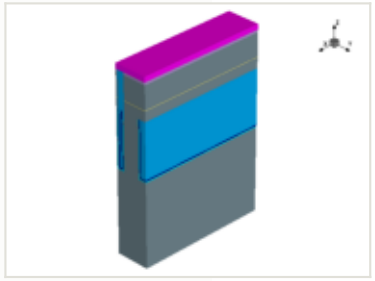

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

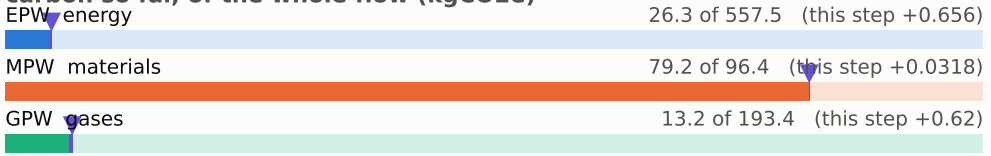

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

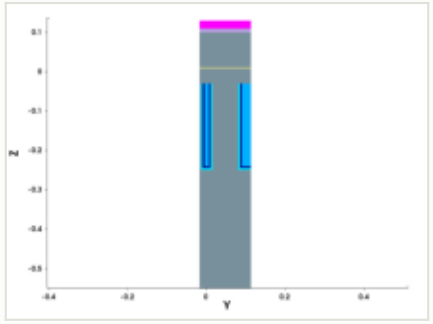

y cut at 0.049 µm

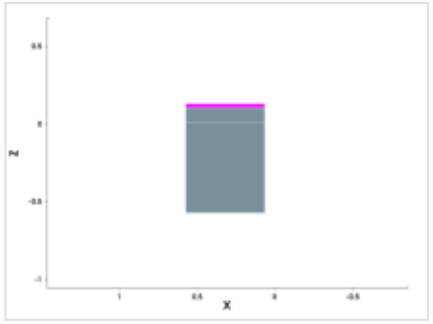

mask for this step

no mask for this step

steps by process area

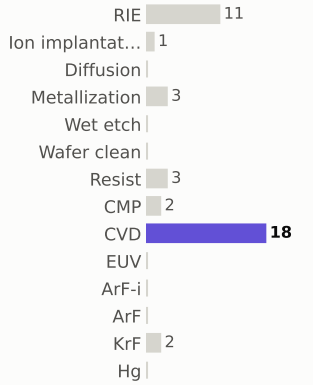

materials deposited (g)

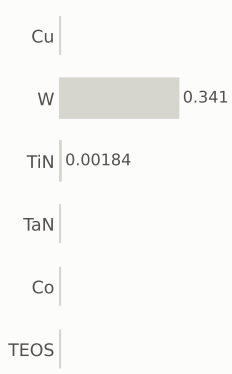

gases emitted (g)

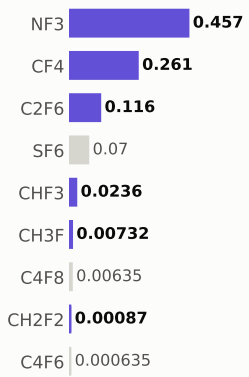

Step #490: CVD

depo_epi · CVD

1.31	120.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

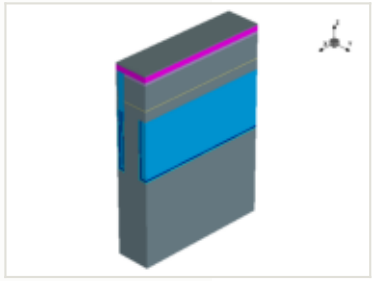

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

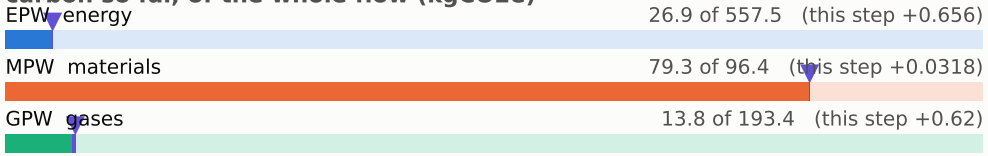

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

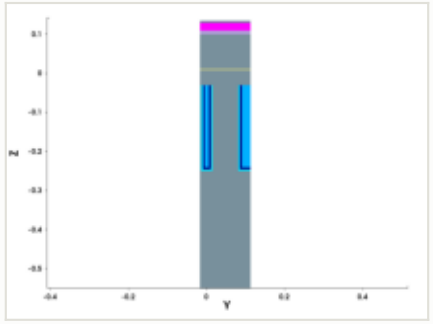

y cut at 0.049 µm

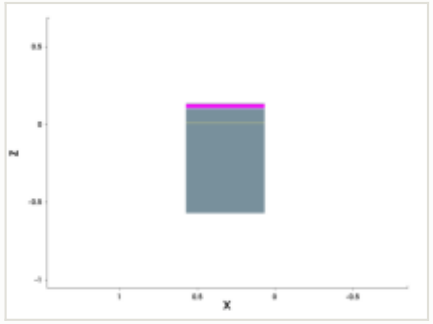

mask for this step

no mask for this step

steps by process area



materials deposited (g)

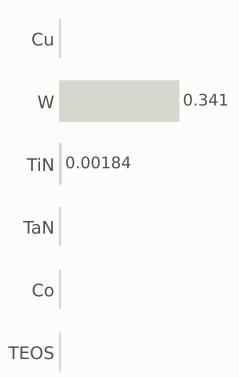

gases emitted (g)

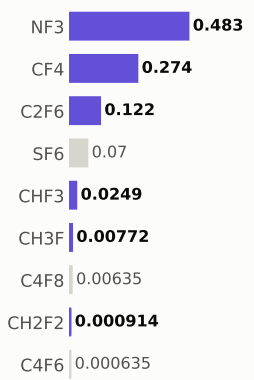

Step #500: CVD

depo_epi · CVD

1.31	121.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

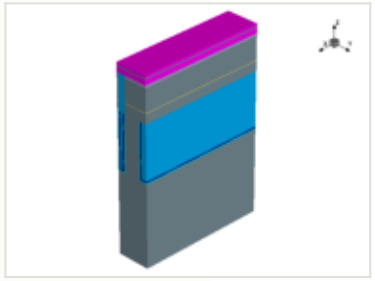

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

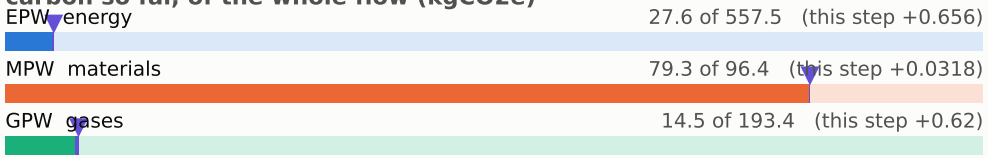

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

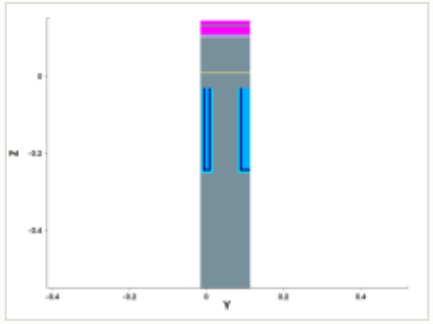

y cut at 0.049 µm

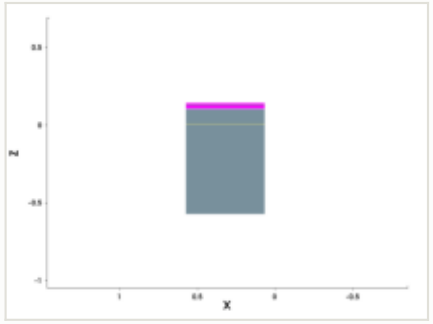

mask for this step

no mask for this step

steps by process area

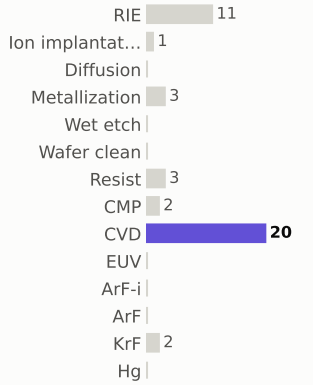

materials deposited (g)

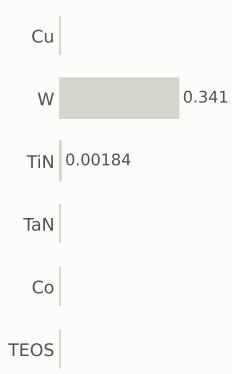

gases emitted (g)

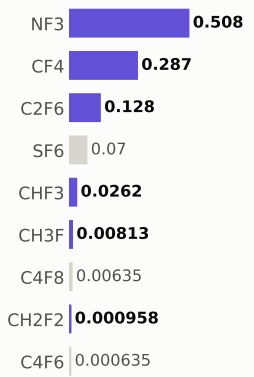

Step #510: CVD

depo_epi · CVD

1.31	122.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

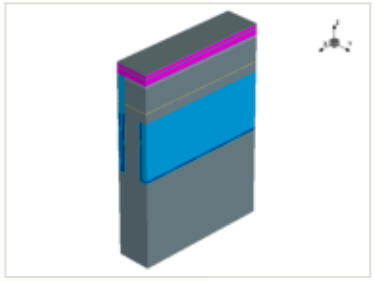

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

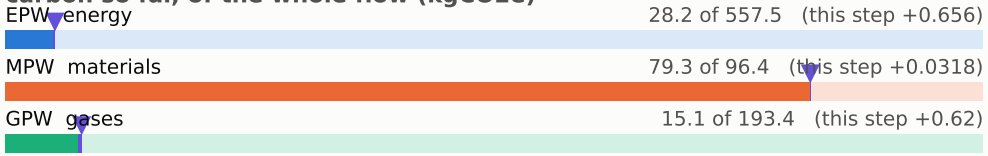

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

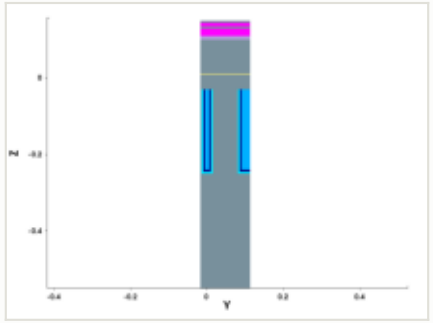

y cut at 0.049 µm

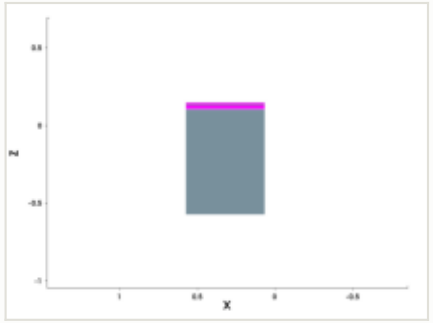

mask for this step

no mask for this step

steps by process area

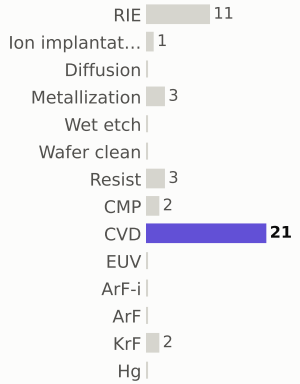

materials deposited (g)

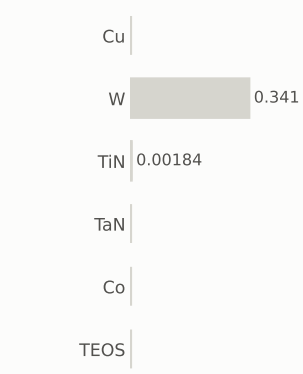

gases emitted (g)

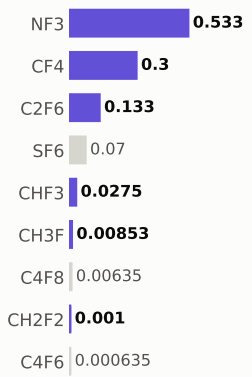

Step #520: CVD

depo_epi · CVD

1.31	124.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

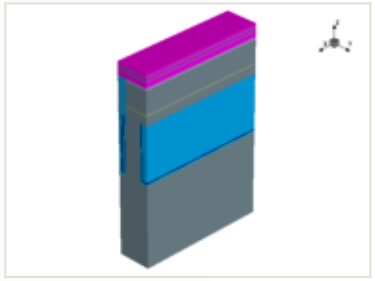

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

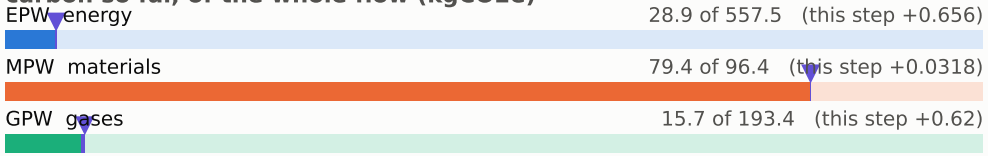

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

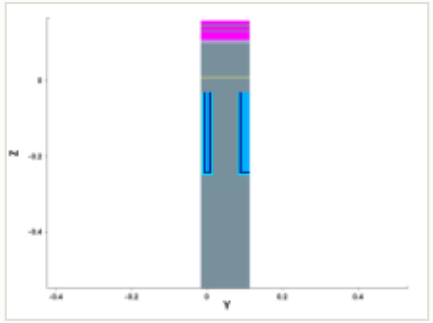

y cut at 0.049 µm

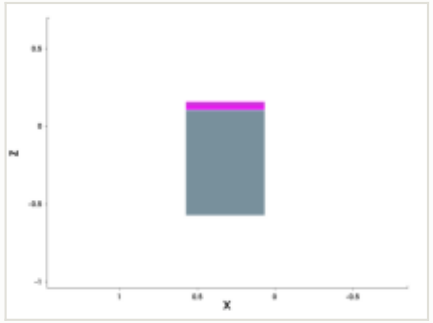

mask for this step

no mask for this step

steps by process area

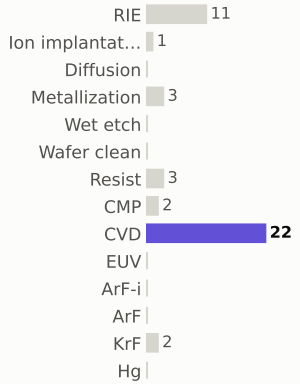

materials deposited (g)

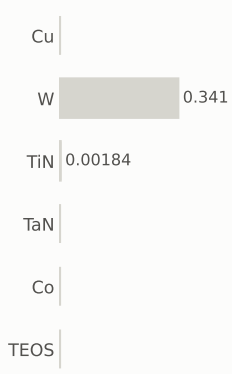

gases emitted (g)

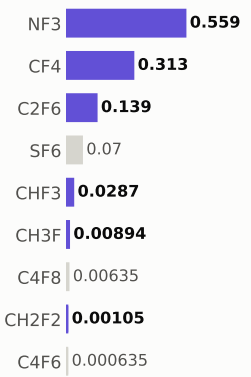

Step #530: CVD

depo_epi · CVD

1.31	125.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

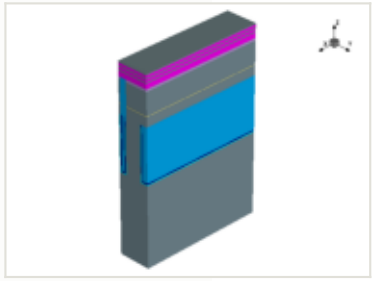

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

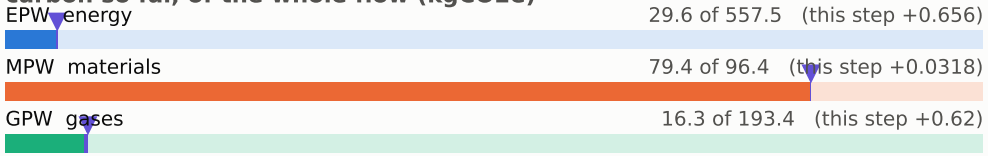

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

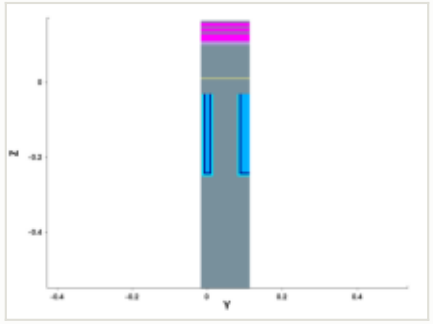

y cut at 0.049 µm

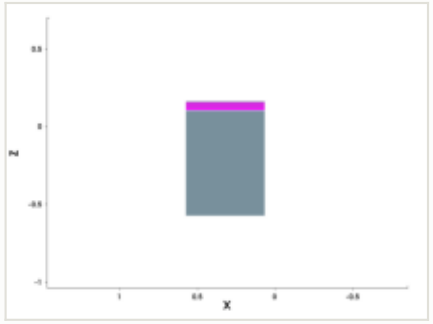

mask for this step

no mask for this step

steps by process area

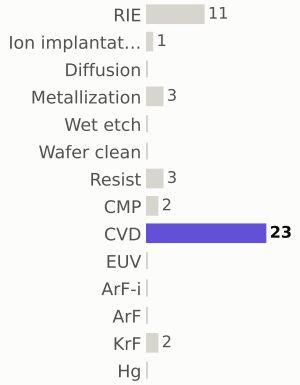

materials deposited (g)

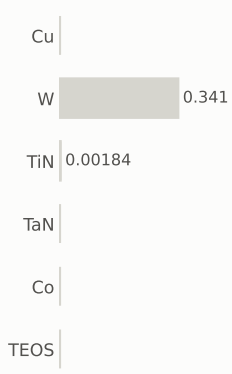

gases emitted (g)

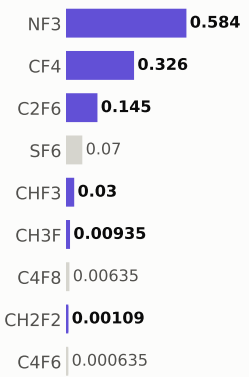

Step #540: CVD

depo_epi · CVD

1.31	126.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

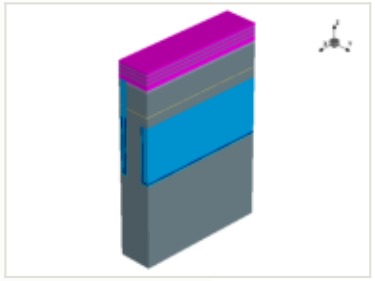

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

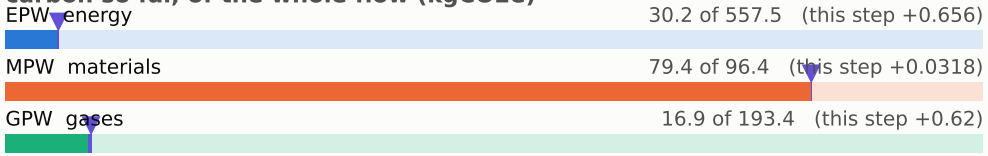

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

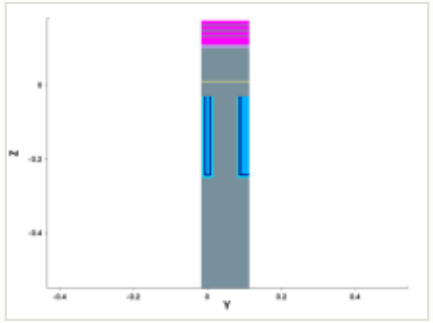

y cut at 0.049 µm

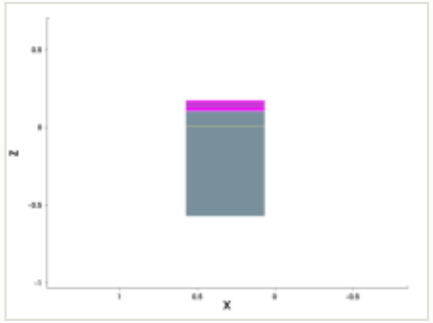

mask for this step

no mask for this step

steps by process area

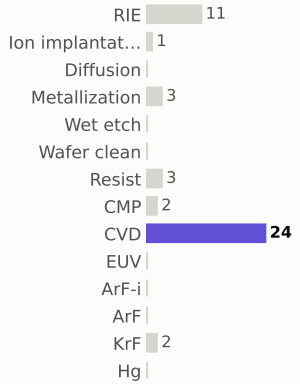

materials deposited (g)

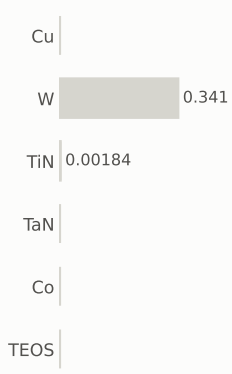

gases emitted (g)

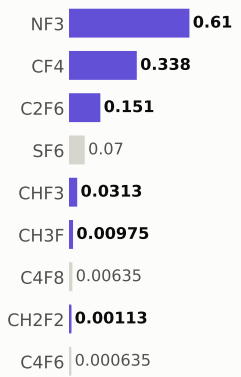

Step #560: CVD

depo_height_dependent · CVD

1.31	127.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

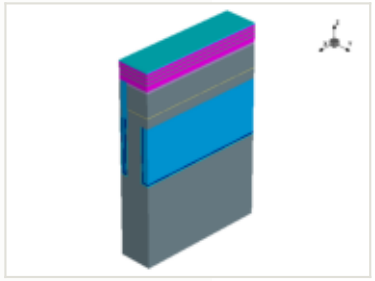

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

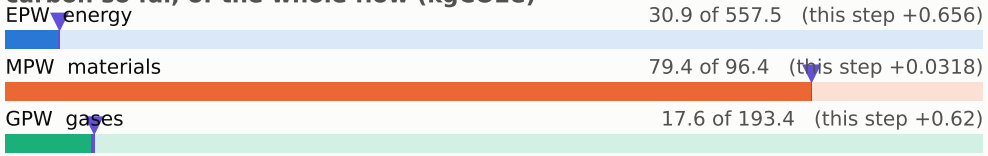

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

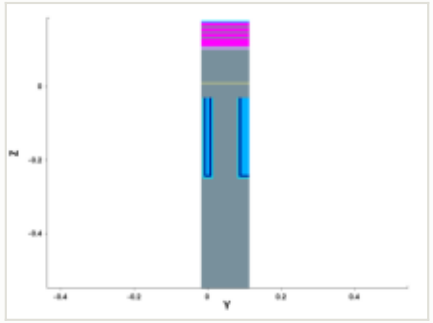

y cut at 0.049 µm

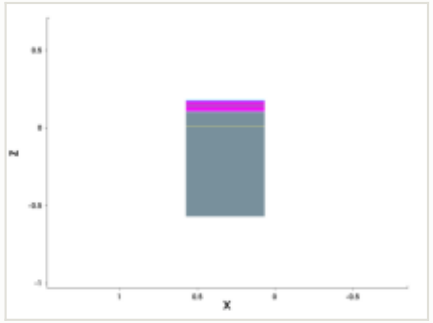

mask for this step

no mask for this step

steps by process area

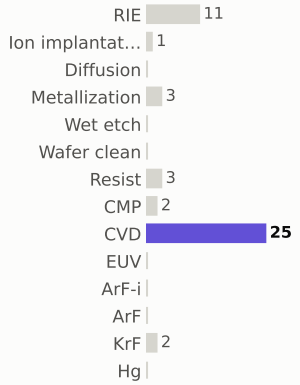

materials deposited (g)

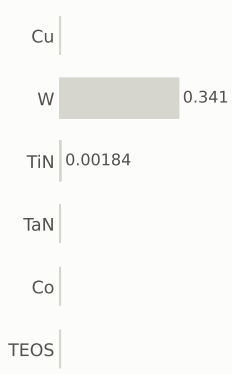

gases emitted (g)

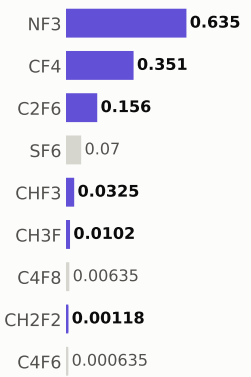

Step #570: CVD

depo_height_dependent · CVD

1.31	129.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

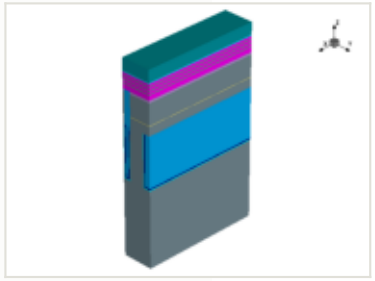

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

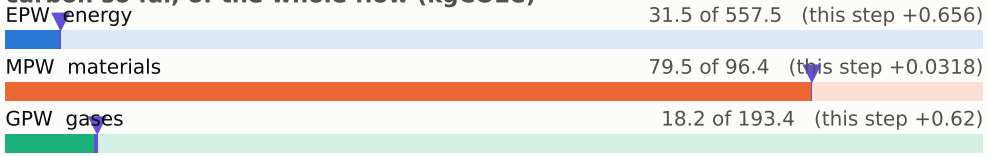

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

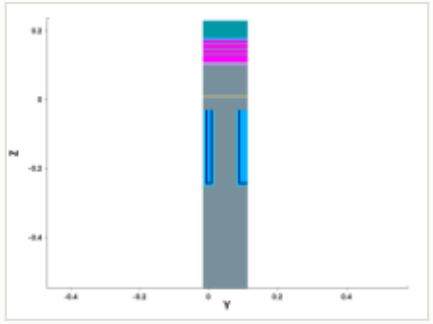

y cut at 0.049 µm

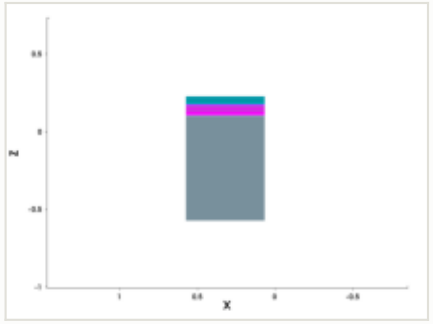

mask for this step

no mask for this step

steps by process area

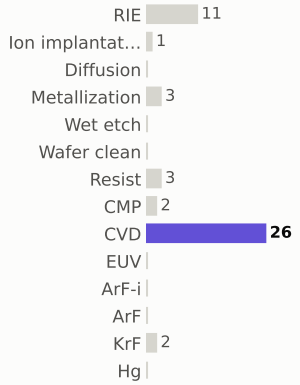

materials deposited (g)

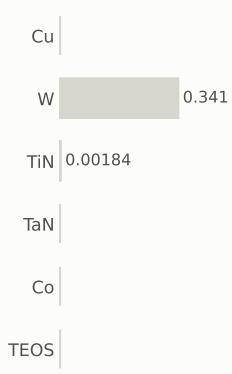

gases emitted (g)

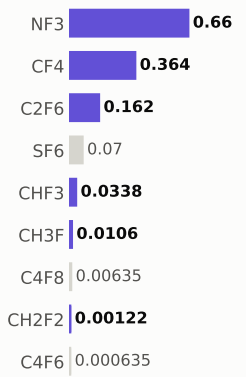

Step #580: CVD

depo_height_dependent · CVD

1.31	130.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

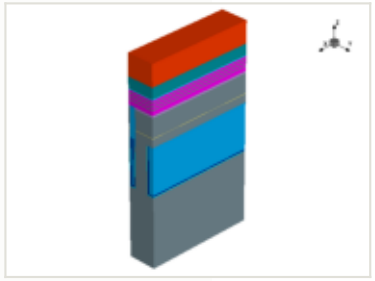

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

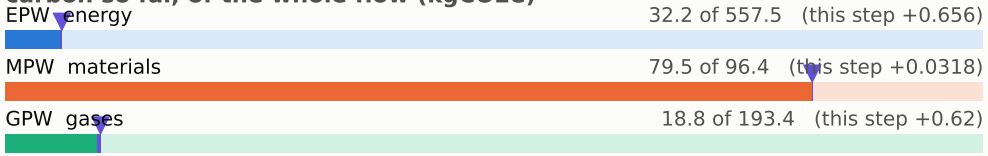

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

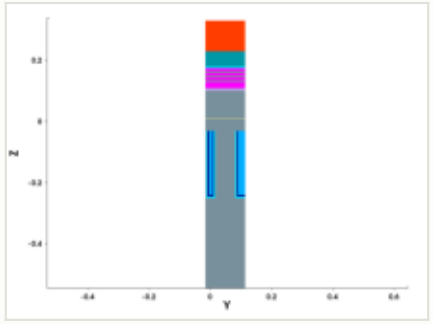

y cut at 0.049 µm

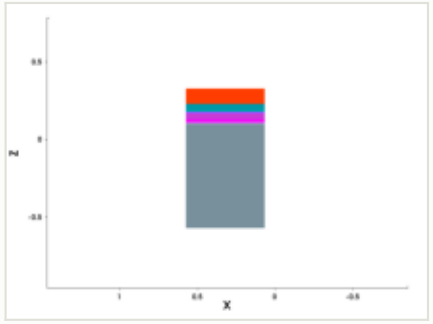

mask for this step

no mask for this step

steps by process area

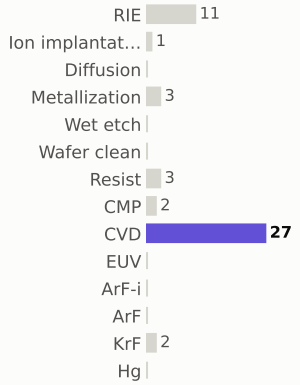

materials deposited (g)

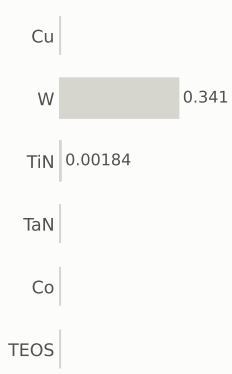

gases emitted (g)

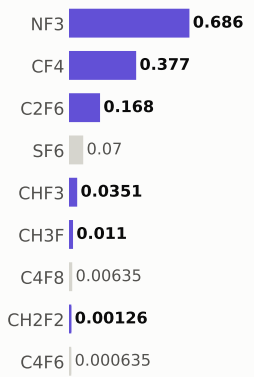

Step #590: CVD

depo_height_dependent · CVD

1.31	131.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

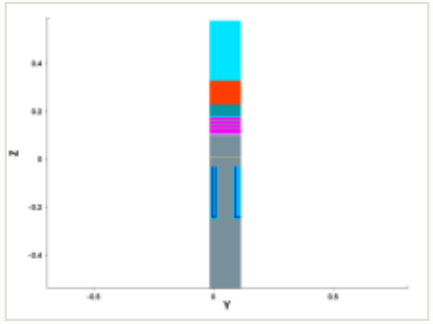

y cut at 0.049 µm

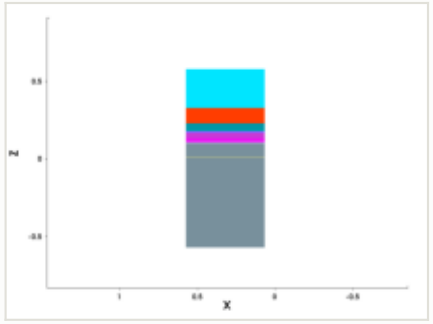

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

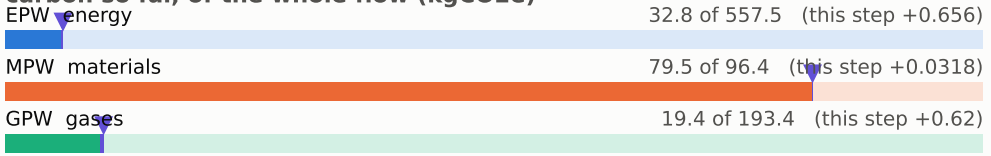

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

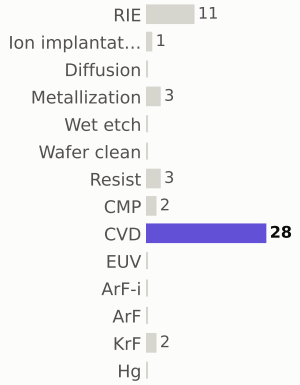

materials deposited (g)

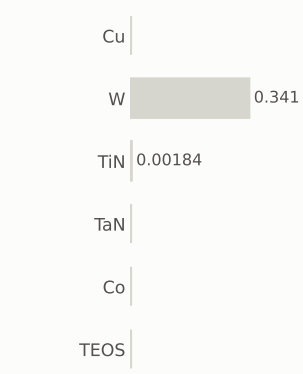

gases emitted (g)

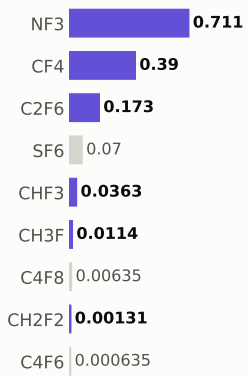

Step #600: CVD

depo_height_dependent · CVD

1.31	133.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

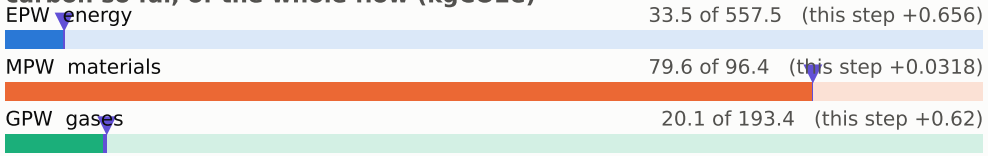

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

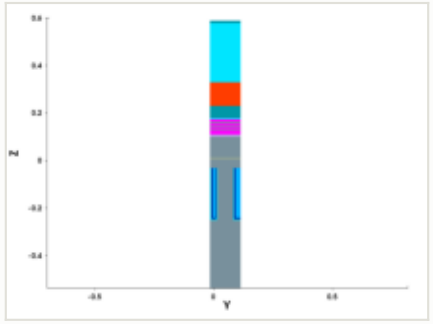

y cut at 0.049 µm

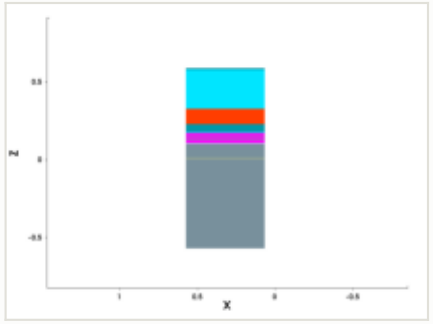

mask for this step

no mask for this step

steps by process area

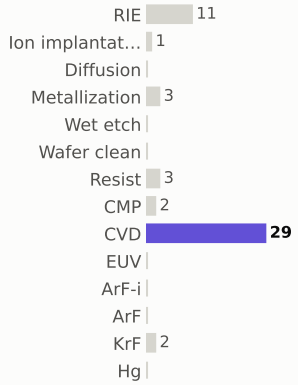

materials deposited (g)

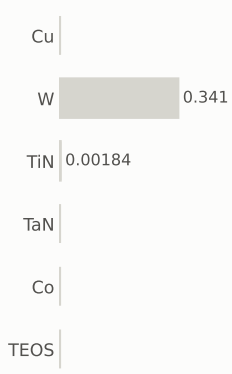

gases emitted (g)

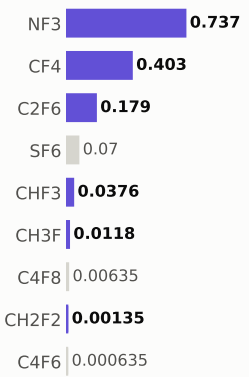

Step #610: EUV

litho_patterning · EUV

1.96	135.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

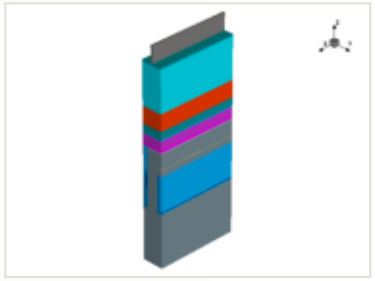

x cut at 0.385 µm

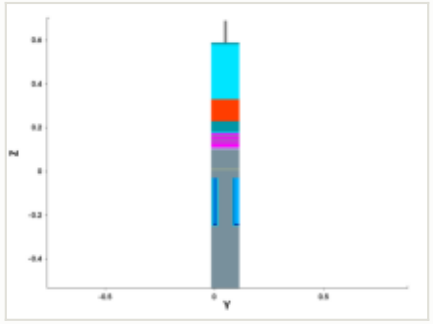

y cut at 0.049 µm

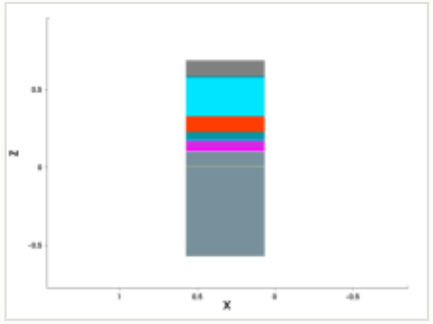

mask: layer 2:0, positive (GDSII)

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

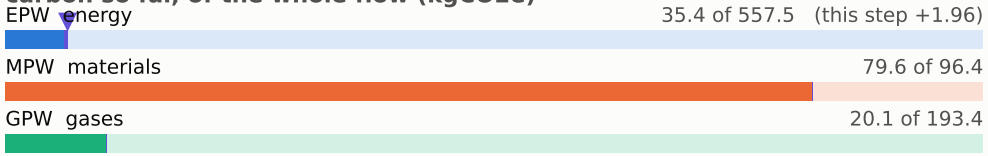

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

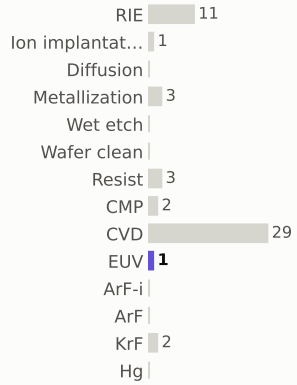

materials deposited (g)



gases emitted (g)

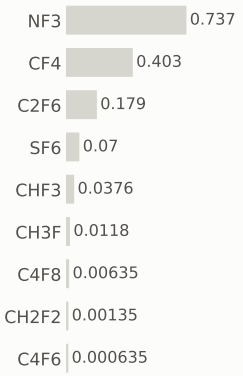

Step #620: RIE

etch_anisotropic · RIE

1.04	136.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

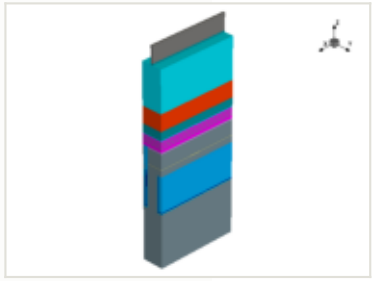

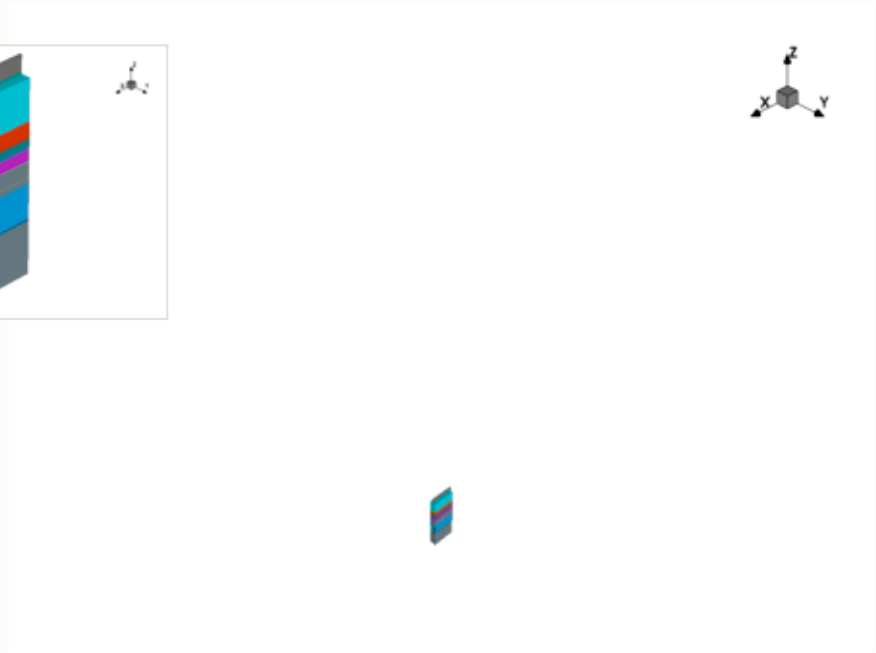

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

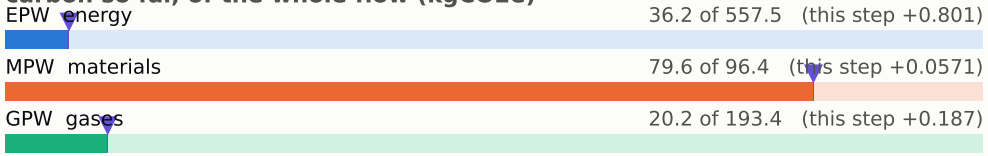

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

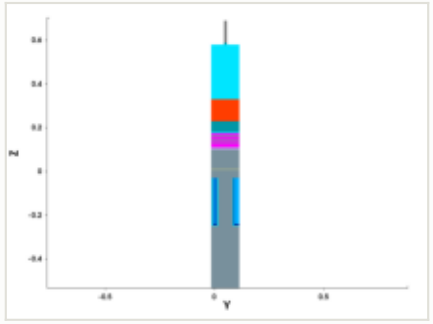

y cut at 0.049 µm

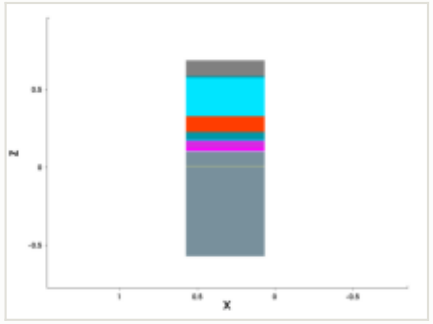

mask for this step

no mask for this step

steps by process area

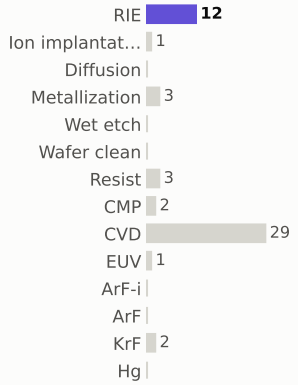

materials deposited (g)

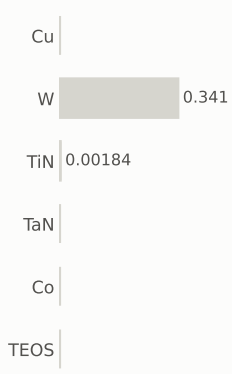

gases emitted (g)

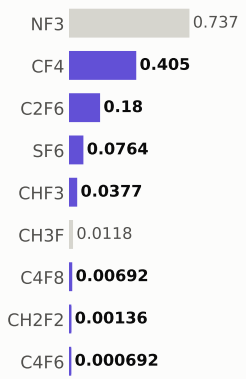

Step #630: RIE

etch_anisotropic · RIE

1.04	137.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

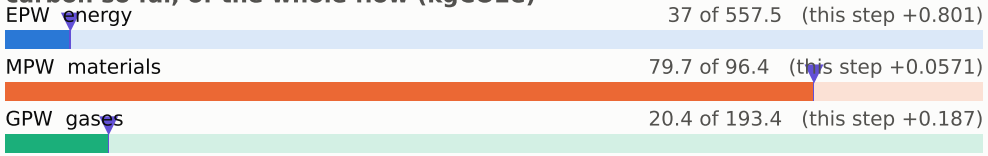

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

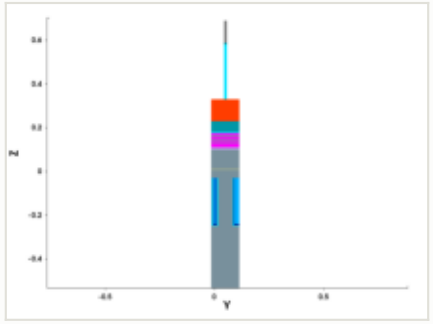

y cut at 0.049 µm

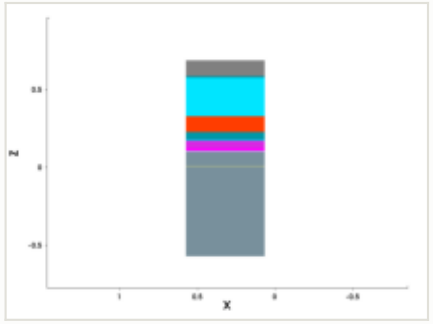

mask for this step

no mask for this step

steps by process area

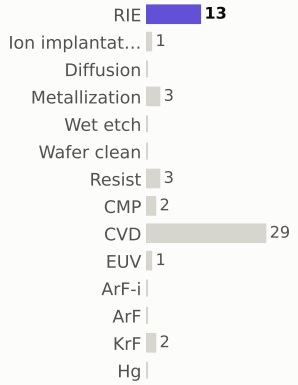

materials deposited (g)

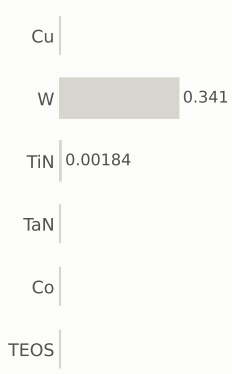

gases emitted (g)

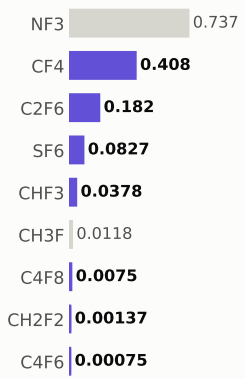

Step #640: RIE

etch_anisotropic · RIE

1.04	138.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

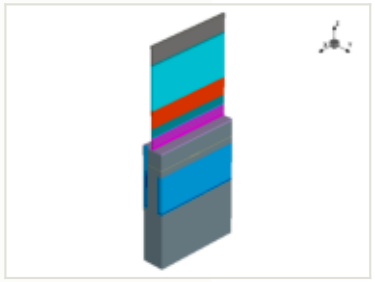

x cut at 0.385 µm

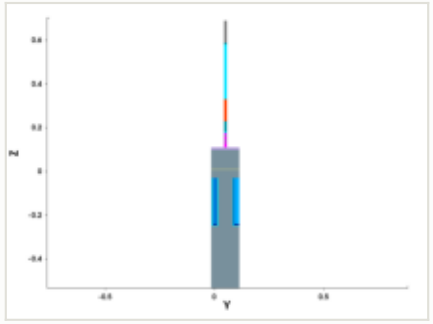

y cut at 0.049 µm

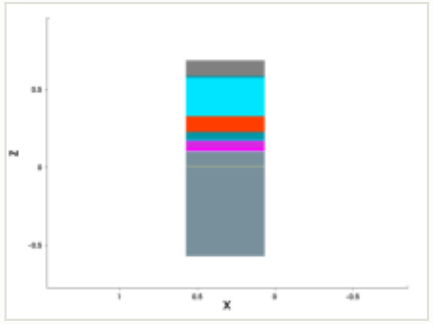

mask for this step

no mask for this step

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

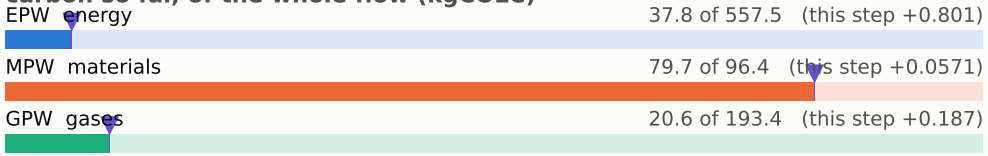

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

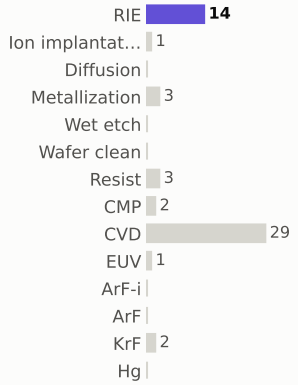

materials deposited (g)

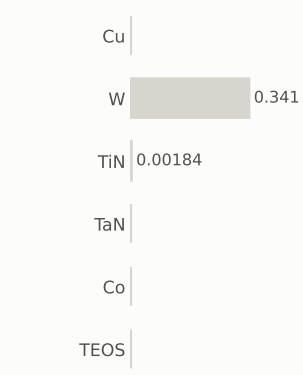

gases emitted (g)

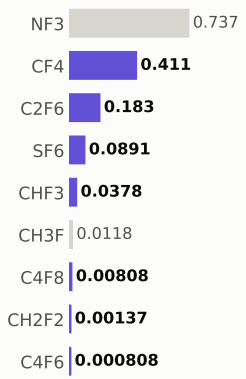

Step #650: RIE

etch_anisotropic · RIE

1.04	139.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

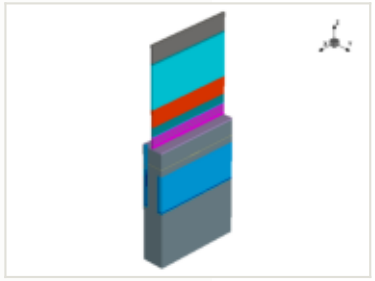

x cut at 0.385 µm

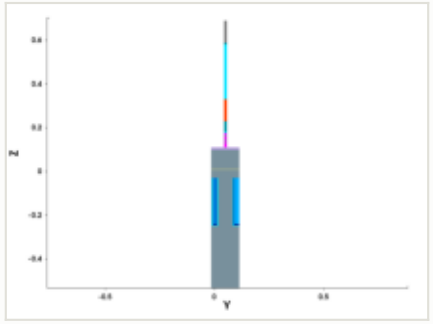

y cut at 0.049 µm

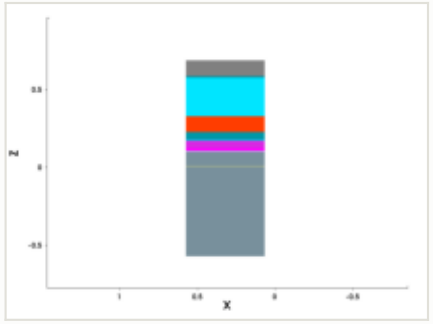

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

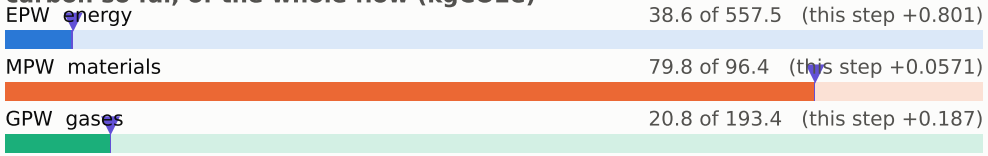

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

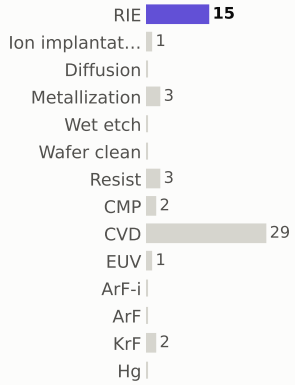

materials deposited (g)

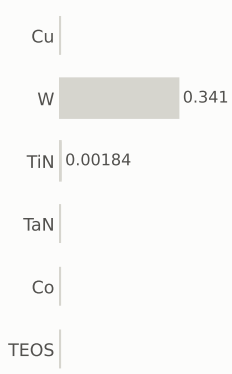

gases emitted (g)

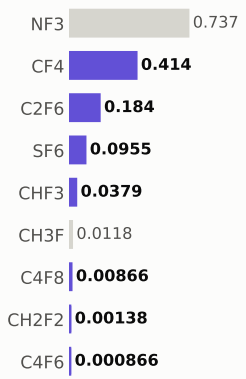

Step #660: Resist

etch_strip · Resist

0.169	139.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

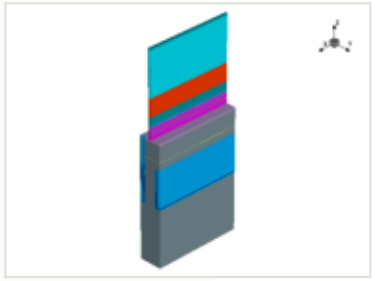

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

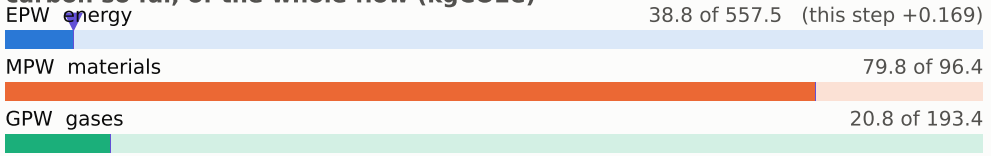

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

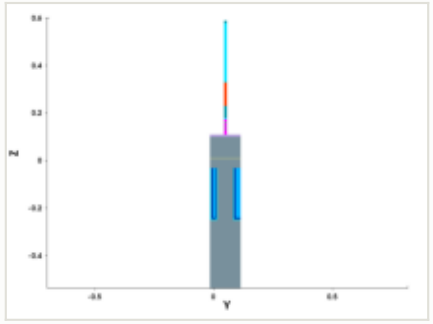

y cut at 0.049 µm

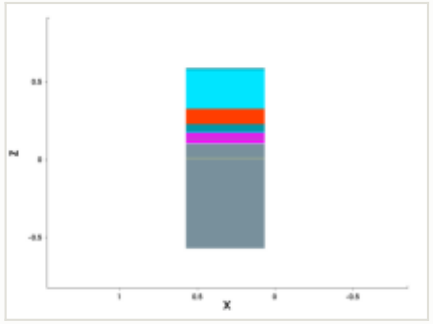

mask for this step

no mask for this step

steps by process area

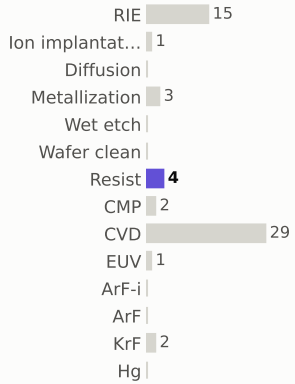

materials deposited (g)

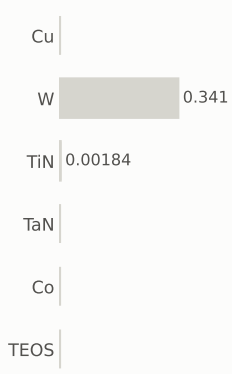

gases emitted (g)

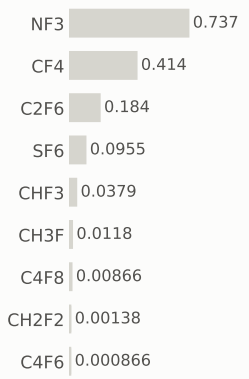

Step #670: RIE

etch_anisotropic · RIE

1.04	140.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

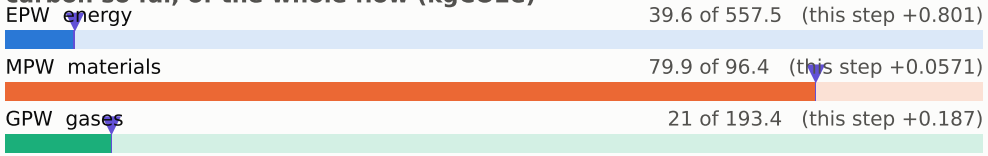

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

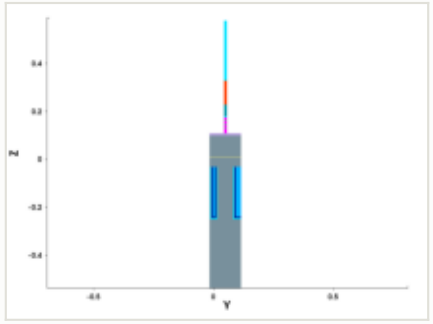

y cut at 0.049 µm

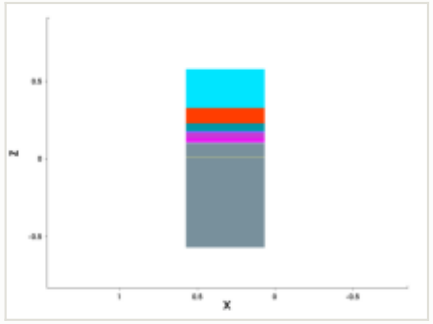

mask for this step

no mask for this step

steps by process area

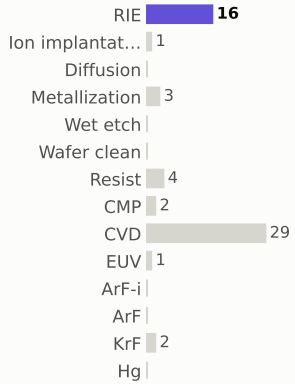

materials deposited (g)

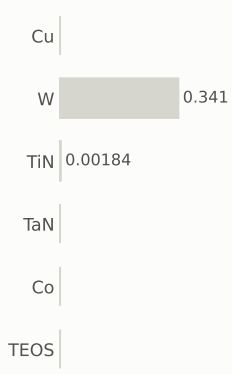

gases emitted (g)

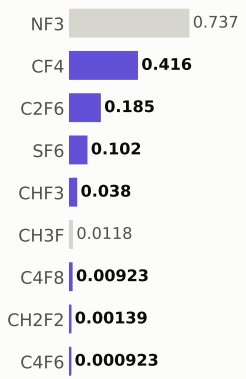

Step #680: RIE

etch_anisotropic · RIE

1.04	141.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

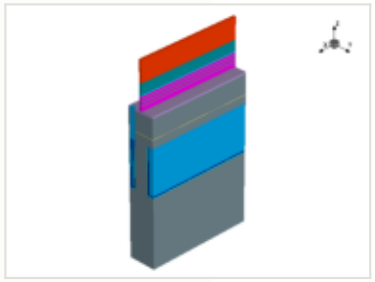

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

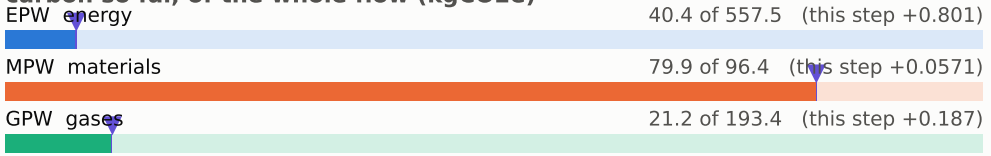

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

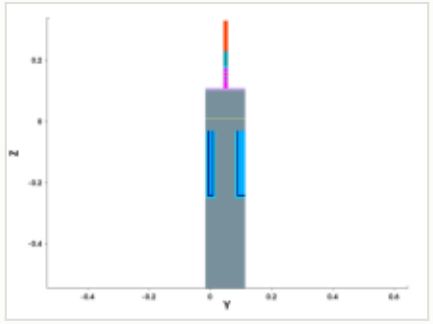

y cut at 0.049 µm

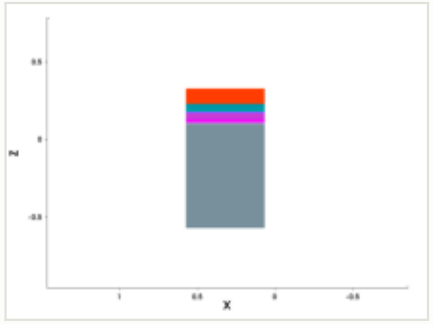

mask for this step

no mask for this step

steps by process area

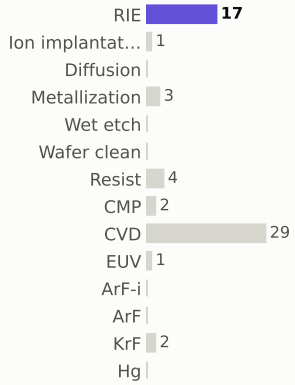

materials deposited (g)

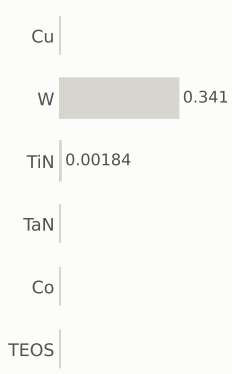

gases emitted (g)

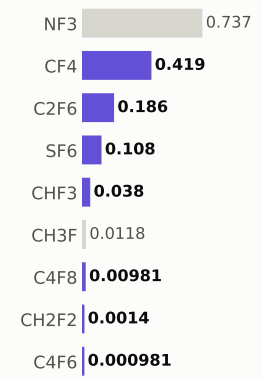

Step #690: CVD

depo_isotropic · CVD

1.31	142.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

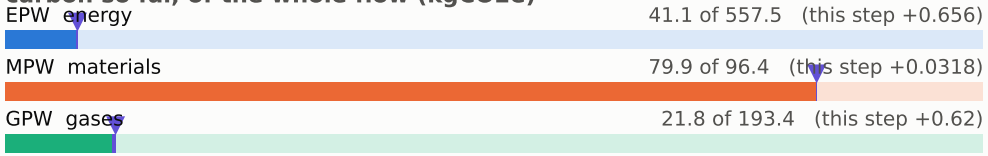

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

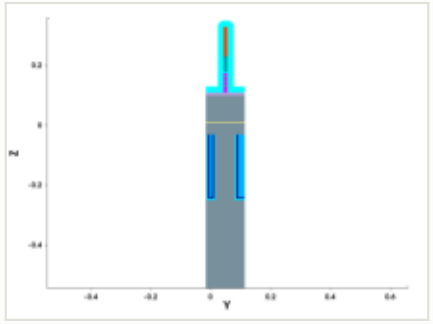

y cut at 0.049 µm

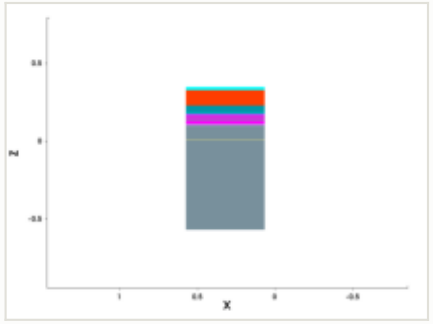

mask for this step

no mask for this step

steps by process area



materials deposited (g)

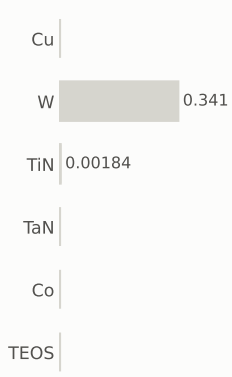

gases emitted (g)

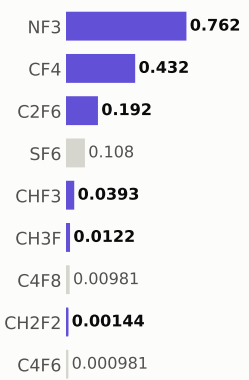

Step #700: RIE

etch_anisotropic · RIE

1.04	143.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

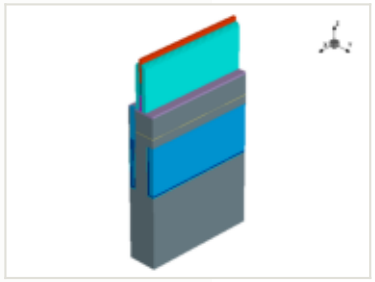

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

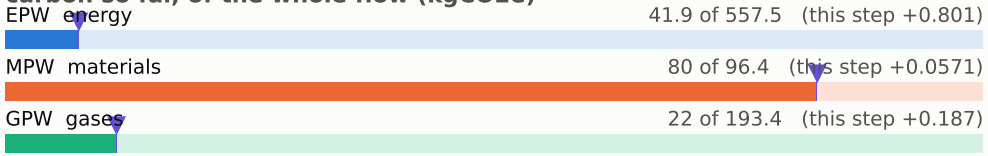

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

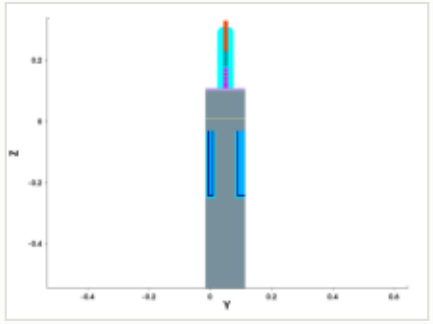

y cut at 0.049 µm

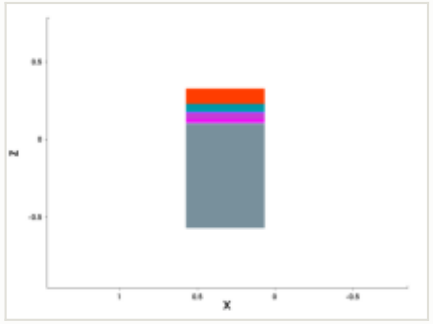

mask for this step

no mask for this step

steps by process area

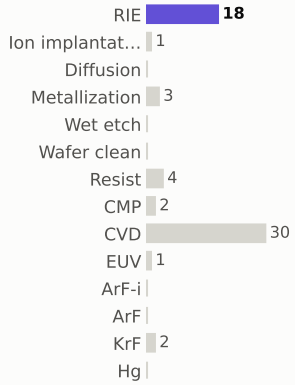

materials deposited (g)

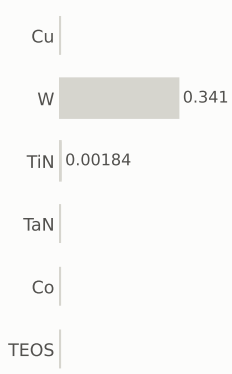

gases emitted (g)

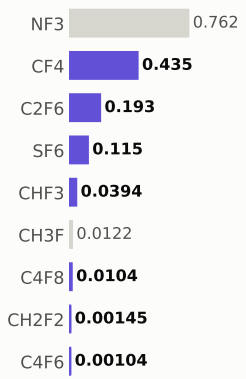

Step #710: CMP

etch_cmp · CMP

0.169	144.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

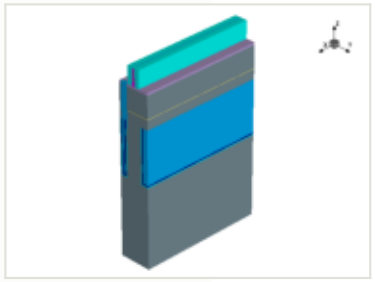

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

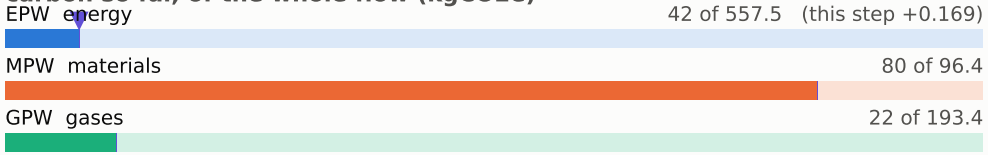

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

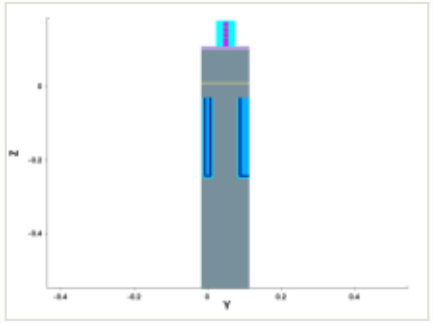

y cut at 0.049 µm

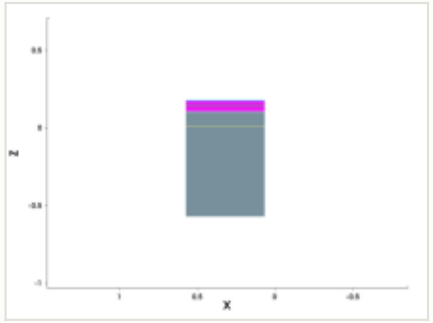

mask for this step

no mask for this step

steps by process area

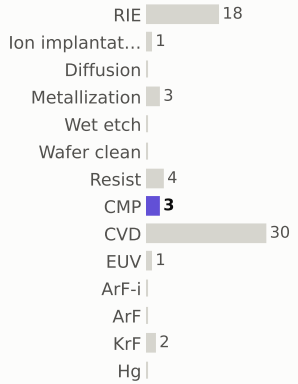

materials deposited (g)



gases emitted (g)

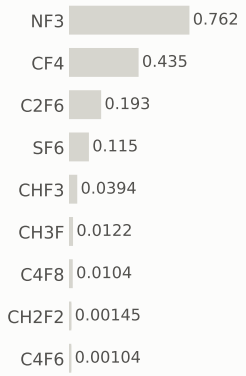

Step #720: RIE

etch_anisotropic · RIE

1.04	145.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

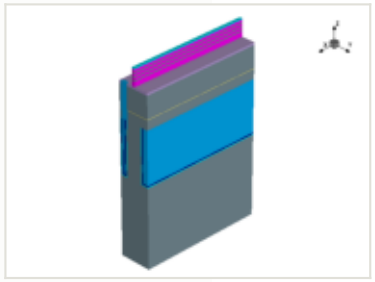

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

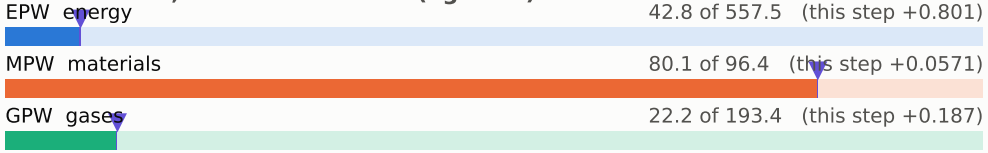

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

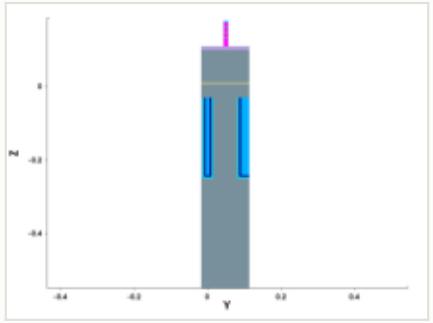

y cut at 0.049 µm

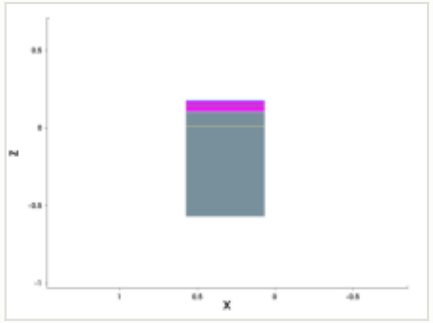

mask for this step

no mask for this step

steps by process area

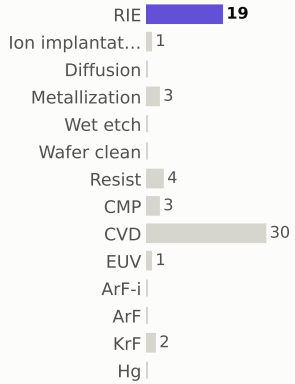

materials deposited (g)

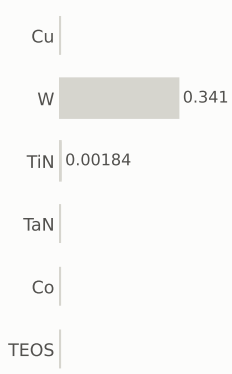

gases emitted (g)

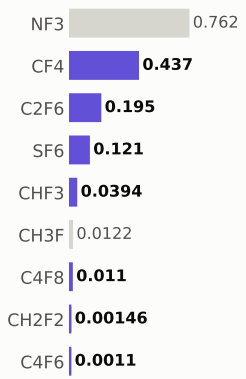

Step #730: RIE

etch_anisotropic · RIE

1.04	146.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

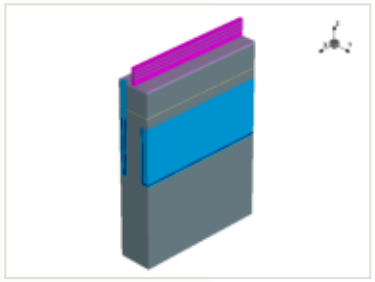

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

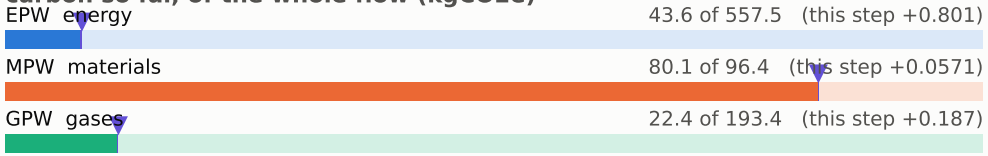

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

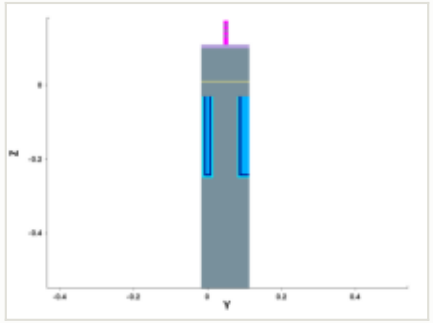

y cut at 0.049 µm

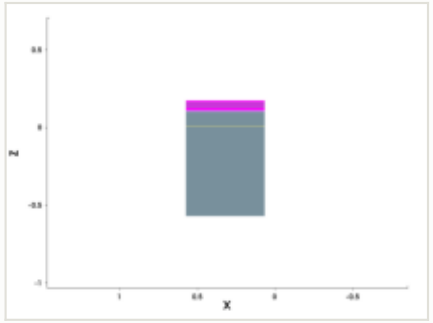

mask for this step

no mask for this step

steps by process area

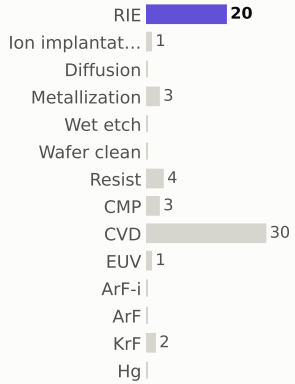

materials deposited (g)

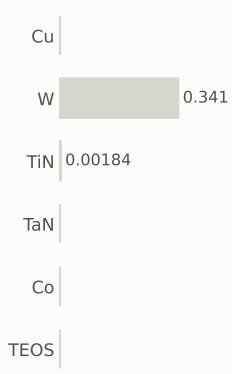

gases emitted (g)

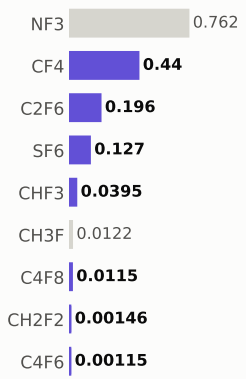

Step #750: EUV

litho_patterning · EUV

1.96	148.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

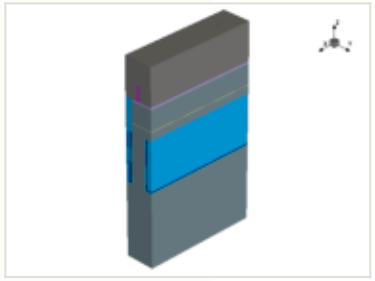

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

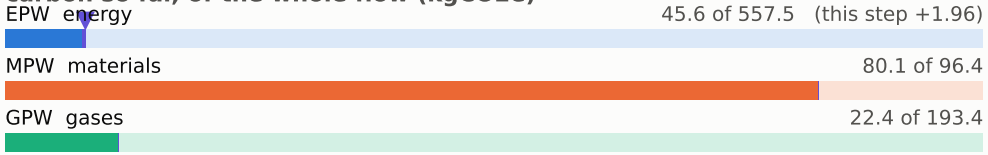

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

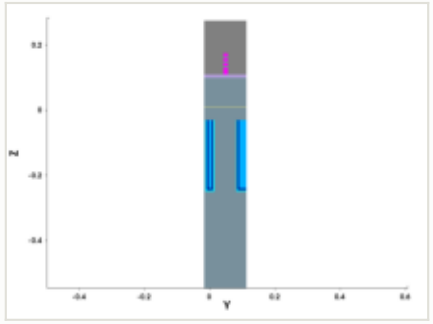

y cut at 0.049 µm

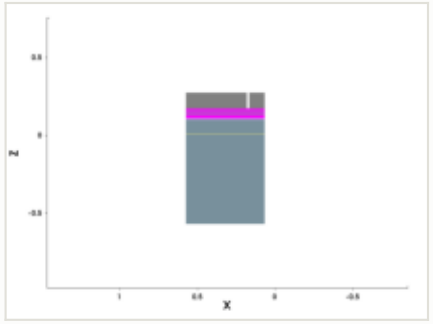

mask: layer 14:1 (GDSII)

steps by process area

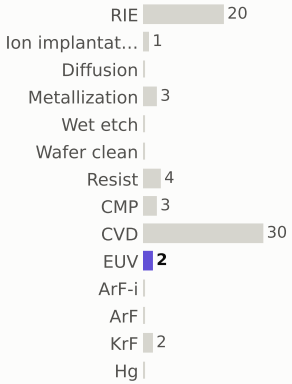

materials deposited (g)

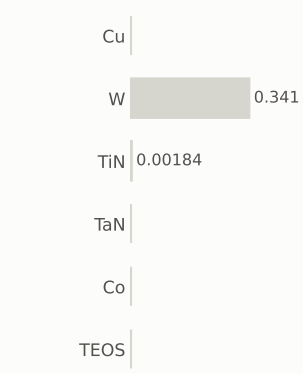

gases emitted (g)

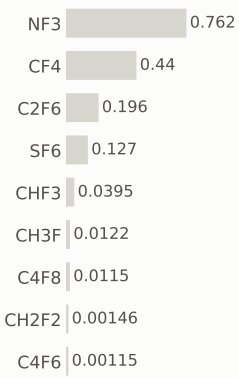

Step #760: RIE

etch_anisotropic · RIE

1.04	149.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

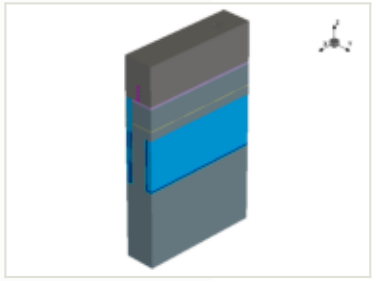

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

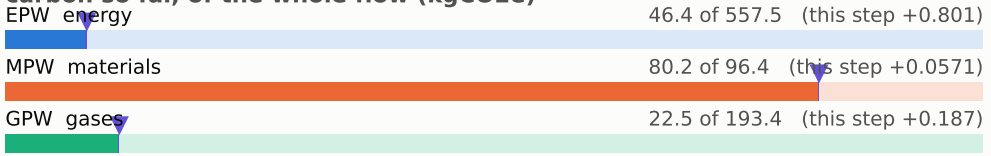

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

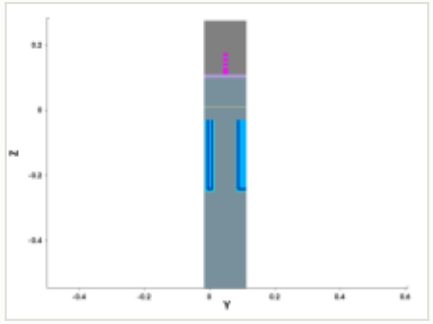

y cut at 0.049 µm

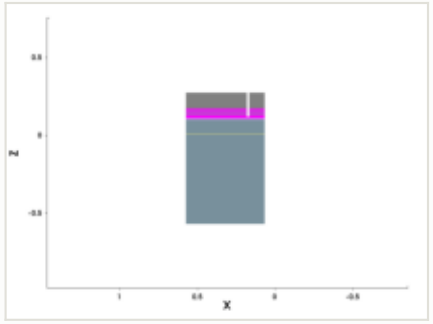

mask for this step

no mask for this step

steps by process area

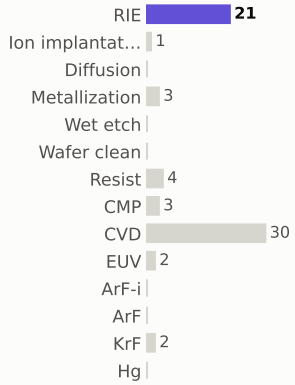

materials deposited (g)

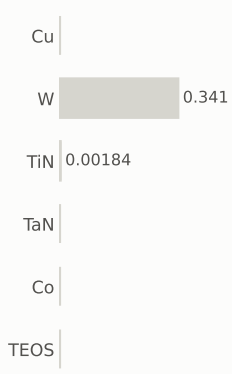

gases emitted (g)

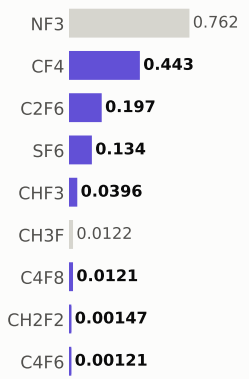

Step #770: CVD

depo_fill · CVD

1.31	150.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

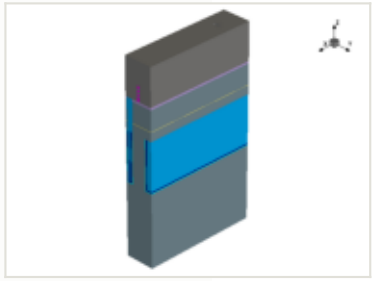

this step

process area	CVD
material	—
thickness	-0.055 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

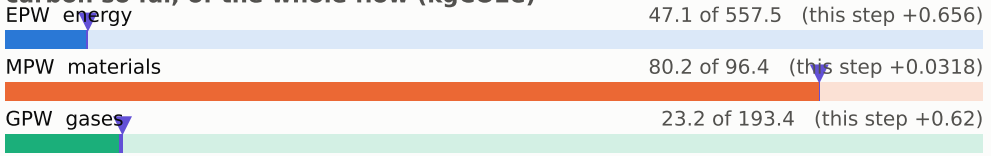

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

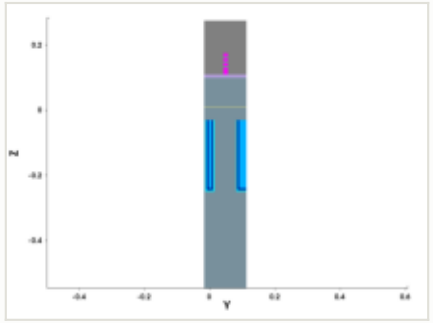

y cut at 0.049 µm

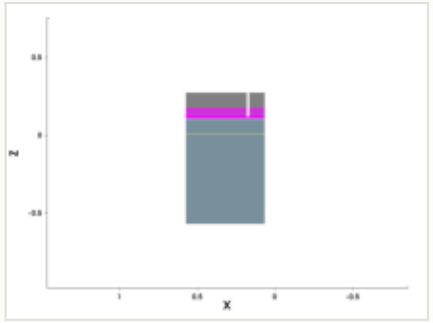

mask for this step

no mask for this step

steps by process area

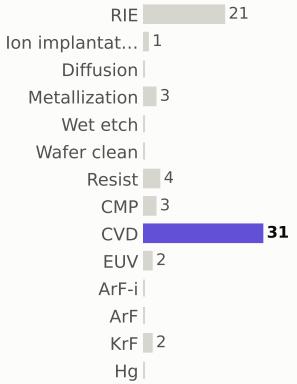

materials deposited (g)

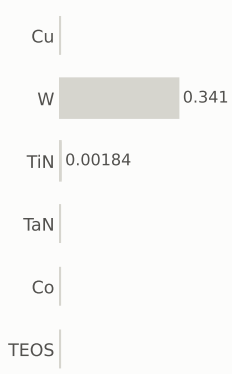

gases emitted (g)

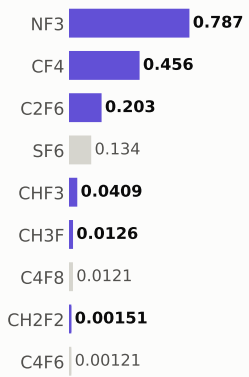

Step #780: Resist

etch_strip · Resist

0.169	150.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

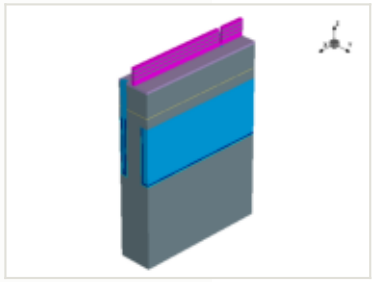

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

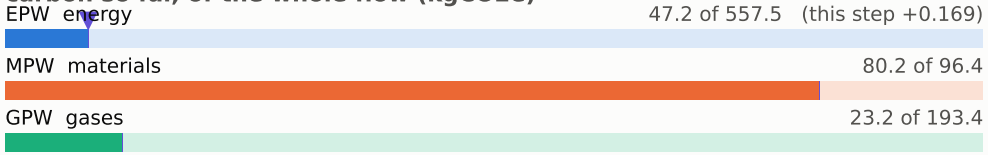

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

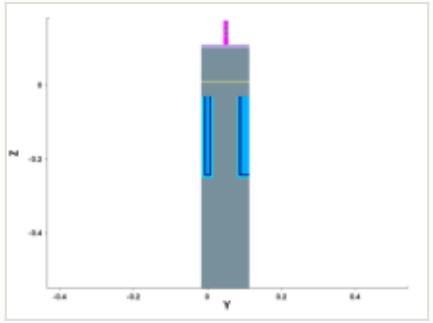

y cut at 0.049 µm

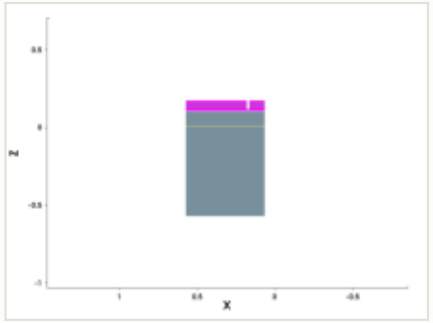

mask for this step

no mask for this step

steps by process area

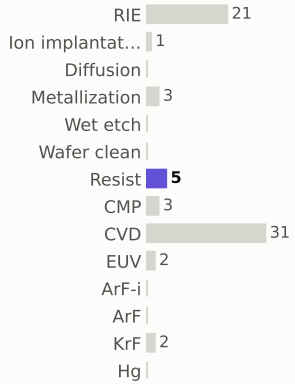

materials deposited (g)

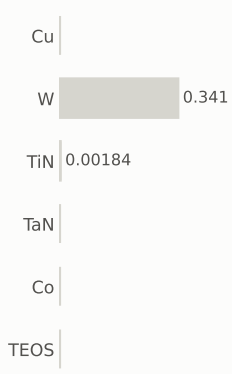

gases emitted (g)

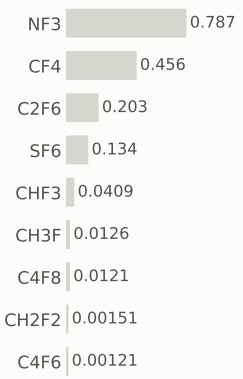

Step #800: CVD

depo_isotropic · CVD

1.31	151.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

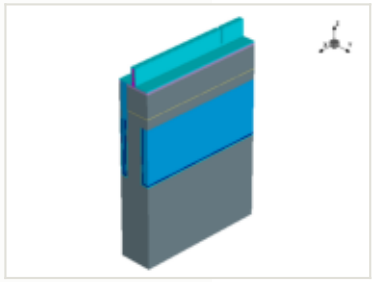

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

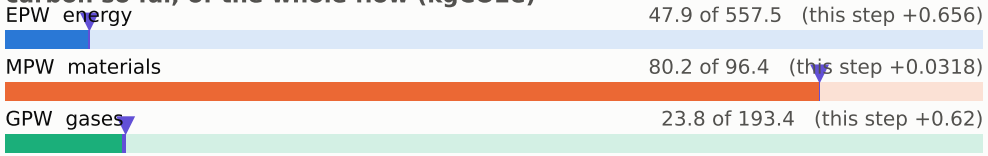

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

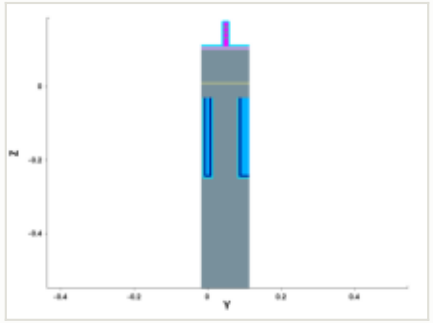

y cut at 0.049 µm

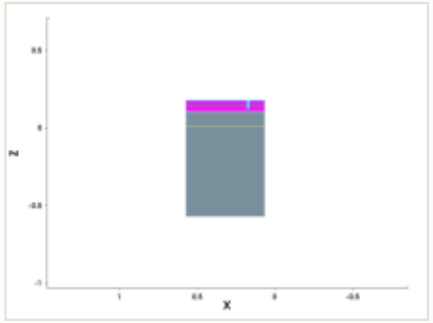

mask for this step

no mask for this step

steps by process area

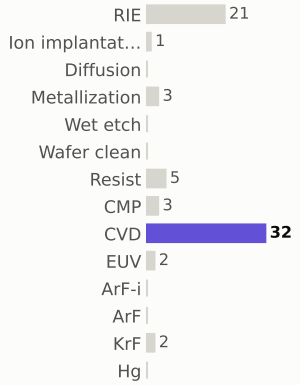

materials deposited (g)

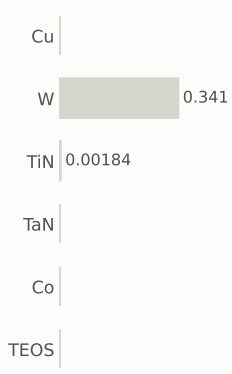

gases emitted (g)

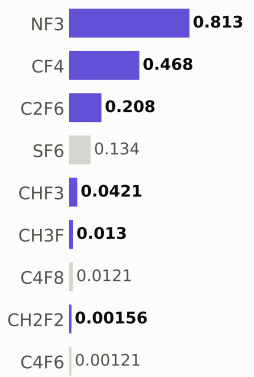

Step #810: CVD

depo_isotropic · CVD

1.31	153.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

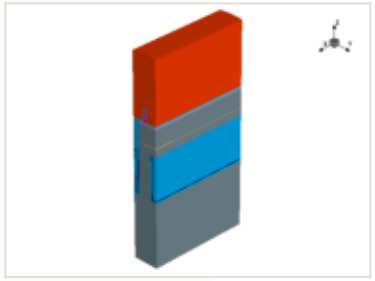

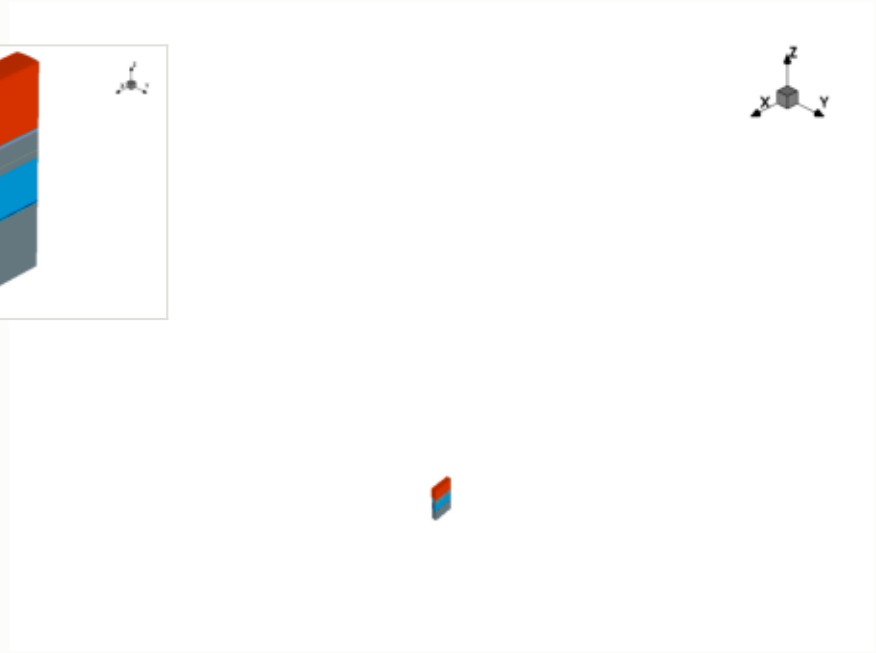

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

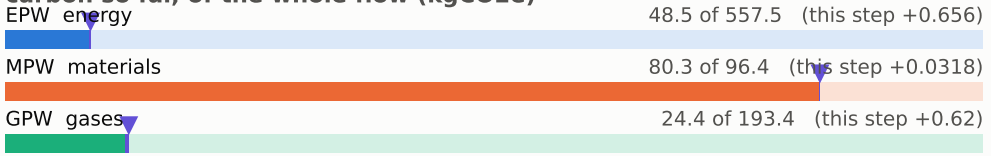

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

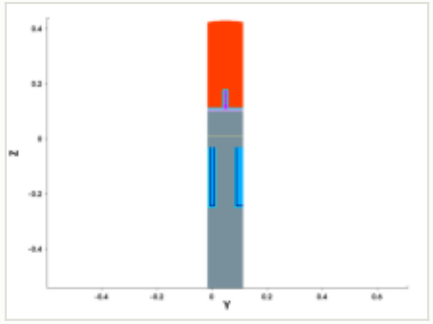

y cut at 0.049 µm

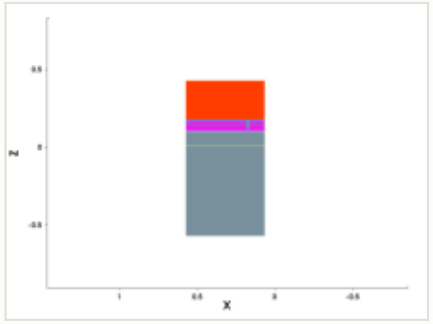

mask for this step

no mask for this step

steps by process area

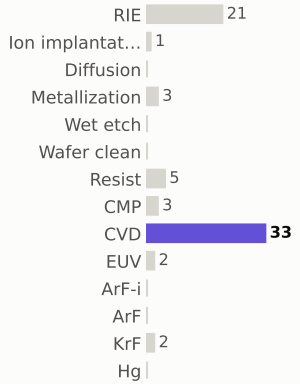

materials deposited (g)

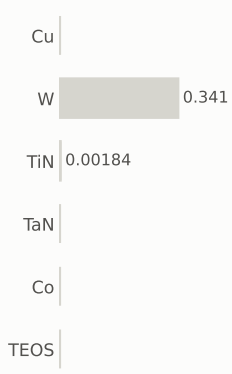

gases emitted (g)

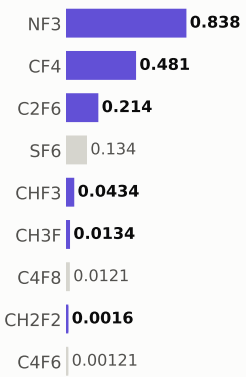

Step #820: CMP

etch_cmp · CMP

0.169	153.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

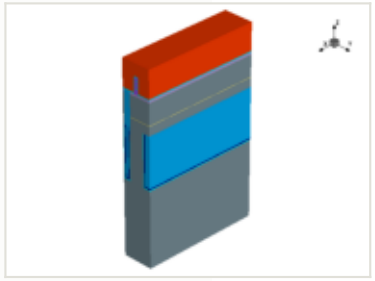

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

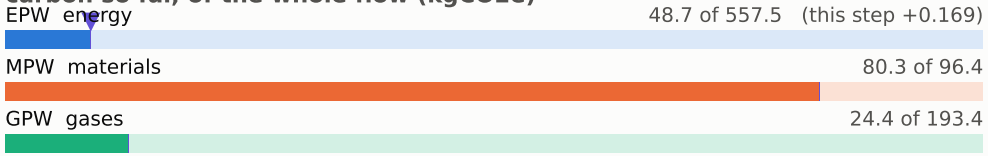

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

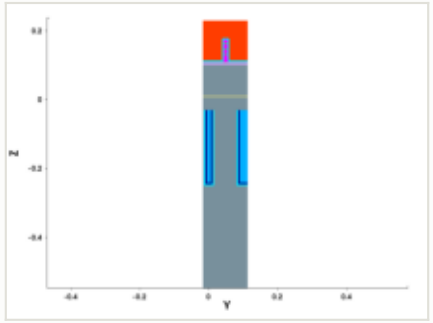

y cut at 0.049 µm

no cut image (make spx)

mask for this step

no mask for this step

steps by process area

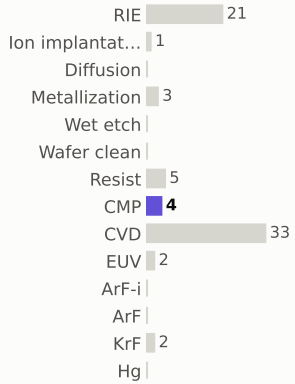

materials deposited (g)

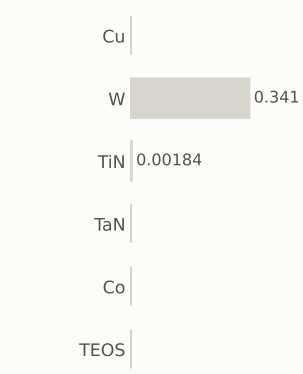

gases emitted (g)

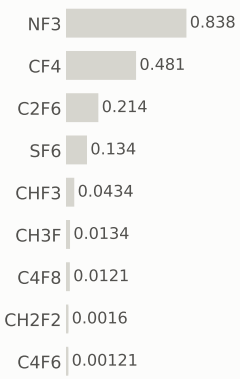

Step #840: CVD

depo_height_dependent · CVD

1.31	154.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

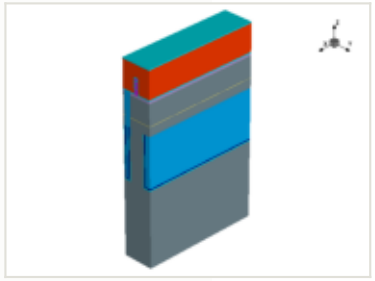

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

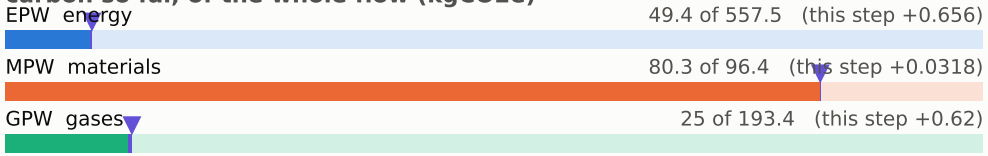

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

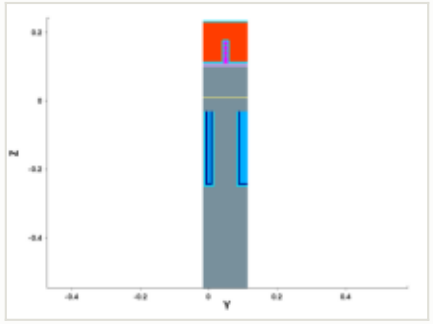

y cut at 0.049 µm

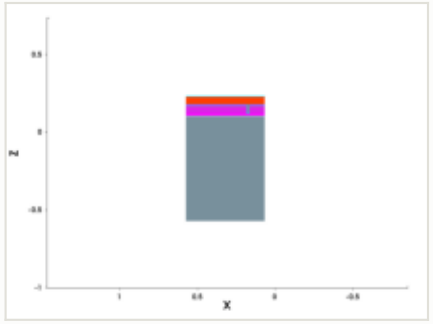

mask for this step

no mask for this step

steps by process area

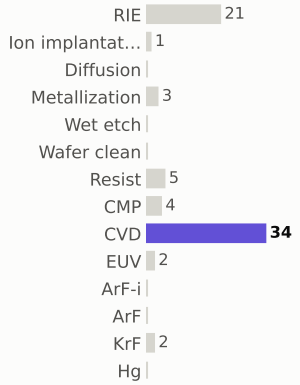

materials deposited (g)

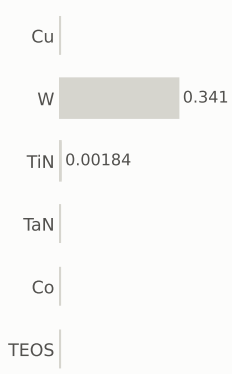

gases emitted (g)

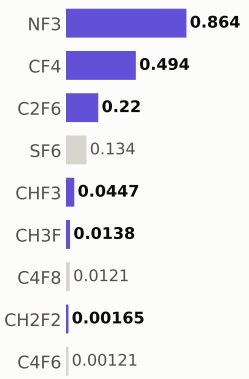

Step #850: CVD

depo_height_dependent · CVD

1.31	156.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

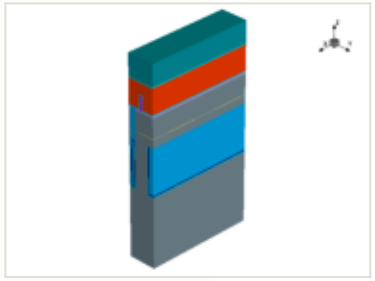

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

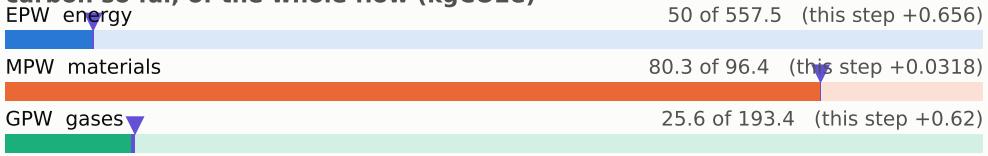

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

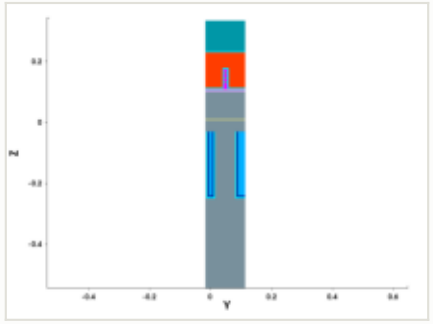

y cut at 0.049 µm

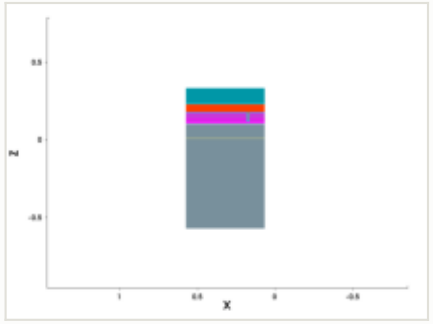

mask for this step

no mask for this step

steps by process area



materials deposited (g)

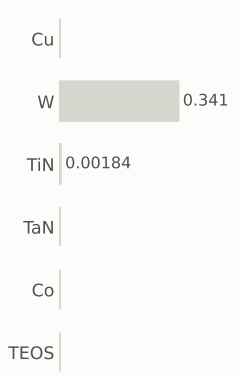

gases emitted (g)

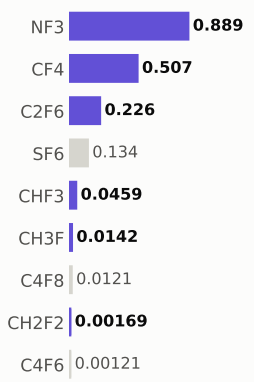

Step #860: CVD

depo_height_dependent · CVD

1.31	157.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

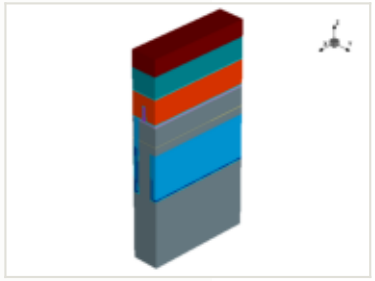

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

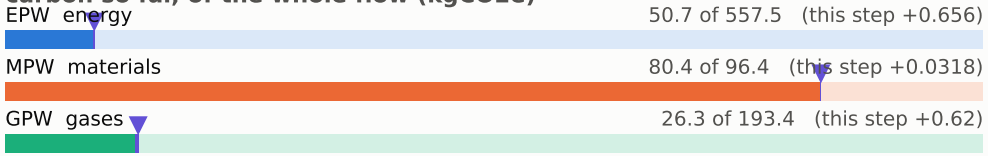

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

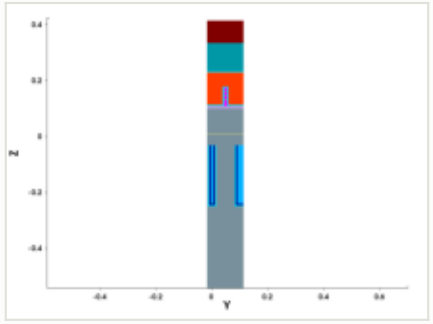

y cut at 0.049 µm

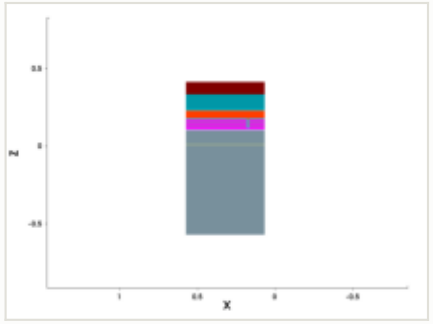

mask for this step

no mask for this step

steps by process area

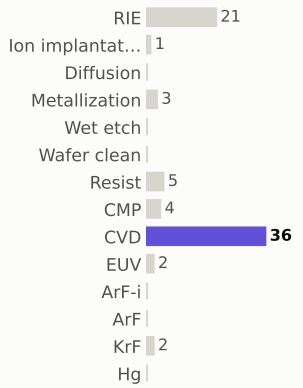

materials deposited (g)

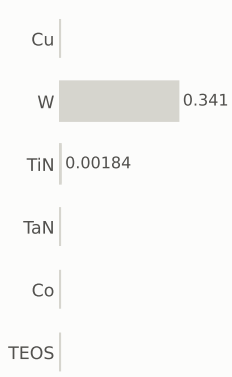

gases emitted (g)

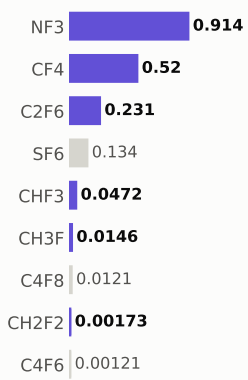

Step #870: CVD

depo_height_dependent · CVD

1.31	158.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

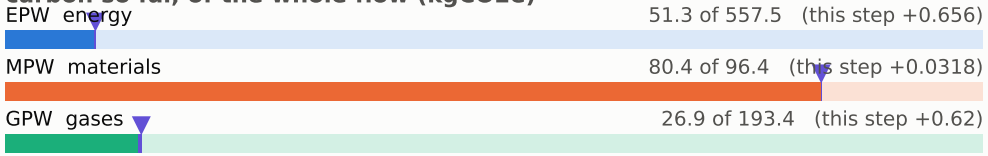

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

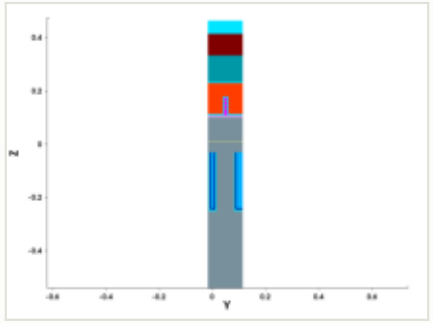

y cut at 0.049 µm

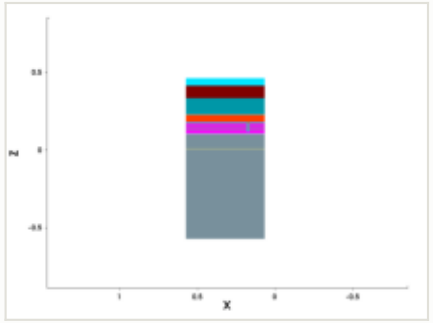

mask for this step

no mask for this step

steps by process area

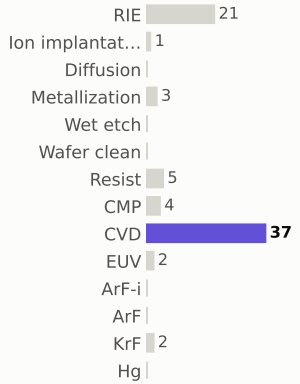

materials deposited (g)



gases emitted (g)

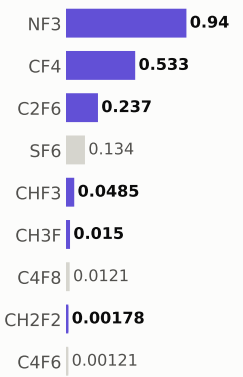

Step #880: CVD

depo_height_dependent · CVD

1.31	159.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

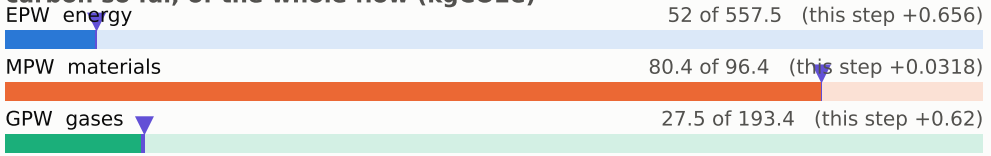

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

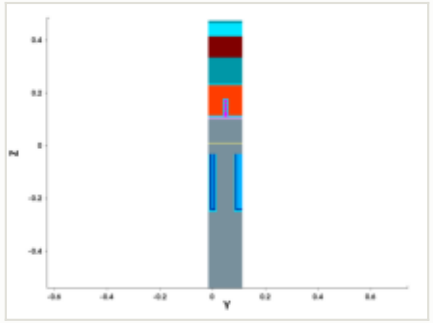

y cut at 0.049 µm

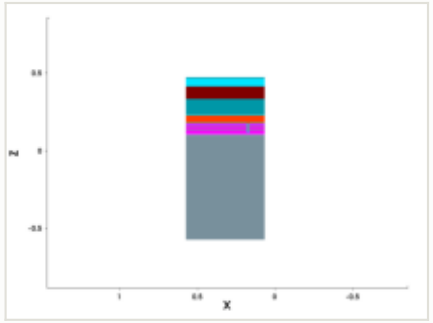

mask for this step

no mask for this step

steps by process area

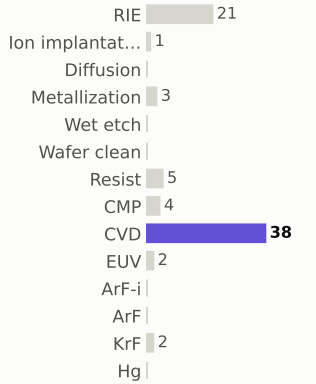

materials deposited (g)



gases emitted (g)

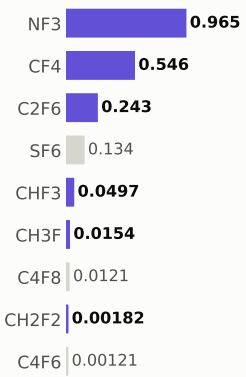

Step #890: EUV

litho_patterning · EUV

1.96	161.9	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

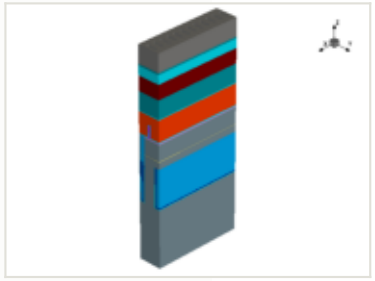

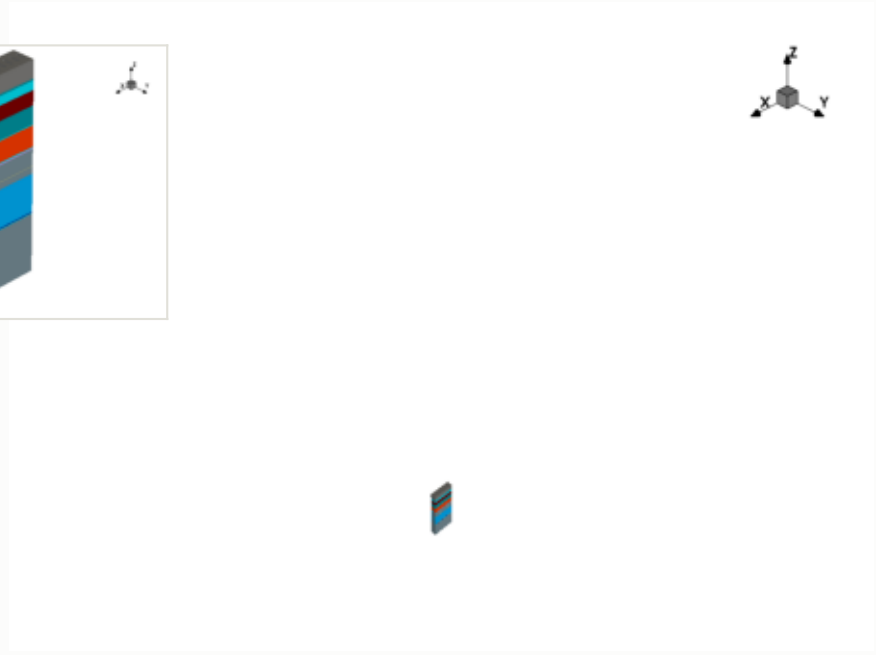

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

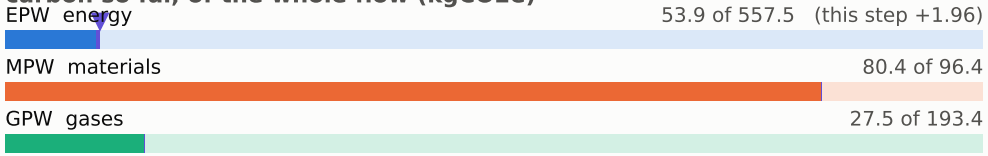

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

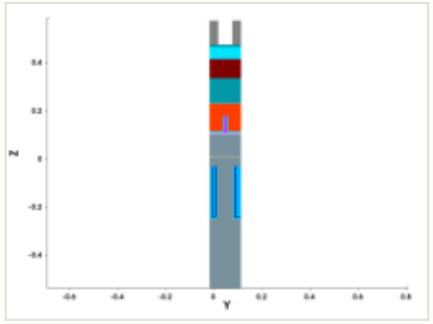

y cut at 0.049 µm

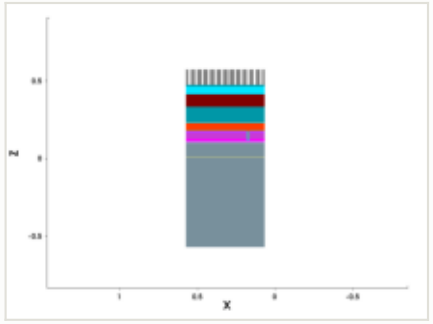

mask: layer 3:0, 3:1 (GDSII)

steps by process area

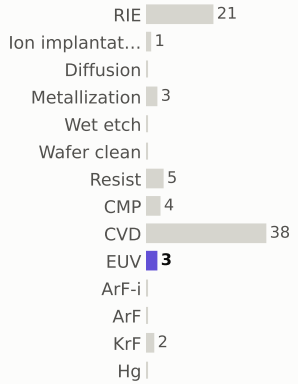

materials deposited (g)



gases emitted (g)

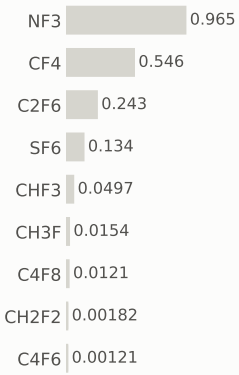

Step #900: RIE

etch_anisotropic · RIE

1.04	162.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

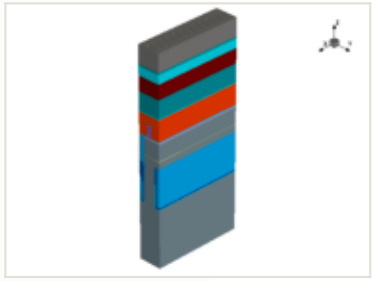

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

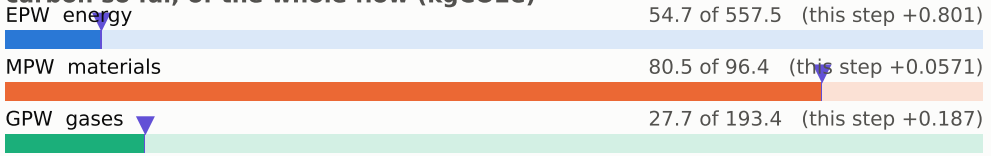

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

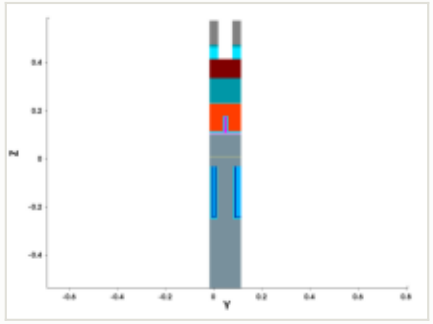

y cut at 0.049 µm

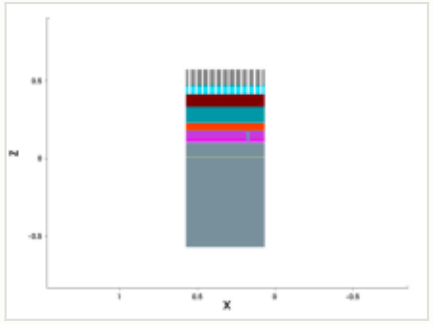

mask for this step

no mask for this step

steps by process area

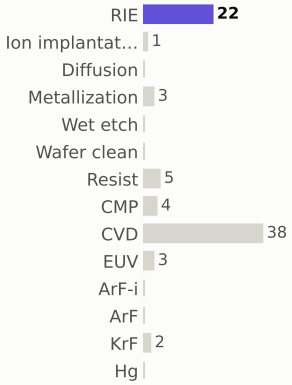

materials deposited (g)

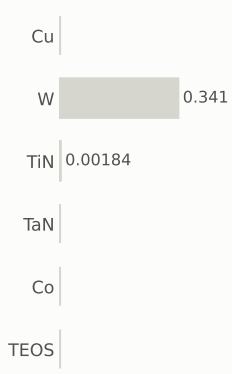

gases emitted (g)

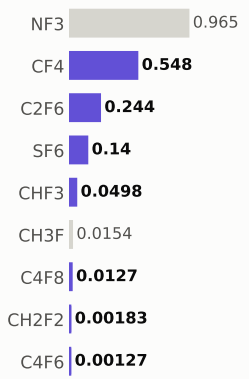

Step #910: Resist

etch_strip · Resist

0.169	163.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

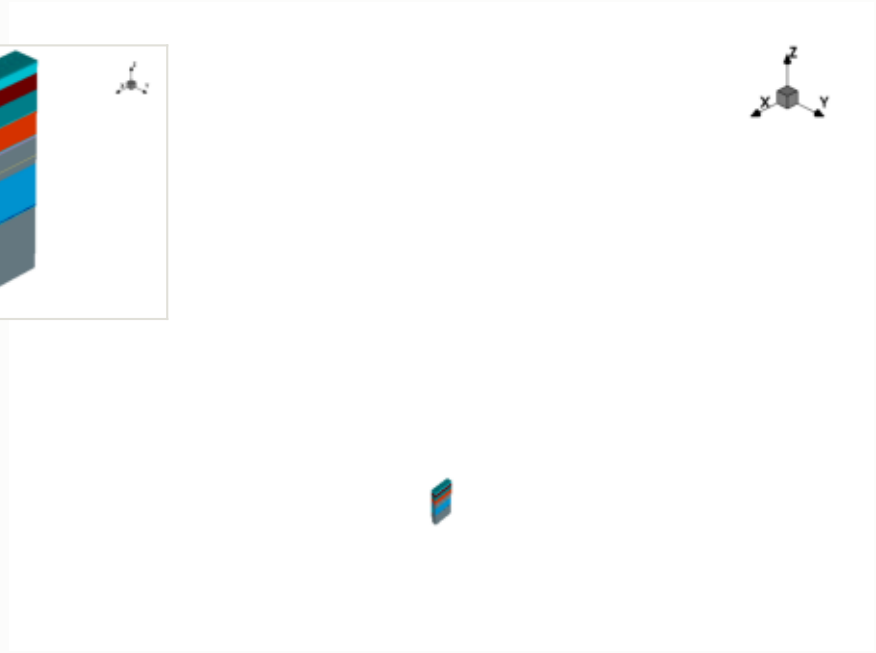

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

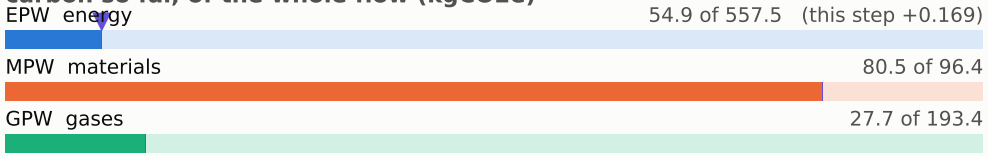

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

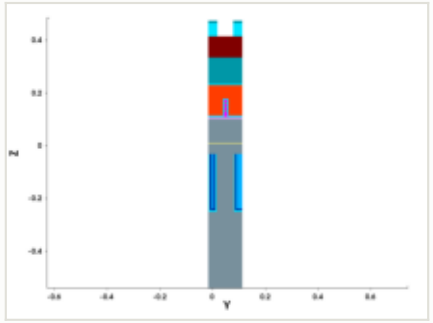

y cut at 0.049 µm

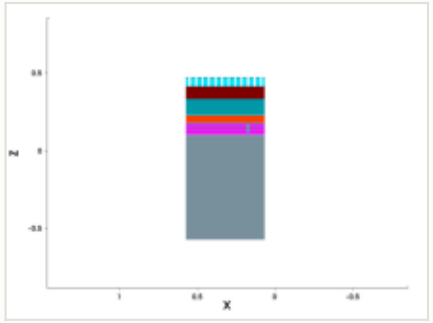

mask for this step

no mask for this step

steps by process area

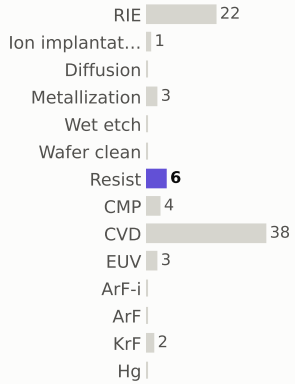

materials deposited (g)



gases emitted (g)

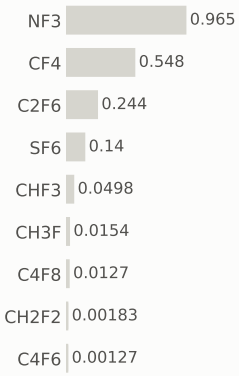

Step #920: RIE

etch_anisotropic · RIE

1.04	164.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

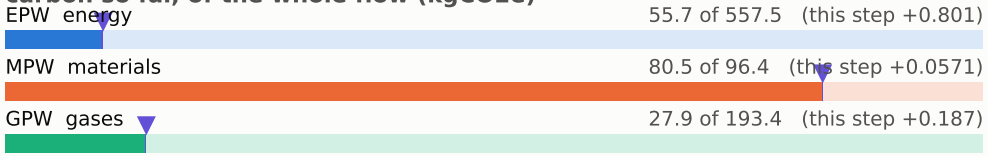

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

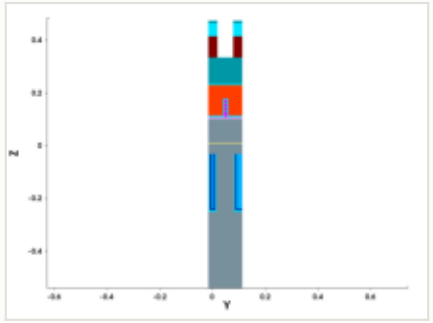

y cut at 0.049 µm

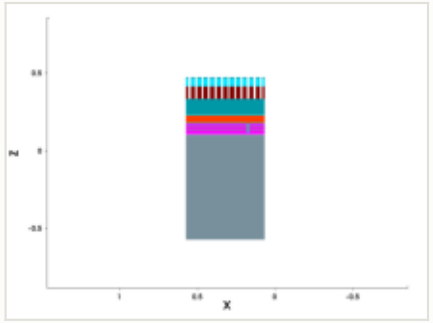

mask for this step

no mask for this step

steps by process area

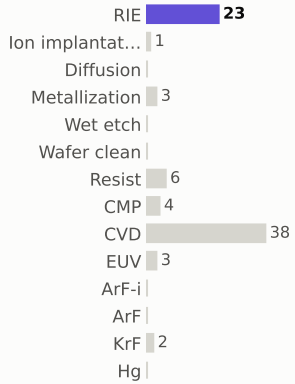

materials deposited (g)

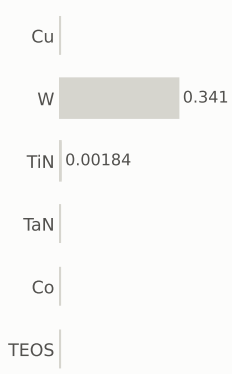

gases emitted (g)

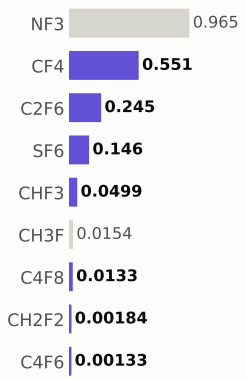

Step #930: CMP

etch_cmp · CMP

0.169	164.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

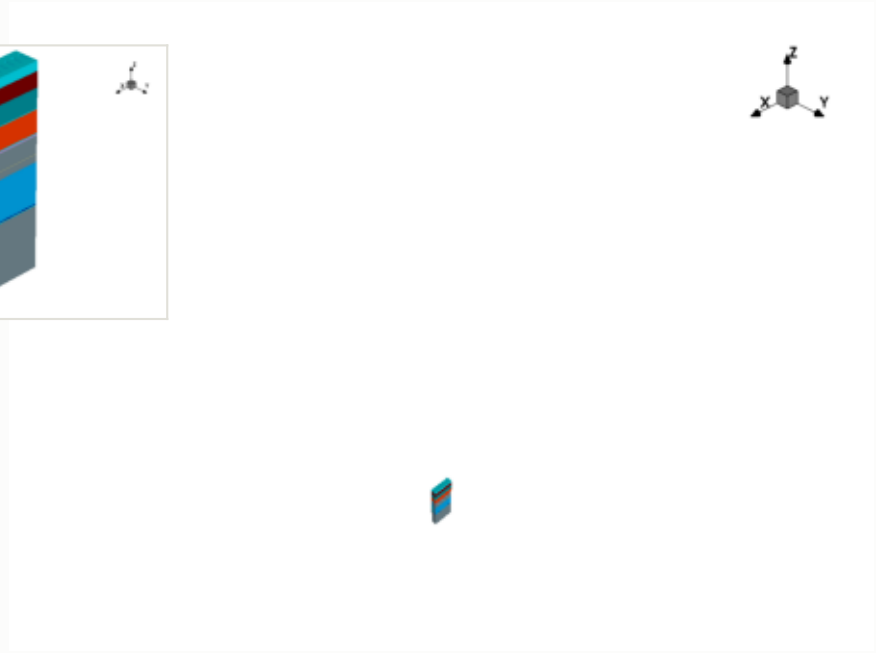

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

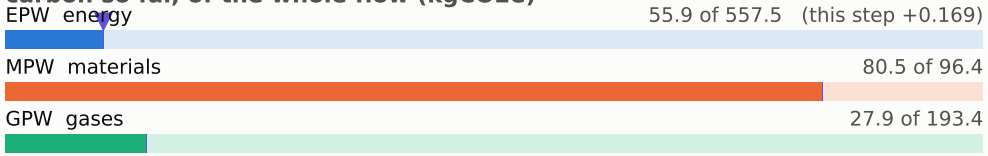

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

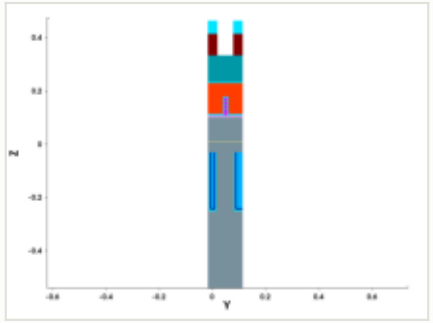

y cut at 0.049 µm

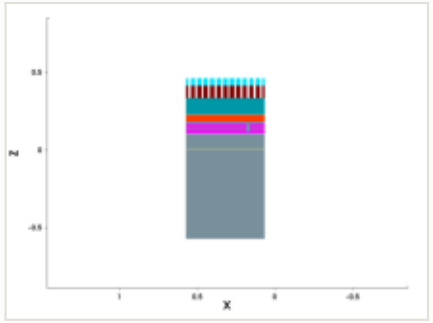

mask for this step

no mask for this step

steps by process area

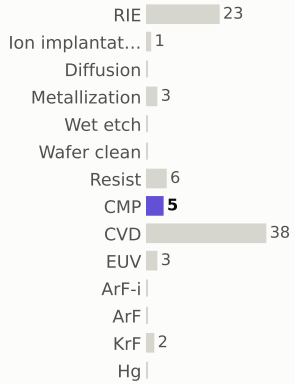

materials deposited (g)

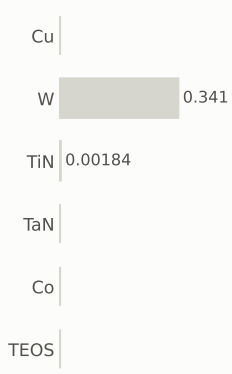

gases emitted (g)



Step #940: RIE

etch_anisotropic · RIE

1.04	165.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

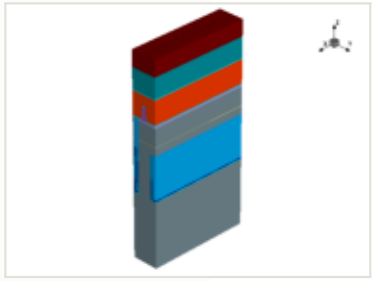

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

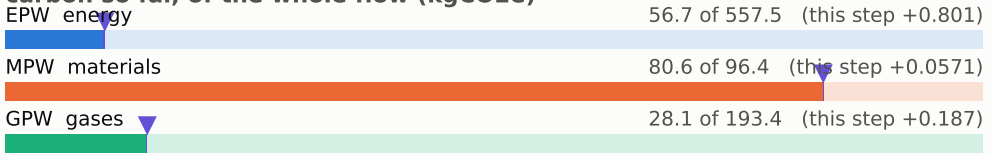

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

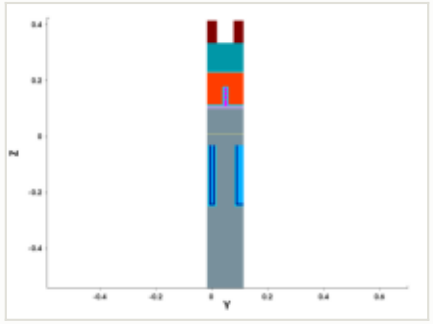

y cut at 0.049 µm

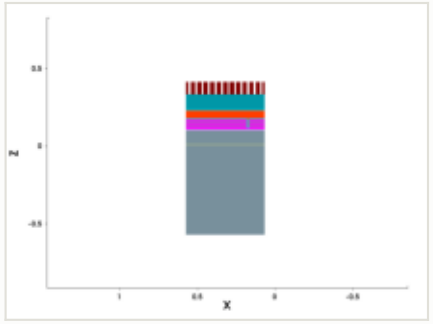

mask for this step

no mask for this step

steps by process area

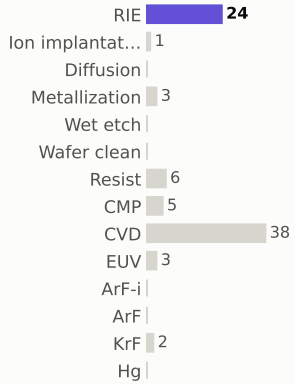

materials deposited (g)

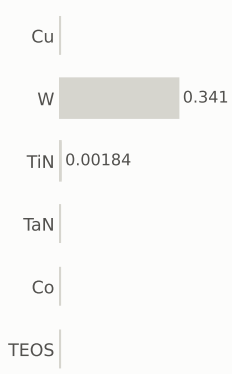

gases emitted (g)

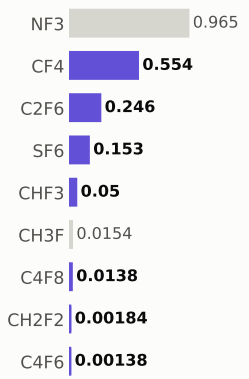

Step #950: CVD

depo_fill · CVD

1.31	166.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

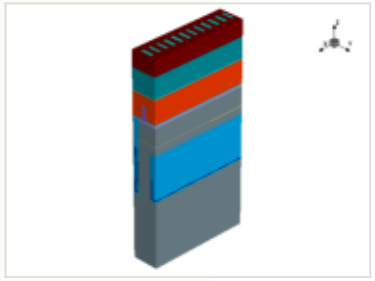

this step

process area	CVD
material	—
thickness	0.08 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

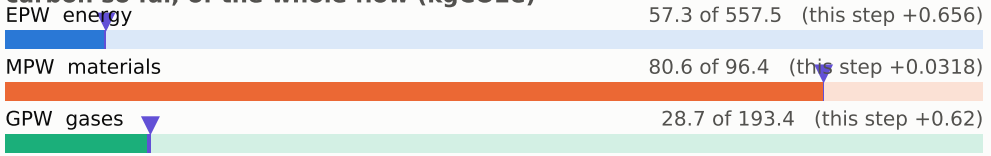

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

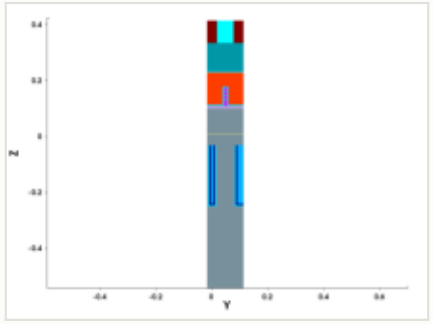

y cut at 0.049 µm

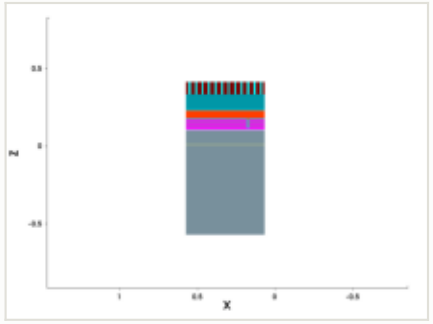

mask for this step

no mask for this step

steps by process area

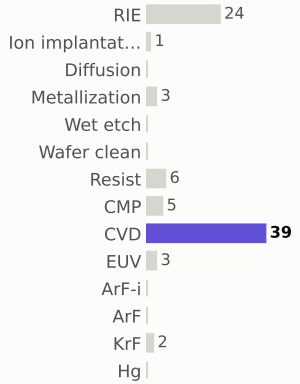

materials deposited (g)

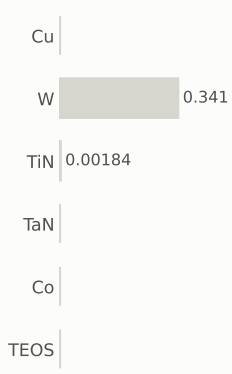

gases emitted (g)

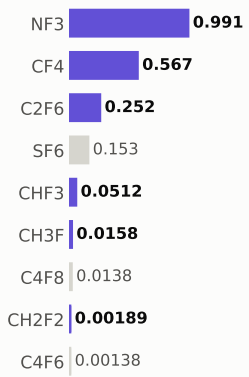

Step #960: RIE

etch_anisotropic · RIE

1.04	167.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

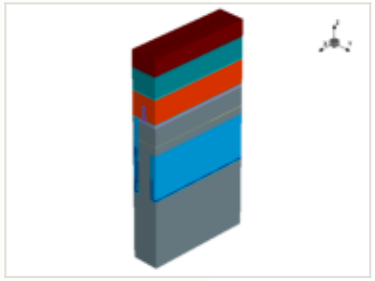

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

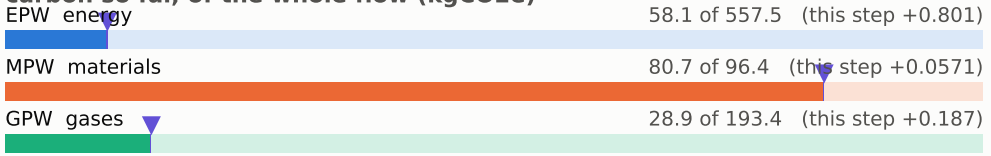

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

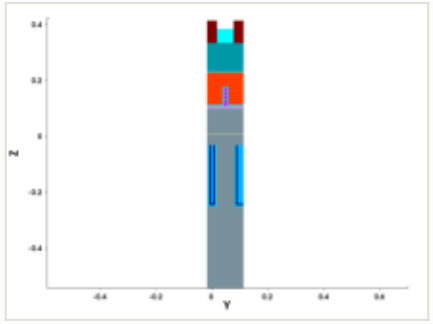

y cut at 0.049 µm

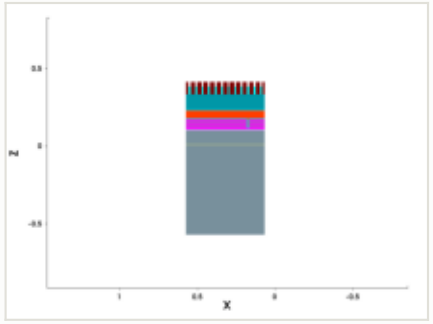

mask for this step

no mask for this step

steps by process area

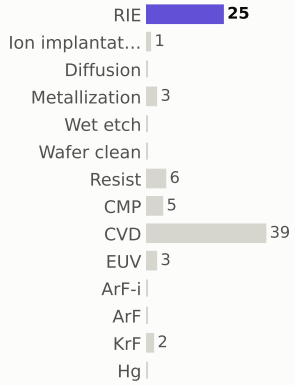

materials deposited (g)

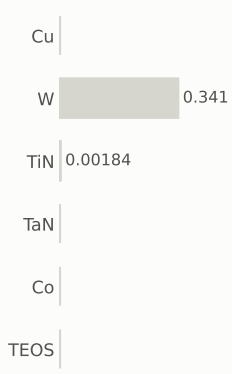

gases emitted (g)

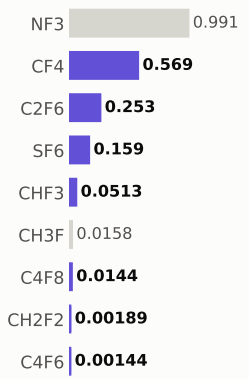

Step #970: RIE

etch_anisotropic · RIE

1.04	168.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

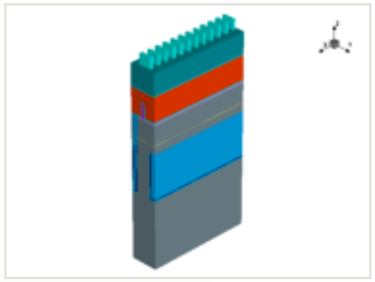

x cut at 0.385 µm

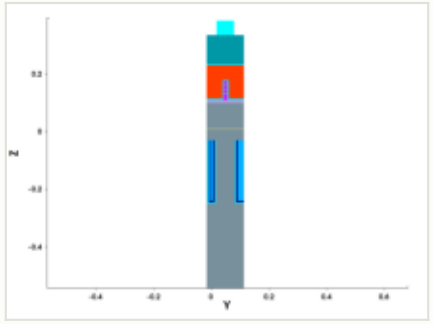

y cut at 0.049 µm

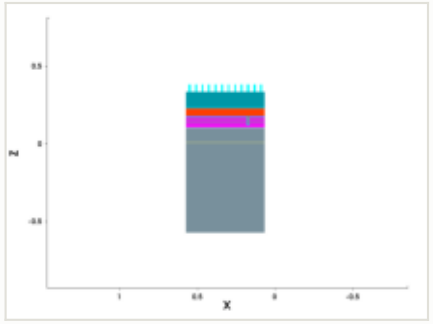

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

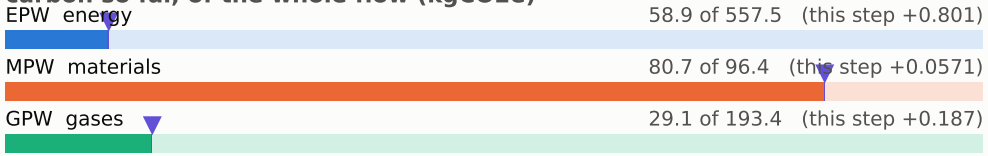

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

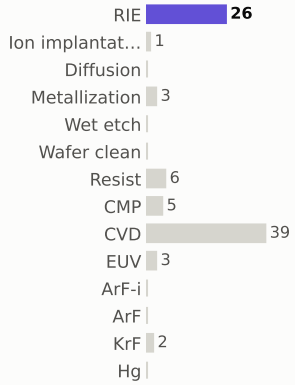

materials deposited (g)

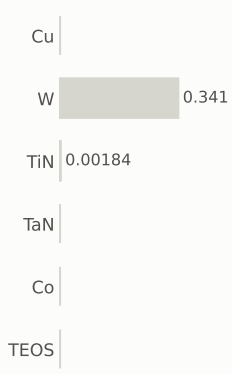

gases emitted (g)

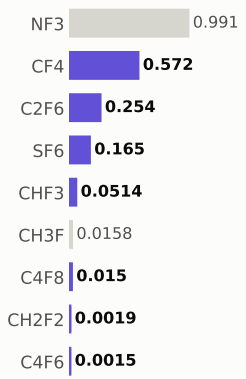

Step #980: RIE

etch_anisotropic · RIE

1.04	169.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

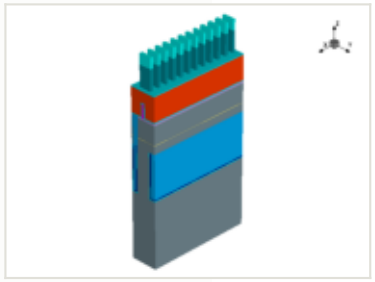

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

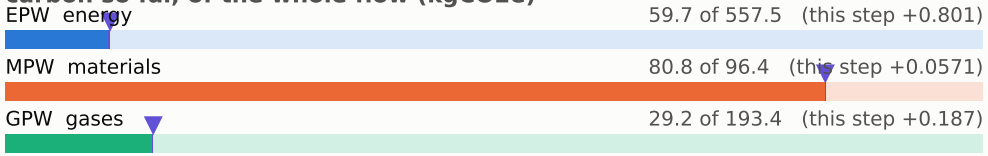

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

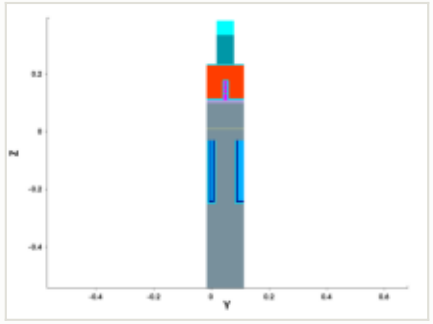

y cut at 0.049 µm

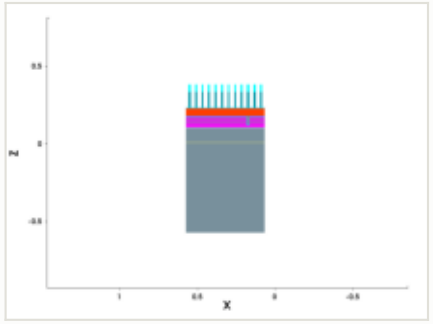

mask for this step

no mask for this step

steps by process area

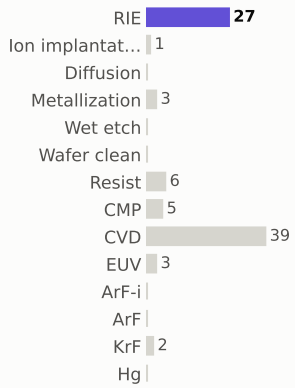

materials deposited (g)

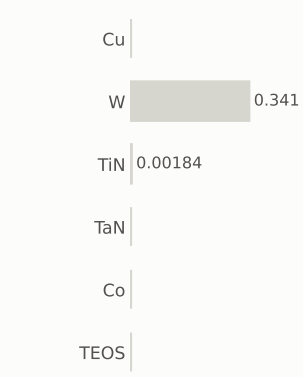

gases emitted (g)

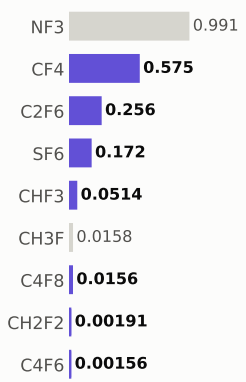

Step #990: RIE

etch_anisotropic · RIE

1.04	170.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

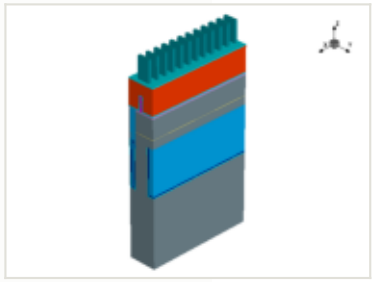

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

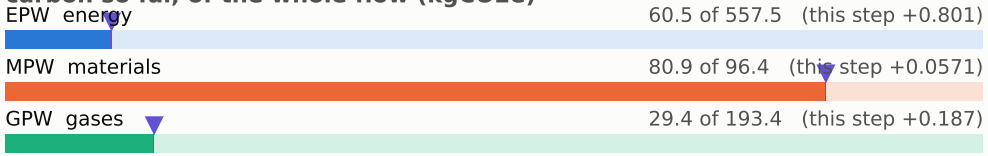

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

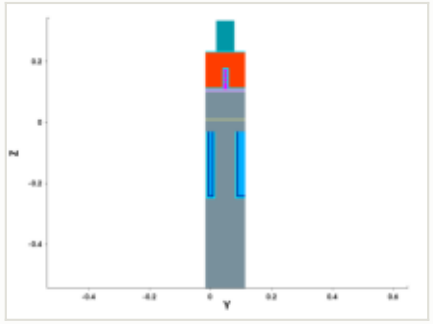

y cut at 0.049 µm

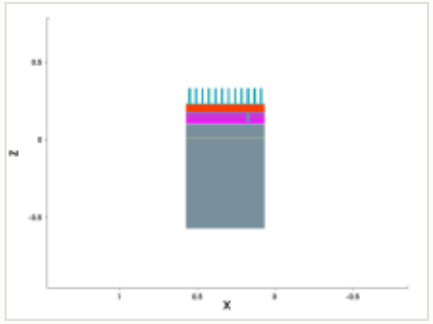

mask for this step

no mask for this step

steps by process area

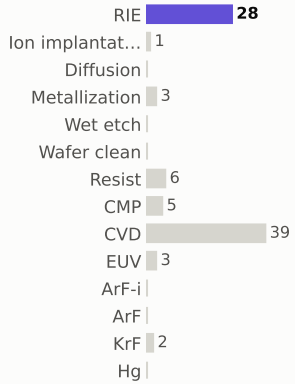

materials deposited (g)

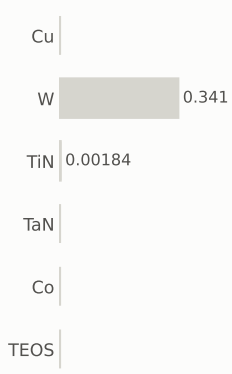

gases emitted (g)

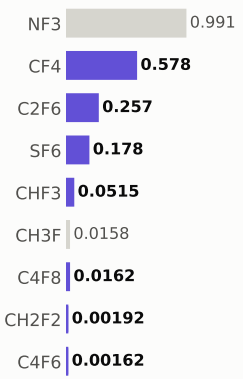

Step #1000: RIE

etch_anisotropic · RIE

1.04	171.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

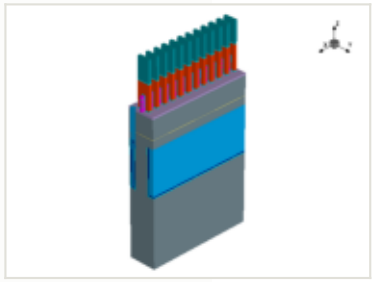

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

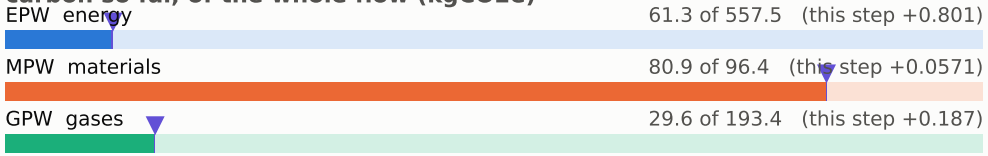

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

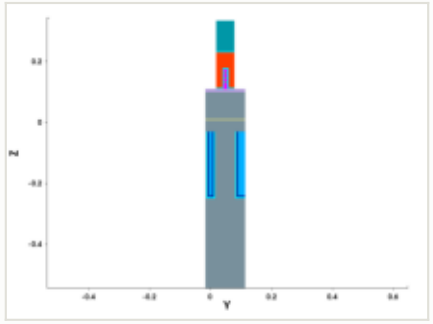

y cut at 0.049 µm

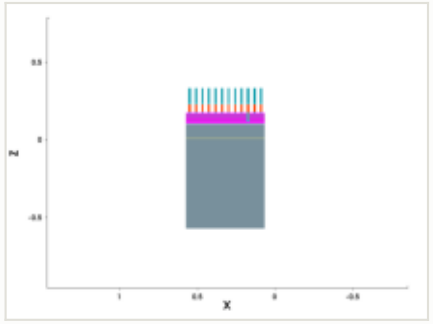

mask for this step

no mask for this step

steps by process area

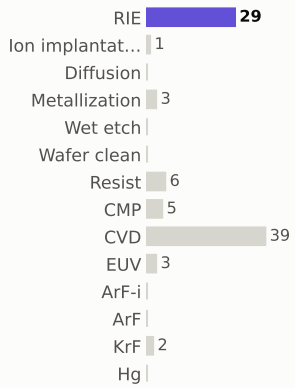

materials deposited (g)



gases emitted (g)

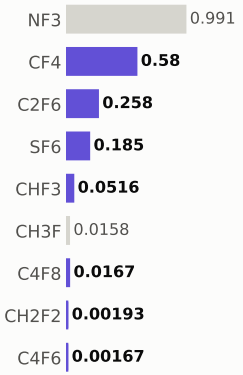

Step #1010: CVD

depo_isotropic · CVD

1.31	173.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

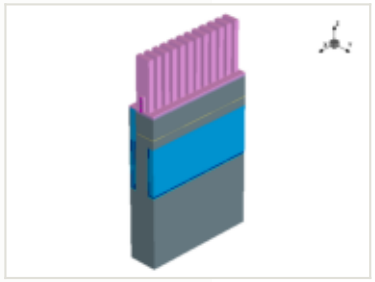

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

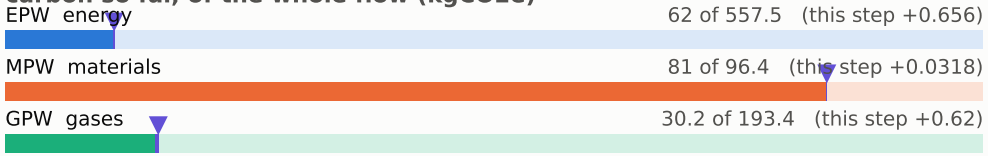

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

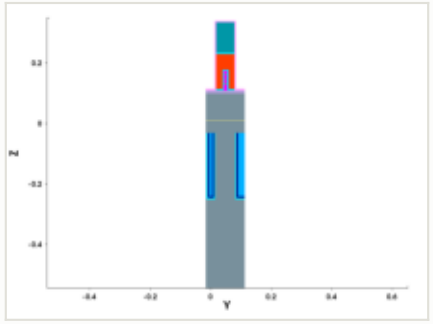

y cut at 0.049 µm

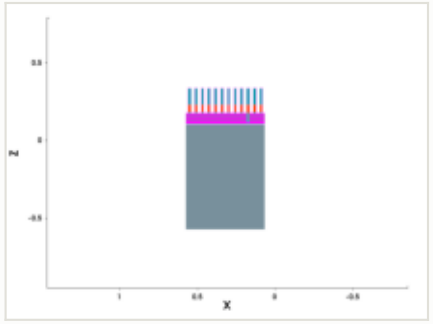

mask for this step

no mask for this step

steps by process area

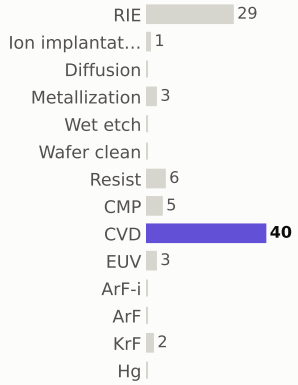

materials deposited (g)

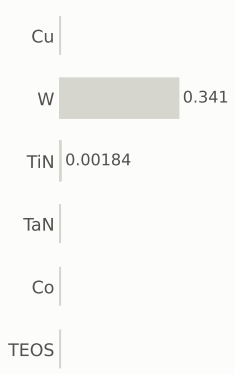

gases emitted (g)

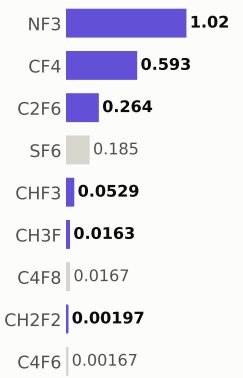

Step #1030: CVD

depo_fill · CVD

1.31	174.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

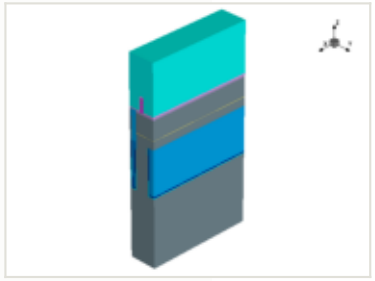

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

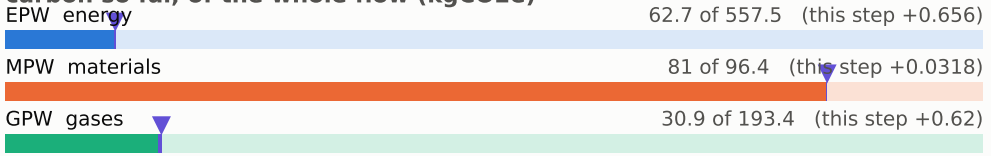

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

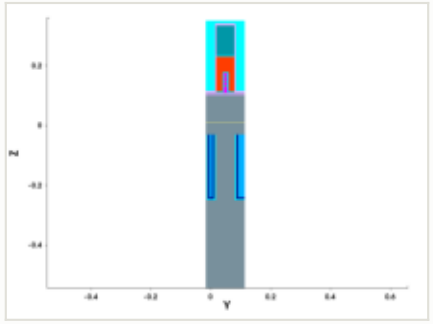

y cut at 0.049 µm

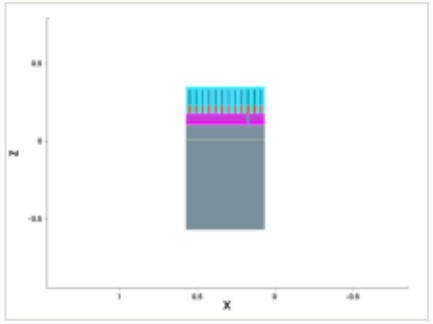

mask for this step

no mask for this step

steps by process area

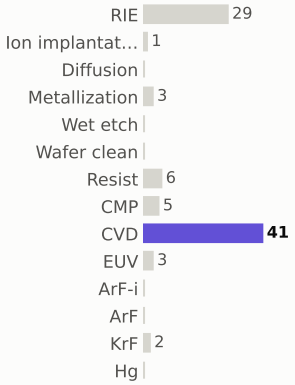

materials deposited (g)



gases emitted (g)

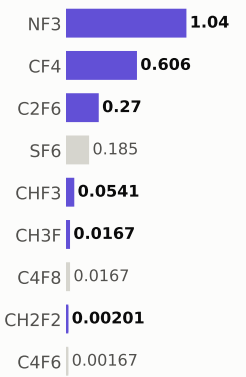

Step #1040: EUV

litho_patterning · EUV

1.96	176.5	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

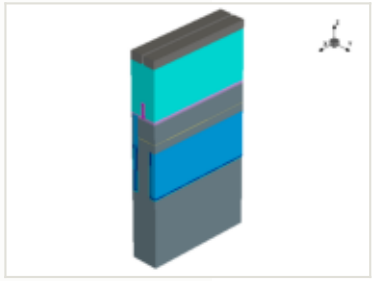

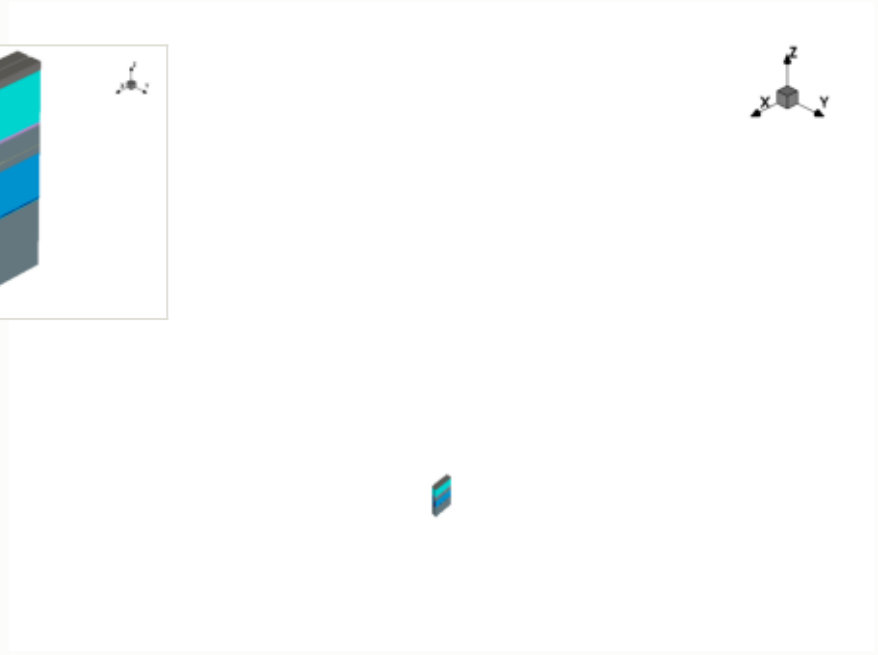

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

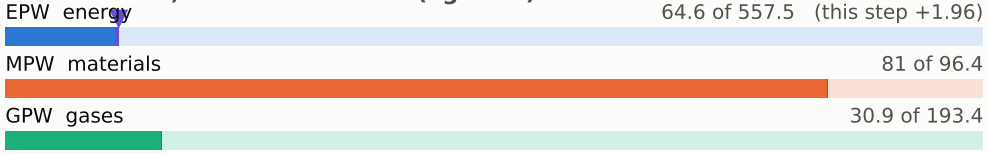

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

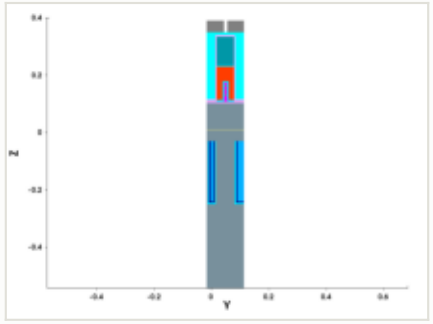

y cut at 0.049 µm

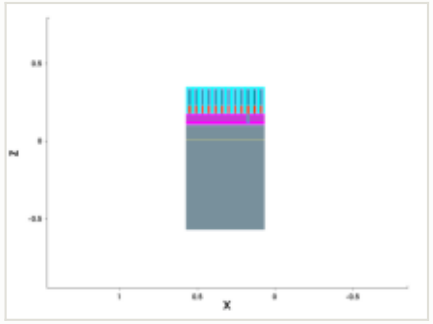

mask: layer 2:0 (GDSII)

steps by process area

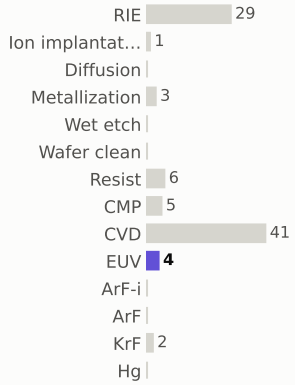

materials deposited (g)

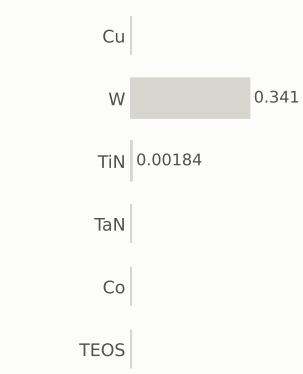

gases emitted (g)

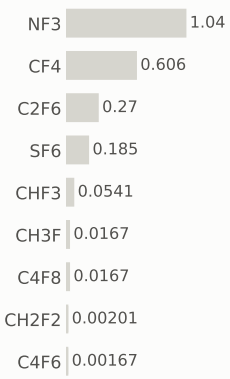

Step #1050: RIE

etch_anisotropic · RIE

1.04	177.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

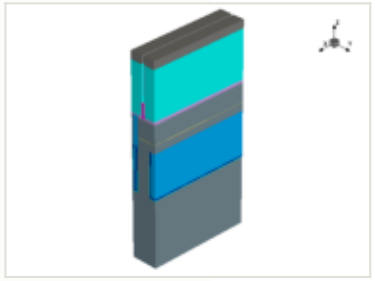

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

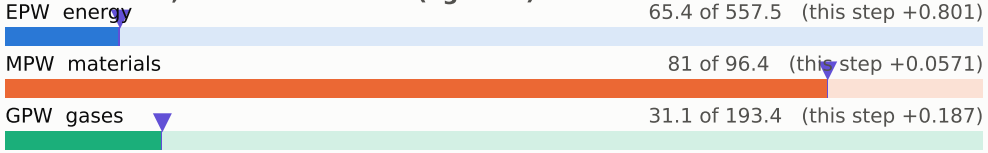

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

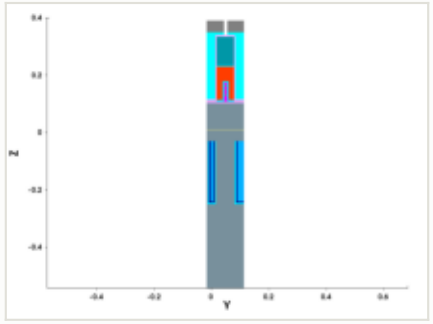

y cut at 0.049 µm

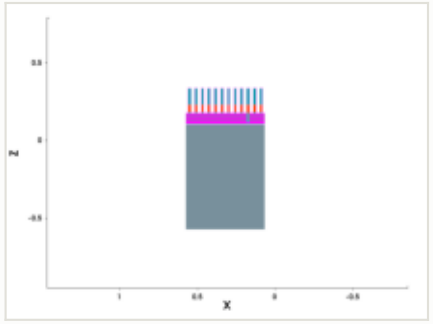

mask for this step

no mask for this step

steps by process area

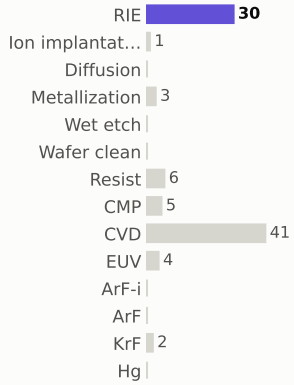

materials deposited (g)



gases emitted (g)

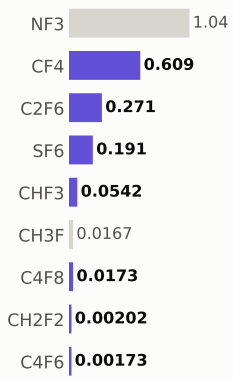

Step #1060: RIE

etch_anisotropic · RIE

1.04	178.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

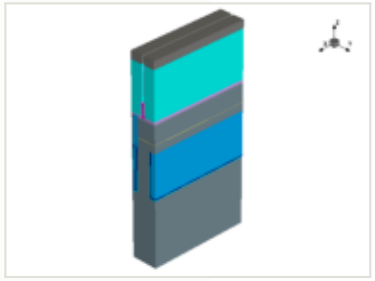

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

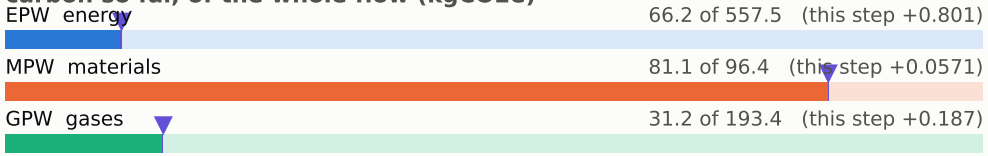

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

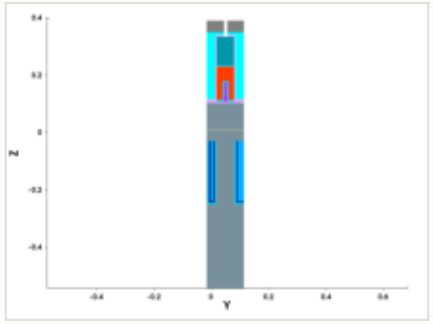

y cut at 0.049 µm

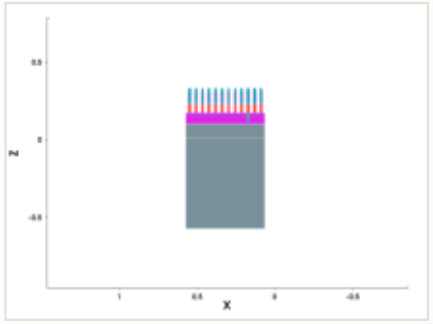

mask for this step

no mask for this step

steps by process area

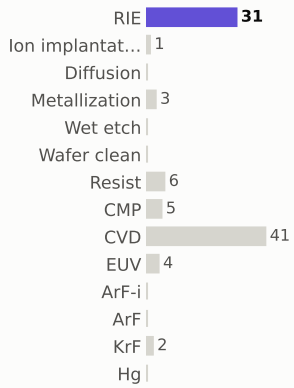

materials deposited (g)



gases emitted (g)

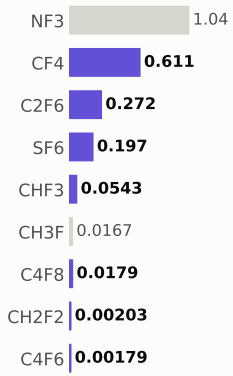

Step #1070: RIE

etch_anisotropic · RIE

1.04	179.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

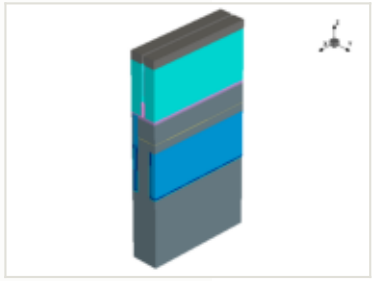

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

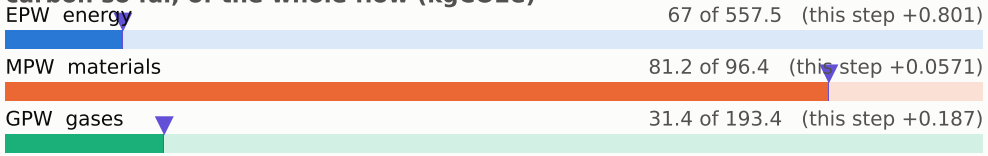

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

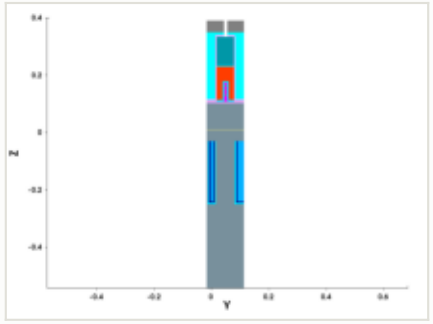

y cut at 0.049 µm

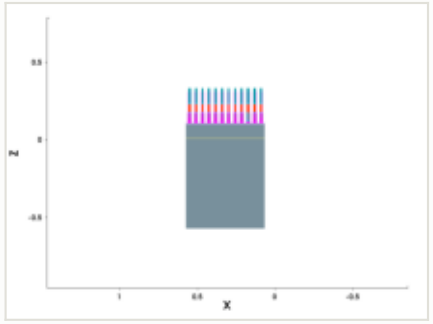

mask for this step

no mask for this step

steps by process area

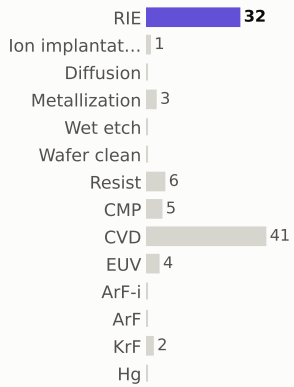

materials deposited (g)

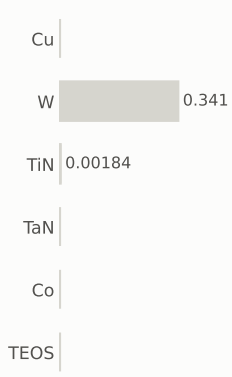

gases emitted (g)

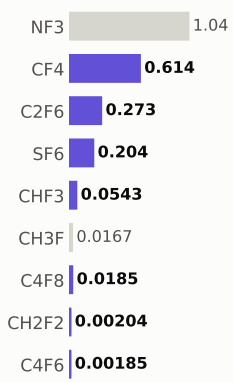

Step #1080: Wet_etch

etch_isotropic · Wet_etch

0.169	179.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

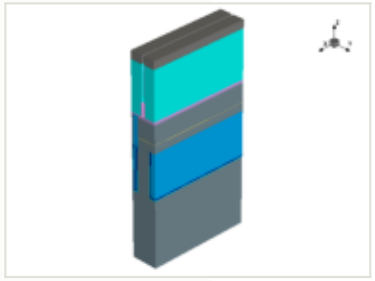

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

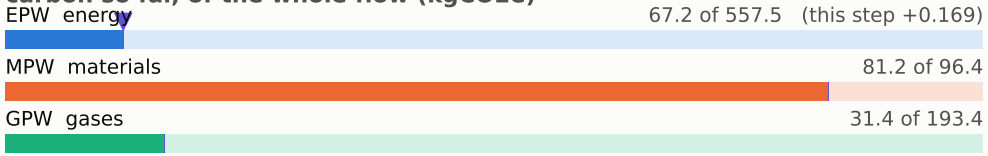

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

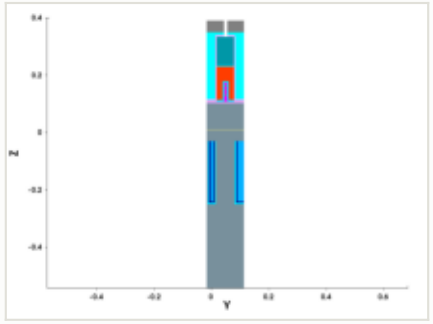

y cut at 0.049 µm

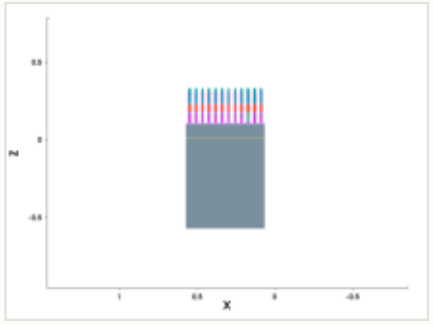

mask for this step

no mask for this step

steps by process area



materials deposited (g)

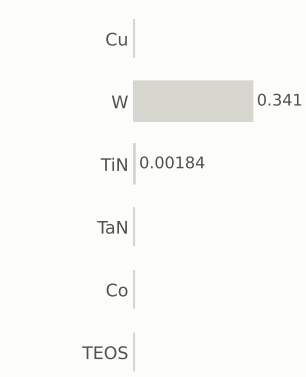

gases emitted (g)

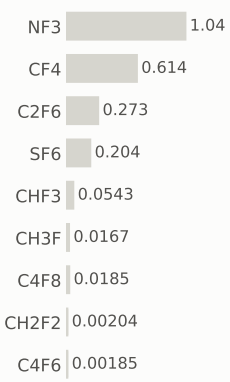

Step #1090: CVD

depo_isotropic · CVD

1.31	181.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

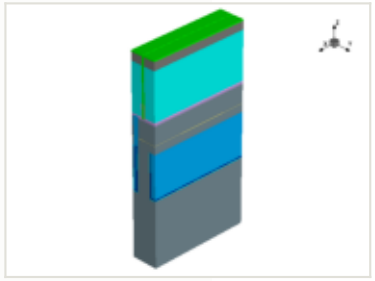

this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

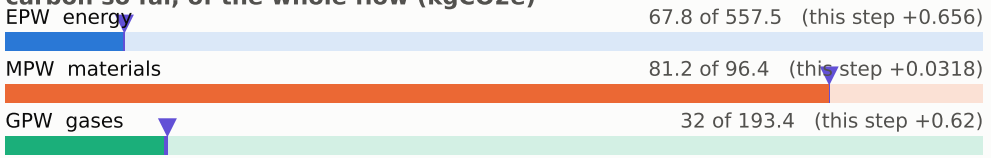

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

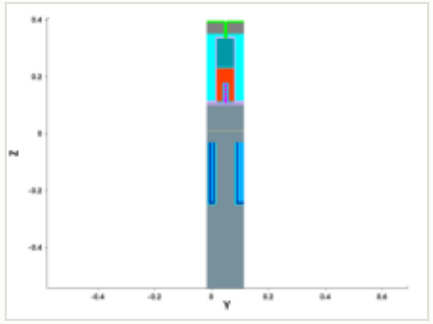

y cut at 0.049 µm

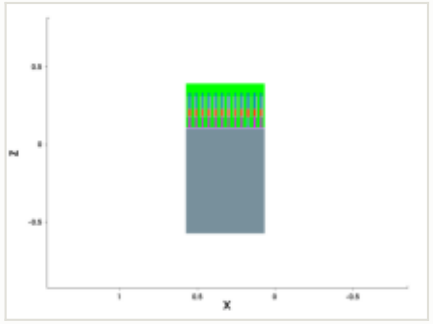

mask for this step

no mask for this step

steps by process area

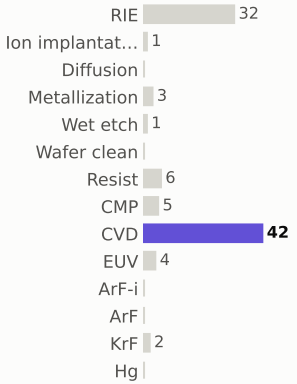

materials deposited (g)

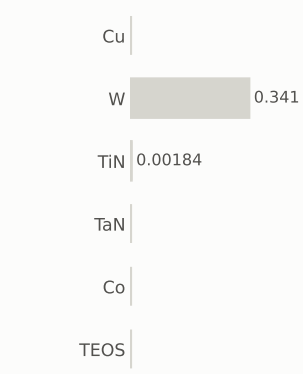

gases emitted (g)

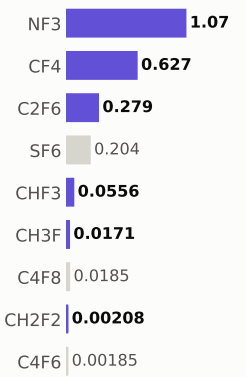

Step #1100: RIE

etch_anisotropic · RIE

1.04	182.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

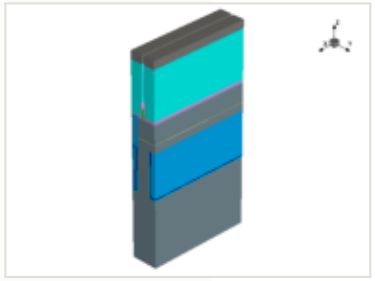

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

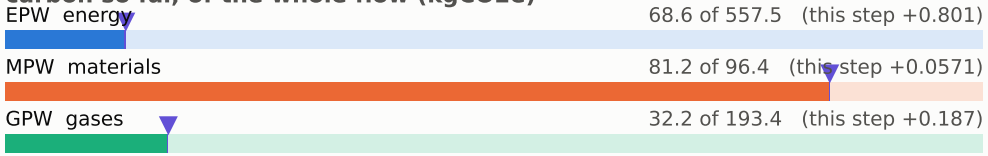

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

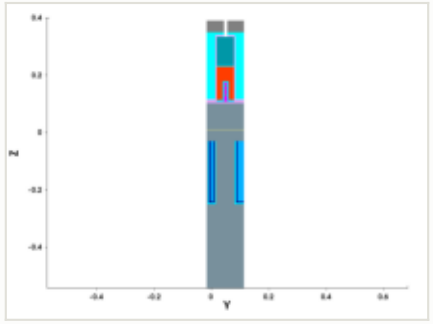

y cut at 0.049 µm

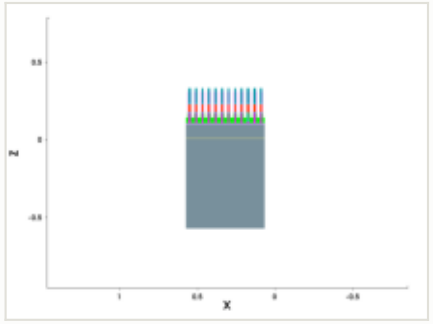

mask for this step

no mask for this step

steps by process area

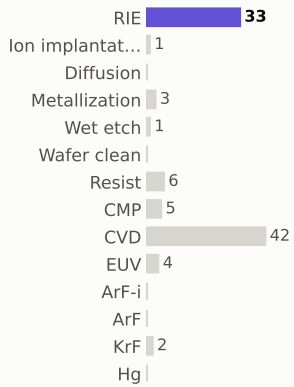

materials deposited (g)



gases emitted (g)

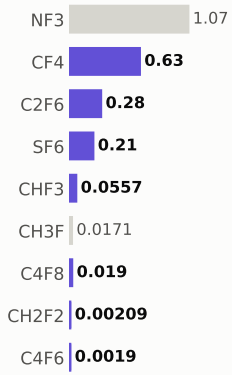

Step #1110: CMP

etch_cmp · CMP

0.169	182.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

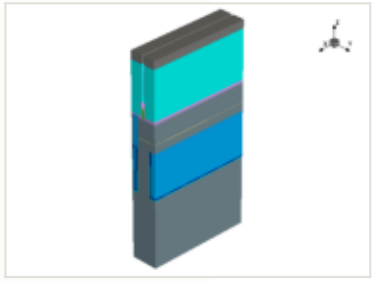

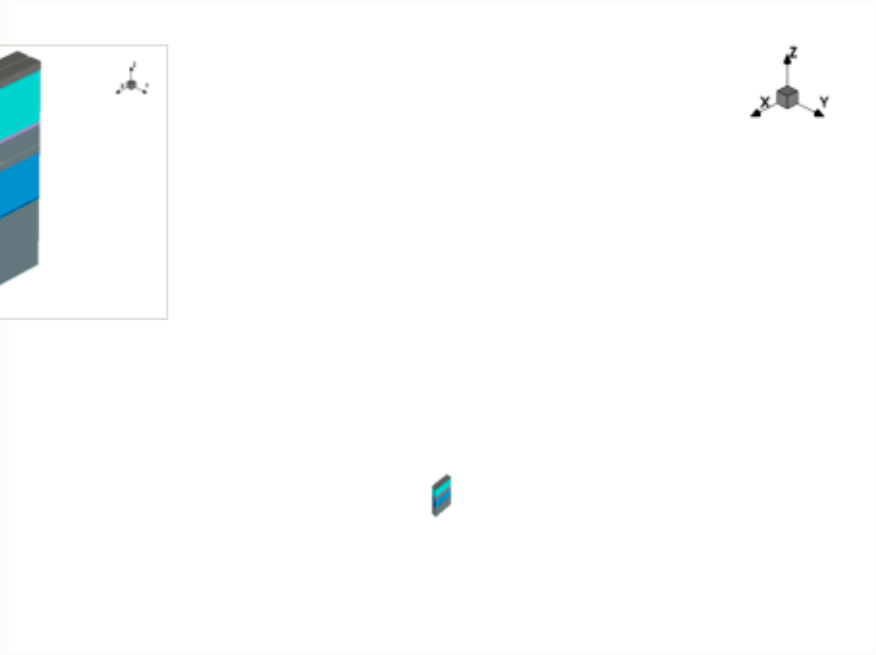

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

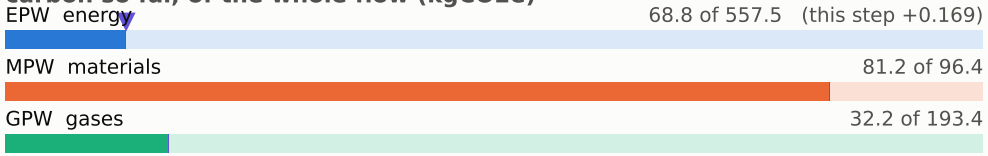

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

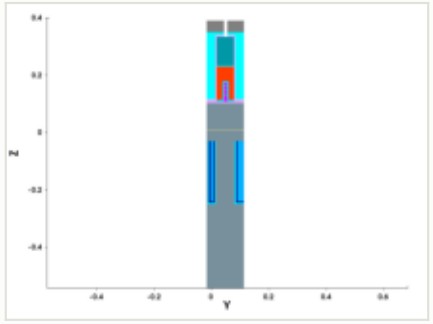

y cut at 0.049 µm

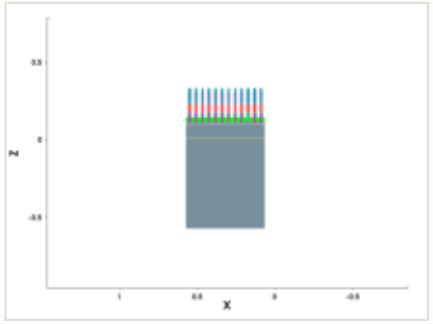

mask for this step

no mask for this step

steps by process area

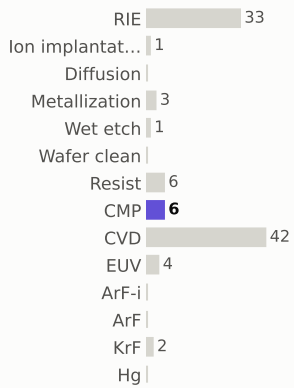

materials deposited (g)



gases emitted (g)

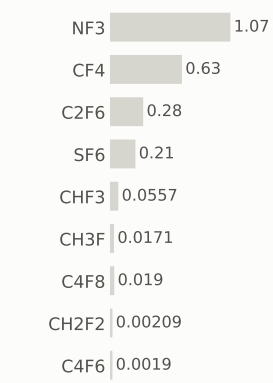

Step #1120: CVD

depo_fill · CVD

1.31	183.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

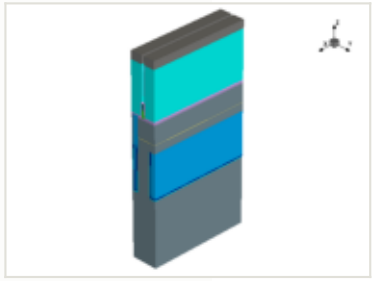

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

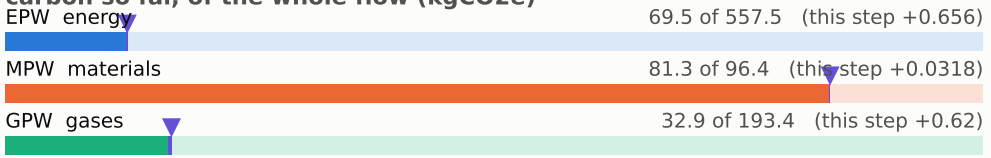

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

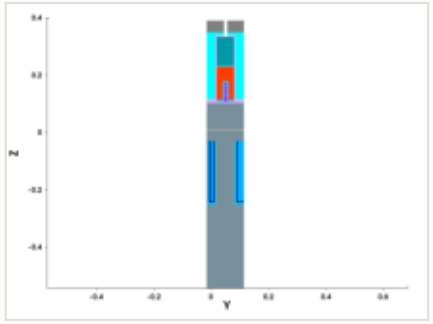

y cut at 0.049 µm

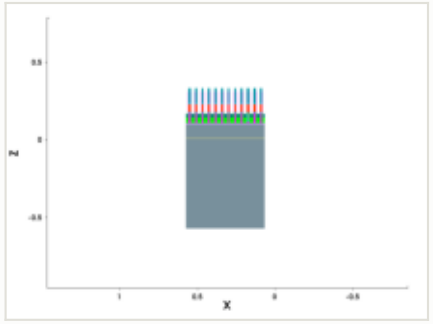

mask for this step

no mask for this step

steps by process area

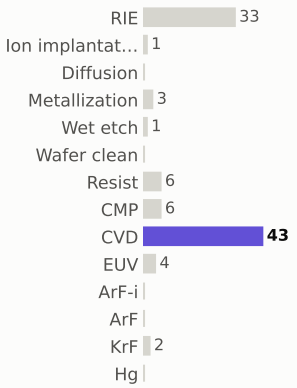

materials deposited (g)

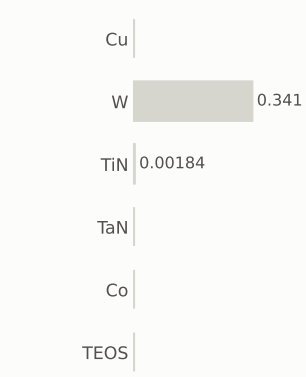

gases emitted (g)

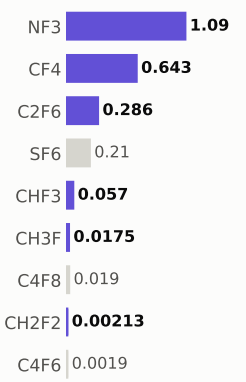

Step #1130: Resist

etch_strip · Resist

0.169	183.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

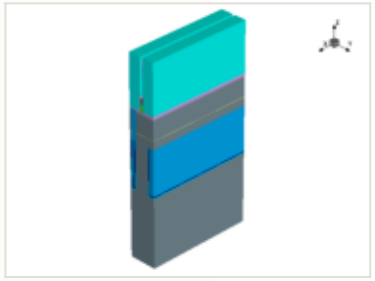

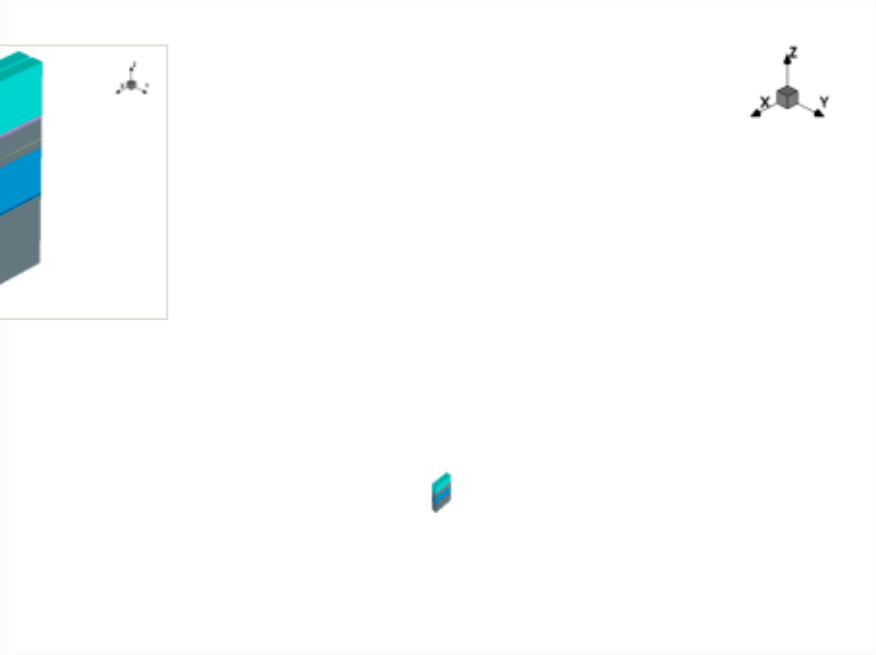

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

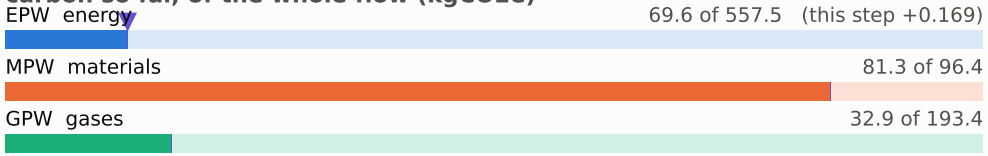

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

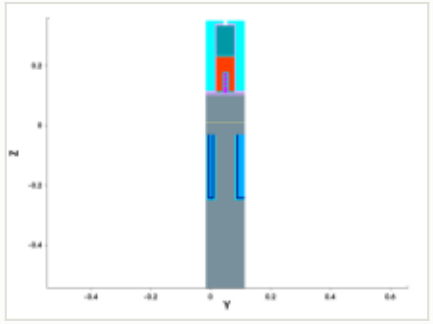

y cut at 0.049 µm

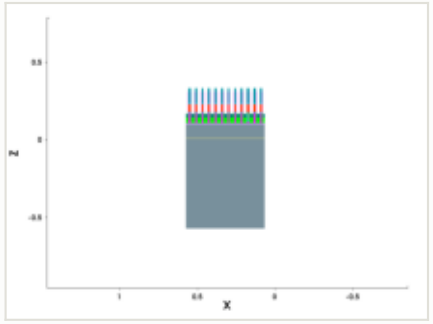

mask for this step

no mask for this step

steps by process area

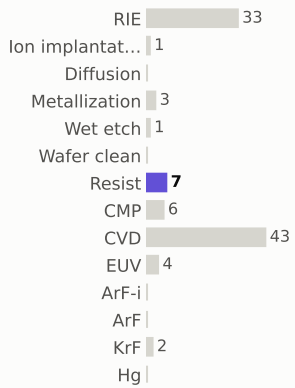

materials deposited (g)



gases emitted (g)

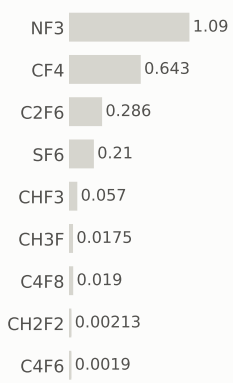

Step #1140: CVD

depo_anisotropic · CVD

1.31	185.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

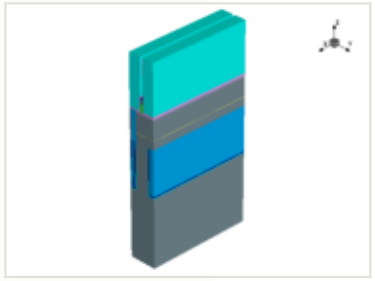

this step

process area	CVD
material	TiN
thickness	0.005 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

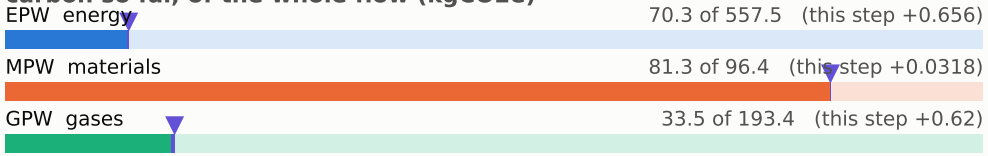

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

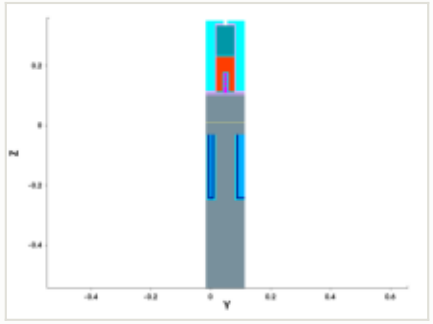

y cut at 0.049 µm

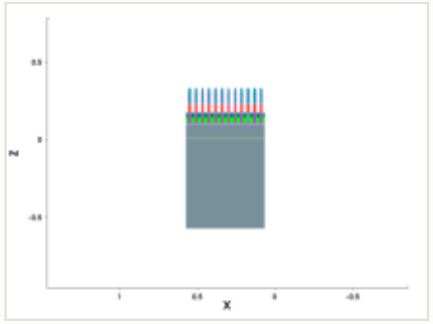

mask for this step

no mask for this step

steps by process area



materials deposited (g)

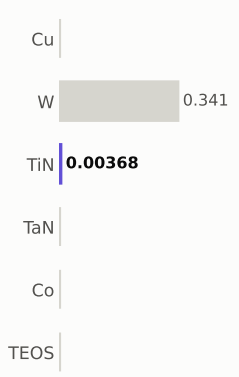

gases emitted (g)

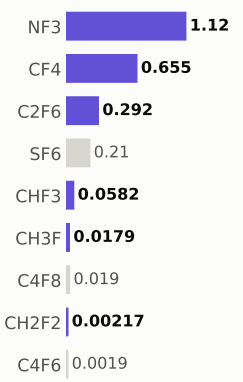

Step #1150: RIE

etch_anisotropic · RIE

1.04	186.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

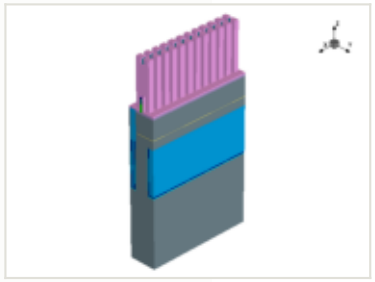

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

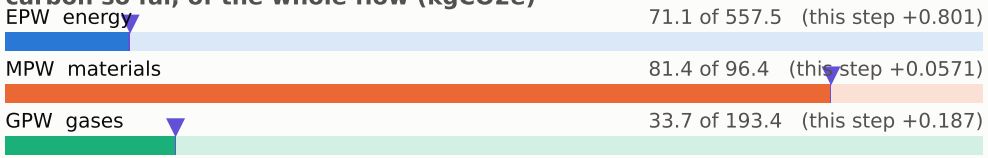

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

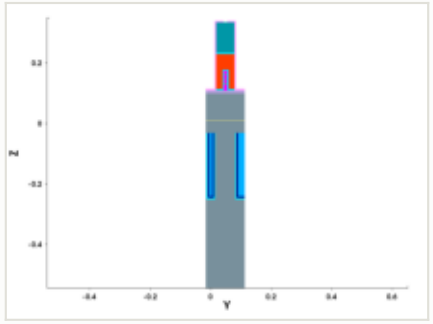

y cut at 0.049 µm

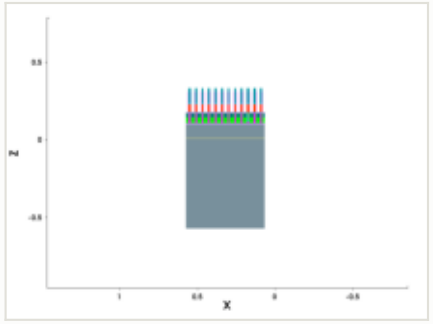

mask for this step

no mask for this step

steps by process area

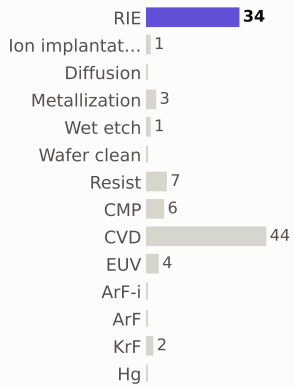

materials deposited (g)



gases emitted (g)



Step #1160: CVD

depo_isotropic · CVD

1.31	187.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.035 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

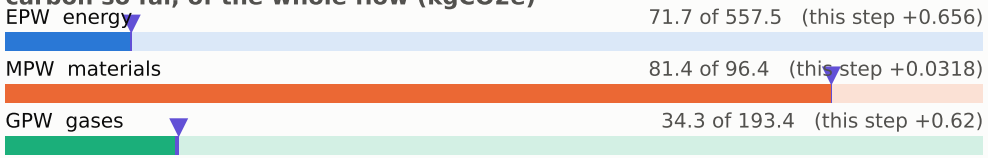

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

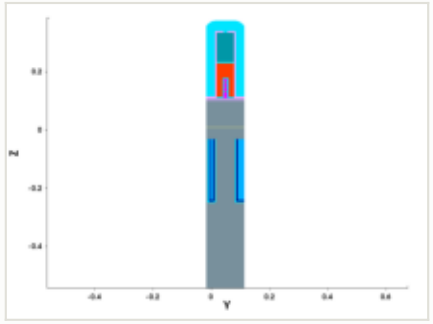

y cut at 0.049 µm

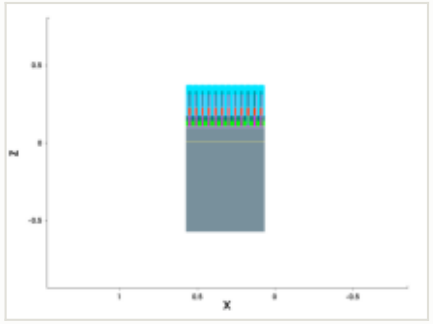

mask for this step

no mask for this step

steps by process area



materials deposited (g)

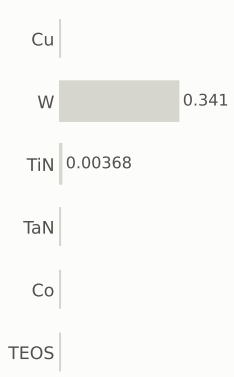

gases emitted (g)

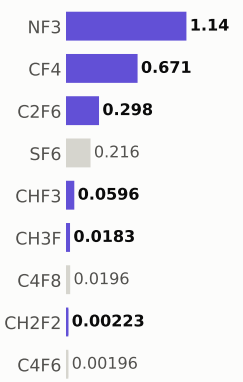

Step #1170: CMP

etch_cmp · CMP

0.169	187.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

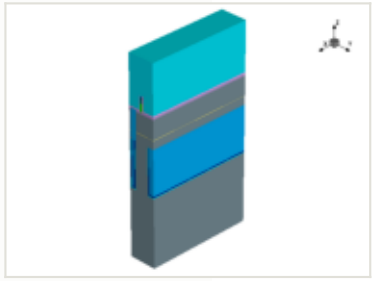

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

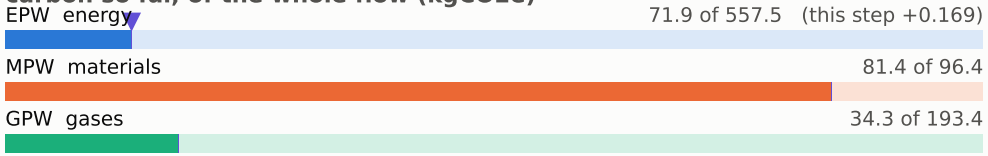

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

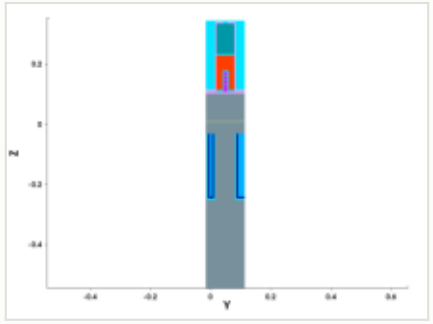

y cut at 0.049 µm

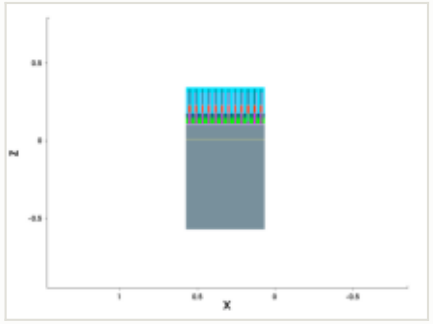

mask for this step

no mask for this step

steps by process area

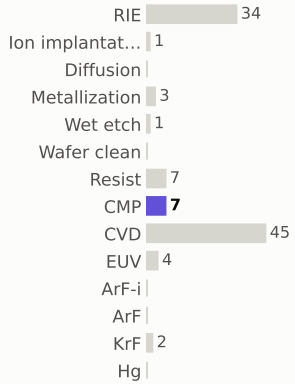

materials deposited (g)

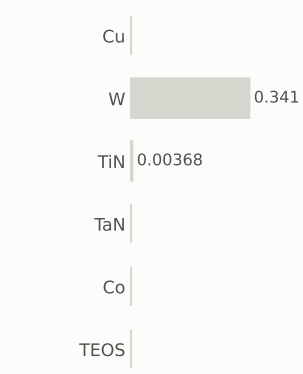

gases emitted (g)

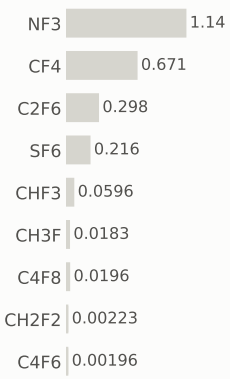

Step #1190: CVD

depo_isotropic · CVD

1.31	188.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

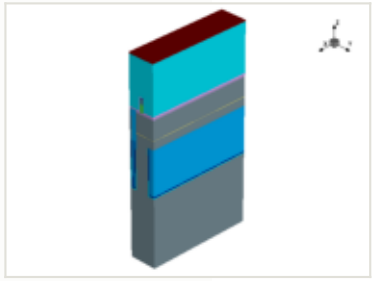

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

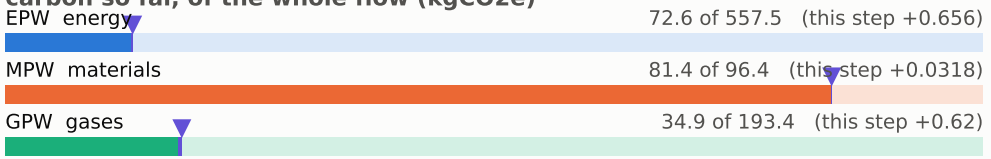

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

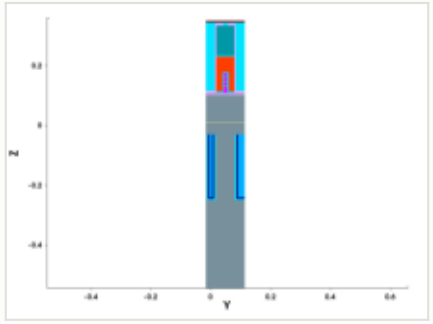

y cut at 0.049 µm

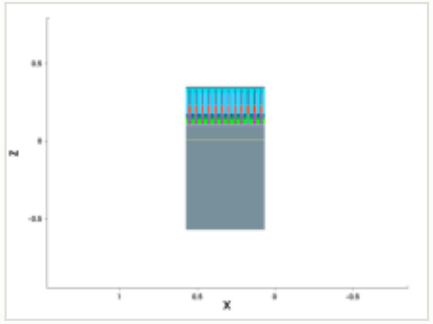

mask for this step

no mask for this step

steps by process area

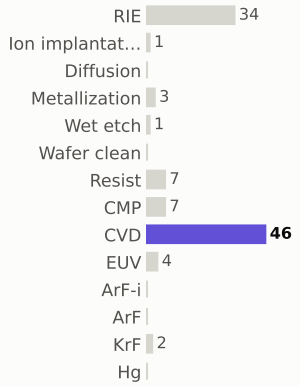

materials deposited (g)

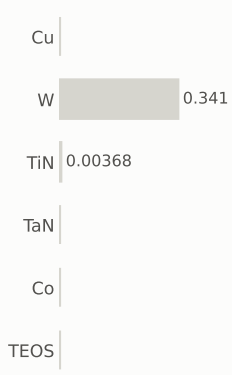

gases emitted (g)

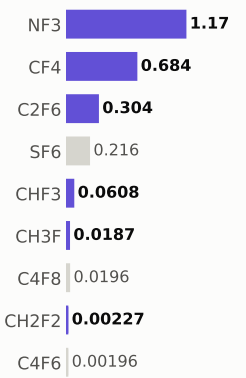

Step #1200: CVD

depo_isotropic · CVD

1.31	190.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

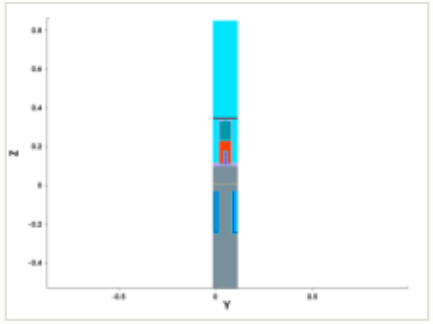

y cut at 0.049 µm

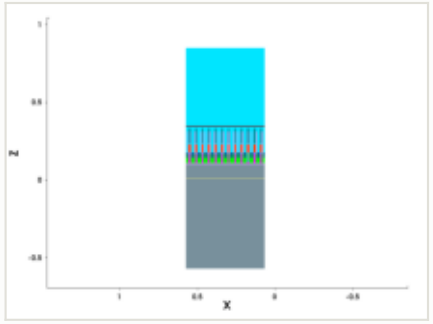

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

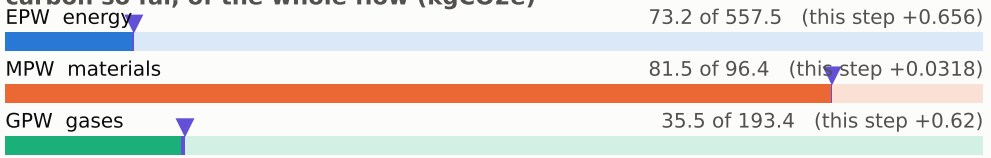

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

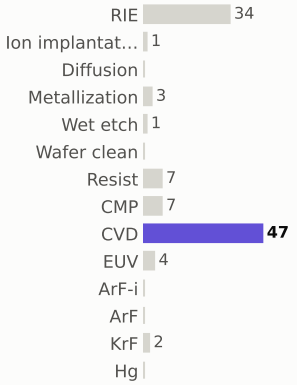

materials deposited (g)



gases emitted (g)

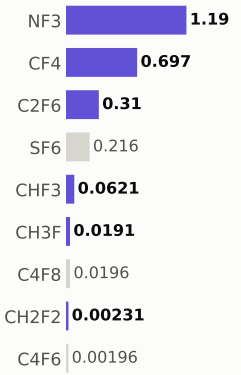

Step #1210: CMP

etch_cmp · CMP

0.169	190.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

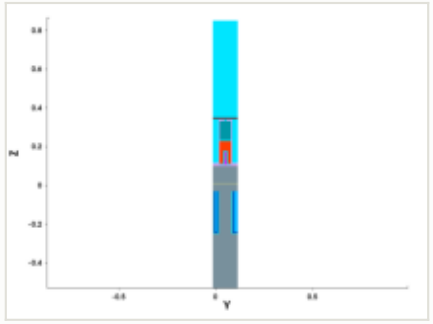

y cut at 0.049 µm

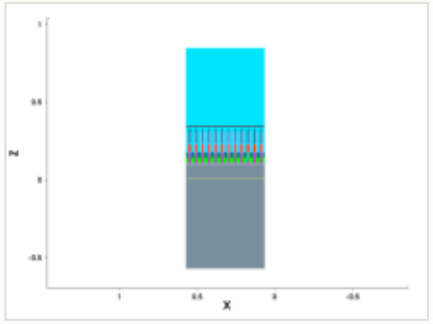

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

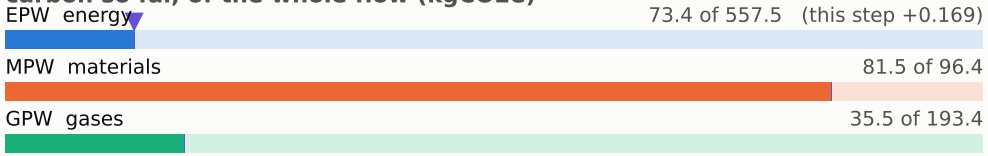

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

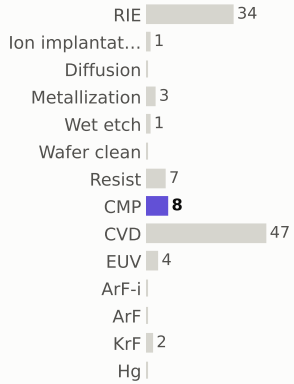

materials deposited (g)

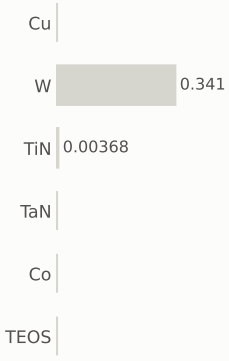

gases emitted (g)

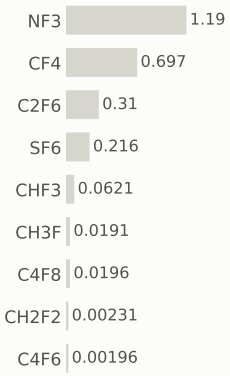

Step #1220: CMP

etch_cmp · CMP

0.169	190.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

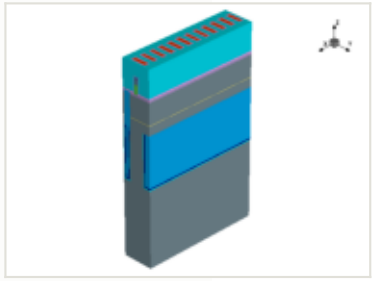

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

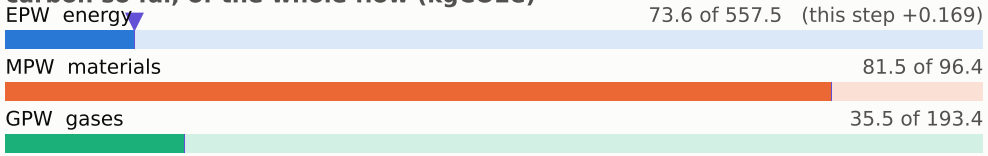

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

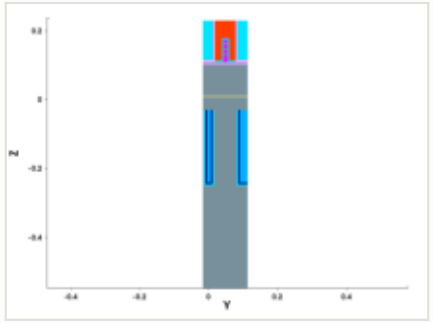

y cut at 0.049 µm

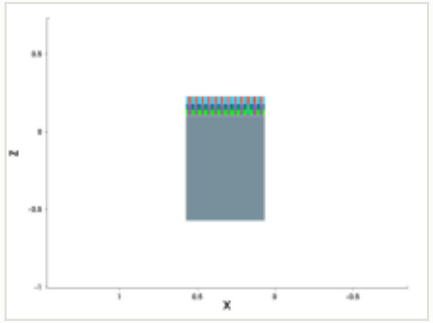

mask for this step

no mask for this step

steps by process area

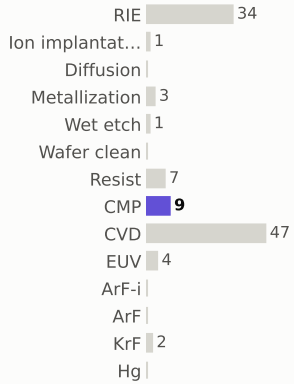

materials deposited (g)

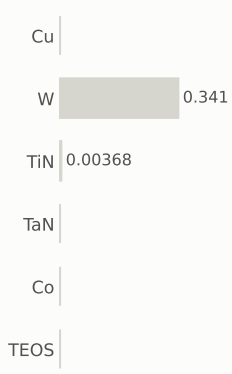

gases emitted (g)

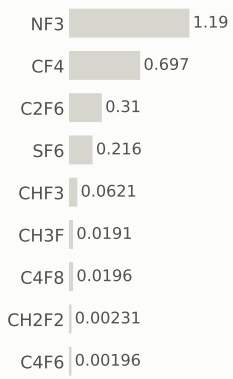

Step #1240: EUV

litho_patterning · EUV

1.96	192.5	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

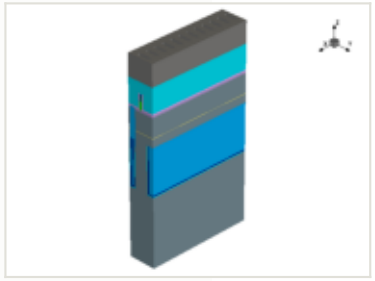

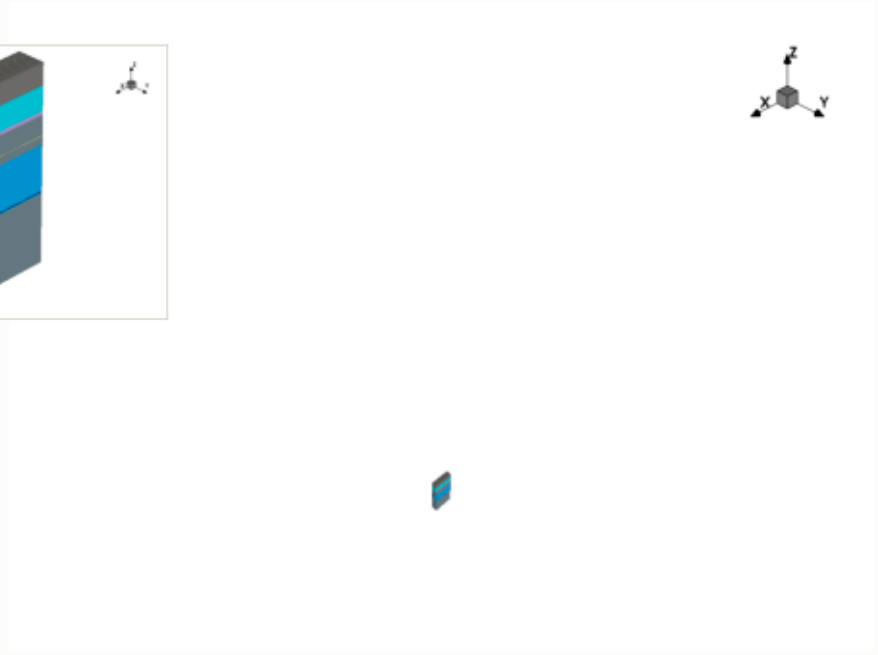

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

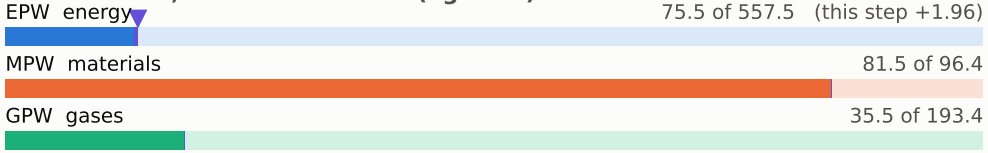

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

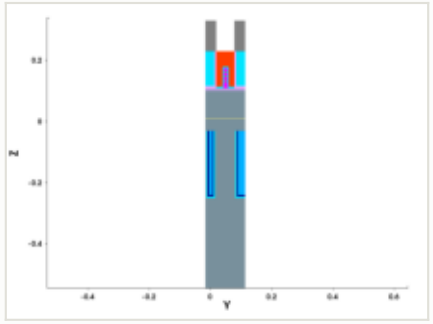

y cut at 0.049 µm

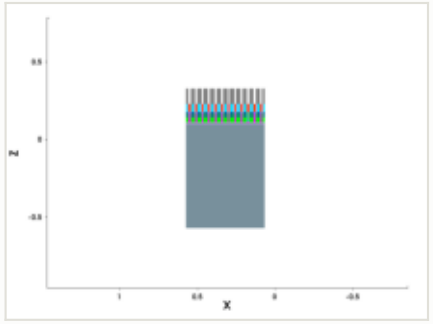

mask: layer 3:0, 3:1 (GDSII)

steps by process area

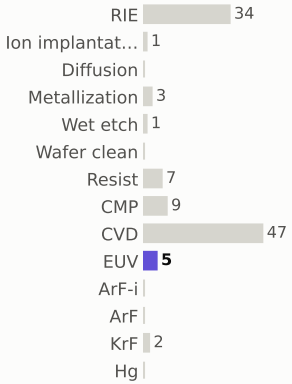

materials deposited (g)

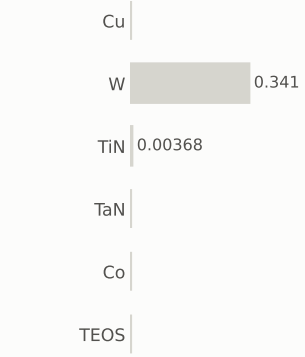

gases emitted (g)

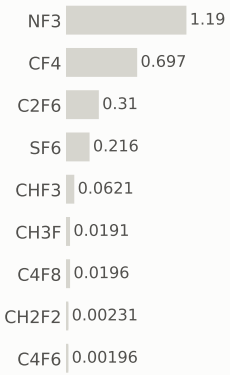

Step #1250: RIE

etch_anisotropic · RIE

1.04	193.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

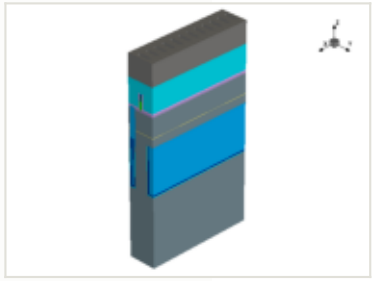

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

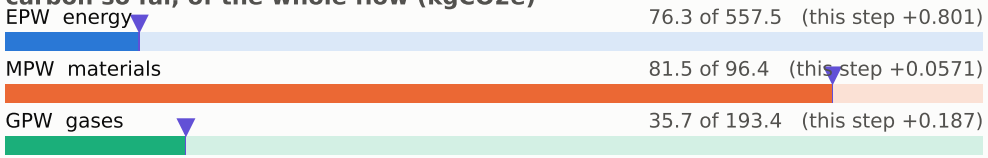

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

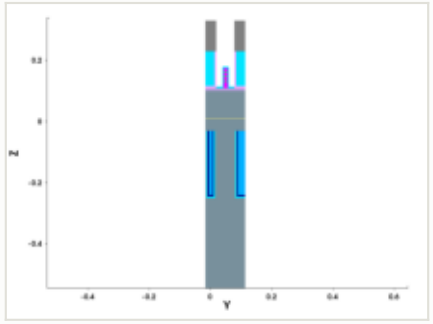

y cut at 0.049 µm

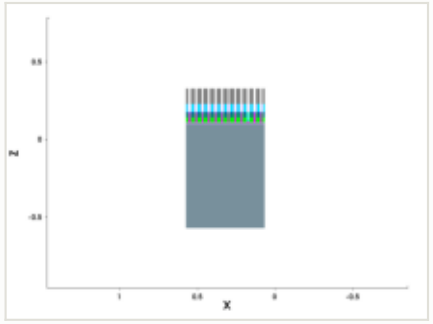

mask for this step

no mask for this step

steps by process area

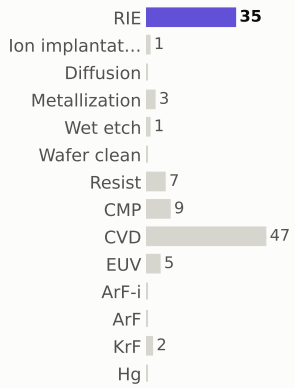

materials deposited (g)

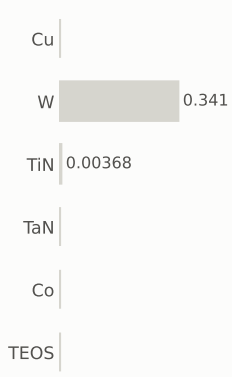

gases emitted (g)

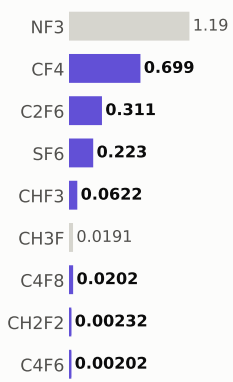

Step #1260: RIE

etch_anisotropic · RIE

1.04	194.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

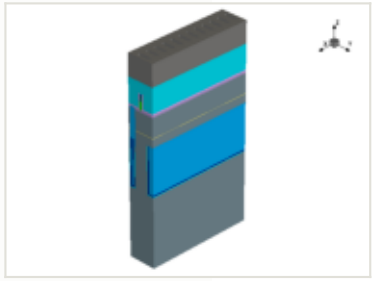

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

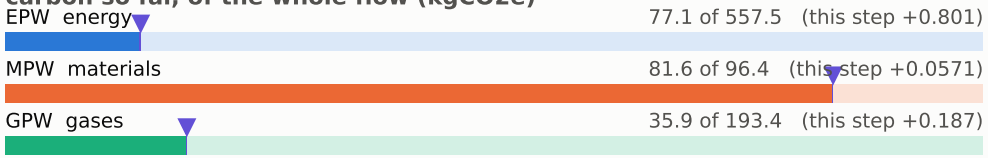

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

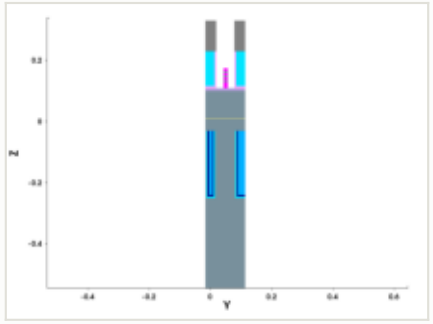

y cut at 0.049 µm

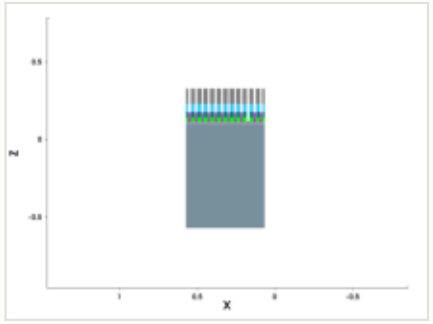

mask for this step

no mask for this step

steps by process area

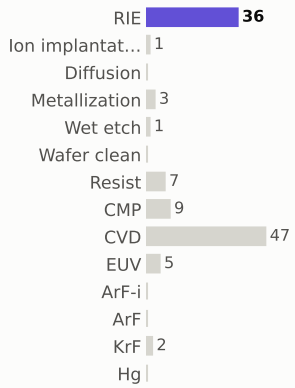

materials deposited (g)

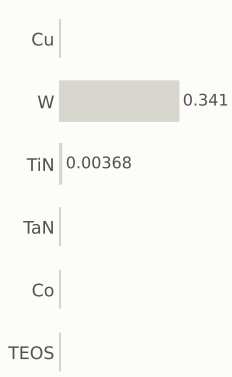

gases emitted (g)

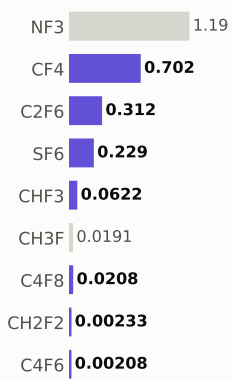

Step #1270: Resist

etch_strip · Resist

0.169	194.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

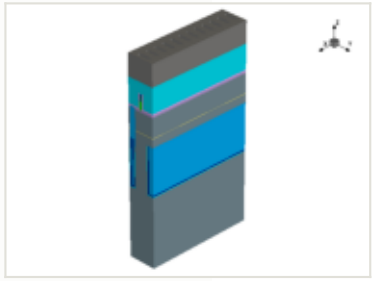

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

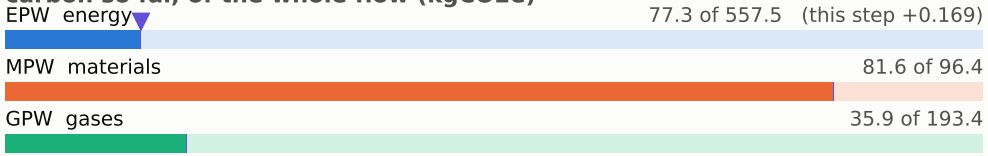

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

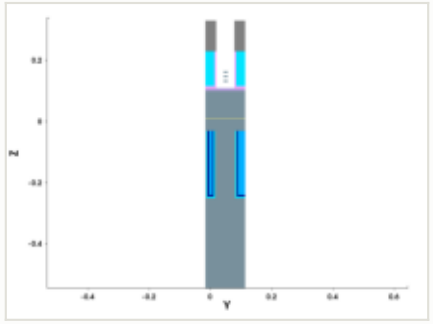

y cut at 0.049 µm

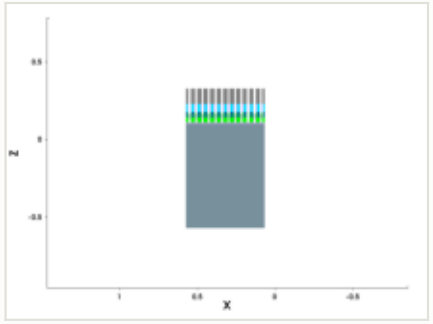

mask for this step

no mask for this step

steps by process area

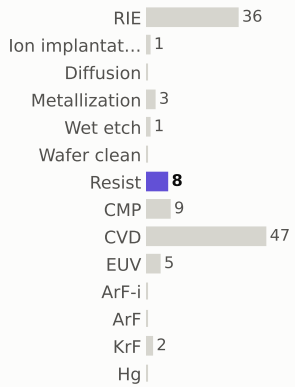

materials deposited (g)

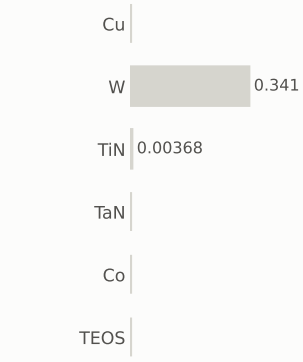

gases emitted (g)

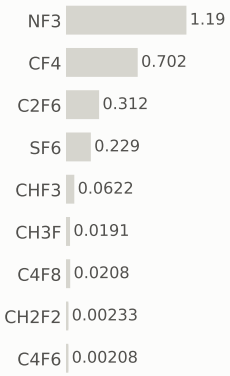

Step #1280: CVD

depo_fill · CVD

1.31	196.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

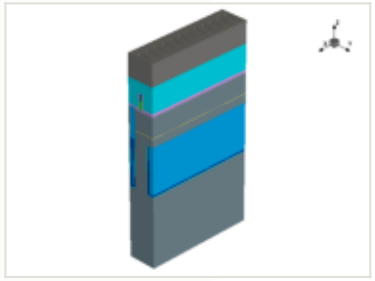

this step

process area	CVD
material	—
thickness	-0.053 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

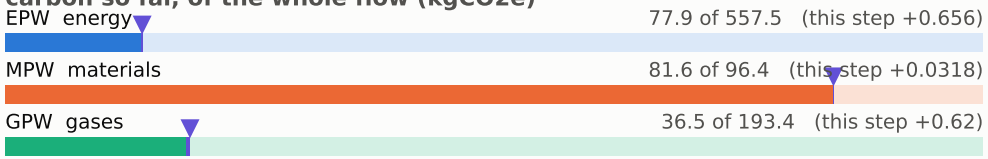

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

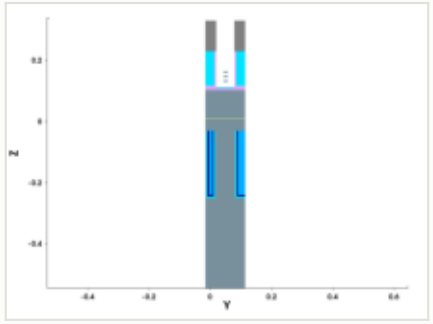

y cut at 0.049 µm

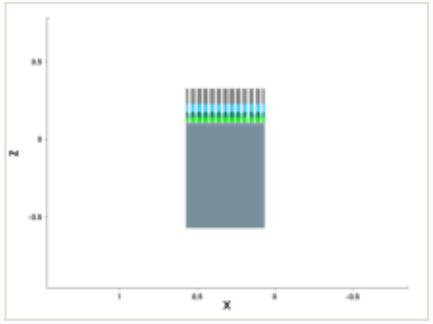

mask for this step

no mask for this step

steps by process area

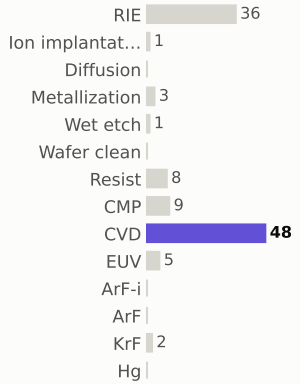

materials deposited (g)

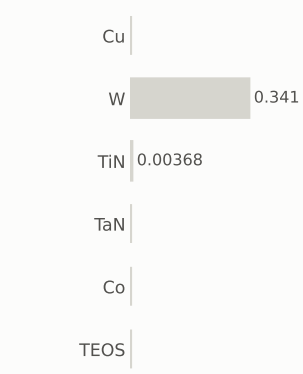

gases emitted (g)

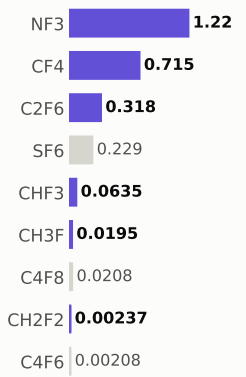

Step #1290: CVD

depo_isotropic · CVD

1.31	197.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

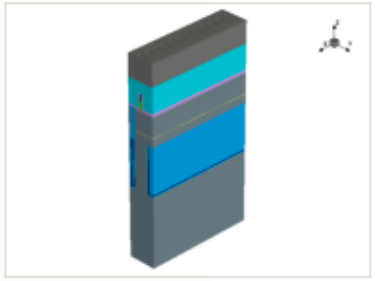

this step

process area	CVD
material	—
thickness	0.0028 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

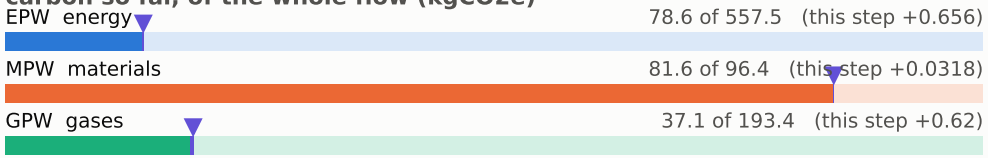

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

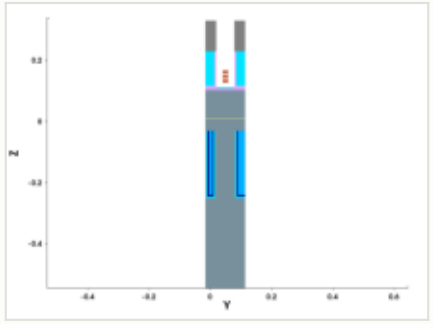

y cut at 0.049 µm

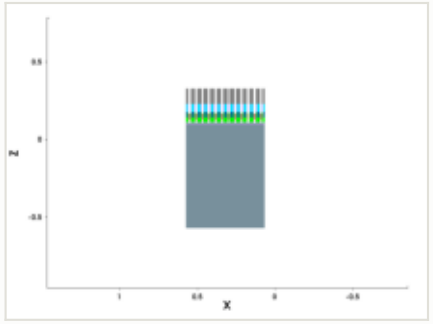

mask for this step

no mask for this step

steps by process area

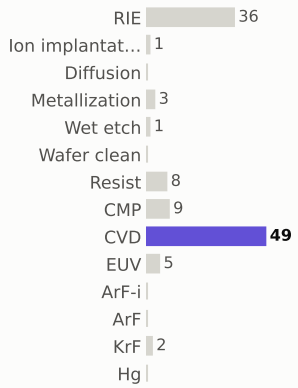

materials deposited (g)

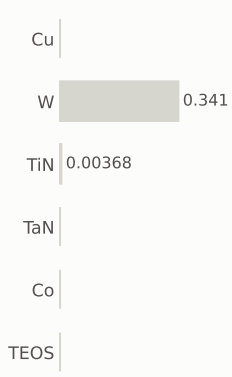

gases emitted (g)

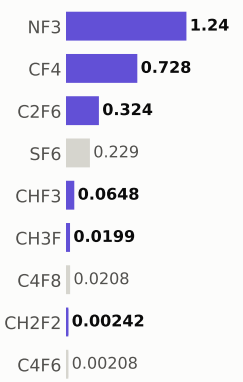

Step #1300: Wet_etch

etch_isotropic · Wet_etch

0.169	197.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

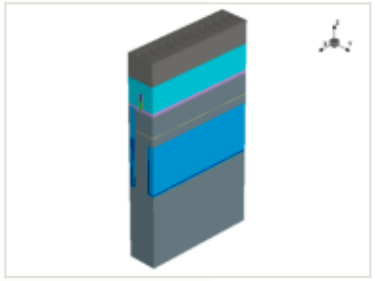

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

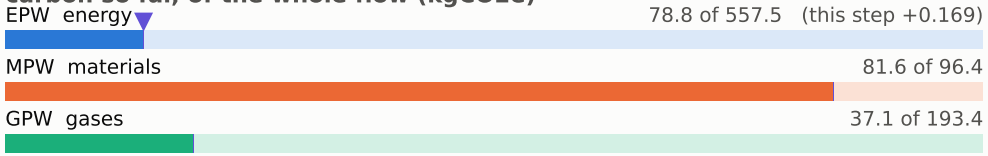

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

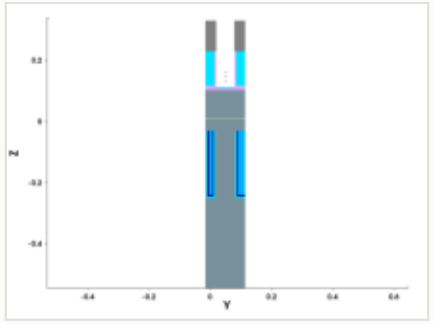

y cut at 0.049 µm

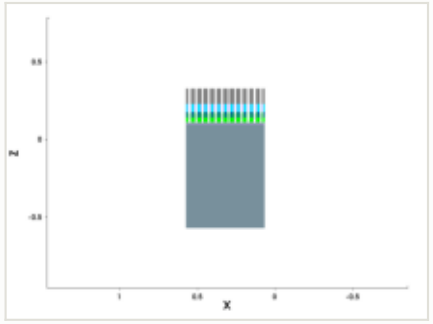

mask for this step

no mask for this step

steps by process area

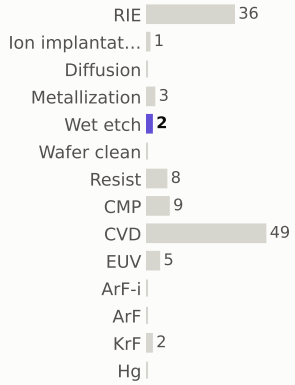

materials deposited (g)



gases emitted (g)

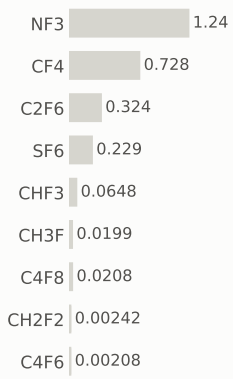

Step #1310: CVD

depo_isotropic · CVD

1.31	198.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

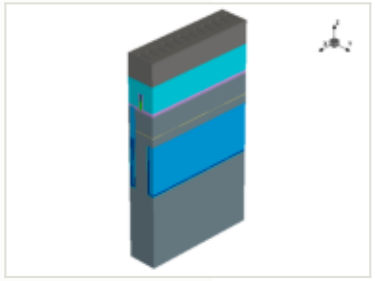

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.0015 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

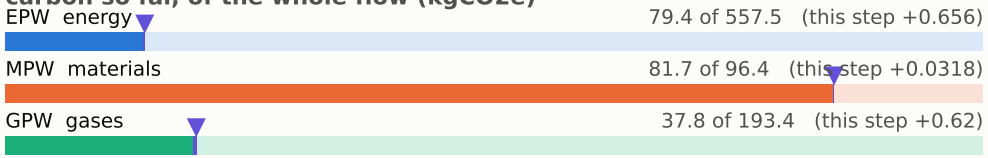

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

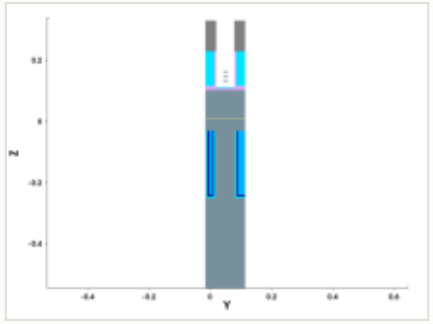

y cut at 0.049 µm

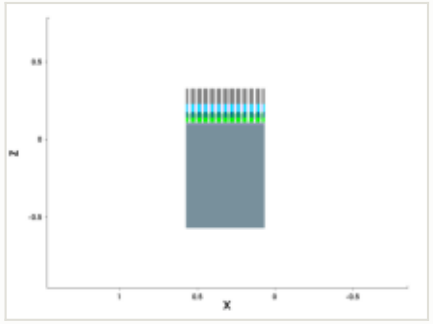

mask for this step

no mask for this step

steps by process area

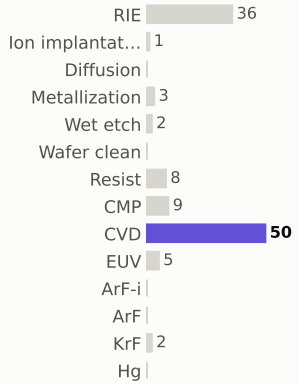

materials deposited (g)

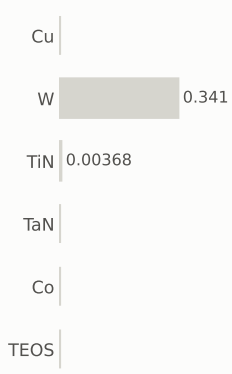

gases emitted (g)

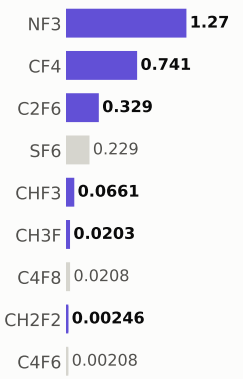

Step #1320: CVD

depo_isotropic · CVD

1.31	200.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

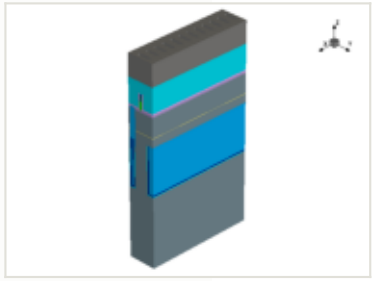

this step

process area	CVD
material	—
thickness	0.0005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

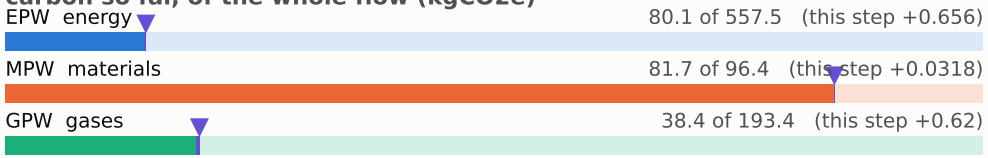

embodied carbon up to each step (kgCO2e per wafer)

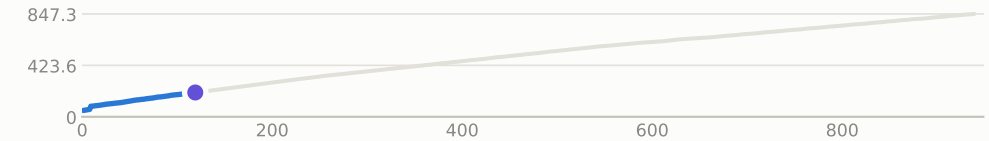

x cut at 0.385 µm

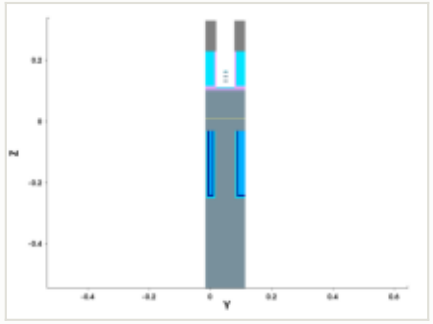

y cut at 0.049 µm

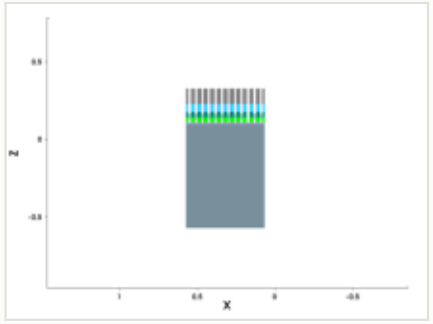

mask for this step

no mask for this step

steps by process area

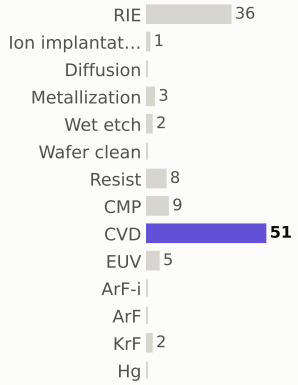

materials deposited (g)

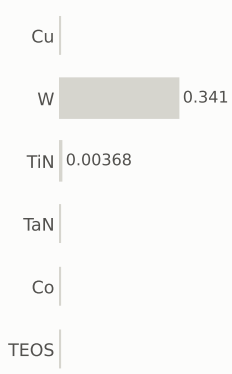

gases emitted (g)

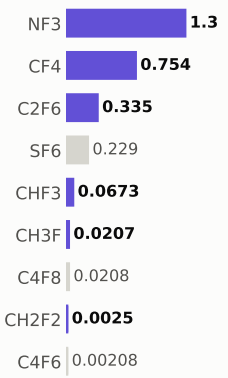

Step #1330: CVD

depo_isotropic · CVD

1.31	201.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

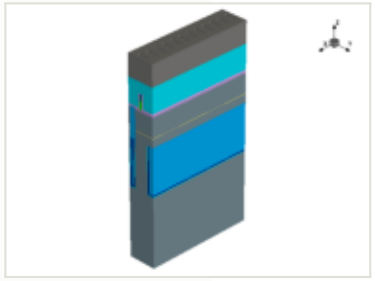

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

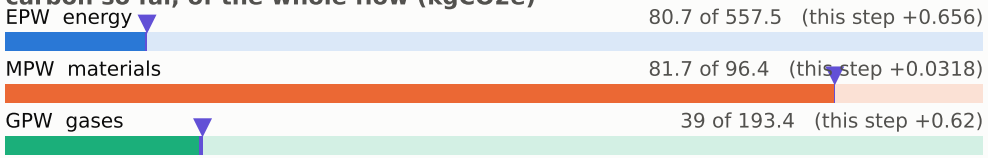

embodied carbon up to each step (kgCO2e per wafer)

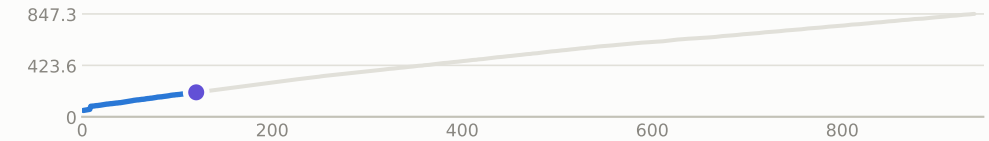

x cut at 0.385 µm

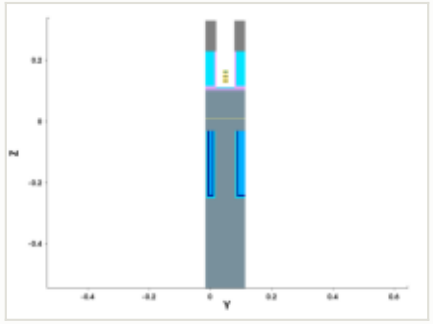

y cut at 0.049 µm

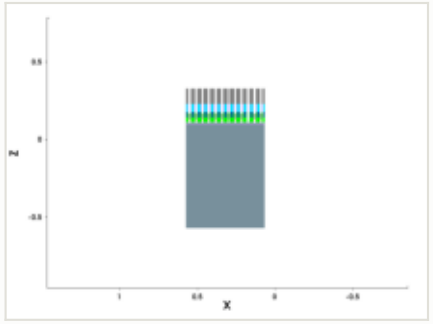

mask for this step

no mask for this step

steps by process area

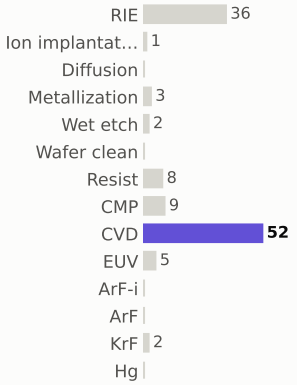

materials deposited (g)

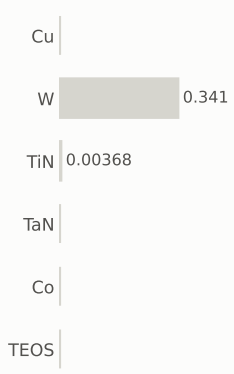

gases emitted (g)

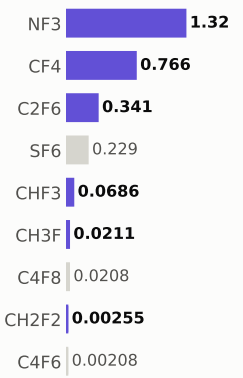

Step #1340: CVD

depo_isotropic · CVD

1.31	202.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

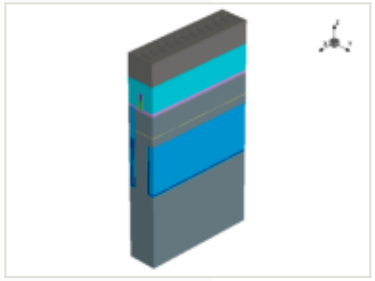

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.0005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

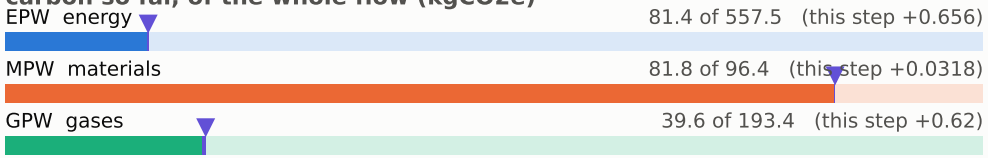

embodied carbon up to each step (kgCO2e per wafer)

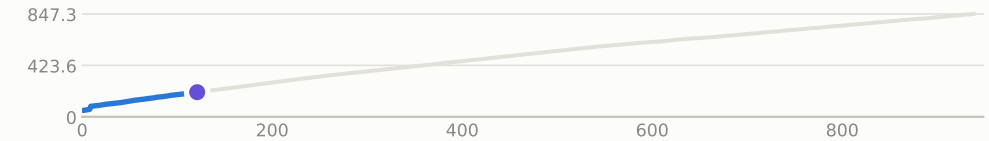

x cut at 0.385 µm

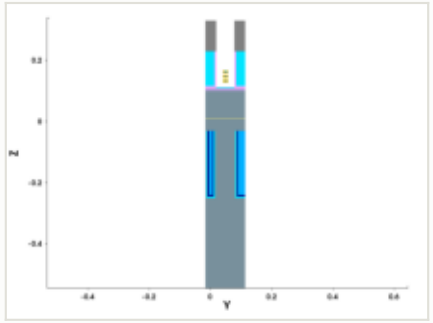

y cut at 0.049 µm

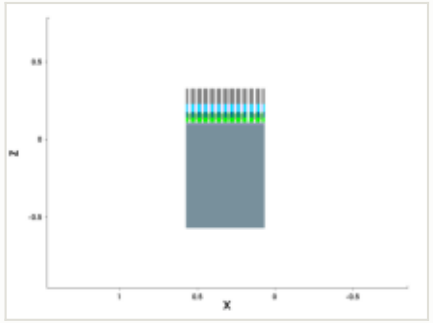

mask for this step

no mask for this step

steps by process area

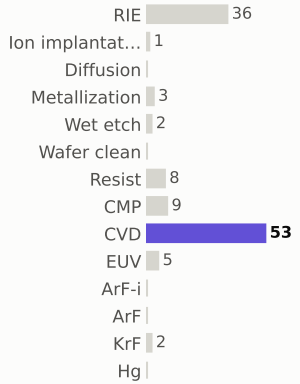

materials deposited (g)

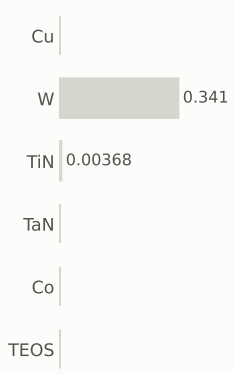

gases emitted (g)

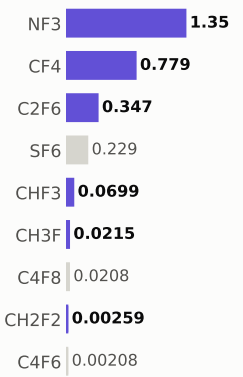

Step #1347: CVD

depo_isotropic · CVD

1.31	204.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

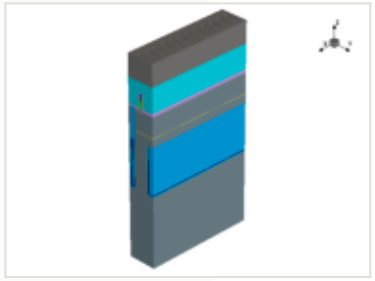

this step

process area	CVD
material	—
thickness	0.0005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

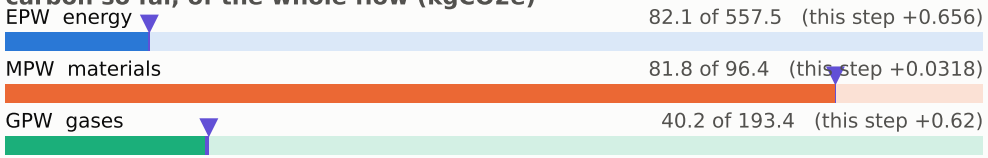

embodied carbon up to each step (kgCO2e per wafer)

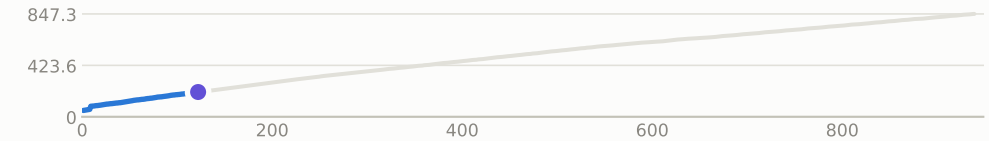

x cut at 0.385 µm

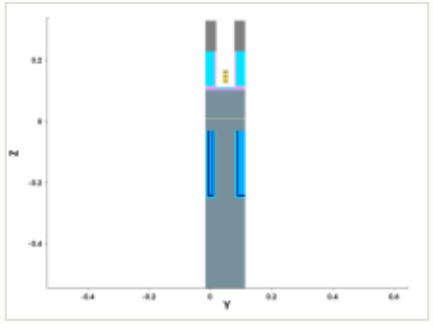

y cut at 0.049 µm

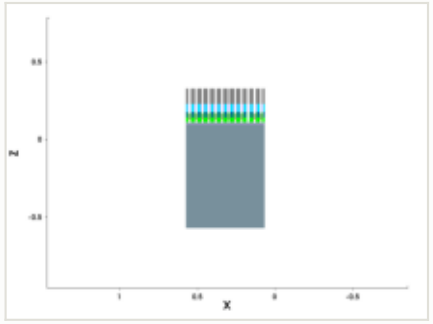

mask for this step

no mask for this step

steps by process area

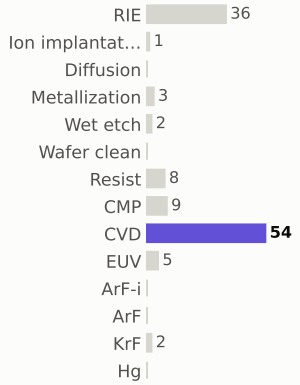

materials deposited (g)

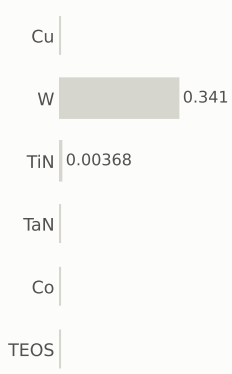

gases emitted (g)

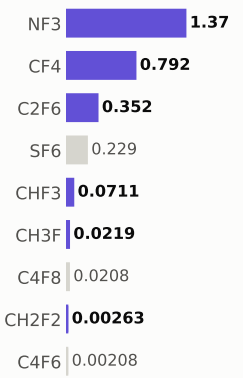

Step #1354: CMP

etch_cmp · CMP

0.169	204.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

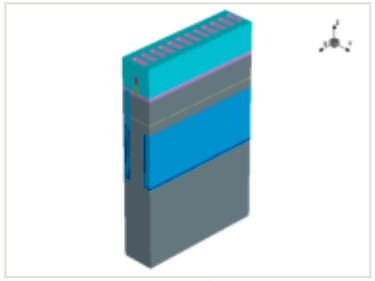

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

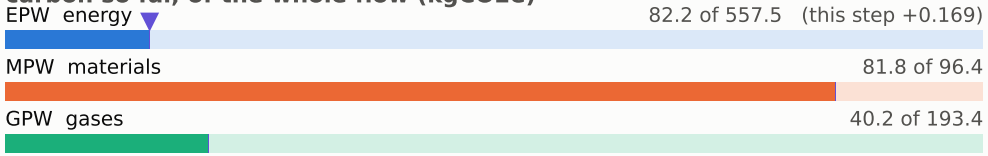

embodied carbon up to each step (kgCO2e per wafer)

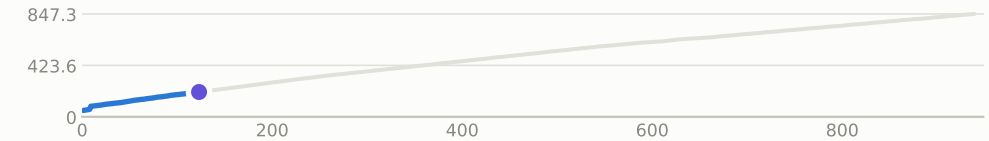

x cut at 0.385 µm

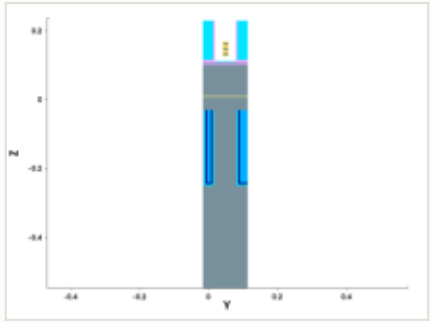

y cut at 0.049 µm

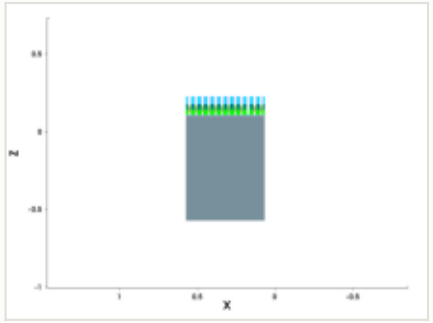

mask for this step

no mask for this step

steps by process area

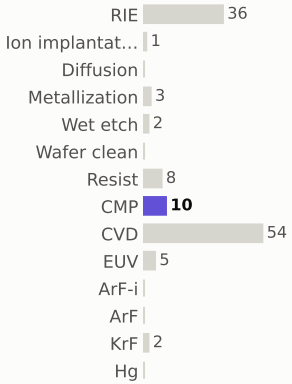

materials deposited (g)



gases emitted (g)

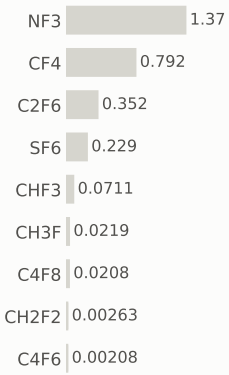

Step #1361: Resist

etch_strip · Resist

0.169	204.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

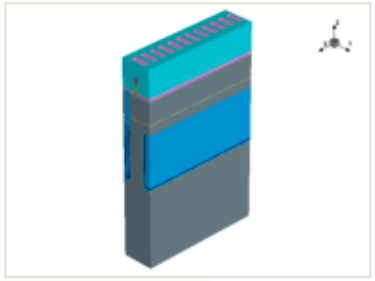

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

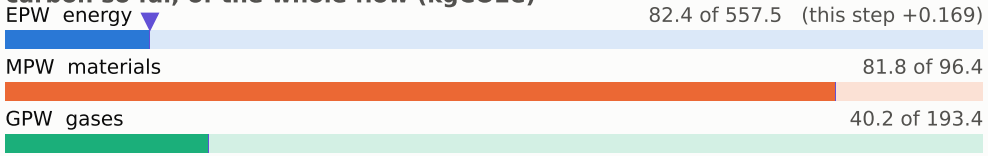

embodied carbon up to each step (kgCO2e per wafer)

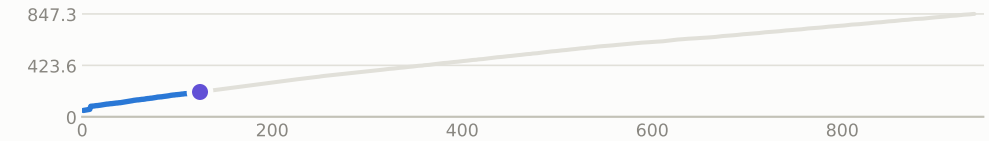

x cut at 0.385 µm

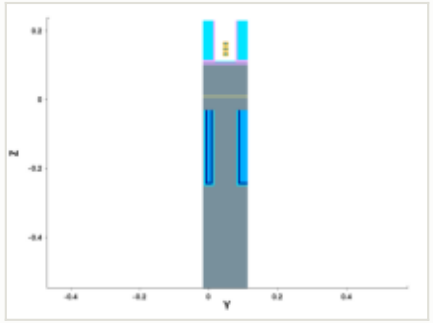

y cut at 0.049 µm

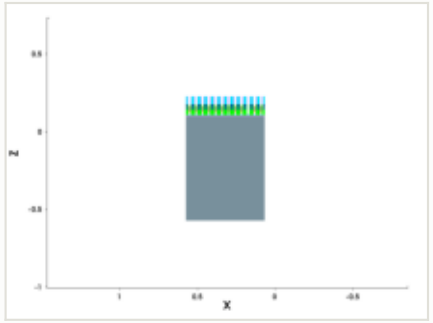

mask for this step

no mask for this step

steps by process area

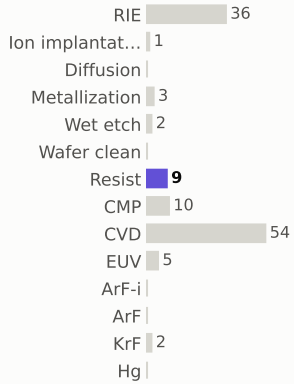

materials deposited (g)

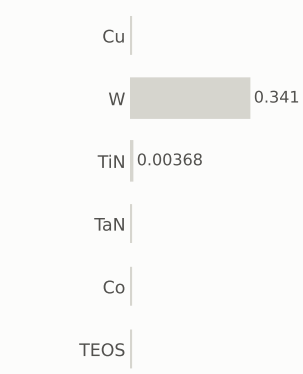

gases emitted (g)



Step #1368: CVD

depo_isotropic · CVD

1.31	205.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

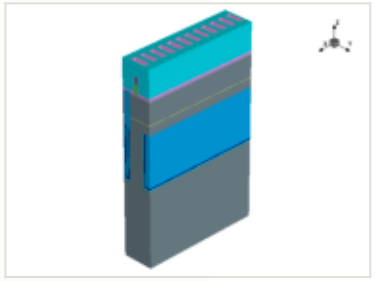

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.0005 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

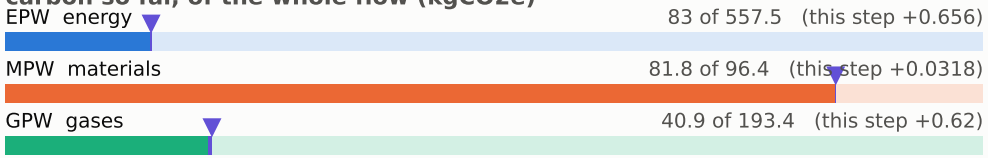

embodied carbon up to each step (kgCO2e per wafer)

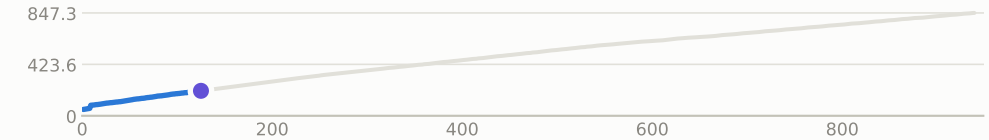

x cut at 0.385 µm

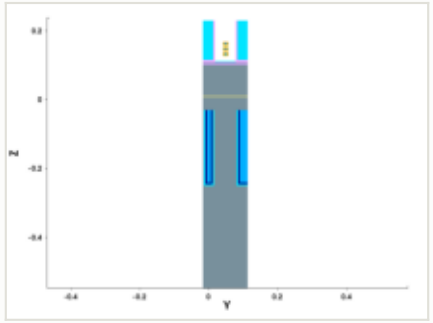

y cut at 0.049 µm

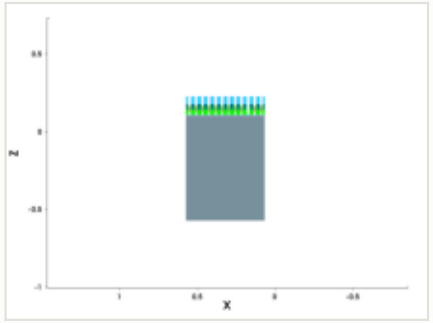

mask for this step

no mask for this step

steps by process area

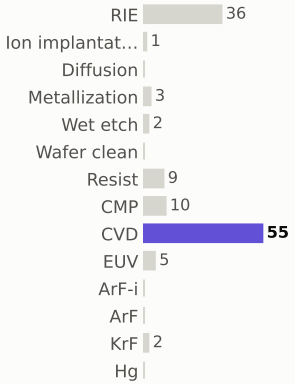

materials deposited (g)

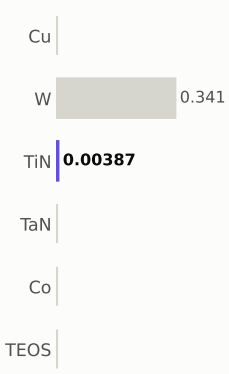

gases emitted (g)

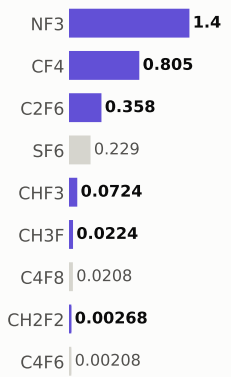

Step #1375: Metallization

depo_fill · Metallization

1.21	206.9	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

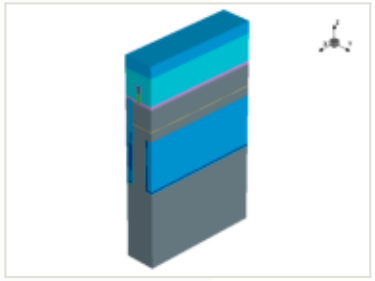

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

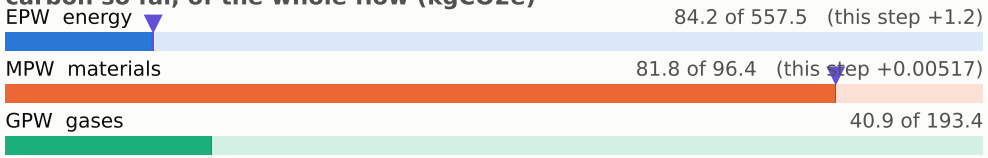

embodied carbon up to each step (kgCO2e per wafer)

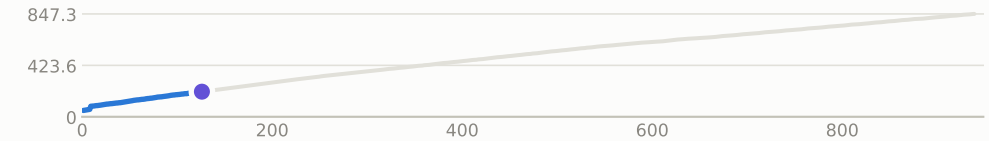

x cut at 0.385 µm

no cut image (make spx)

y cut at 0.049 µm

no cut image (make spx)

mask for this step

no mask for this step

steps by process area

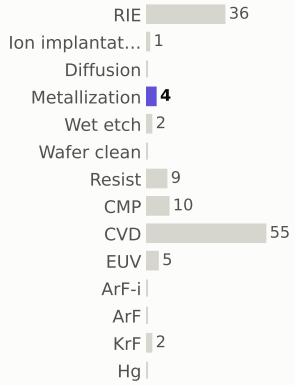

materials deposited (g)

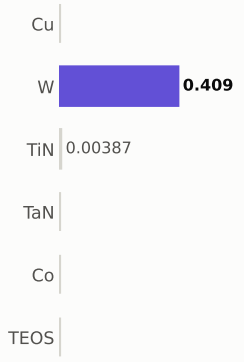

gases emitted (g)

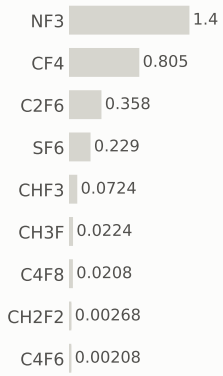

Step #1382: CMP

etch_cmp · CMP

0.169	207.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

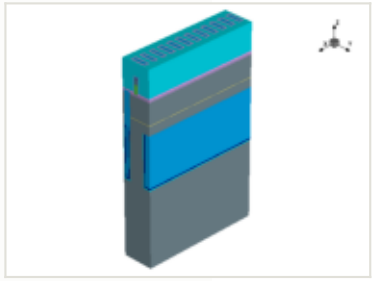

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

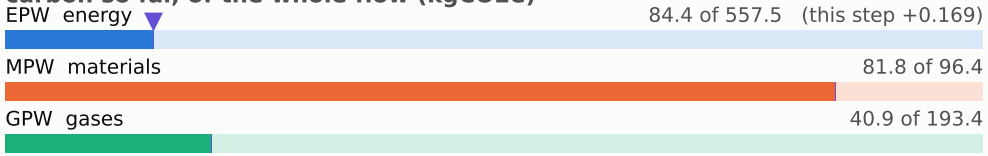

embodied carbon up to each step (kgCO2e per wafer)

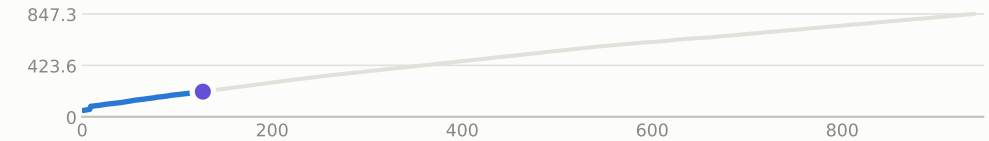

x cut at 0.385 µm

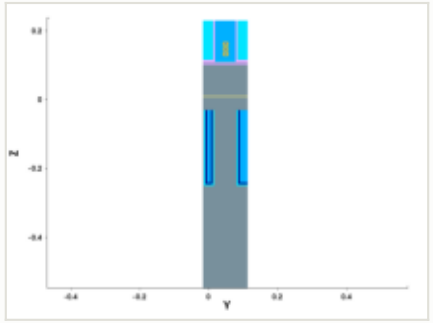

y cut at 0.049 µm

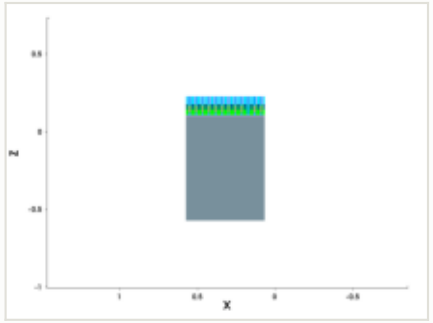

mask for this step

no mask for this step

steps by process area

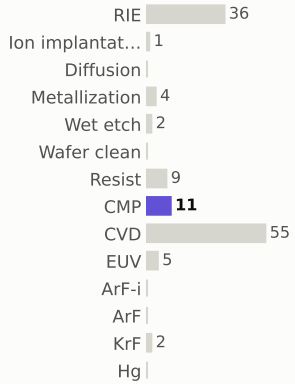

materials deposited (g)

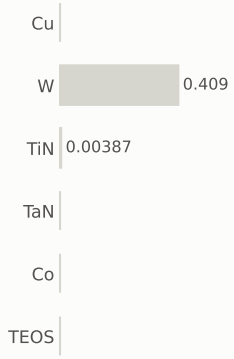

gases emitted (g)

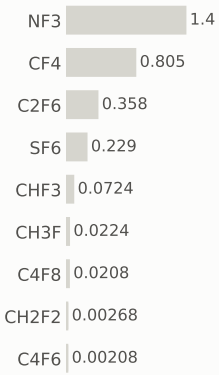

Step #1389: RIE

etch_height_dependent · RIE

1.04	208.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

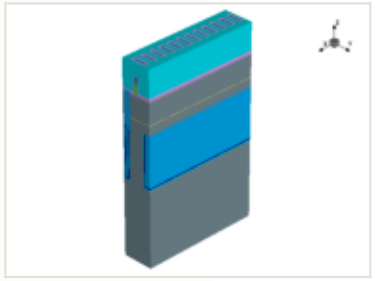

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

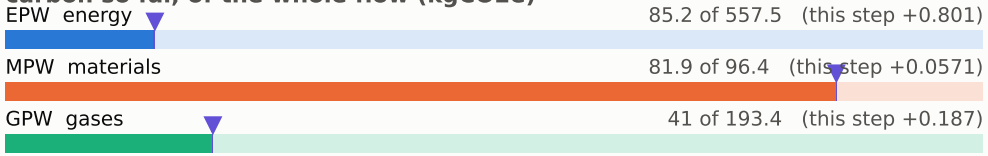

embodied carbon up to each step (kgCO2e per wafer)

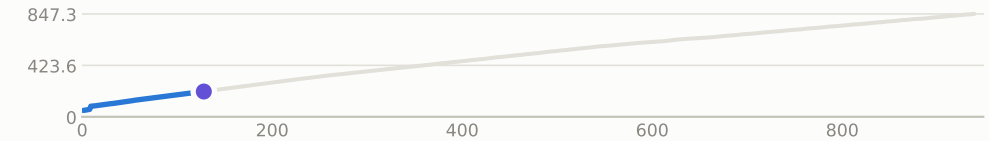

x cut at 0.385 µm

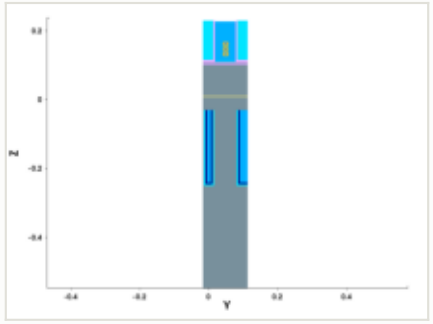

y cut at 0.049 µm

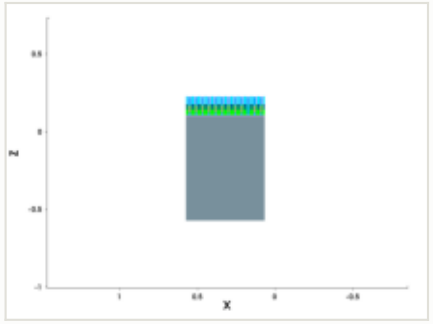

mask for this step

no mask for this step

steps by process area

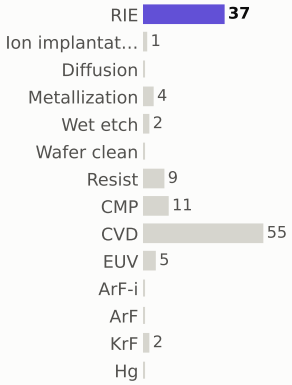

materials deposited (g)

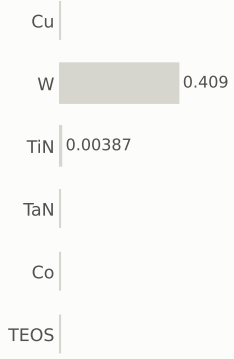

gases emitted (g)

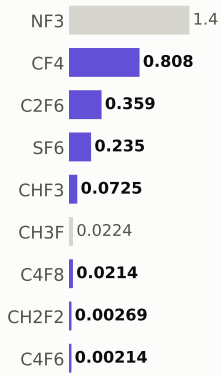

Step #1396: CVD

depo_fill · CVD

1.31	209.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

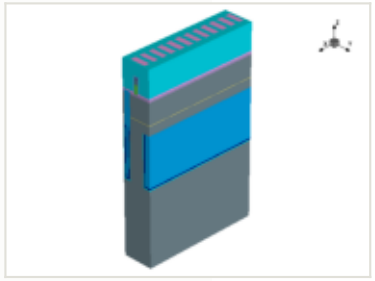

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

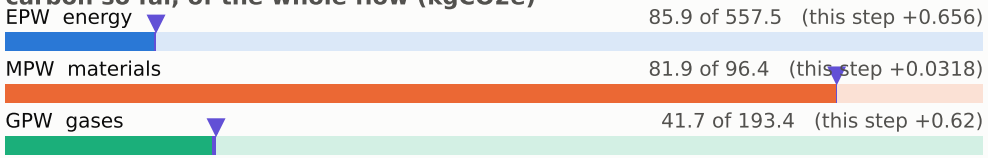

embodied carbon up to each step (kgCO2e per wafer)

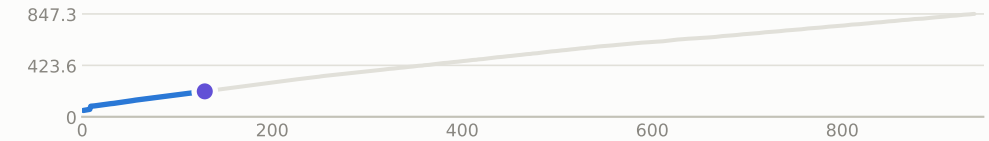

x cut at 0.385 µm

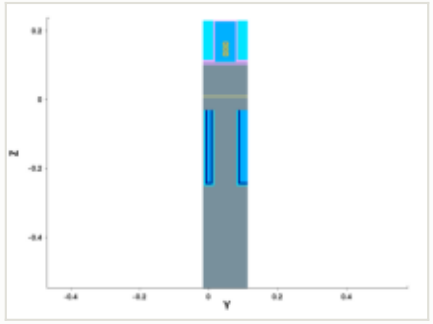

y cut at 0.049 µm

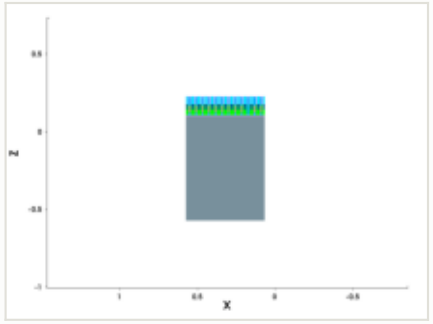

mask for this step

no mask for this step

steps by process area

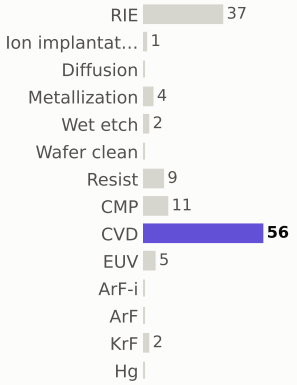

materials deposited (g)

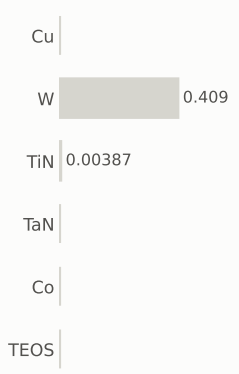

gases emitted (g)

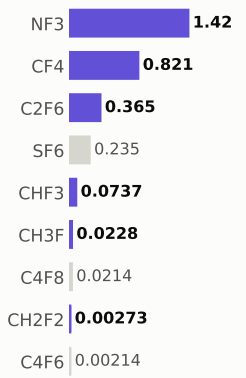

Step #1403: CMP

etch_cmp · CMP

0.169	209.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

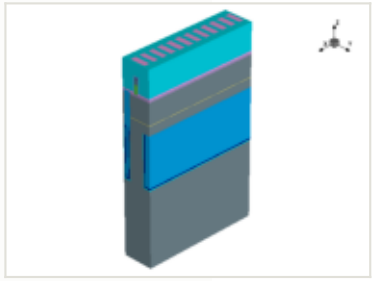

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

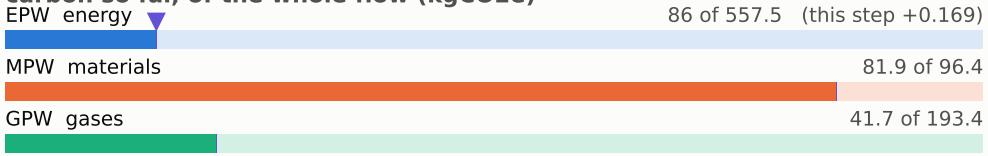

embodied carbon up to each step (kgCO2e per wafer)

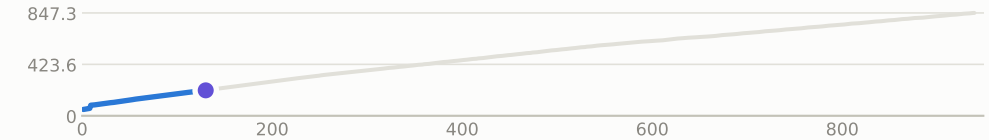

x cut at 0.385 µm

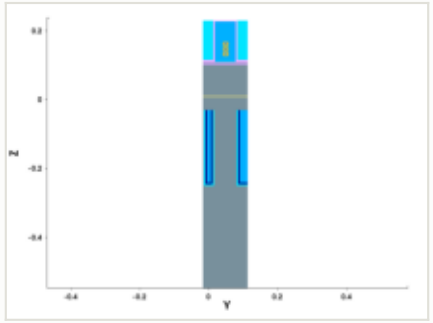

y cut at 0.049 µm

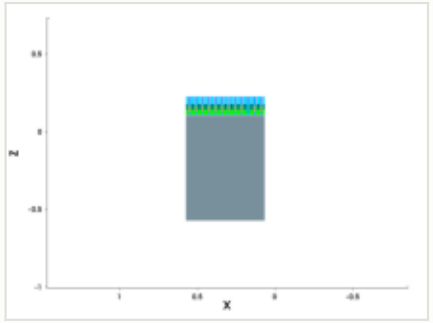

mask for this step

no mask for this step

steps by process area

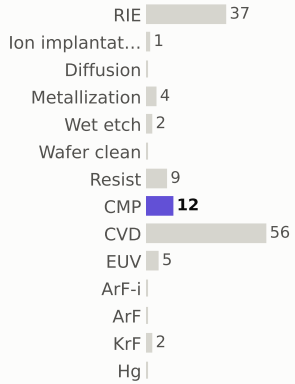

materials deposited (g)



gases emitted (g)

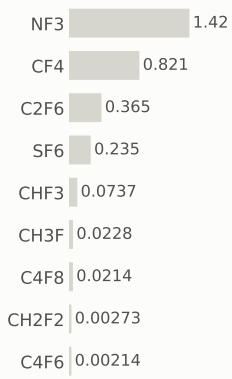

Step #1420: EUV

litho_patterning · EUV

1.96	211.6	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

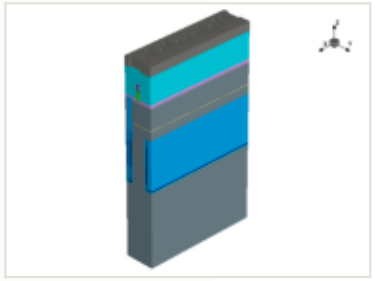

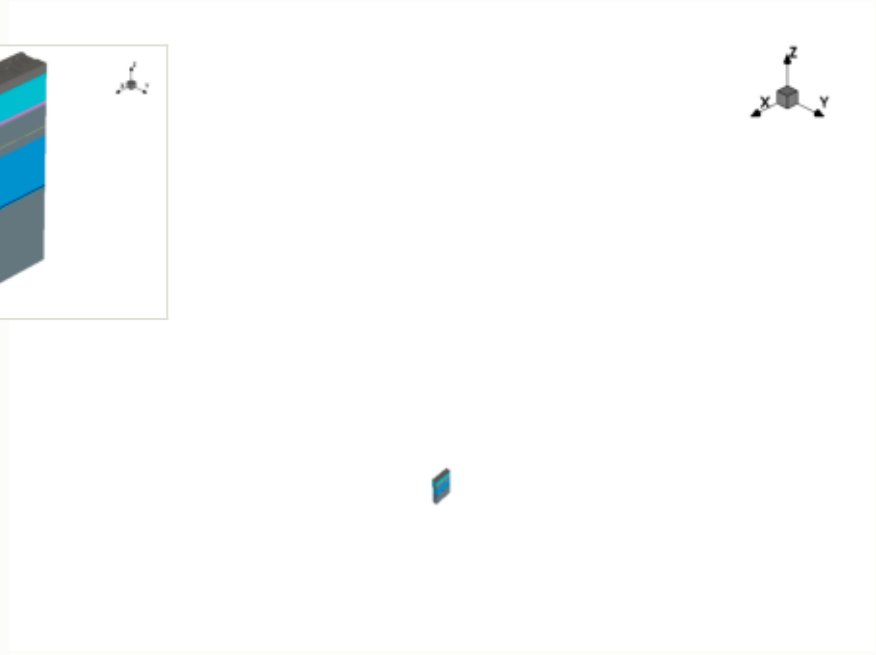

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

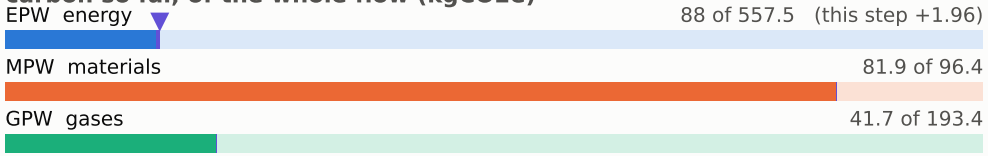

embodied carbon up to each step (kgCO2e per wafer)

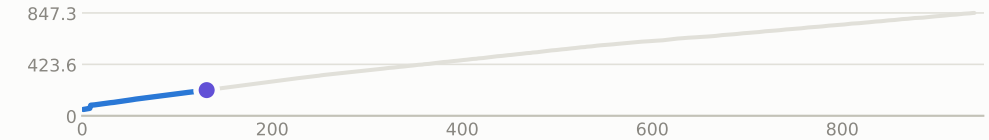

x cut at 0.385 µm

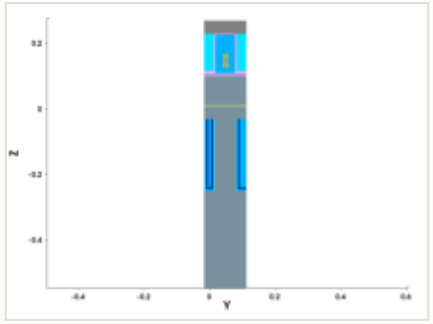

y cut at 0.049 µm

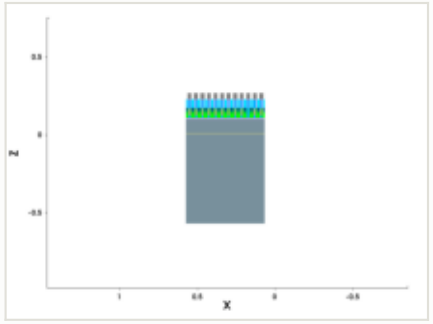

mask: layer 10:1 (GDSII)

steps by process area

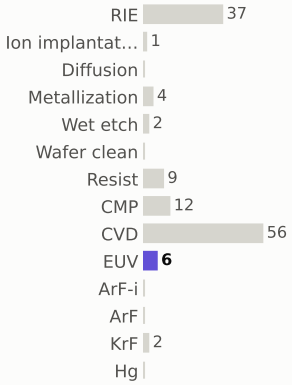

materials deposited (g)

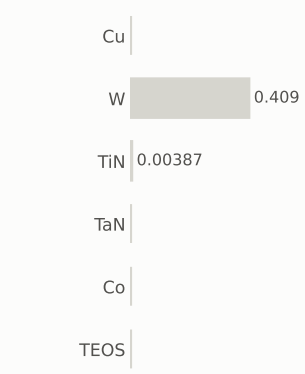

gases emitted (g)

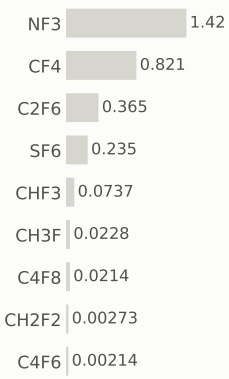

Step #1430: RIE

etch_anisotropic · RIE

1.04	212.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

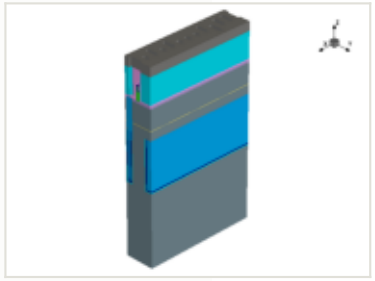

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

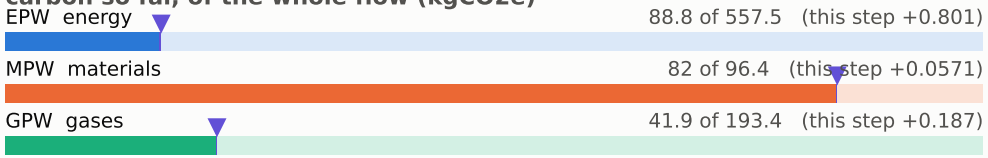

embodied carbon up to each step (kgCO2e per wafer)

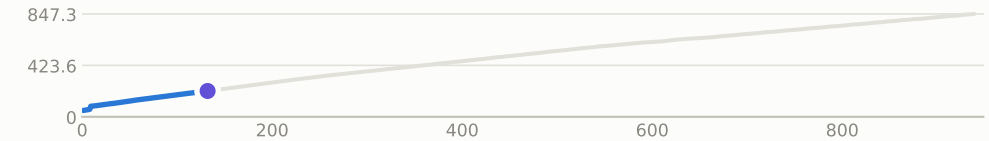

x cut at 0.385 µm

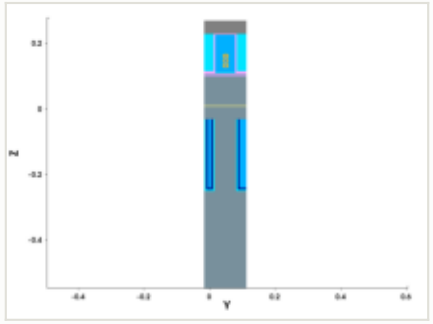

y cut at 0.049 µm

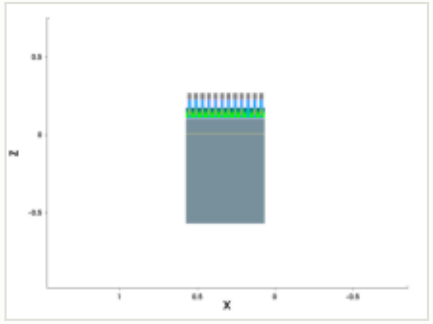

mask for this step

no mask for this step

steps by process area

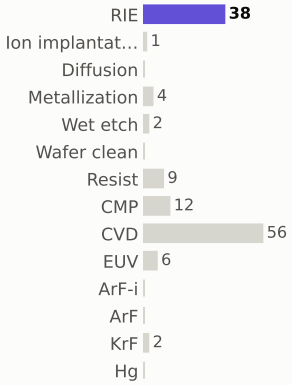

materials deposited (g)

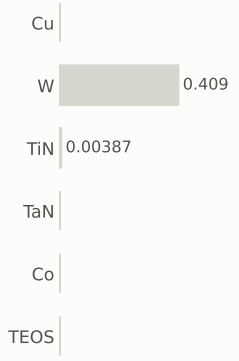

gases emitted (g)

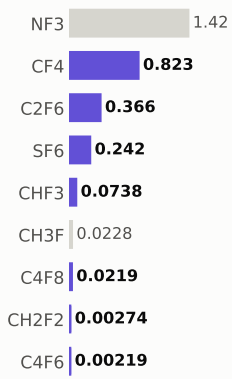

Step #1440: RIE

etch_anisotropic · RIE

1.04	213.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

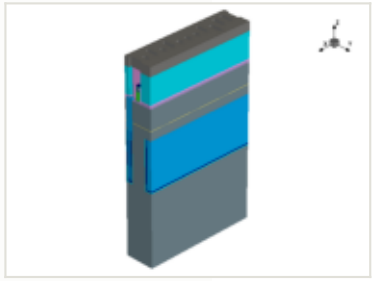

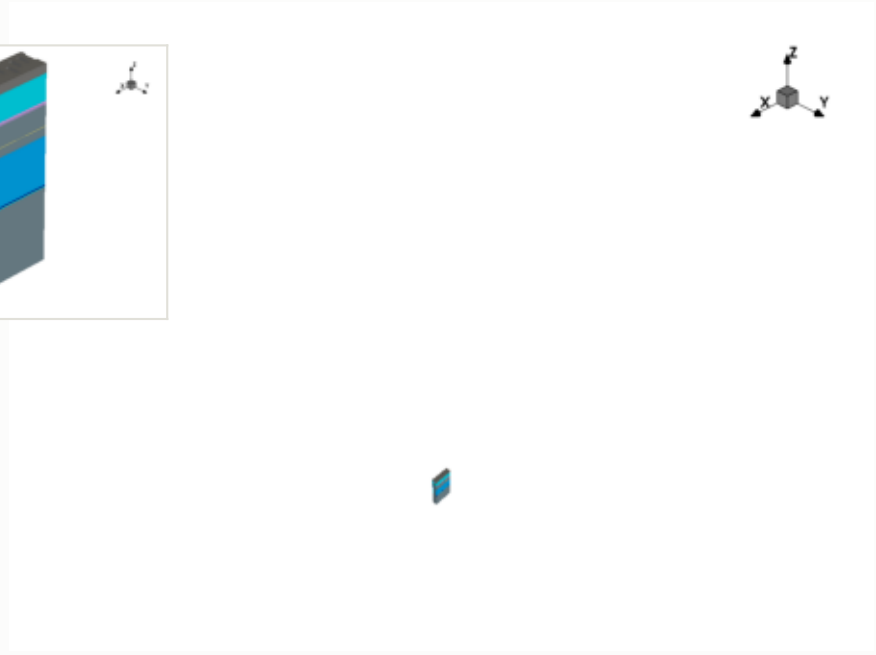

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

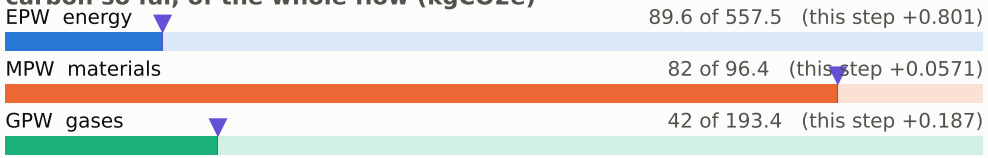

embodied carbon up to each step (kgCO2e per wafer)

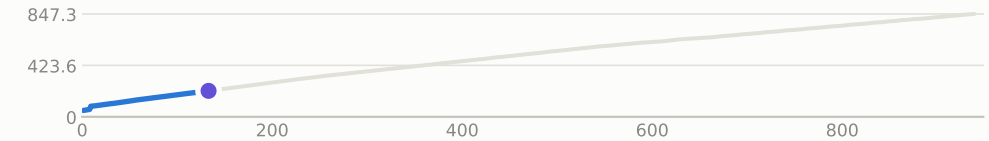

x cut at 0.385 µm

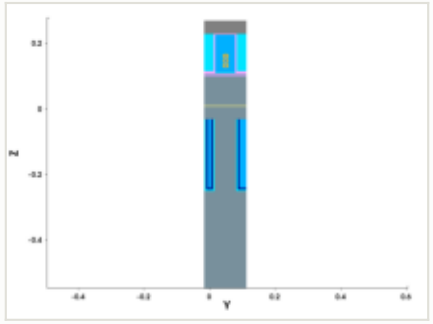

y cut at 0.049 µm

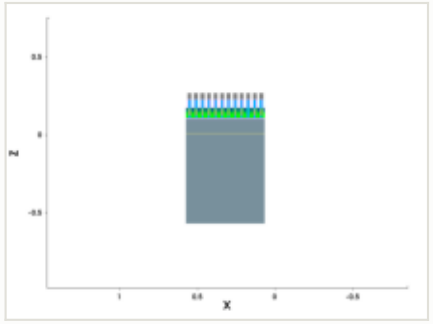

mask for this step

no mask for this step

steps by process area

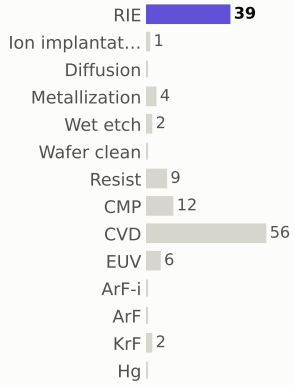

materials deposited (g)



gases emitted (g)

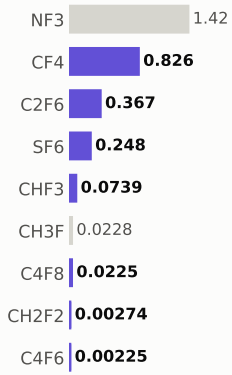

Step #1450: Resist

etch_strip · Resist

0.169	213.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

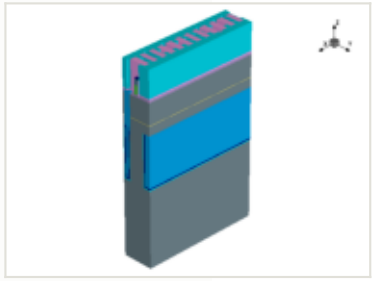

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

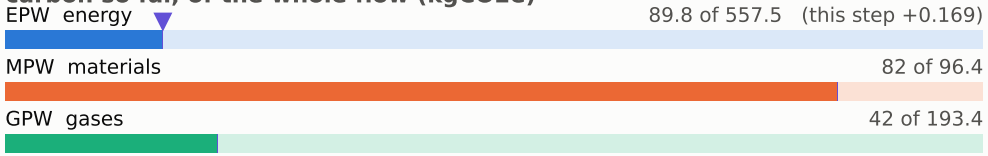

embodied carbon up to each step (kgCO2e per wafer)

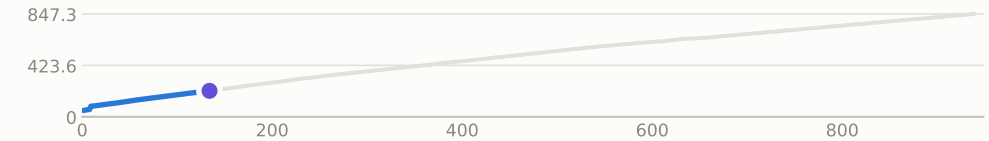

x cut at 0.385 µm

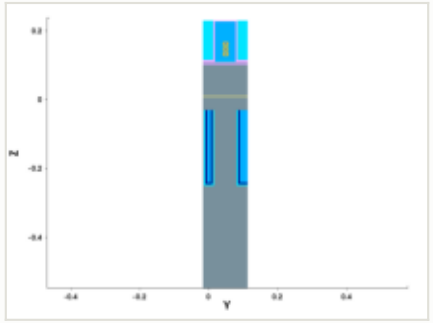

y cut at 0.049 µm

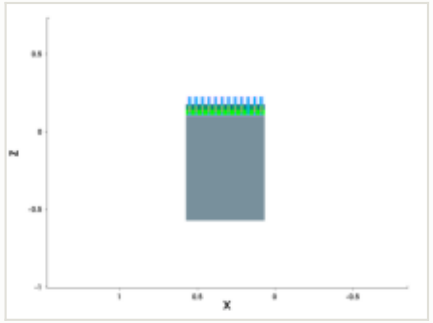

mask for this step

no mask for this step

steps by process area

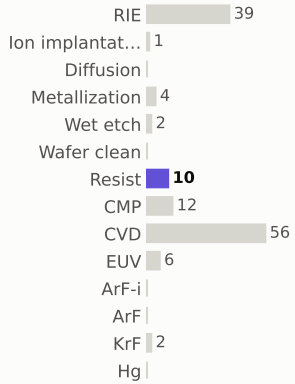

materials deposited (g)

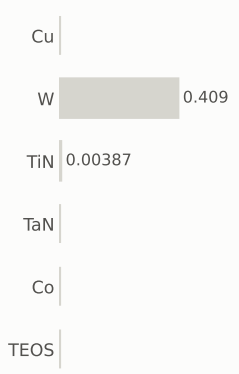

gases emitted (g)

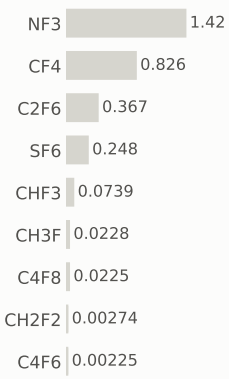

Step #1460: Metallization

depo_isotropic · Metallization

1.21	215.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization	EPW	1.2 kgCO2e
material	W	EPW tool	0.86 kgCO2e
thickness	0.08 µm	EPW overhead	0.344 kgCO2e
material GWP	75.8149 gCO2e/g	MPW	0.00827 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

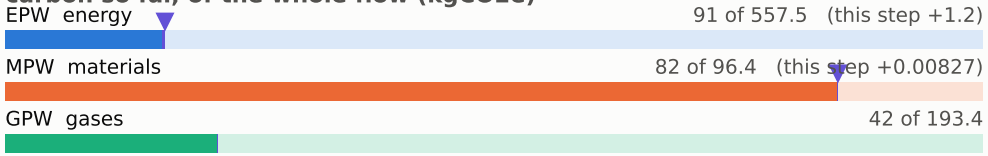

embodied carbon up to each step (kgCO2e per wafer)

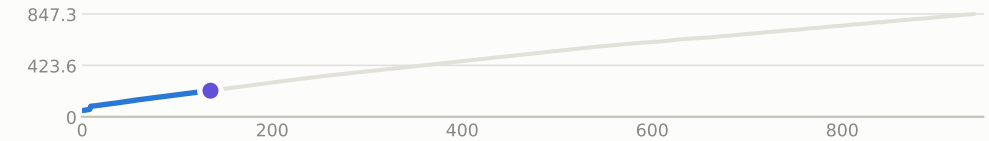

x cut at 0.385 µm

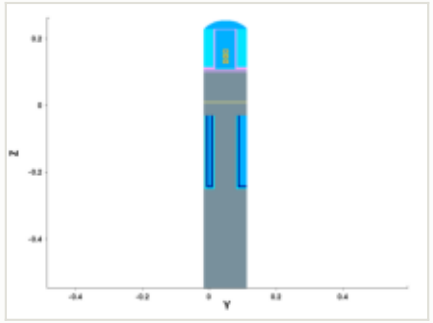

y cut at 0.049 µm

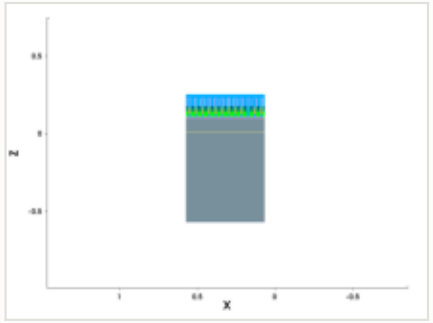

mask for this step

no mask for this step

steps by process area

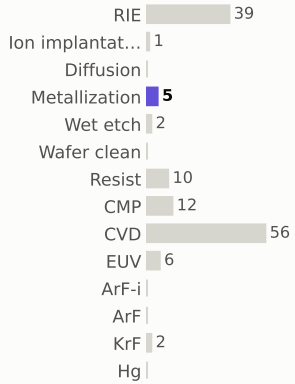

materials deposited (g)

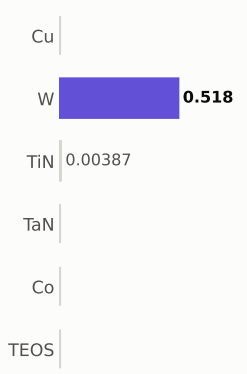

gases emitted (g)

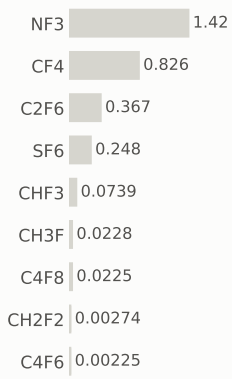

Step #1470: CMP

etch_cmp · CMP

0.169	215.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

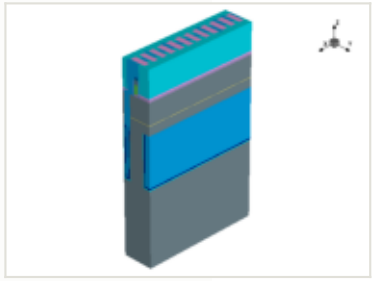

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

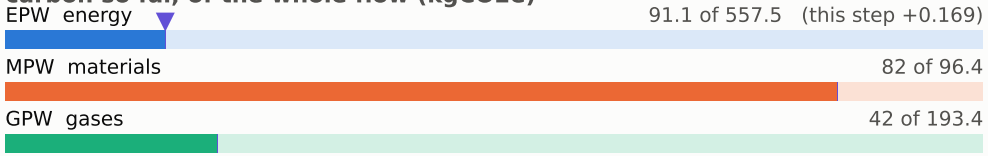

embodied carbon up to each step (kgCO2e per wafer)

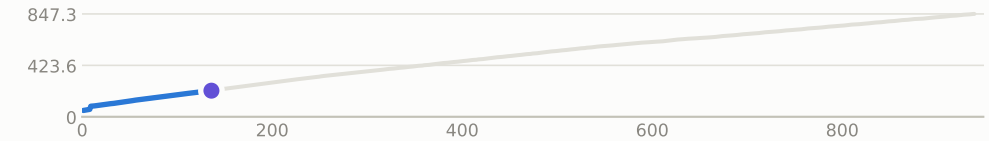

x cut at 0.385 µm

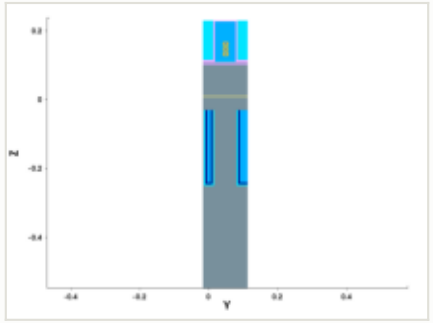

y cut at 0.049 µm

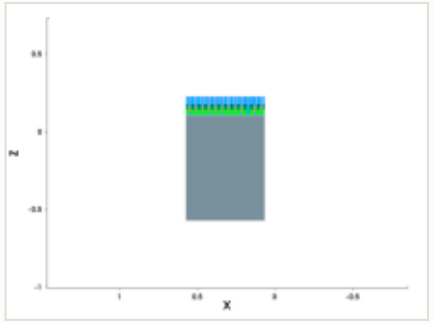

mask for this step

no mask for this step

steps by process area

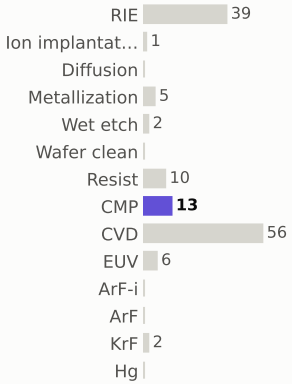

materials deposited (g)

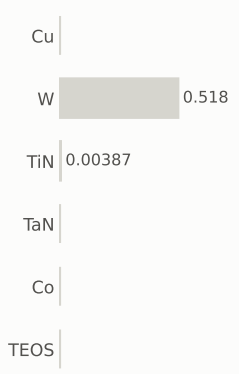

gases emitted (g)

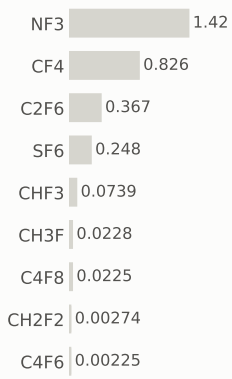

Step #1480: CVD

depo_anisotropic · CVD

1.31	216.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

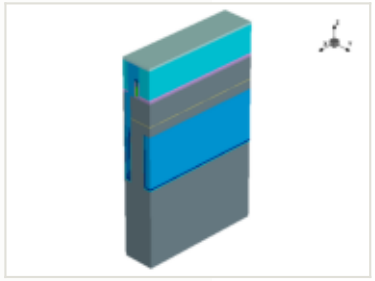

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

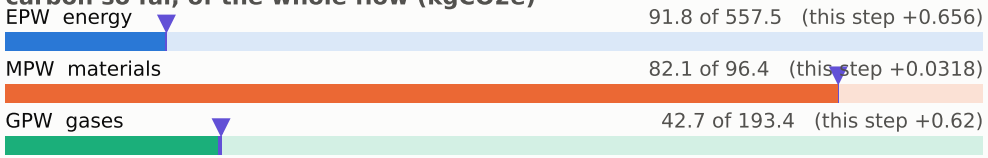

embodied carbon up to each step (kgCO2e per wafer)

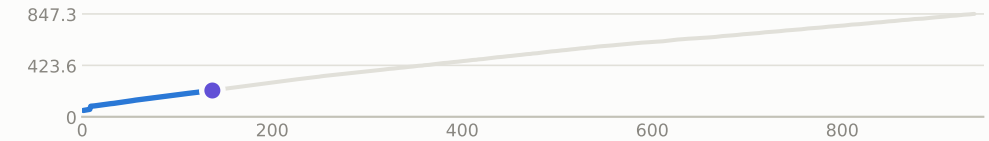

x cut at 0.385 µm

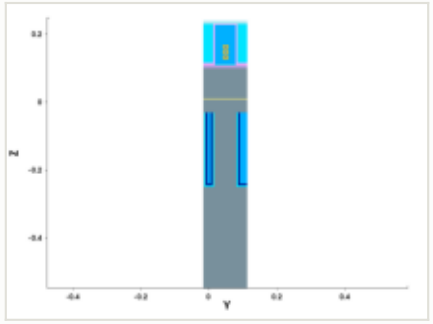

y cut at 0.049 µm

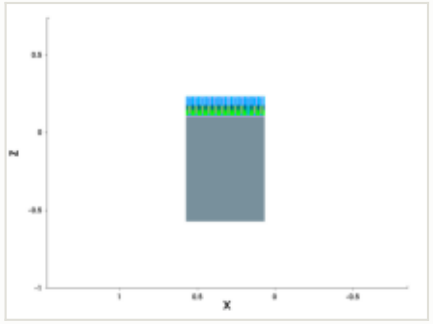

mask for this step

no mask for this step

steps by process area

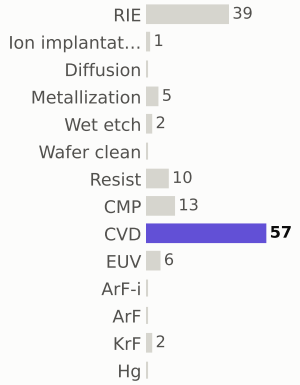

materials deposited (g)

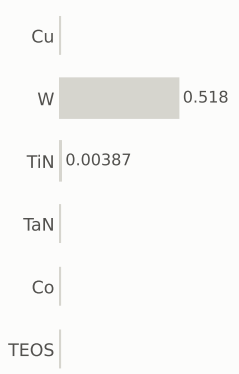

gases emitted (g)

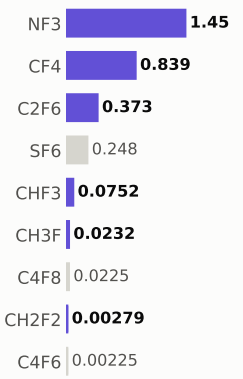

Step #1490: CVD

depo_anisotropic · CVD

1.31	217.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

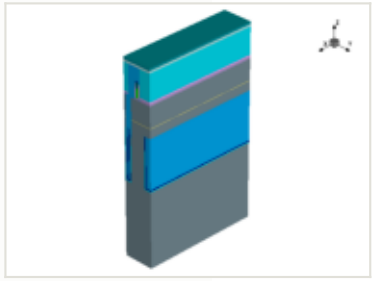

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

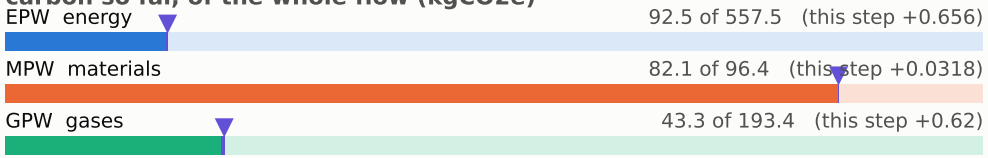

embodied carbon up to each step (kgCO2e per wafer)

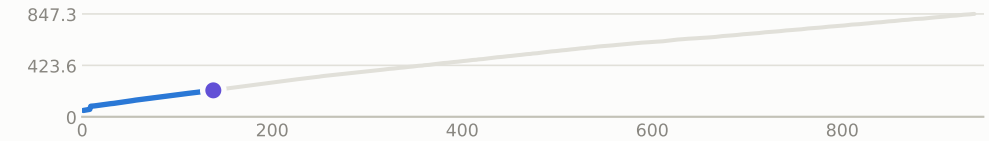

x cut at 0.385 µm

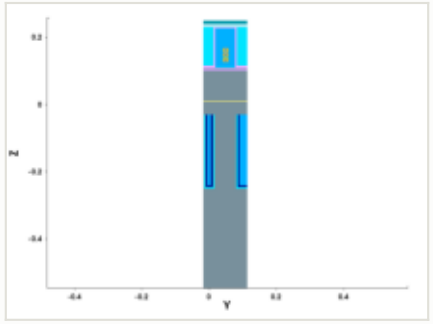

y cut at 0.049 µm

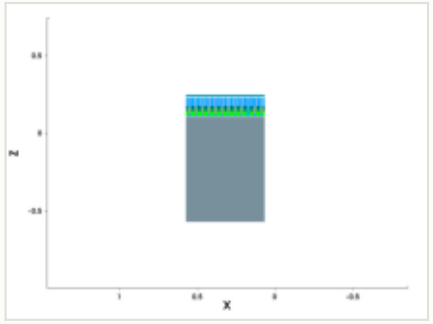

mask for this step

no mask for this step

steps by process area

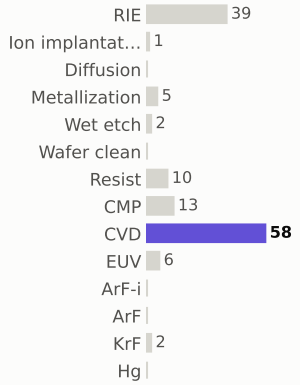

materials deposited (g)

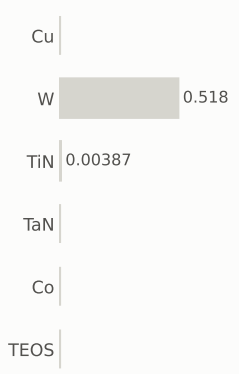

gases emitted (g)

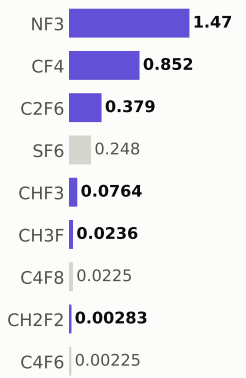

Step #1500: CVD

depo_anisotropic · CVD

1.31	219.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

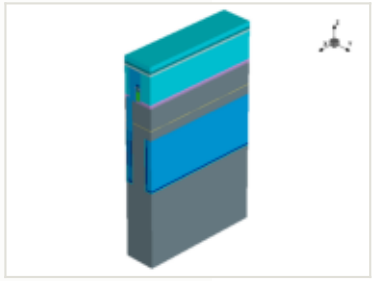

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

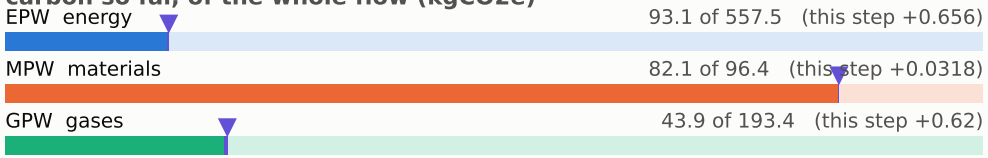

embodied carbon up to each step (kgCO2e per wafer)

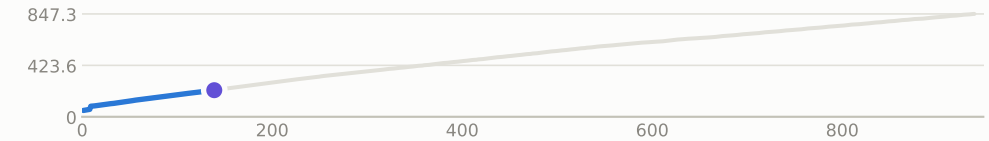

x cut at 0.385 µm

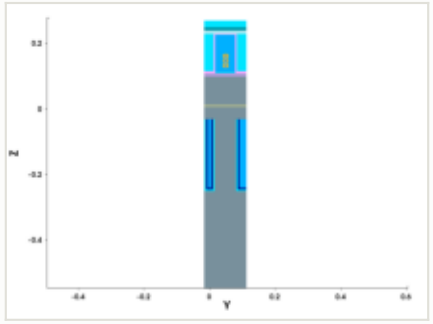

y cut at 0.049 µm

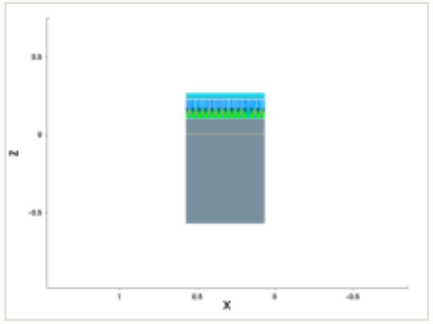

mask for this step

no mask for this step

steps by process area

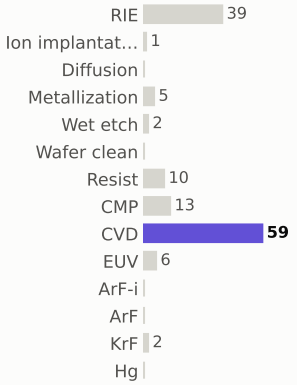

materials deposited (g)

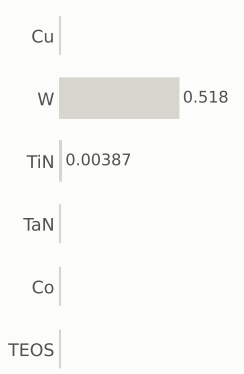

gases emitted (g)

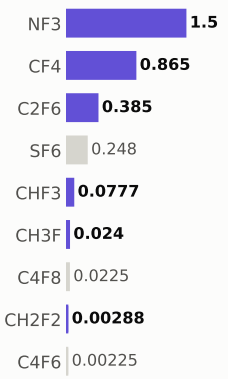

Step #1520: CVD

depo_fill · CVD

1.31	220.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

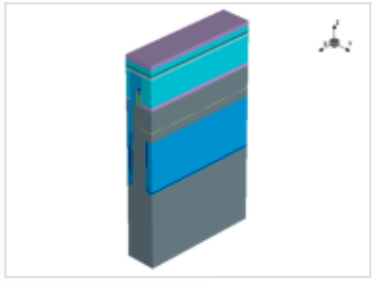

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

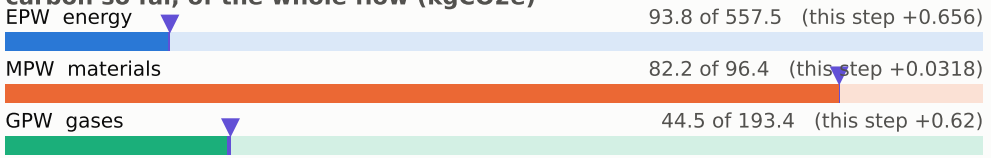

embodied carbon up to each step (kgCO2e per wafer)

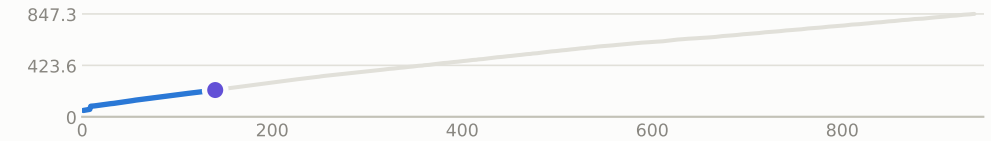

x cut at 0.385 µm

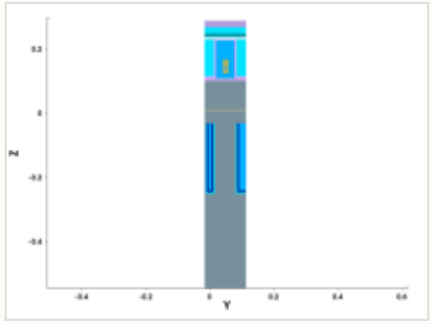

y cut at 0.049 µm

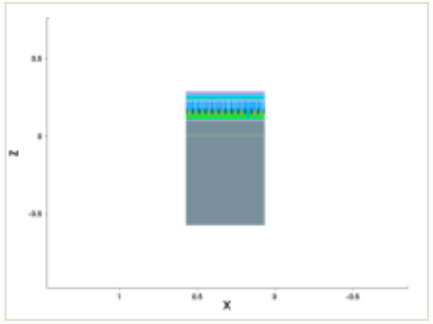

mask for this step

no mask for this step

steps by process area

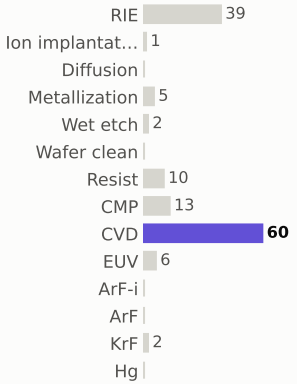

materials deposited (g)

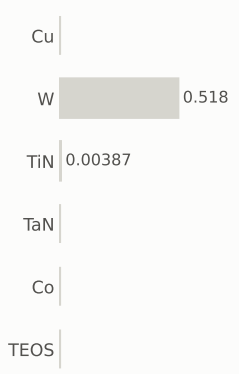

gases emitted (g)

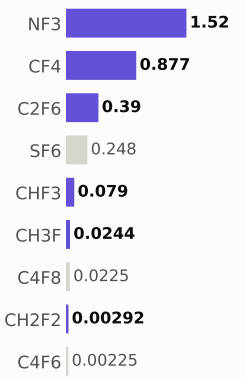

Step #1530: CVD

depo_isotropic · CVD

1.31	221.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

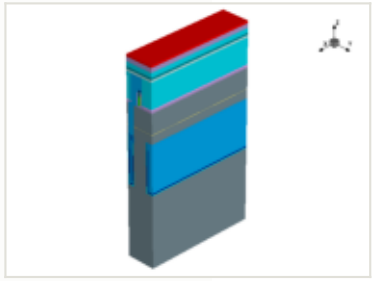

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

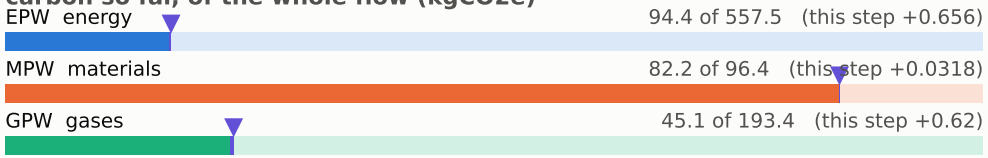

embodied carbon up to each step (kgCO2e per wafer)

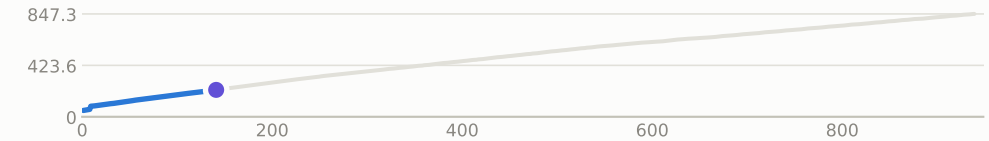

x cut at 0.385 µm

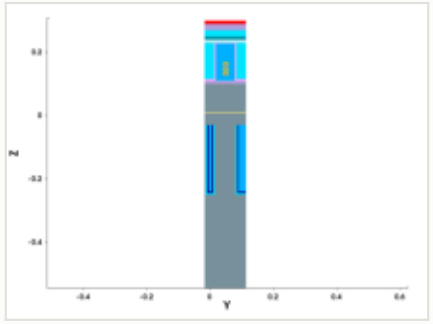

y cut at 0.049 µm

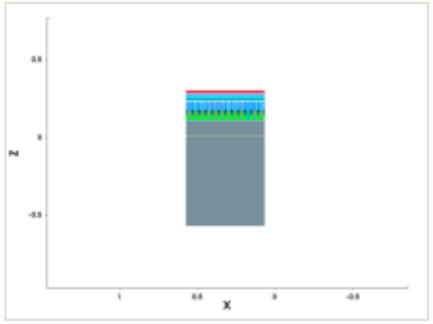

mask for this step

no mask for this step

steps by process area

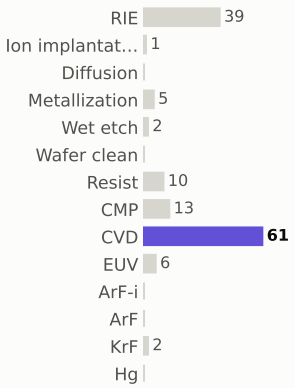

materials deposited (g)

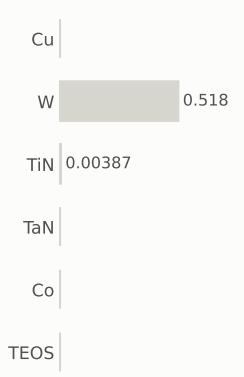

gases emitted (g)

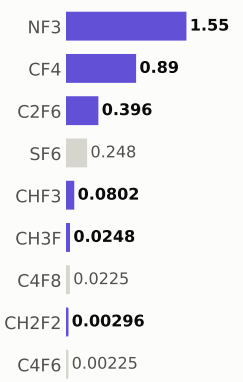

Step #1540: CVD

depo_fill · CVD

1.31	223.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

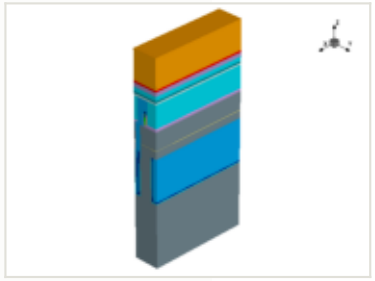

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

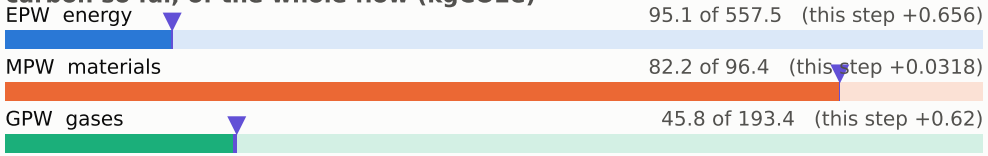

embodied carbon up to each step (kgCO2e per wafer)

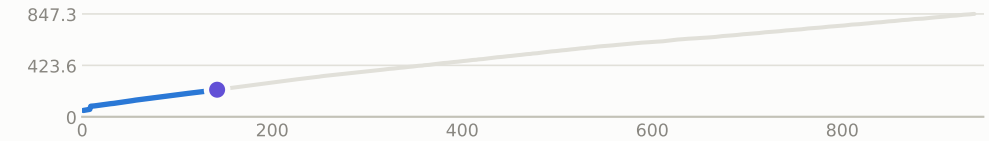

x cut at 0.385 µm

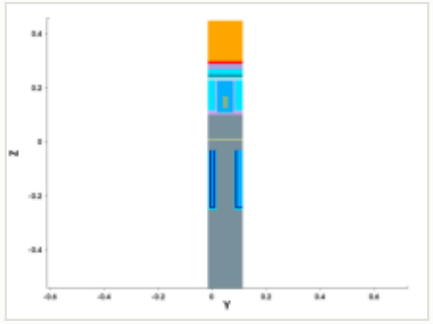

y cut at 0.049 µm

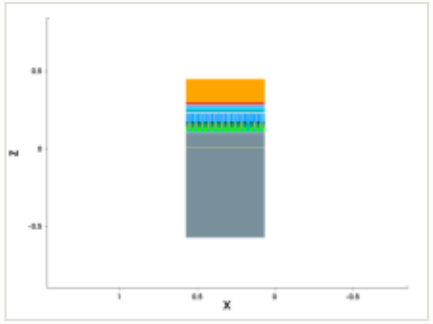

mask for this step

no mask for this step

steps by process area



materials deposited (g)

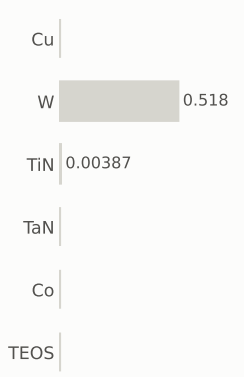

gases emitted (g)

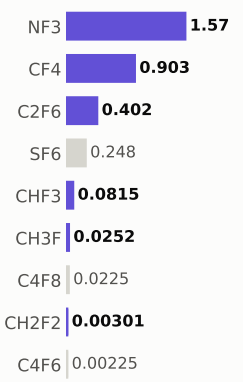

Step #1550: CVD

depo_isotropic · CVD

1.31	224.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

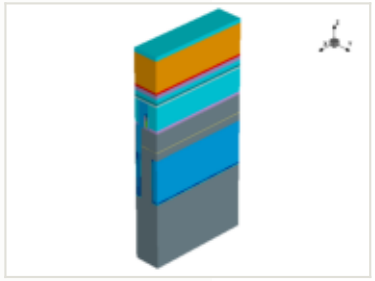

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

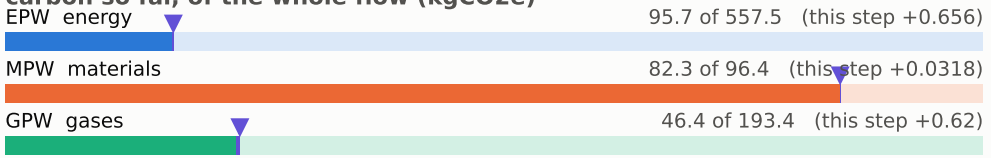

embodied carbon up to each step (kgCO2e per wafer)

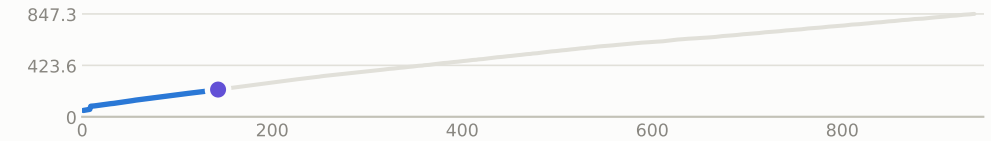

x cut at 0.385 µm

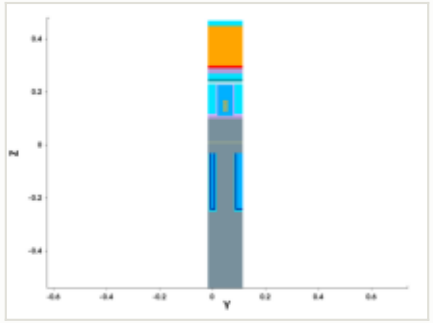

y cut at 0.049 µm

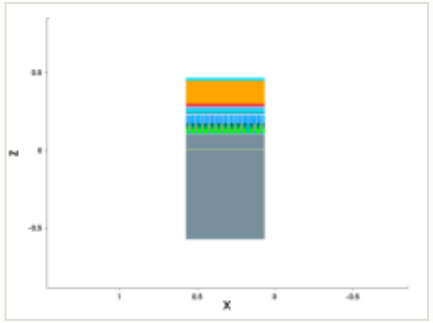

mask for this step

no mask for this step

steps by process area

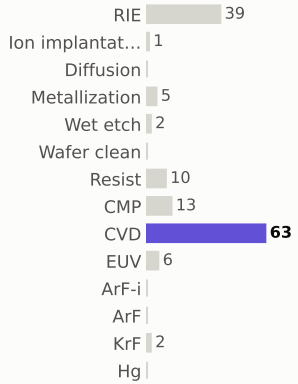

materials deposited (g)

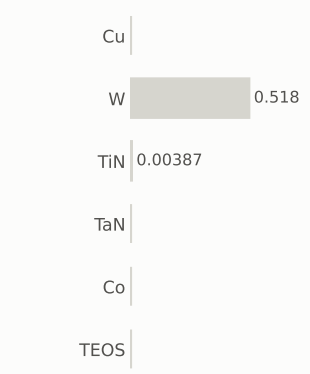

gases emitted (g)



Step #1560: CVD

depo_isotropic · CVD

1.31	225.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

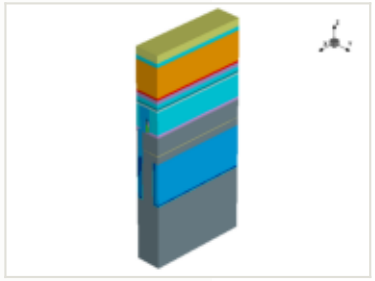

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

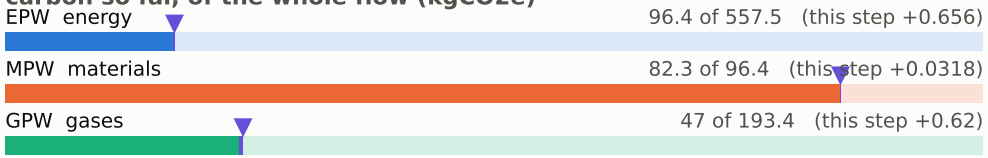

embodied carbon up to each step (kgCO2e per wafer)

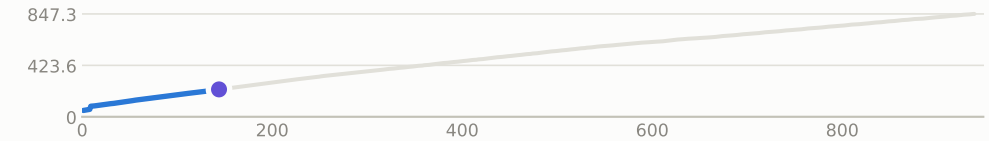

x cut at 0.385 µm

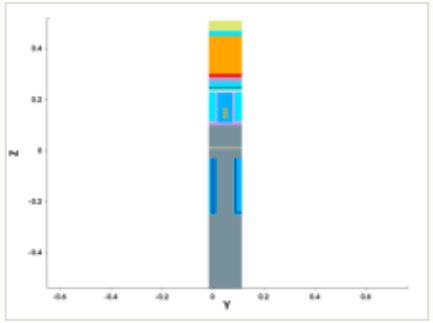

y cut at 0.049 µm

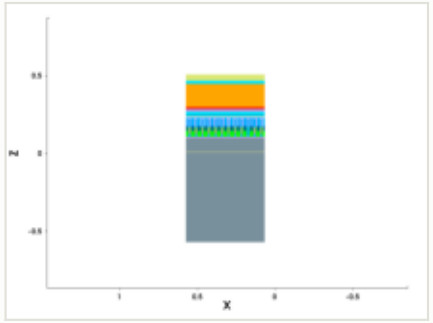

mask for this step

no mask for this step

steps by process area

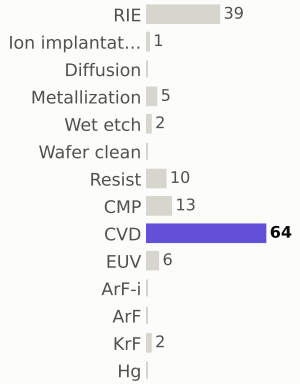

materials deposited (g)

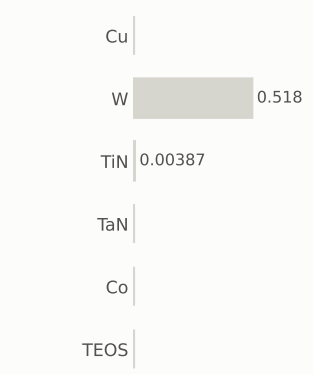

gases emitted (g)

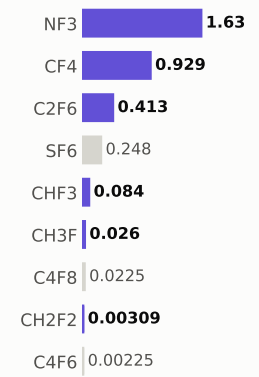

Step #1570: CVD

depo_fill · CVD

1.31	227.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

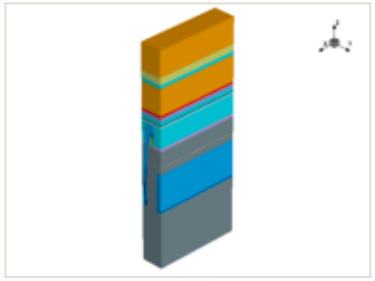

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

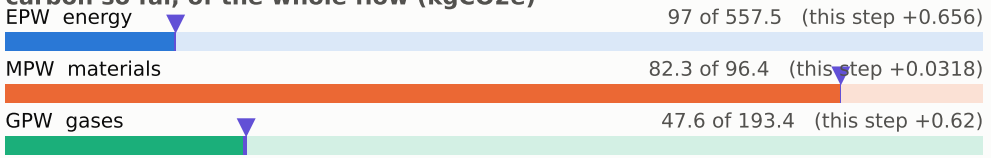

embodied carbon up to each step (kgCO2e per wafer)

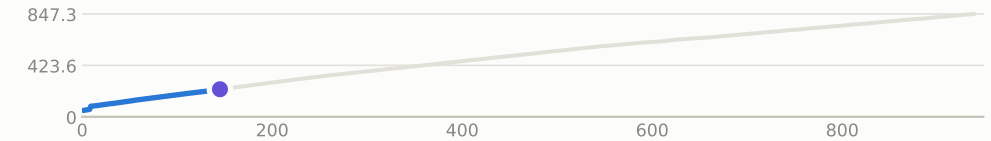

x cut at 0.385 µm

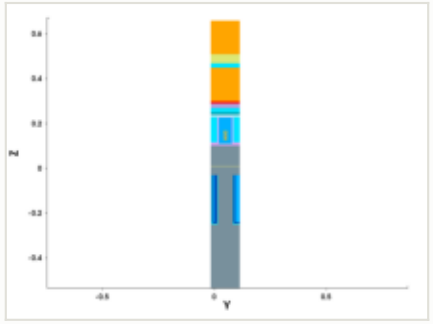

y cut at 0.049 µm

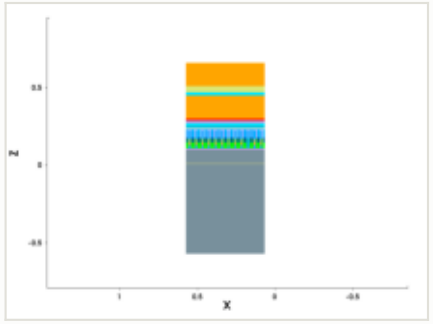

mask for this step

no mask for this step

steps by process area

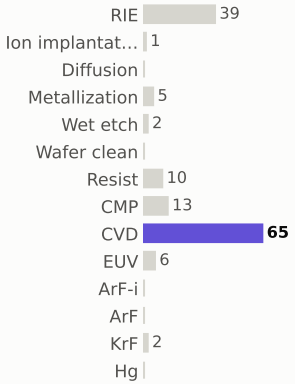

materials deposited (g)

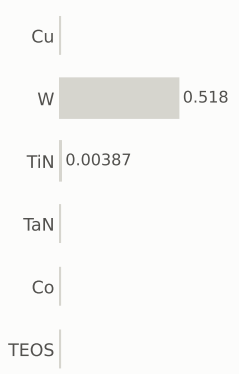

gases emitted (g)



Step #1580: CVD

depo_fill · CVD

1.31	228.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

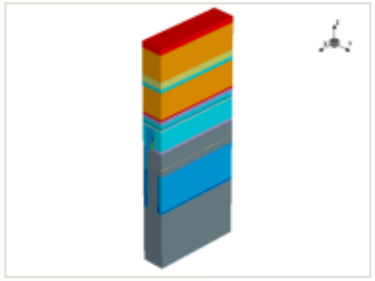

x cut at 0.385 µm

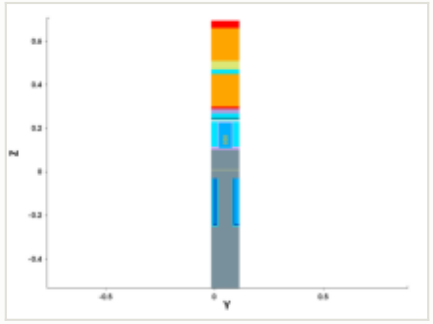

y cut at 0.049 µm

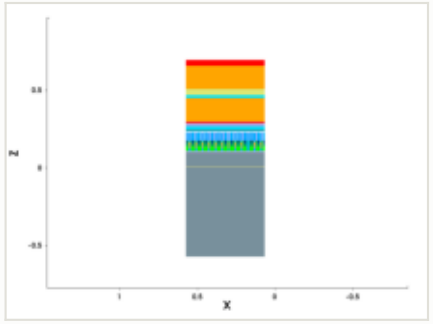

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

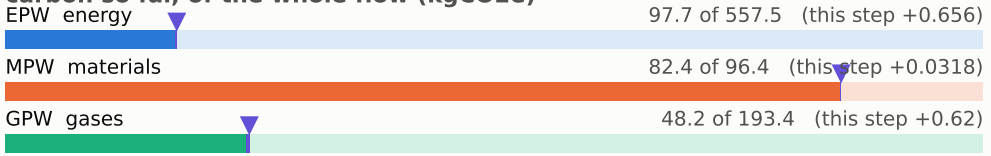

embodied carbon up to each step (kgCO2e per wafer)

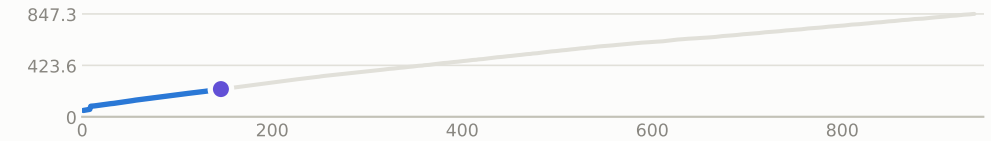

steps by process area

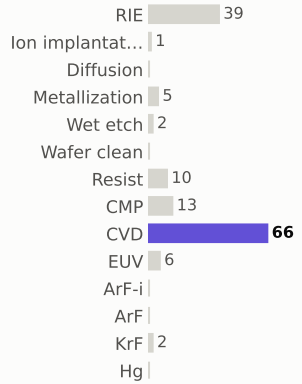

materials deposited (g)

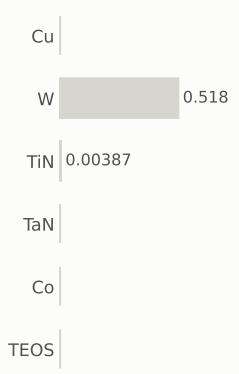

gases emitted (g)

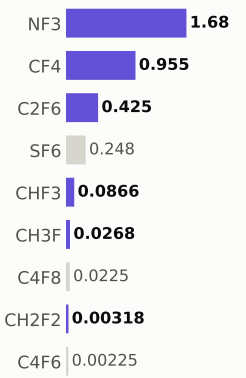

Step #1590: EUV

litho_patterning · EUV

1.96	230.3	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

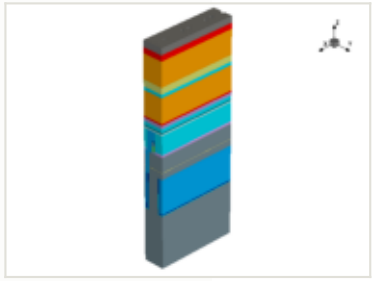

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

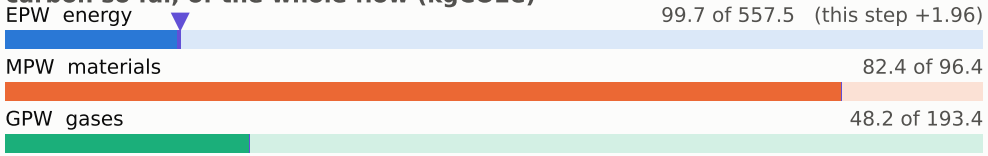

embodied carbon up to each step (kgCO2e per wafer)

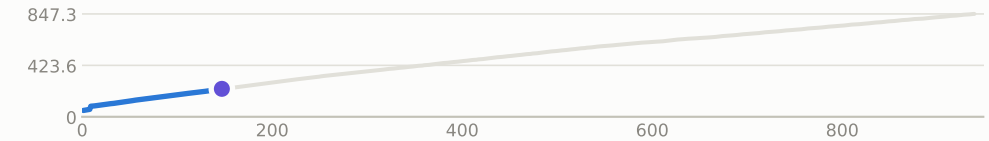

x cut at 0.385 µm

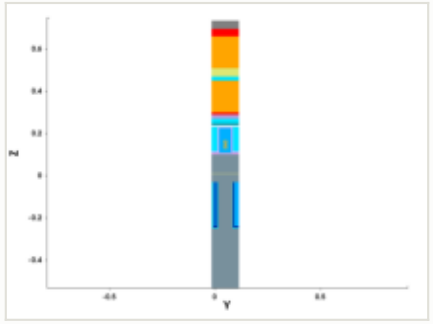

y cut at 0.049 µm

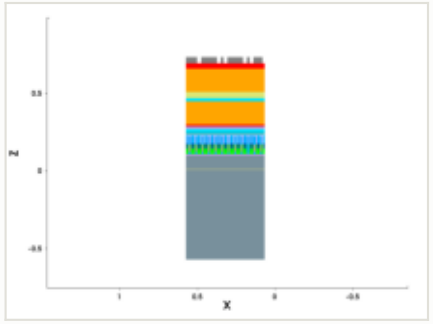

mask: layer 13:0 (GDSII)

steps by process area

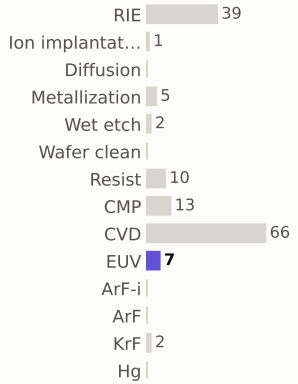

materials deposited (g)

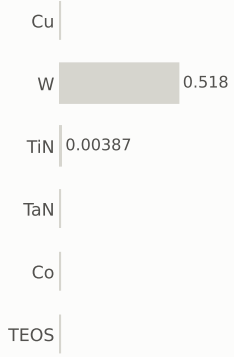

gases emitted (g)



Step #1600: RIE

etch_anisotropic · RIE

1.04	231.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

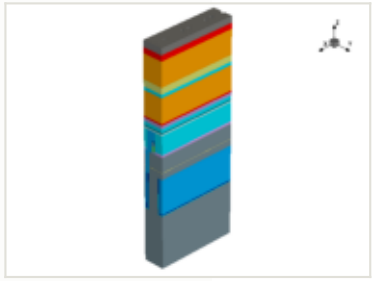

x cut at 0.385 µm

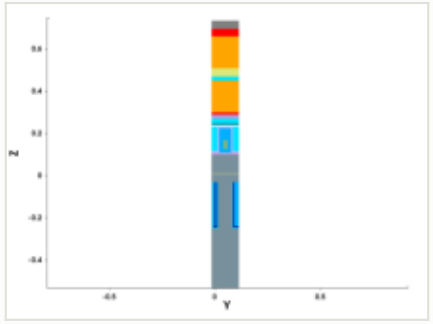

y cut at 0.049 µm

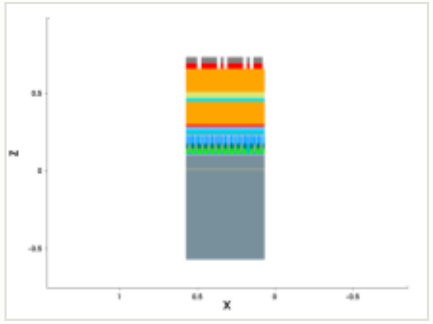

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

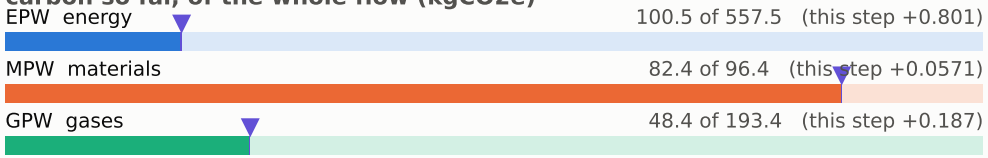

embodied carbon up to each step (kgCO2e per wafer)

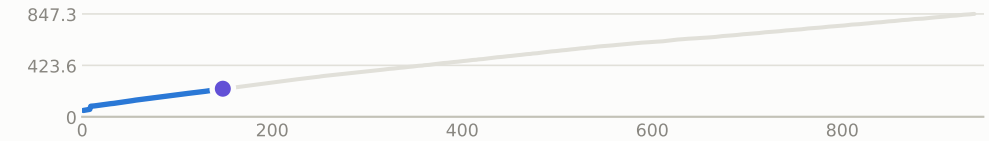

steps by process area

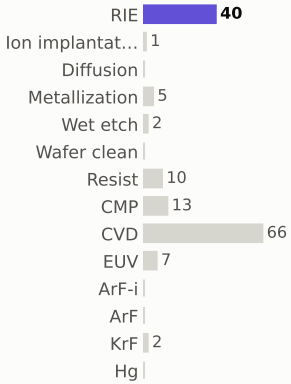

materials deposited (g)

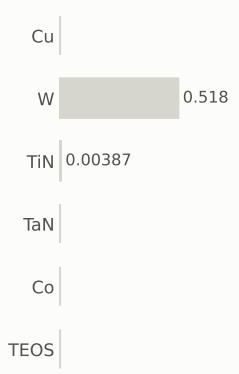

gases emitted (g)

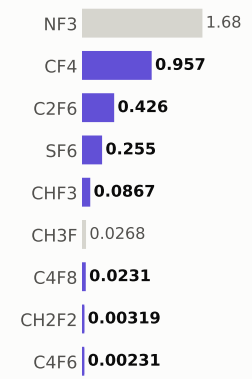

Step #1610: RIE

etch_anisotropic · RIE

1.04	232.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

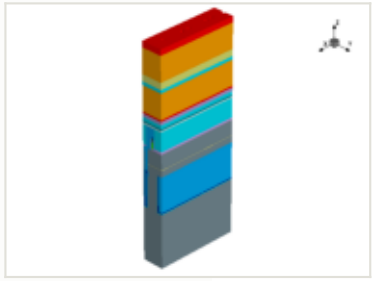

x cut at 0.385 µm

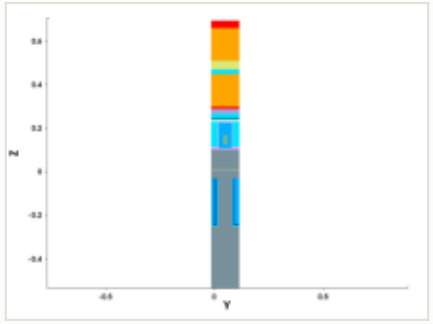

y cut at 0.049 µm

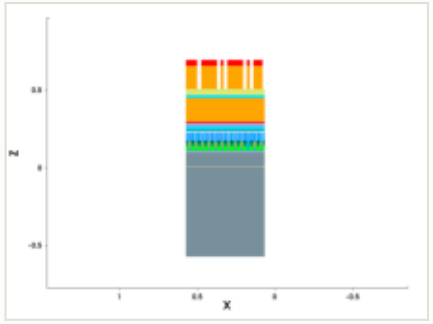

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

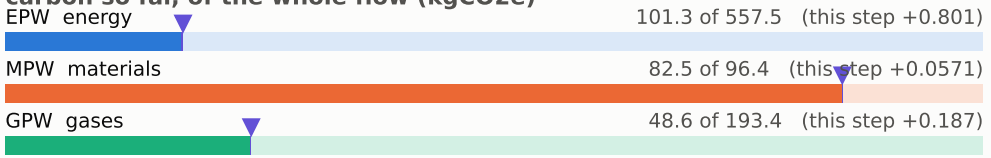

embodied carbon up to each step (kgCO2e per wafer)

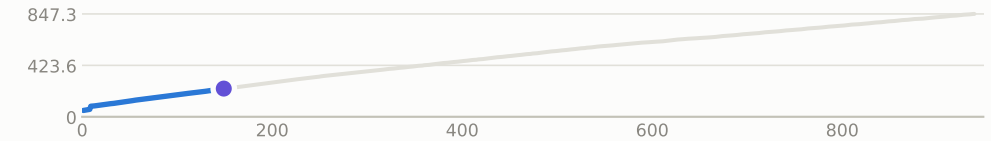

steps by process area

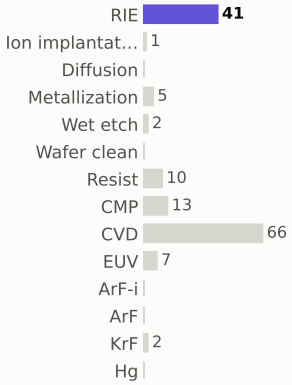

materials deposited (g)

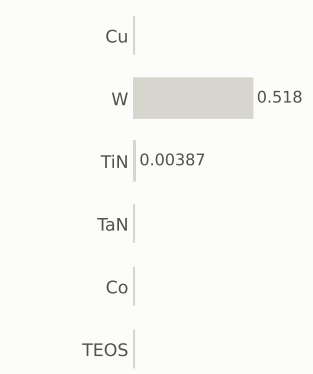

gases emitted (g)



Step #1620: RIE

etch_anisotropic · RIE

1.04	233.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

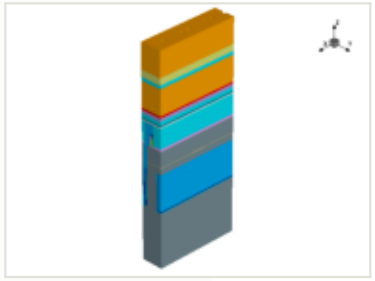

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

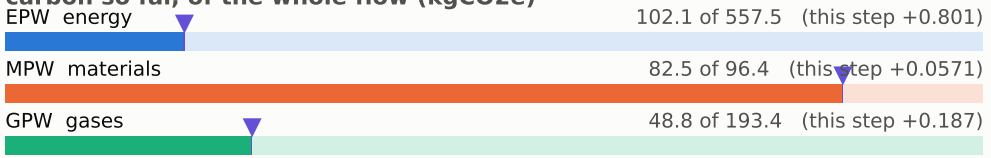

embodied carbon up to each step (kgCO2e per wafer)

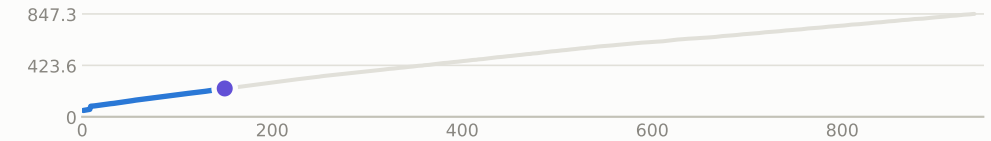

x cut at 0.385 µm

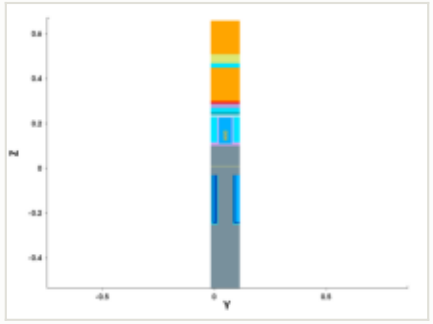

y cut at 0.049 µm

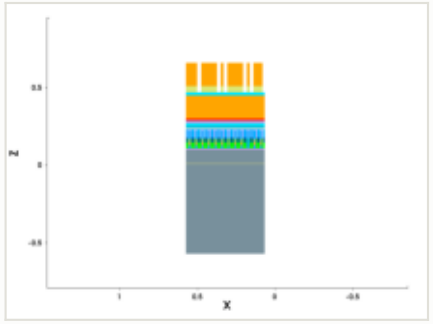

mask for this step

no mask for this step

steps by process area

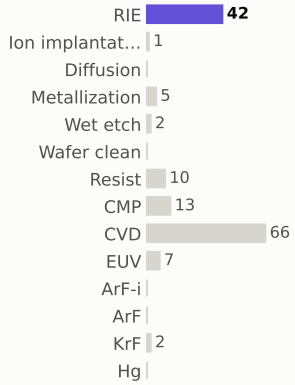

materials deposited (g)

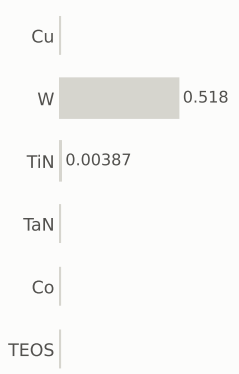

gases emitted (g)

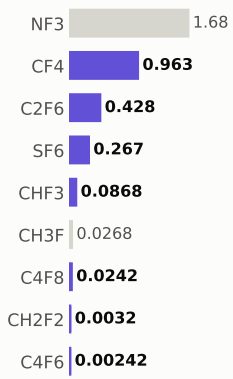

Step #1630: Resist

etch_strip · Resist

0.169	233.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

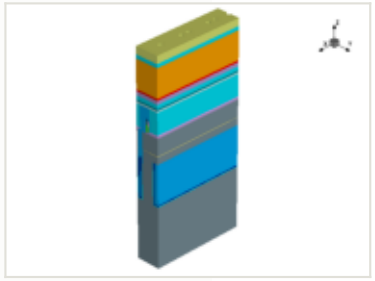

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

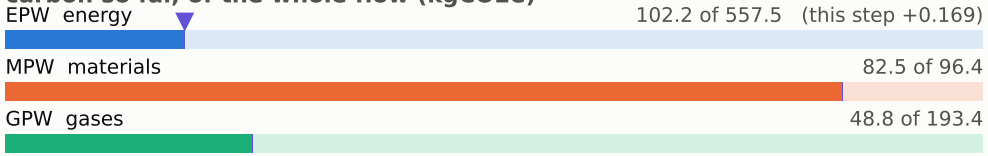

embodied carbon up to each step (kgCO2e per wafer)

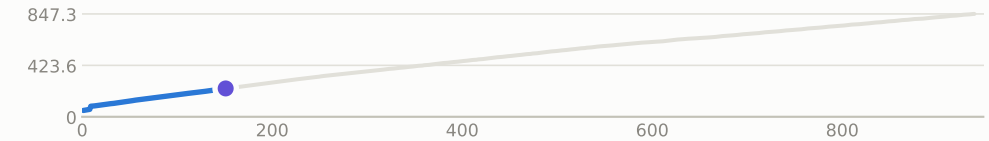

x cut at 0.385 µm

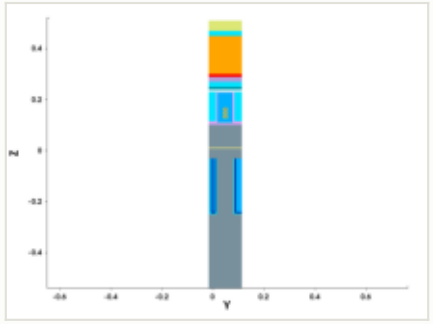

y cut at 0.049 µm

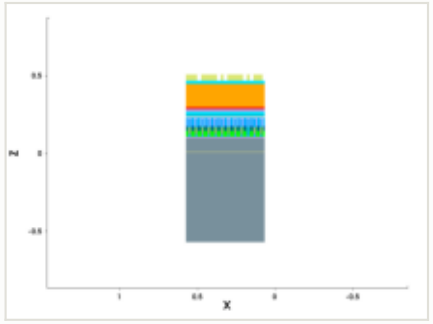

mask for this step

no mask for this step

steps by process area

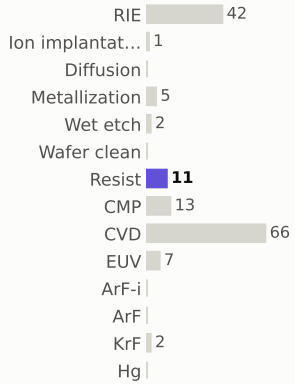

materials deposited (g)

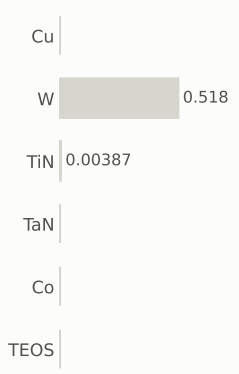

gases emitted (g)

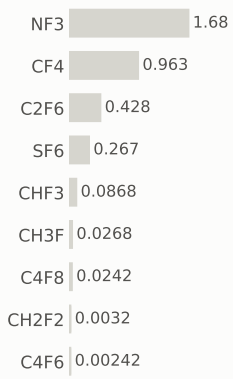

Step #1640: RIE

etch_anisotropic · RIE

1.04	234.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

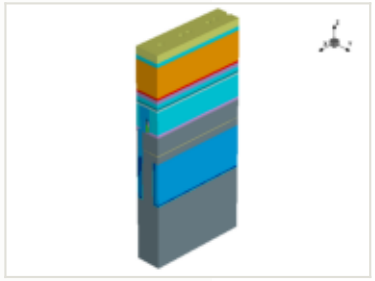

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

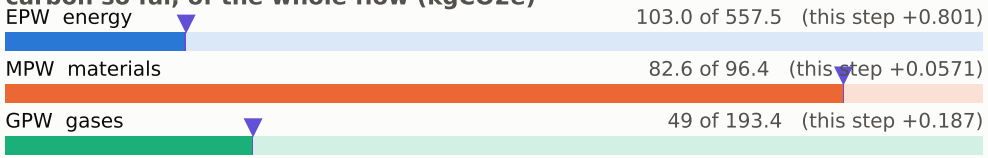

embodied carbon up to each step (kgCO2e per wafer)

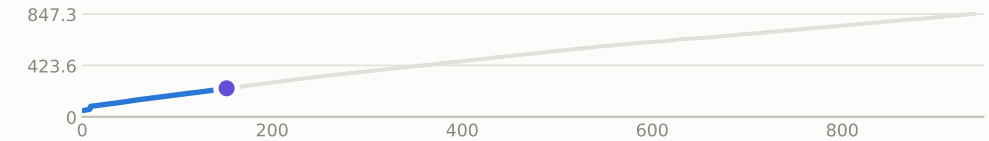

x cut at 0.385 µm

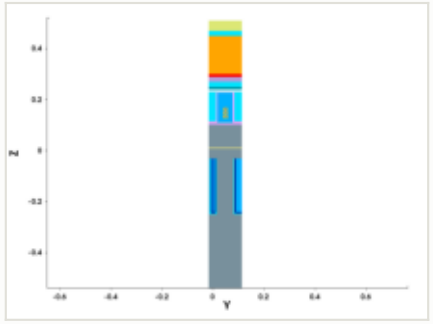

y cut at 0.049 µm

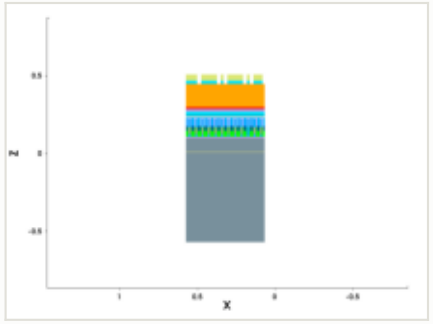

mask for this step

no mask for this step

steps by process area

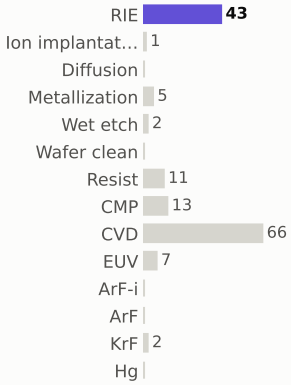

materials deposited (g)



gases emitted (g)

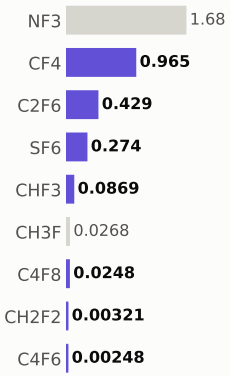

Step #1650: RIE

etch_anisotropic · RIE

1.04	235.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

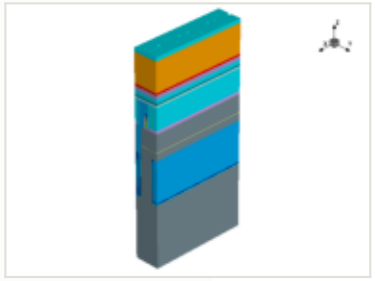

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

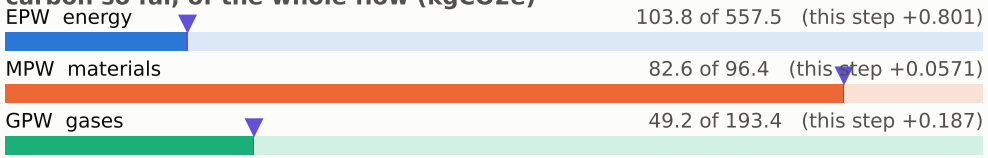

embodied carbon up to each step (kgCO2e per wafer)

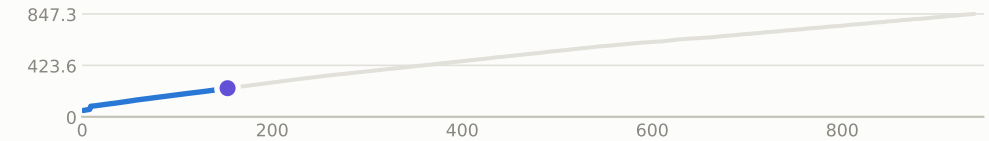

x cut at 0.385 µm

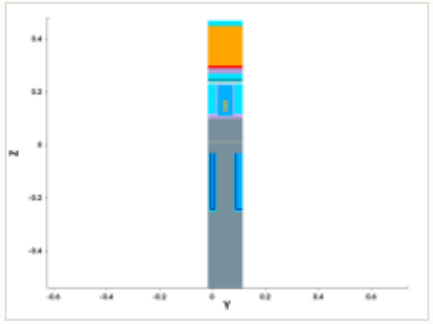

y cut at 0.049 µm

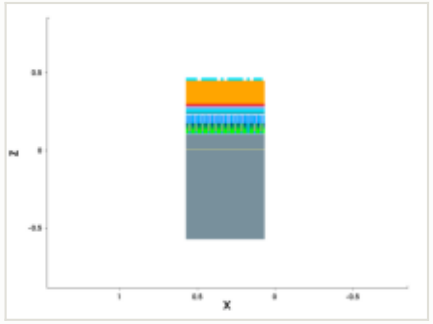

mask for this step

no mask for this step

steps by process area

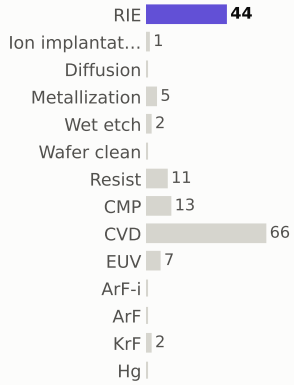

materials deposited (g)

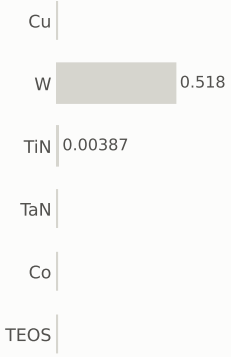

gases emitted (g)

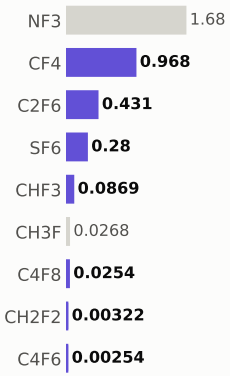

Step #1660: RIE

etch_anisotropic · RIE

1.04	236.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

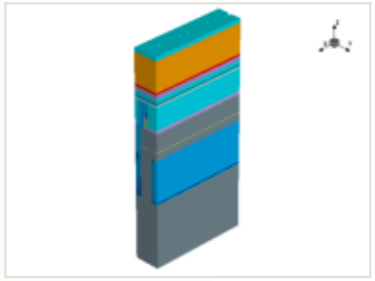

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

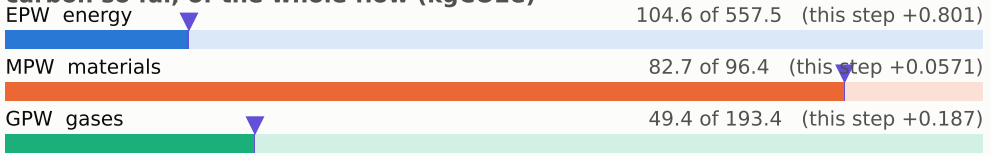

embodied carbon up to each step (kgCO2e per wafer)

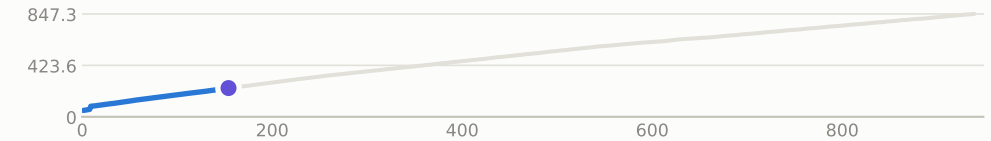

x cut at 0.385 µm

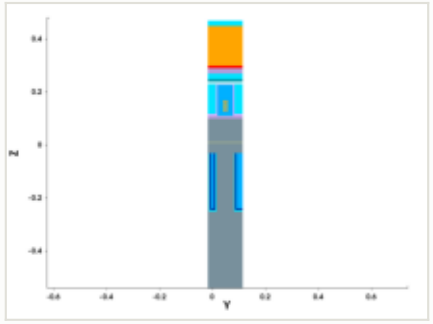

y cut at 0.049 µm

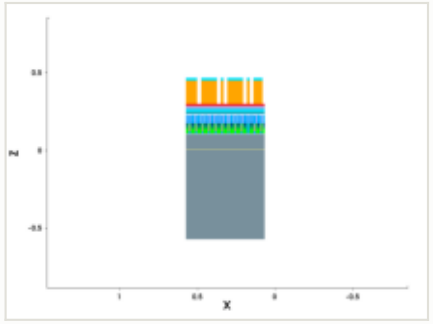

mask for this step

no mask for this step

steps by process area

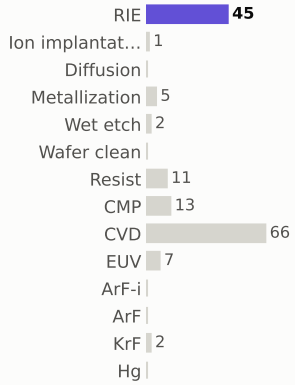

materials deposited (g)



gases emitted (g)

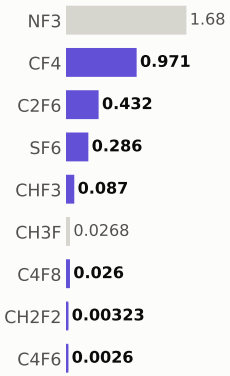

Step #1670: RIE

etch_anisotropic · RIE

1.04	237.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

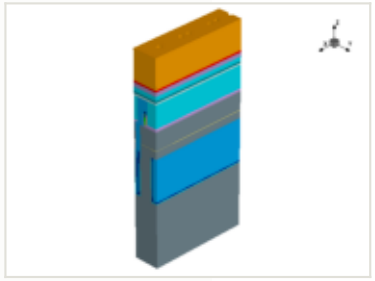

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

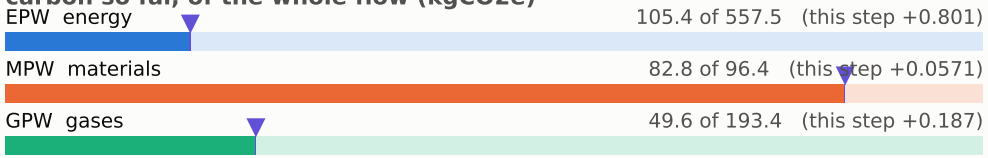

embodied carbon up to each step (kgCO2e per wafer)

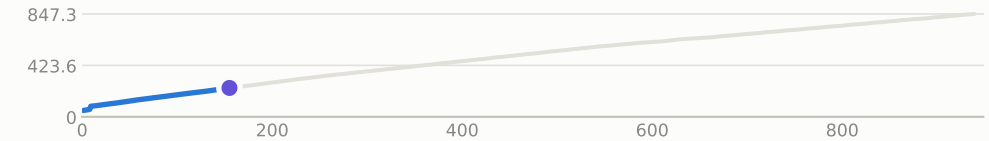

x cut at 0.385 µm

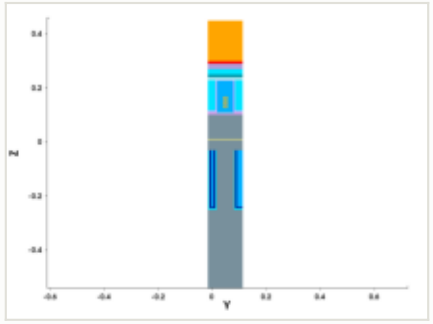

y cut at 0.049 µm

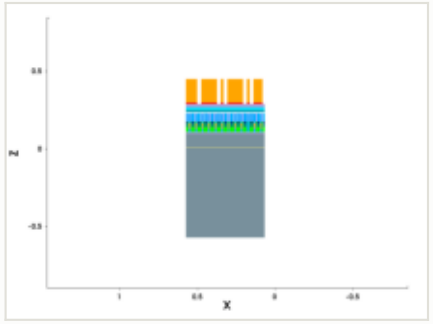

mask for this step

no mask for this step

steps by process area

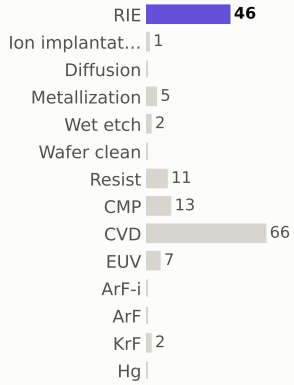

materials deposited (g)



gases emitted (g)

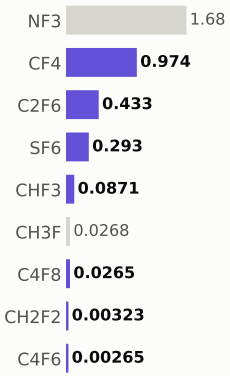

Step #1680: RIE

etch_anisotropic · RIE

1.04	238.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

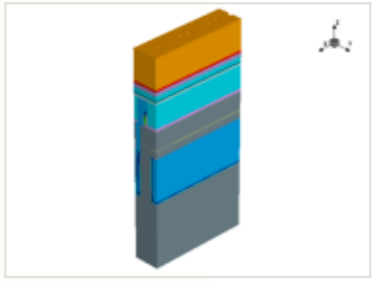

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

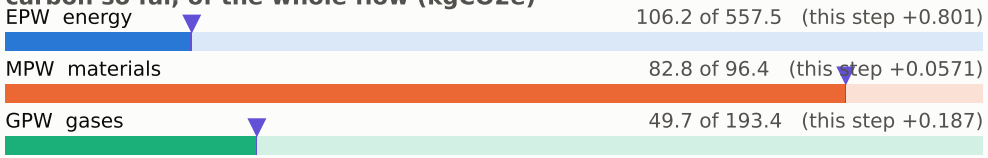

embodied carbon up to each step (kgCO2e per wafer)

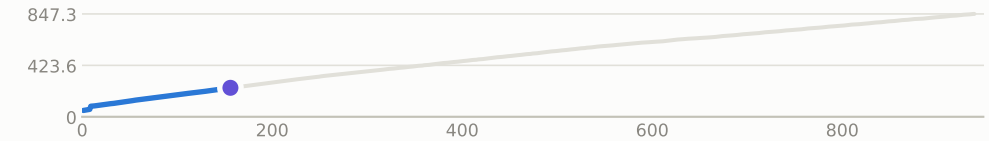

x cut at 0.385 µm

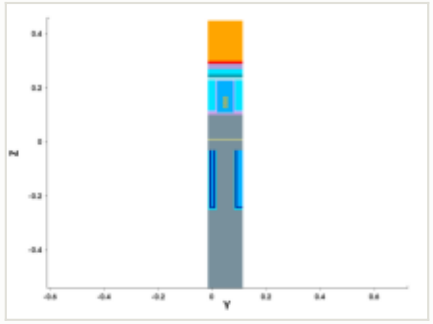

y cut at 0.049 µm

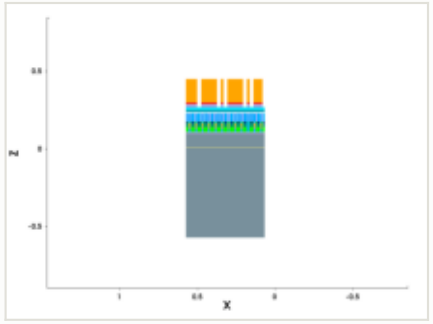

mask for this step

no mask for this step

steps by process area

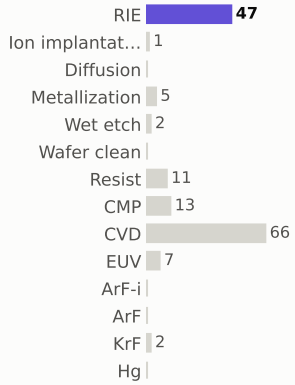

materials deposited (g)



gases emitted (g)

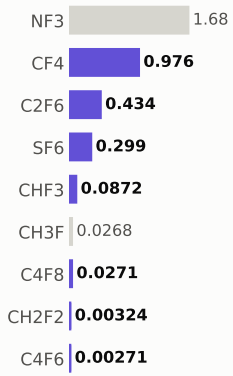

Step #1690: Resist

etch_strip · Resist

0.169	239.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

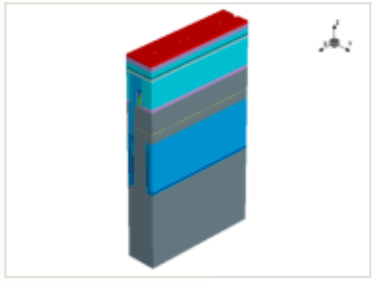

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

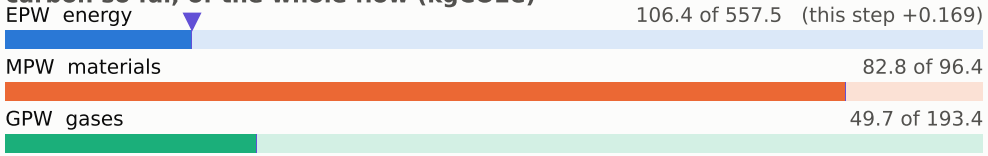

embodied carbon up to each step (kgCO2e per wafer)

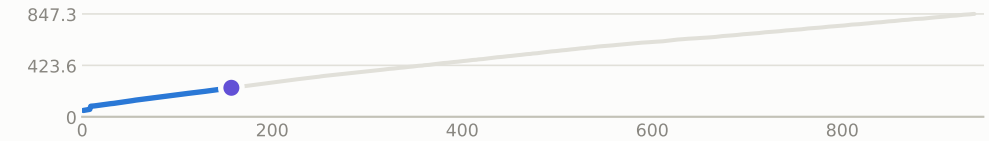

x cut at 0.385 µm

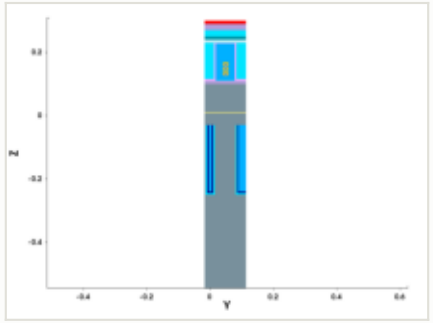

y cut at 0.049 µm

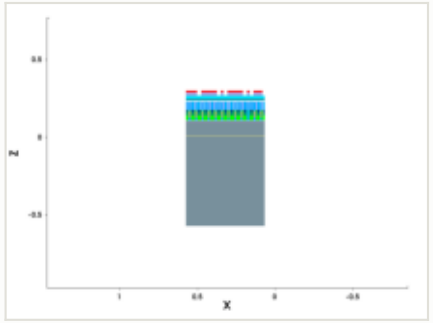

mask for this step

no mask for this step

steps by process area

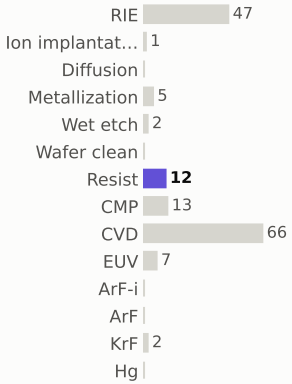

materials deposited (g)



gases emitted (g)



Step #1700: RIE

etch_anisotropic · RIE

1.04	240.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

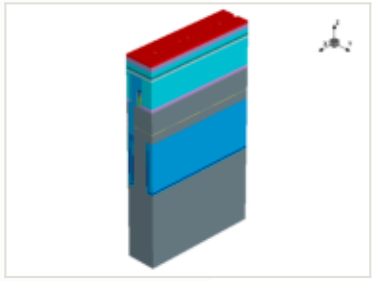

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

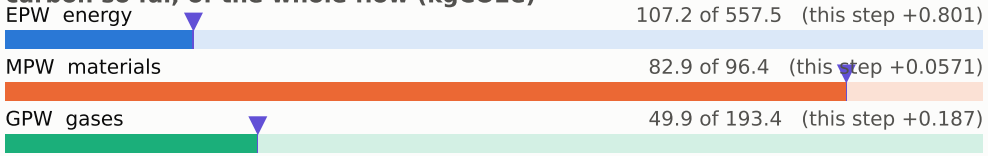

embodied carbon up to each step (kgCO2e per wafer)

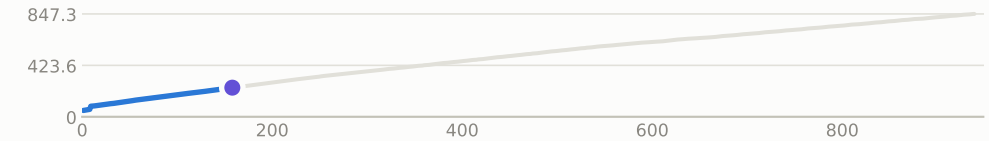

x cut at 0.385 µm

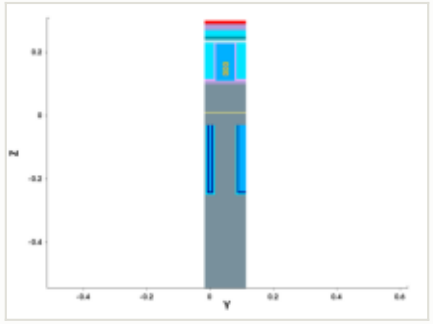

y cut at 0.049 µm

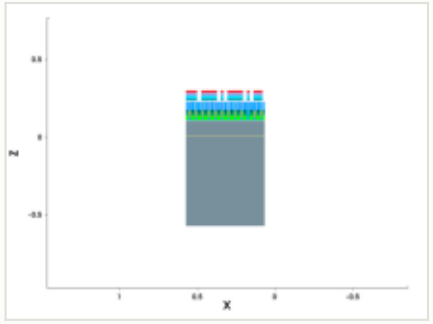

mask for this step

no mask for this step

steps by process area

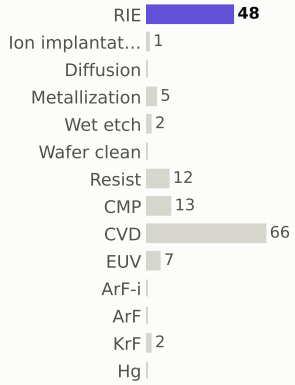

materials deposited (g)



gases emitted (g)

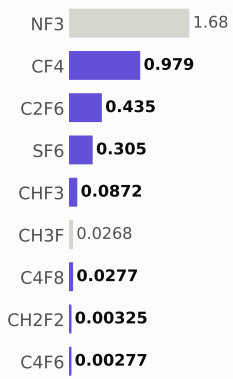

Step #1710: Metallization

depo_isotropic · Metallization

1.23	241.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

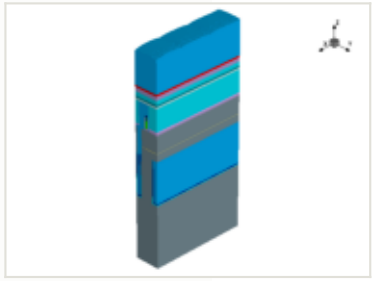

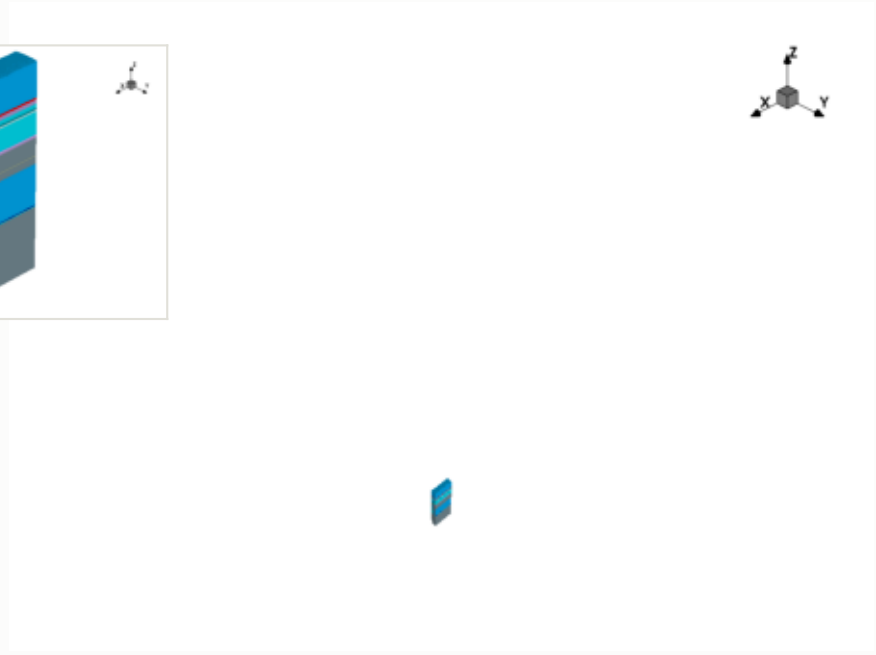

this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

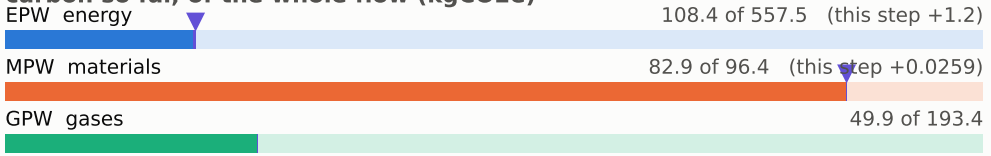

embodied carbon up to each step (kgCO2e per wafer)

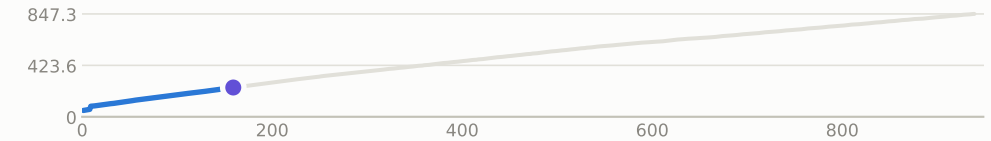

x cut at 0.385 µm

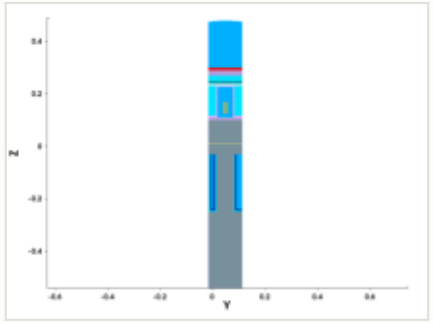

y cut at 0.049 µm

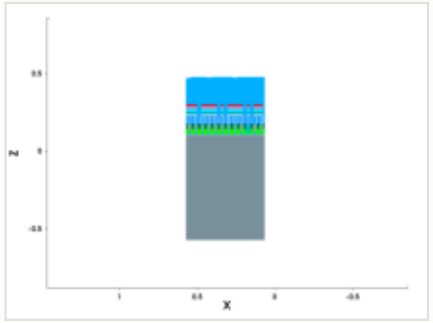

mask for this step

no mask for this step

steps by process area

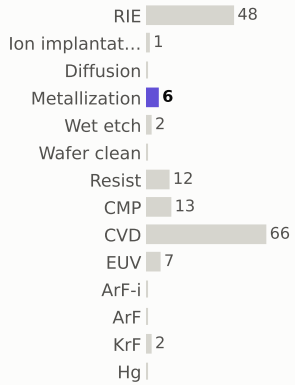

materials deposited (g)

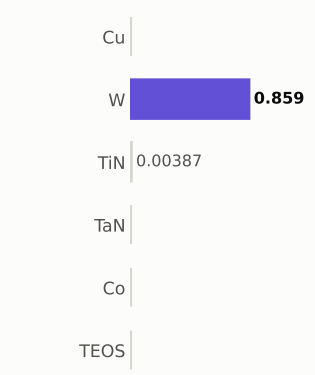

gases emitted (g)

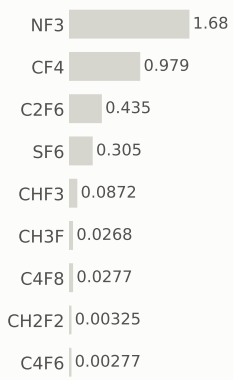

Step #1720: CMP

etch_cmp · CMP

0.169	241.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

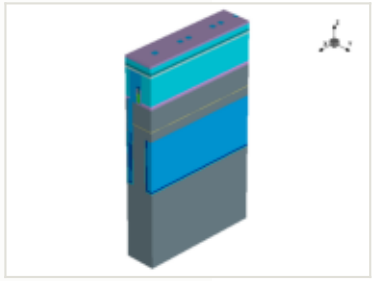

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

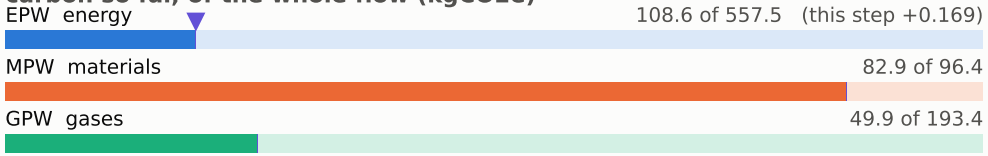

embodied carbon up to each step (kgCO2e per wafer)

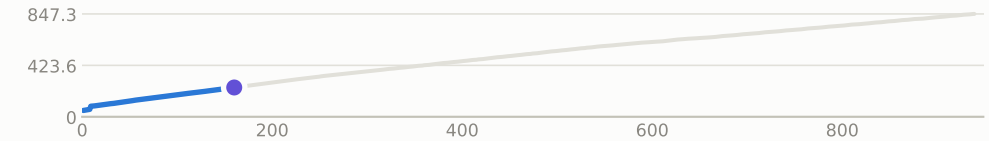

x cut at 0.385 µm

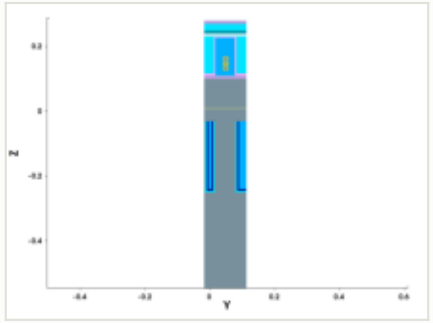

y cut at 0.049 µm

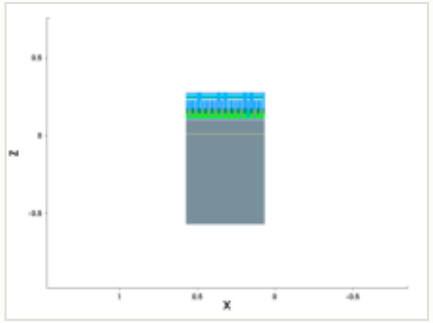

mask for this step

no mask for this step

steps by process area

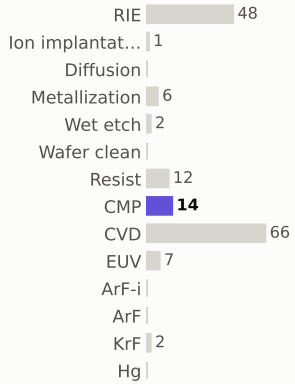

materials deposited (g)

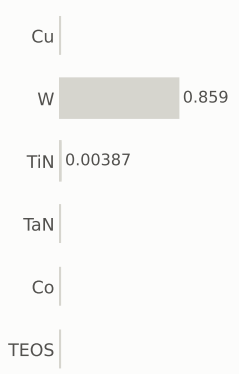

gases emitted (g)

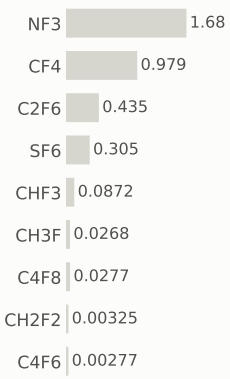

Step #1730: CVD

depo_fill · CVD

1.31	242.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

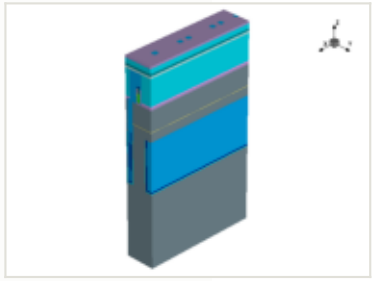

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

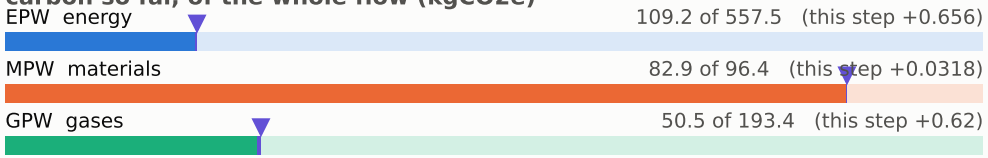

embodied carbon up to each step (kgCO2e per wafer)

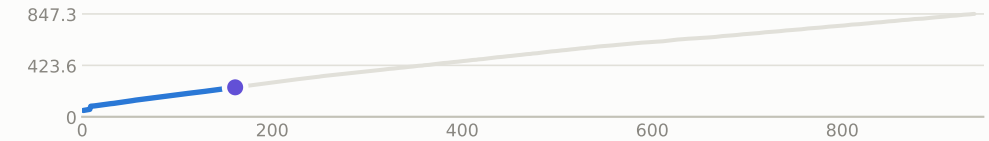

x cut at 0.385 µm

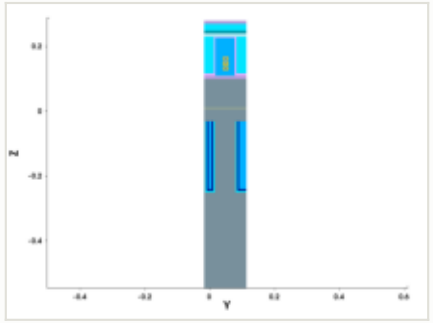

y cut at 0.049 µm

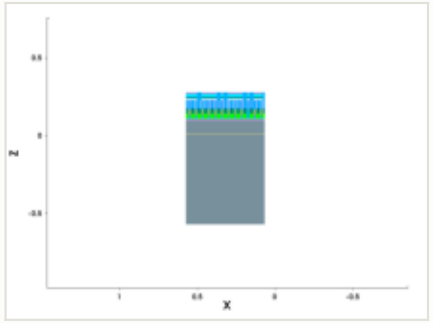

mask for this step

no mask for this step

steps by process area

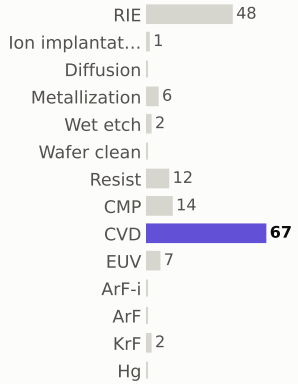

materials deposited (g)

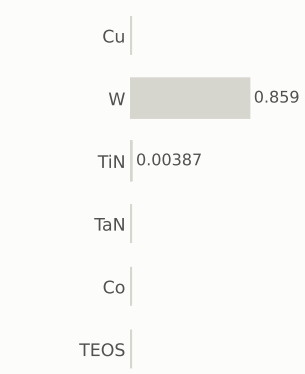

gases emitted (g)

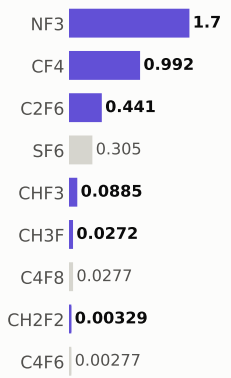

Step #1750: Wafer

bond_structure · Wafer

0	242.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

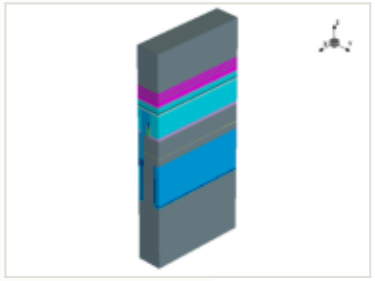

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

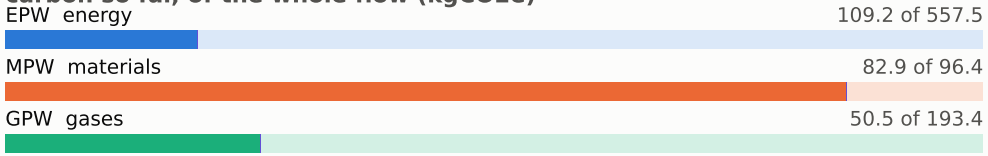

embodied carbon up to each step (kgCO2e per wafer)

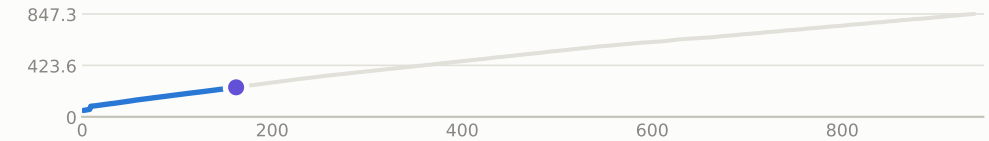

x cut at 0.385 µm

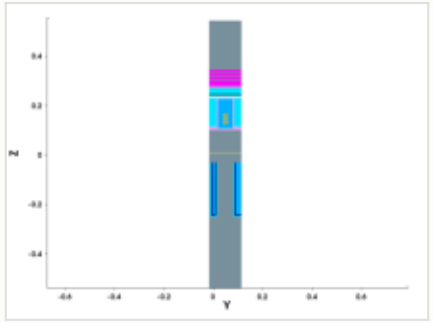

y cut at 0.049 µm

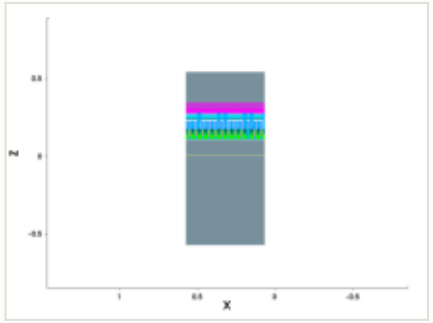

mask for this step

no mask for this step

steps by process area

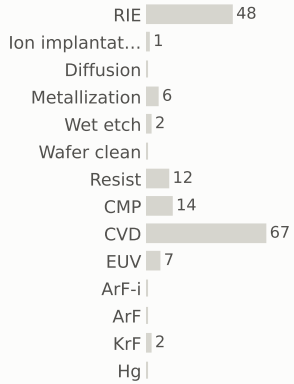

materials deposited (g)

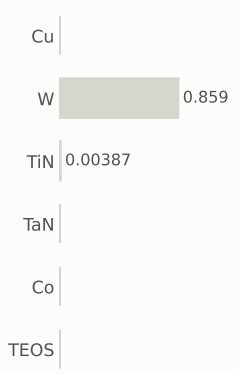

gases emitted (g)

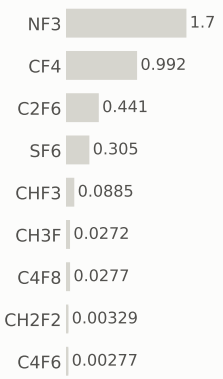

Step #1760: CMP

etch_cmp · CMP

0.169	242.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

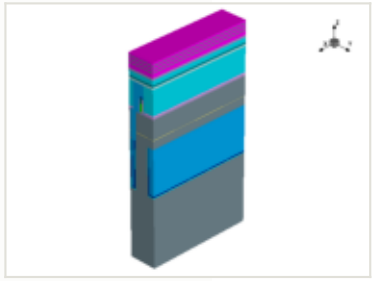

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

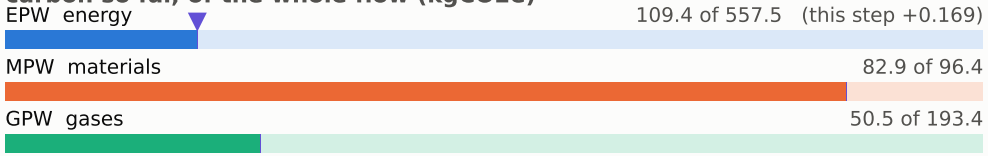

embodied carbon up to each step (kgCO2e per wafer)

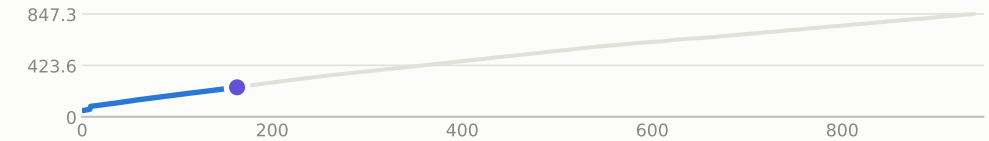

x cut at 0.385 µm

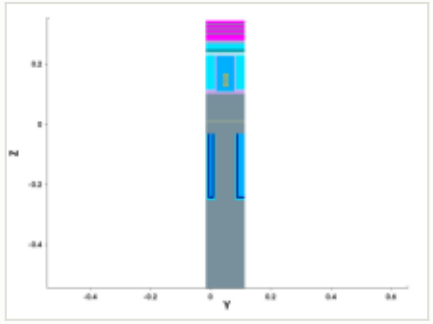

y cut at 0.049 µm

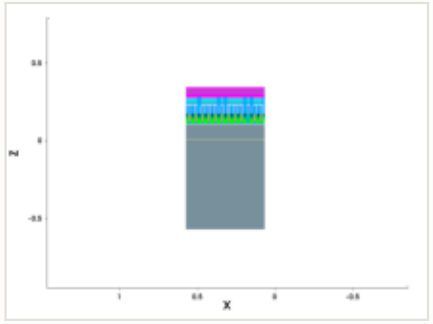

mask for this step

no mask for this step

steps by process area

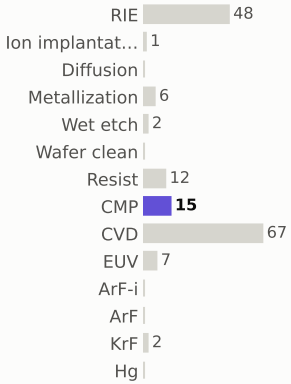

materials deposited (g)

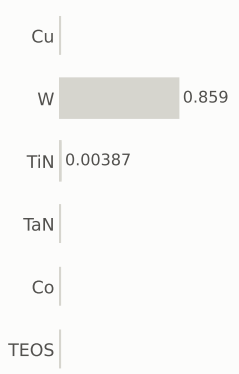

gases emitted (g)

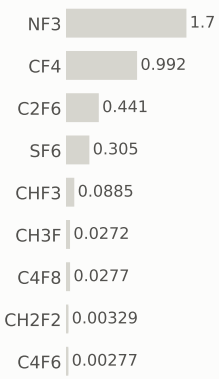

Step #1780: CVD

depo_height_dependent · CVD

1.31	244.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

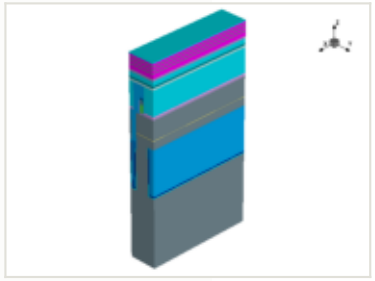

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

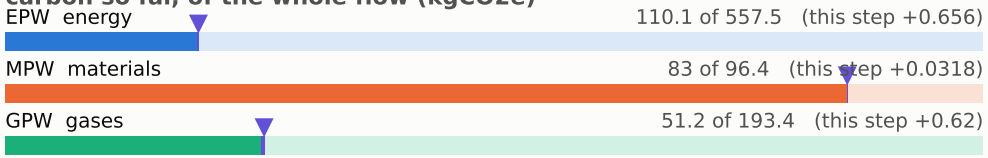

embodied carbon up to each step (kgCO2e per wafer)

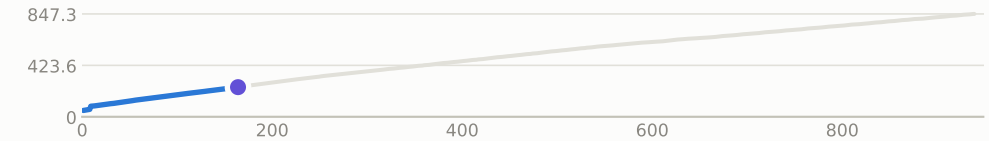

x cut at 0.385 µm

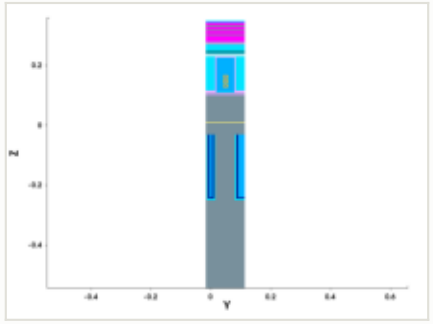

y cut at 0.049 µm

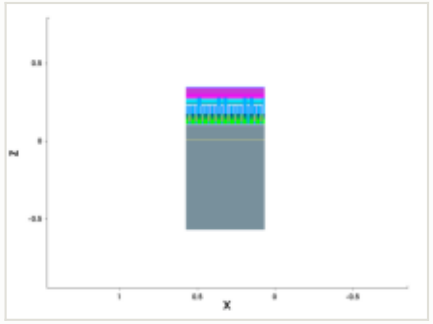

mask for this step

no mask for this step

steps by process area

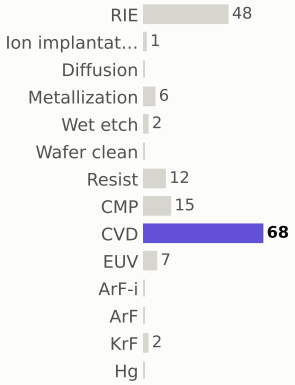

materials deposited (g)

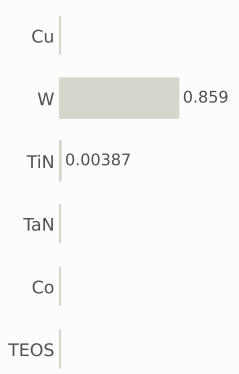

gases emitted (g)

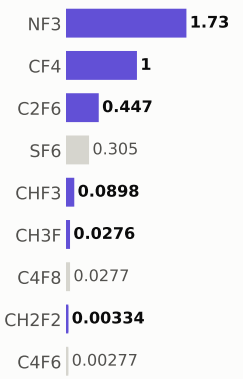

Step #1790: CVD

depo_height_dependent · CVD

1.31	245.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

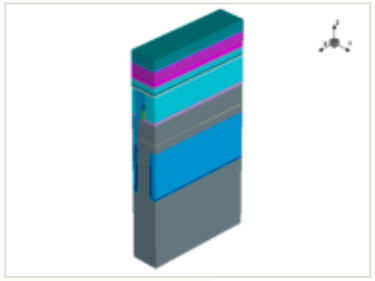

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

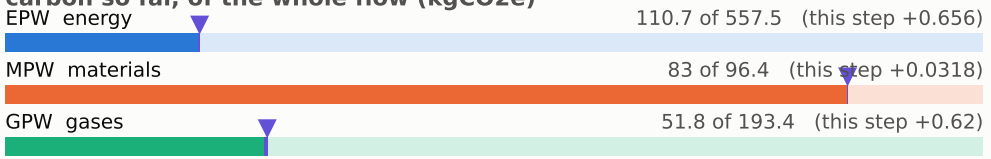

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

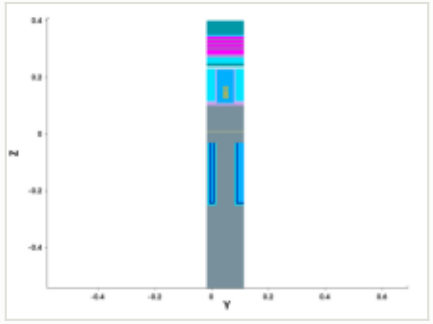

y cut at 0.049 µm

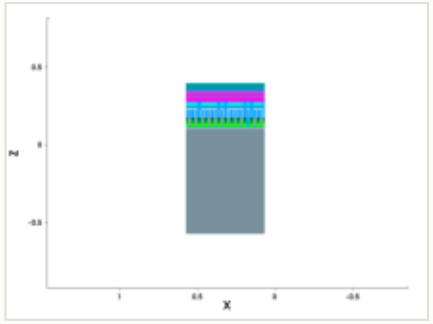

mask for this step

no mask for this step

steps by process area

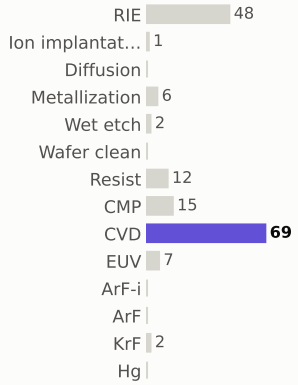

materials deposited (g)

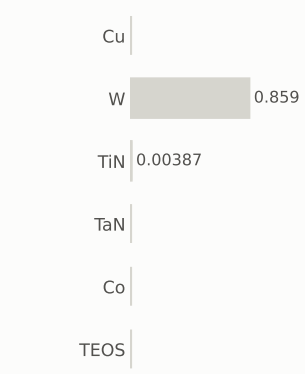

gases emitted (g)

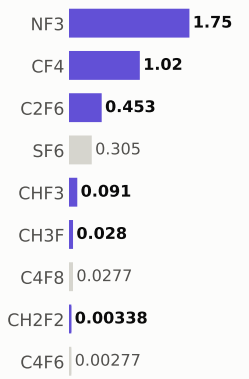

Step #1800: CVD

depo_height_dependent · CVD

1.31	246.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

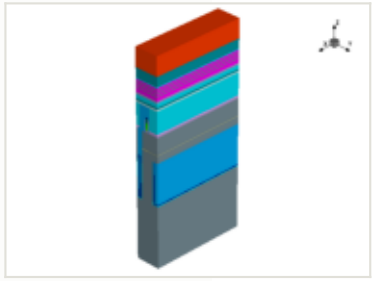

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

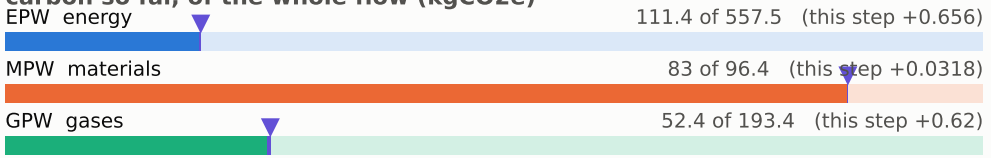

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

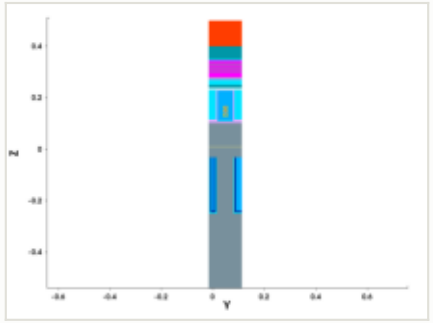

y cut at 0.049 µm

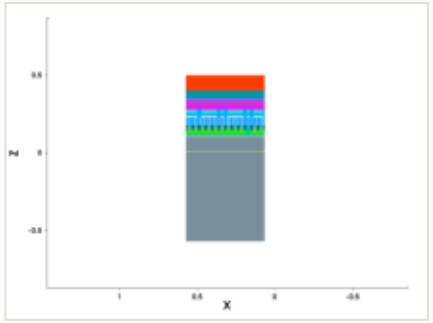

mask for this step

no mask for this step

steps by process area

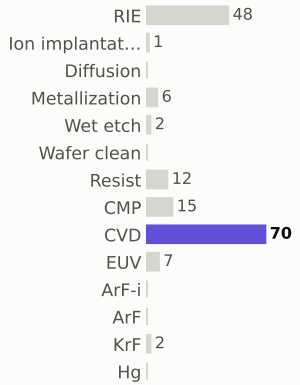

materials deposited (g)

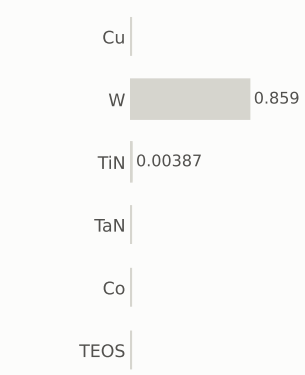

gases emitted (g)

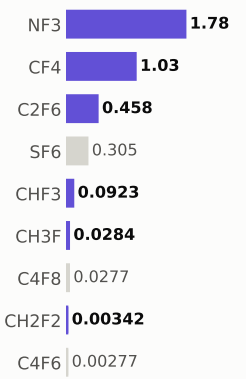

Step #1810: CVD

depo_height_dependent · CVD

1.31	248.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

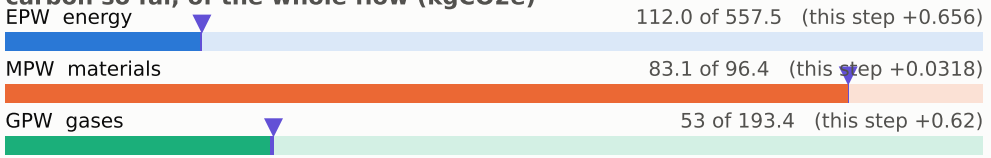

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

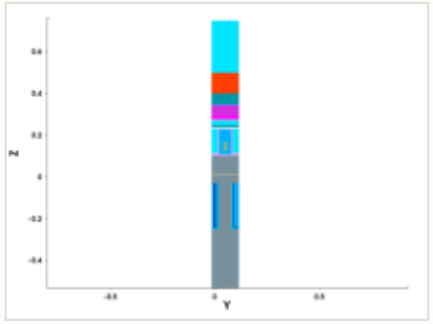

y cut at 0.049 µm

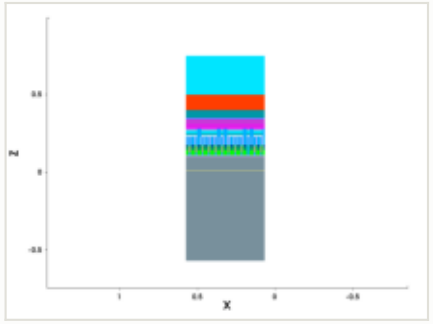

mask for this step

no mask for this step

steps by process area

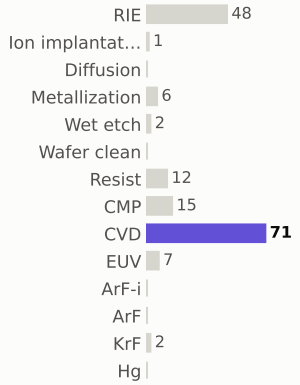

materials deposited (g)

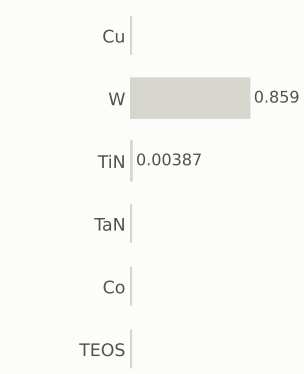

gases emitted (g)

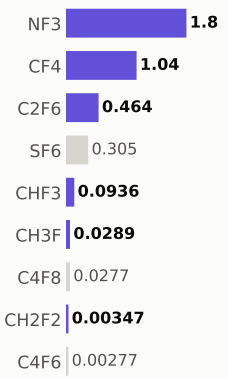

Step #1820: CVD

depo_height_dependent · CVD

1.31	249.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

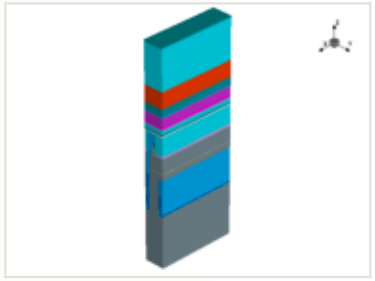

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

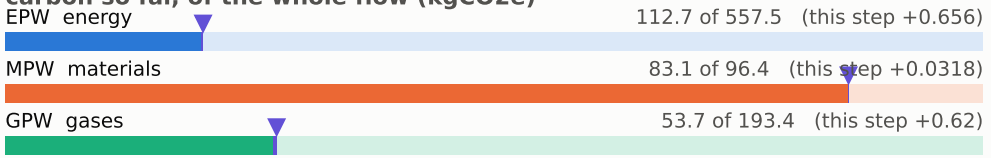

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

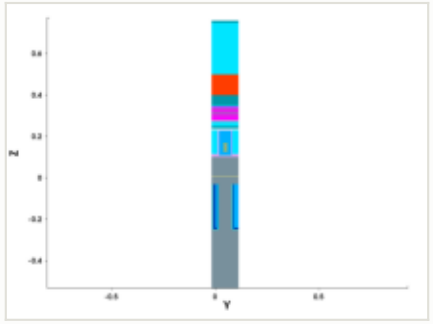

y cut at 0.049 µm

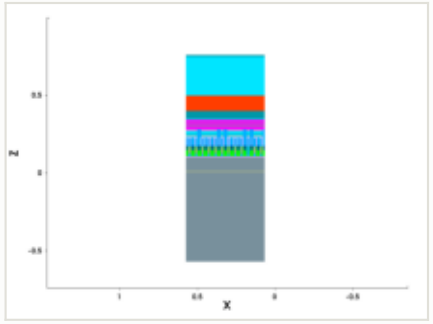

mask for this step

no mask for this step

steps by process area

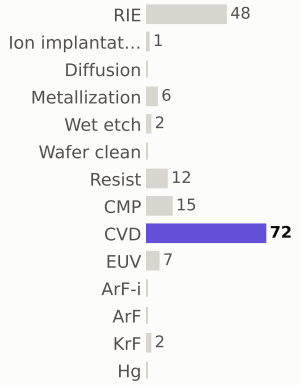

materials deposited (g)

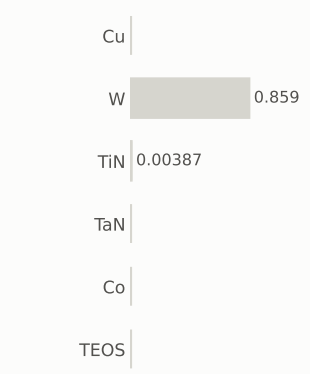

gases emitted (g)

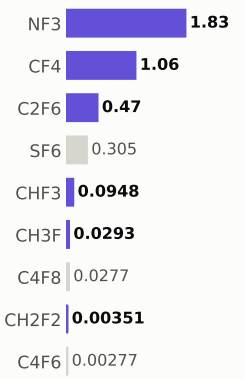

Step #1830: EUV

litho_patterning · EUV

1.96	251.4	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

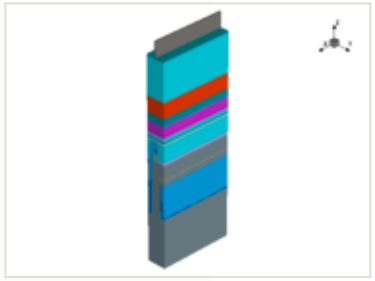

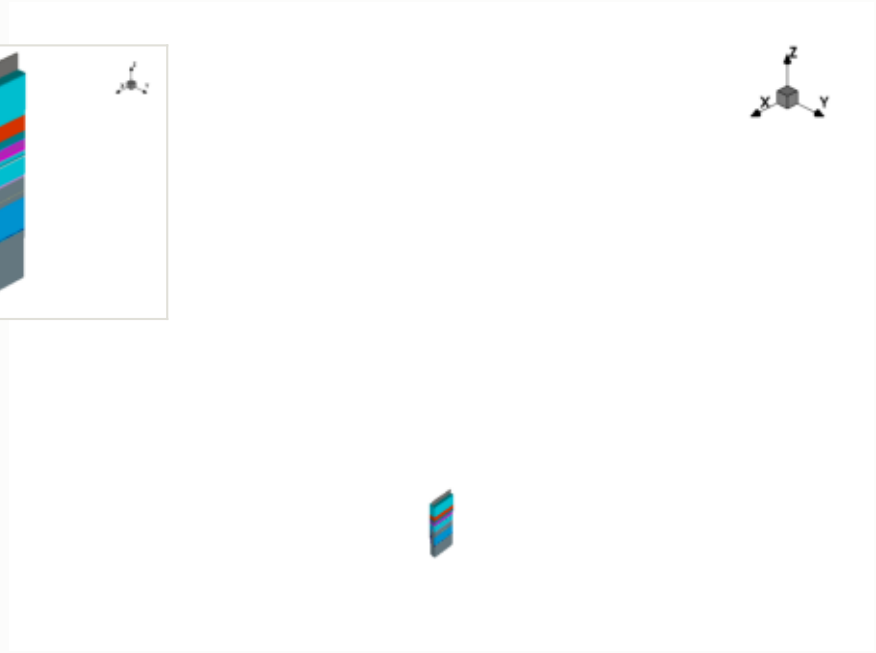

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

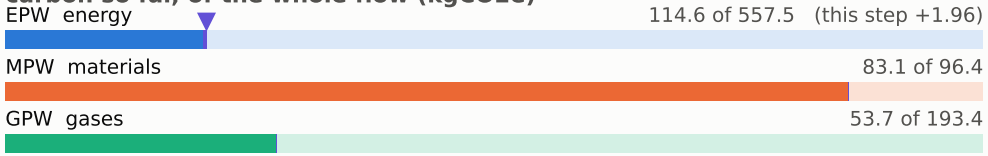

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

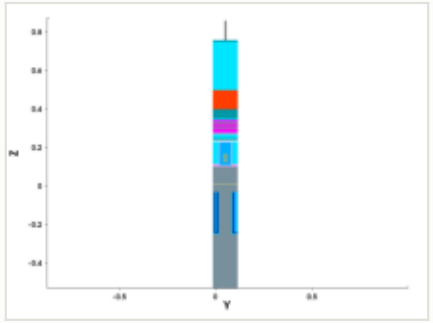

y cut at 0.049 µm

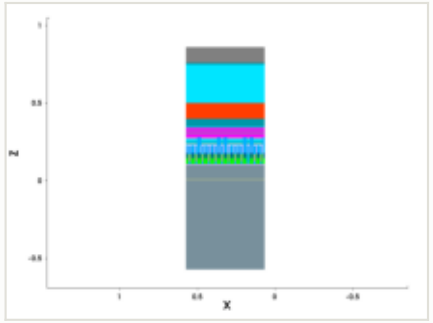

mask: layer 2:0, positive (GDSII)

steps by process area

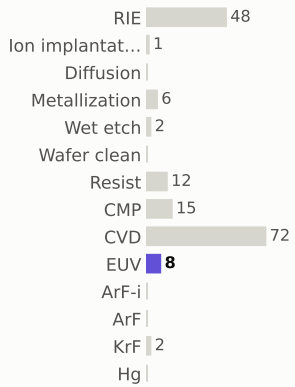

materials deposited (g)



gases emitted (g)

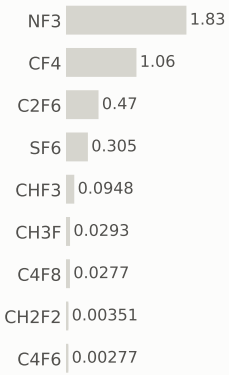

Step #1840: RIE

etch_anisotropic · RIE

1.04	252.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

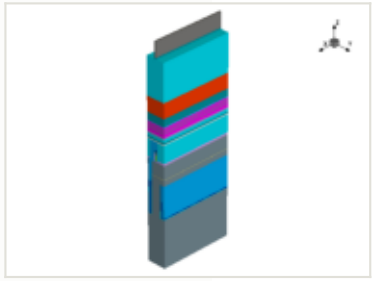

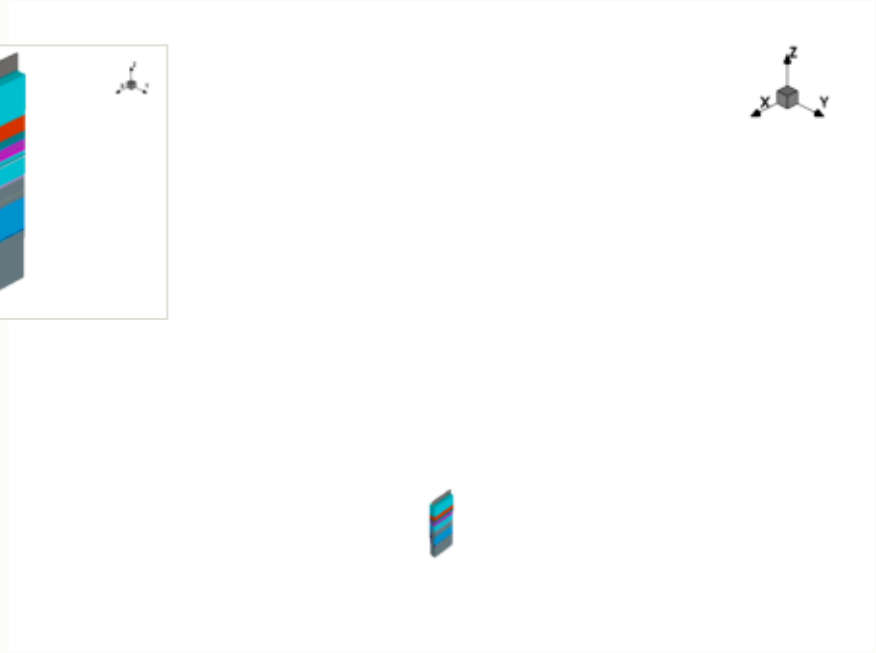

x cut at 0.385 µm

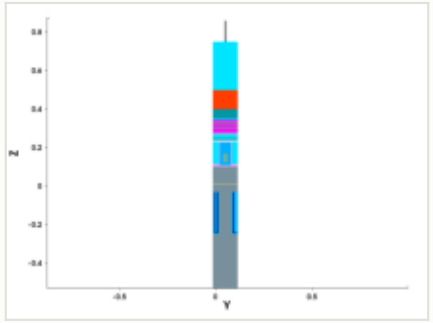

y cut at 0.049 µm

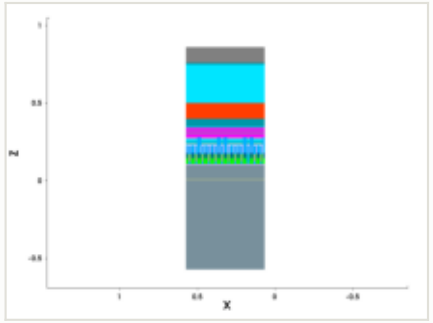

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

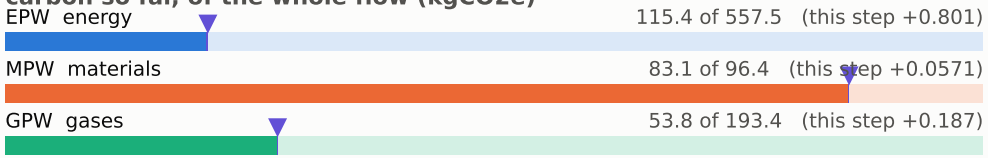

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

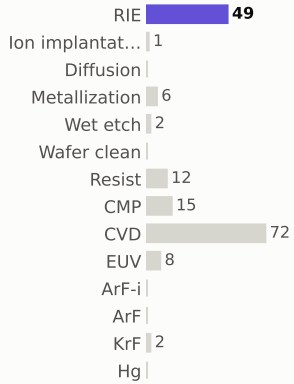

materials deposited (g)

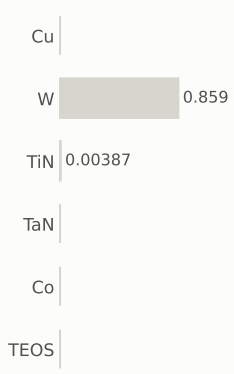

gases emitted (g)

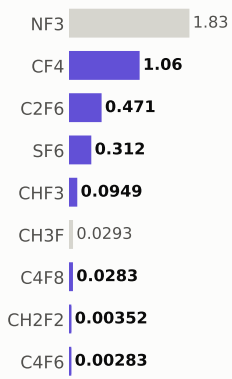

Step #1850: RIE

etch_anisotropic · RIE

1.04	253.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

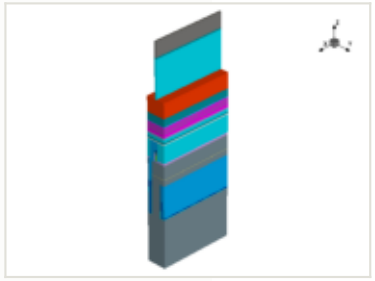

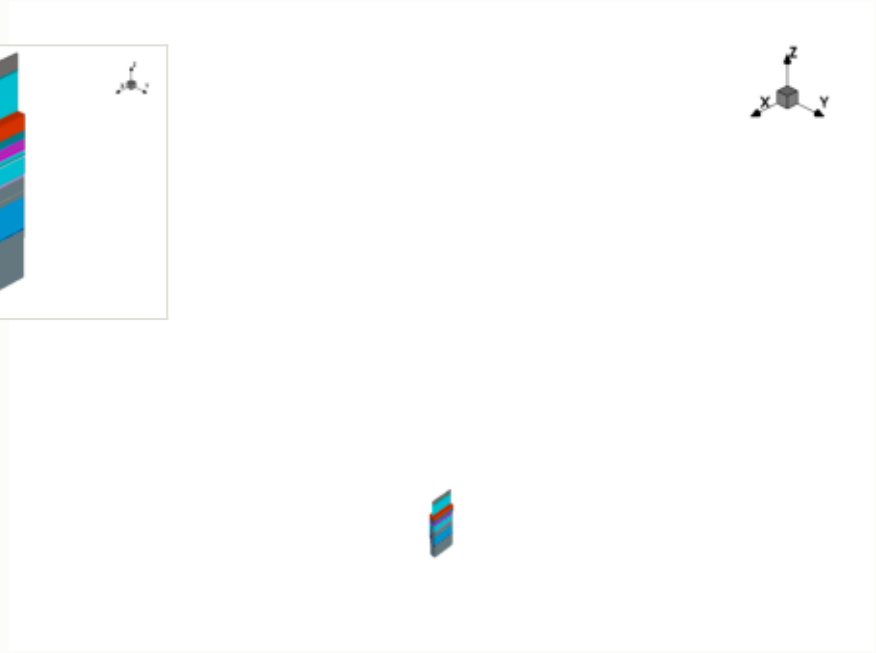

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

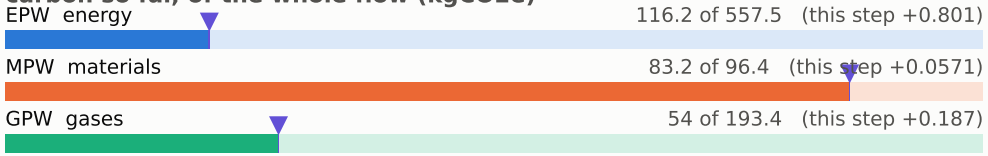

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

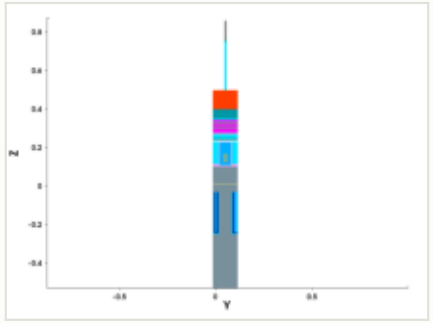

y cut at 0.049 µm

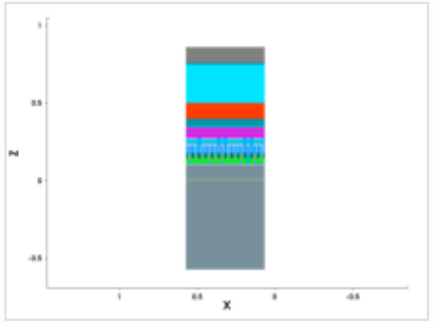

mask for this step

no mask for this step

steps by process area

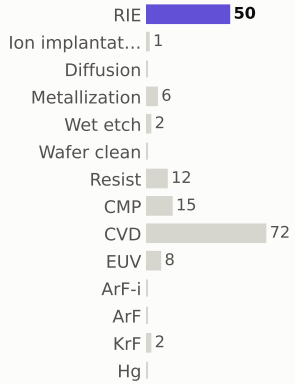

materials deposited (g)



gases emitted (g)



Step #1860: RIE

etch_anisotropic · RIE

1.04	254.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

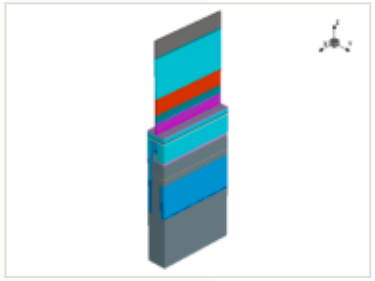

x cut at 0.385 µm

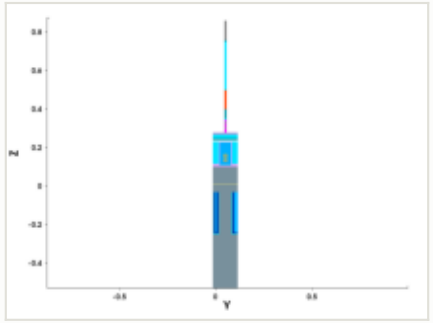

y cut at 0.049 µm

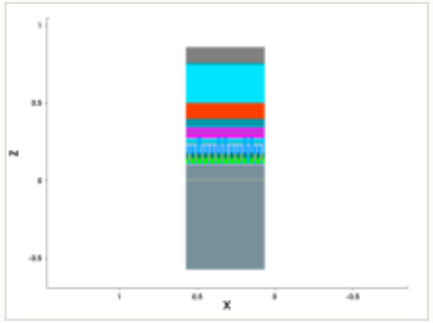

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

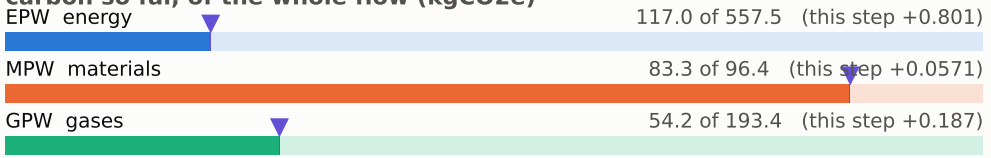

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

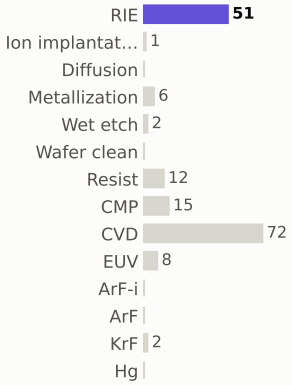

materials deposited (g)

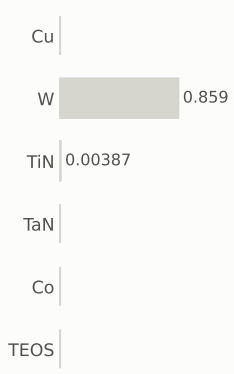

gases emitted (g)

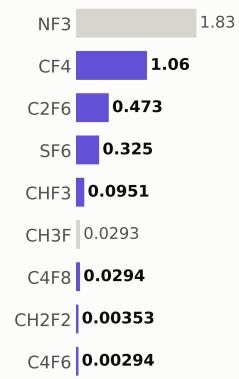

Step #1870: RIE

etch_anisotropic · RIE

1.04	255.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

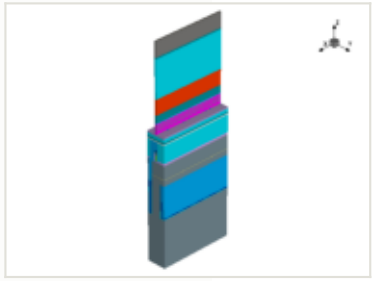

x cut at 0.385 µm

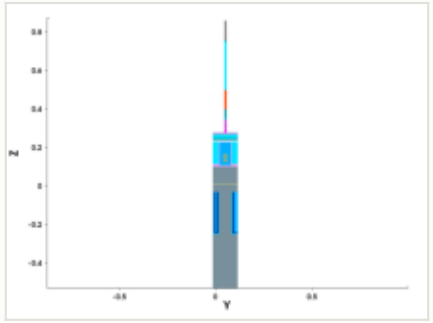

y cut at 0.049 µm

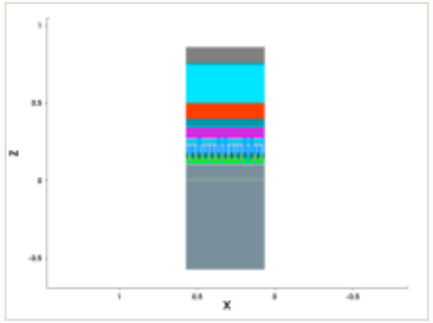

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

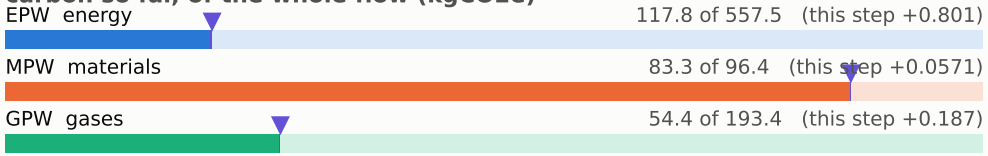

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

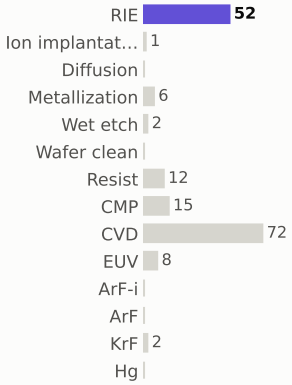

materials deposited (g)

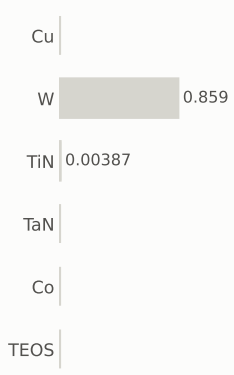

gases emitted (g)

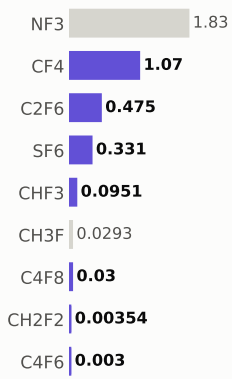

Step #1880: Resist

etch_strip · Resist

0.169	255.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

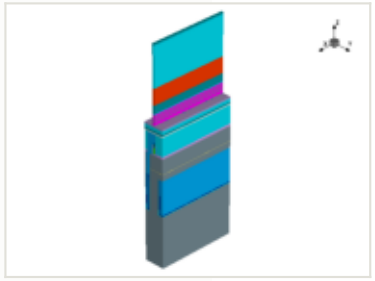

x cut at 0.385 µm

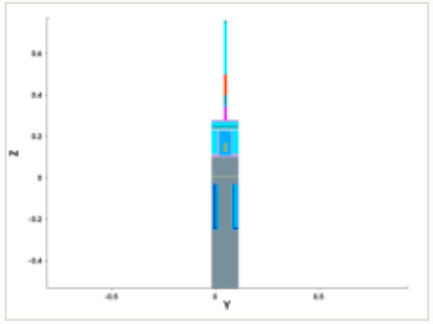

y cut at 0.049 µm

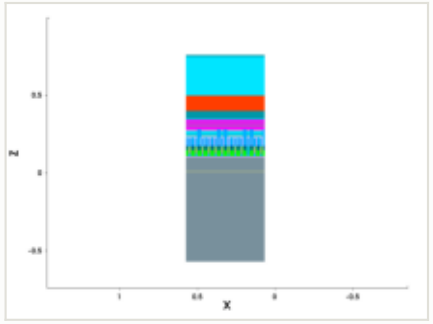

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

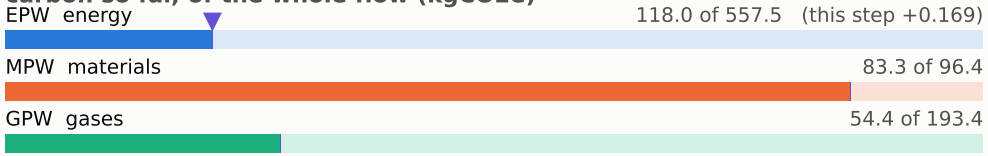

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

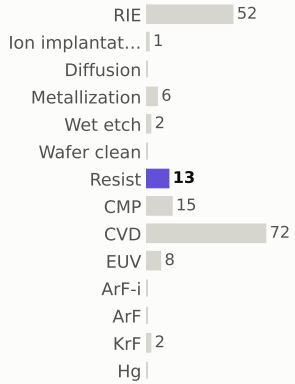

materials deposited (g)



gases emitted (g)



Step #1890: RIE

etch_anisotropic · RIE

1.04	256.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

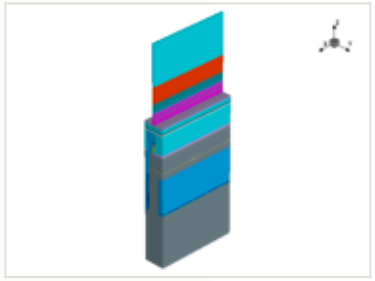

x cut at 0.385 µm

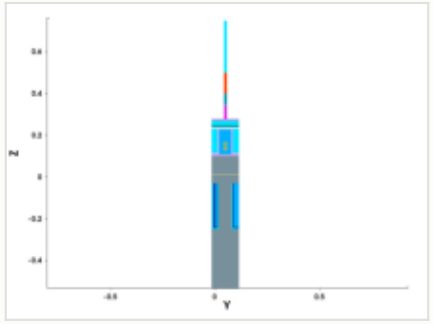

y cut at 0.049 µm

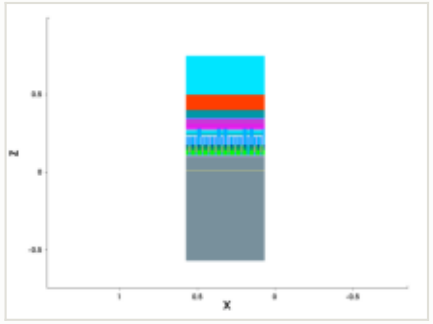

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

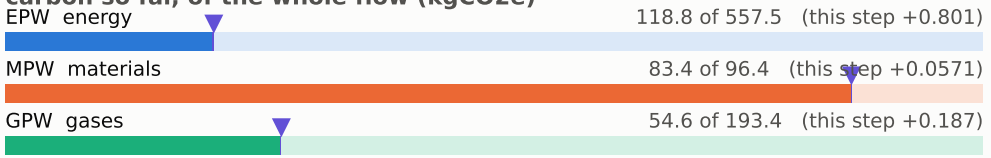

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

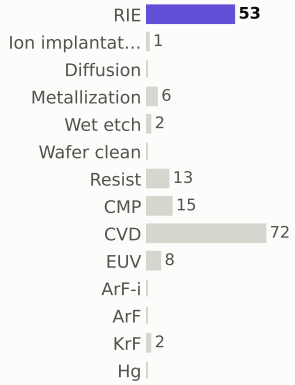

materials deposited (g)



gases emitted (g)

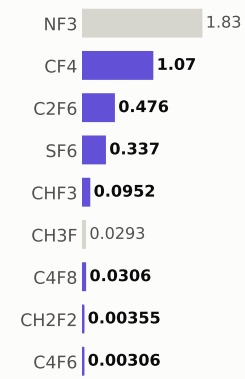

Step #1900: RIE

etch_anisotropic · RIE

1.04	257.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

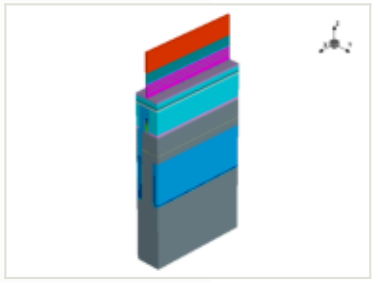

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

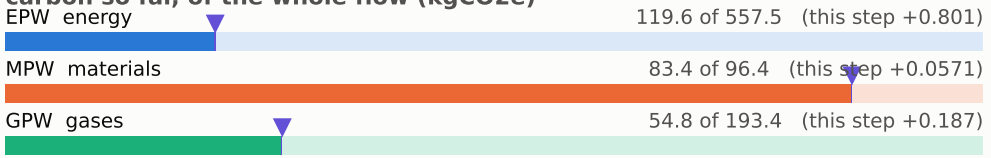

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

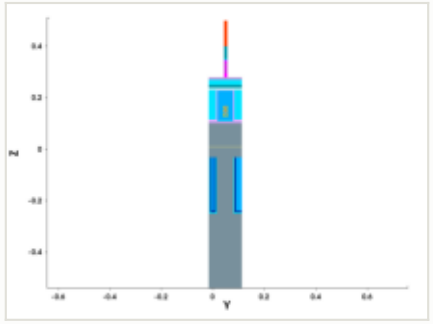

y cut at 0.049 µm

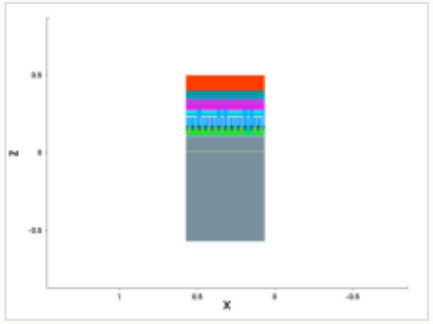

mask for this step

no mask for this step

steps by process area

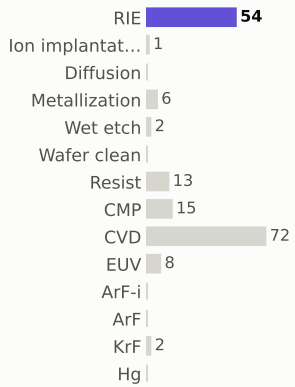

materials deposited (g)



gases emitted (g)

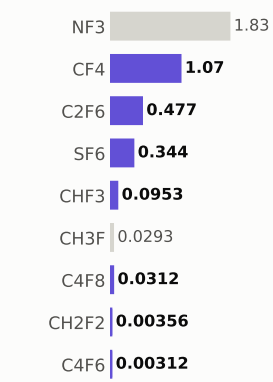

Step #1910: CVD

depo_isotropic · CVD

1.31	259.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

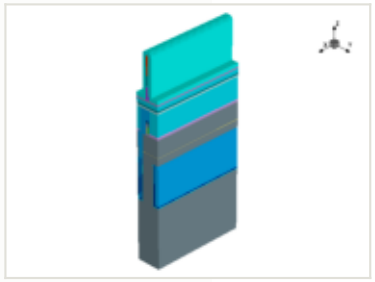

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

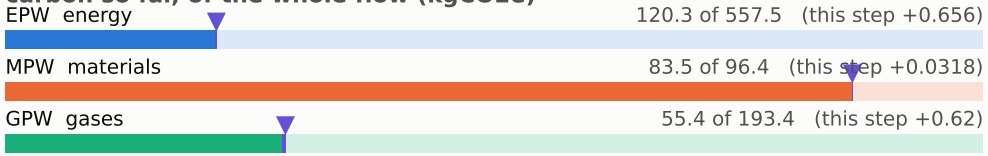

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

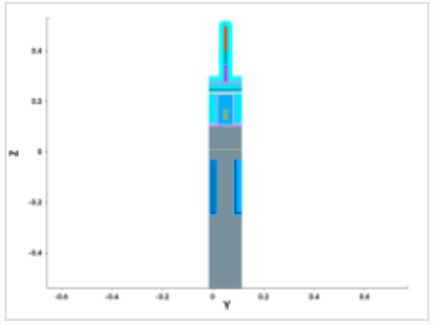

y cut at 0.049 µm

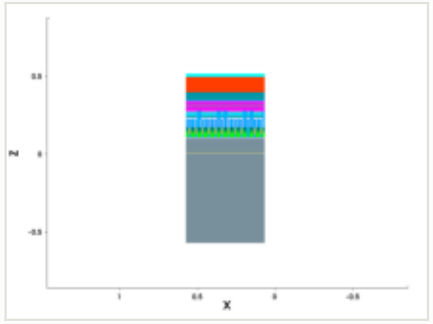

mask for this step

no mask for this step

steps by process area

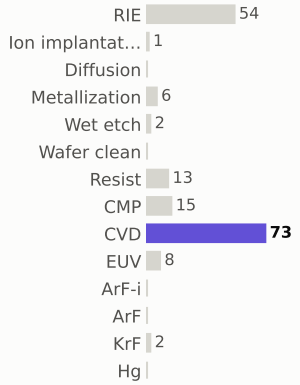

materials deposited (g)

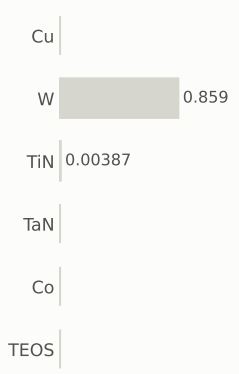

gases emitted (g)

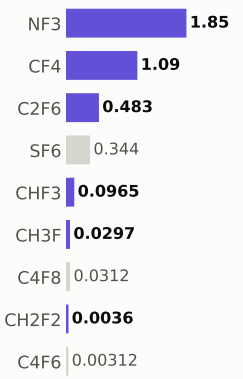

Step #1920: RIE

etch_anisotropic · RIE

1.04	260.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

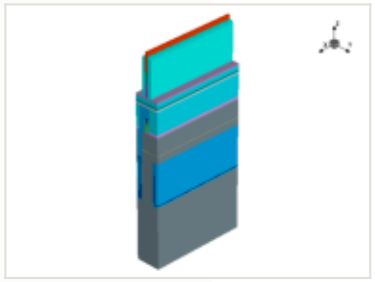

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

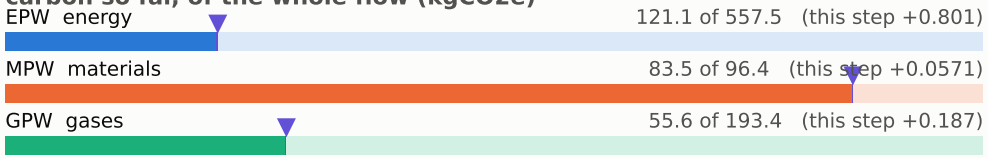

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

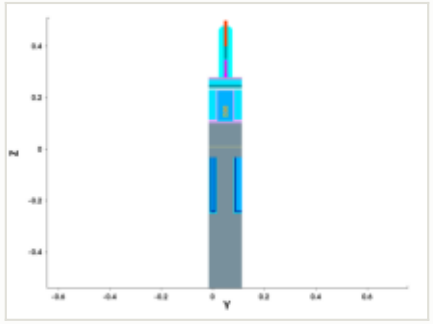

y cut at 0.049 µm

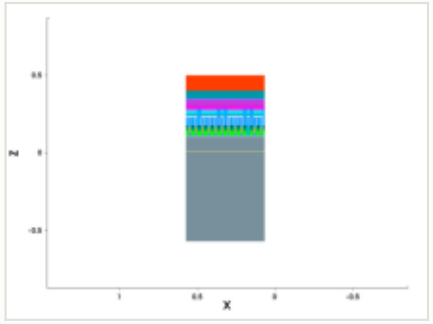

mask for this step

no mask for this step

steps by process area

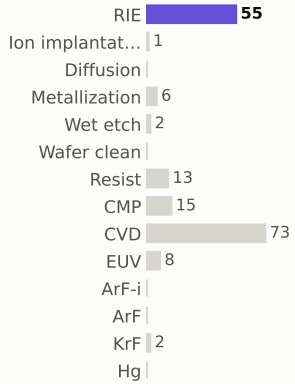

materials deposited (g)

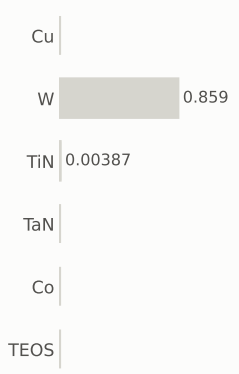

gases emitted (g)

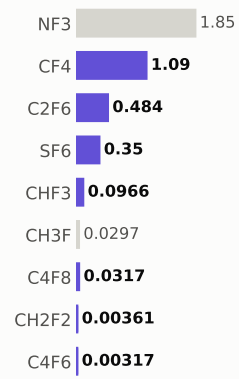

Step #1930: CMP

etch_cmp · CMP

0.169	260.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

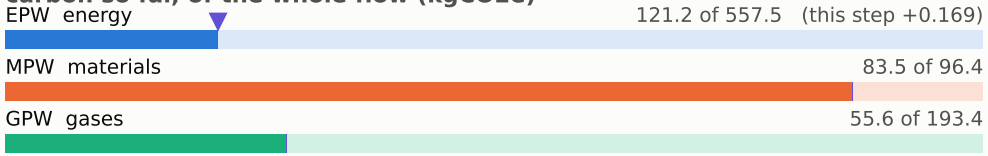

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

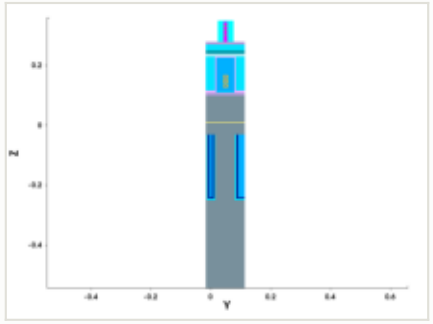

y cut at 0.049 µm

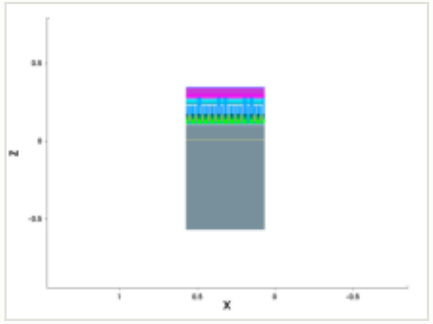

mask for this step

no mask for this step

steps by process area

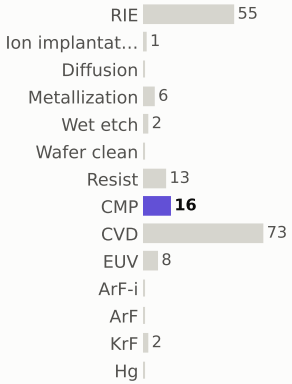

materials deposited (g)

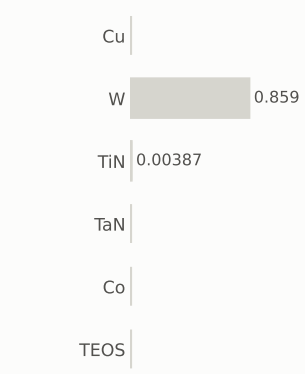

gases emitted (g)

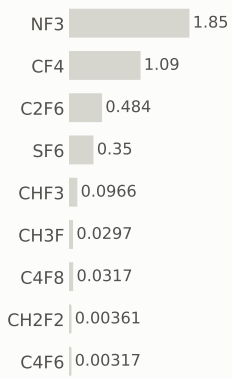

Step #1940: RIE

etch_anisotropic · RIE

1.04	261.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

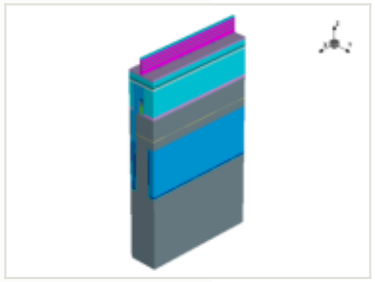

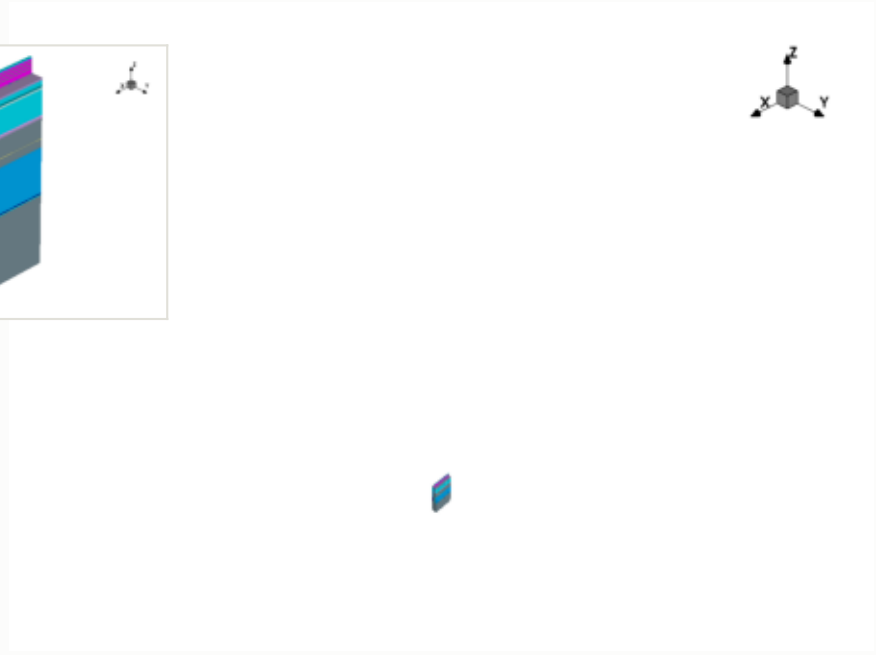

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

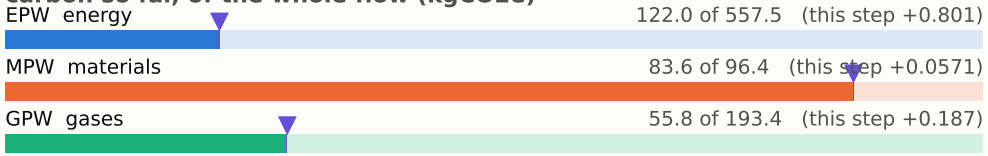

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

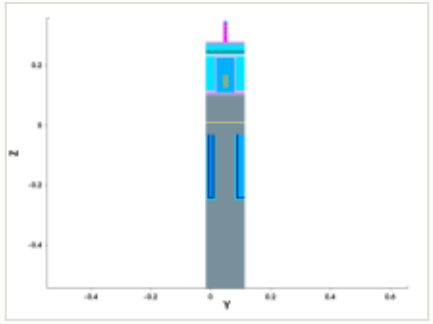

y cut at 0.049 µm

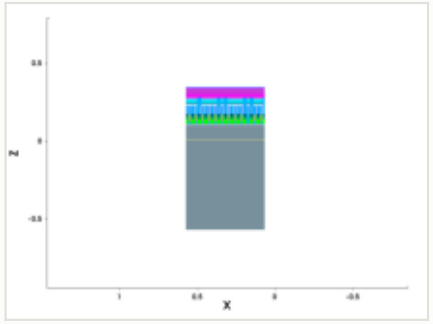

mask for this step

no mask for this step

steps by process area

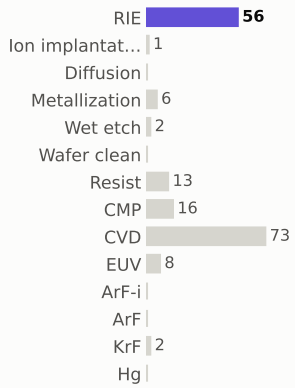

materials deposited (g)



gases emitted (g)



Step #1950: RIE

etch_anisotropic · RIE

1.04	262.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

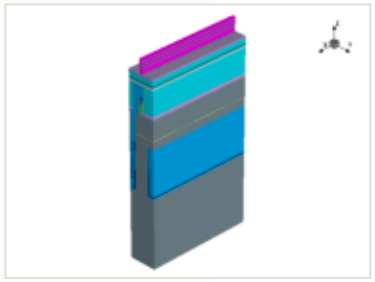

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

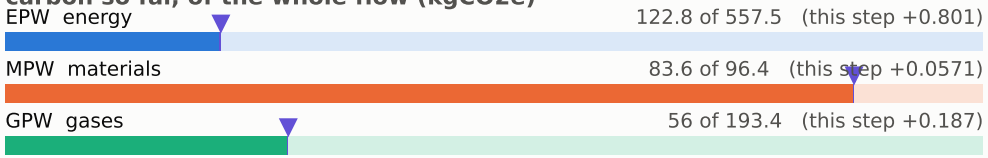

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

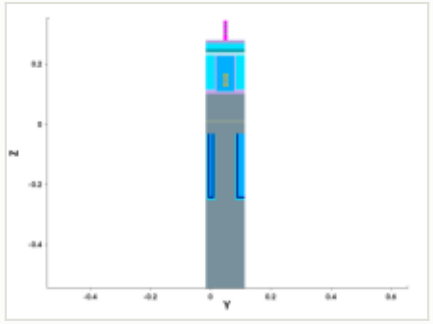

y cut at 0.049 µm

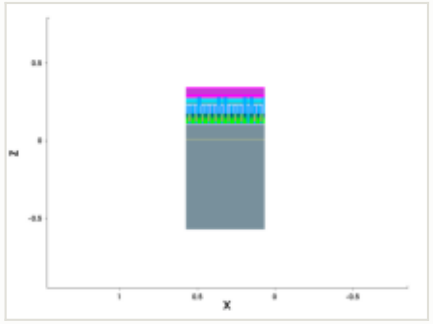

mask for this step

no mask for this step

steps by process area



materials deposited (g)

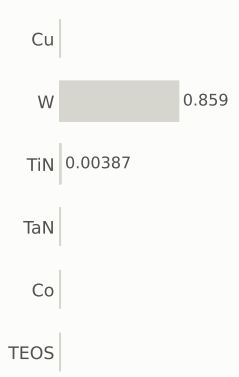

gases emitted (g)

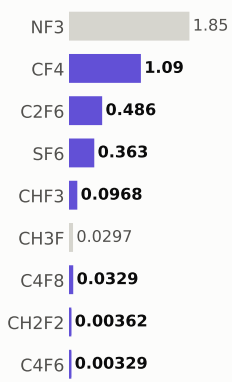

Step #1970: EUV

litho_patterning · EUV

1.96	264.4	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

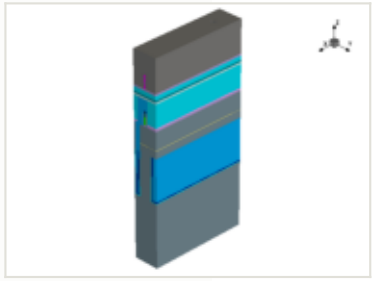

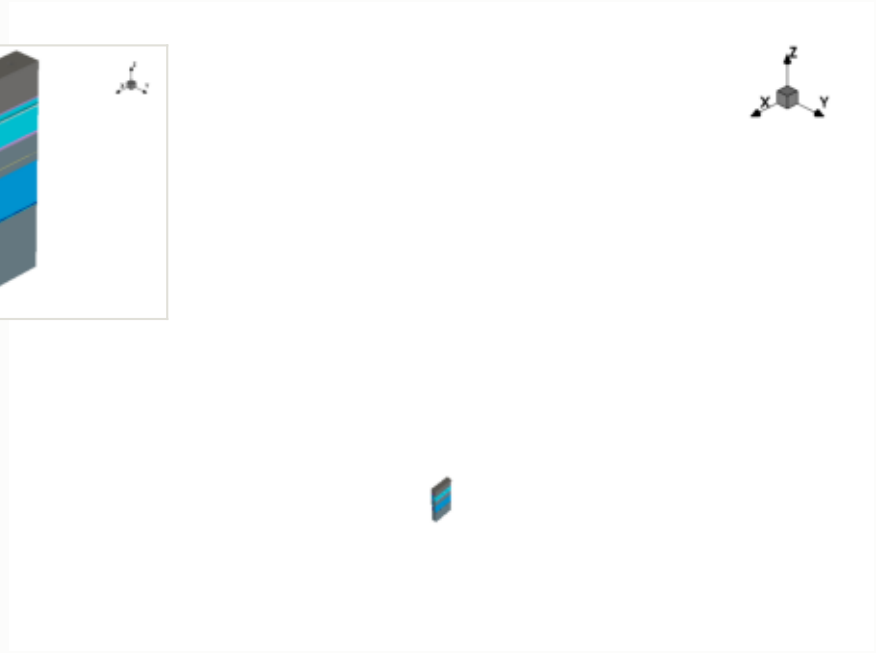

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

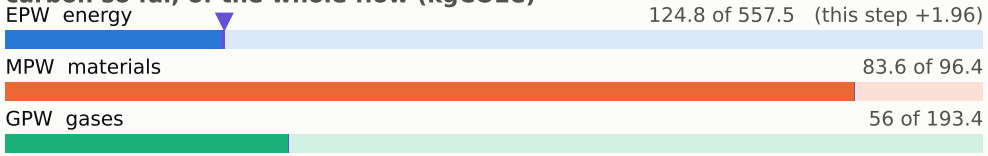

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

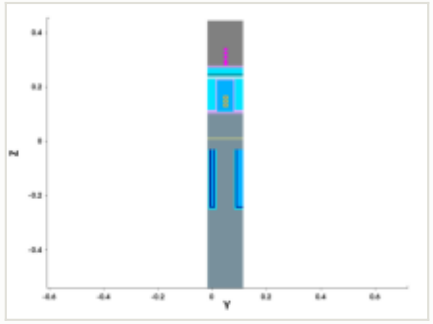

y cut at 0.049 µm

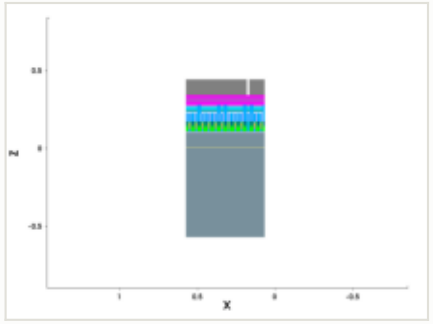

mask: layer 14:1 (GDSII)

steps by process area

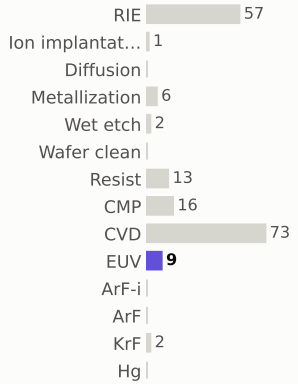

materials deposited (g)

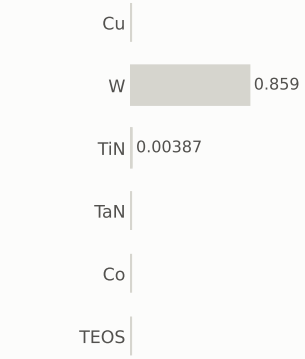

gases emitted (g)

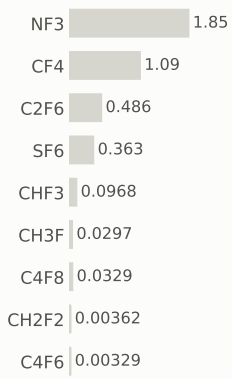

Step #1980: RIE

etch_anisotropic · RIE

1.04	265.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

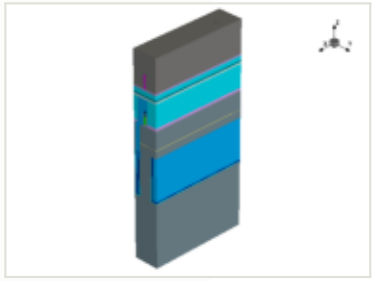

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

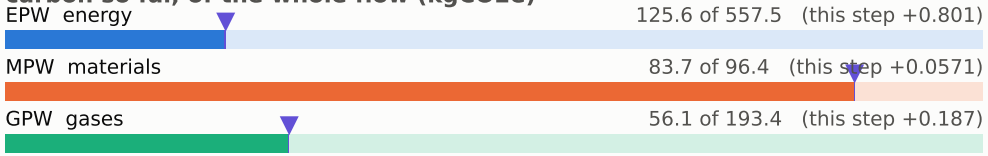

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

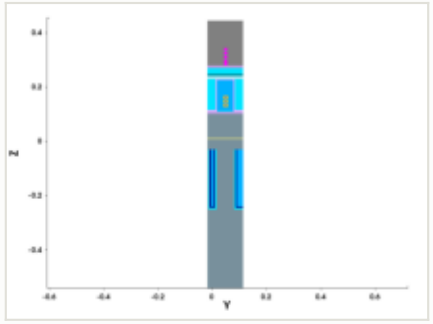

y cut at 0.049 µm

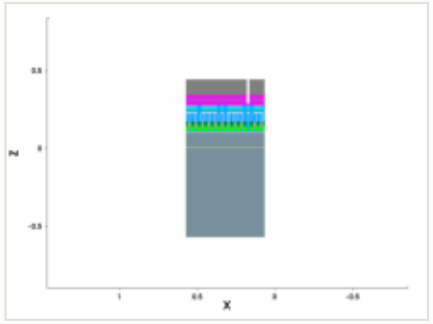

mask for this step

no mask for this step

steps by process area

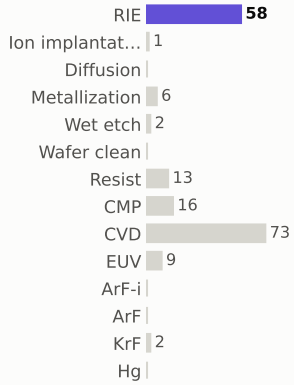

materials deposited (g)

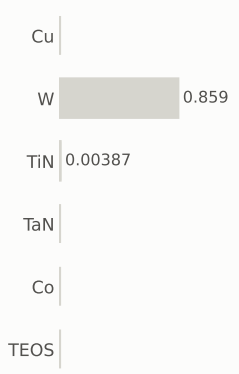

gases emitted (g)

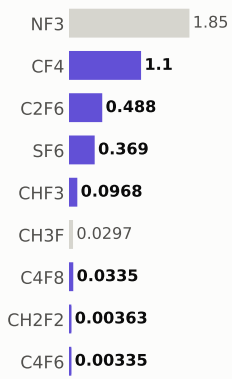

Step #1990: CVD

depo_fill · CVD

1.31	266.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

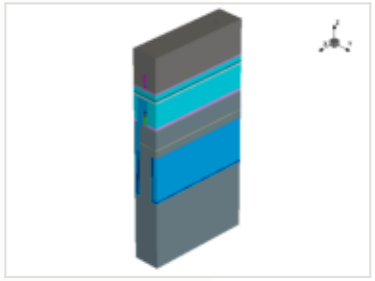

this step

process area	CVD
material	—
thickness	-0.055 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

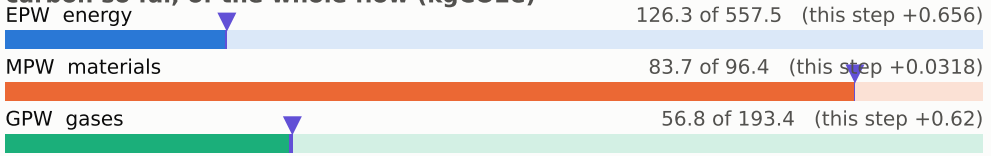

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

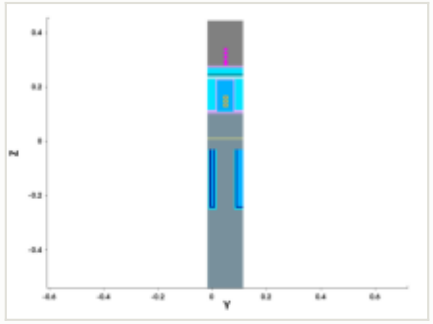

y cut at 0.049 µm

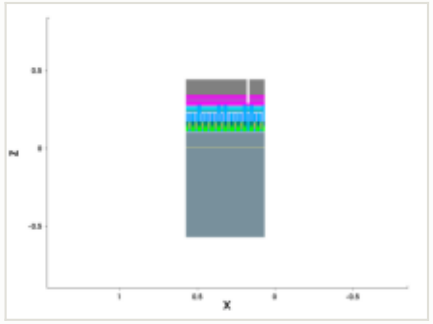

mask for this step

no mask for this step

steps by process area



materials deposited (g)

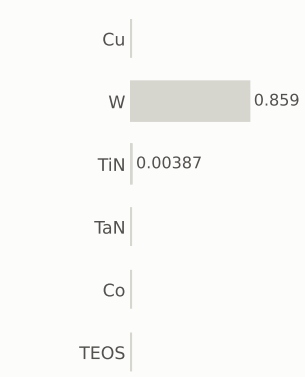

gases emitted (g)

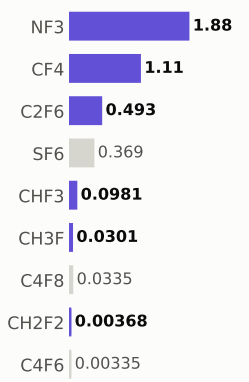

Step #2000: Resist

etch_strip · Resist

0.169	266.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

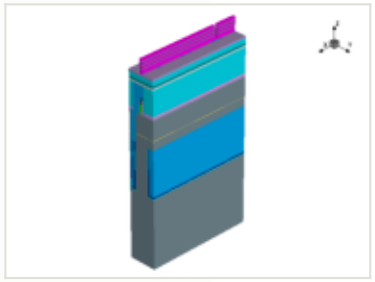

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

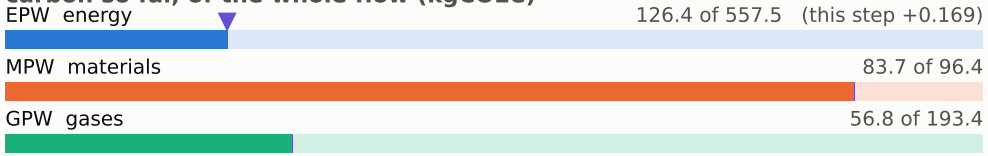

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

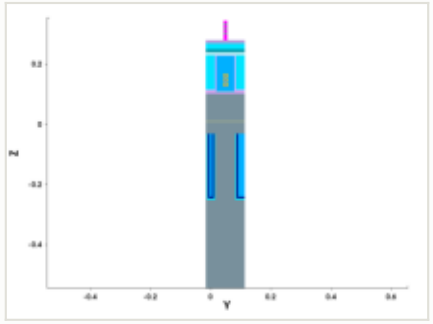

y cut at 0.049 µm

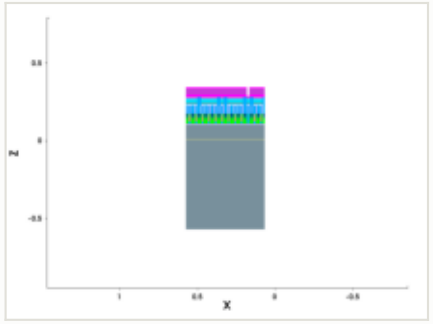

mask for this step

no mask for this step

steps by process area

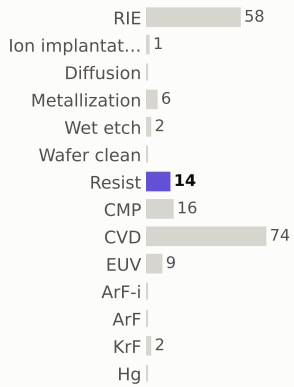

materials deposited (g)

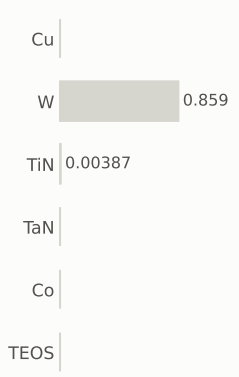

gases emitted (g)

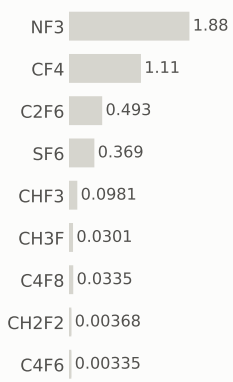

Step #2020: CVD

depo_isotropic · CVD

1.31	268.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

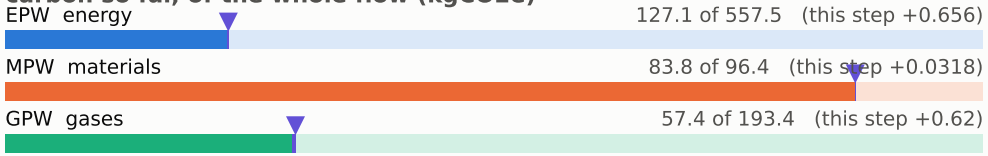

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

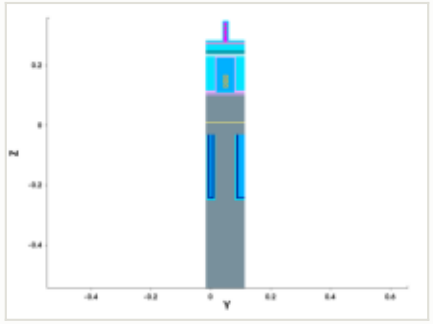

y cut at 0.049 µm

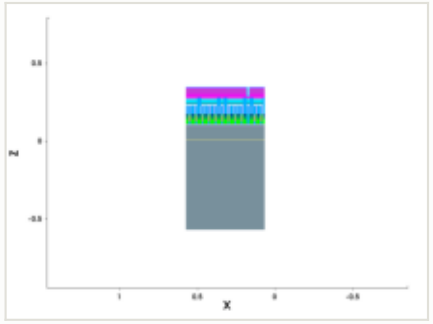

mask for this step

no mask for this step

steps by process area



materials deposited (g)

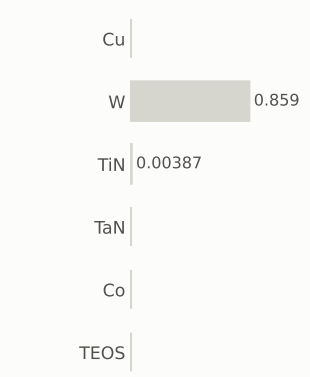

gases emitted (g)

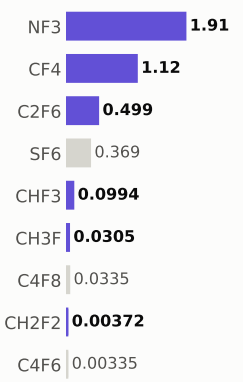

Step #2030: CVD

depo_isotropic · CVD

1.31	269.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

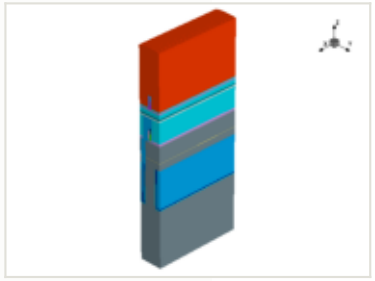

x cut at 0.385 µm

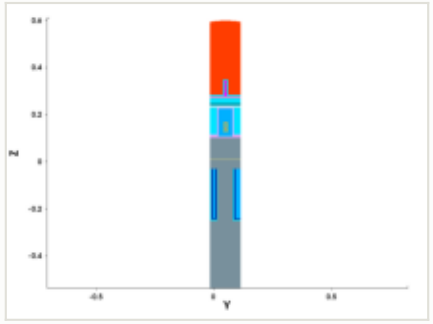

y cut at 0.049 µm

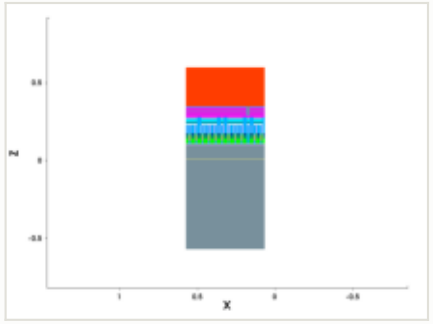

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

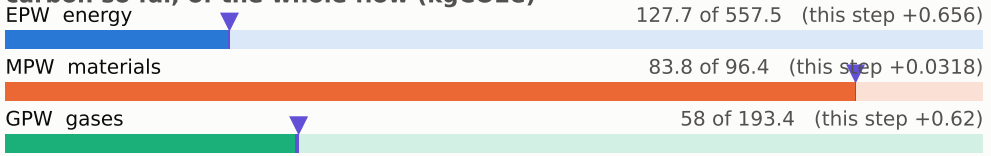

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

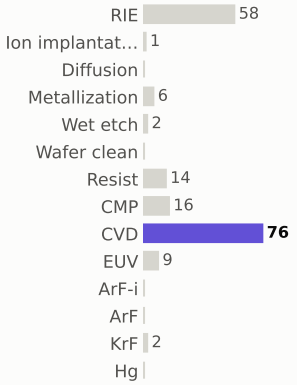

materials deposited (g)

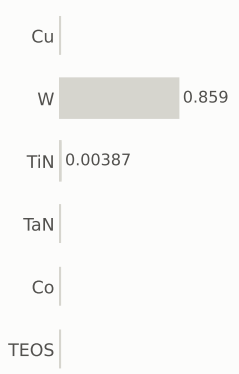

gases emitted (g)

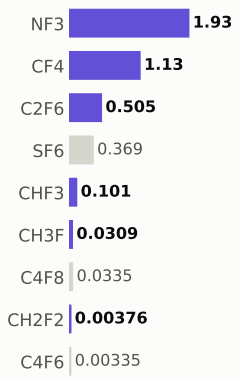

Step #2040: CMP

etch_cmp · CMP

0.169	269.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

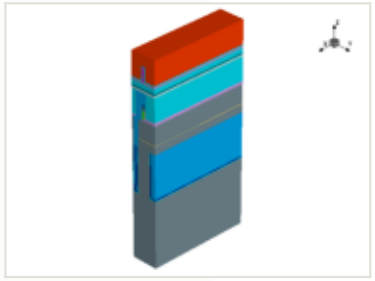

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

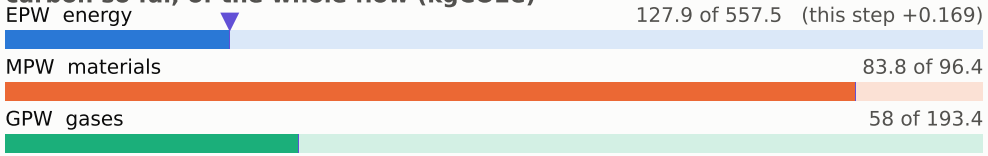

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

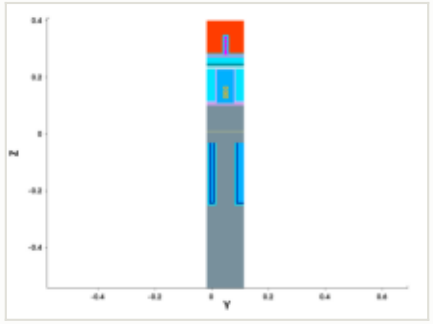

y cut at 0.049 µm

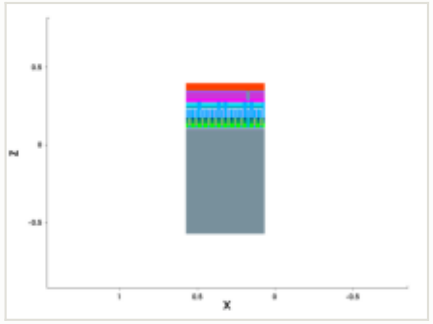

mask for this step

no mask for this step

steps by process area

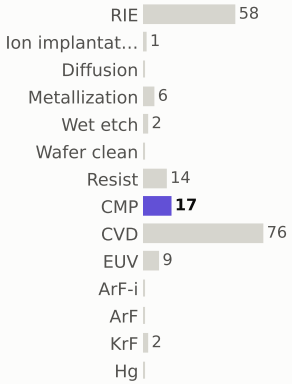

materials deposited (g)



gases emitted (g)

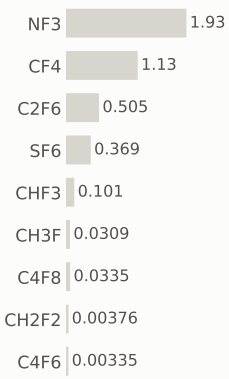

Step #2060: CVD

depo_height_dependent · CVD

1.31	271.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

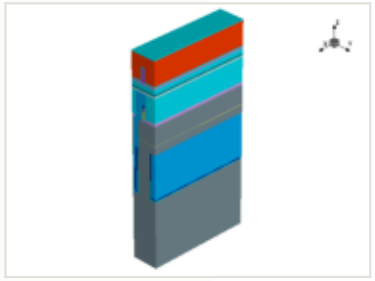

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

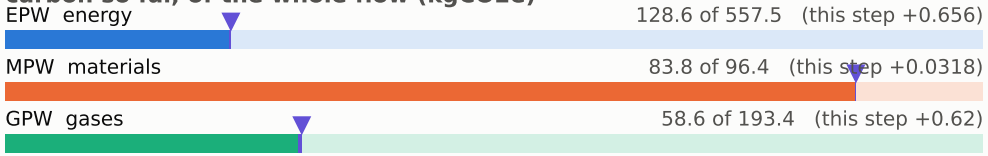

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

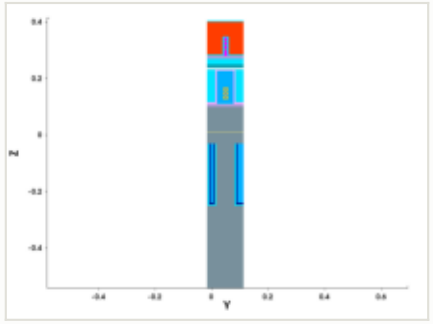

y cut at 0.049 µm

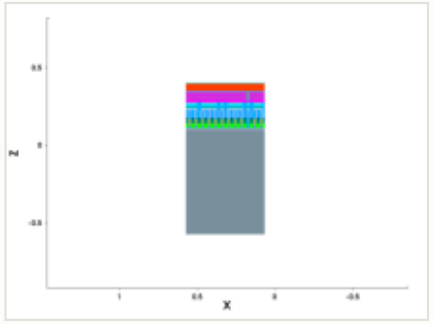

mask for this step

no mask for this step

steps by process area

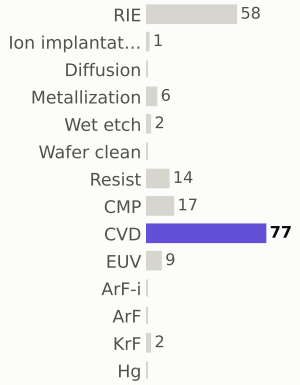

materials deposited (g)

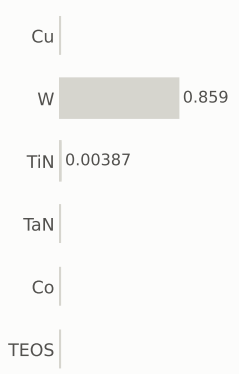

gases emitted (g)

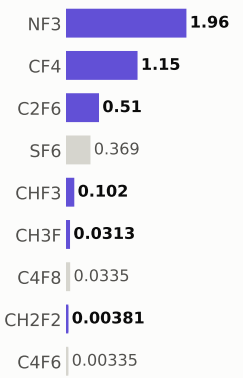

Step #2070: CVD

depo_height_dependent · CVD

1.31	272.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

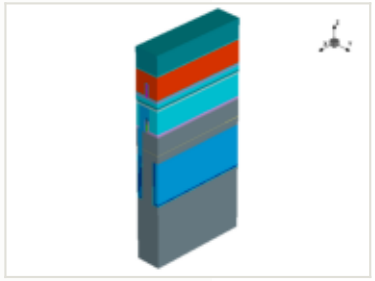

x cut at 0.385 µm

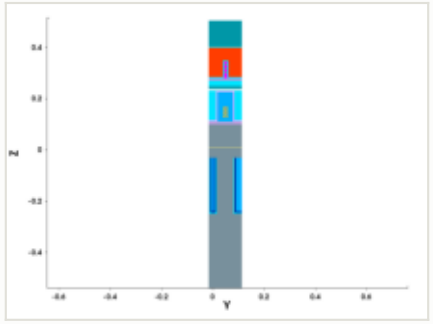

y cut at 0.049 µm

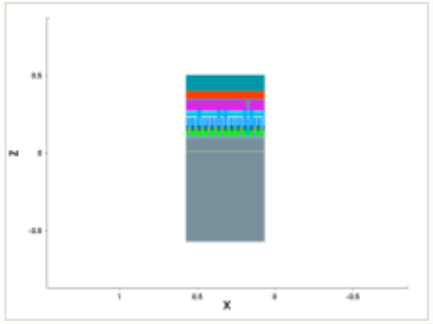

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

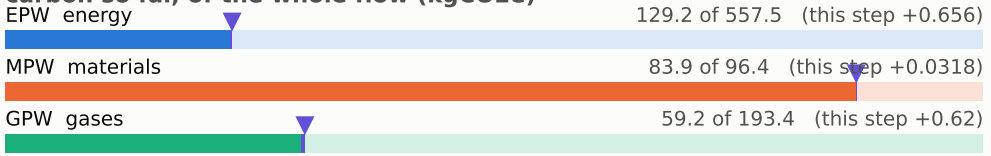

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

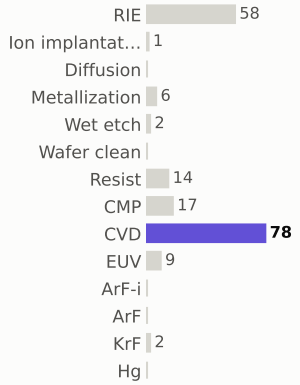

materials deposited (g)

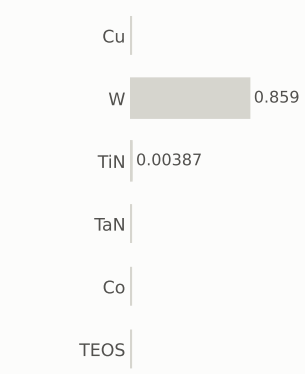

gases emitted (g)

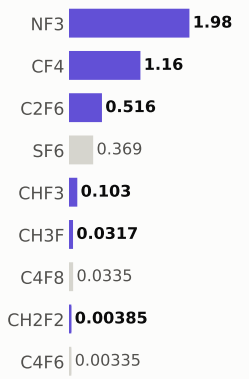

Step #2080: CVD

depo_height_dependent · CVD

1.31	273.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

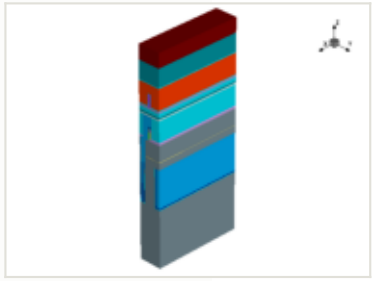

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

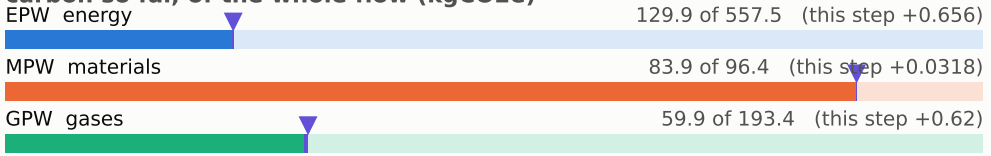

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

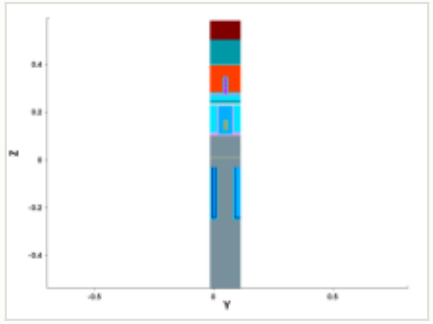

y cut at 0.049 µm

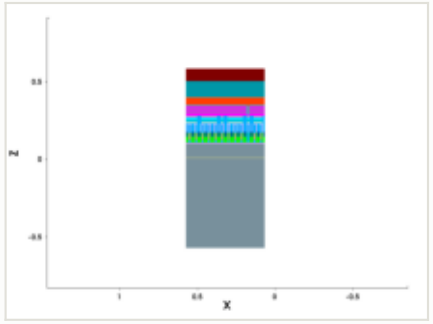

mask for this step

no mask for this step

steps by process area

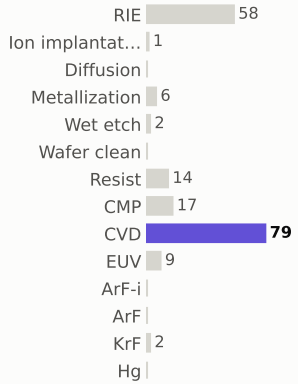

materials deposited (g)

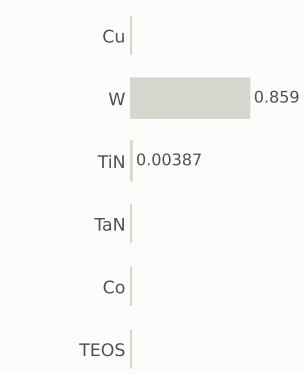

gases emitted (g)

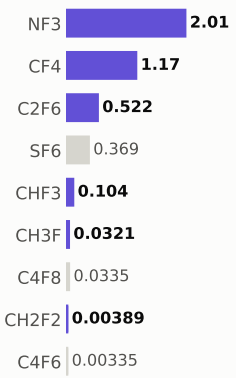

Step #2090: CVD

depo_height_dependent · CVD

1.31	274.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

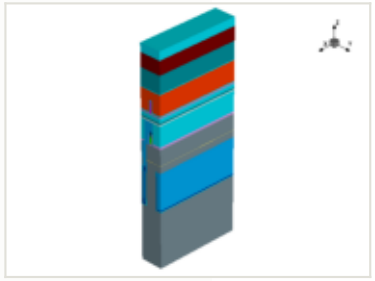

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

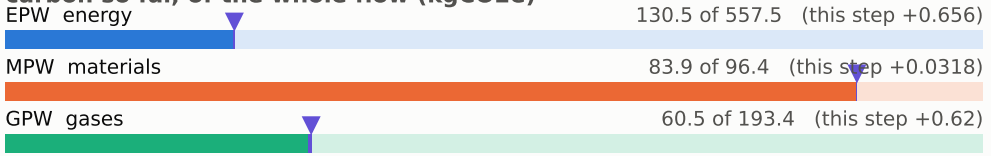

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

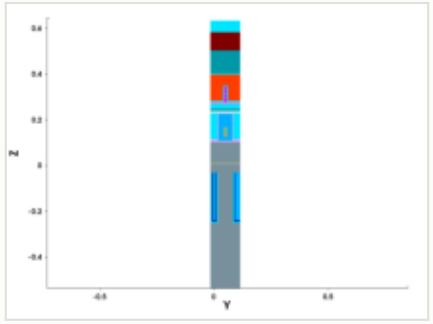

y cut at 0.049 µm

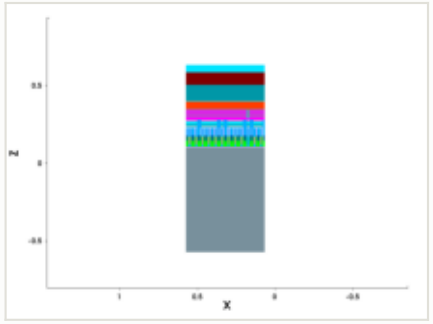

mask for this step

no mask for this step

steps by process area

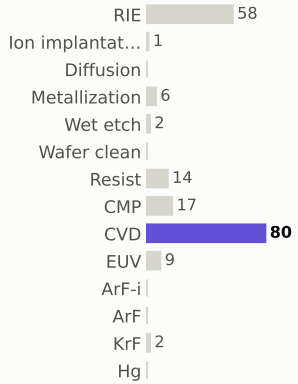

materials deposited (g)

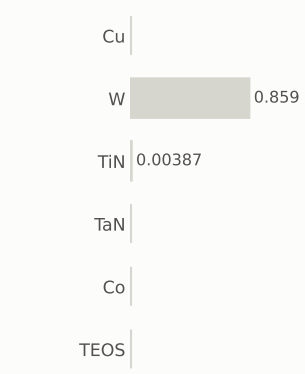

gases emitted (g)

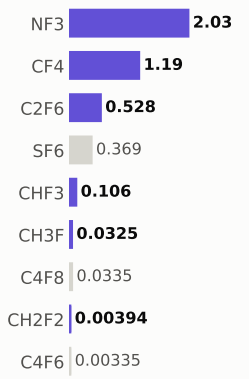

Step #2100: CVD

depo_height_dependent · CVD

1.31	276.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

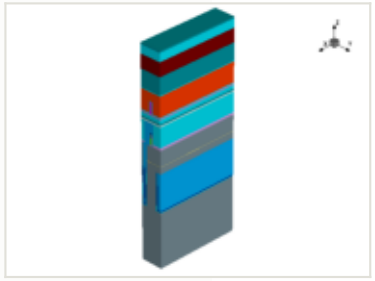

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

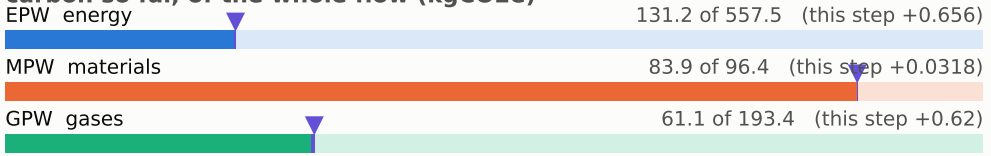

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

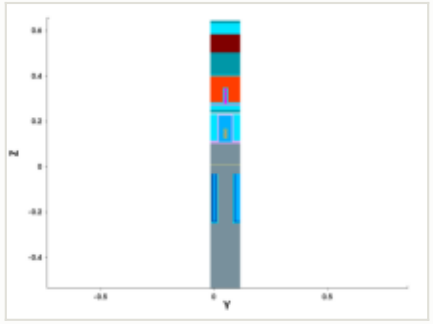

y cut at 0.049 µm

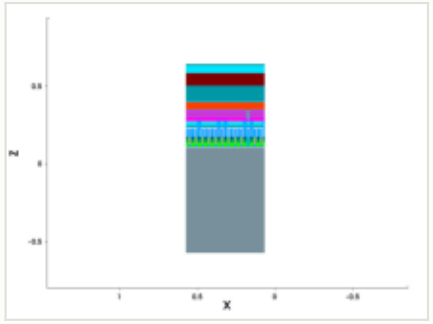

mask for this step

no mask for this step

steps by process area

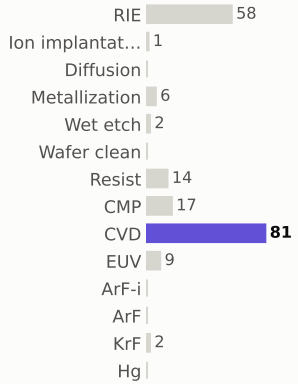

materials deposited (g)

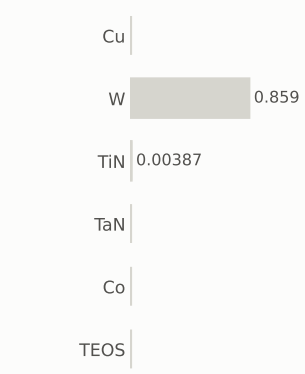

gases emitted (g)



Step #2110: EUV

litho_patterning · EUV

1.96	278.2	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

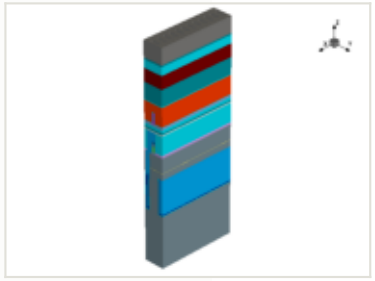

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

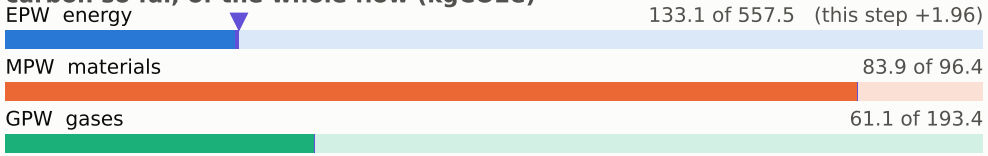

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

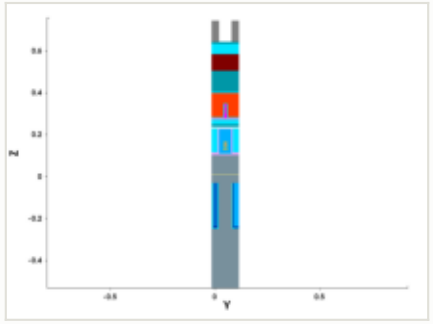

y cut at 0.049 µm

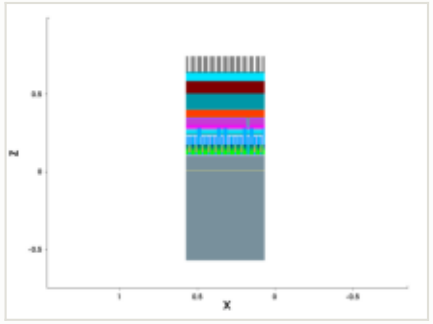

mask: layer 3:0, 3:1 (GDSII)

steps by process area

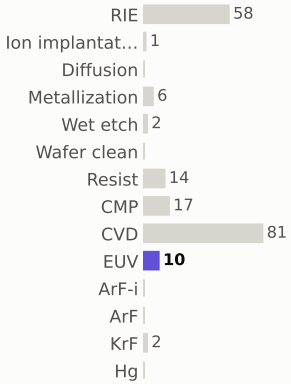

materials deposited (g)

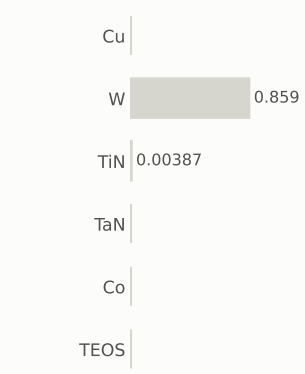

gases emitted (g)

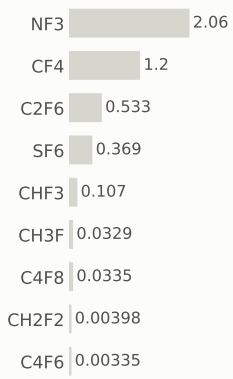

Step #2120: RIE

etch_anisotropic · RIE

1.04	279.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

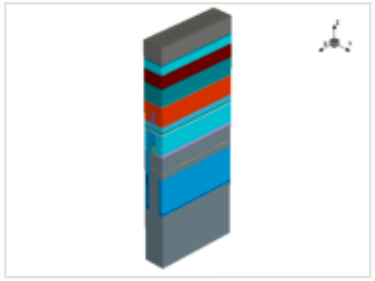

x cut at 0.385 µm

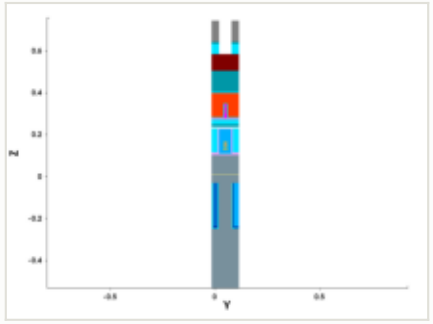

y cut at 0.049 µm

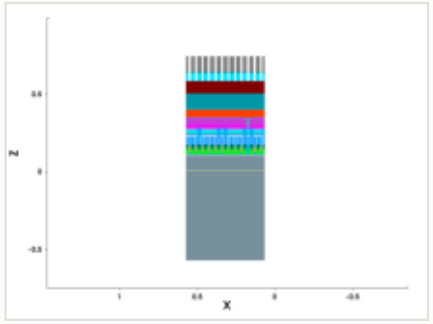

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

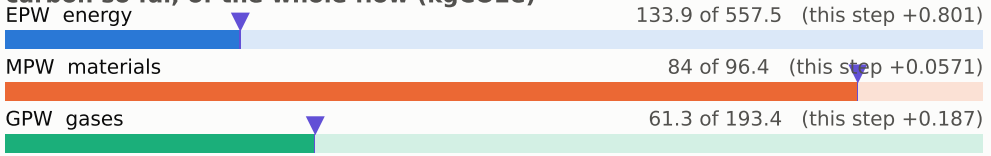

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

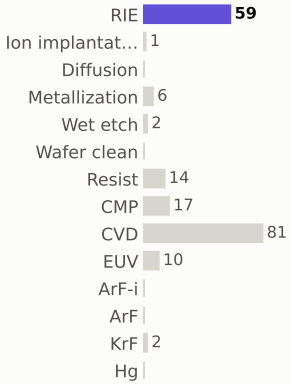

materials deposited (g)



gases emitted (g)

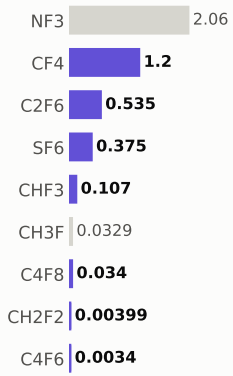

Step #2130: Resist

etch_strip · Resist

0.169	279.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

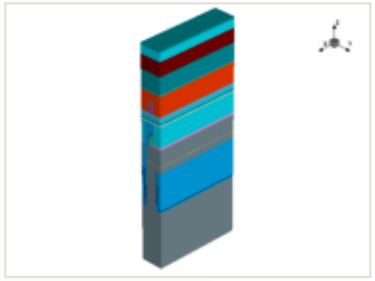

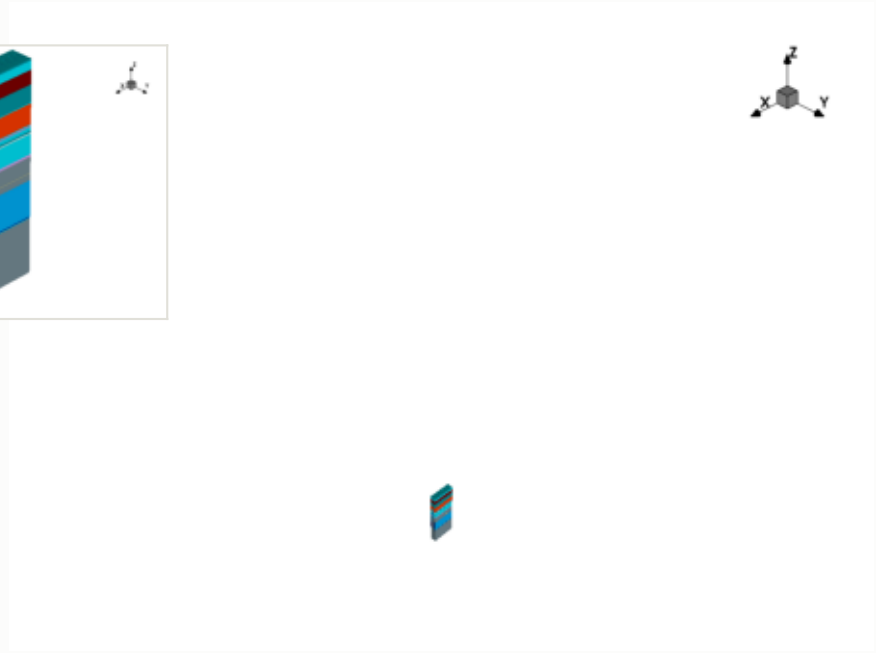

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

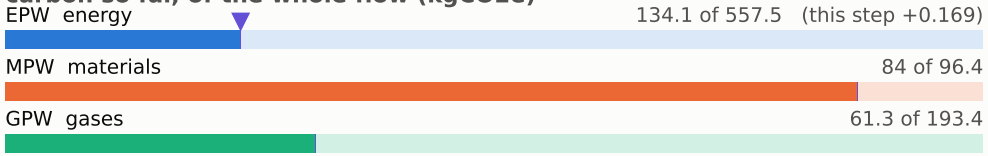

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

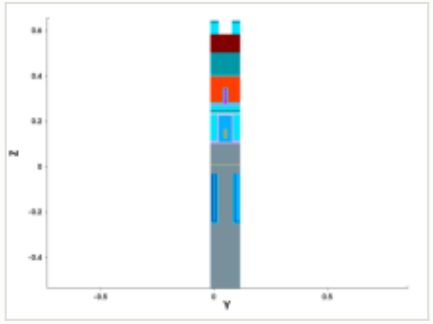

y cut at 0.049 µm

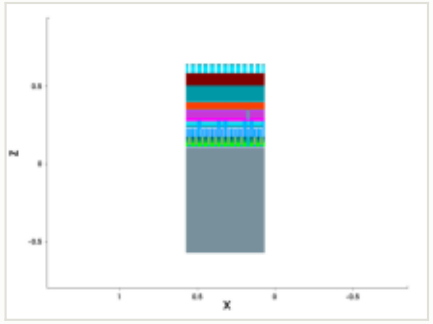

mask for this step

no mask for this step

steps by process area

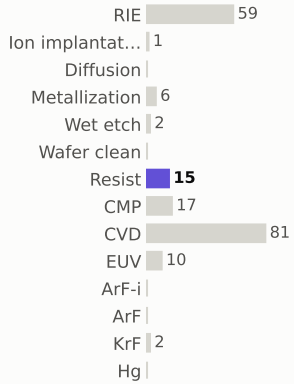

materials deposited (g)

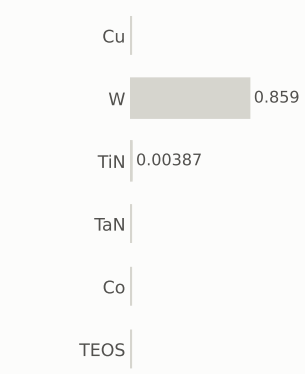

gases emitted (g)



Step #2140: RIE

etch_anisotropic · RIE

1.04	280.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

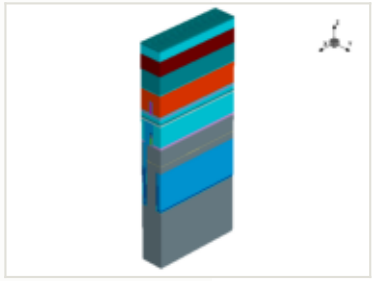

x cut at 0.385 µm

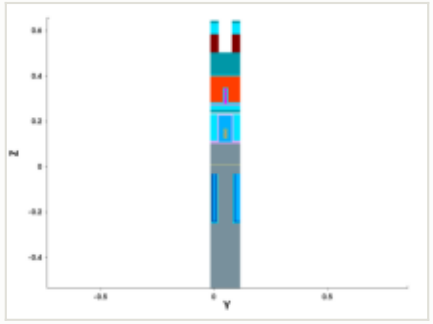

y cut at 0.049 µm

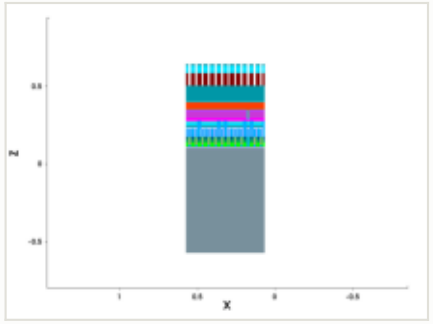

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

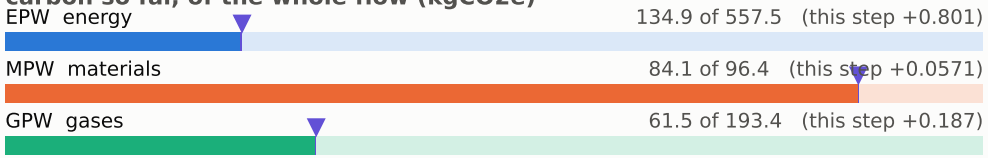

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

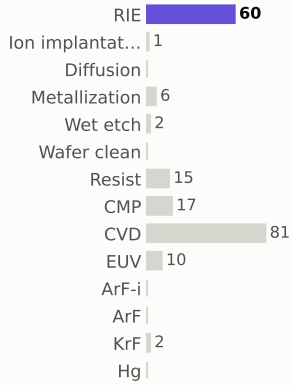

materials deposited (g)

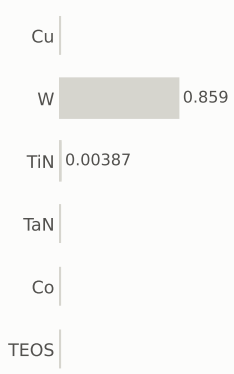

gases emitted (g)

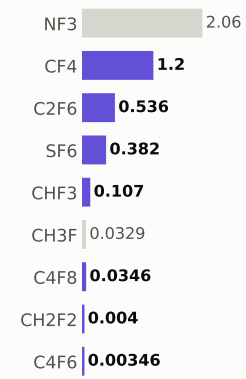

Step #2150: CMP

etch_cmp · CMP

0.169	280.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

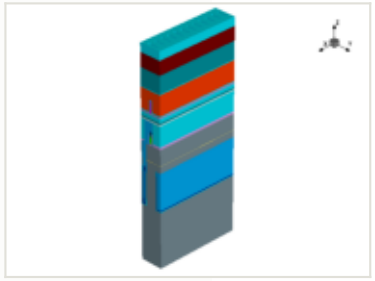

x cut at 0.385 µm

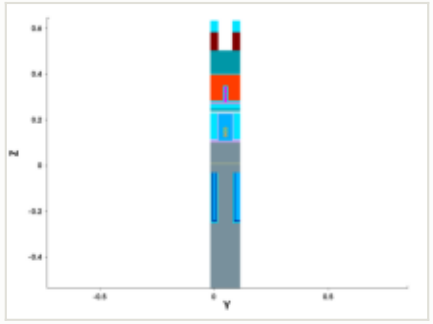

y cut at 0.049 µm

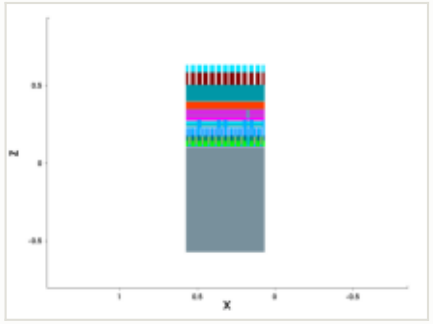

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

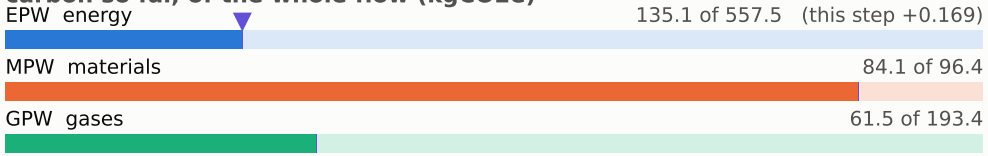

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

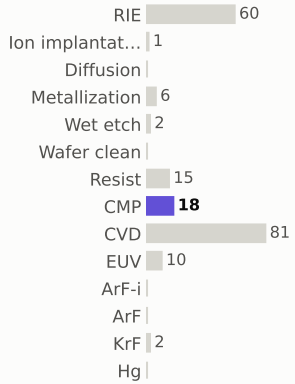

materials deposited (g)

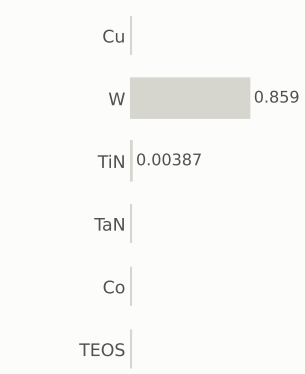

gases emitted (g)



Step #2160: RIE

etch_anisotropic · RIE

1.04	281.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

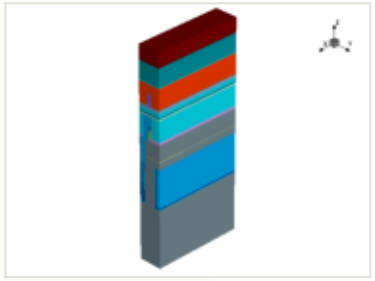

x cut at 0.385 µm

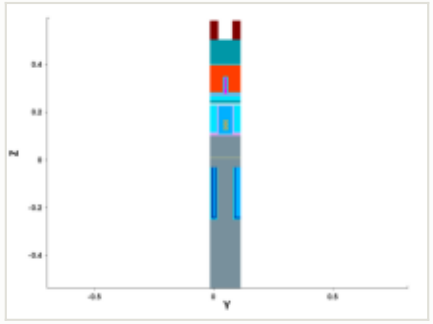

y cut at 0.049 µm

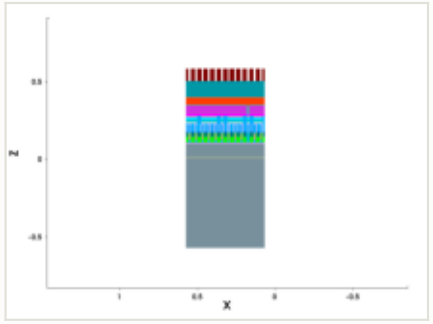

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

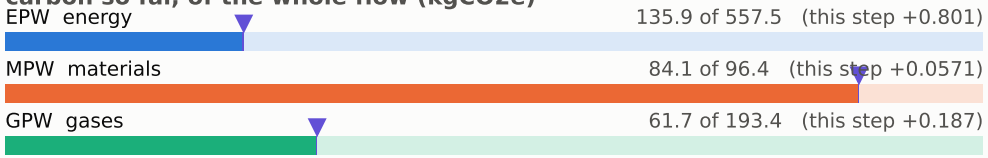

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

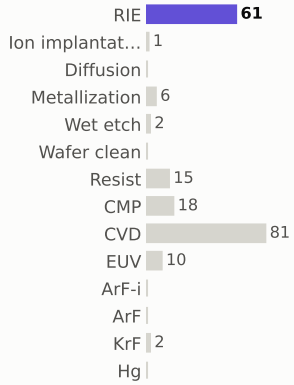

materials deposited (g)

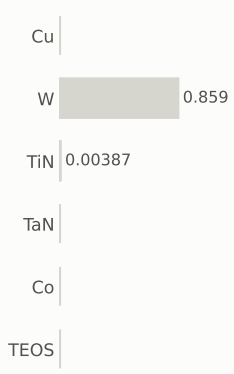

gases emitted (g)



Step #2170: CVD

depo_fill · CVD

1.31	283.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

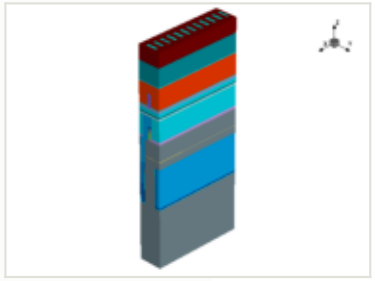

x cut at 0.385 µm

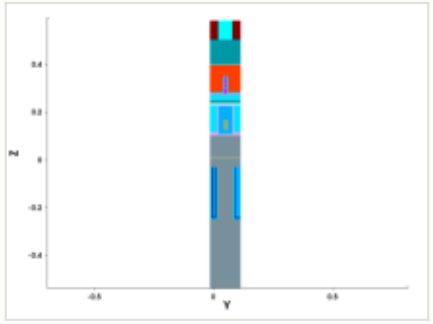

y cut at 0.049 µm

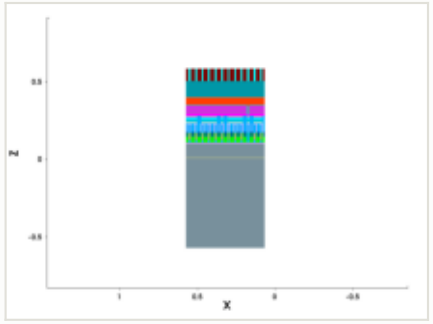

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.08 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

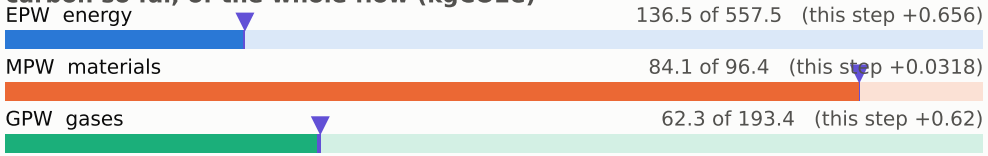

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

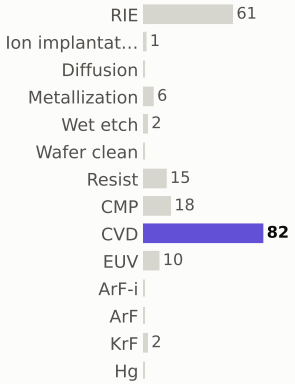

materials deposited (g)

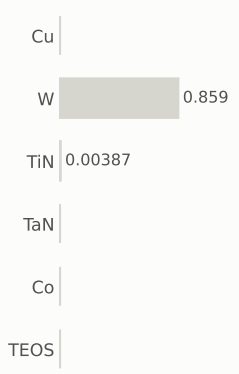

gases emitted (g)

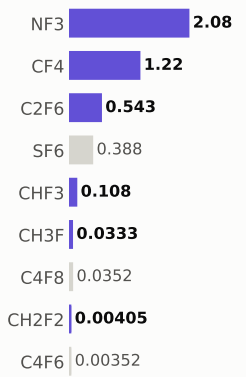

Step #2180: RIE

etch_anisotropic · RIE

1.04	284.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

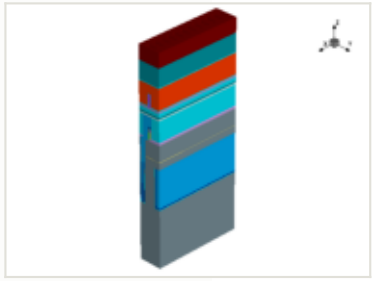

x cut at 0.385 µm

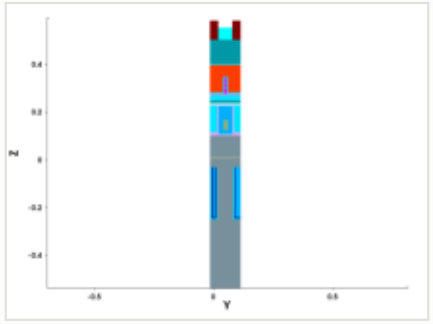

y cut at 0.049 µm

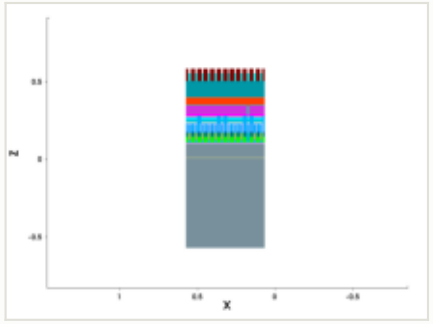

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

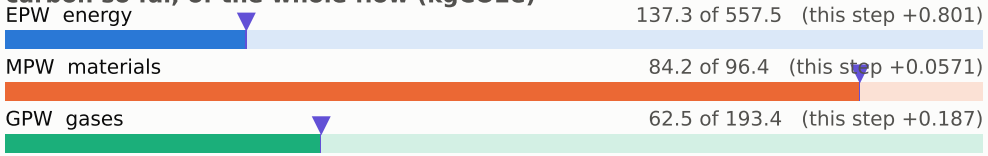

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

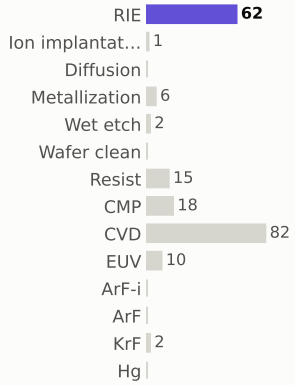

materials deposited (g)

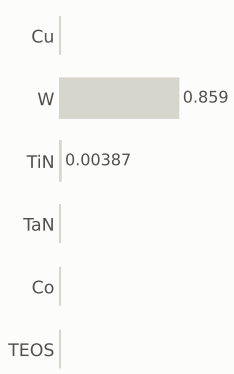

gases emitted (g)

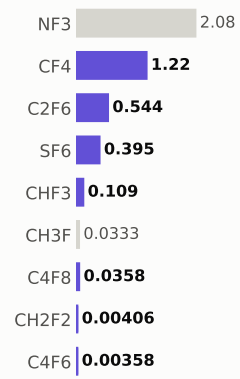

Step #2190: RIE

etch_anisotropic · RIE

1.04	285.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

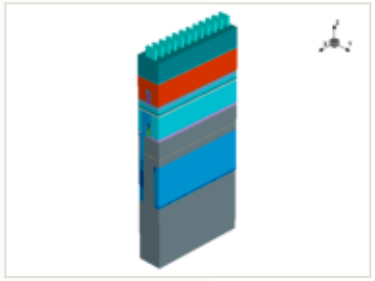

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

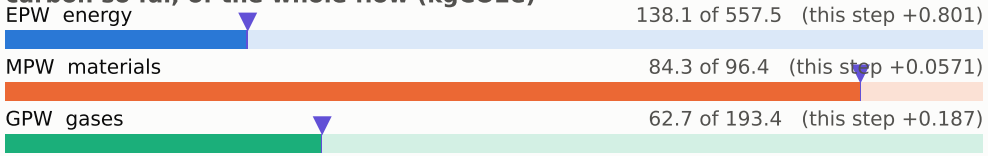

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

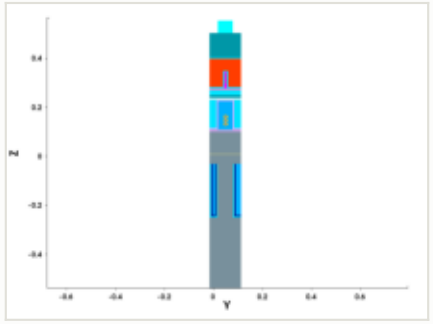

y cut at 0.049 µm

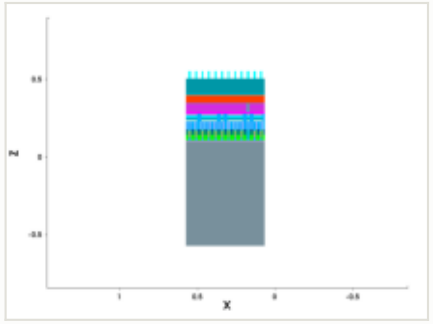

mask for this step

no mask for this step

steps by process area



materials deposited (g)

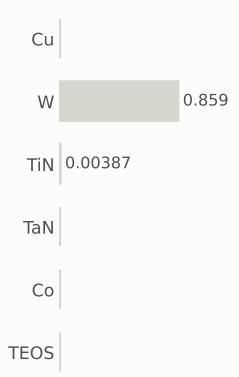

gases emitted (g)

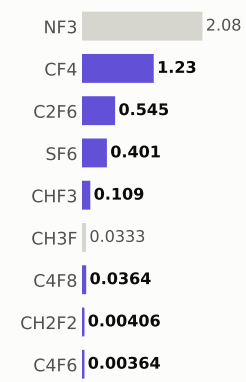

Step #2200: RIE

etch_anisotropic · RIE

1.04	286.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

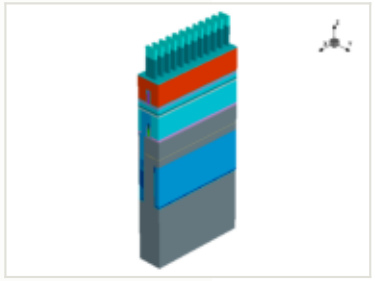

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

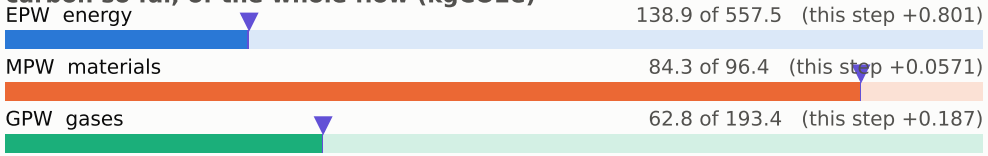

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

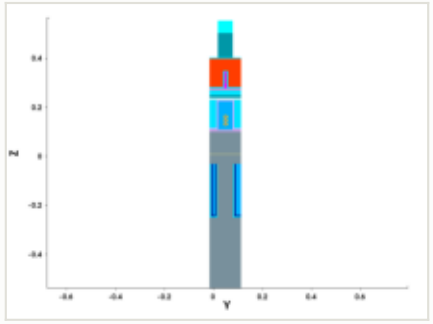

y cut at 0.049 µm

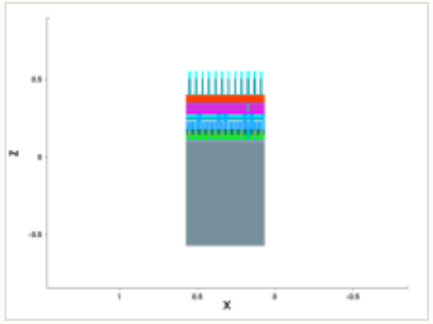

mask for this step

no mask for this step

steps by process area

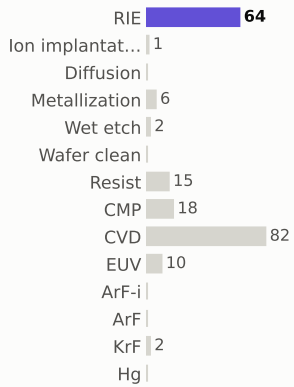

materials deposited (g)

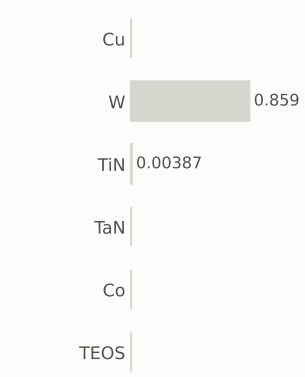

gases emitted (g)



Step #2210: RIE

etch_anisotropic · RIE

1.04	287.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

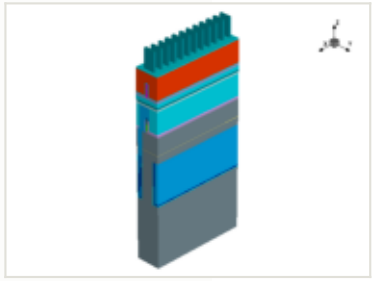

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

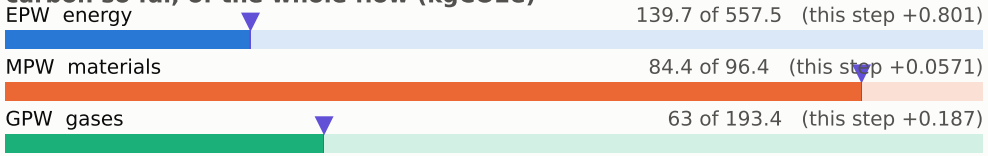

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

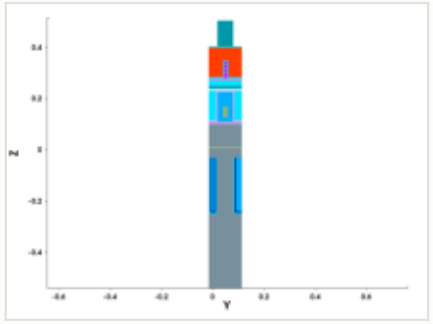

y cut at 0.049 µm

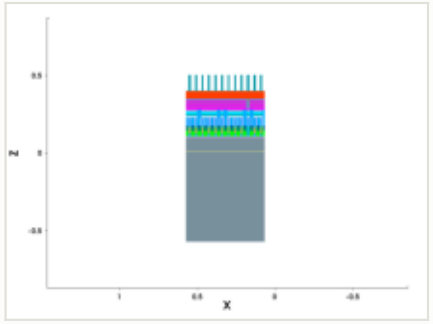

mask for this step

no mask for this step

steps by process area

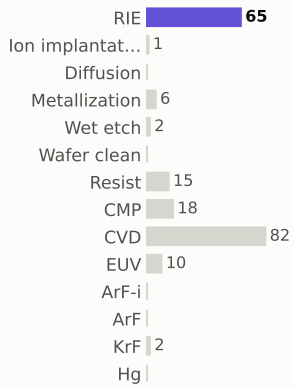

materials deposited (g)



gases emitted (g)

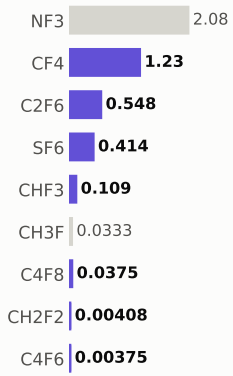

Step #2220: RIE

etch_anisotropic · RIE

1.04	288.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

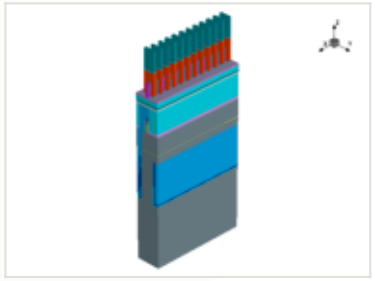

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

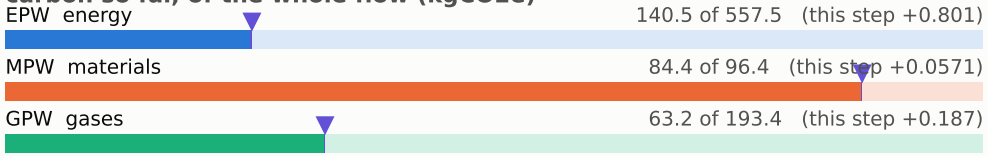

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

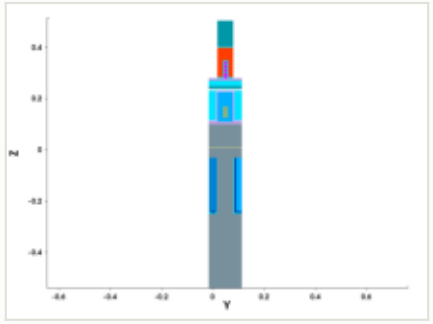

y cut at 0.049 µm

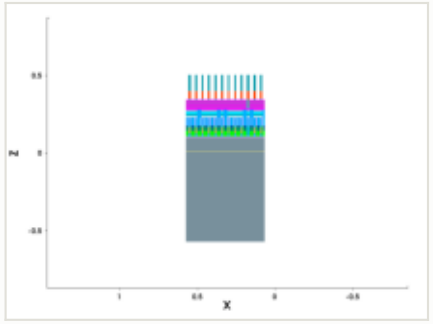

mask for this step

no mask for this step

steps by process area

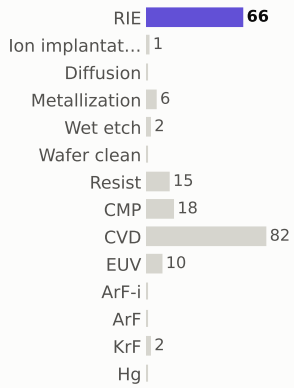

materials deposited (g)



gases emitted (g)

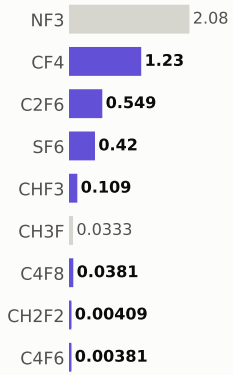

Step #2230: CVD

depo_isotropic · CVD

1.31	289.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

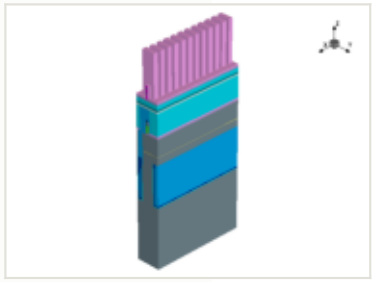

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.006 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

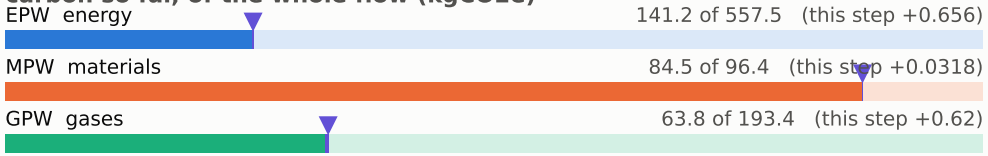

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

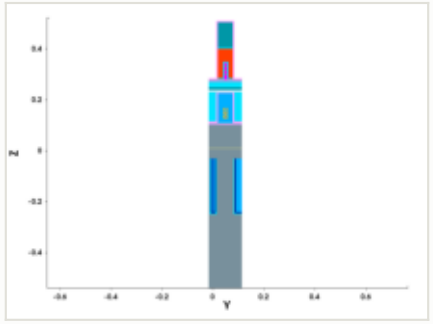

y cut at 0.049 µm

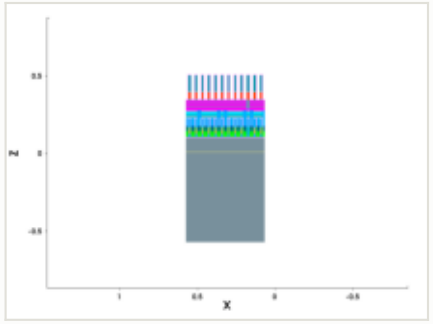

mask for this step

no mask for this step

steps by process area



materials deposited (g)

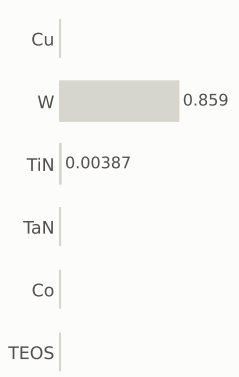

gases emitted (g)

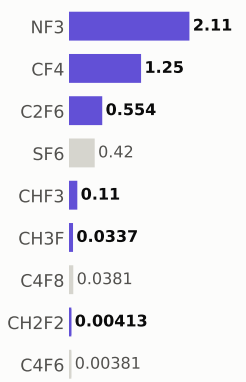

Step #2250: CVD

depo_fill · CVD

1.31	290.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

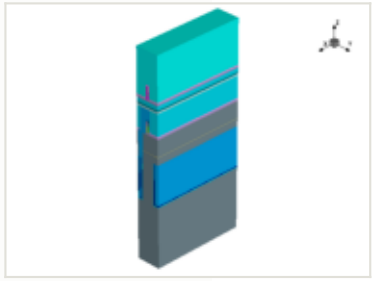

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

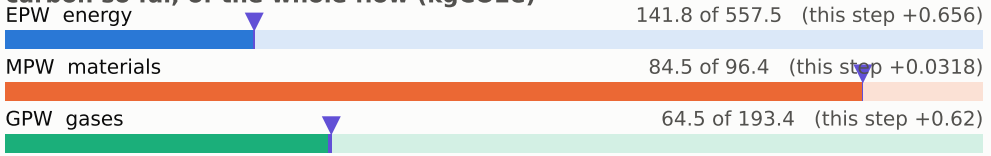

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

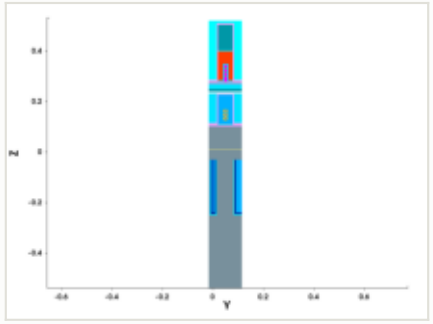

y cut at 0.049 µm

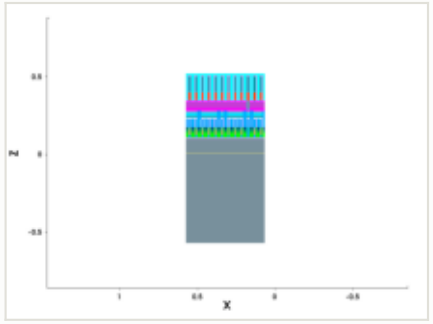

mask for this step

no mask for this step

steps by process area

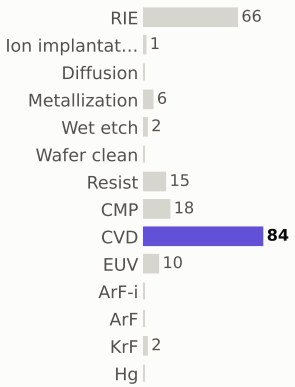

materials deposited (g)

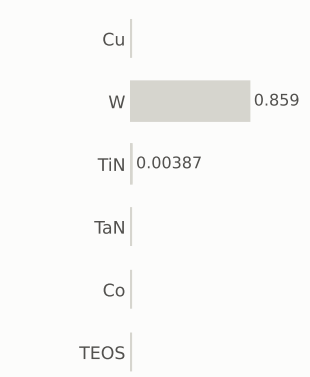

gases emitted (g)



Step #2260: EUV

litho_patterning · EUV

1.96	292.8	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

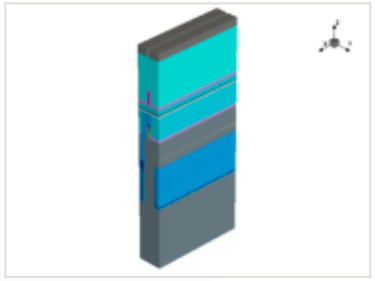

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

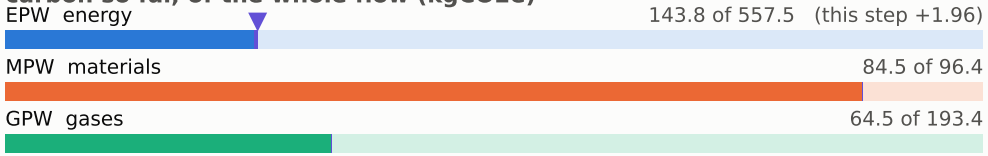

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

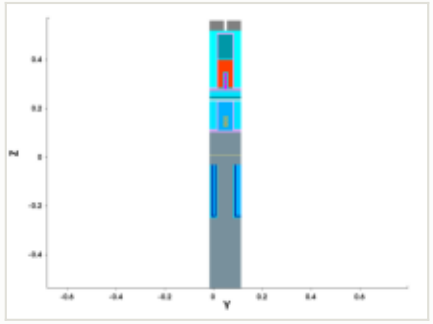

y cut at 0.049 µm

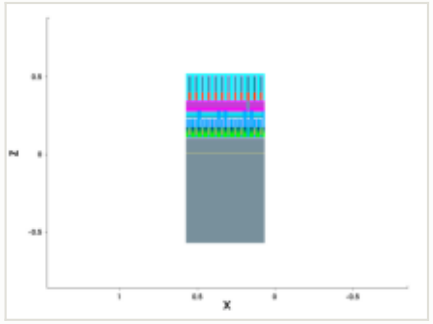

mask: layer 2:0 (GDSII)

steps by process area

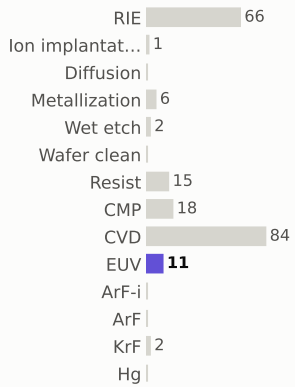

materials deposited (g)

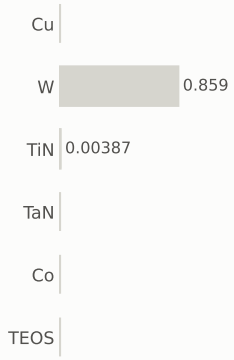

gases emitted (g)

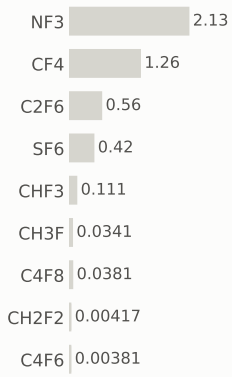

Step #2270: RIE

etch_anisotropic · RIE

1.04	293.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

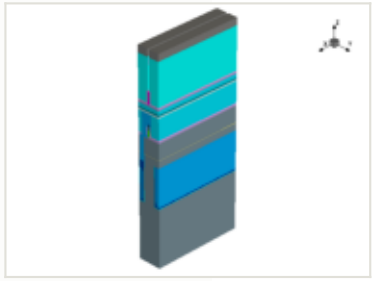

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

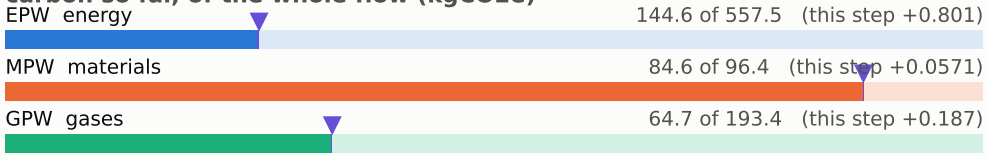

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

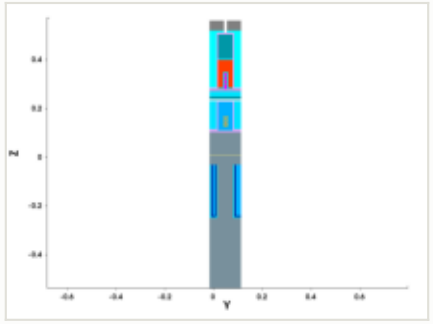

y cut at 0.049 µm

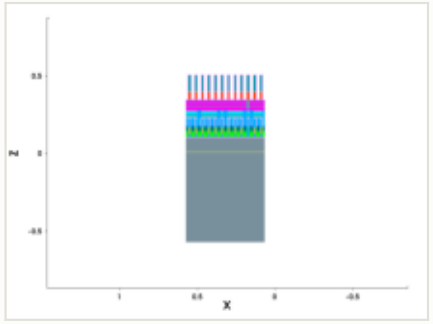

mask for this step

no mask for this step

steps by process area

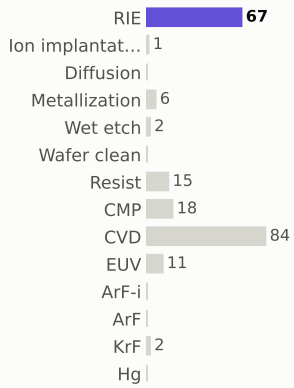

materials deposited (g)



gases emitted (g)

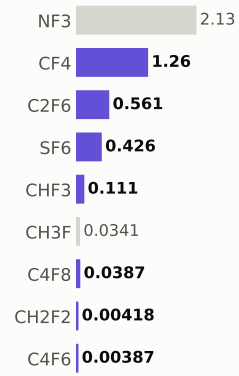

Step #2280: RIE

etch_anisotropic · RIE

1.04	294.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

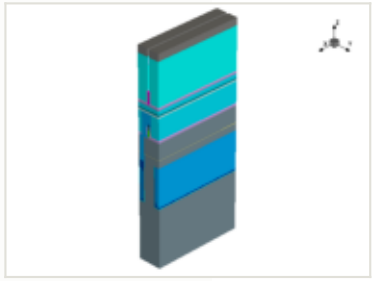

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

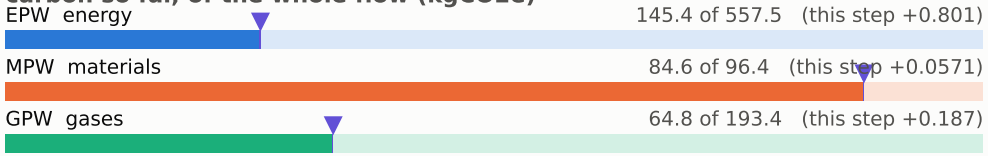

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

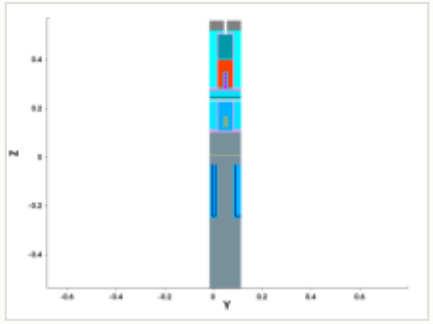

y cut at 0.049 µm

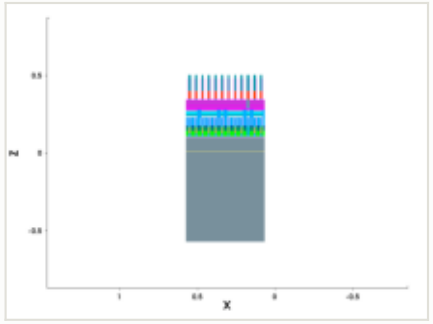

mask for this step

no mask for this step

steps by process area

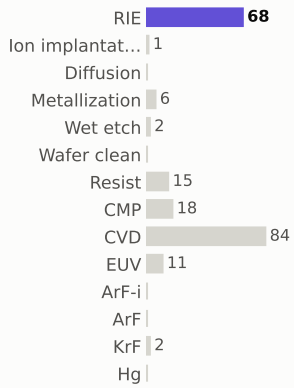

materials deposited (g)



gases emitted (g)

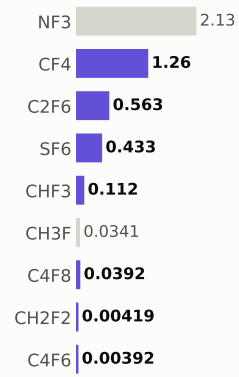

Step #2290: RIE

etch_anisotropic · RIE

1.04	295.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

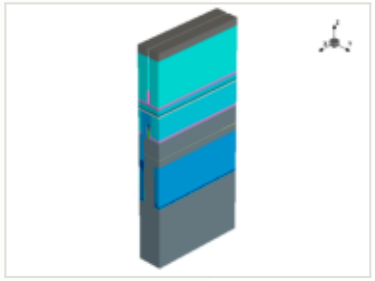

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

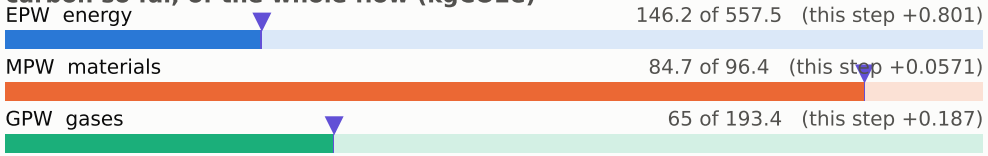

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

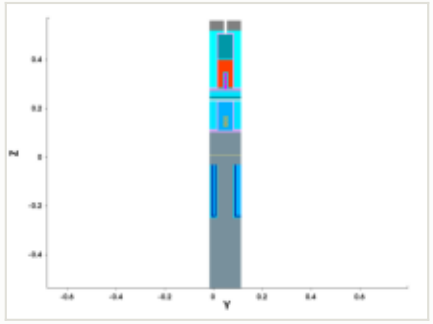

y cut at 0.049 µm

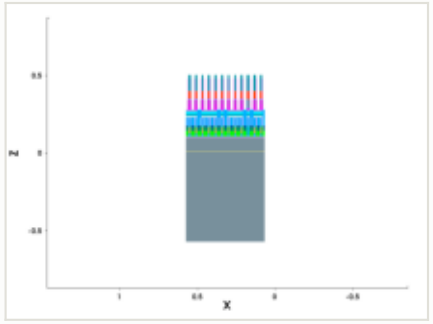

mask for this step

no mask for this step

steps by process area

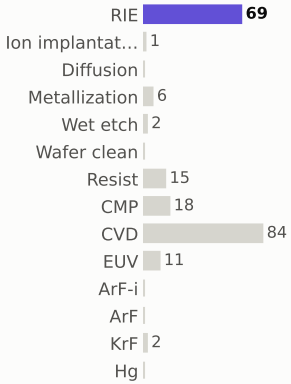

materials deposited (g)



gases emitted (g)

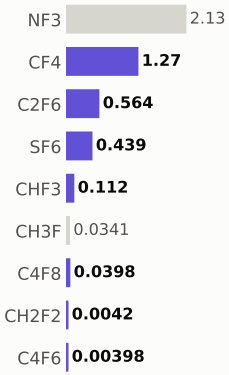

Step #2300: Wet_etch

etch_isotropic · Wet_etch

0.169	296.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

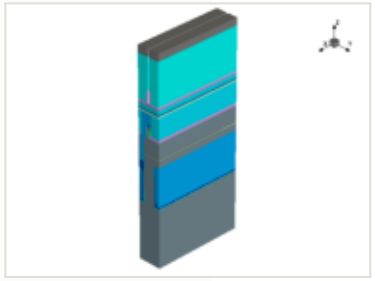

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

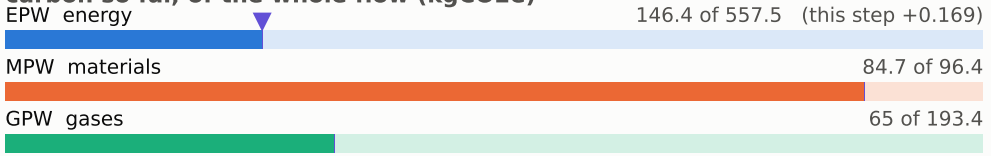

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

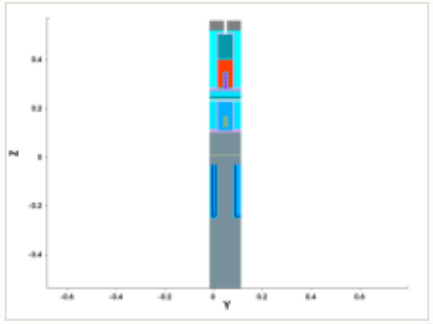

y cut at 0.049 µm

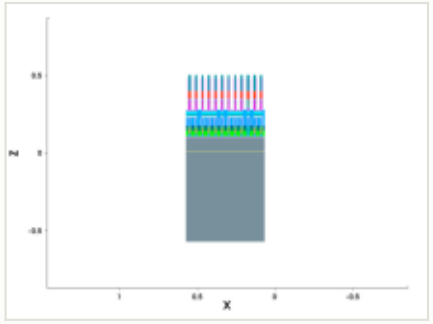

mask for this step

no mask for this step

steps by process area

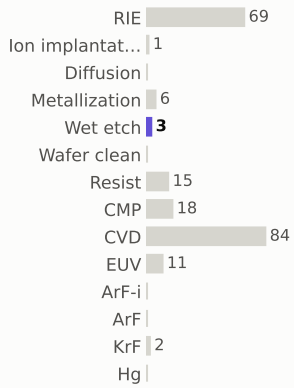

materials deposited (g)

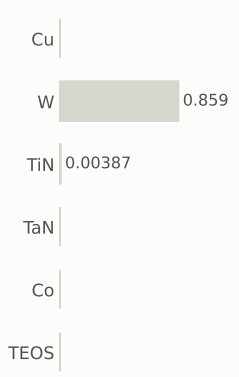

gases emitted (g)

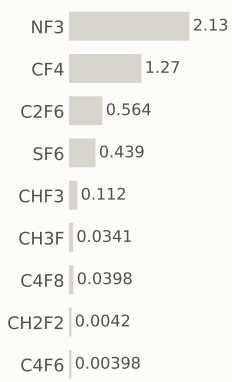

Step #2310: CVD

depo_isotropic · CVD

1.31	297.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

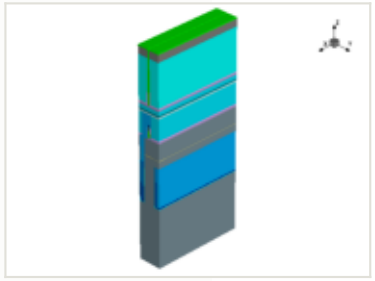

this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

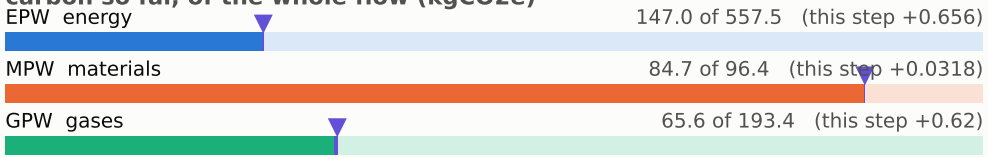

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

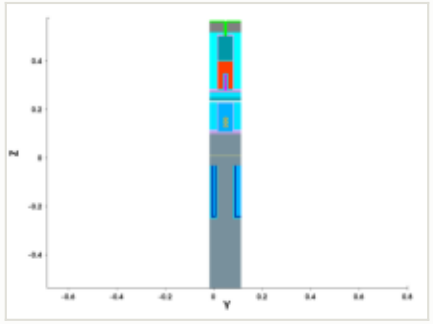

y cut at 0.049 µm

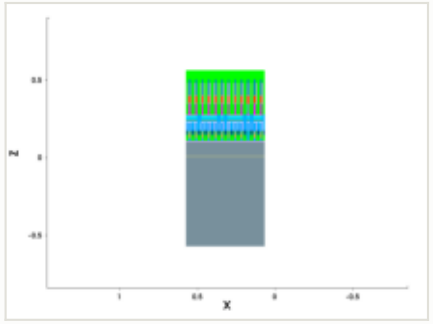

mask for this step

no mask for this step

steps by process area



materials deposited (g)

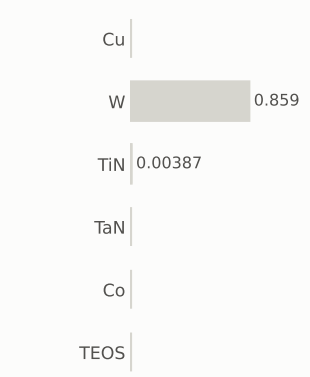

gases emitted (g)



Step #2320: RIE

etch_anisotropic · RIE

1.04	298.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

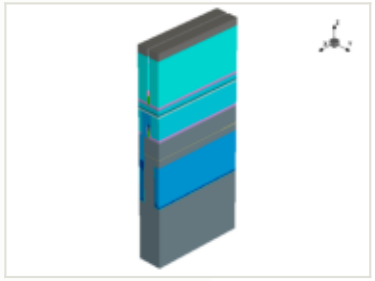

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

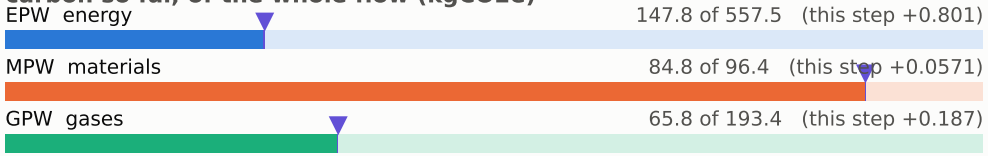

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

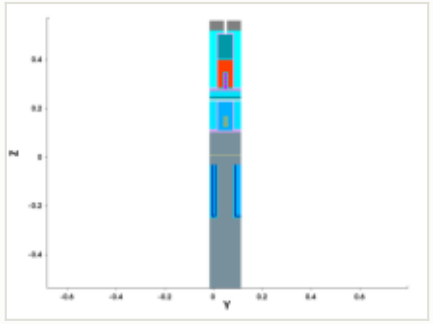

y cut at 0.049 µm

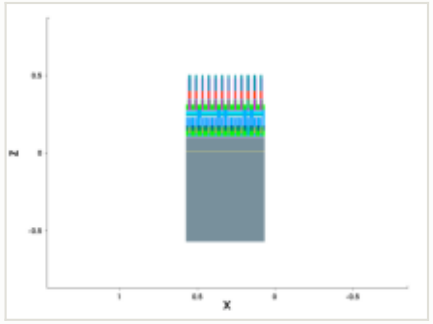

mask for this step

no mask for this step

steps by process area

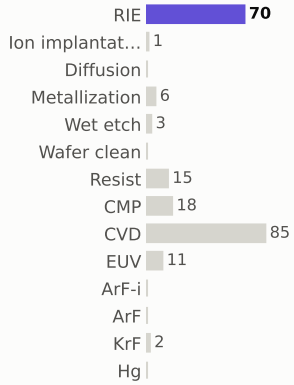

materials deposited (g)



gases emitted (g)

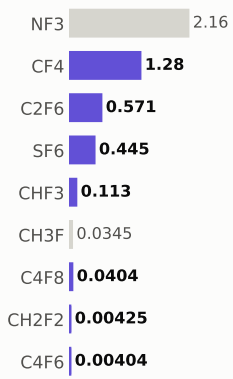

Step #2330: CMP

etch_cmp · CMP

0.169	298.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

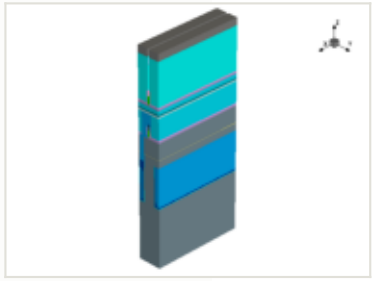

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

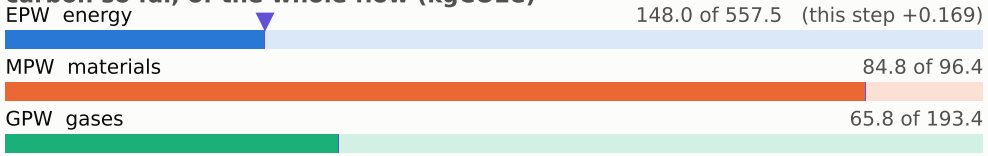

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

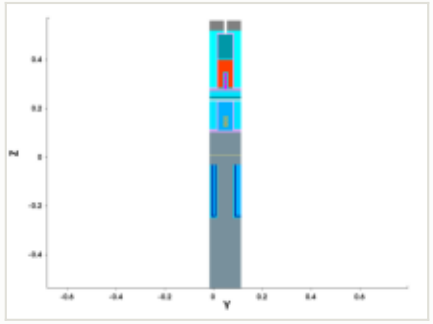

y cut at 0.049 µm

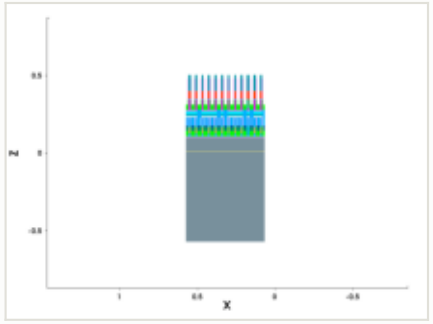

mask for this step

no mask for this step

steps by process area

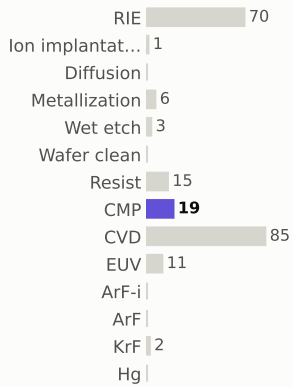

materials deposited (g)

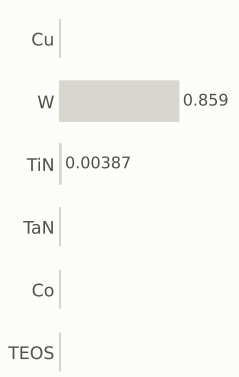

gases emitted (g)

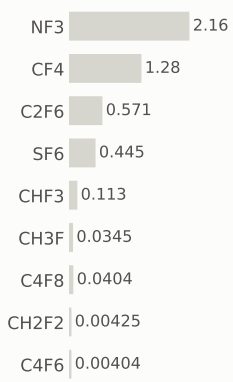

Step #2340: CVD

depo_fill · CVD

1.31	299.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

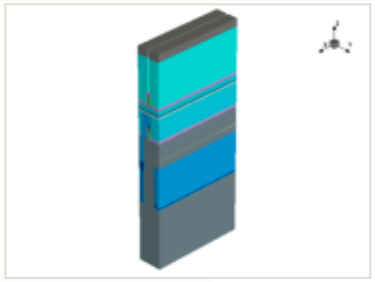

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

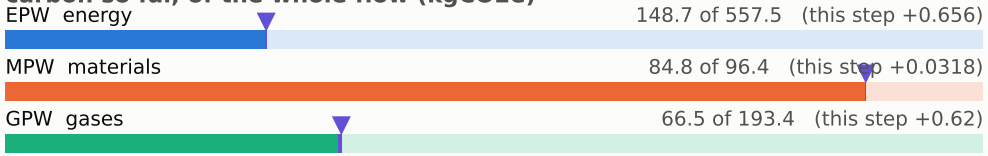

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

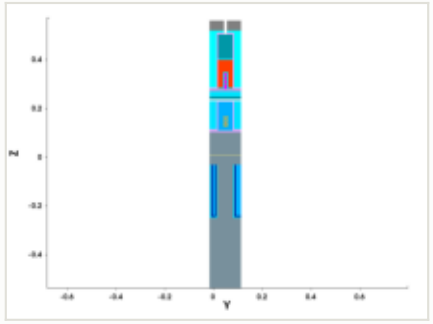

y cut at 0.049 µm

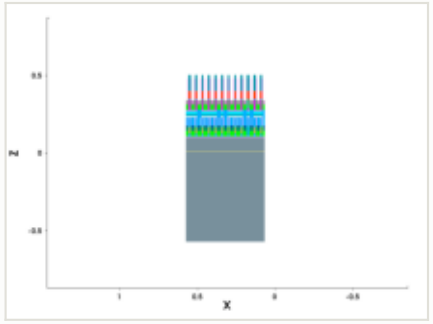

mask for this step

no mask for this step

steps by process area



materials deposited (g)

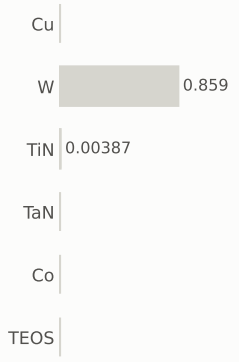

gases emitted (g)

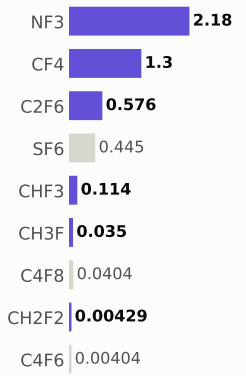

Step #2350: Resist

etch_strip · Resist

0.169	300.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

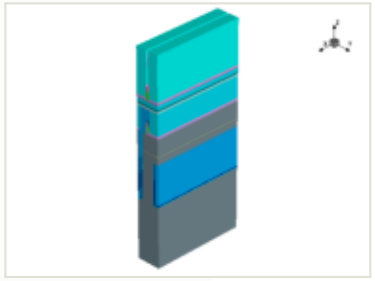

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

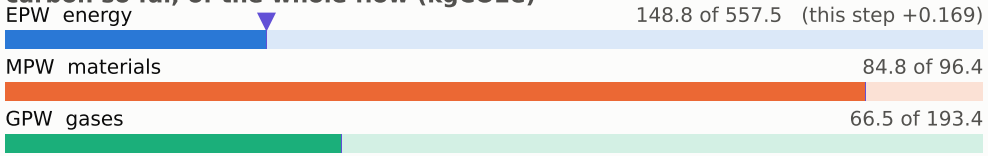

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

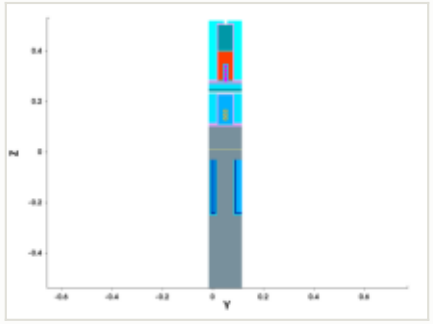

y cut at 0.049 µm

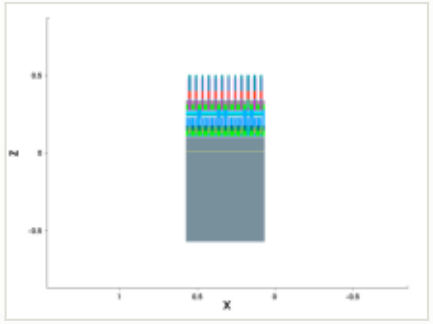

mask for this step

no mask for this step

steps by process area



materials deposited (g)

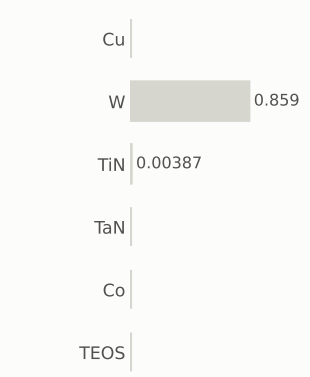

gases emitted (g)

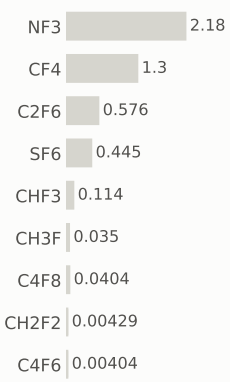

Step #2360: CVD

depo_anisotropic · CVD

1.31	301.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

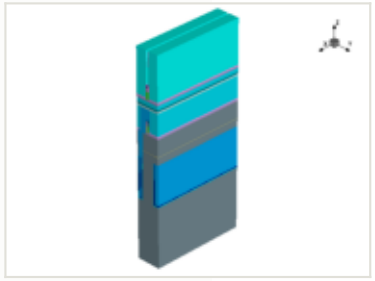

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.005 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

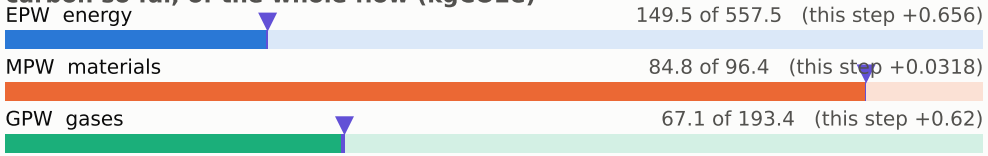

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

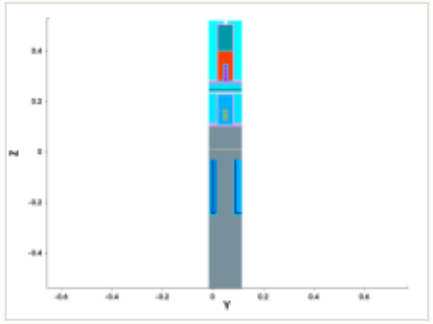

y cut at 0.049 µm

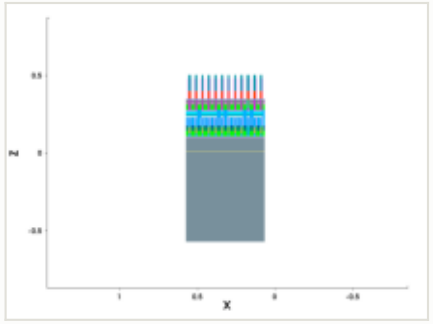

mask for this step

no mask for this step

steps by process area

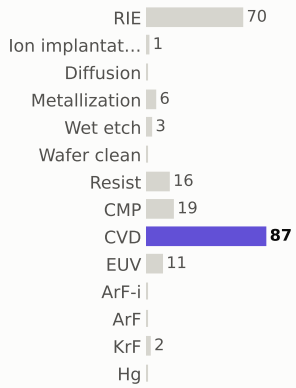

materials deposited (g)

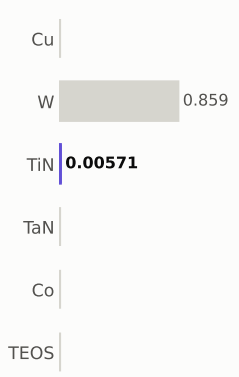

gases emitted (g)

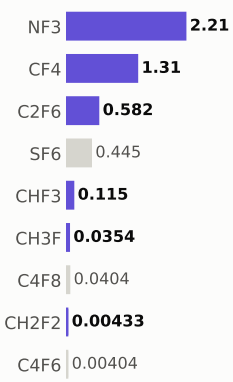

Step #2370: RIE

etch_anisotropic · RIE

1.04	302.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

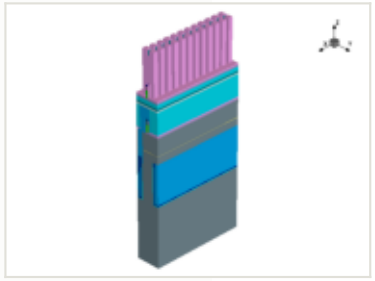

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

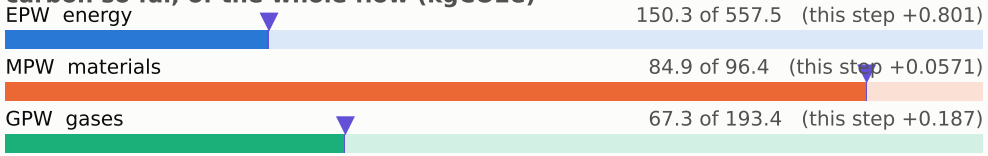

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

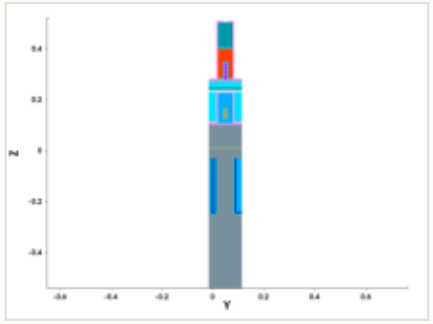

y cut at 0.049 µm

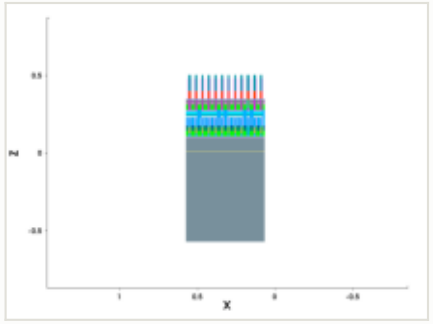

mask for this step

no mask for this step

steps by process area

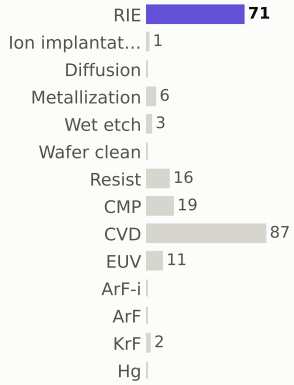

materials deposited (g)

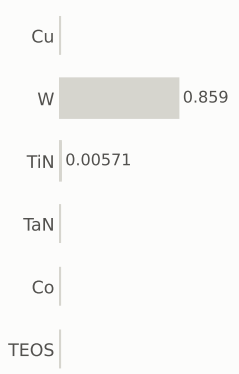

gases emitted (g)

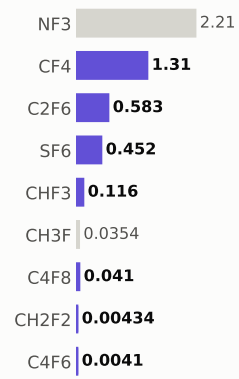

Step #2380: CVD

depo_isotropic · CVD

1.31	303.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

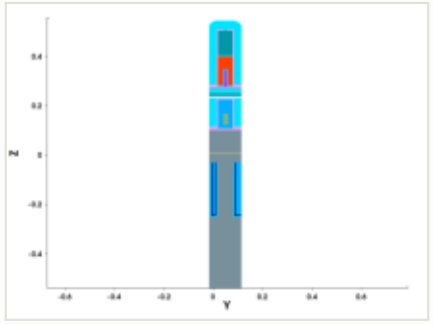

y cut at 0.049 µm

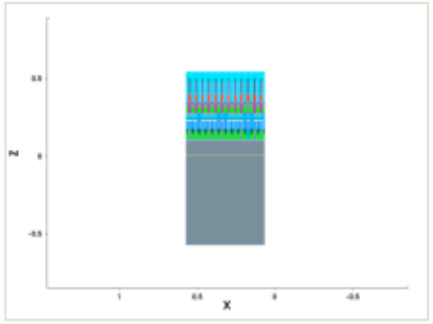

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.035 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

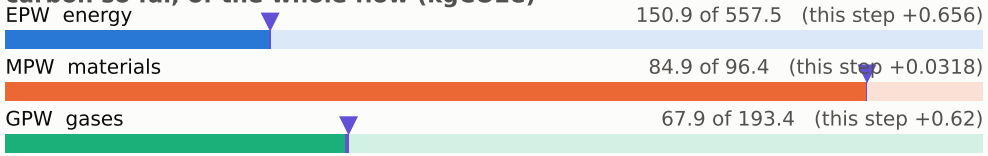

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

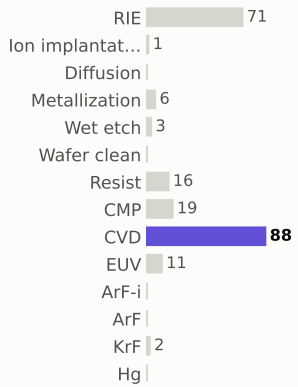

materials deposited (g)

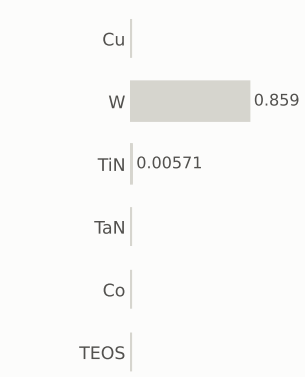

gases emitted (g)

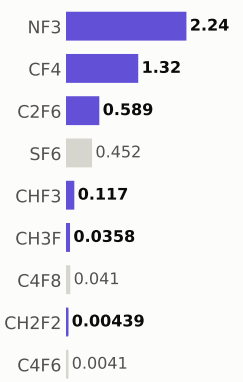

Step #2390: CMP

etch_cmp · CMP

0.169	303.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

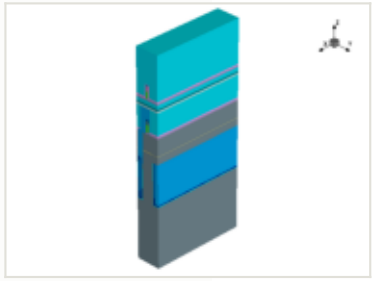

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

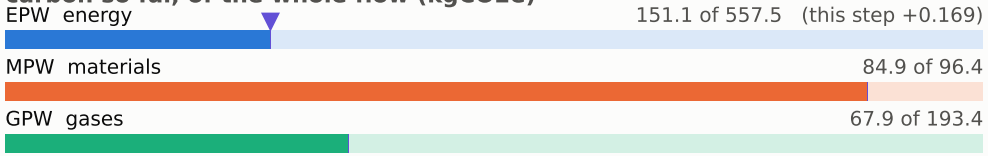

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

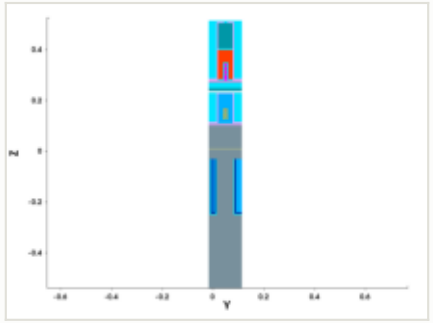

y cut at 0.049 µm

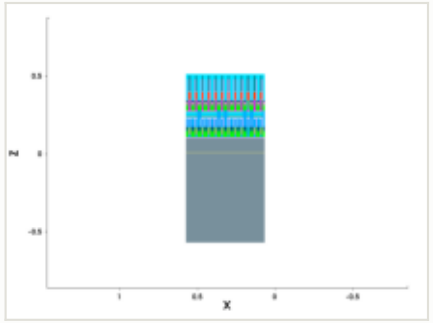

mask for this step

no mask for this step

steps by process area

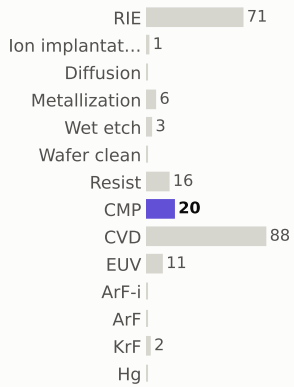

materials deposited (g)

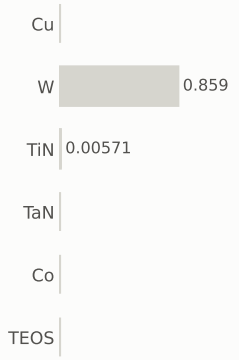

gases emitted (g)

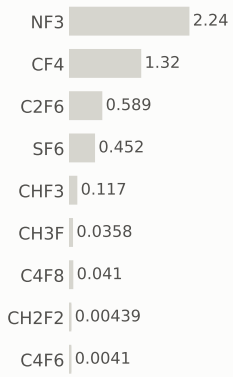

Step #2410: CVD

depo_isotropic · CVD

1.31	305.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

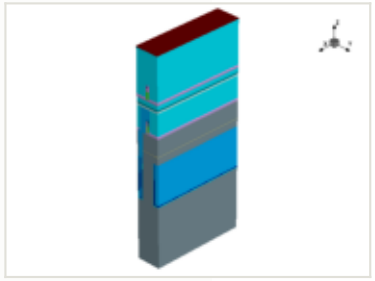

x cut at 0.385 µm

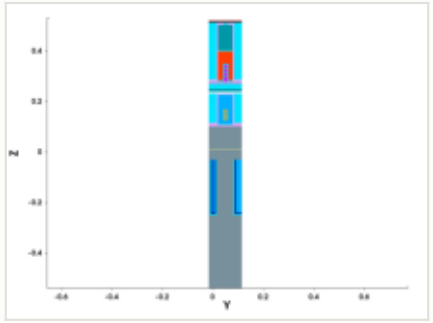

y cut at 0.049 µm

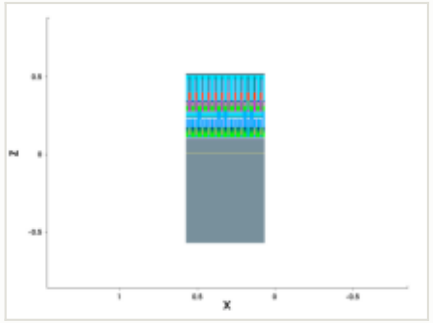

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

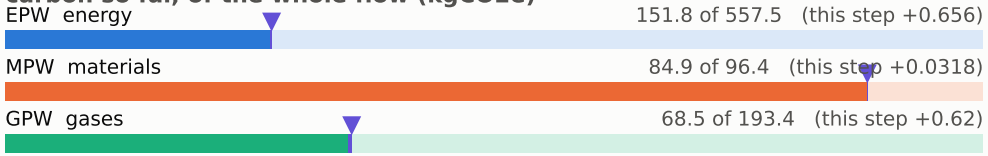

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

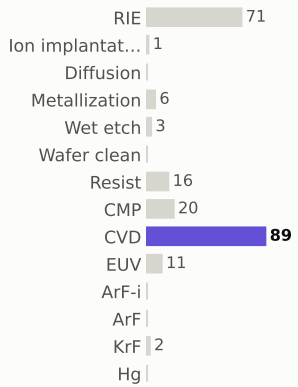

materials deposited (g)

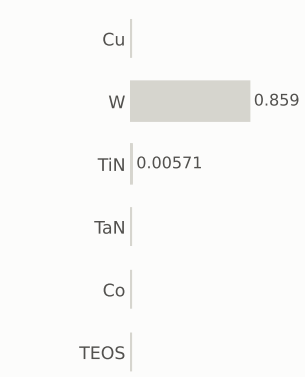

gases emitted (g)

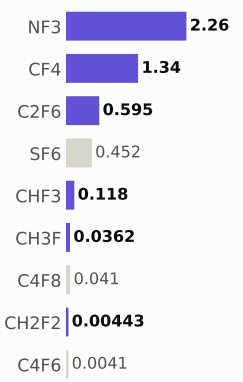

Step #2420: CVD

depo_isotropic · CVD

1.31	306.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

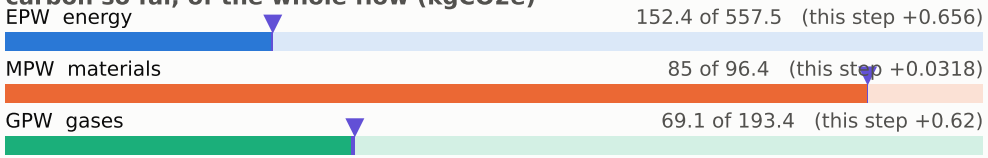

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

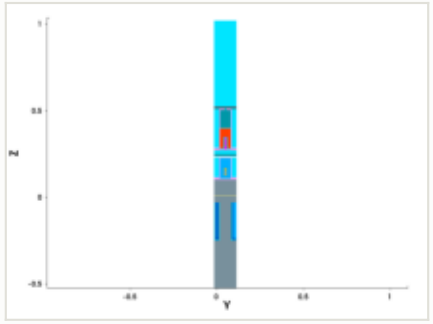

y cut at 0.049 µm

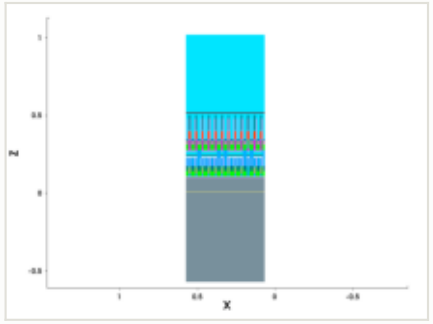

mask for this step

no mask for this step

steps by process area

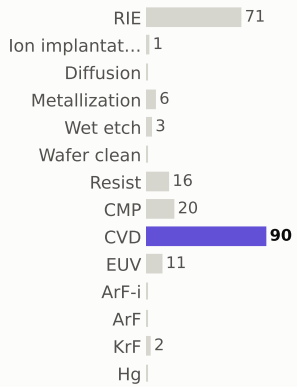

materials deposited (g)



gases emitted (g)

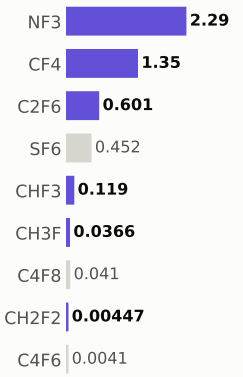

Step #2430: CMP

etch_cmp · CMP

0.169	306.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

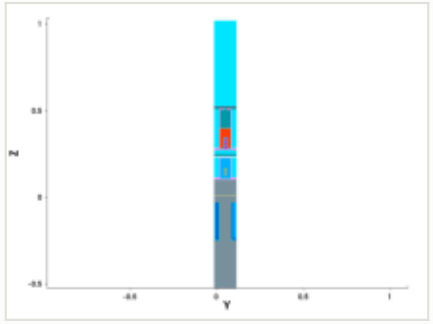

y cut at 0.049 µm

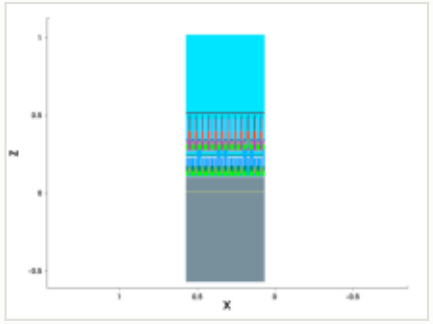

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

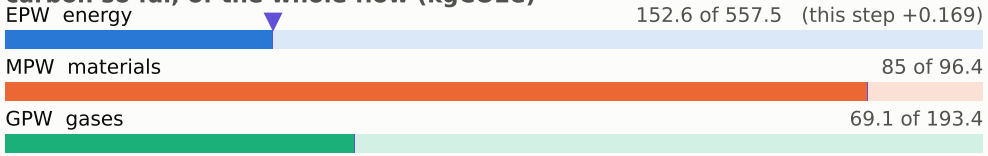

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

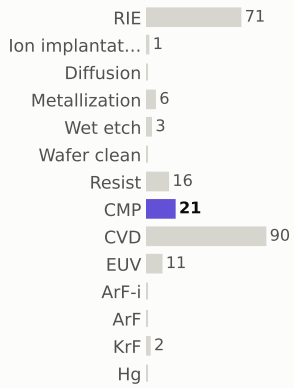

materials deposited (g)



gases emitted (g)

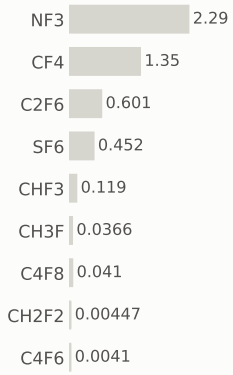

Step #2440: CMP

etch_cmp · CMP

0.169	306.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

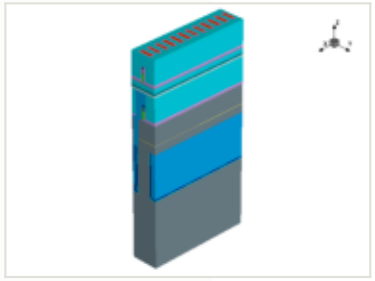

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

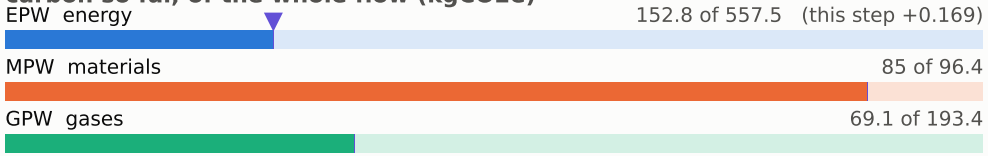

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

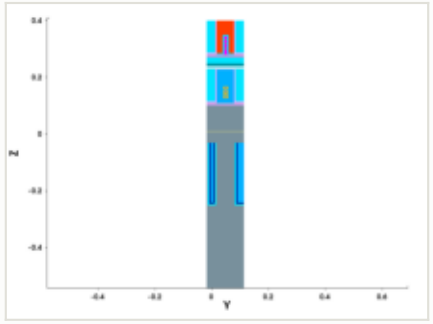

y cut at 0.049 µm

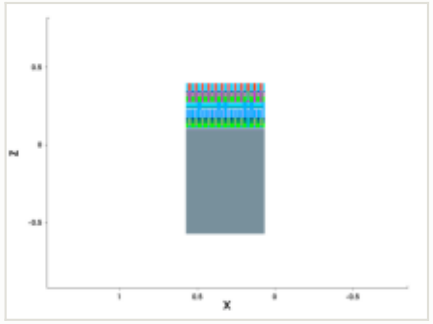

mask for this step

no mask for this step

steps by process area

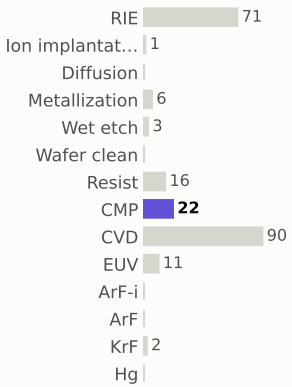

materials deposited (g)



gases emitted (g)



Step #2460: EUV

litho_patterning · EUV

1.96	308.8	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

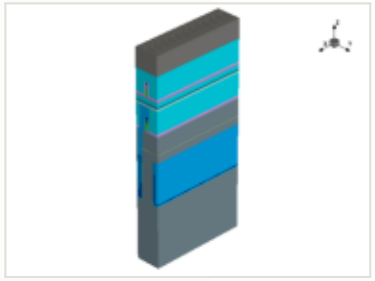

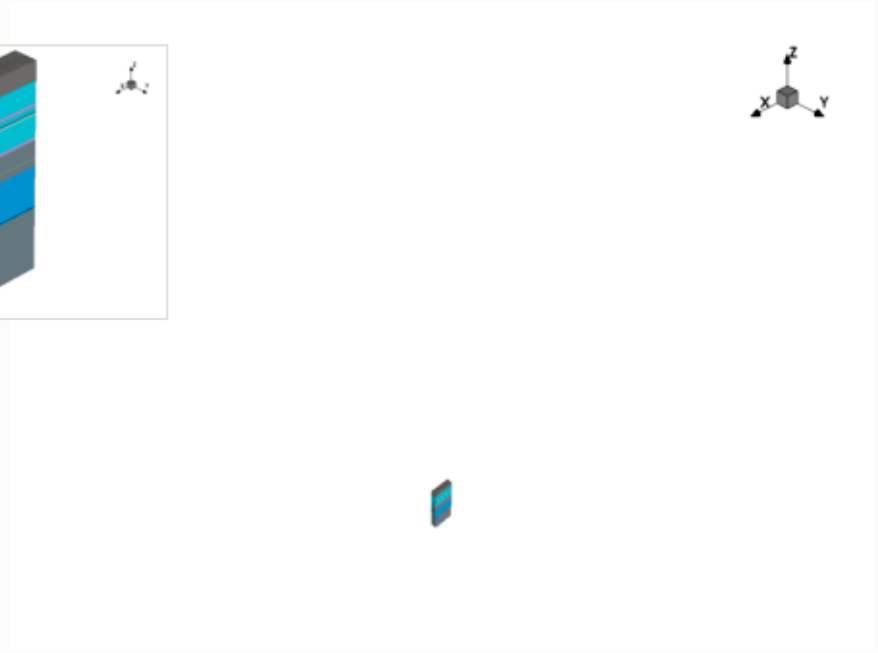

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

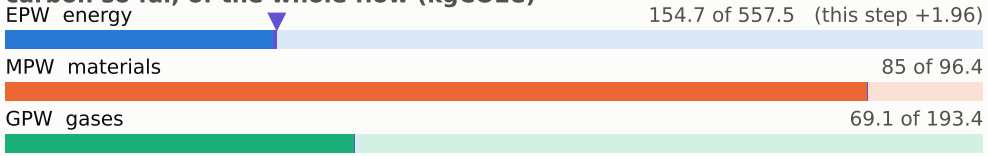

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

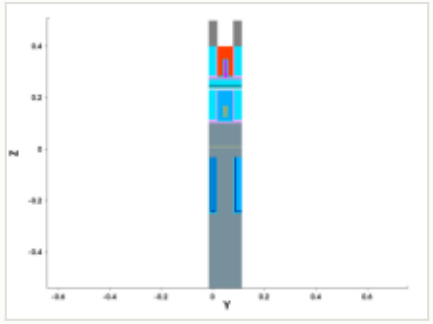

y cut at 0.049 µm

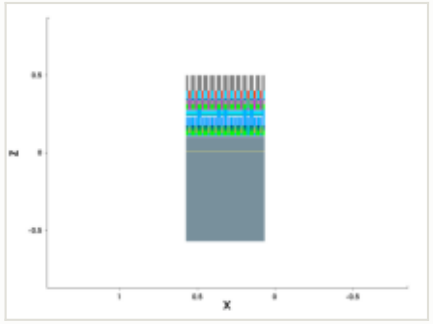

mask: layer 3:0, 3:1 (GDSII)

steps by process area

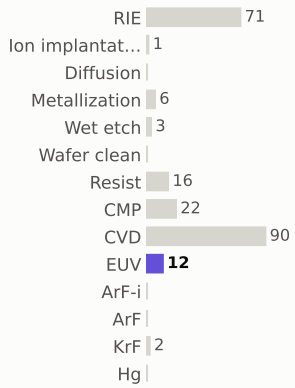

materials deposited (g)

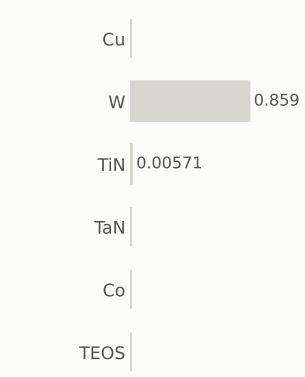

gases emitted (g)

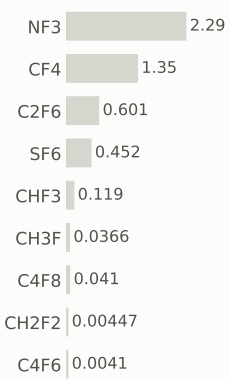

Step #2470: RIE

etch_anisotropic · RIE

1.04	309.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

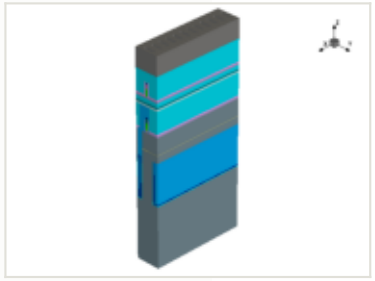

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

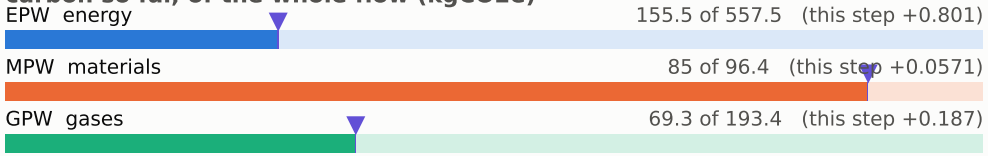

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

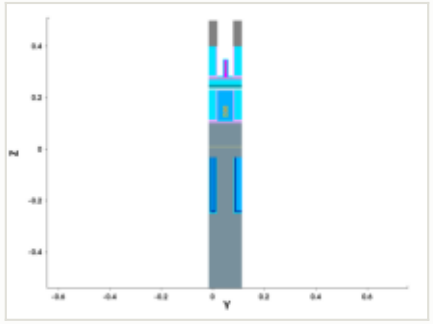

y cut at 0.049 µm

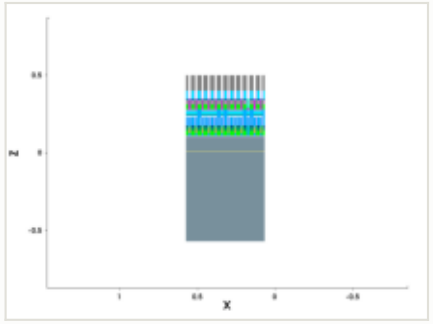

mask for this step

no mask for this step

steps by process area

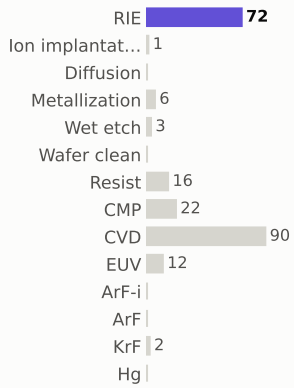

materials deposited (g)



gases emitted (g)

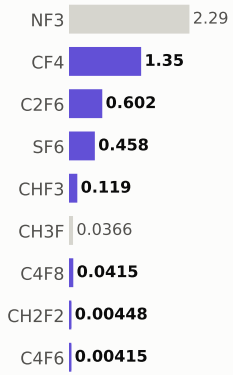

Step #2480: RIE

etch_anisotropic · RIE

1.04	310.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

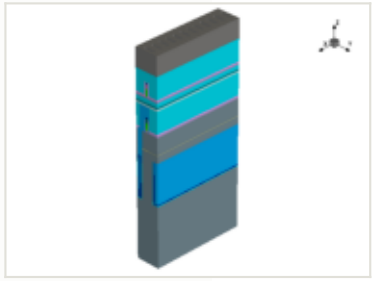

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

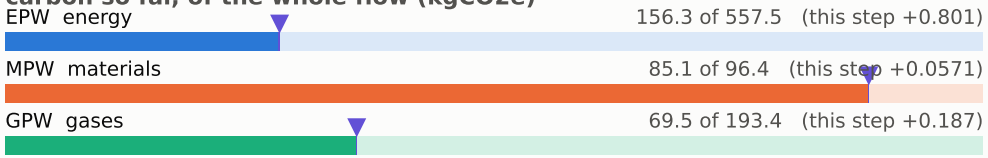

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

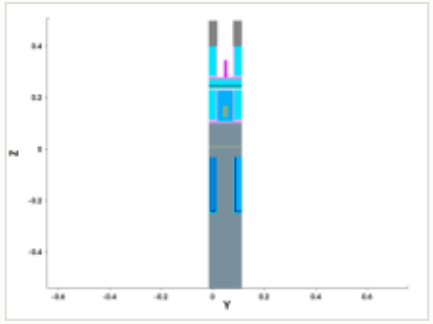

y cut at 0.049 µm

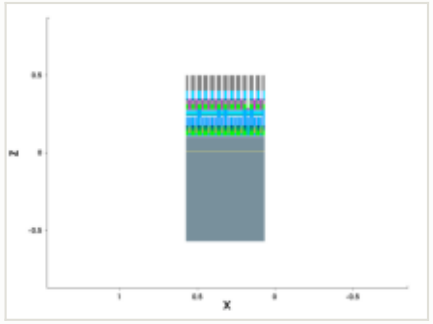

mask for this step

no mask for this step

steps by process area

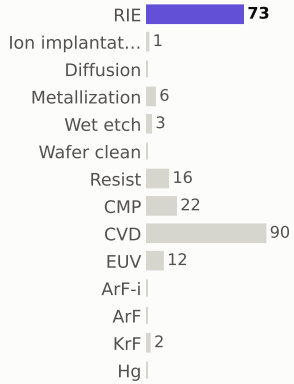

materials deposited (g)

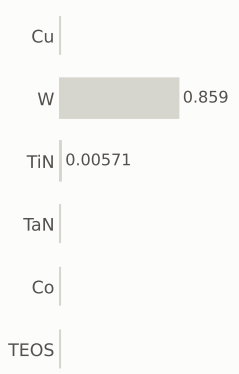

gases emitted (g)

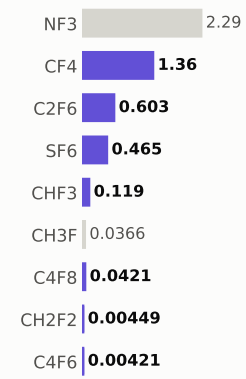

Step #2490: Resist

etch_strip · Resist

0.169	311.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

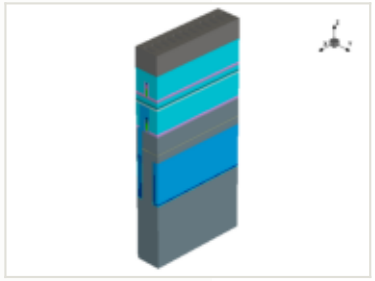

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

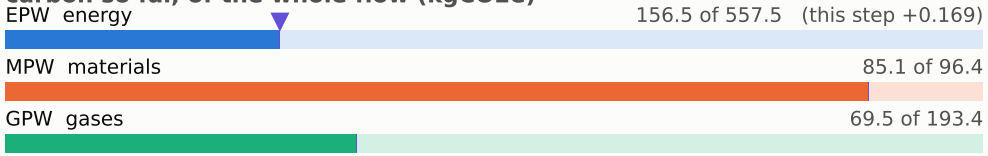

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

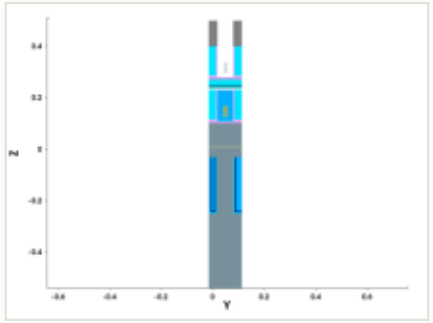

y cut at 0.049 µm

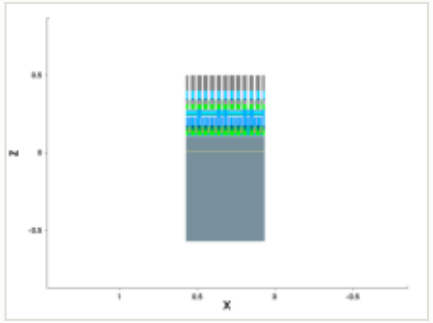

mask for this step

no mask for this step

steps by process area

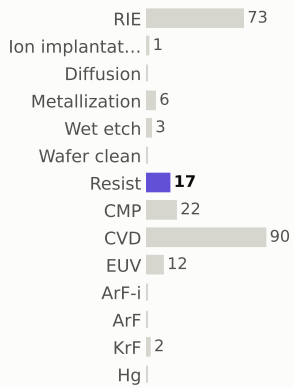

materials deposited (g)

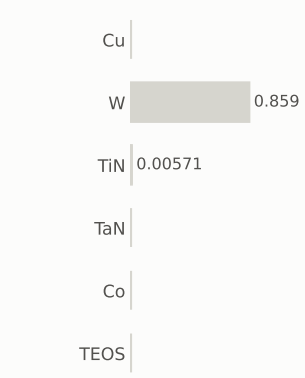

gases emitted (g)

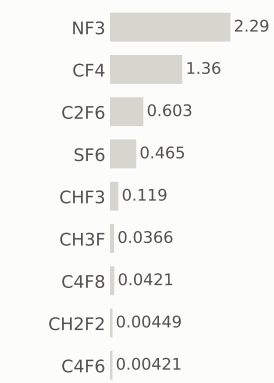

Step #2500: CVD

depo_fill · CVD

1.31	312.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

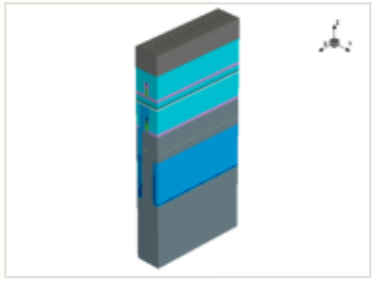

x cut at 0.385 µm

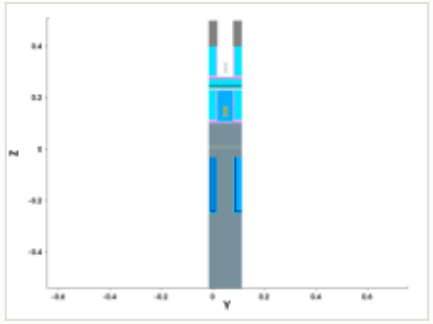

y cut at 0.049 µm

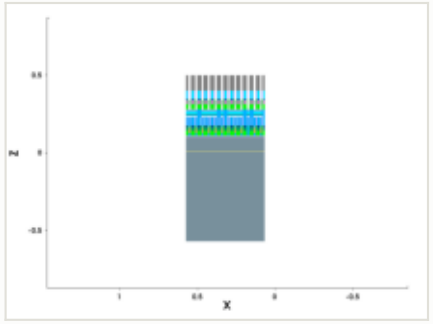

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	-0.053 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

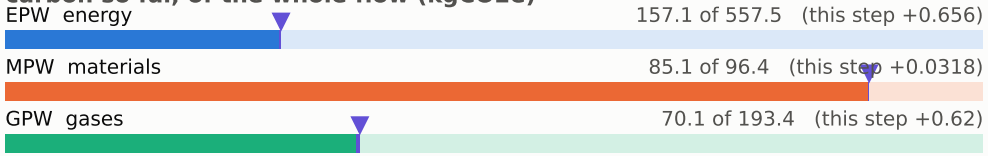

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

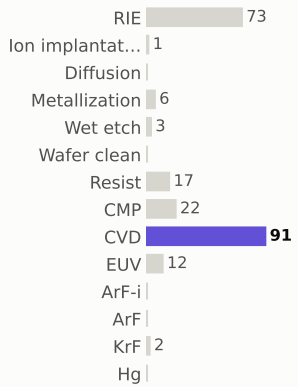

materials deposited (g)

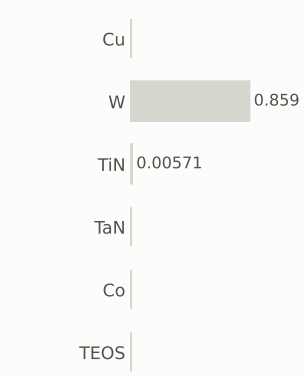

gases emitted (g)

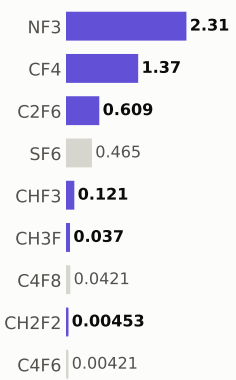

Step #2510: CVD

depo_isotropic · CVD

1.31	313.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

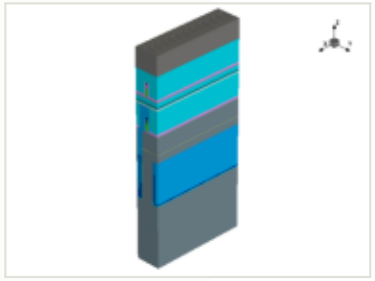

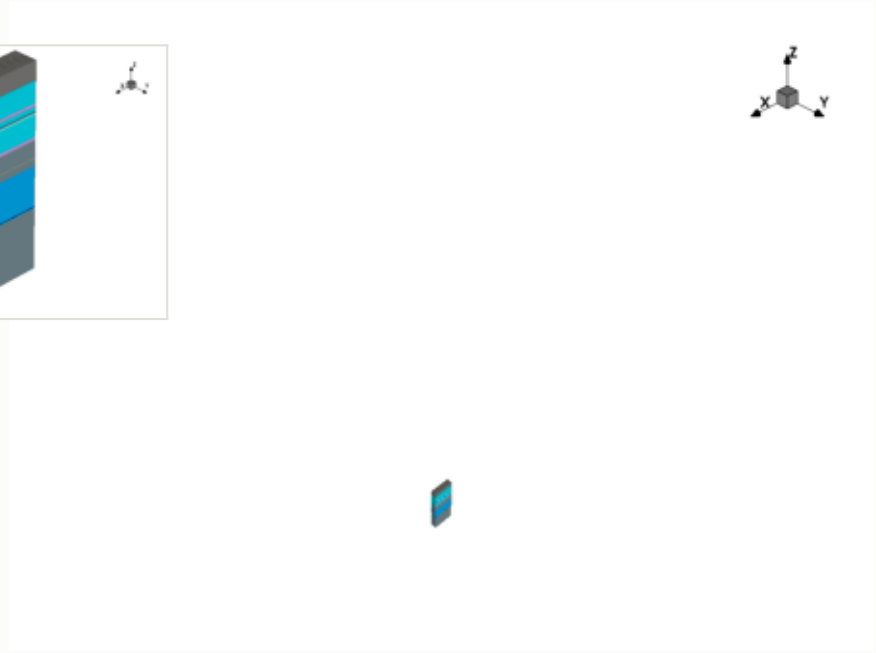

this step

process area	CVD
material	—
thickness	0.0028 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

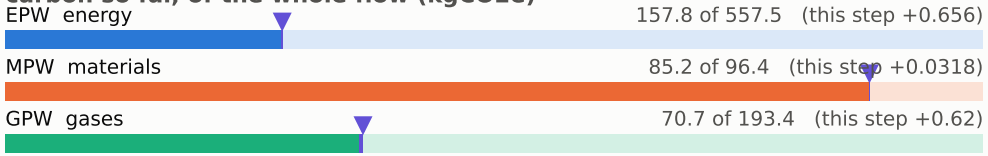

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

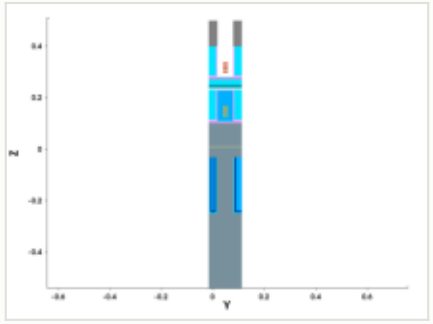

y cut at 0.049 µm

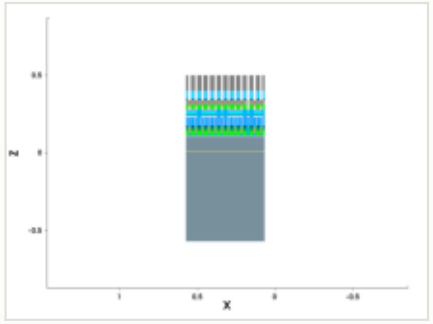

mask for this step

no mask for this step

steps by process area



materials deposited (g)

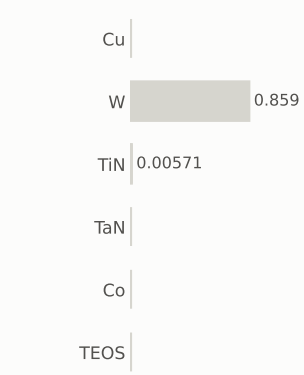

gases emitted (g)

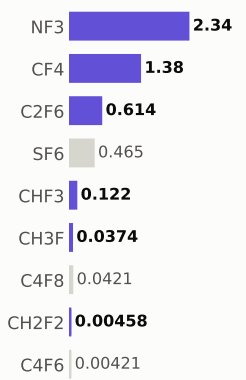

Step #2520: Wet_etch

etch_isotropic · Wet_etch

0.169	313.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

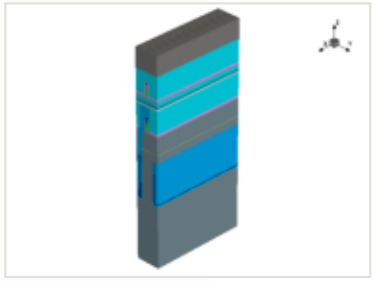

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

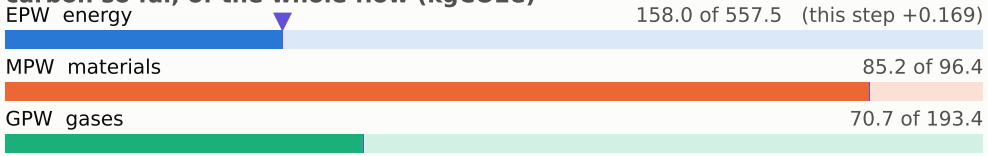

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

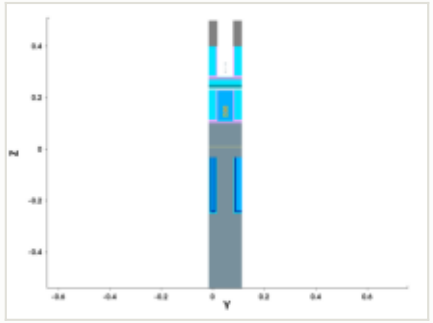

y cut at 0.049 µm

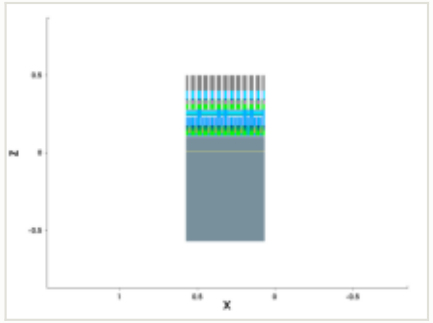

mask for this step

no mask for this step

steps by process area



materials deposited (g)

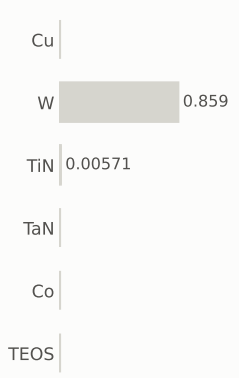

gases emitted (g)

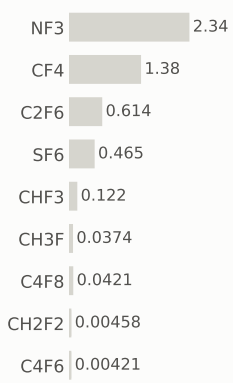

Step #2530: CVD

depo_isotropic · CVD

1.31	315.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

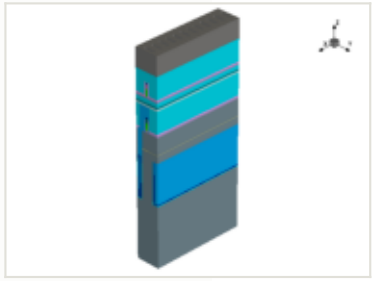

x cut at 0.385 µm

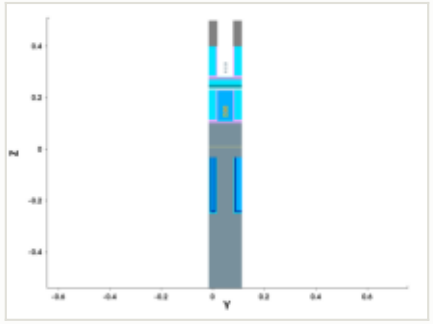

y cut at 0.049 µm

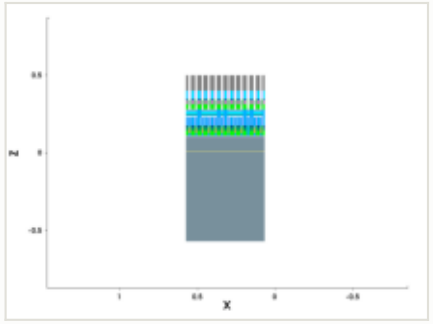

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.0015 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

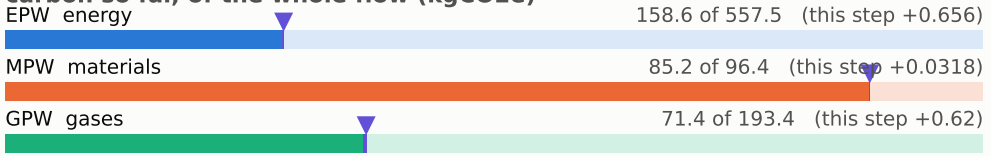

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

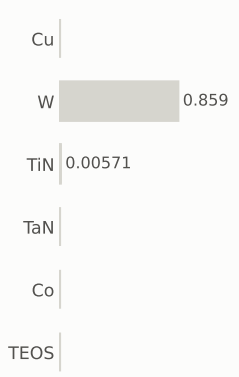

gases emitted (g)

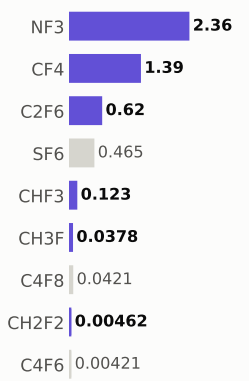

Step #2540: CVD

depo_isotropic · CVD

1.31	316.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

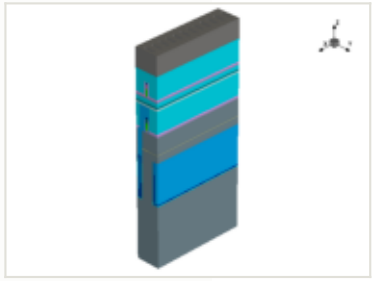

x cut at 0.385 µm

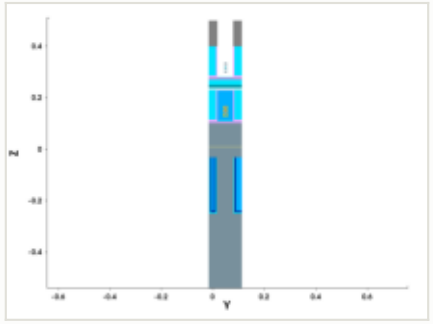

y cut at 0.049 µm

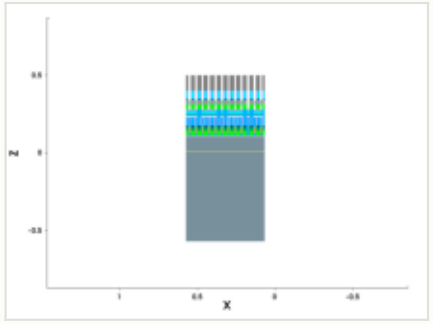

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.0005 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

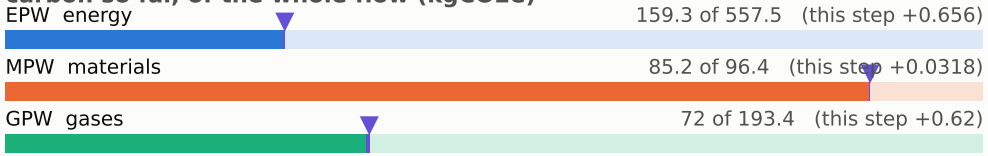

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

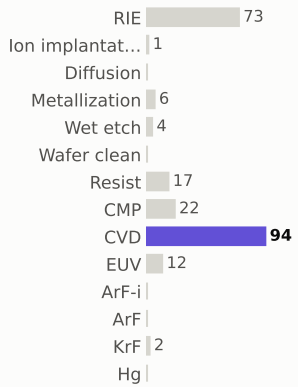

materials deposited (g)

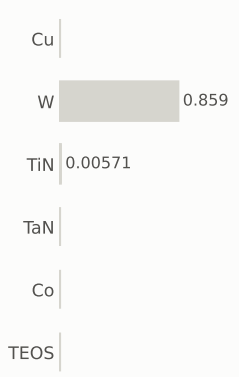

gases emitted (g)

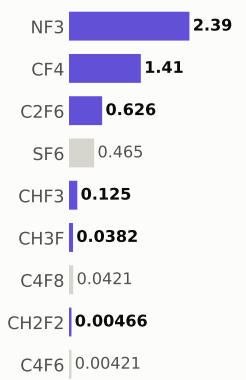

Step #2550: CVD

depo_isotropic · CVD

1.31	317.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

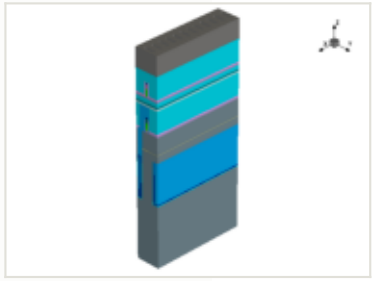

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

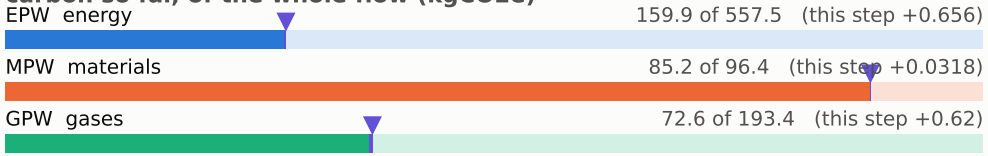

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

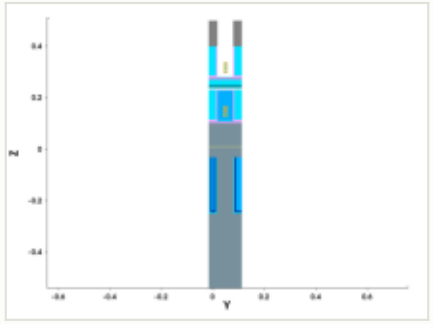

y cut at 0.049 µm

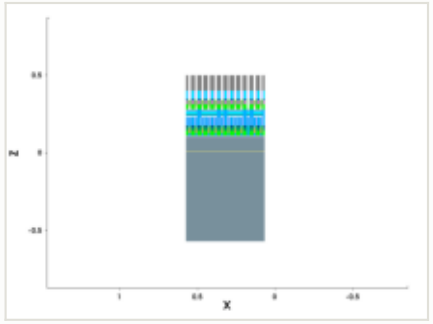

mask for this step

no mask for this step

steps by process area

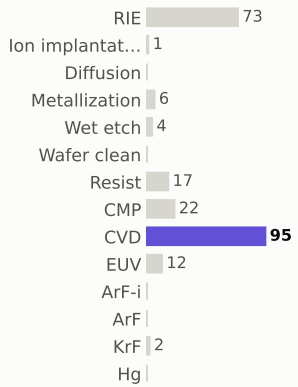

materials deposited (g)

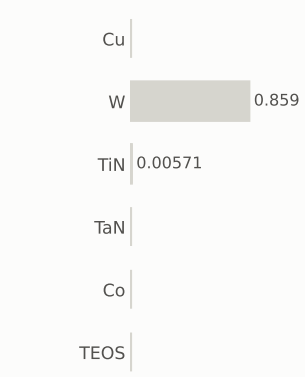

gases emitted (g)



Step #2560: Resist

etch_strip · Resist

0.169	317.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

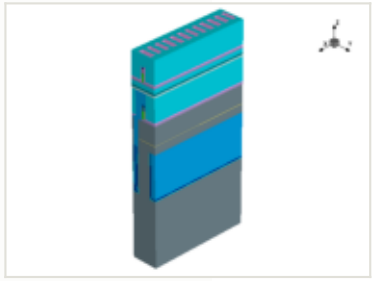

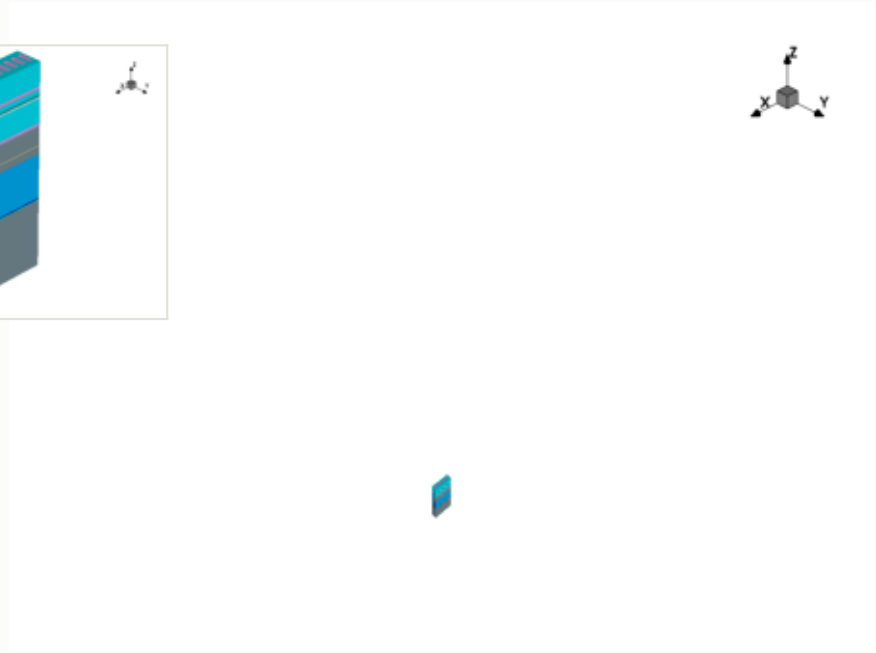

x cut at 0.385 µm

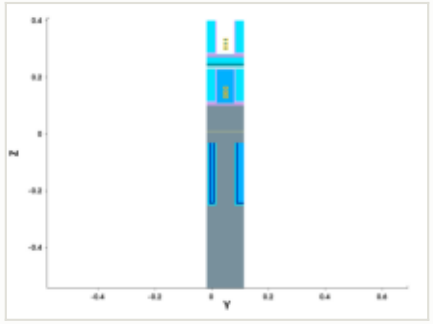

y cut at 0.049 µm

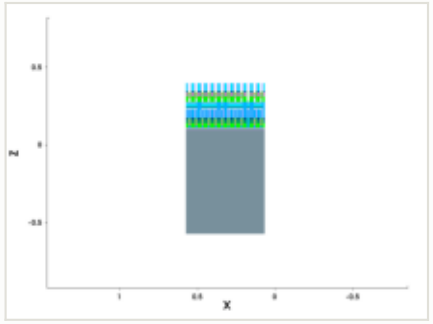

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

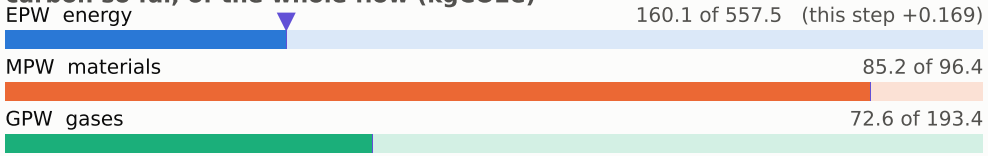

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

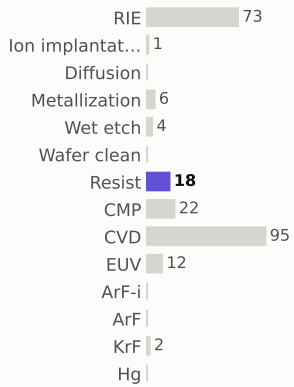

materials deposited (g)



gases emitted (g)

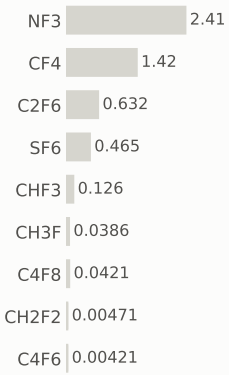

Step #2570: CVD

depo_isotropic · CVD

1.31	319.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

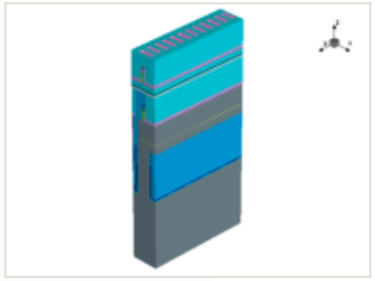

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.0005 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

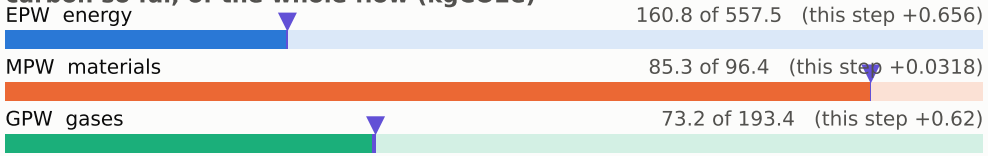

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

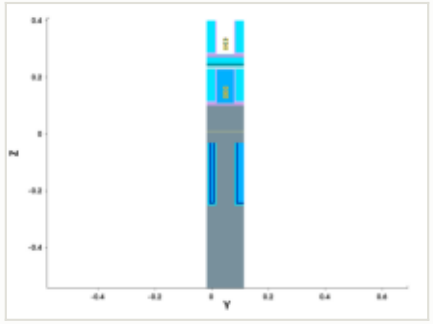

y cut at 0.049 µm

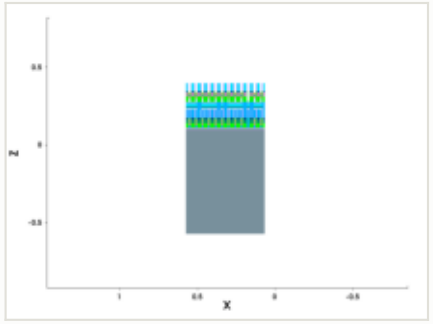

mask for this step

no mask for this step

steps by process area



materials deposited (g)

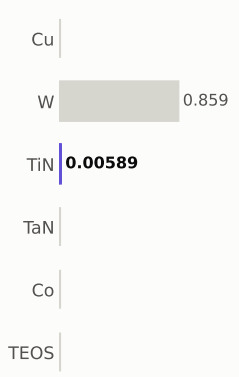

gases emitted (g)

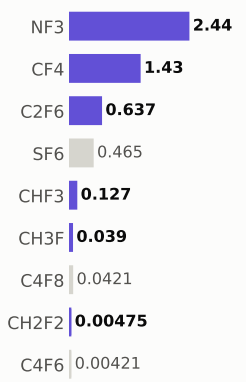

Step #2580: Metallization

depo_fill · Metallization

1.21	320.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

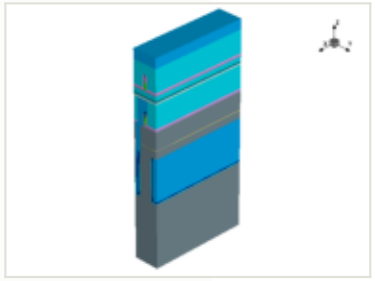

x cut at 0.385 µm

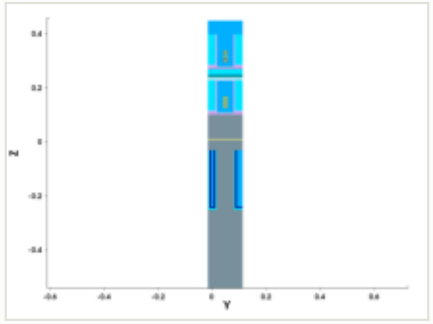

y cut at 0.049 µm

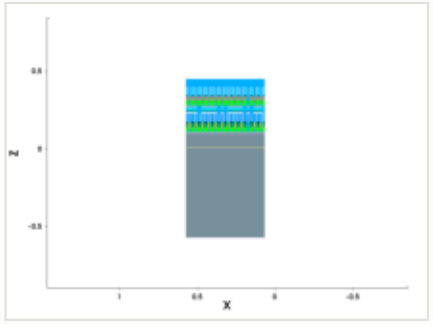

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

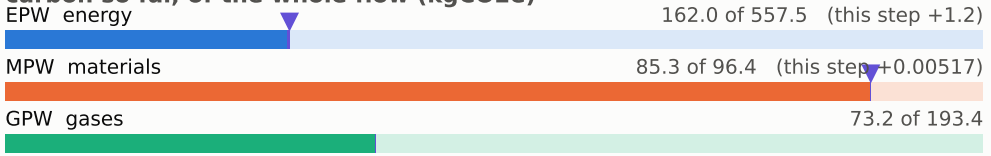

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

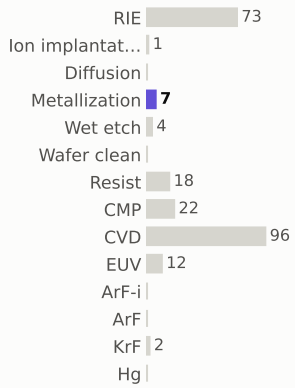

materials deposited (g)

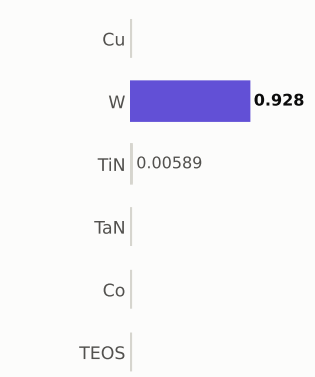

gases emitted (g)

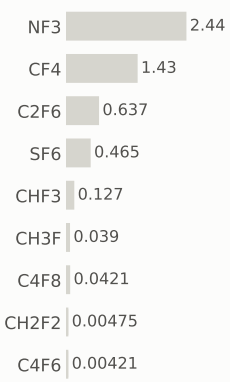

Step #2590: CMP

etch_cmp · CMP

0.169	320.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

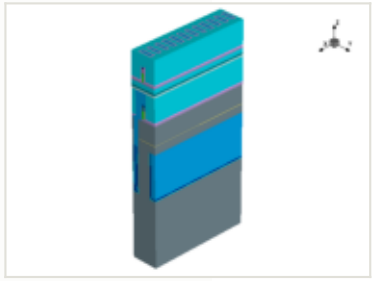

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

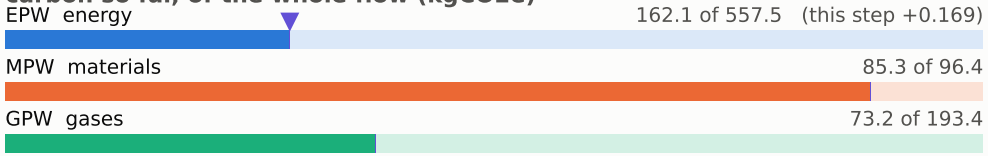

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

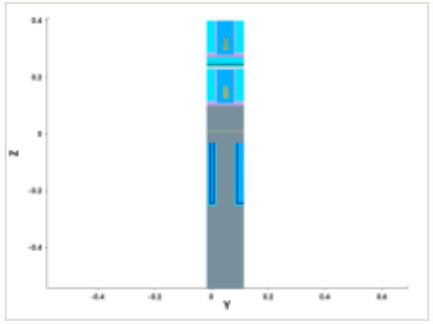

y cut at 0.049 µm

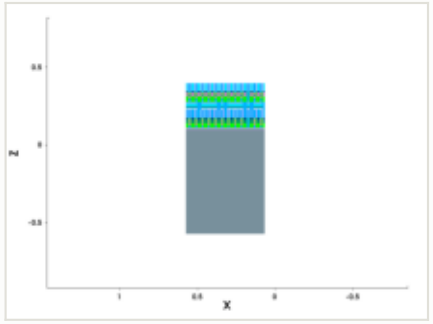

mask for this step

no mask for this step

steps by process area

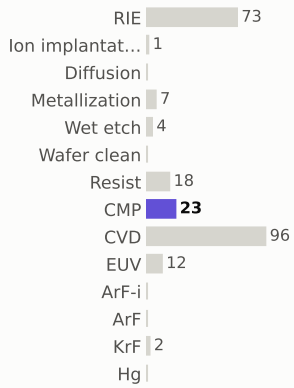

materials deposited (g)

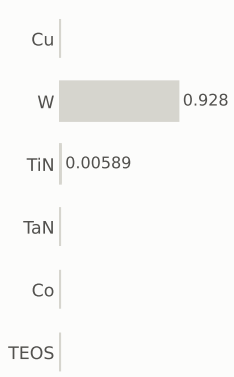

gases emitted (g)

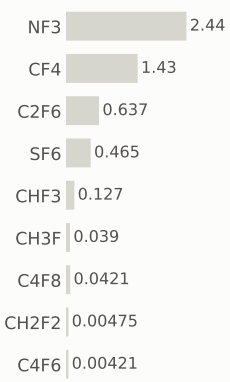

Step #2600: RIE

etch_height_dependent · RIE

1.04	321.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

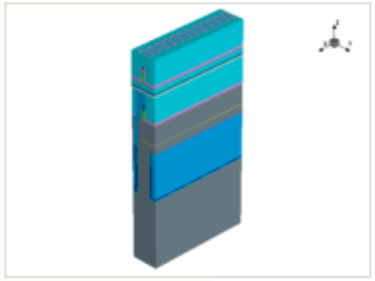

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

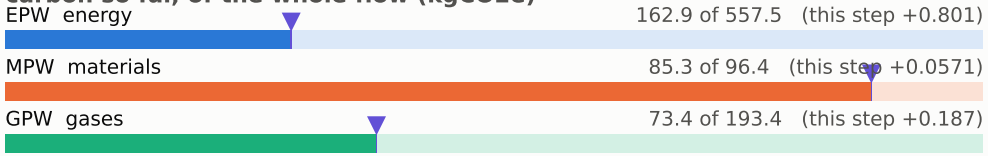

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

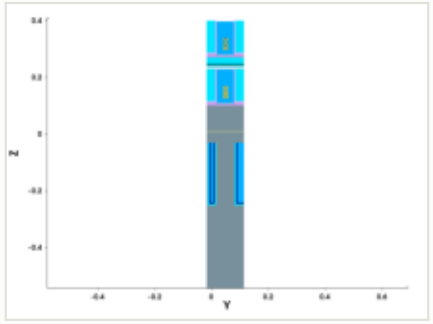

y cut at 0.049 µm

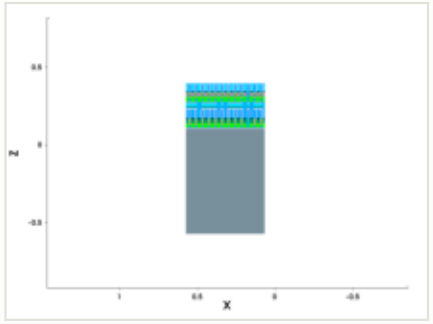

mask for this step

no mask for this step

steps by process area

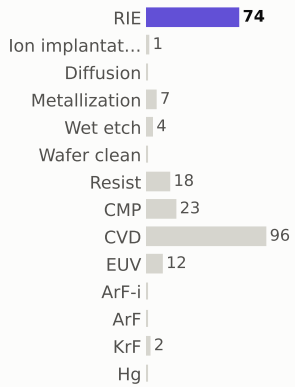

materials deposited (g)



gases emitted (g)

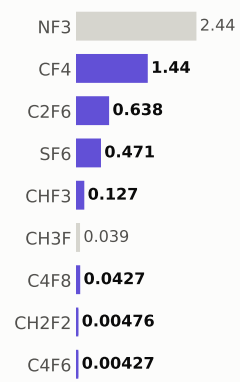

Step #2610: CVD

depo_fill · CVD

1.31	323.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

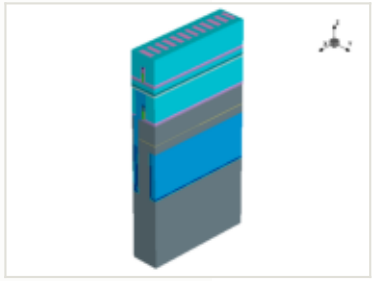

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

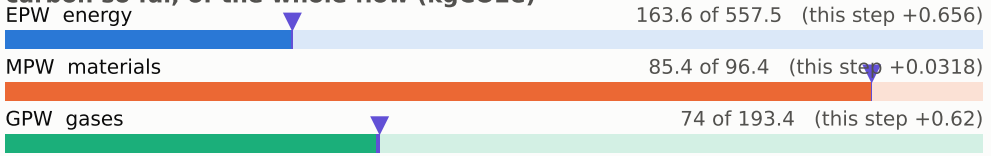

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

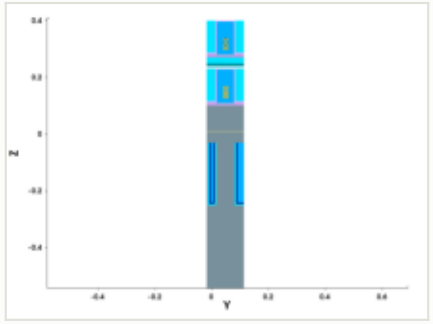

y cut at 0.049 µm

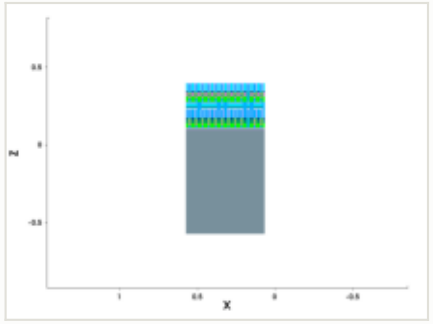

mask for this step

no mask for this step

steps by process area

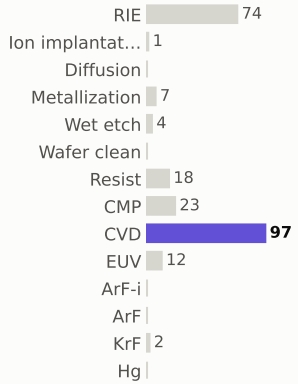

materials deposited (g)

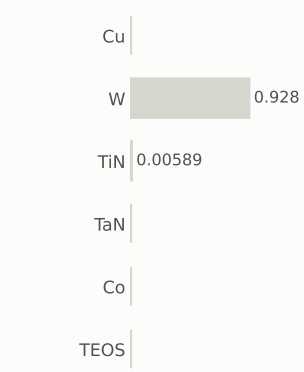

gases emitted (g)

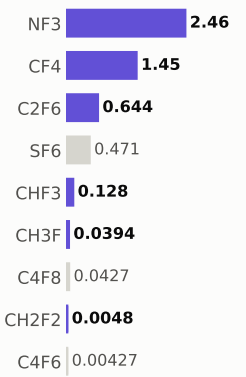

Step #2620: CMP

etch_cmp · CMP

0.169	323.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

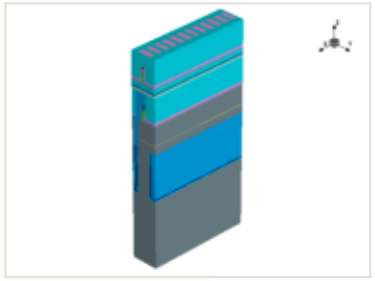

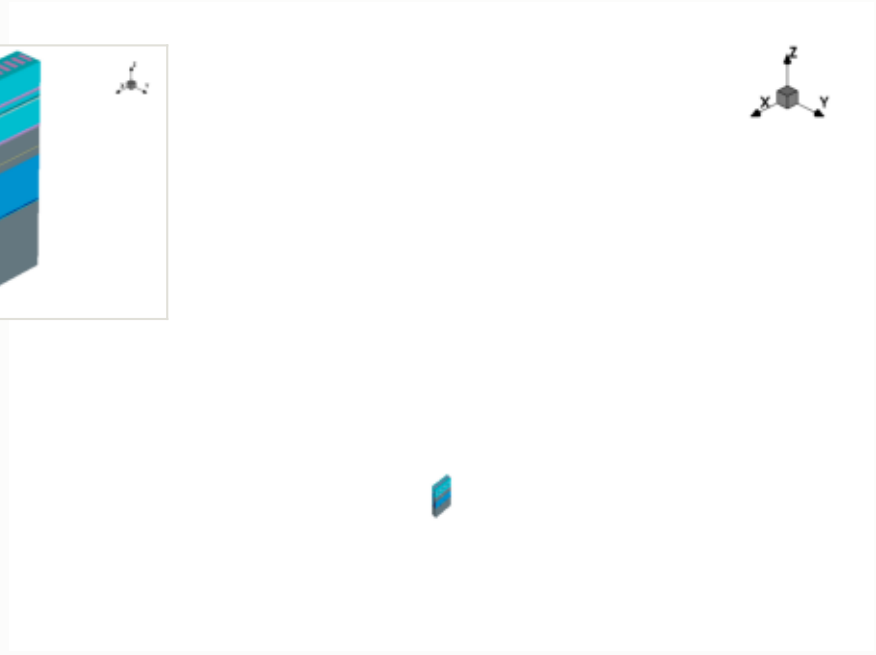

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

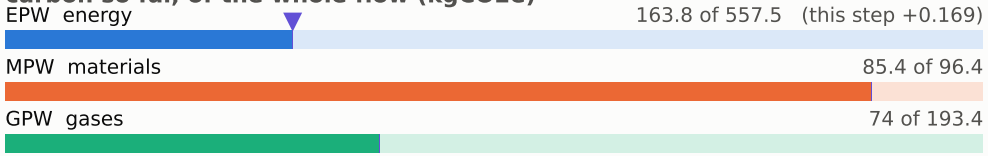

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

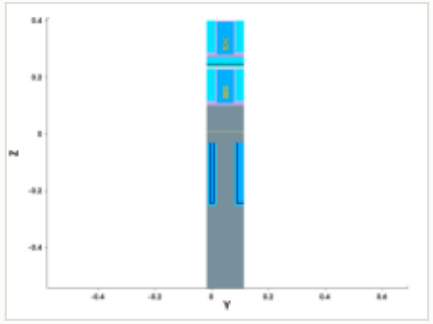

y cut at 0.049 µm

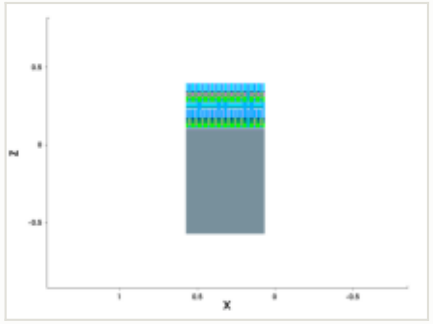

mask for this step

no mask for this step

steps by process area

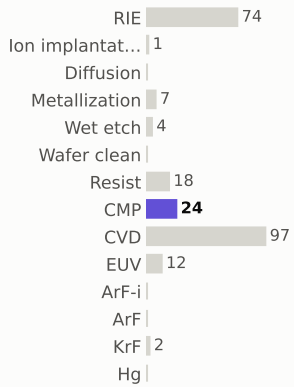

materials deposited (g)



gases emitted (g)

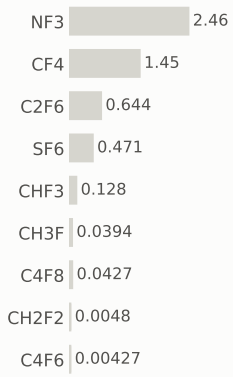

Step #2670: EUV

litho_patterning · EUV

1.96	325.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

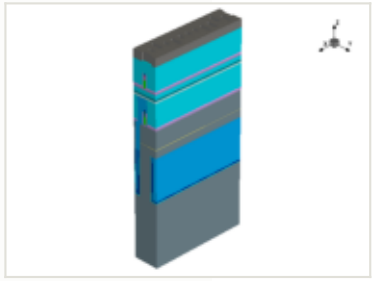

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

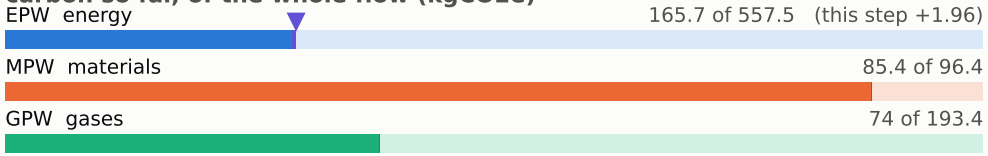

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

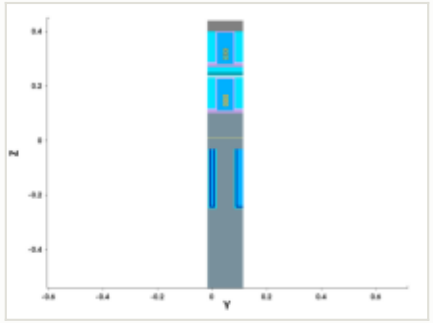

y cut at 0.049 µm

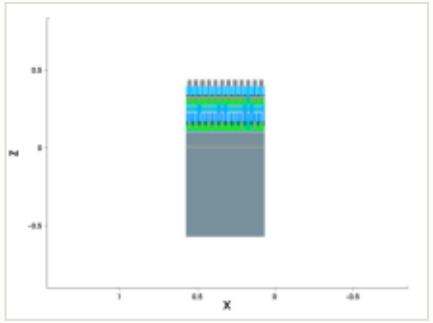

mask: layer 10:2 (GDSII)

steps by process area

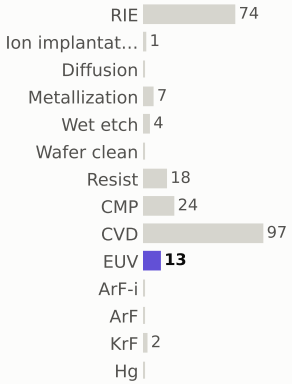

materials deposited (g)

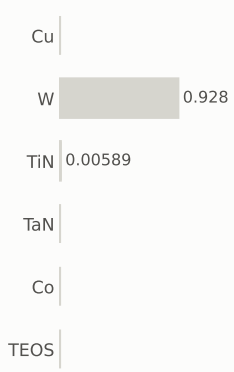

gases emitted (g)



Step #2680: RIE

etch_anisotropic · RIE

1.04	326.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

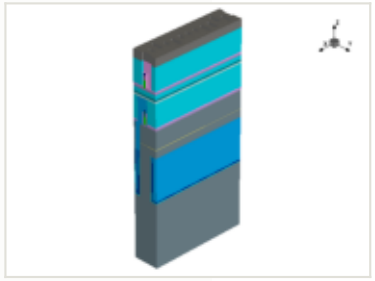

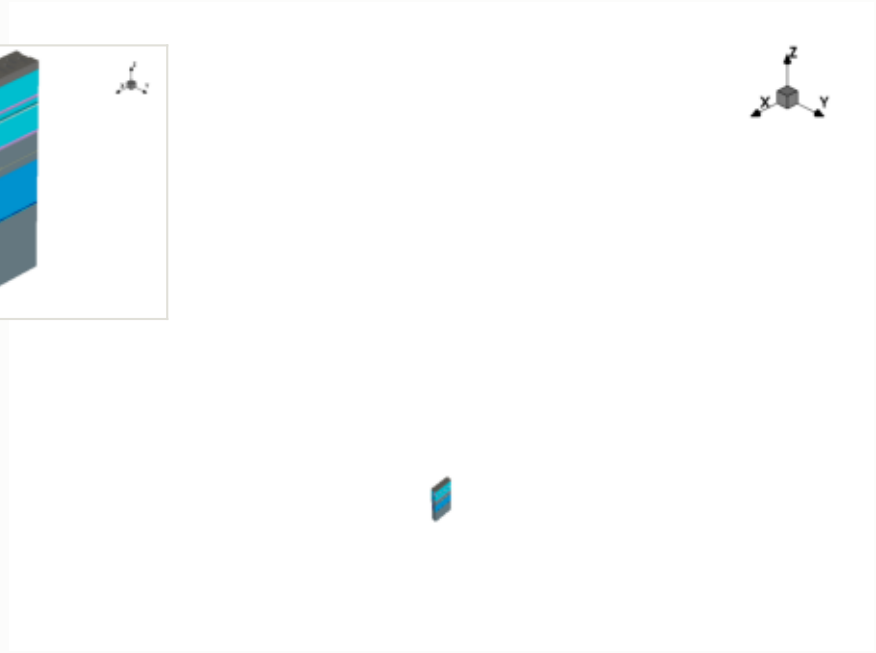

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

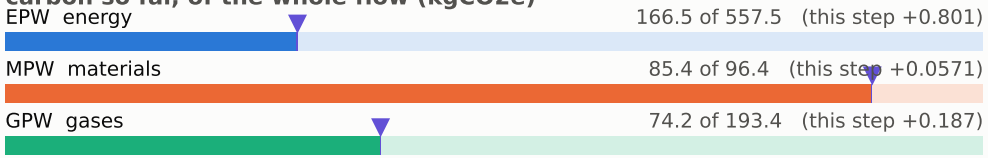

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

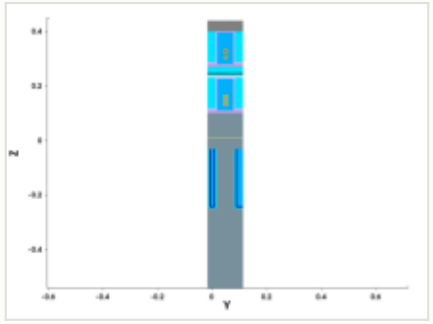

y cut at 0.049 µm

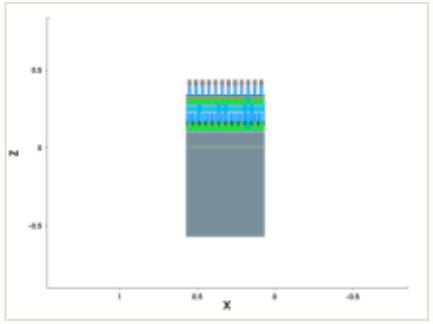

mask for this step

no mask for this step

steps by process area

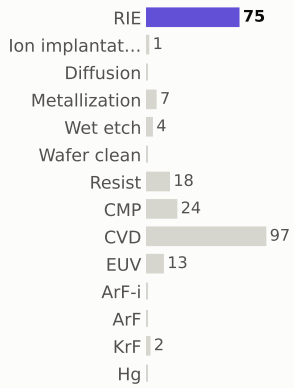

materials deposited (g)



gases emitted (g)

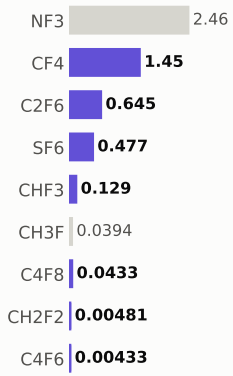

Step #2690: Resist

etch_strip · Resist

0.169	326.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

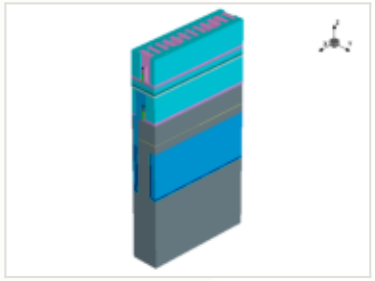

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

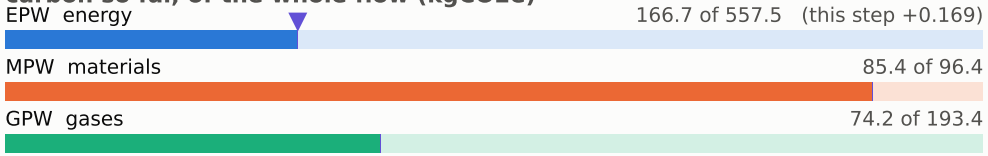

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

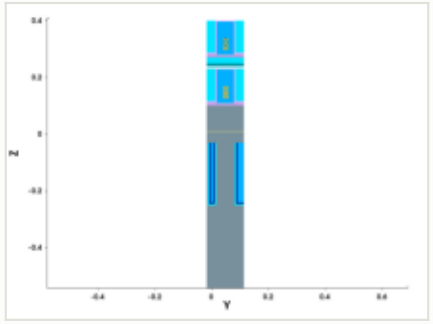

y cut at 0.049 µm

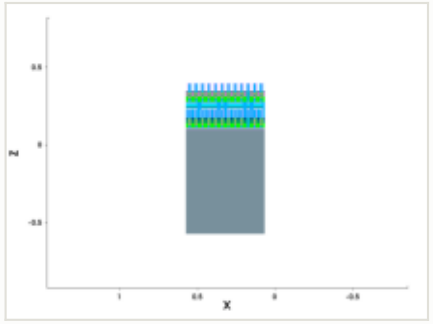

mask for this step

no mask for this step

steps by process area

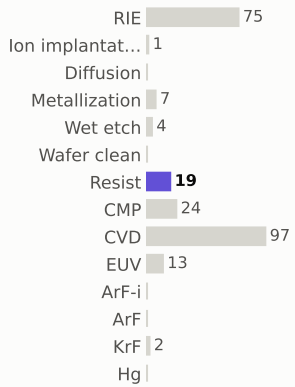

materials deposited (g)



gases emitted (g)

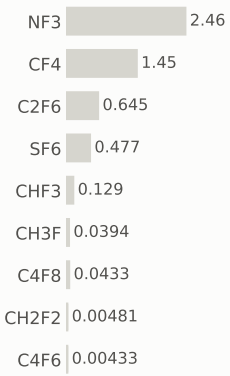

Step #2700: Metallization

depo_isotropic · Metallization

1.21	327.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

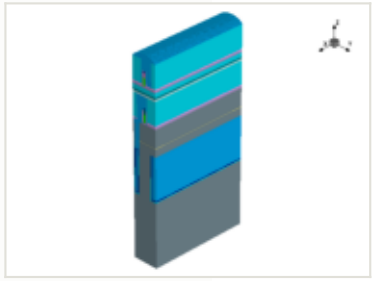

this step

process area	Metallization
material	W
thickness	0.08 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00827 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

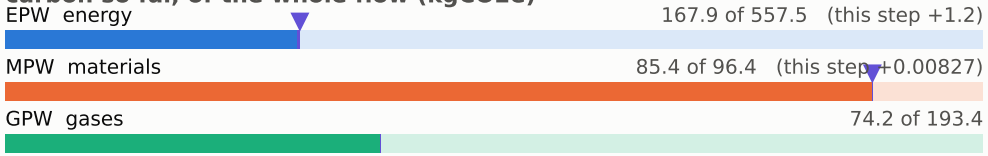

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

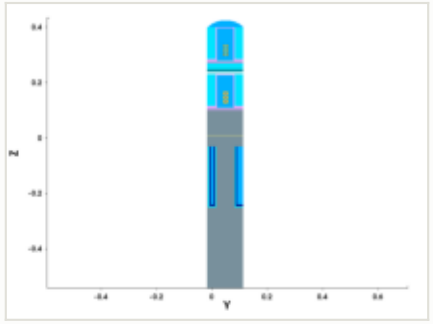

y cut at 0.049 µm

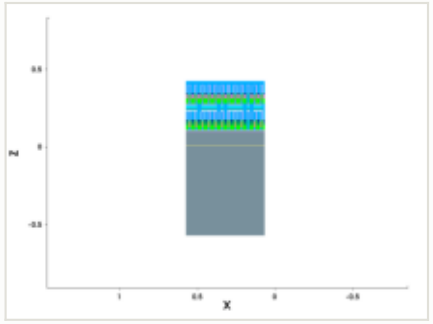

mask for this step

no mask for this step

steps by process area

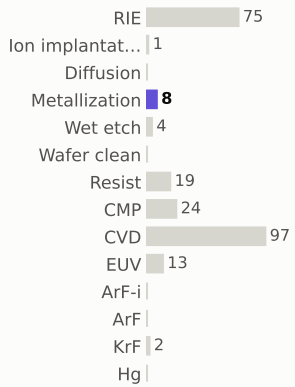

materials deposited (g)

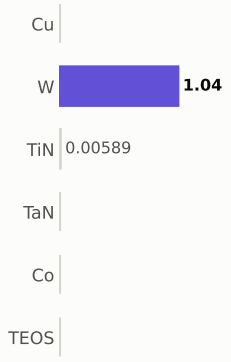

gases emitted (g)

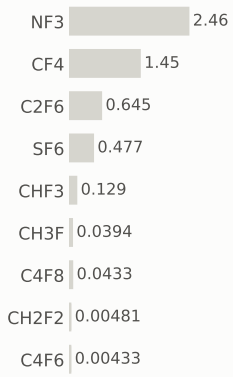

Step #2710: CMP

etch_cmp · CMP

0.169	327.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

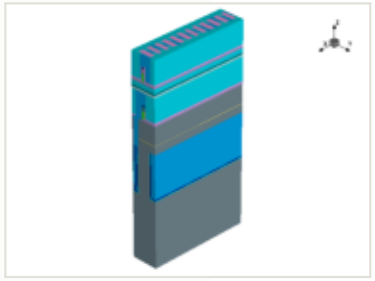

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

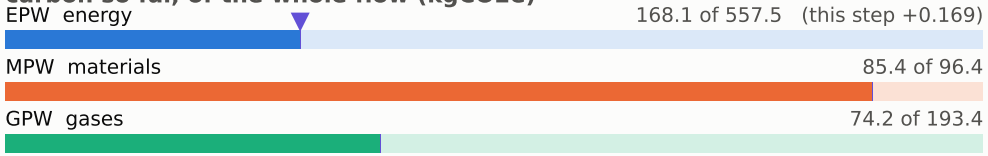

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

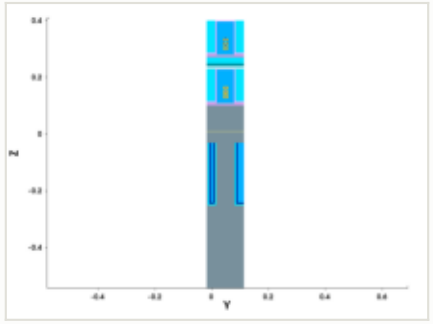

y cut at 0.049 µm

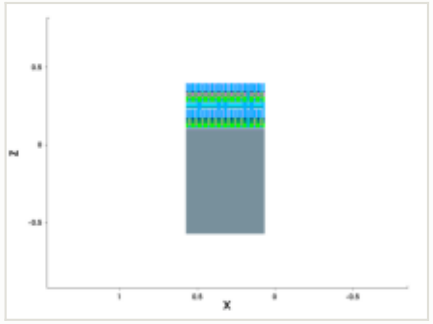

mask for this step

no mask for this step

steps by process area

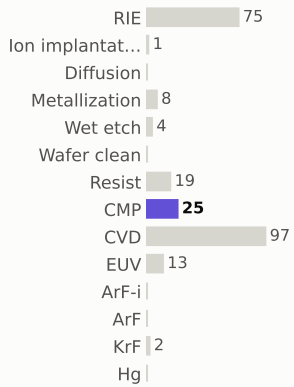

materials deposited (g)

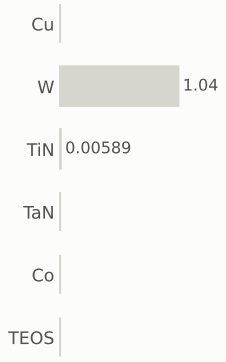

gases emitted (g)

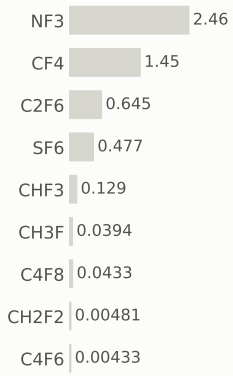

Step #2720: RIE

etch_anisotropic · RIE

1.04	328.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

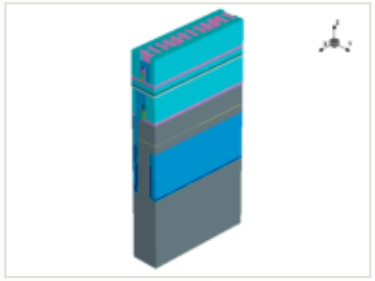

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

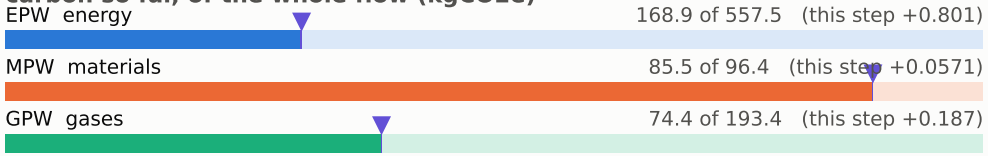

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

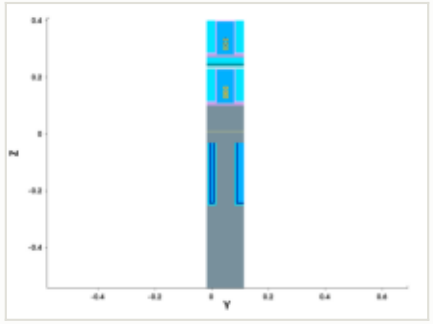

y cut at 0.049 µm

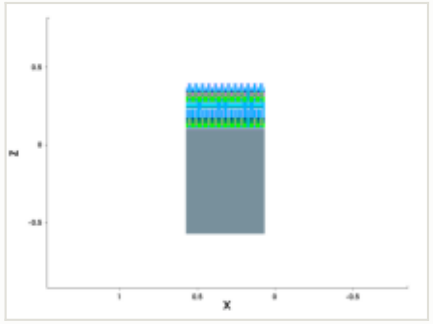

mask for this step

no mask for this step

steps by process area

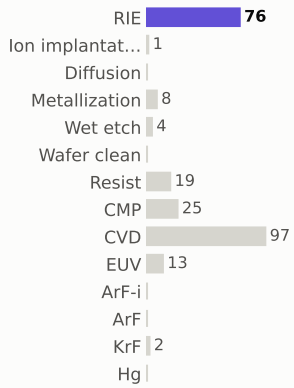

materials deposited (g)

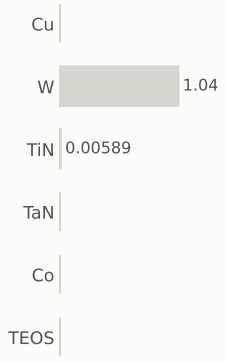

gases emitted (g)

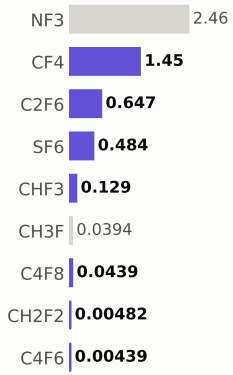

Step #2730: CVD

depo_fill · CVD

1.31	330.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

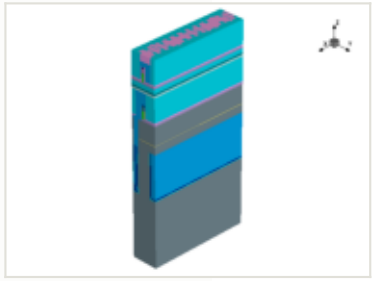

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

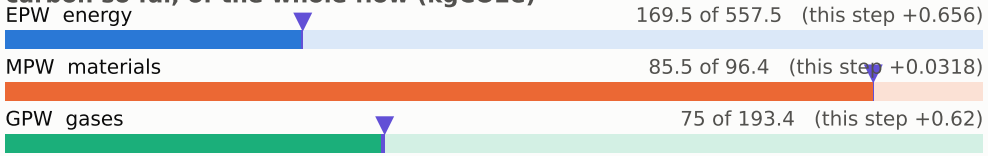

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

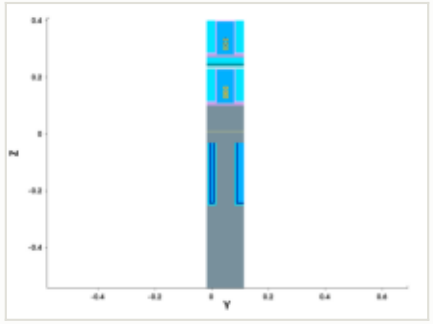

y cut at 0.049 µm

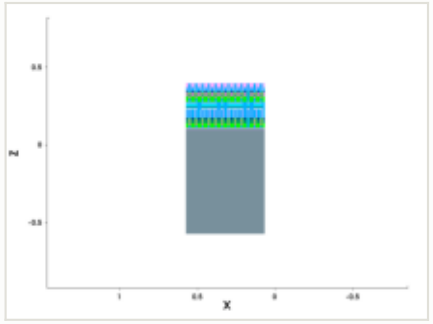

mask for this step

no mask for this step

steps by process area

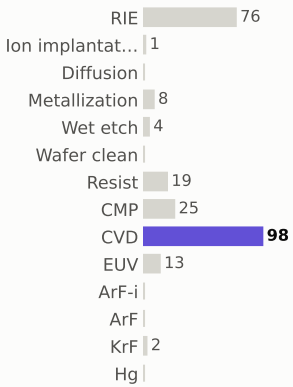

materials deposited (g)



gases emitted (g)



Step #2750: EUV

litho_patterning · EUV

1.96	332.0	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

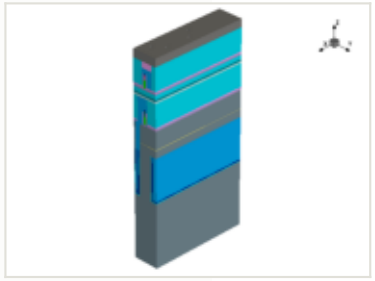

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

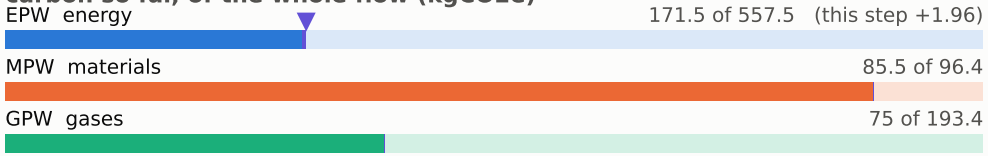

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

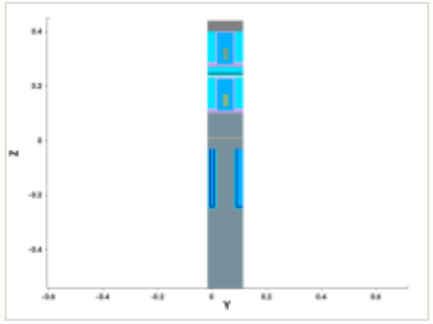

y cut at 0.049 µm

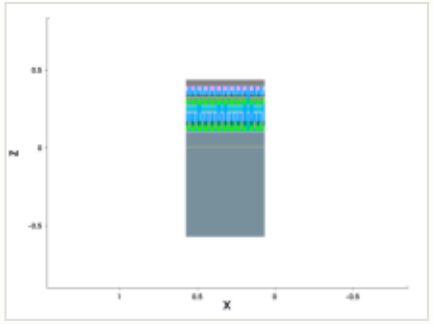

mask: layer 5:2 (GDSII)

steps by process area

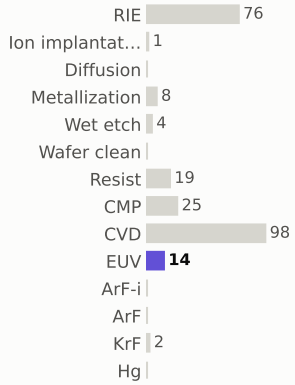

materials deposited (g)

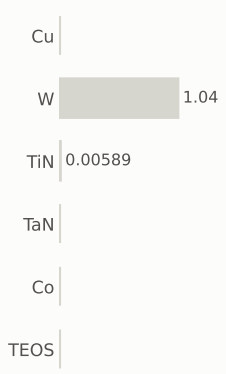

gases emitted (g)

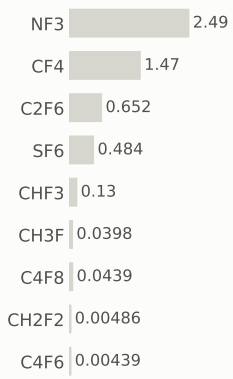

Step #2760: RIE

etch_anisotropic · RIE

1.04	333.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

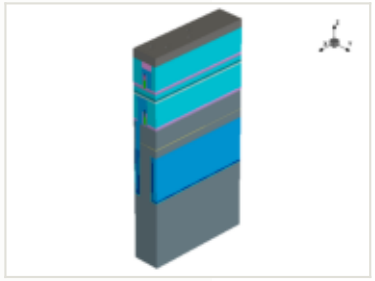

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

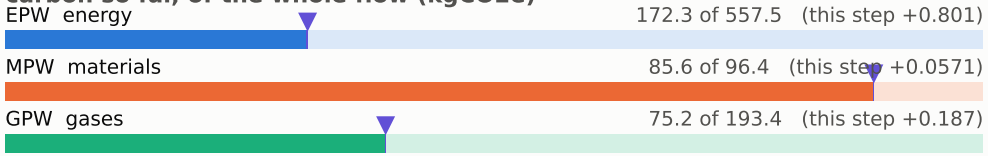

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

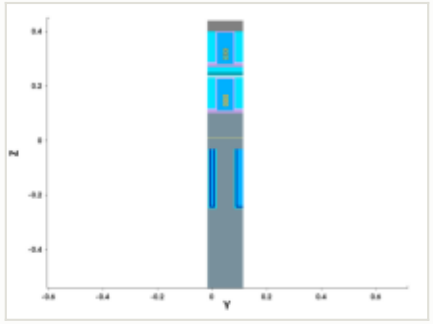

y cut at 0.049 µm

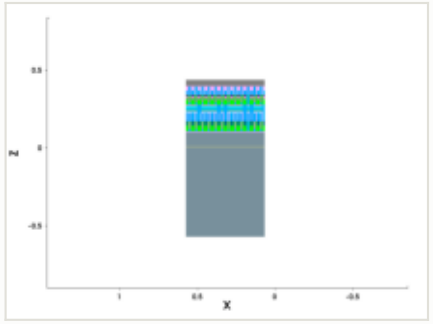

mask for this step

no mask for this step

steps by process area

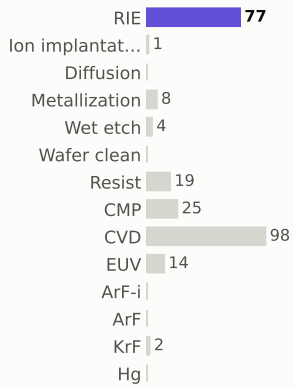

materials deposited (g)

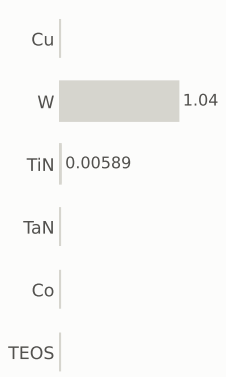

gases emitted (g)

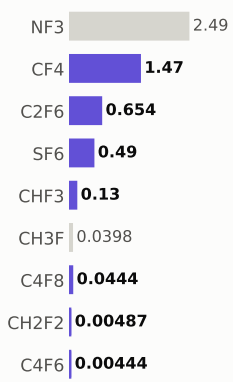

Step #2770: RIE

etch_anisotropic · RIE

1.04	334.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

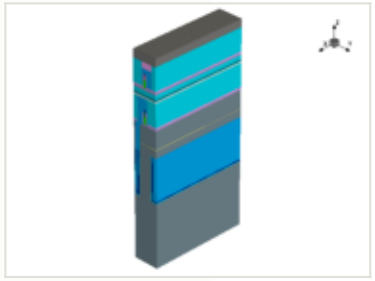

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

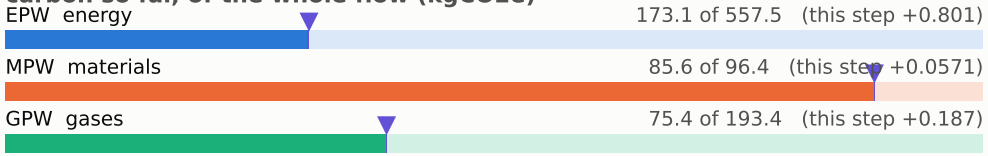

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

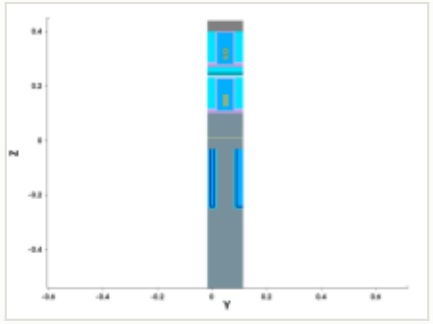

y cut at 0.049 µm

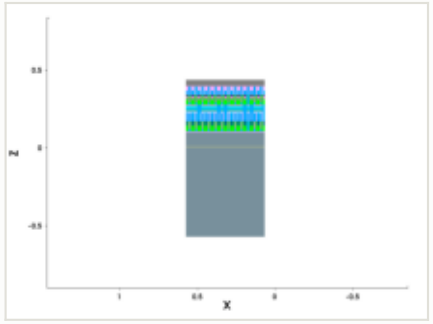

mask for this step

no mask for this step

steps by process area

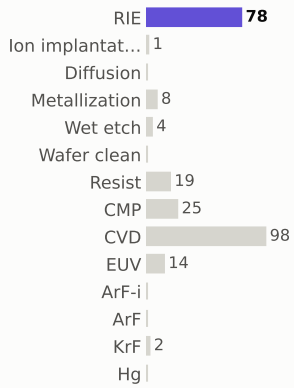

materials deposited (g)



gases emitted (g)



Step #2780: Resist

etch_strip · Resist

0.169	334.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

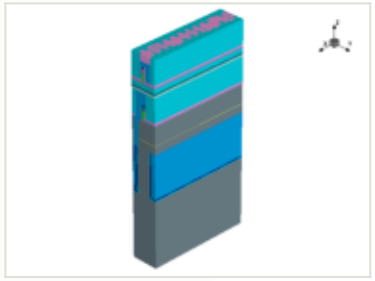

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

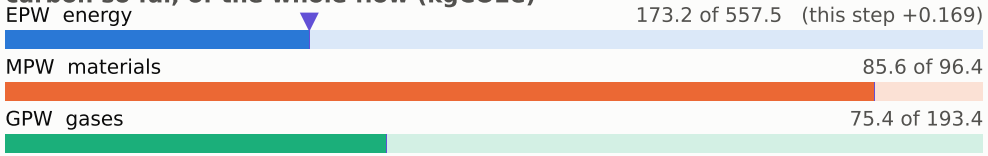

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

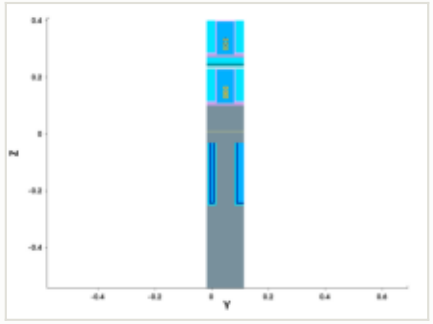

y cut at 0.049 µm

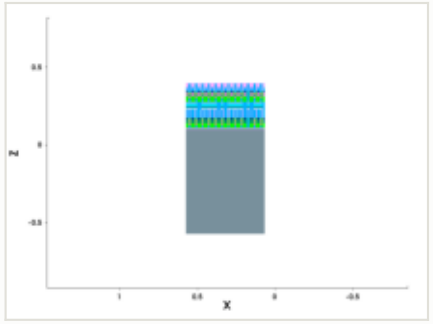

mask for this step

no mask for this step

steps by process area

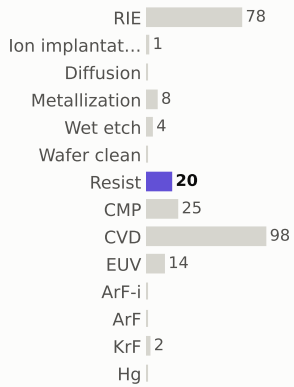

materials deposited (g)



gases emitted (g)

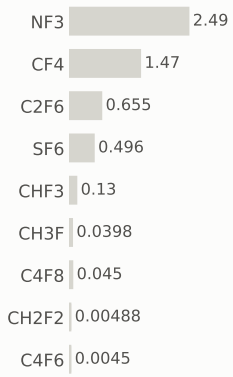

Step #2790: CVD

depo_fill · CVD

1.31	335.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

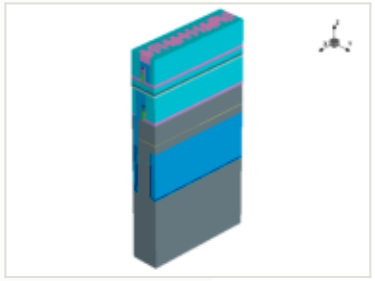

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

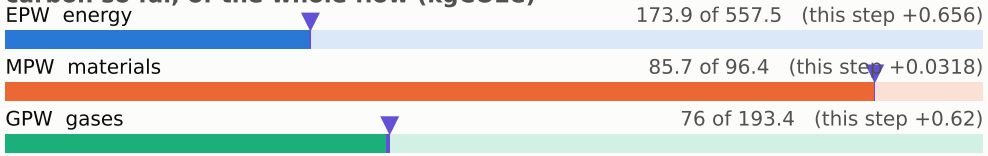

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

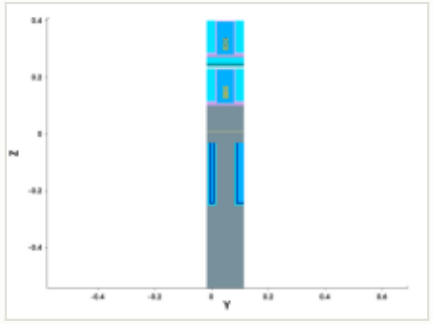

y cut at 0.049 µm

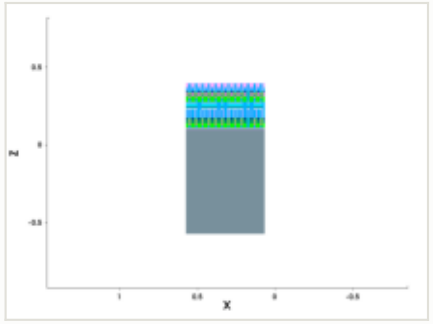

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

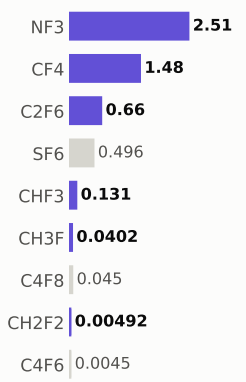

Step #2810: CVD

depo_fill · CVD

1.31	336.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

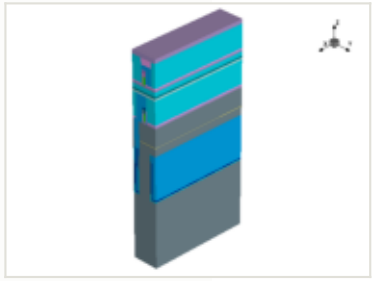

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

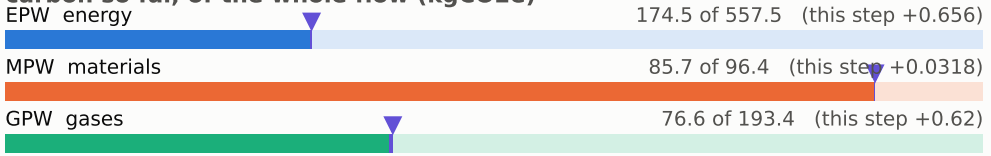

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

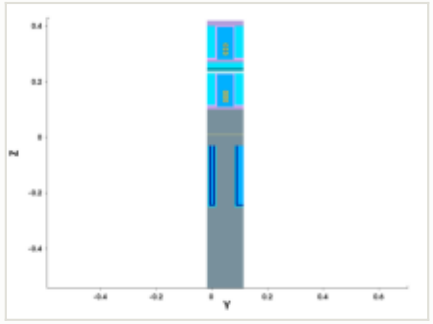

y cut at 0.049 µm

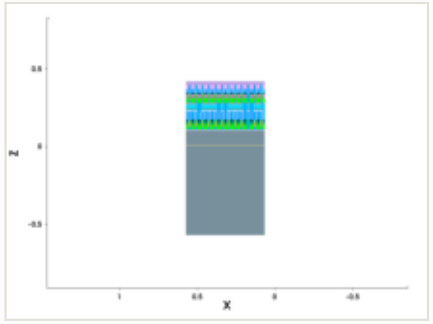

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

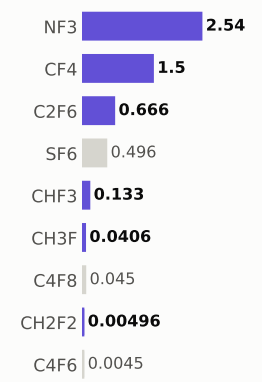

Step #2820: Diffusion

treatment · Diffusion

0.801	337.7	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

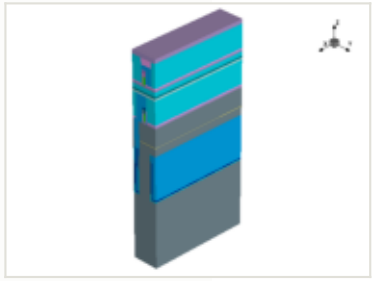

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

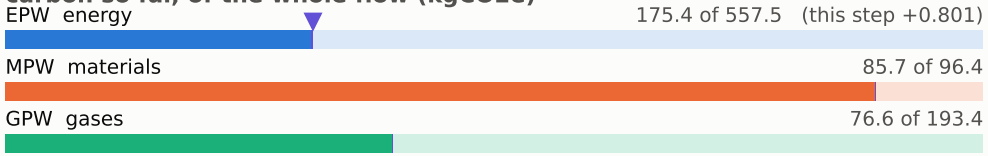

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

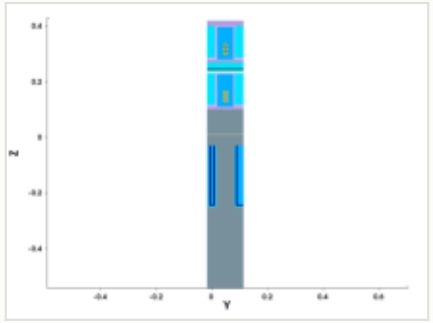

y cut at 0.049 µm

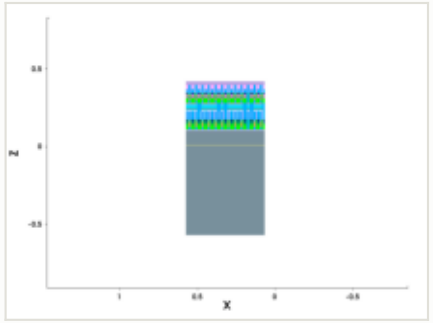

mask for this step

no mask for this step

steps by process area

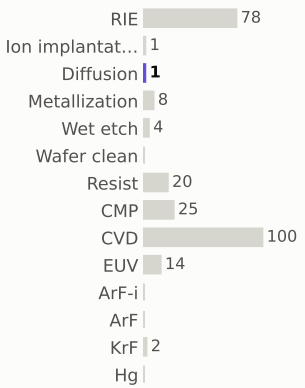

materials deposited (g)

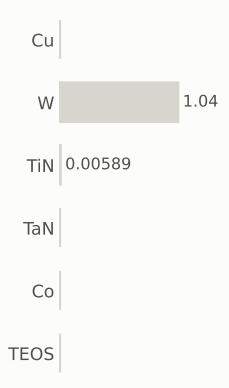

gases emitted (g)

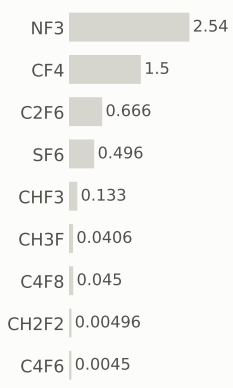

Step #2830: Wafer_clean

clean · Wafer_clean

0.169	337.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

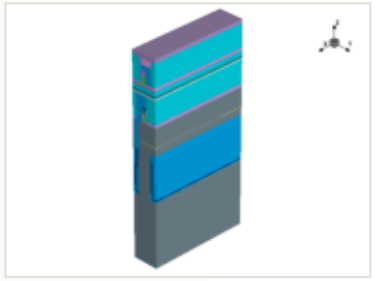

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

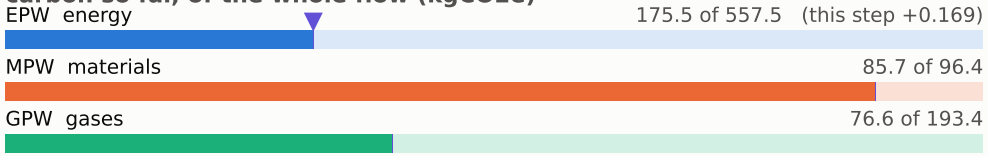

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

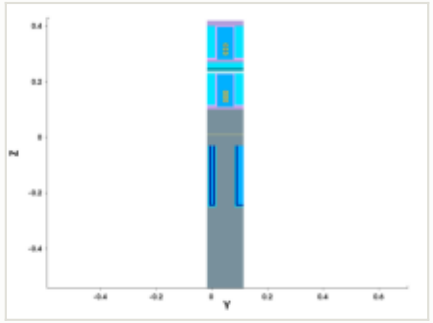

y cut at 0.049 µm

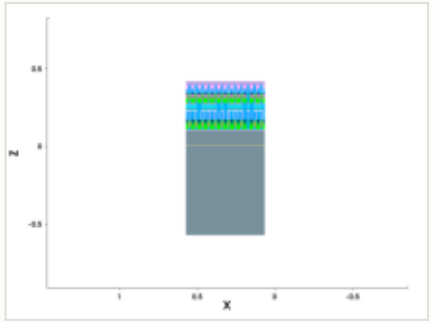

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

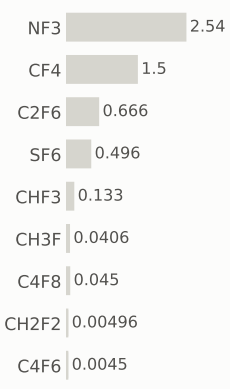

Step #2840: CVD

depo_fill · CVD

1.31	339.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

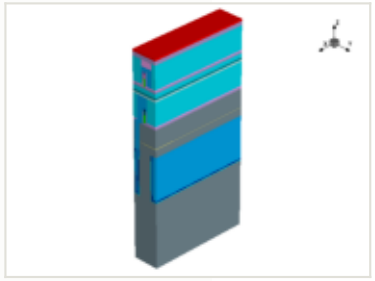

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

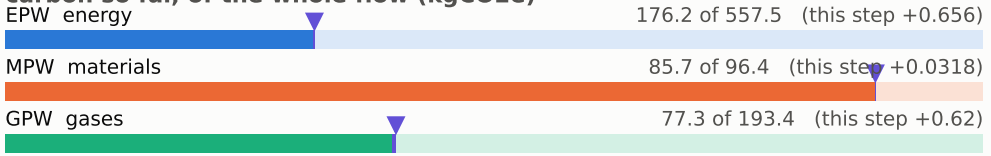

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

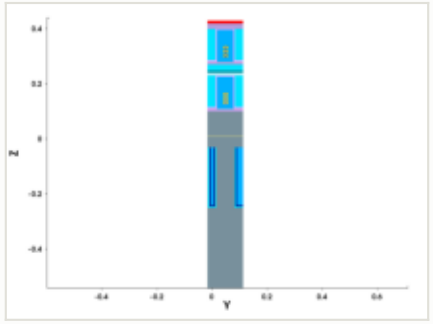

y cut at 0.049 µm

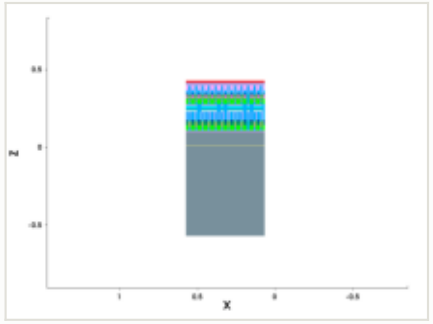

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

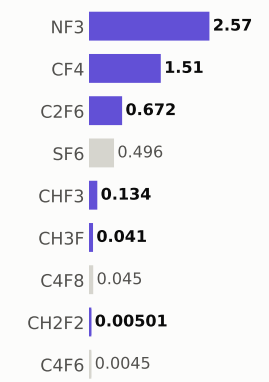

Step #2850: Resist

depo_fill · Resist

0.169	339.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

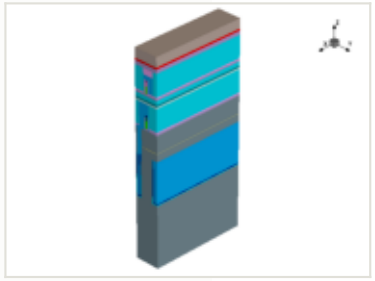

this step

process area	Resist
material	—
thickness	0.05 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

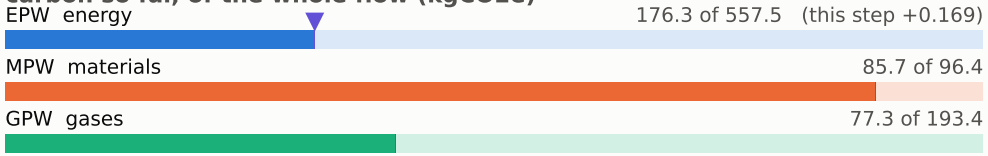

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

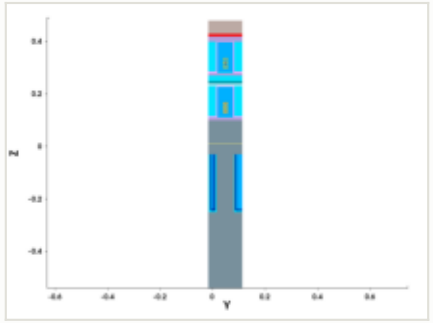

y cut at 0.049 µm

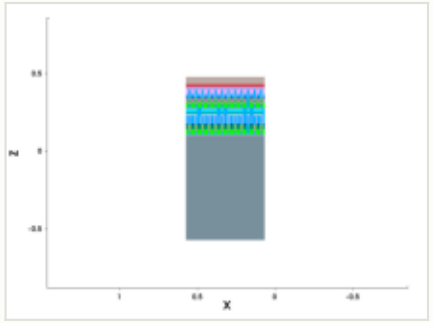

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

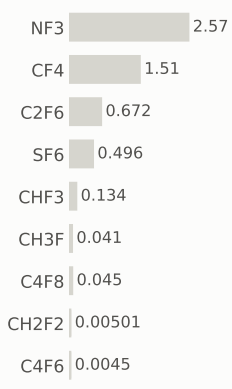

Step #2860: CVD

depo_fill · CVD

1.31	340.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

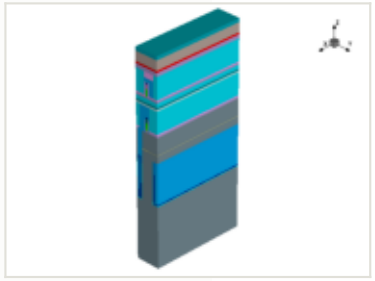

this step

process area	CVD
material	TEOS
thickness	0.02 µm
material GWP	2.85952 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

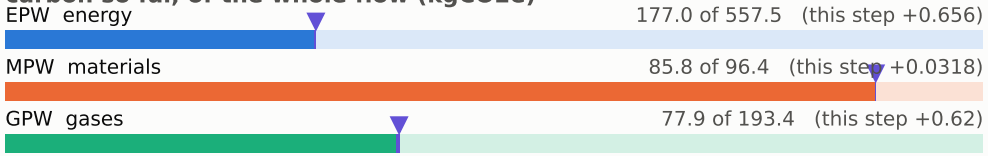

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

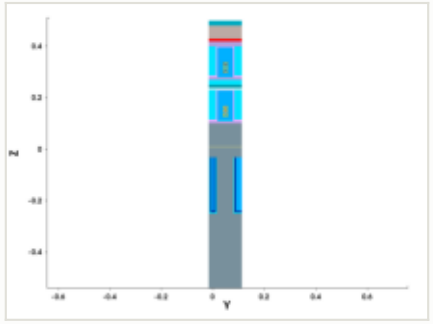

y cut at 0.049 µm

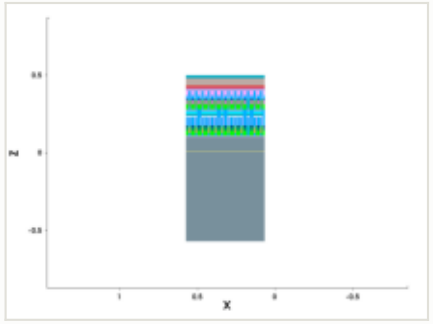

mask for this step

no mask for this step

steps by process area

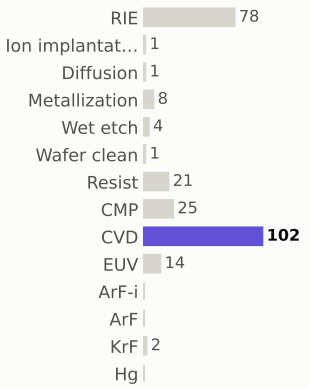

materials deposited (g)

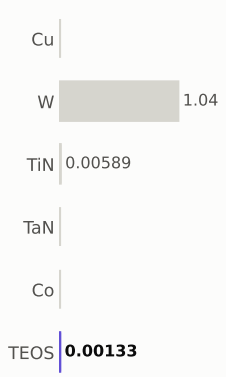

gases emitted (g)



Step #2870: CVD

depo_fill · CVD

1.31	342.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

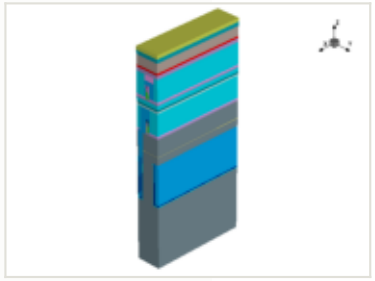

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

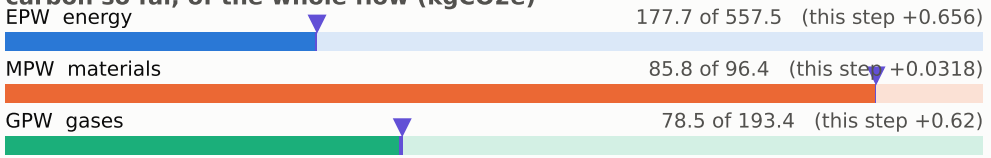

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

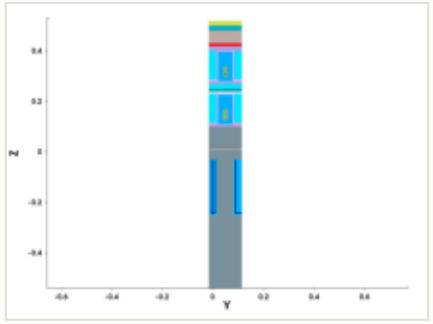

y cut at 0.049 µm

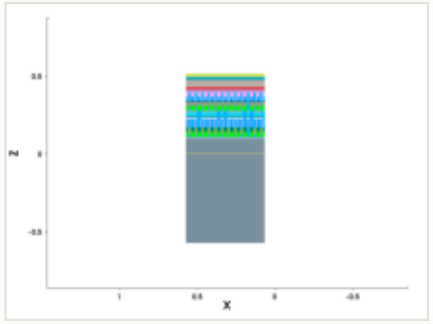

mask for this step

no mask for this step

steps by process area

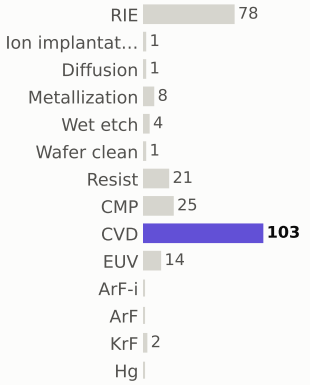

materials deposited (g)

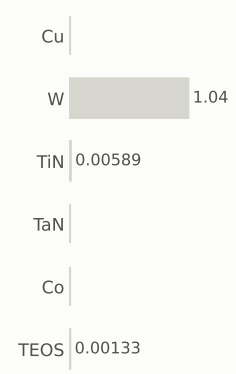

gases emitted (g)

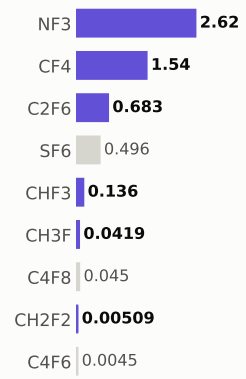

Step #2880: Resist

depo_fill · Resist

0.169	342.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

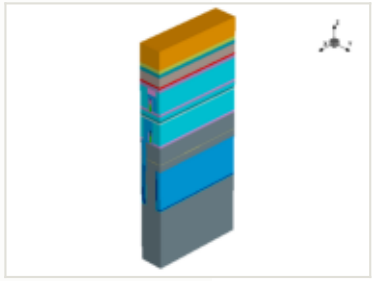

x cut at 0.385 µm

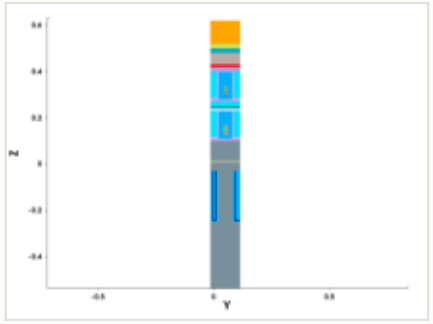

y cut at 0.049 µm

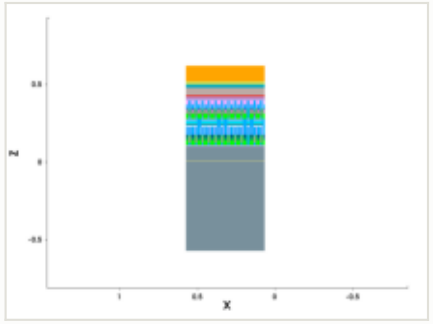

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

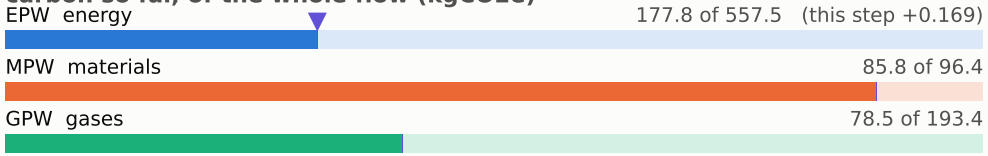

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

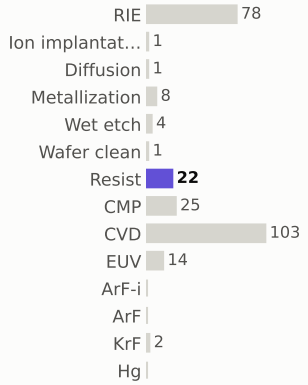

materials deposited (g)

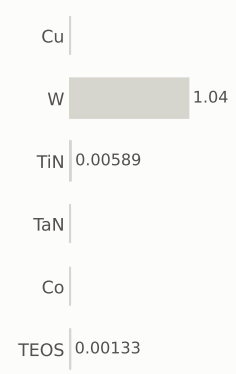

gases emitted (g)

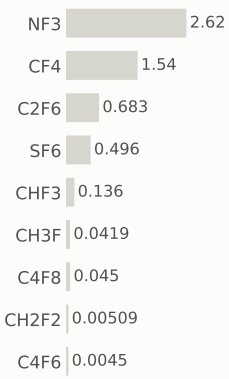

Step #2890: CVD

depo_fill · CVD

1.31	343.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

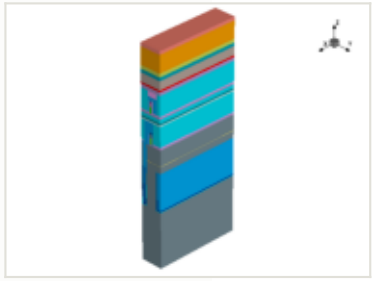

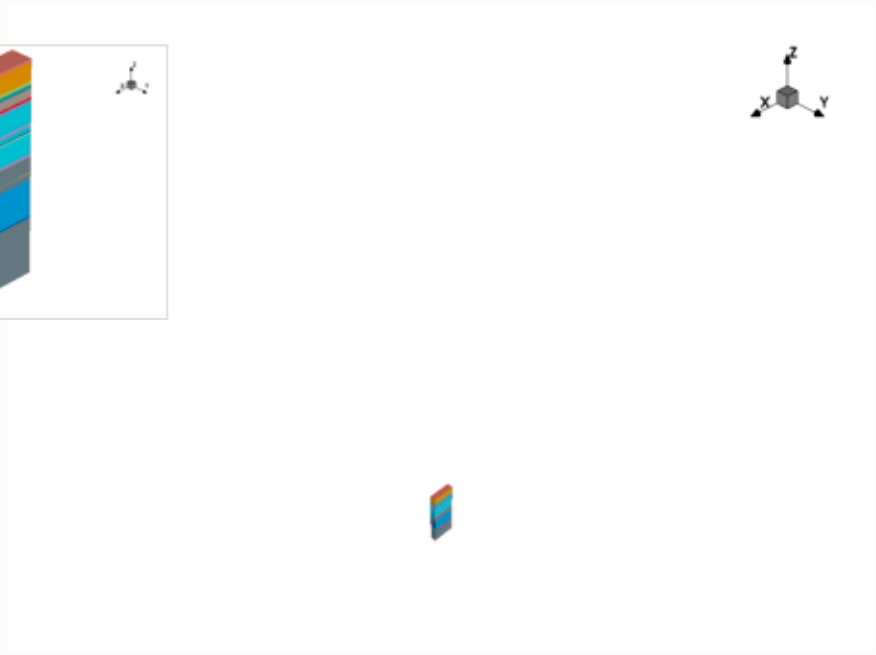

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

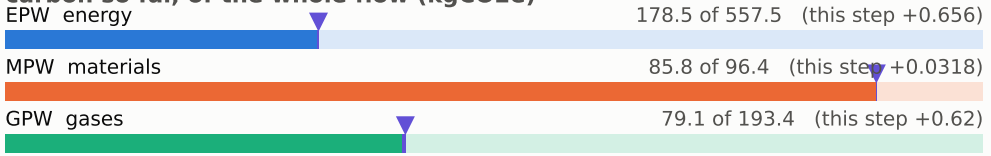

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

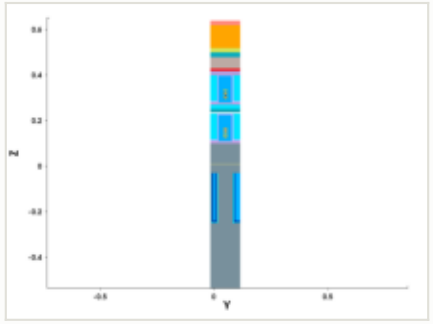

y cut at 0.049 µm

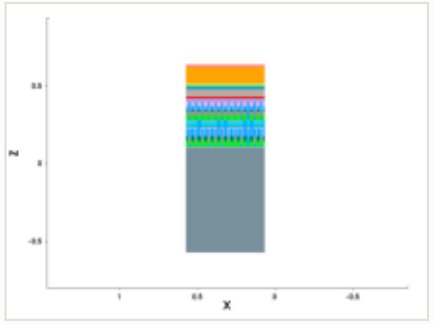

mask for this step

no mask for this step

steps by process area

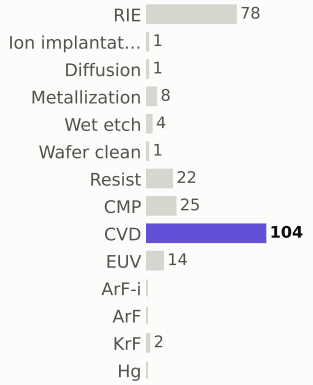

materials deposited (g)

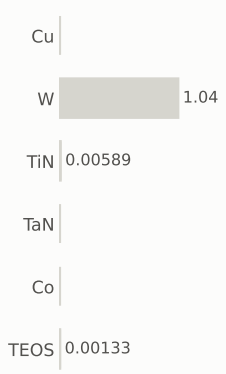

gases emitted (g)

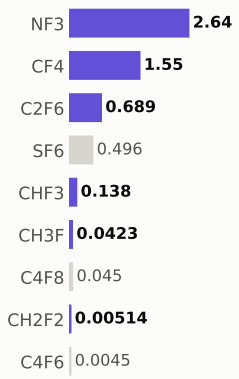

Step #2900: Wafer_clean

clean · Wafer_clean

0.169	343.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

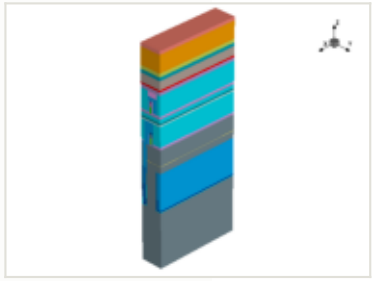

x cut at 0.385 µm

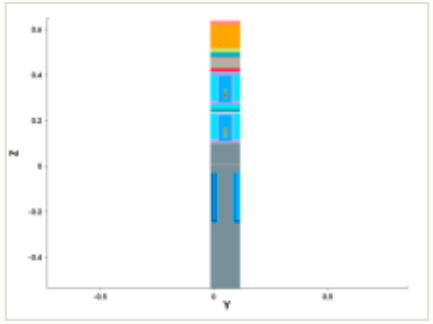

y cut at 0.049 µm

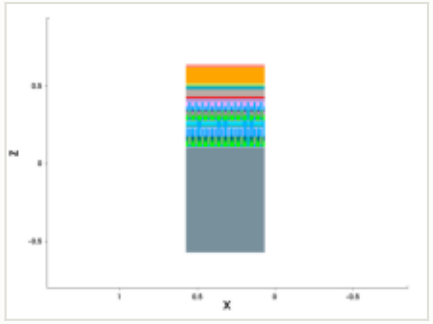

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

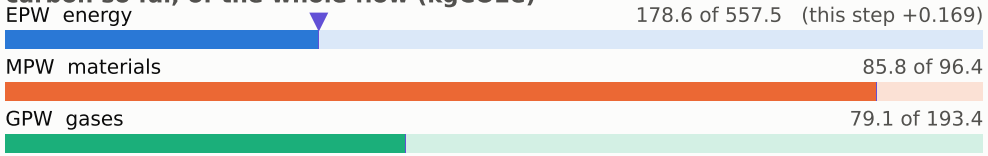

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

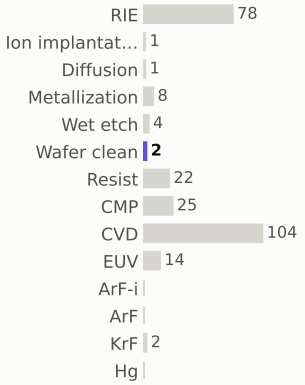

materials deposited (g)



gases emitted (g)

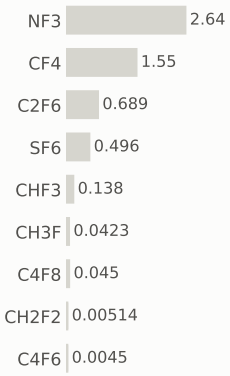

Step #2910: EUV

litho_patterning · EUV

1.96	345.6	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

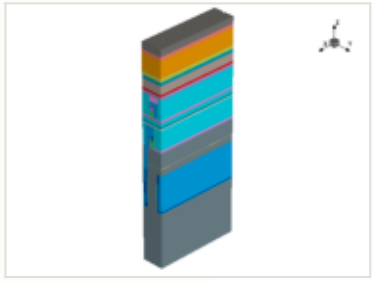

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

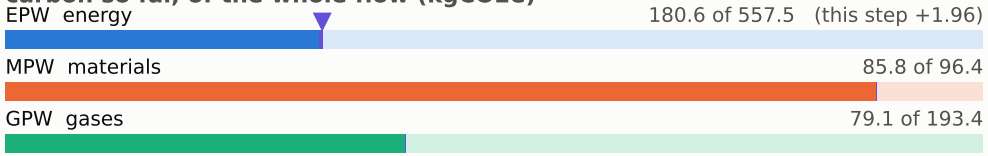

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

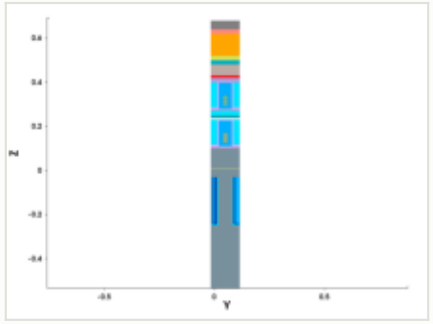

y cut at 0.049 µm

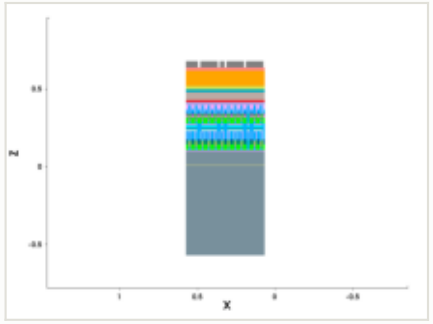

mask: layer 11:2 (GDSII)

steps by process area

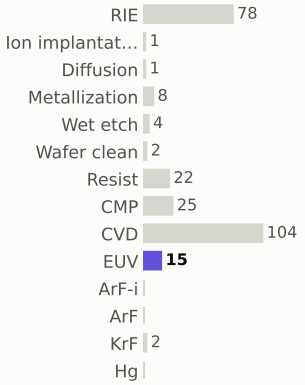

materials deposited (g)



gases emitted (g)

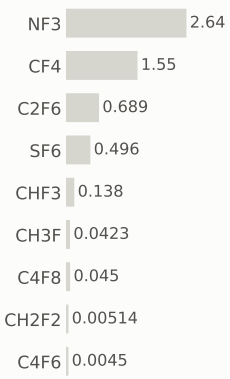

Step #2920: RIE

etch_anisotropic · RIE

1.04	346.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

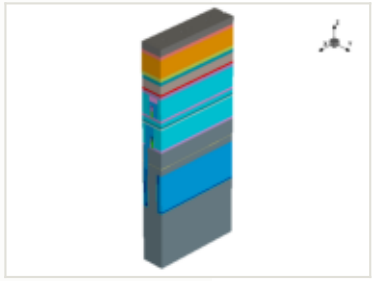

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

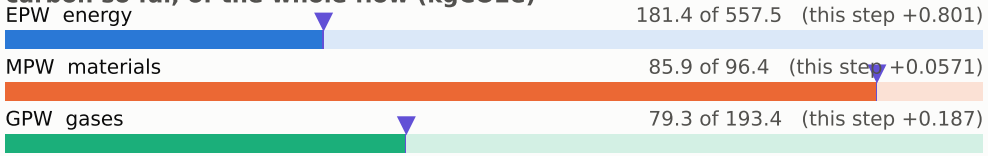

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

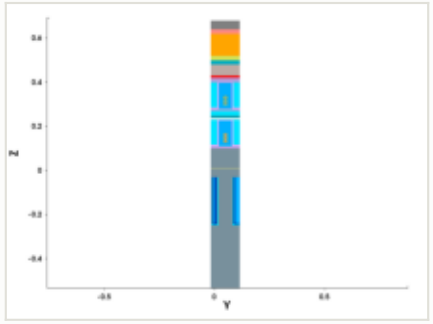

y cut at 0.049 µm

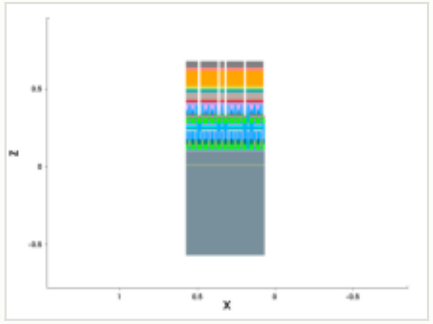

mask for this step

no mask for this step

steps by process area

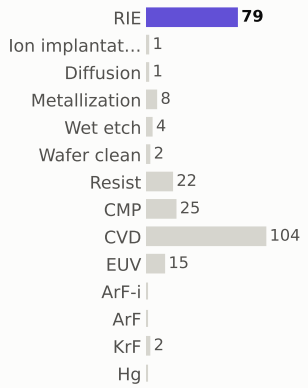

materials deposited (g)



gases emitted (g)



Step #2930: Wafer_clean

etch_strip · Wafer_clean

0.169	346.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

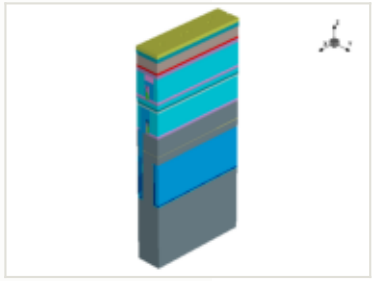

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

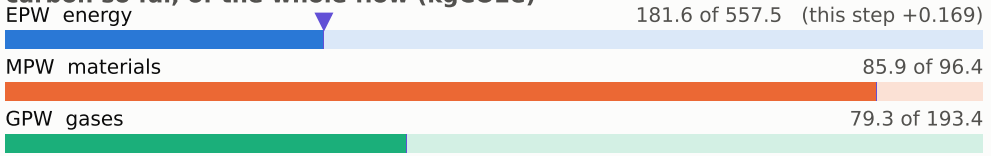

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

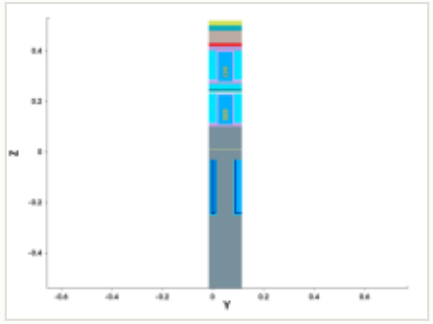

y cut at 0.049 µm

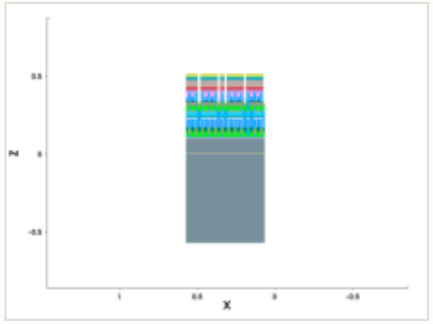

mask for this step

no mask for this step

steps by process area

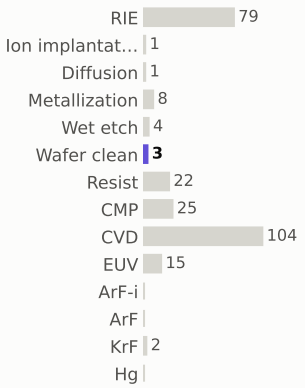

materials deposited (g)

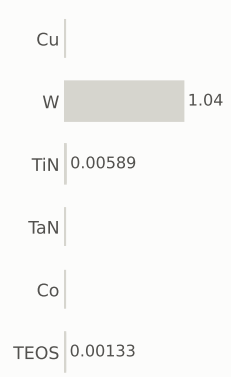

gases emitted (g)

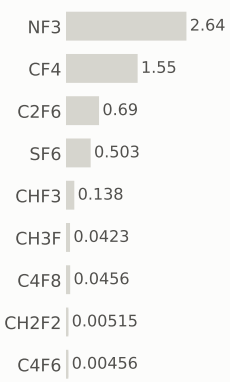

Step #2940: Resist

depo_fill · Resist

0.169	346.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

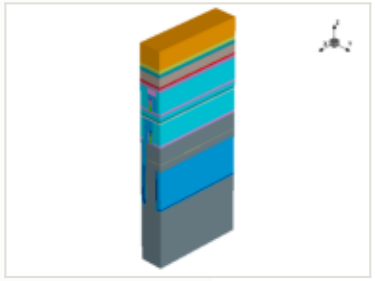

x cut at 0.385 µm

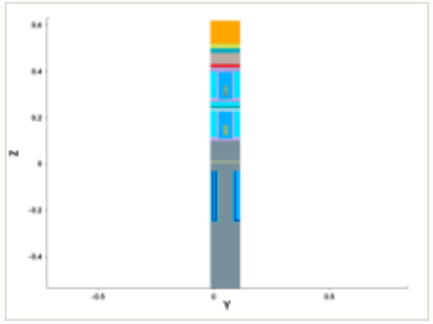

y cut at 0.049 µm

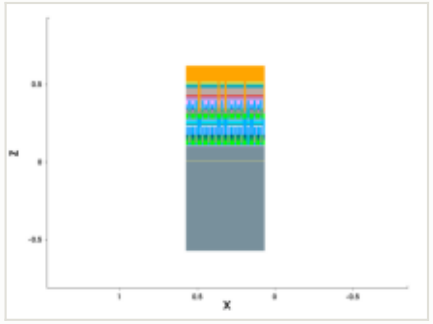

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

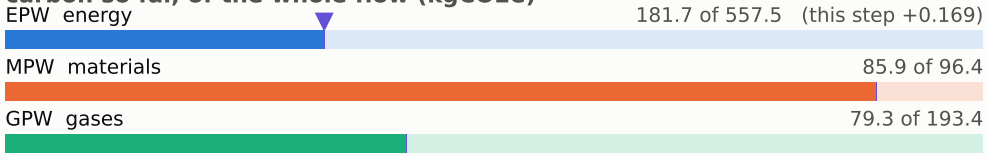

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

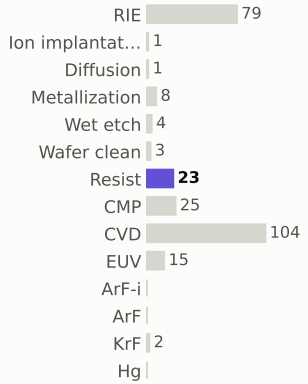

materials deposited (g)

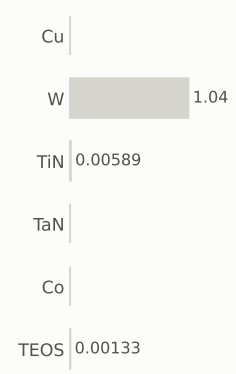

gases emitted (g)

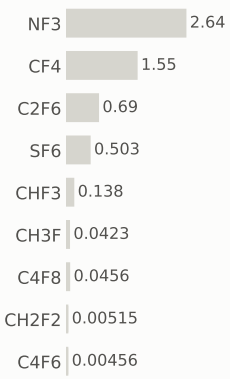

Step #2950: CVD

depo_fill · CVD

1.31	348.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

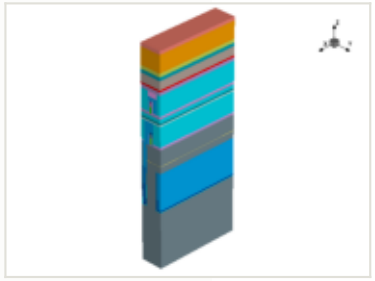

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

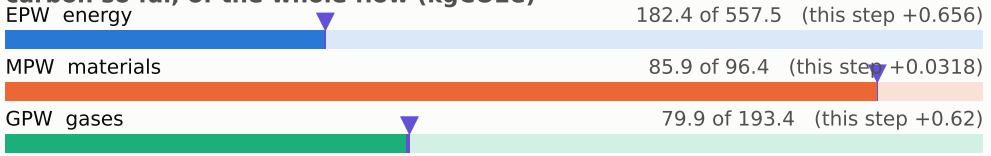

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

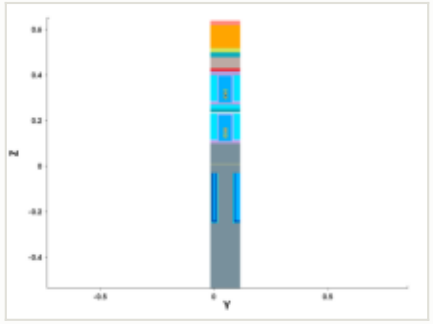

y cut at 0.049 µm

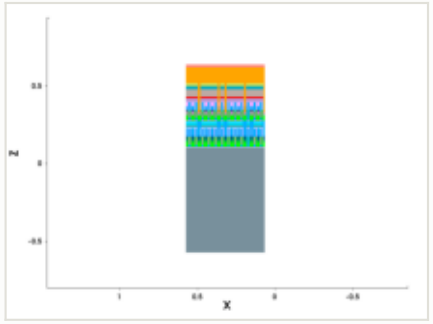

mask for this step

no mask for this step

steps by process area

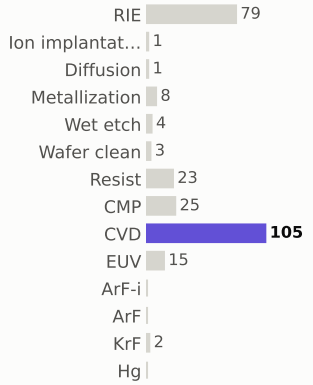

materials deposited (g)

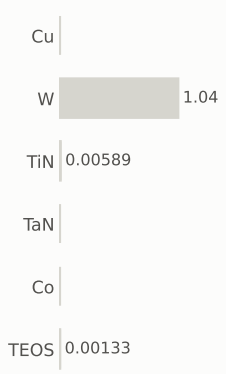

gases emitted (g)

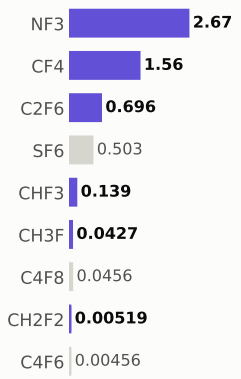

Step #2960: Wafer_clean

clean · Wafer_clean

0.169	348.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

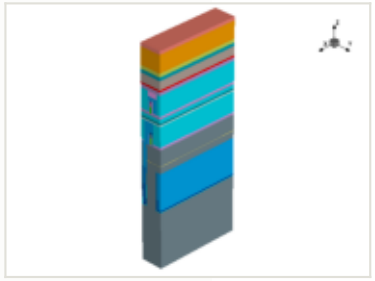

x cut at 0.385 µm

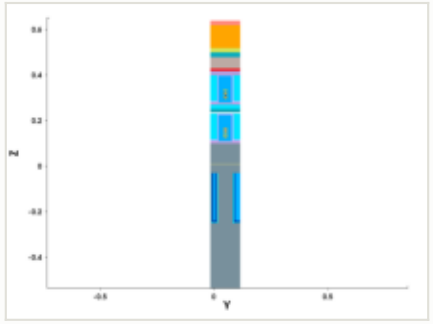

y cut at 0.049 µm

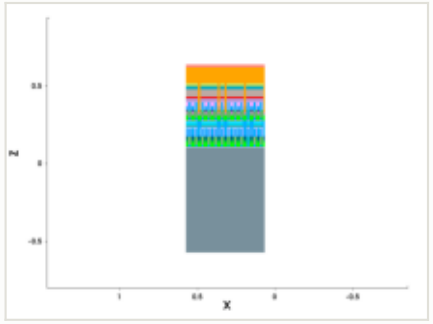

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

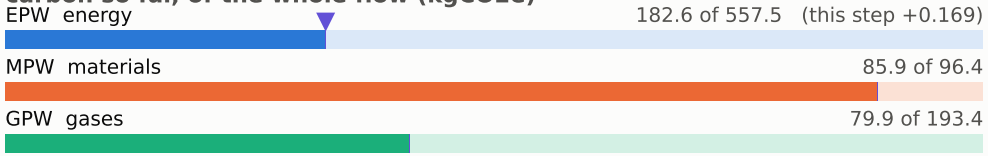

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

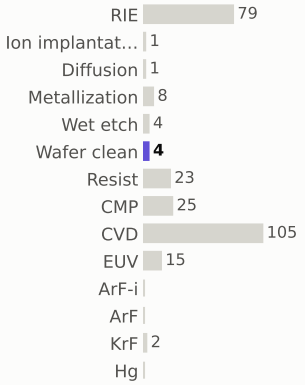

materials deposited (g)

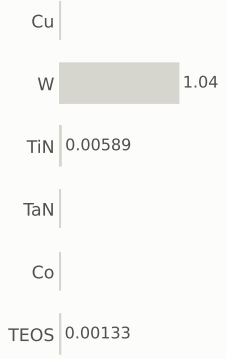

gases emitted (g)

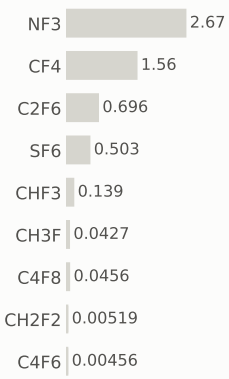

Step #2970: EUV

litho_patterning · EUV

1.96	350.4	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

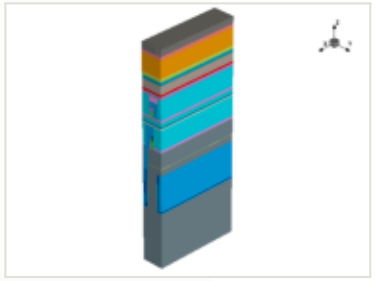

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

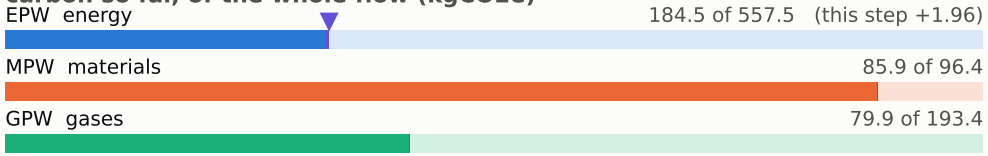

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

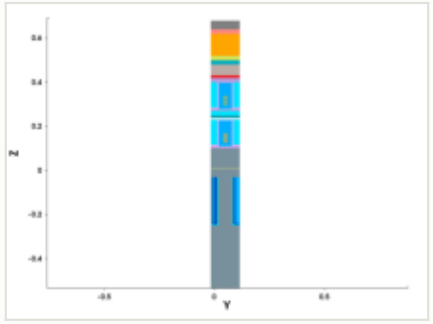

y cut at 0.049 µm

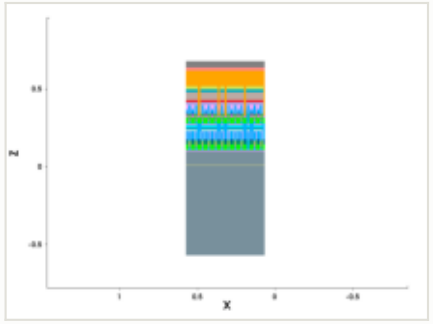

mask: layer 9:2 (GDSII)

steps by process area

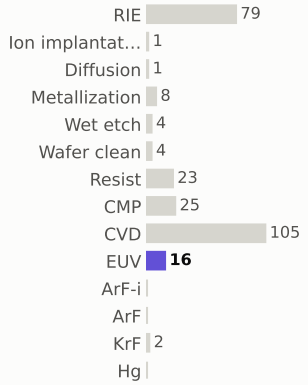

materials deposited (g)

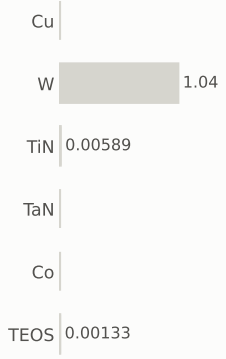

gases emitted (g)

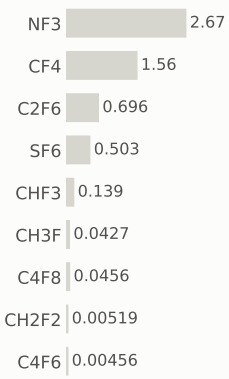

Step #2980: RIE

etch_anisotropic · RIE

1.04	351.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

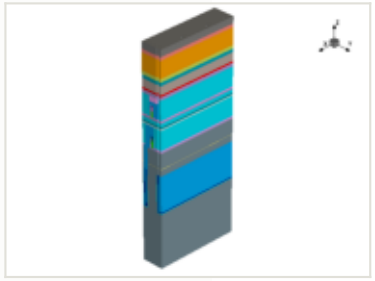

x cut at 0.385 µm

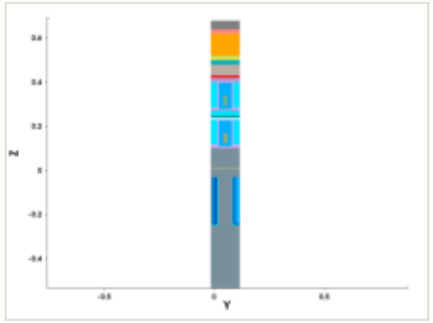

y cut at 0.049 µm

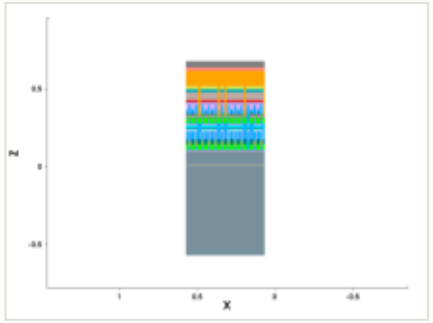

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

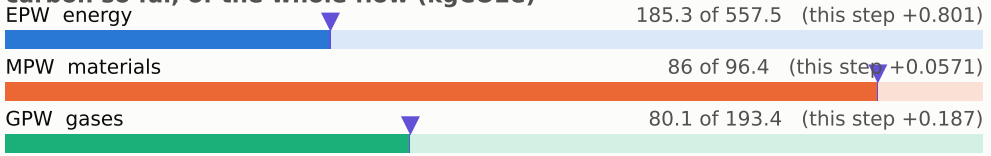

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

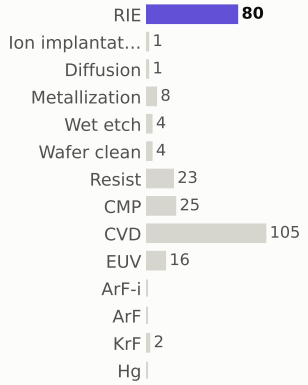

materials deposited (g)

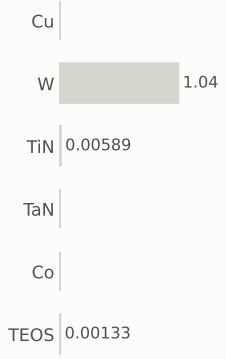

gases emitted (g)

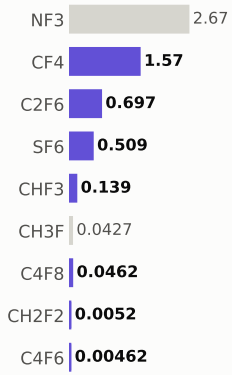

Step #2990: Wafer_clean

etch_strip · Wafer_clean

0.169	351.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

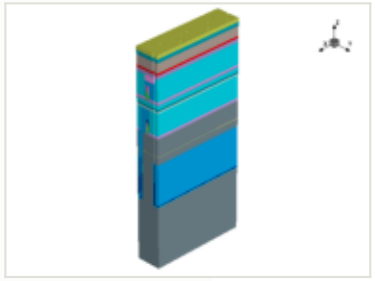

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

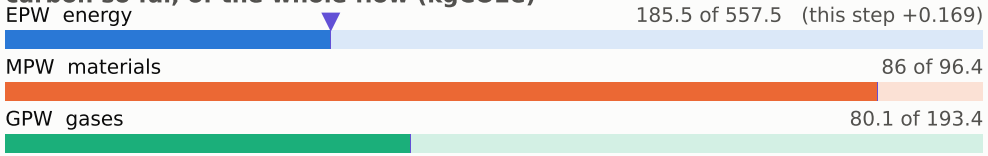

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

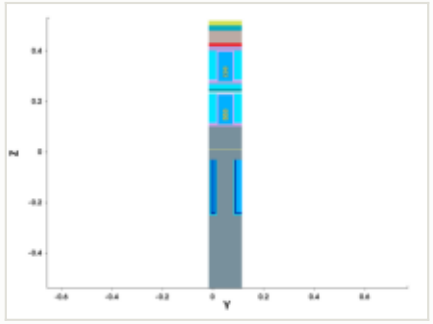

y cut at 0.049 µm

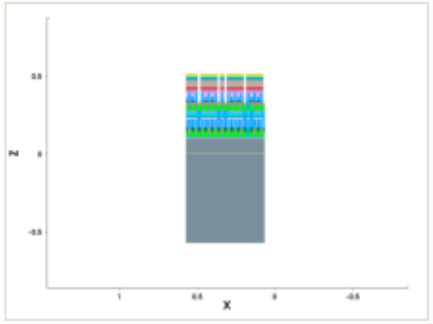

mask for this step

no mask for this step

steps by process area

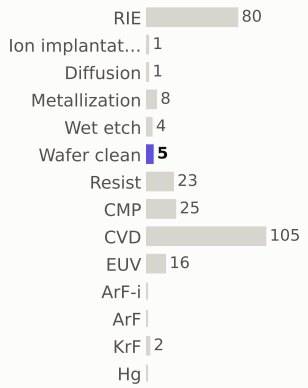

materials deposited (g)

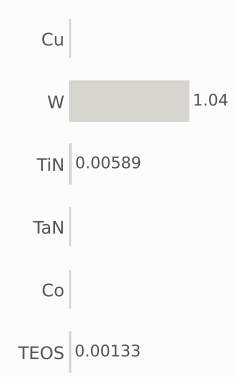

gases emitted (g)

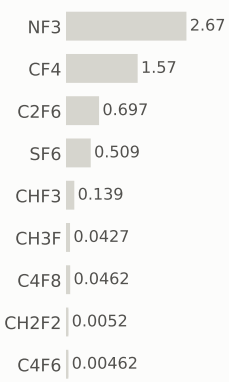

Step #3000: RIE

etch_noop · RIE

1.04	352.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

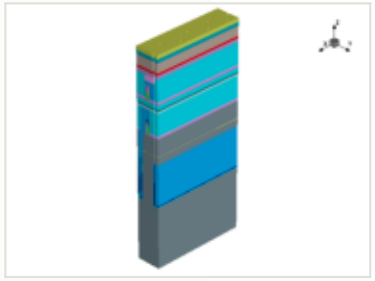

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

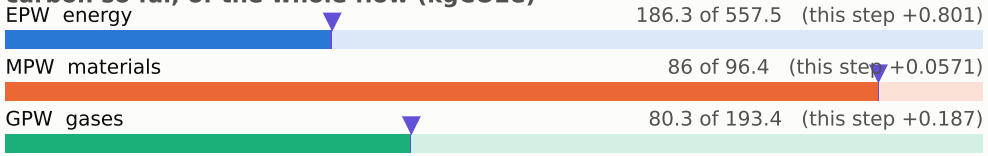

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

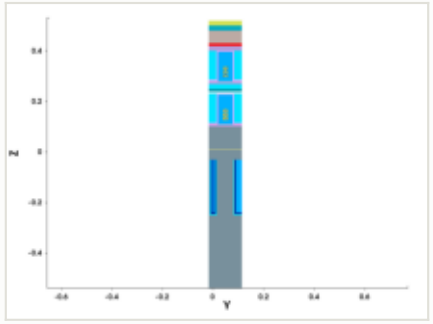

y cut at 0.049 µm

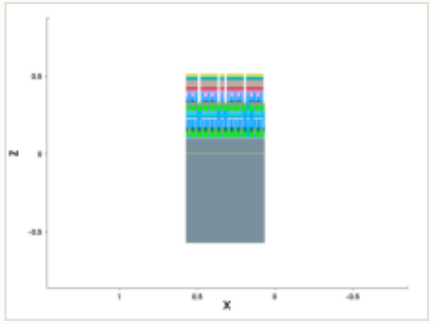

mask for this step

no mask for this step

steps by process area

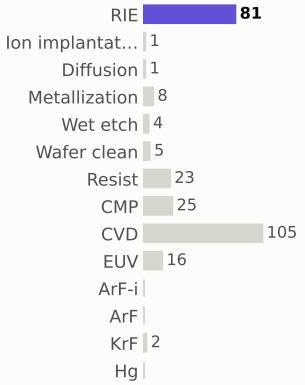

materials deposited (g)

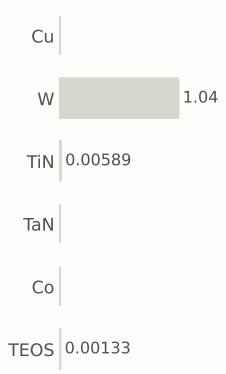

gases emitted (g)

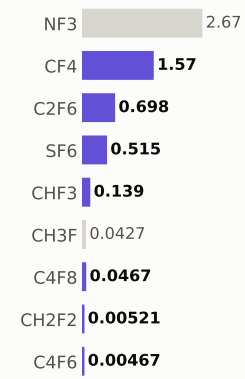

Step #3010: Wafer_clean

clean · Wafer_clean

0.169	352.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

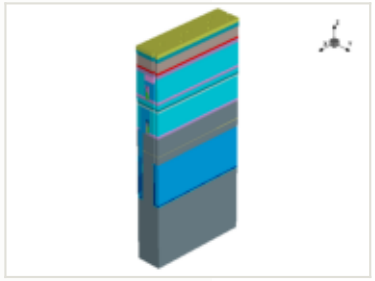

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

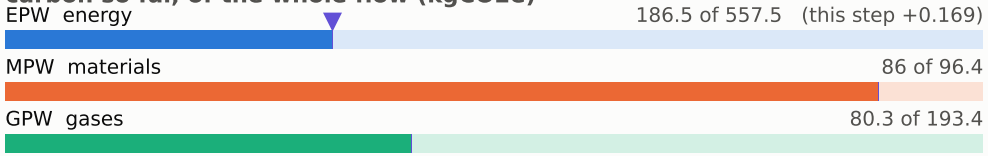

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

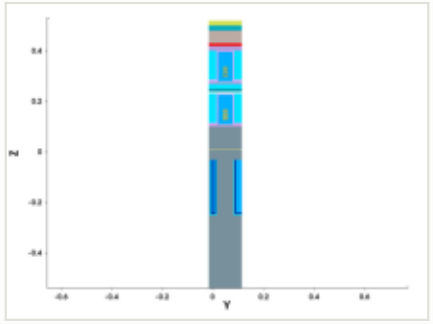

y cut at 0.049 µm

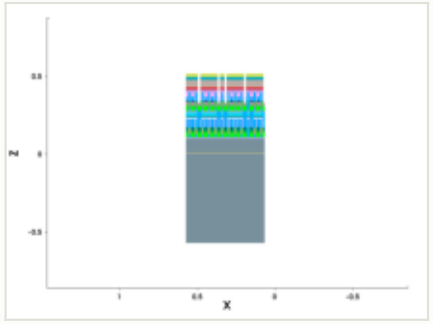

mask for this step

no mask for this step

steps by process area

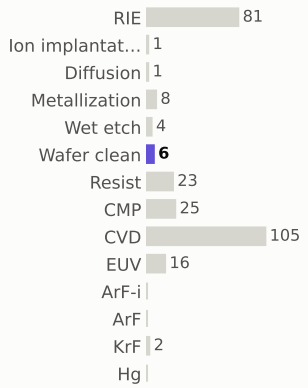

materials deposited (g)

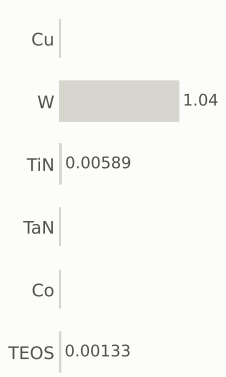

gases emitted (g)

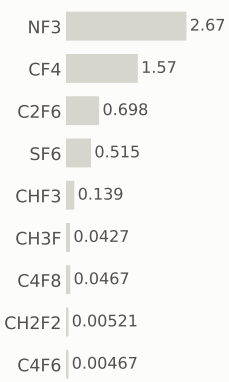

Step #3020: Metallization

depo_fill · Metallization

1.21	354.0	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

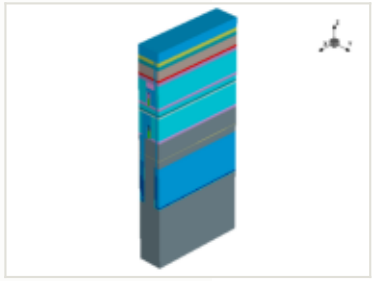

this step

process area	Metallization	EPW	1.2 kgCO2e
material	W	EPW tool	0.86 kgCO2e
thickness	0.05 µm	EPW overhead	0.344 kgCO2e
material GWP	75.8149 gCO2e/g	MPW	0.00517 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

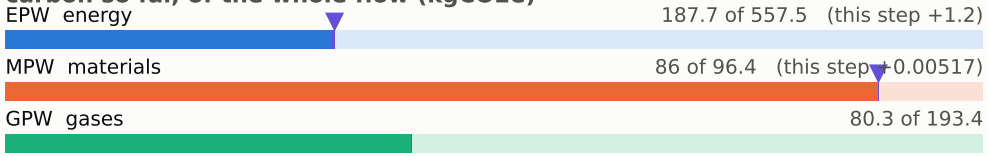

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

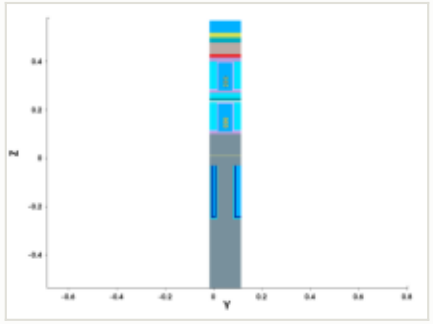

y cut at 0.049 µm

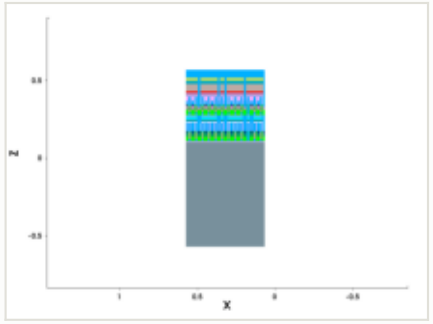

mask for this step

no mask for this step

steps by process area

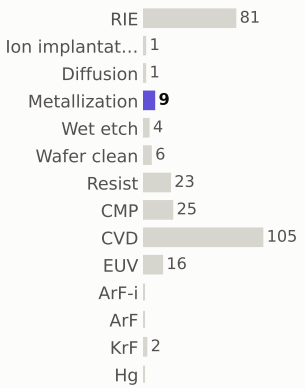

materials deposited (g)



gases emitted (g)

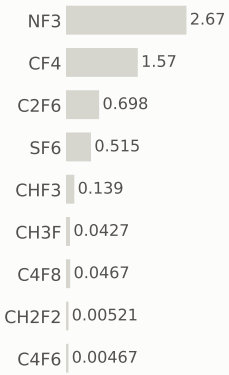

Step #3030: CMP

etch_cmp · CMP

0.169	354.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

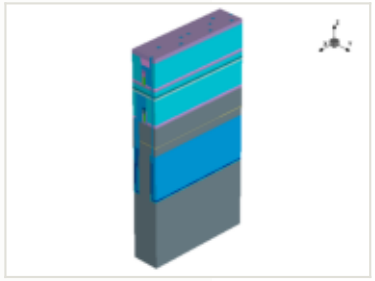

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

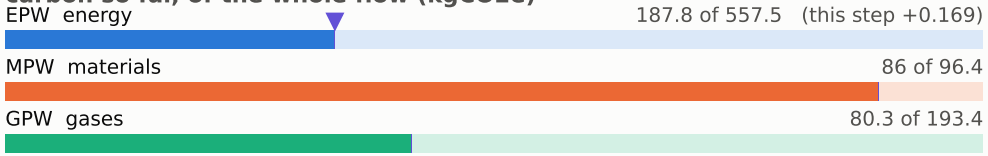

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

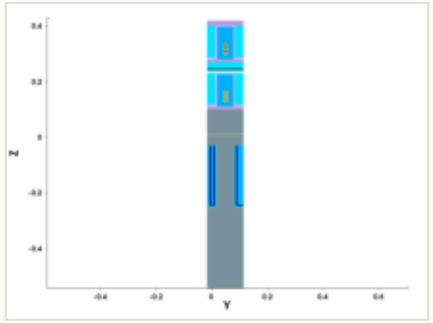

y cut at 0.049 µm

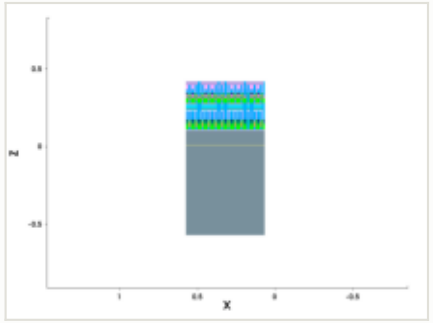

mask for this step

no mask for this step

steps by process area

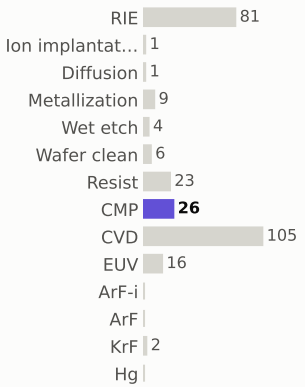

materials deposited (g)

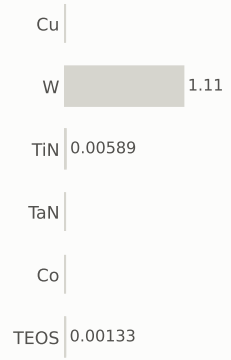

gases emitted (g)

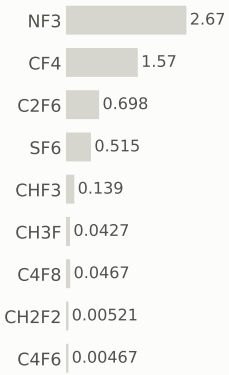

Step #3050: CVD

depo_fill · CVD

1.31	355.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

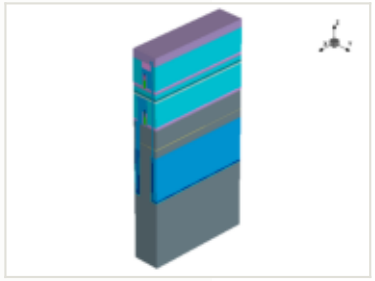

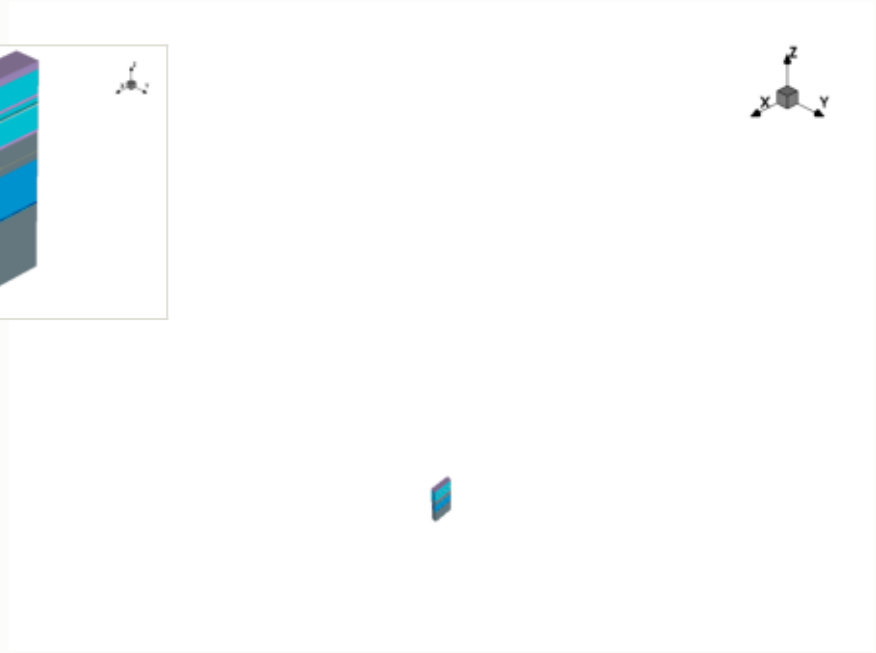

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

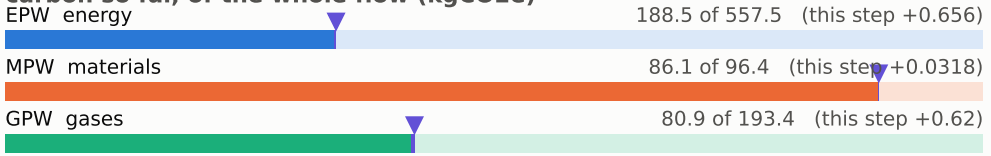

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

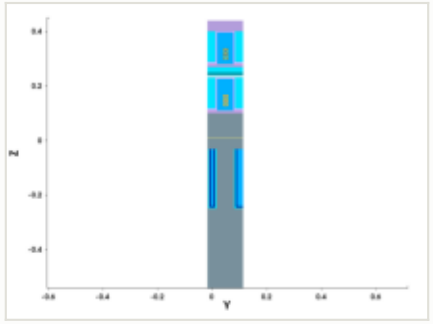

y cut at 0.049 µm

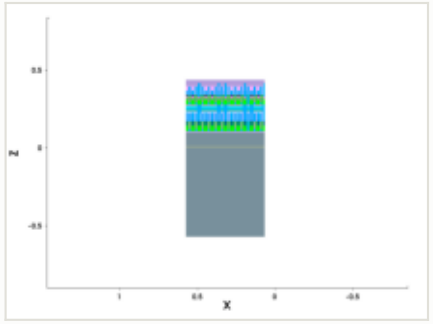

mask for this step

no mask for this step

steps by process area

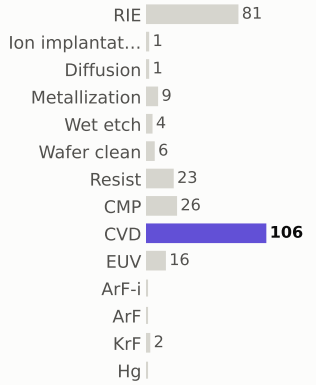

materials deposited (g)

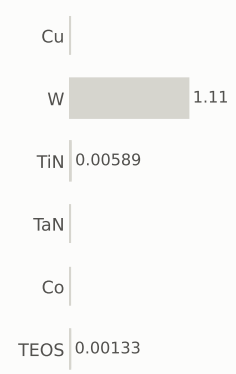

gases emitted (g)

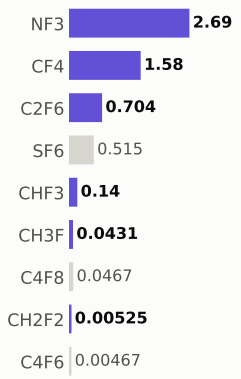

Step #3060: Diffusion

treatment · Diffusion

0.801	356.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

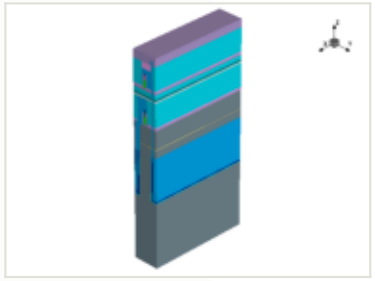

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

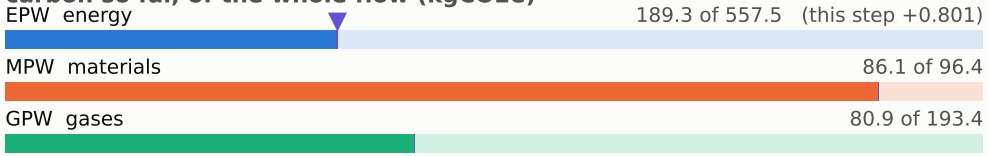

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

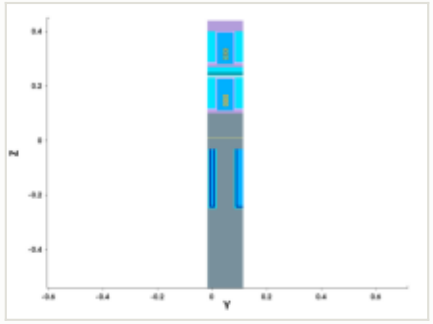

y cut at 0.049 µm

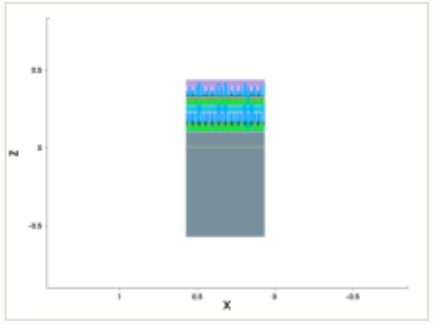

mask for this step

no mask for this step

steps by process area

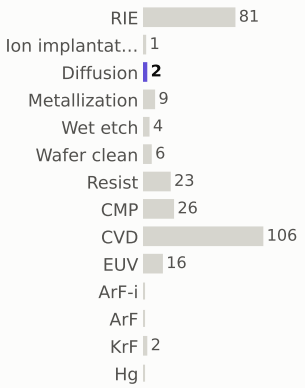

materials deposited (g)



gases emitted (g)

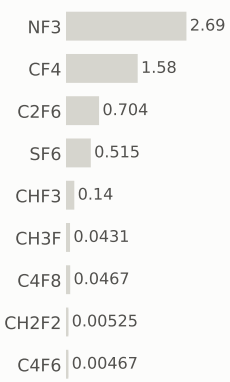

Step #3070: Wafer_clean

clean · Wafer_clean

0.169	356.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

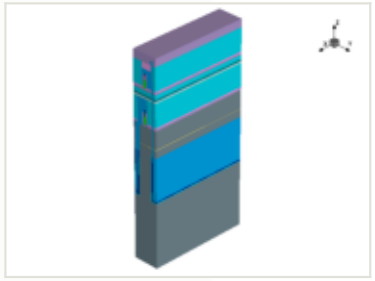

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

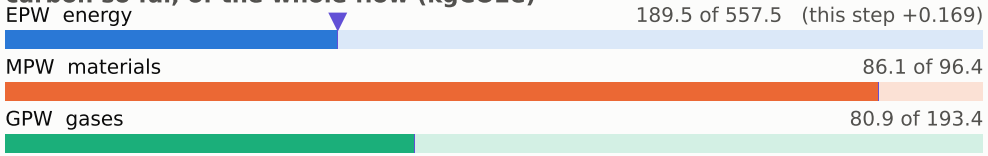

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

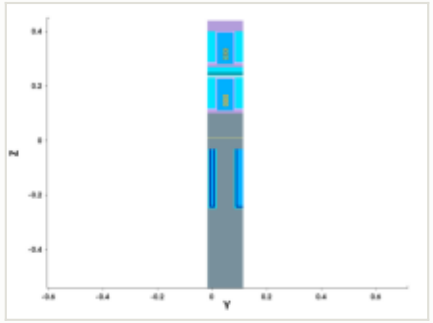

y cut at 0.049 µm

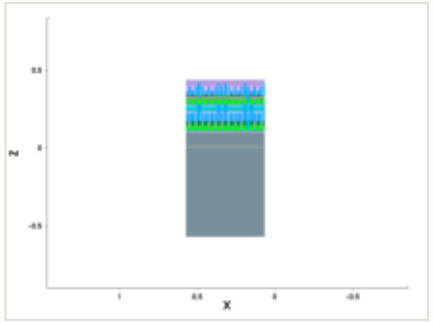

mask for this step

no mask for this step

steps by process area

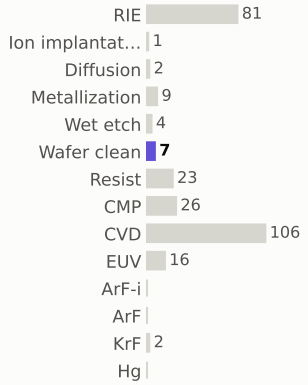

materials deposited (g)

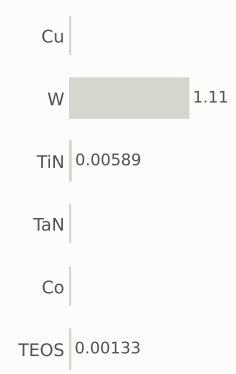

gases emitted (g)

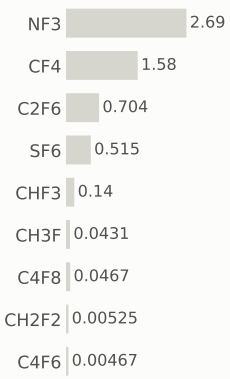

Step #3080: CVD

depo_fill · CVD

1.31	357.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

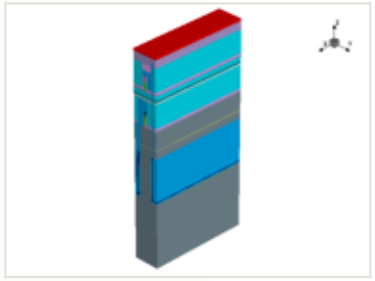

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

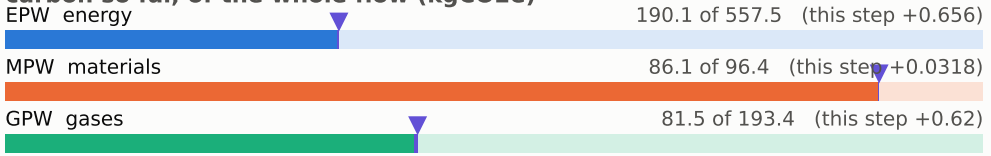

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

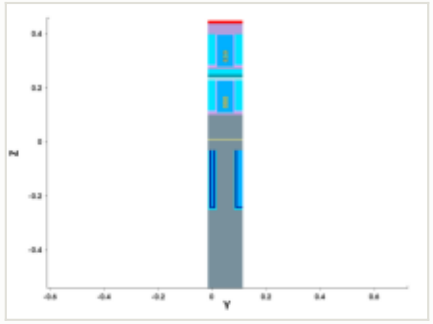

y cut at 0.049 µm

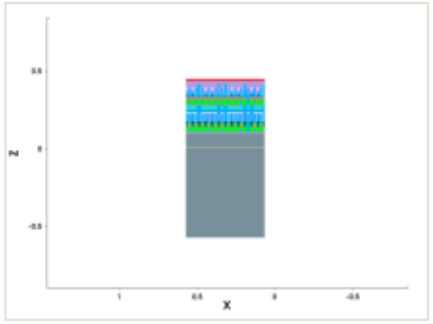

mask for this step

no mask for this step

steps by process area

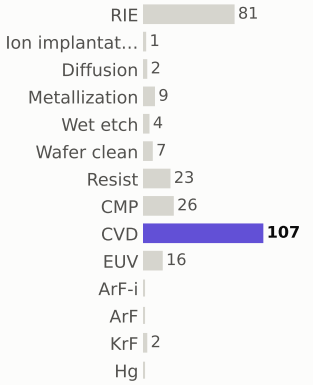

materials deposited (g)

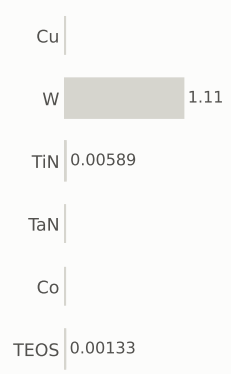

gases emitted (g)

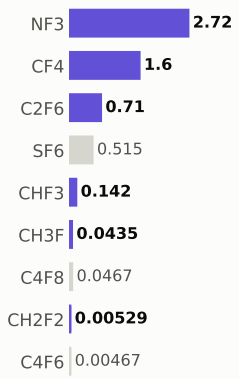

Step #3090: Resist

depo_fill · Resist

0.169	357.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

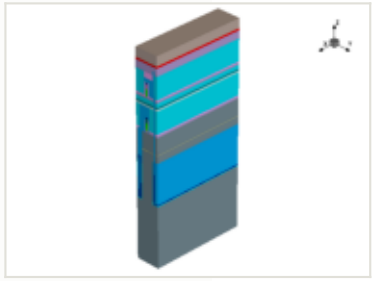

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.05 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

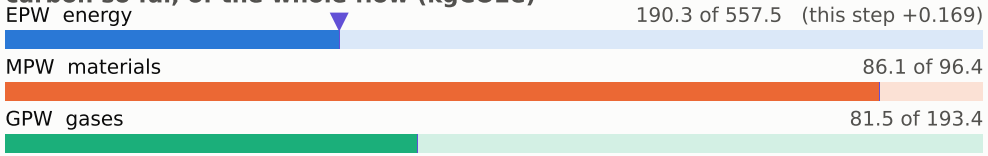

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

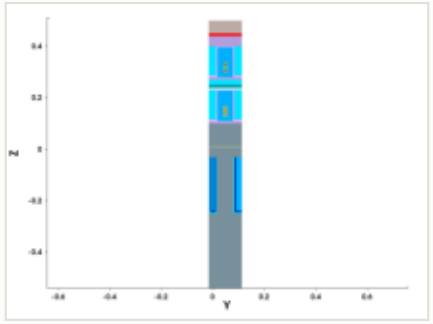

y cut at 0.049 µm

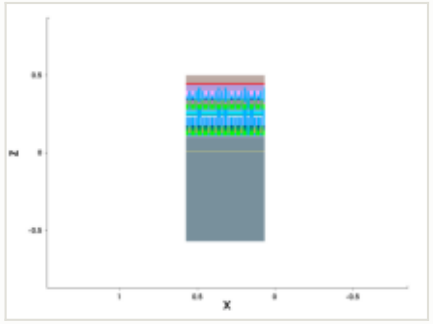

mask for this step

no mask for this step

steps by process area

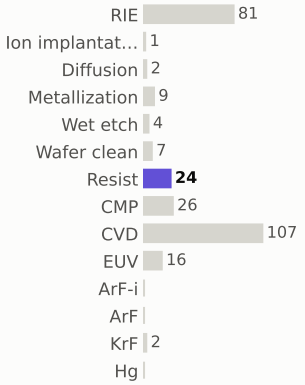

materials deposited (g)

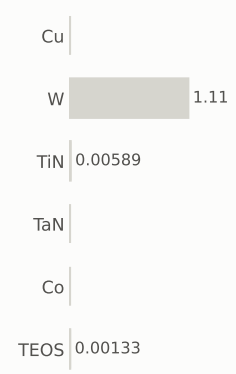

gases emitted (g)

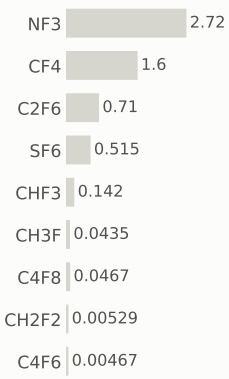

Step #3100: CVD

depo_fill · CVD

1.31	359.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

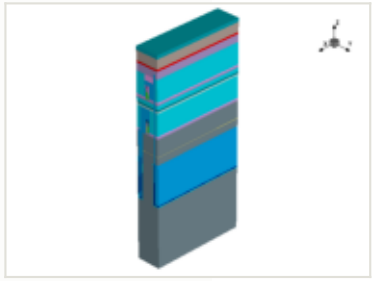

this step

process area	CVD
material	TEOS
thickness	0.02 µm
material GWP	2.85952 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

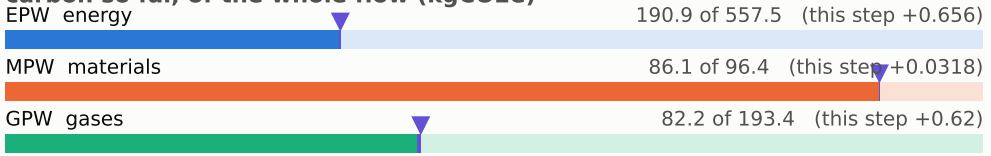

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

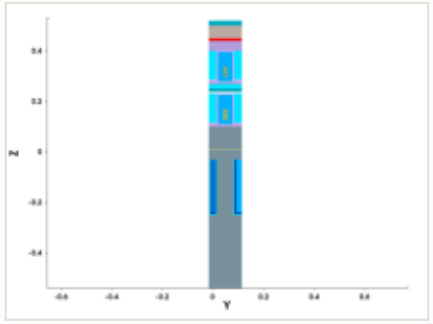

y cut at 0.049 µm

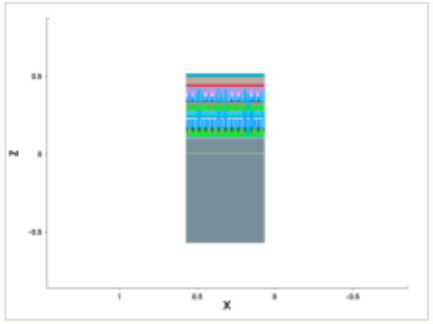

mask for this step

no mask for this step

steps by process area

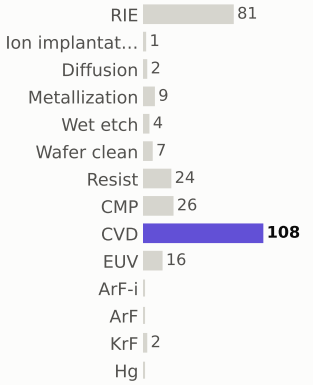

materials deposited (g)

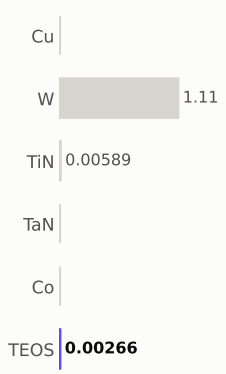

gases emitted (g)

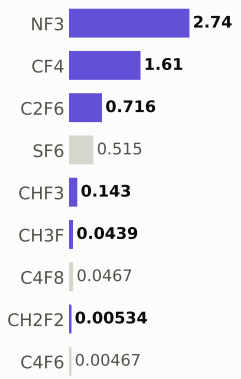

Step #3110: CVD

depo_fill · CVD

1.31	360.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

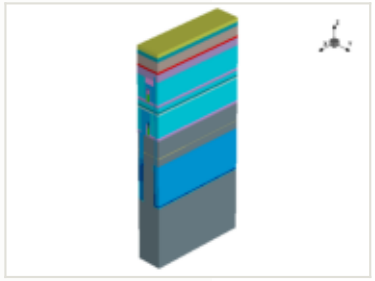

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

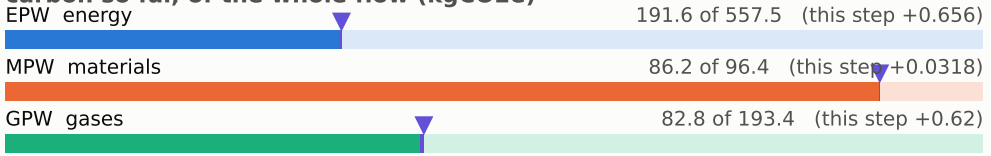

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

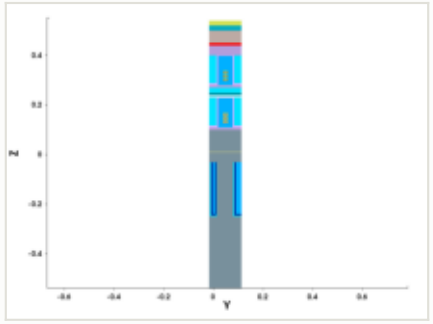

y cut at 0.049 µm

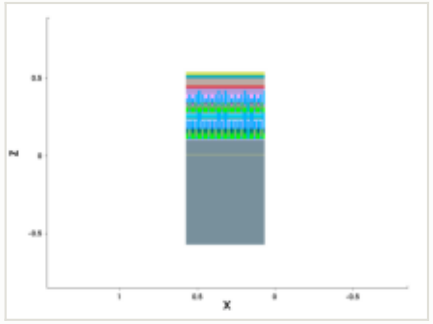

mask for this step

no mask for this step

steps by process area

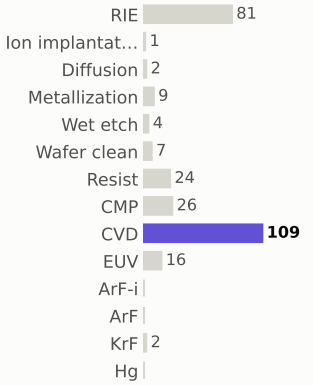

materials deposited (g)

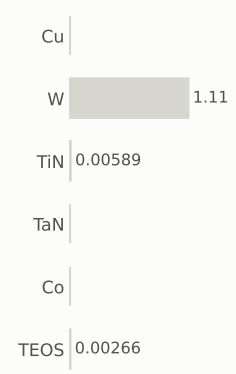

gases emitted (g)



Step #3120: Resist

depo_fill · Resist

0.169	360.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

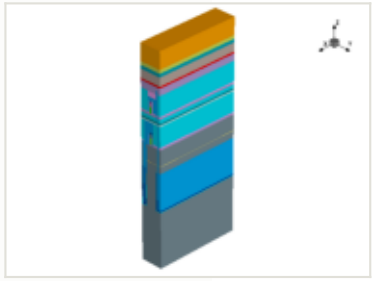

x cut at 0.385 µm

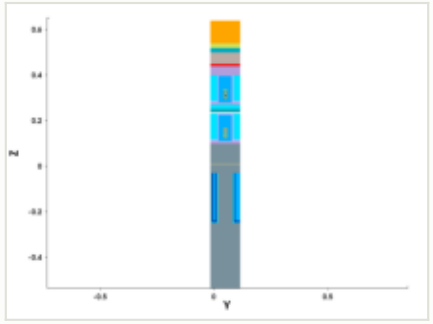

y cut at 0.049 µm

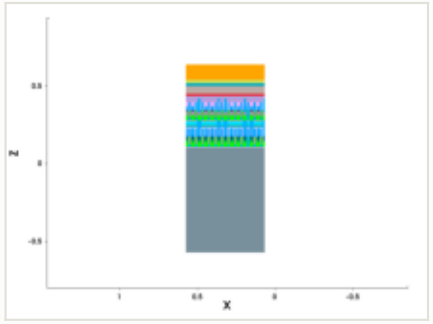

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

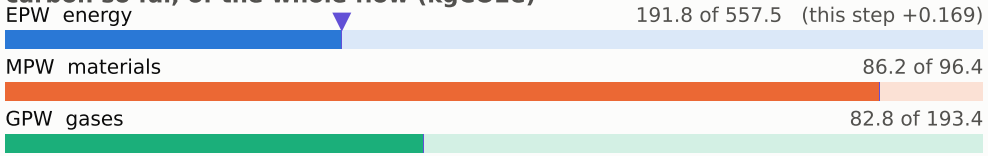

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

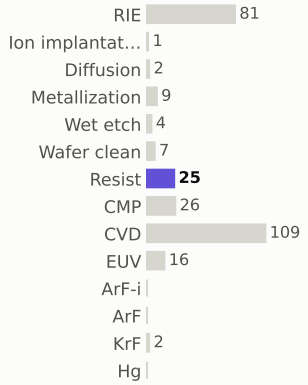

materials deposited (g)

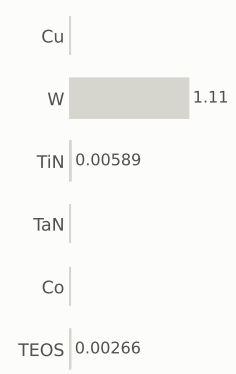

gases emitted (g)

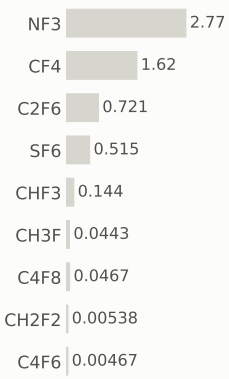

Step #3130: CVD

depo_fill · CVD

1.31	362.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

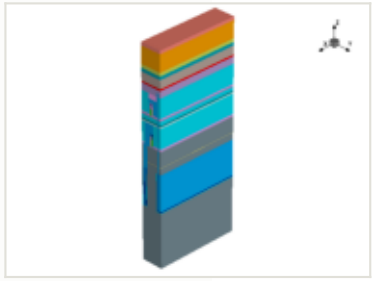

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

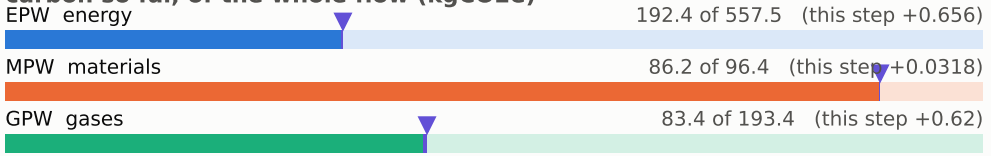

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

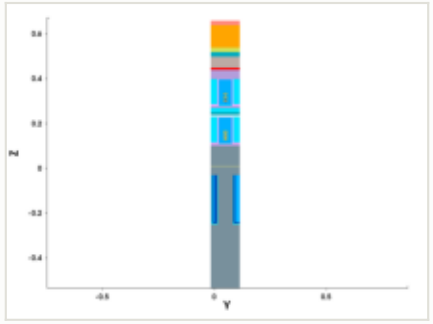

y cut at 0.049 µm

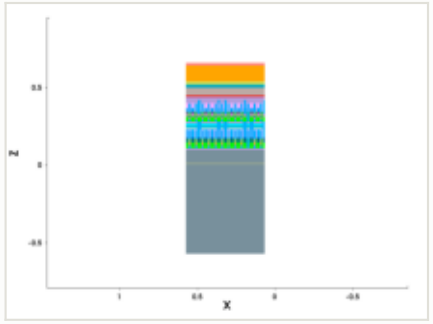

mask for this step

no mask for this step

steps by process area

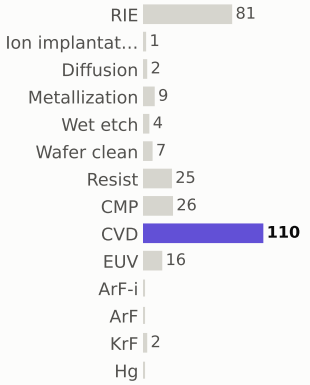

materials deposited (g)

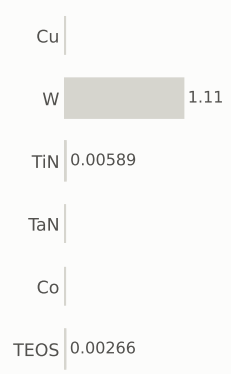

gases emitted (g)

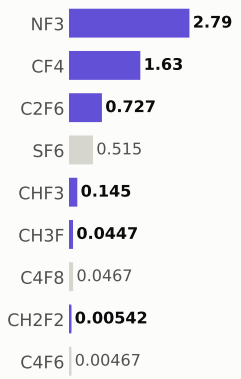

Step #3140: Wafer_clean

clean · Wafer_clean

0.169	362.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

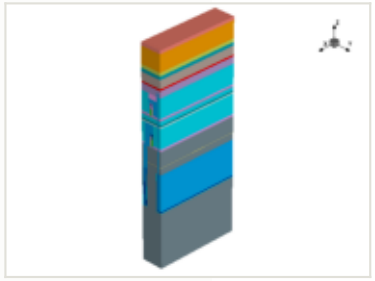

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

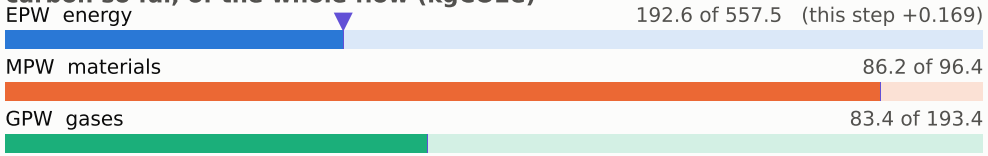

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

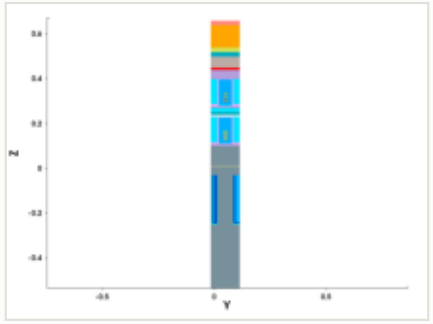

y cut at 0.049 µm

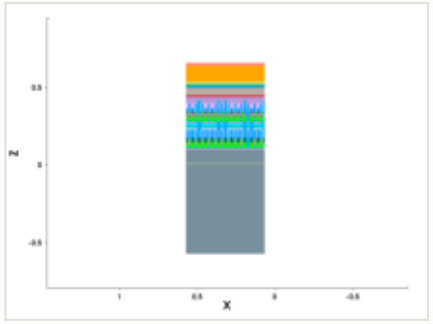

mask for this step

no mask for this step

steps by process area

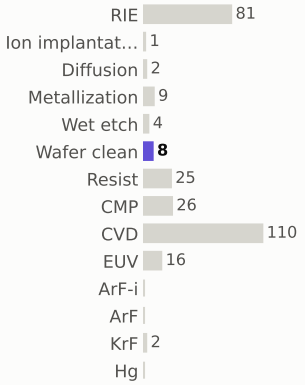

materials deposited (g)

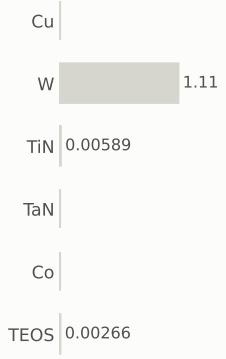

gases emitted (g)

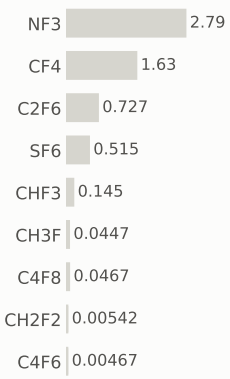

Step #3150: EUV

litho_patterning · EUV

1.96	364.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

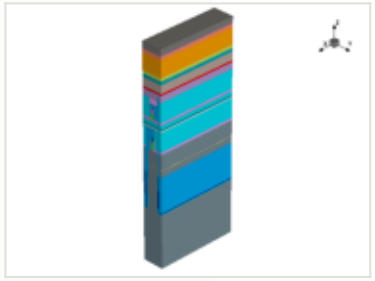

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

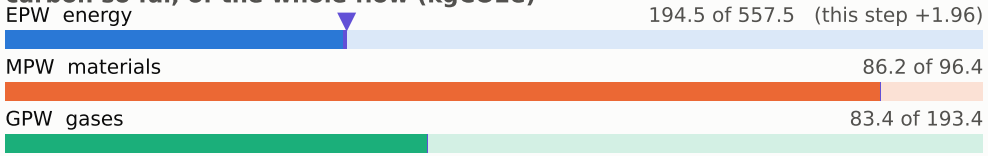

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

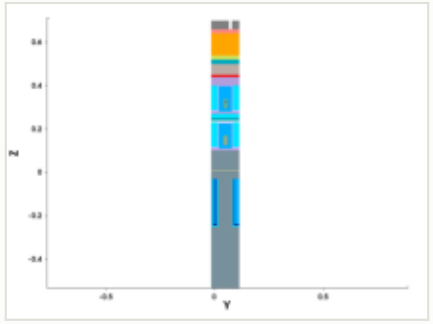

y cut at 0.049 µm

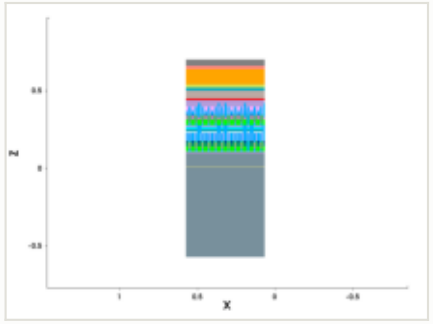

mask: layer 12:0 (GDSII)

steps by process area

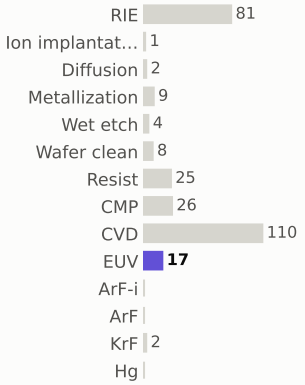

materials deposited (g)



gases emitted (g)

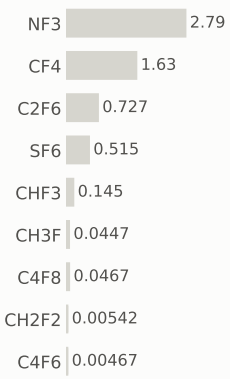

Step #3160: RIE

etch_anisotropic · RIE

1.04	365.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

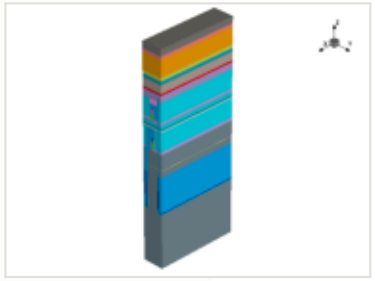

x cut at 0.385 µm

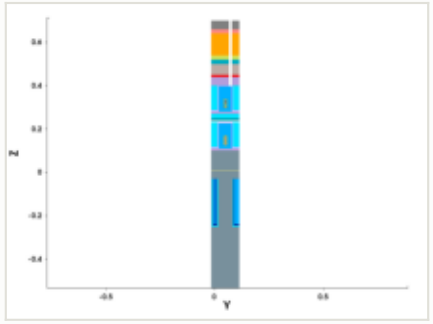

y cut at 0.049 µm

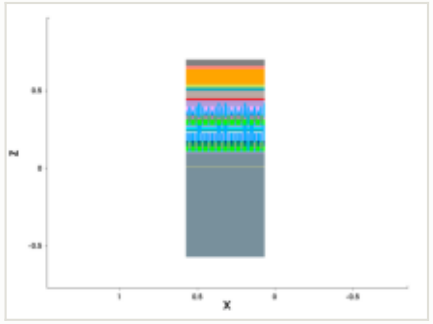

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

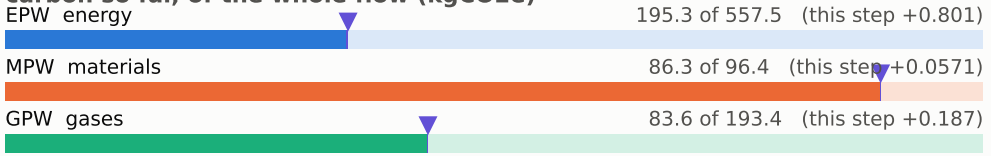

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

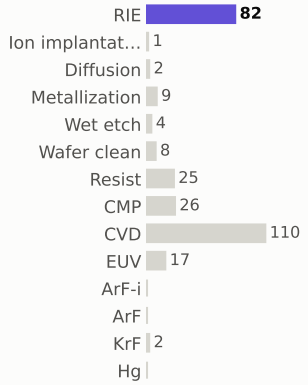

materials deposited (g)



gases emitted (g)

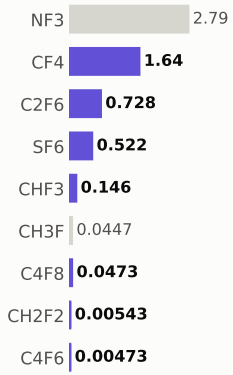

Step #3170: RIE

etch_anisotropic · RIE

1.04	366.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

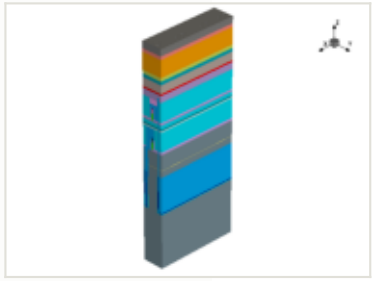

x cut at 0.385 µm

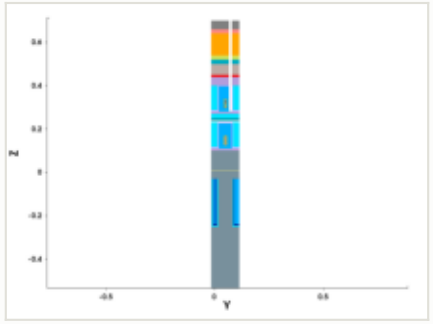

y cut at 0.049 µm

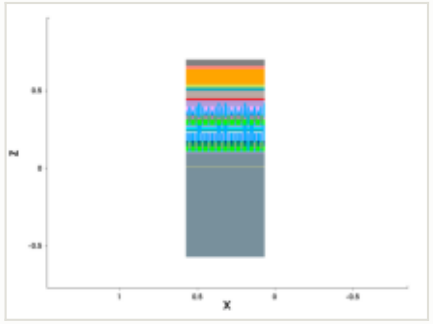

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

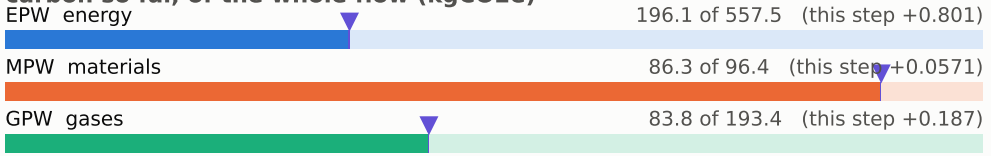

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

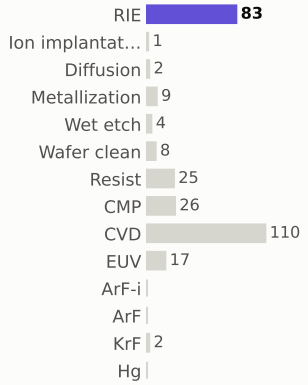

materials deposited (g)

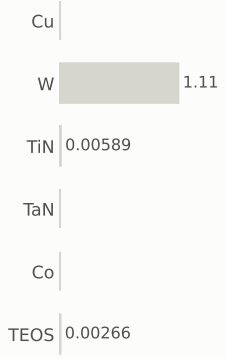

gases emitted (g)

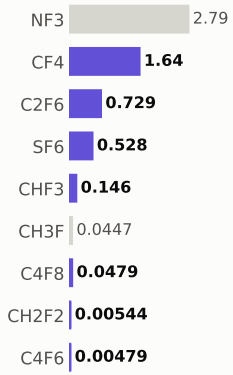

Step #3180: RIE

etch_anisotropic · RIE

1.04	367.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

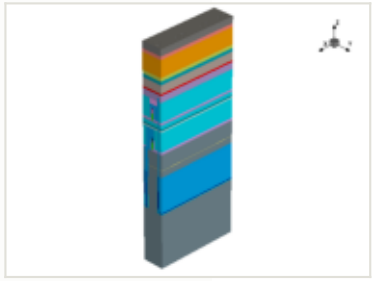

x cut at 0.385 µm

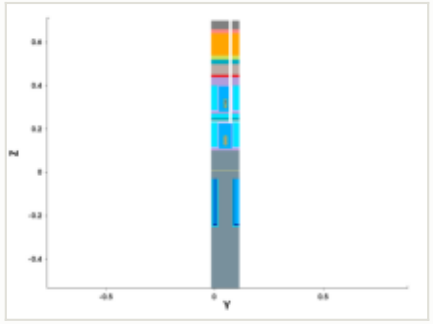

y cut at 0.049 µm

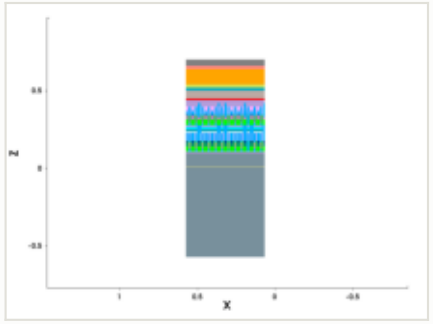

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

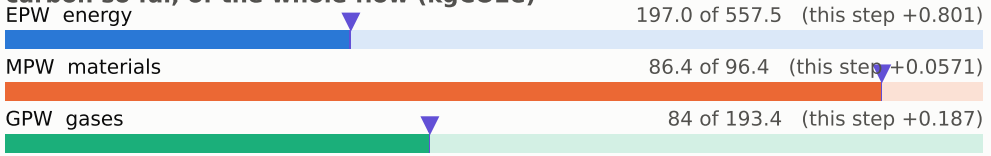

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

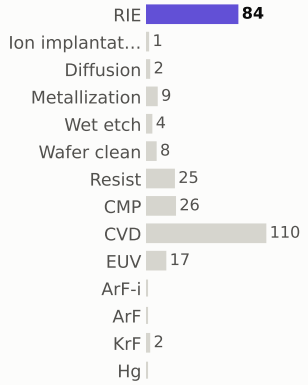

materials deposited (g)

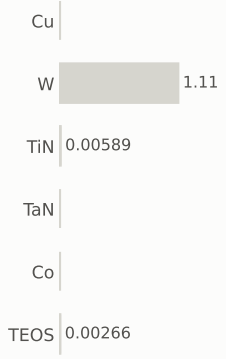

gases emitted (g)

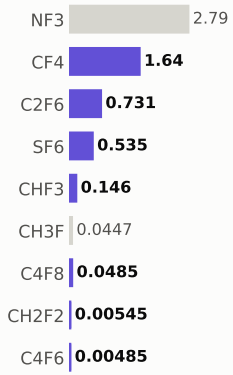

Step #3190: Wafer_clean

etch_strip · Wafer_clean

0.169	367.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

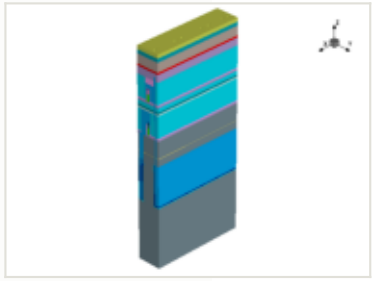

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

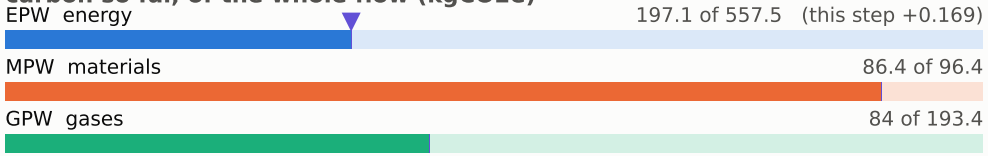

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

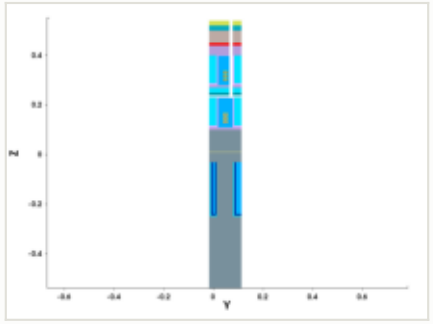

y cut at 0.049 µm

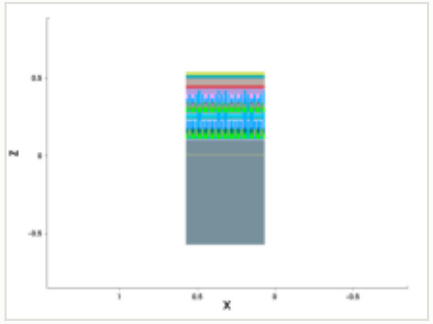

mask for this step

no mask for this step

steps by process area

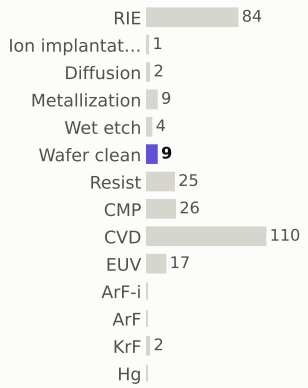

materials deposited (g)



gases emitted (g)

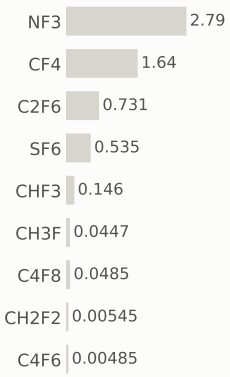

Step #3200: Resist

depo_fill · Resist

0.169	367.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

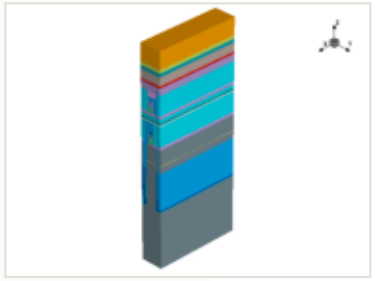

x cut at 0.385 µm

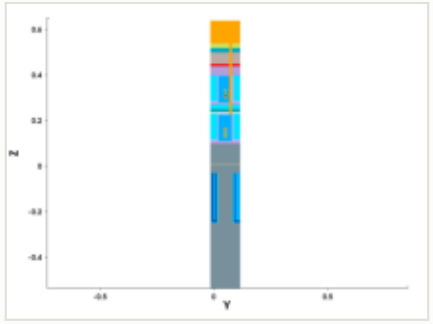

y cut at 0.049 µm

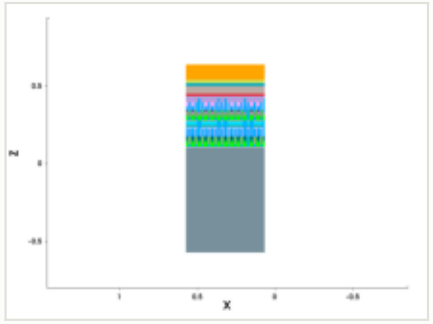

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

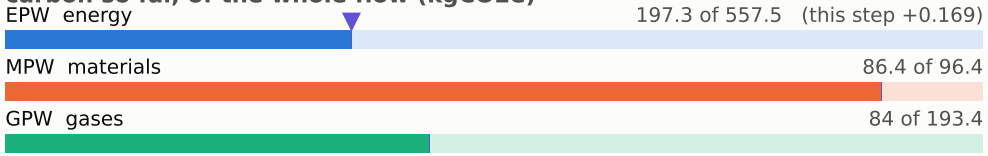

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

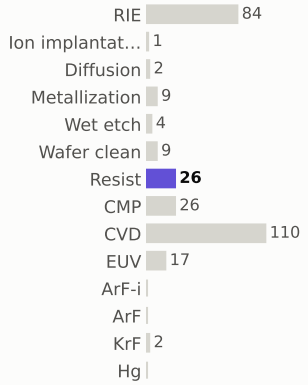

materials deposited (g)



gases emitted (g)

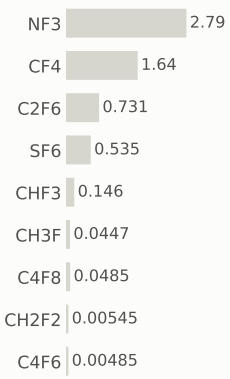

Step #3210: CVD

depo_fill · CVD

1.31	368.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

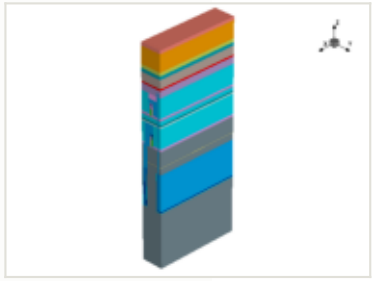

x cut at 0.385 µm

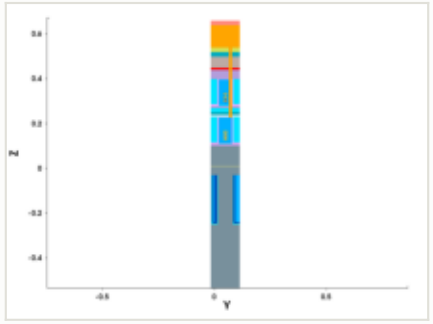

y cut at 0.049 µm

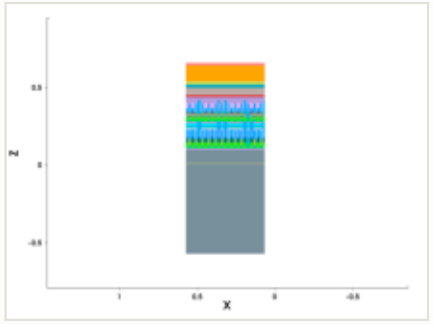

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

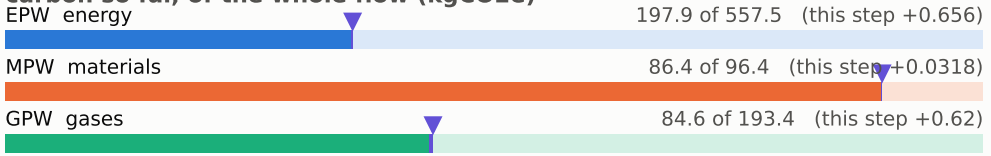

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

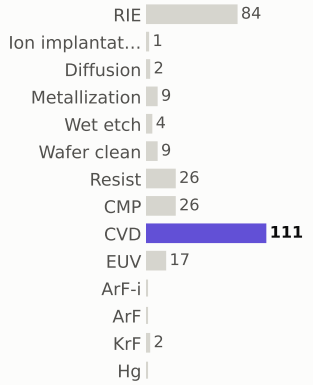

materials deposited (g)

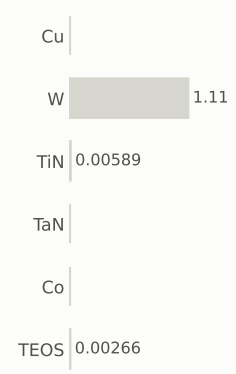

gases emitted (g)

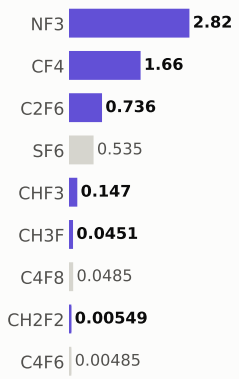

Step #3220: Wafer_clean

clean · Wafer_clean

0.169	369.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

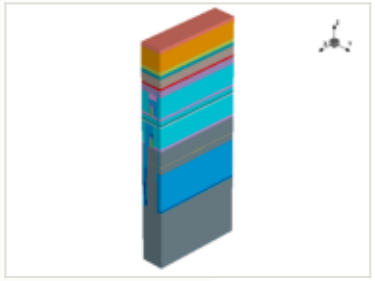

x cut at 0.385 µm

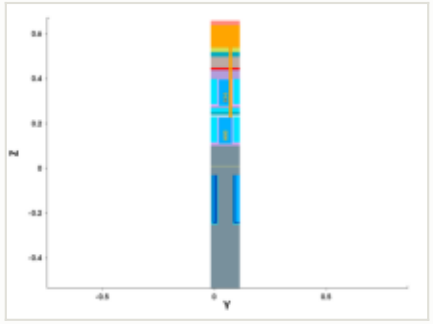

y cut at 0.049 µm

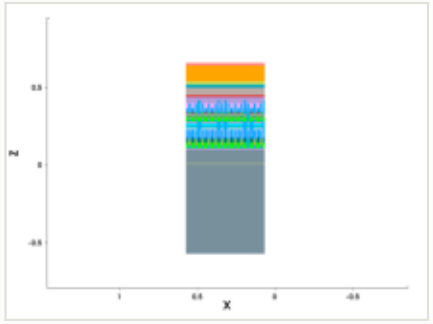

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

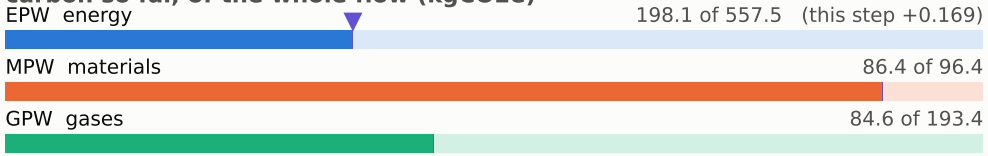

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

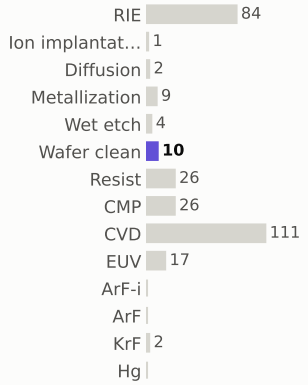

materials deposited (g)



gases emitted (g)

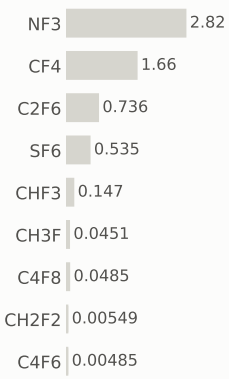

Step #3230: EUV

litho_patterning · EUV

1.96	371.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

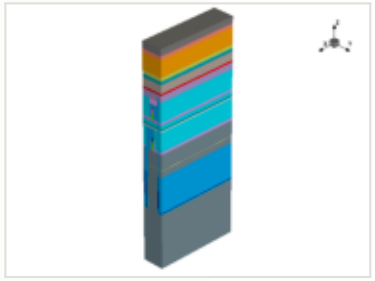

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

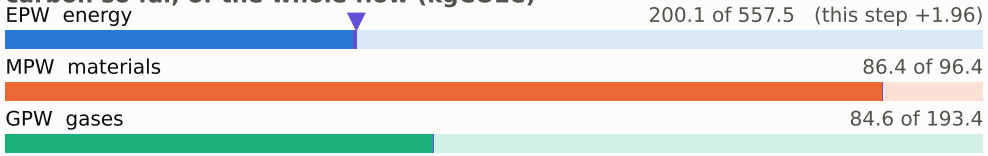

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

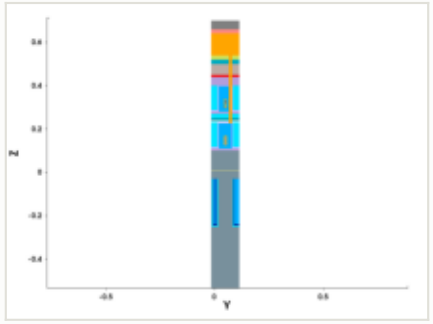

y cut at 0.049 µm

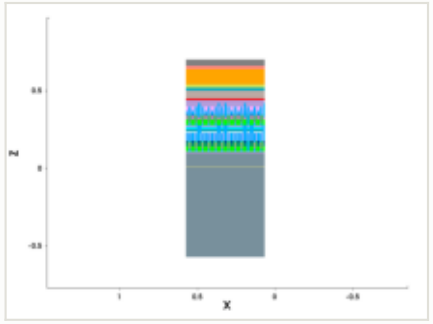

mask: layer 12:2 (GDSII)

steps by process area

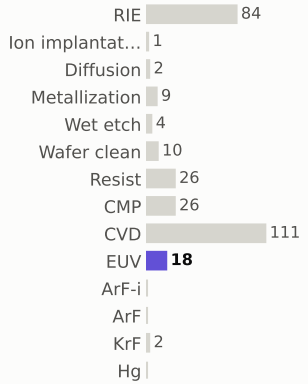

materials deposited (g)

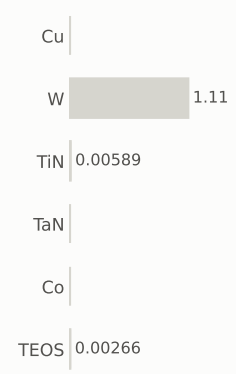

gases emitted (g)

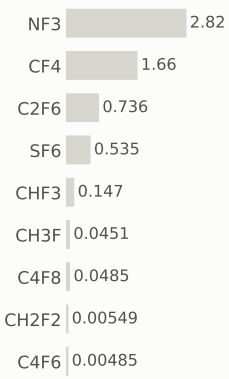

Step #3240: RIE

etch_anisotropic · RIE

1.04	372.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

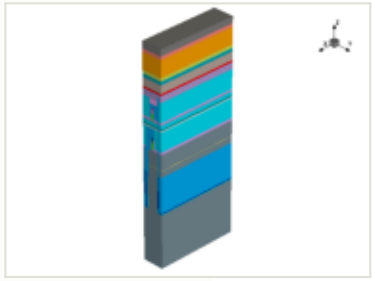

x cut at 0.385 µm

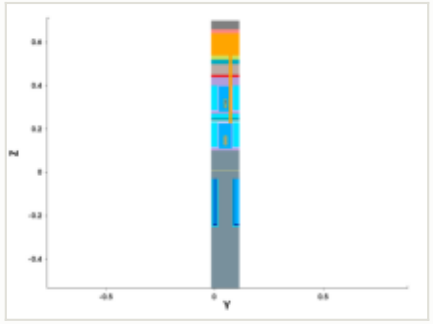

y cut at 0.049 µm

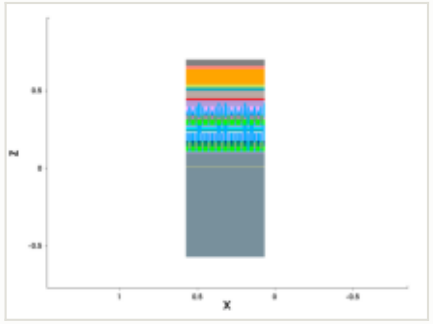

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

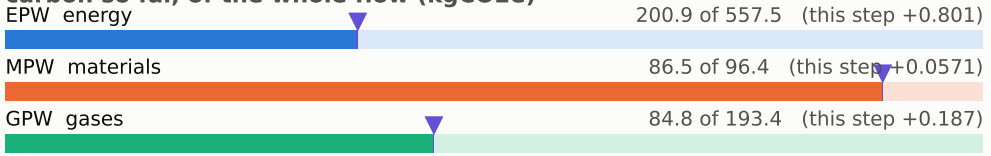

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

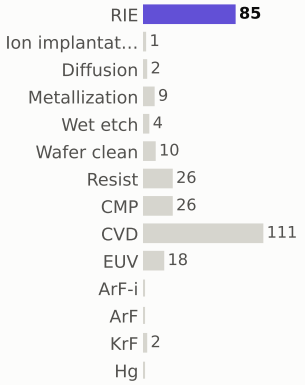

materials deposited (g)

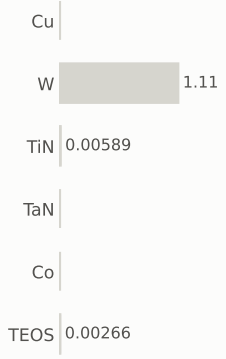

gases emitted (g)

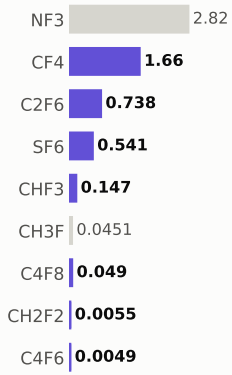

Step #3250: Wafer_clean

etch_strip · Wafer_clean

0.169	372.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

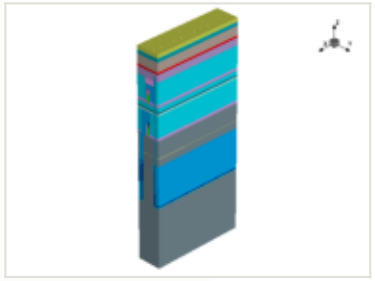

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

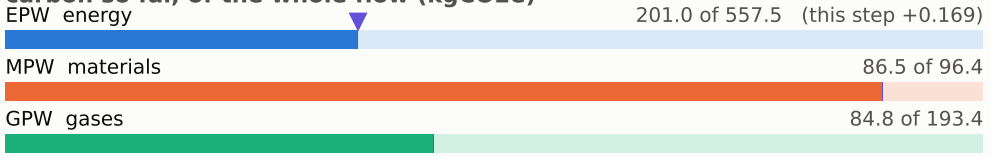

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

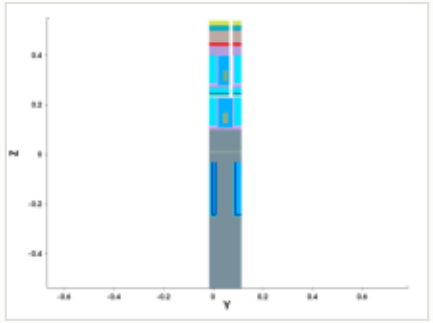

y cut at 0.049 µm

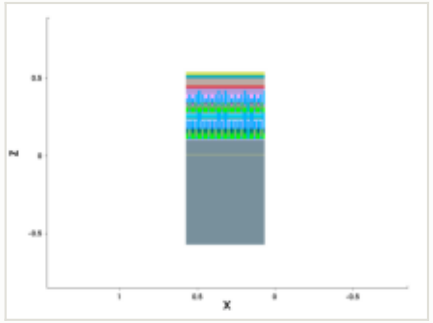

mask for this step

no mask for this step

steps by process area

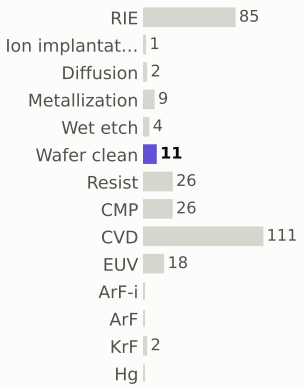

materials deposited (g)

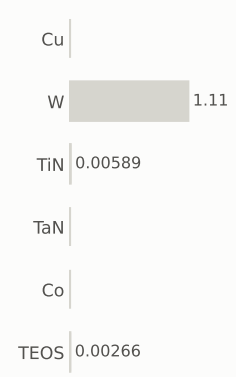

gases emitted (g)

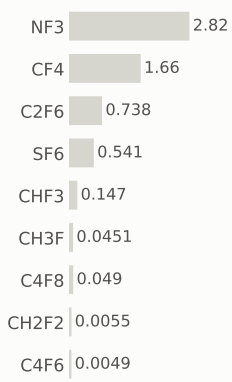

Step #3260: Resist

depo_fill · Resist

0.169	372.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

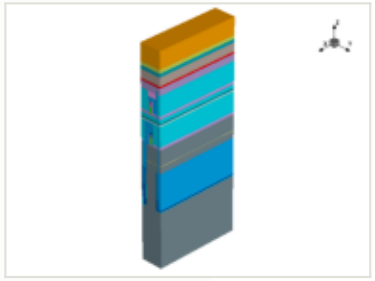

x cut at 0.385 µm

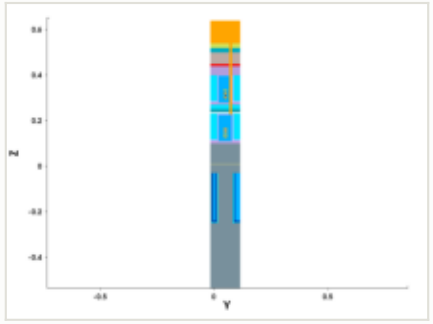

y cut at 0.049 µm

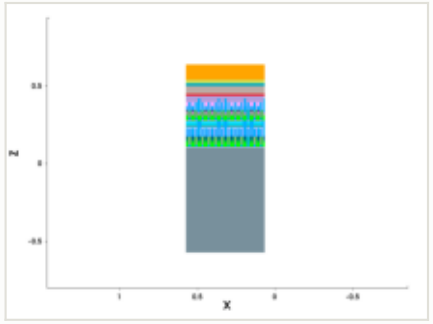

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

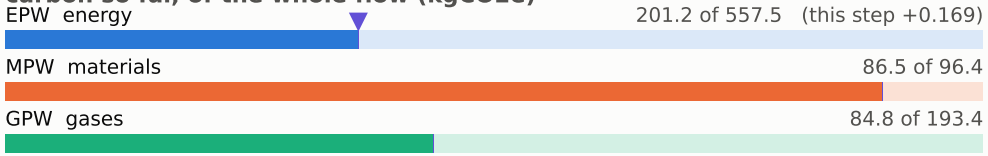

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

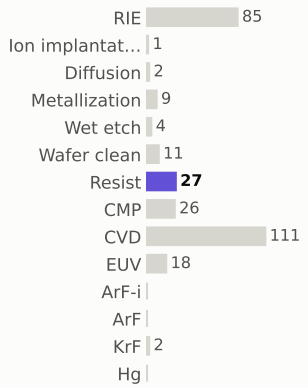

materials deposited (g)



gases emitted (g)

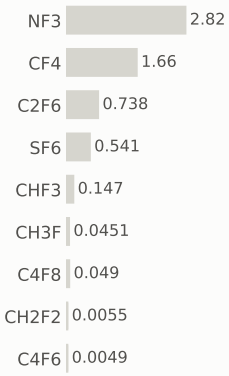

Step #3270: CVD

depo_fill · CVD

1.31	373.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

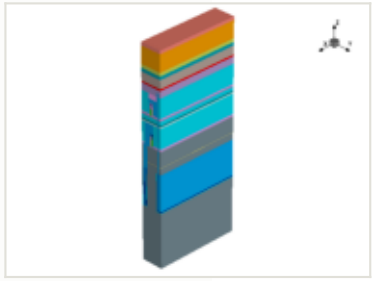

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

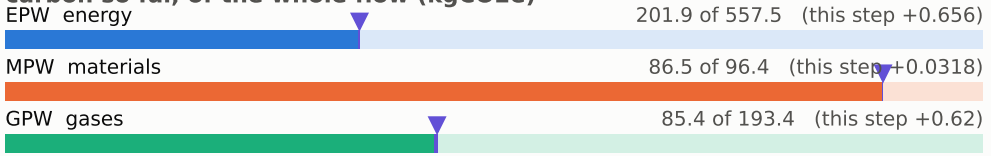

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

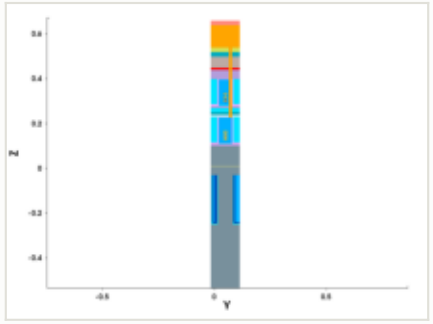

y cut at 0.049 µm

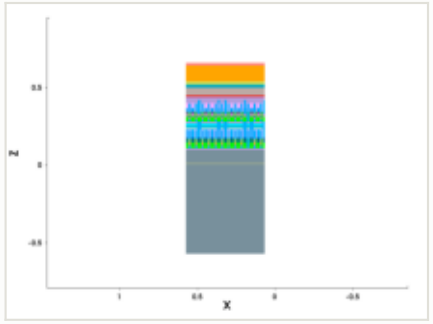

mask for this step

no mask for this step

steps by process area

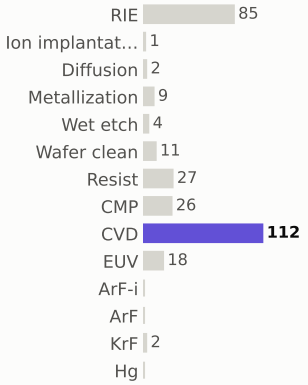

materials deposited (g)

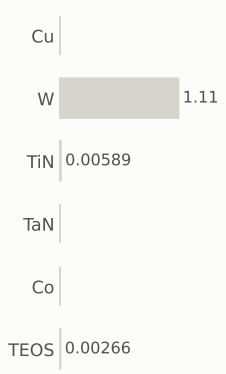

gases emitted (g)

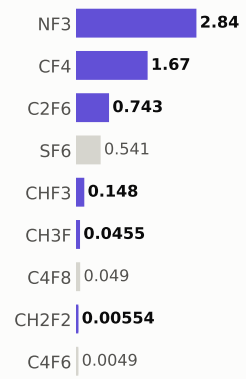

Step #3280: Wafer_clean

clean · Wafer_clean

0.169	373.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

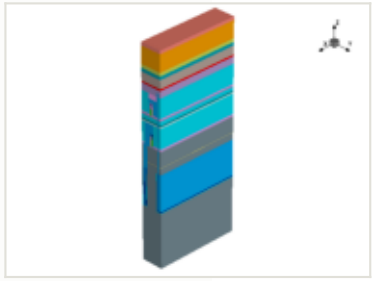

x cut at 0.385 µm

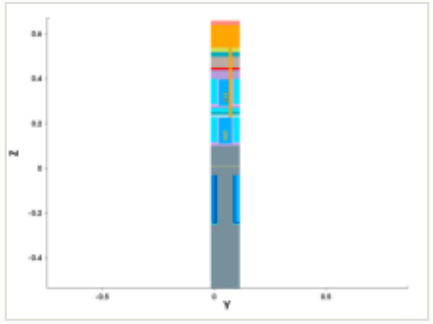

y cut at 0.049 µm

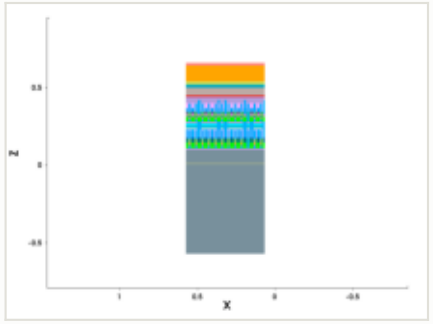

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

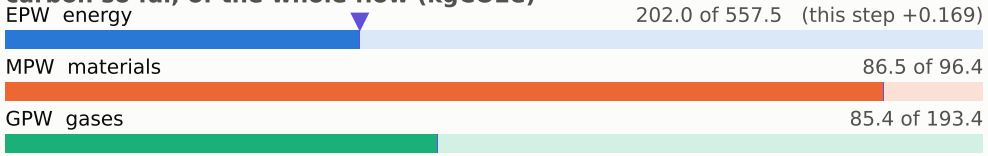

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

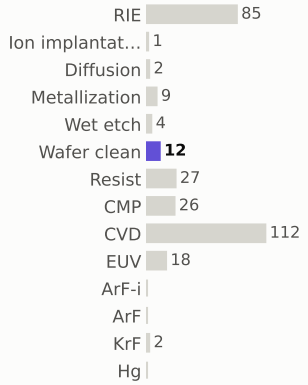

materials deposited (g)



gases emitted (g)

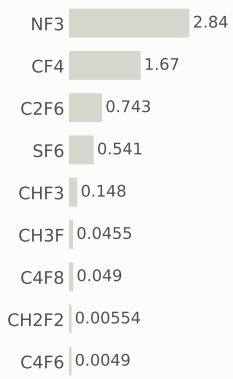

Step #3290: EUV

litho_patterning · EUV

1.96	375.9	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

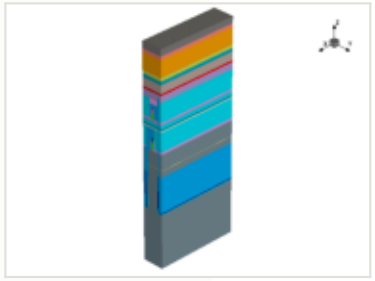

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

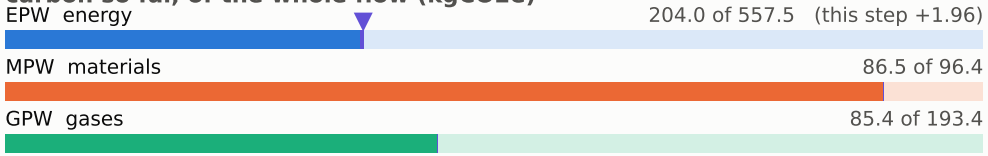

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

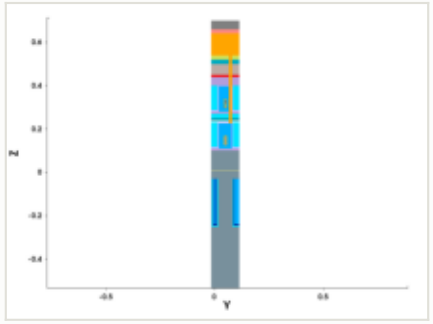

y cut at 0.049 µm

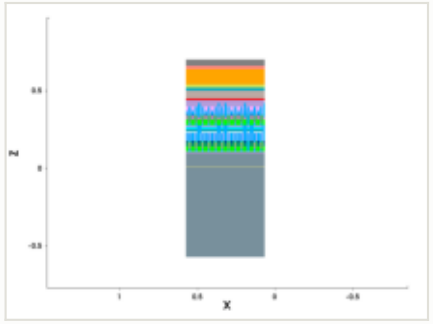

mask: layer 12:1 (GDSII)

steps by process area

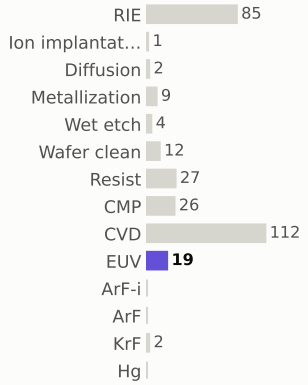

materials deposited (g)



gases emitted (g)

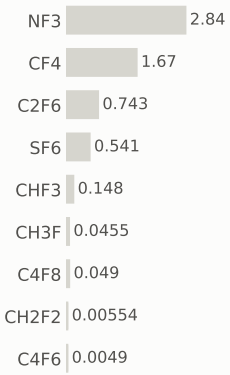

Step #3300: RIE

etch_anisotropic · RIE

1.04	376.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

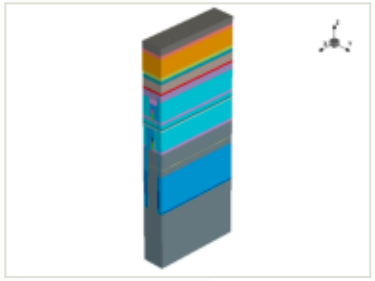

x cut at 0.385 µm

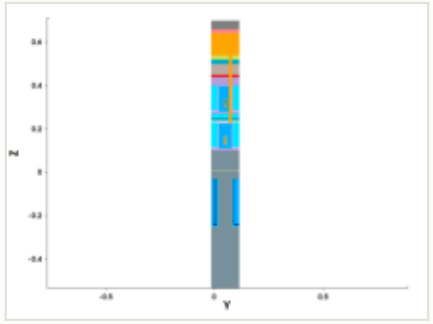

y cut at 0.049 µm

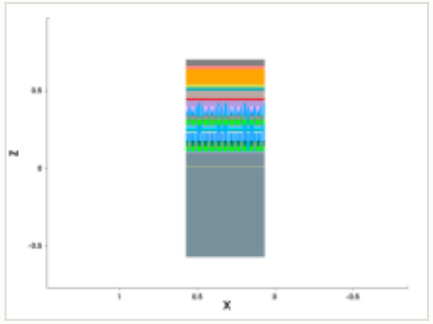

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

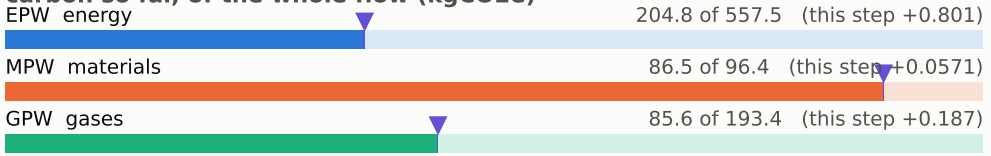

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

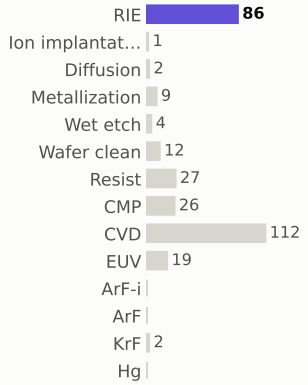

materials deposited (g)



gases emitted (g)

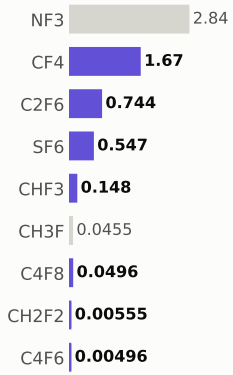

Step #3310: Wafer_clean

etch_strip · Wafer_clean

0.169	377.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

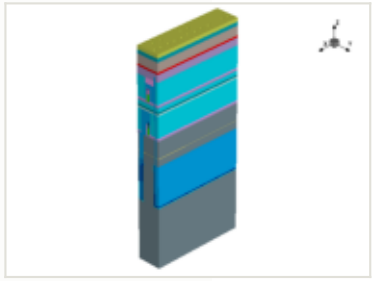

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

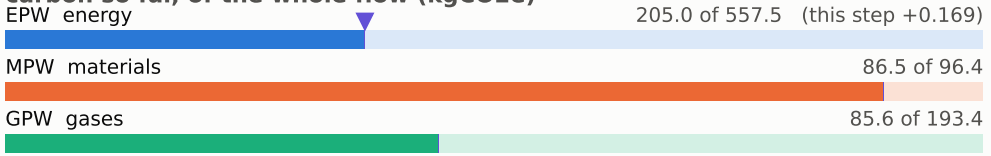

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

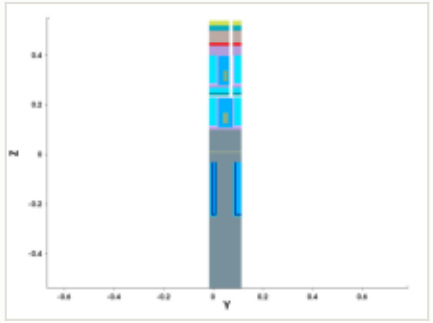

y cut at 0.049 µm

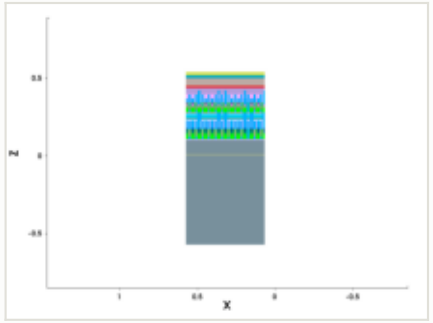

mask for this step

no mask for this step

steps by process area

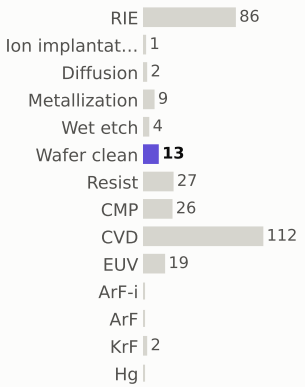

materials deposited (g)

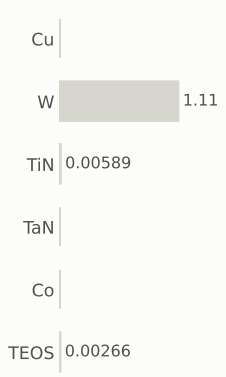

gases emitted (g)

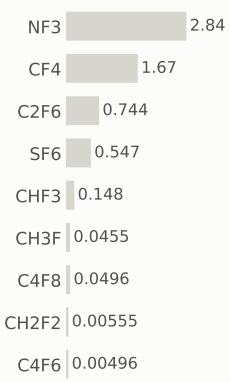

Step #3320: RIE

etch_noop · RIE

1.04	378.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

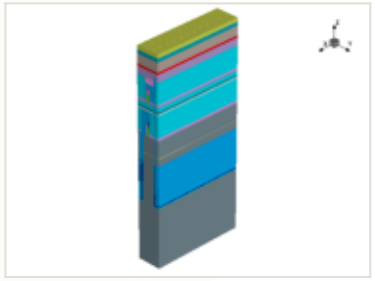

x cut at 0.385 µm

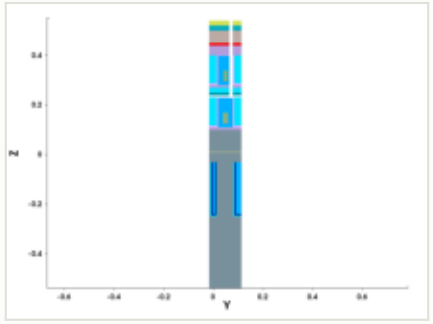

y cut at 0.049 µm

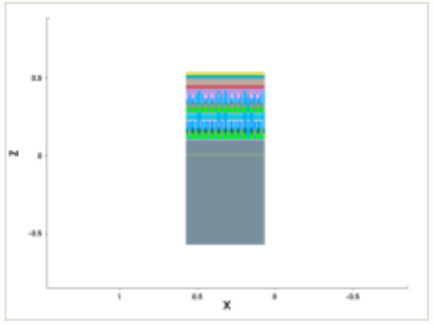

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

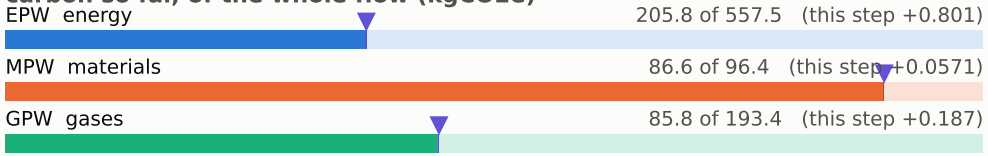

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

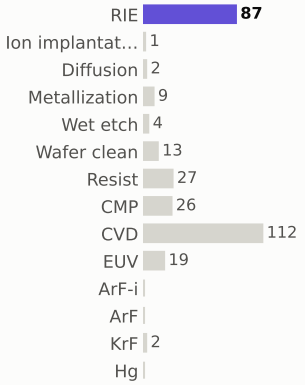

materials deposited (g)

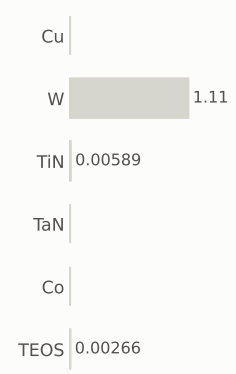

gases emitted (g)

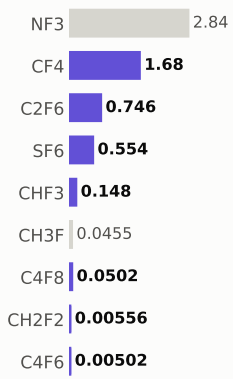

Step #3330: Wafer_clean

clean · Wafer_clean

0.169	378.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

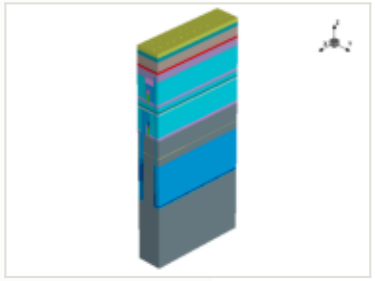

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

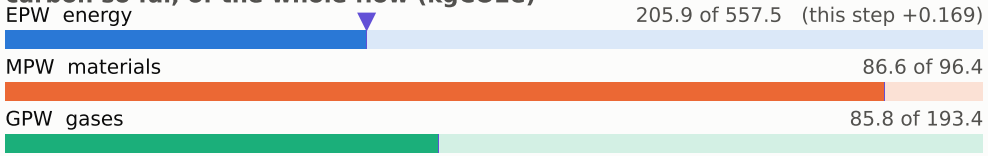

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

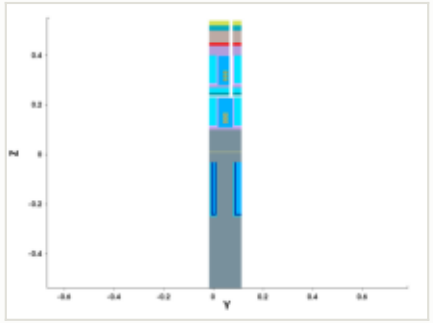

y cut at 0.049 µm

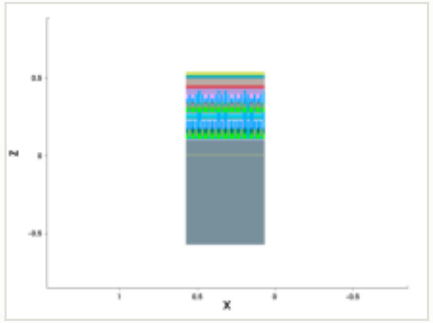

mask for this step

no mask for this step

steps by process area

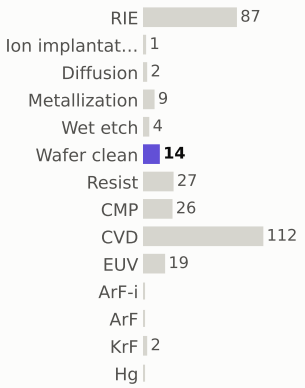

materials deposited (g)



gases emitted (g)

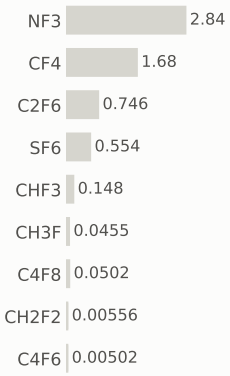

Step #3340: Metallization

depo_fill · Metallization

1.21	379.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

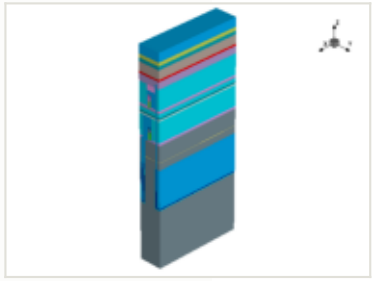

x cut at 0.385 µm

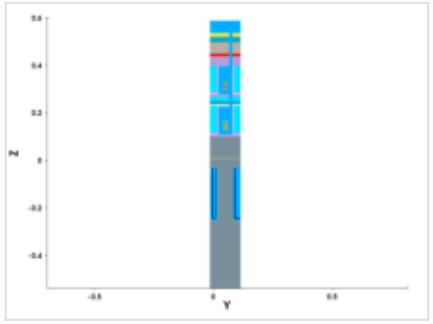

y cut at 0.049 µm

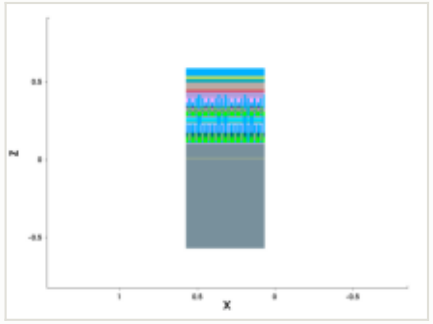

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

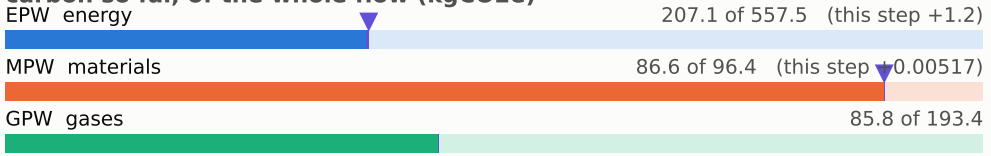

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

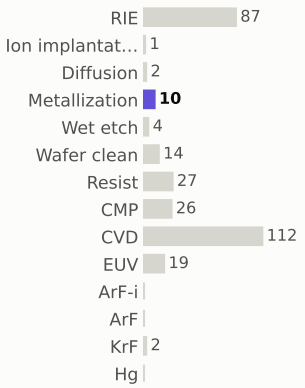

materials deposited (g)



gases emitted (g)

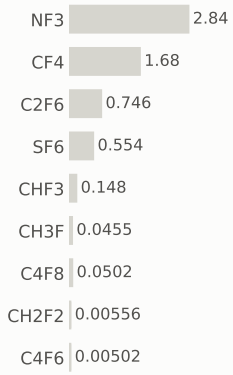

Step #3350: CMP

etch_cmp · CMP

0.169	379.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

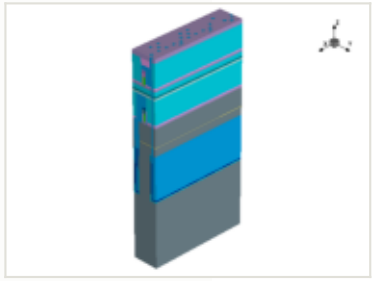

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

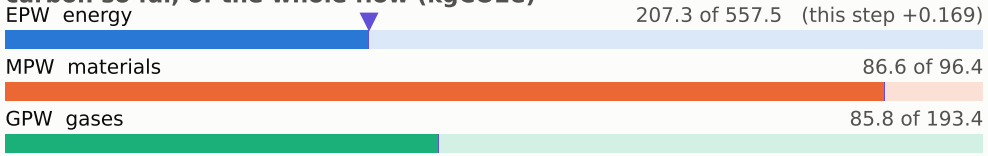

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

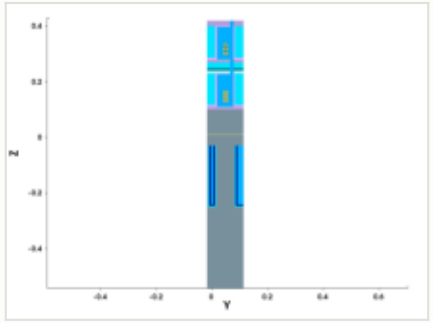

y cut at 0.049 µm

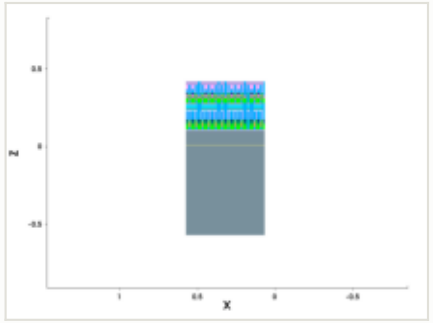

mask for this step

no mask for this step

steps by process area

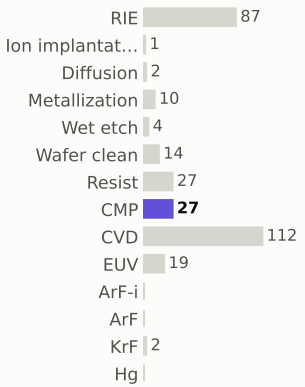

materials deposited (g)



gases emitted (g)

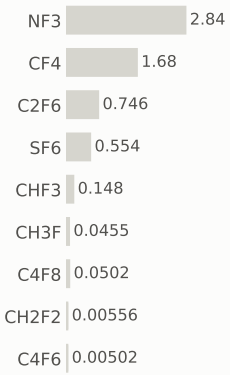

Step #3370: CVD

depo_fill · CVD

1.31	381.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

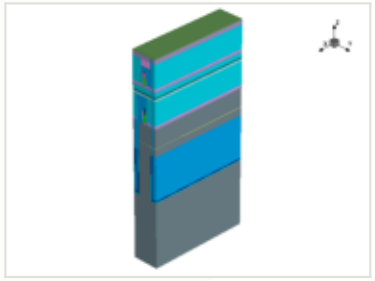

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

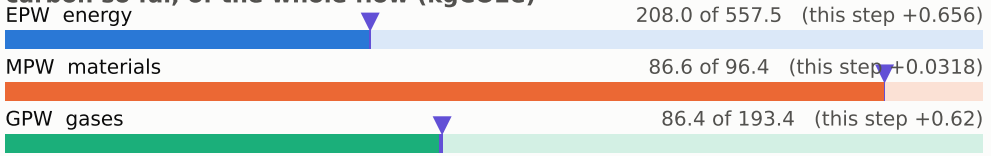

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

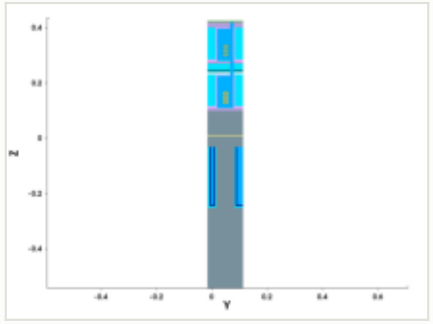

y cut at 0.049 µm

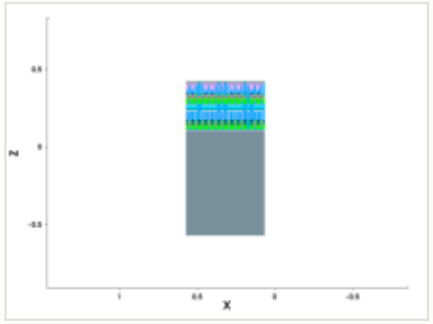

mask for this step

no mask for this step

steps by process area

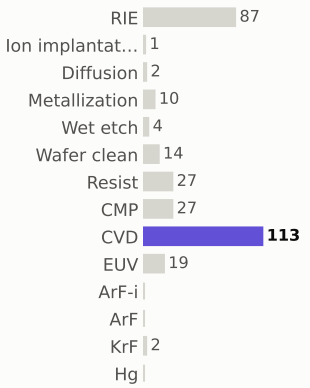

materials deposited (g)

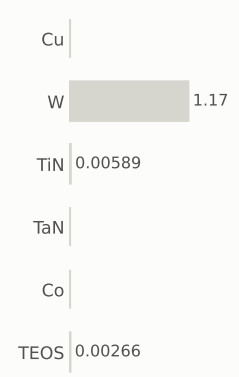

gases emitted (g)

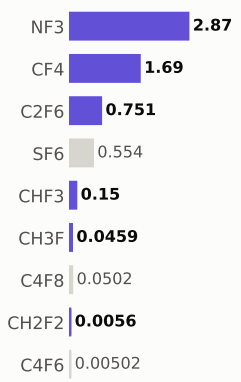

Step #3380: CVD

depo_fill · CVD

1.31	382.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

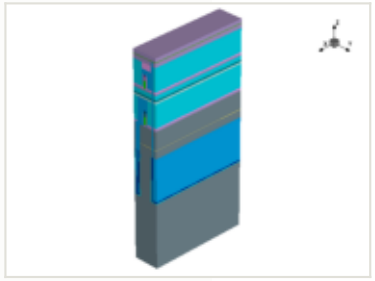

this step

process area	CVD
material	—
thickness	0.018 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

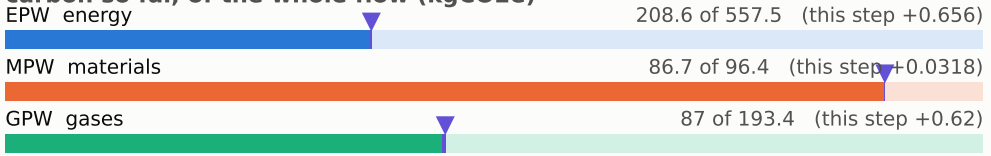

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

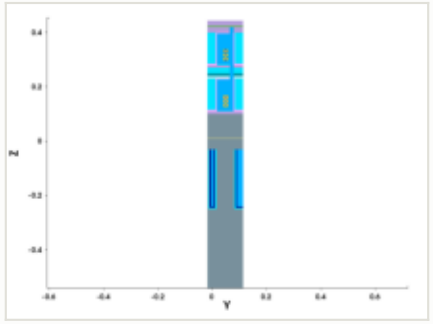

y cut at 0.049 µm

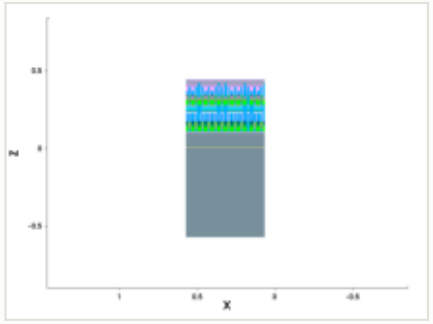

mask for this step

no mask for this step

steps by process area

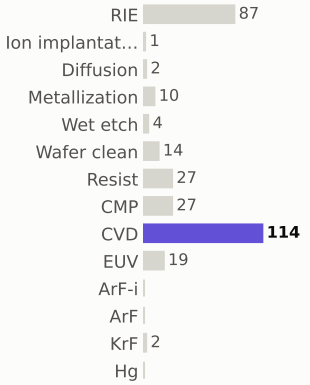

materials deposited (g)

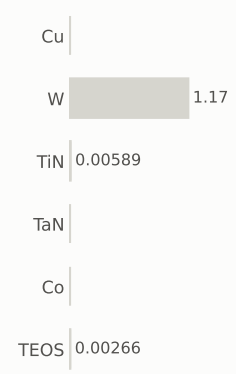

gases emitted (g)

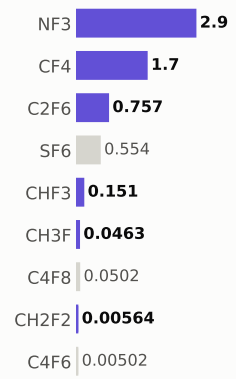

Step #3390: Diffusion

treatment · Diffusion

0.801	383.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

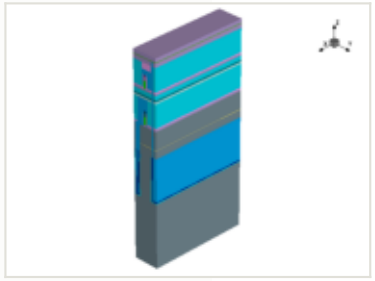

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

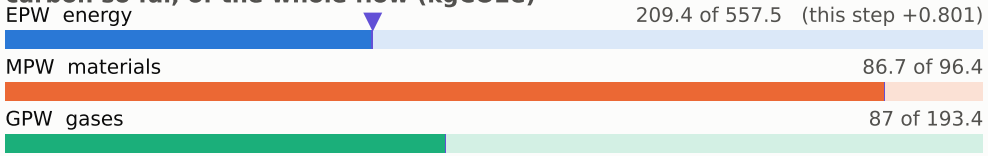

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

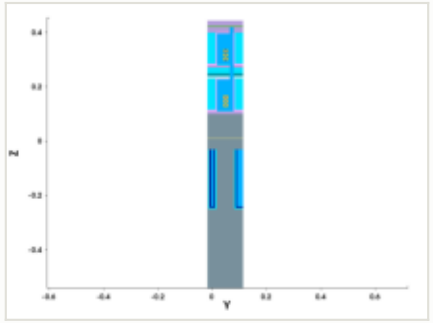

y cut at 0.049 µm

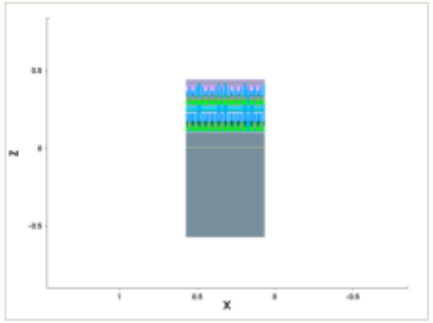

mask for this step

no mask for this step

steps by process area

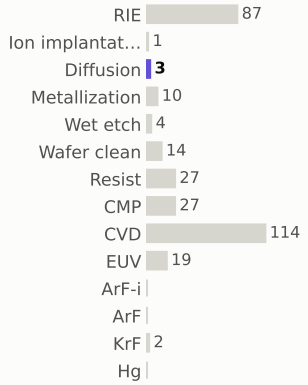

materials deposited (g)

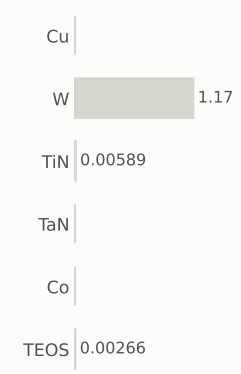

gases emitted (g)

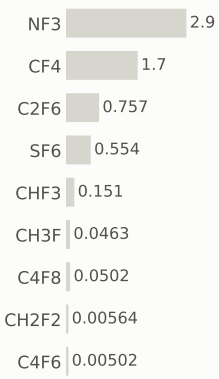

Step #3400: Wafer_clean

clean · Wafer_clean

0.169	383.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

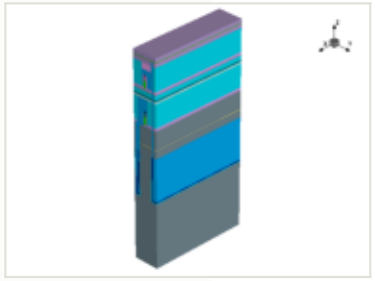

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

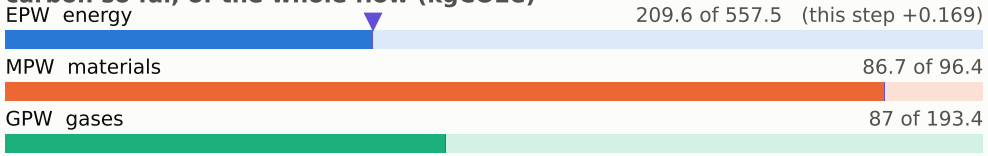

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

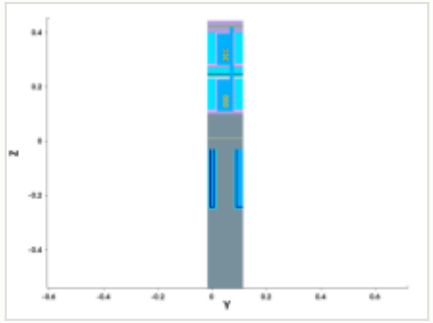

y cut at 0.049 µm

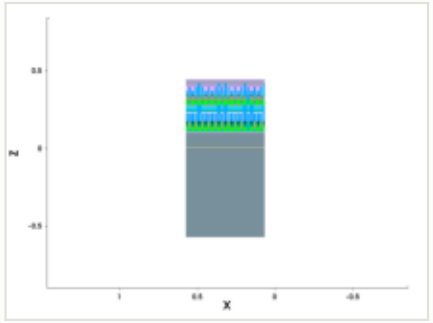

mask for this step

no mask for this step

steps by process area

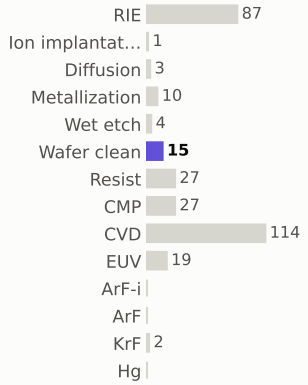

materials deposited (g)

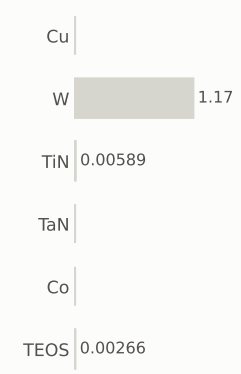

gases emitted (g)

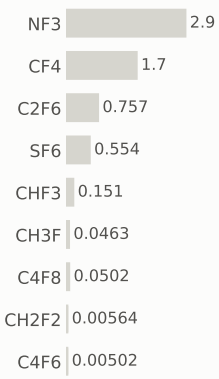

Step #3410: CVD

depo_fill · CVD

1.31	384.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

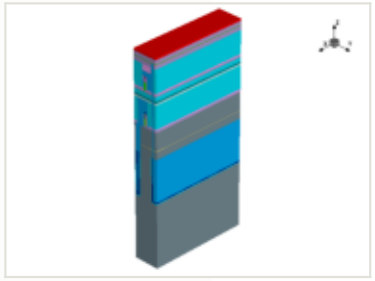

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

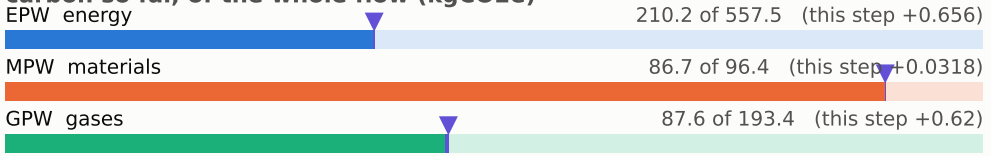

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

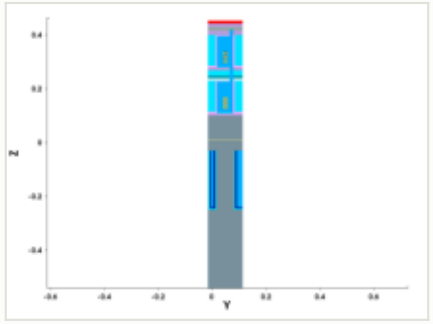

y cut at 0.049 µm

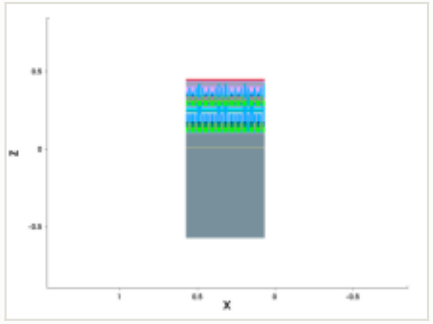

mask for this step

no mask for this step

steps by process area

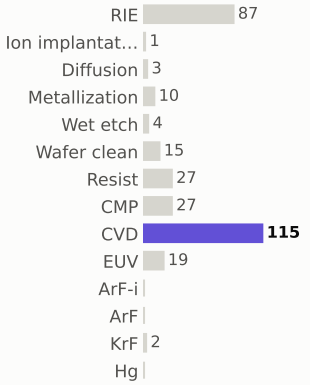

materials deposited (g)

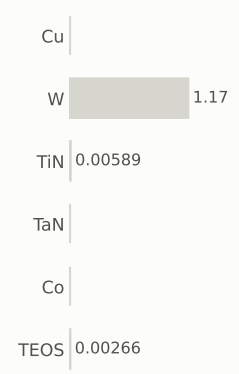

gases emitted (g)

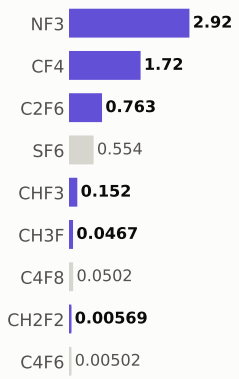

Step #3420: CVD

depo_fill · CVD

1.31	385.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

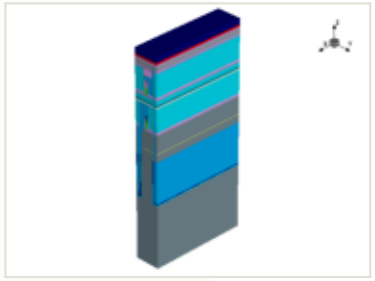

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

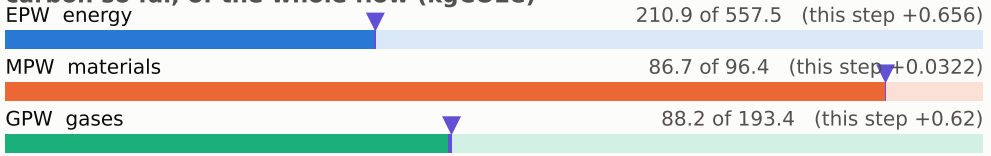

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

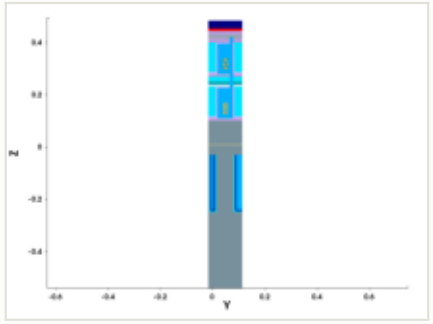

y cut at 0.049 µm

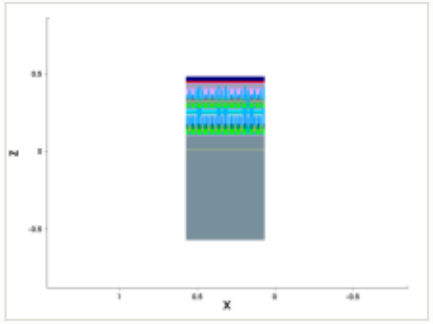

mask for this step

no mask for this step

steps by process area

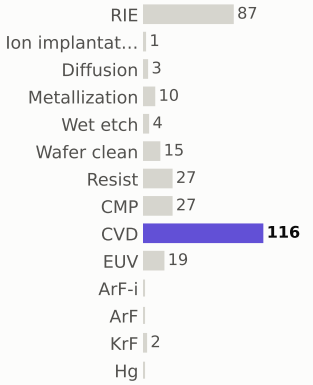

materials deposited (g)

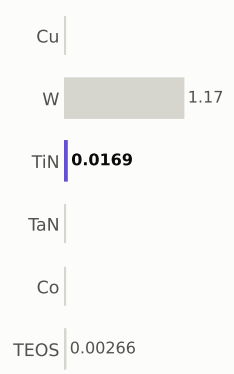

gases emitted (g)

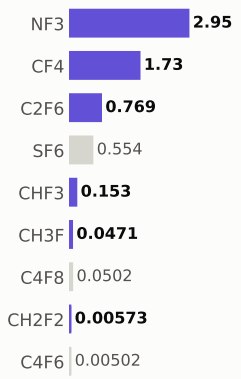

Step #3430: Wafer_clean

clean · Wafer_clean

0.169	386.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

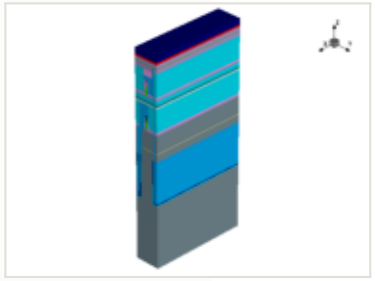

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

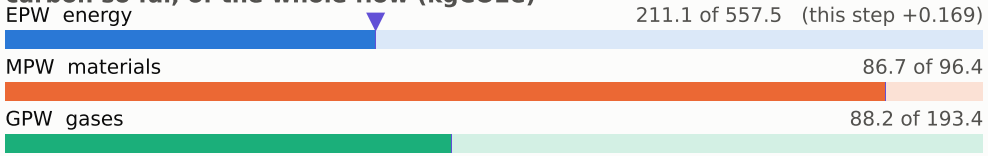

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

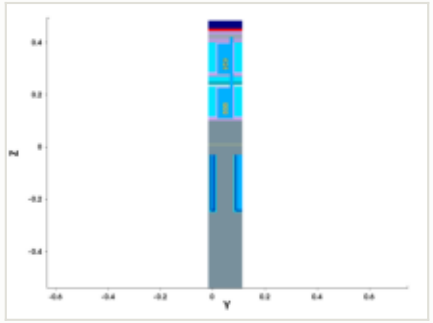

y cut at 0.049 µm

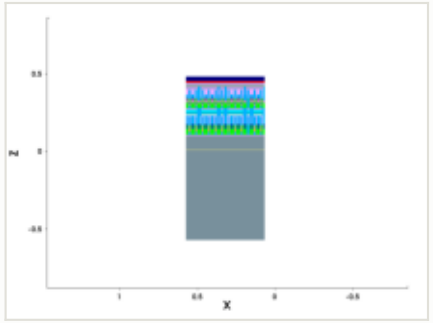

mask for this step

no mask for this step

steps by process area

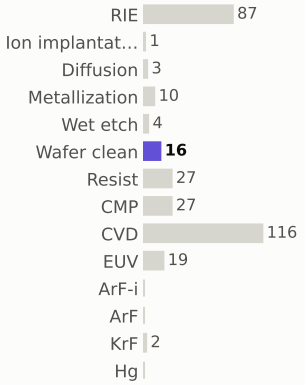

materials deposited (g)

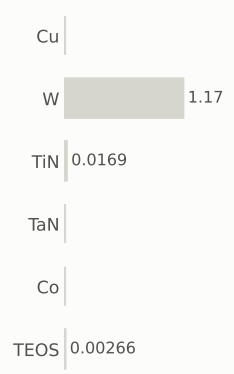

gases emitted (g)

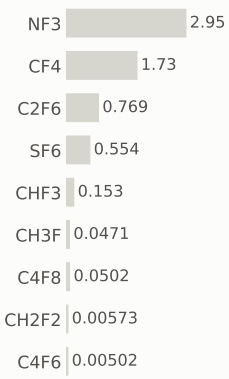

Step #3440: CVD

depo_fill · CVD

1.31	387.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

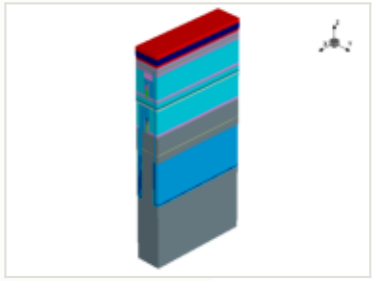

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

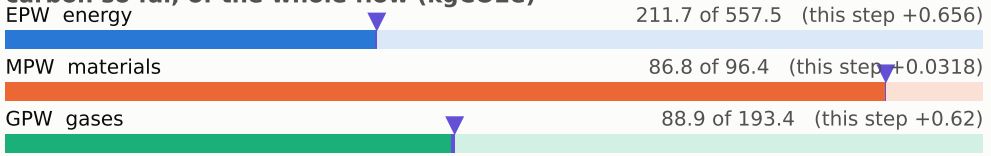

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

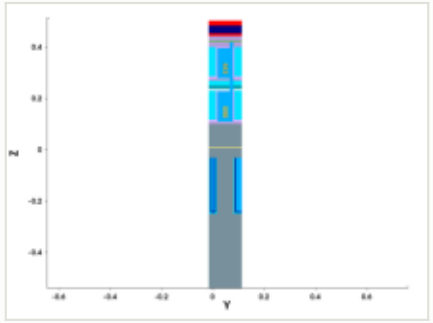

y cut at 0.049 µm

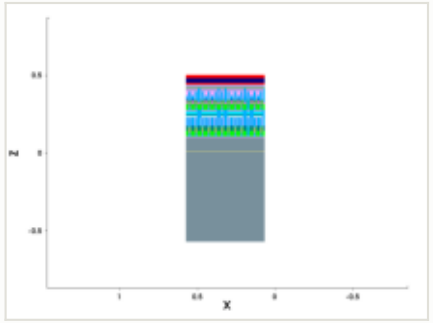

mask for this step

no mask for this step

steps by process area

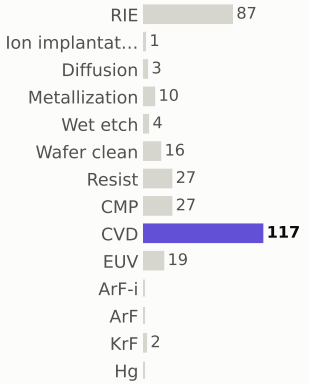

materials deposited (g)



gases emitted (g)

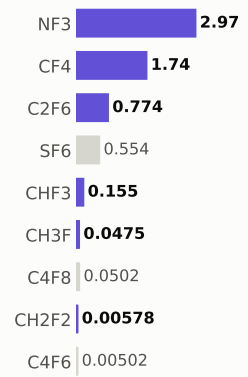

Step #3450: CVD

depo_fill · CVD

1.31	388.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

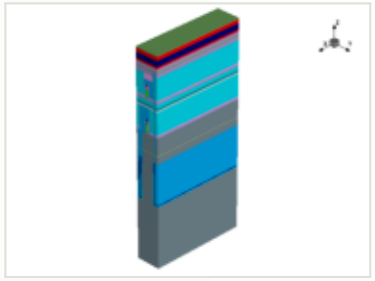

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

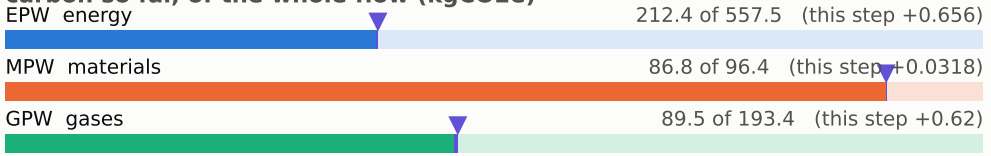

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

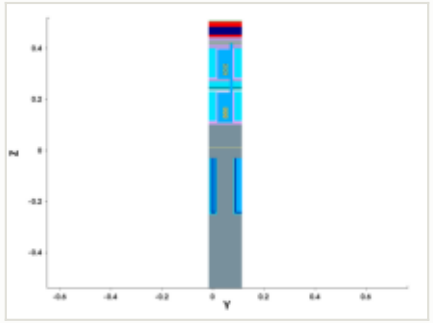

y cut at 0.049 µm

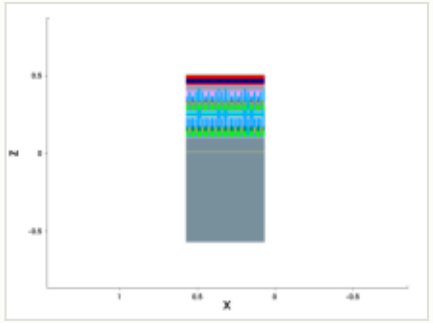

mask for this step

no mask for this step

steps by process area

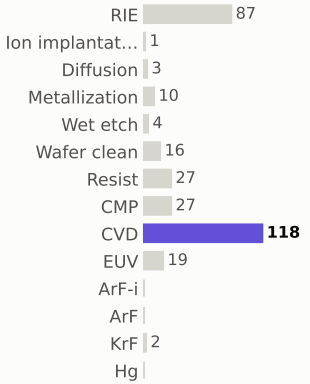

materials deposited (g)



gases emitted (g)



Step #3460: CVD

depo_fill · CVD

1.31	390.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

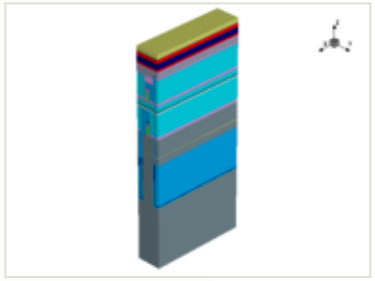

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

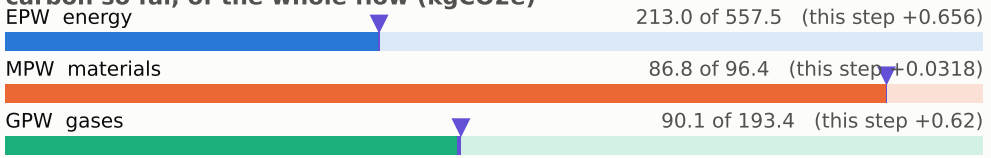

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

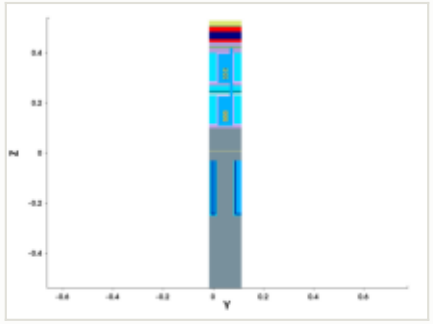

y cut at 0.049 µm

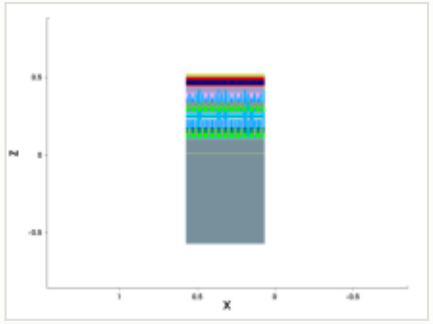

mask for this step

no mask for this step

steps by process area

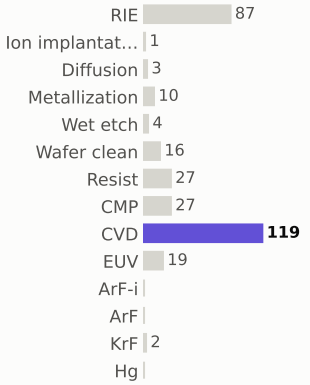

materials deposited (g)

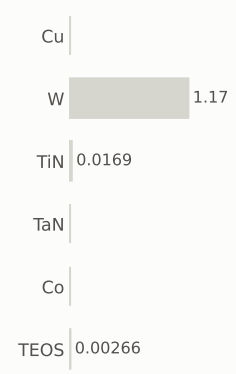

gases emitted (g)

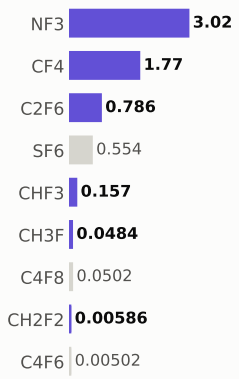

Step #3470: Resist

depo_fill · Resist

0.169	390.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

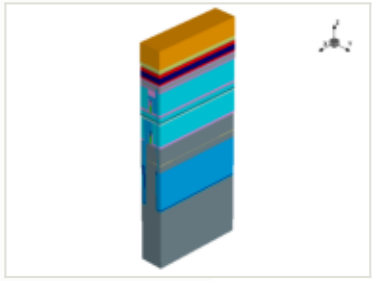

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

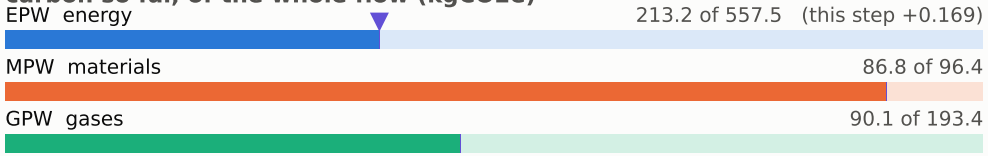

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

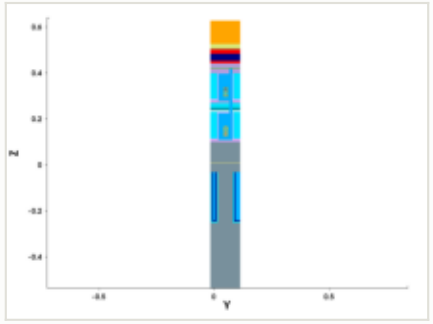

y cut at 0.049 µm

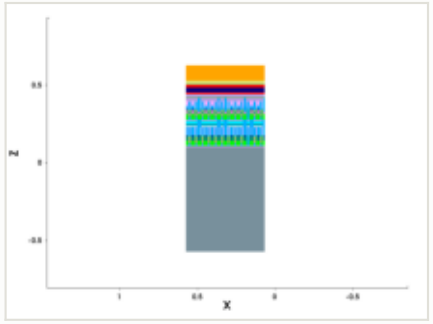

mask for this step

no mask for this step

steps by process area

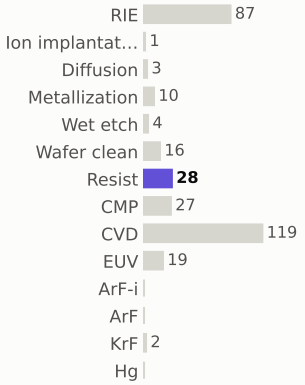

materials deposited (g)

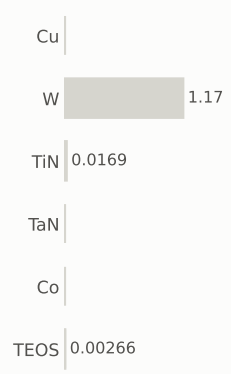

gases emitted (g)

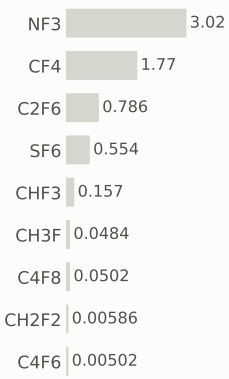

Step #3480: CVD

depo_fill · CVD

1.31	391.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

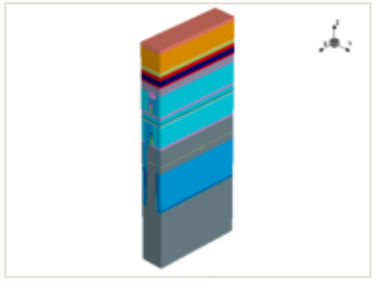

x cut at 0.385 µm

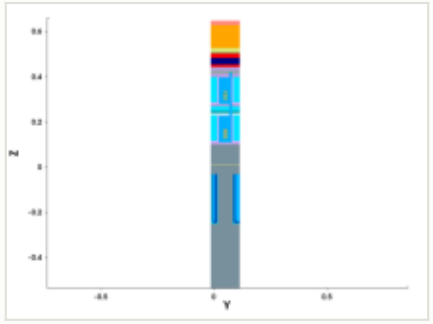

y cut at 0.049 µm

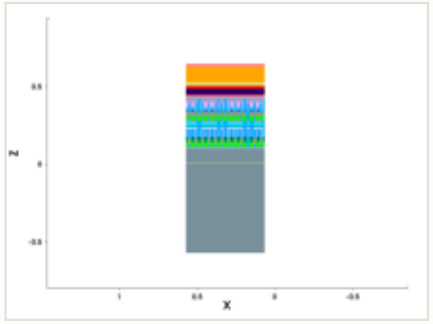

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

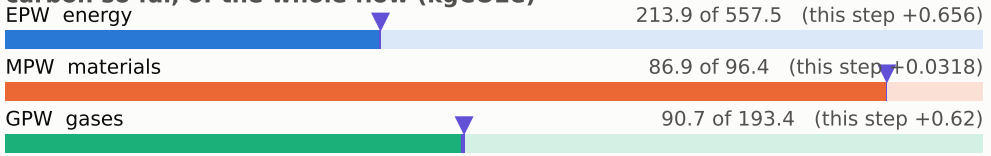

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

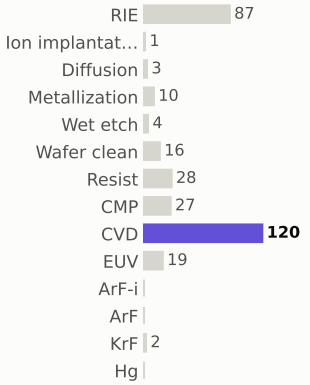

materials deposited (g)

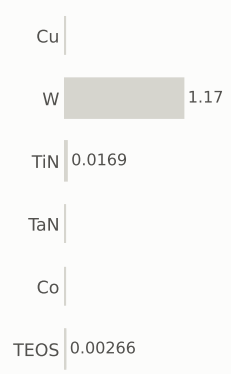

gases emitted (g)

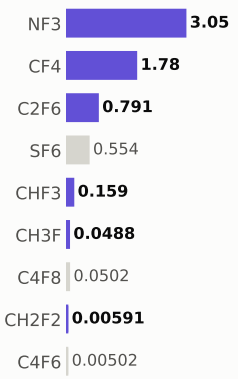

Step #3490: Wafer_clean

clean · Wafer_clean

0.169	391.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

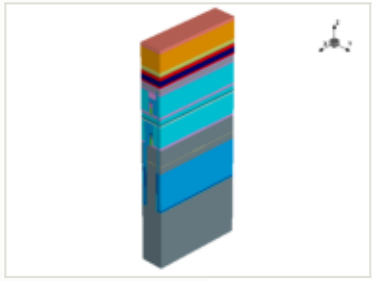

x cut at 0.385 µm

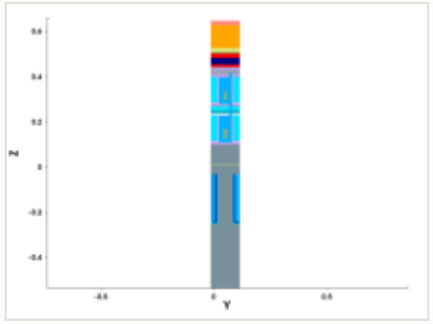

y cut at 0.049 µm

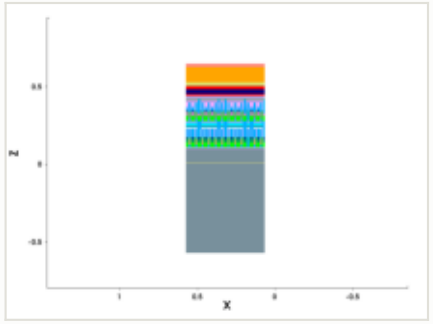

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

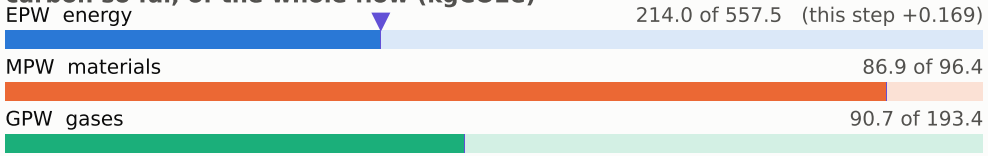

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

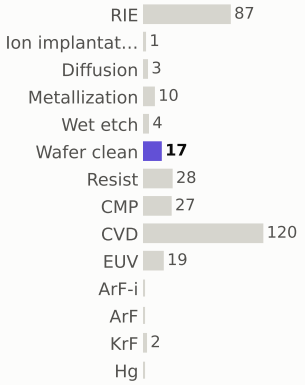

materials deposited (g)



gases emitted (g)

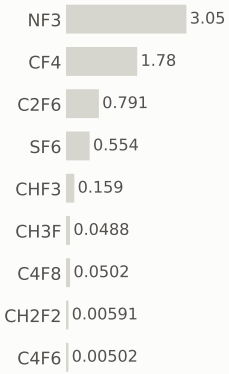

Step #3500: EUV

litho_patterning · EUV

1.96	393.6	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

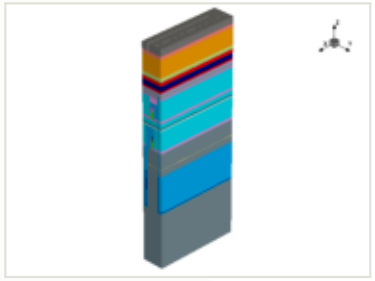

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

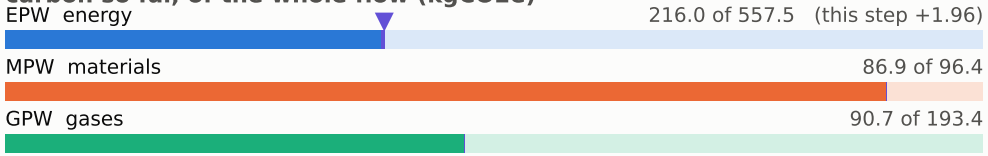

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

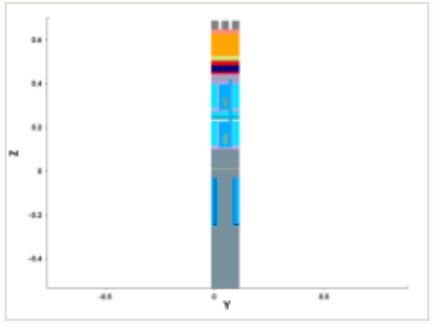

y cut at 0.049 µm

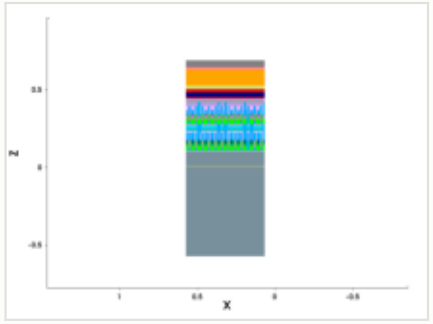

mask: layer 10201:0 (GDSII)

steps by process area

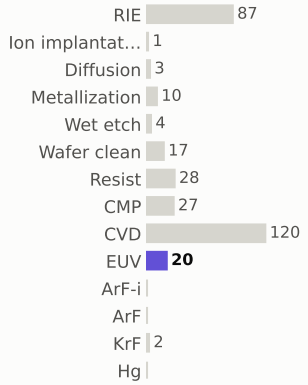

materials deposited (g)



gases emitted (g)

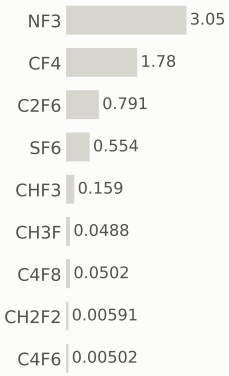

Step #3510: RIE

etch_anisotropic · RIE

1.04	394.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

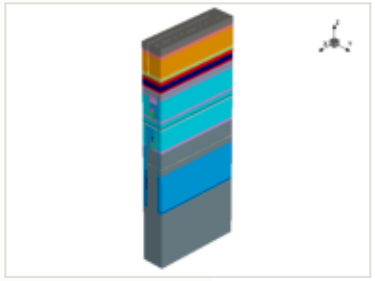

x cut at 0.385 µm

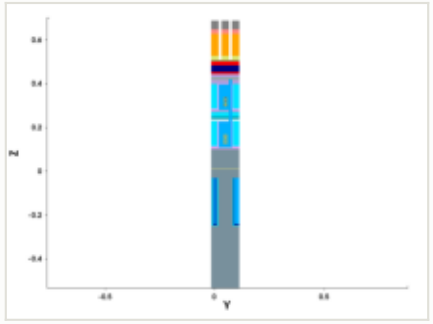

y cut at 0.049 µm

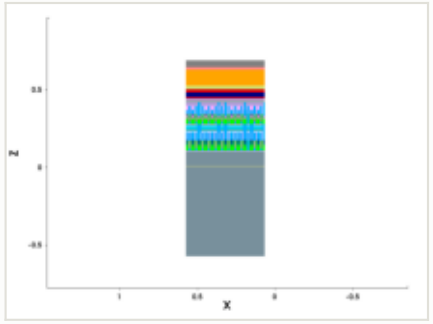

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

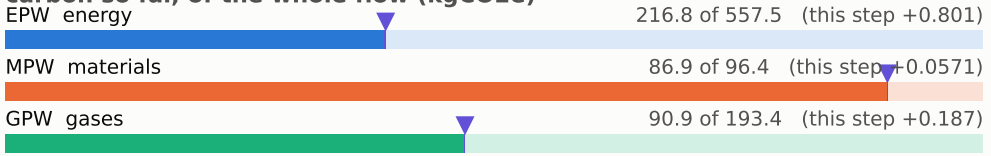

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

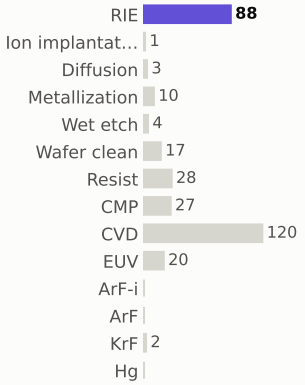

materials deposited (g)



gases emitted (g)

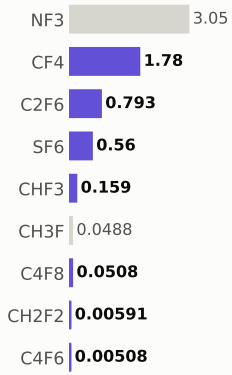

Step #3520: Wafer_clean

etch_strip · Wafer_clean

0.169	394.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

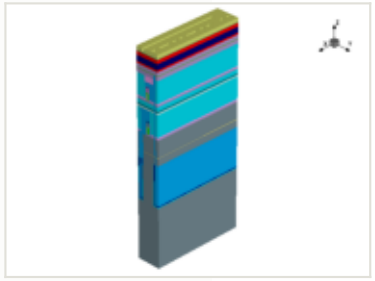

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

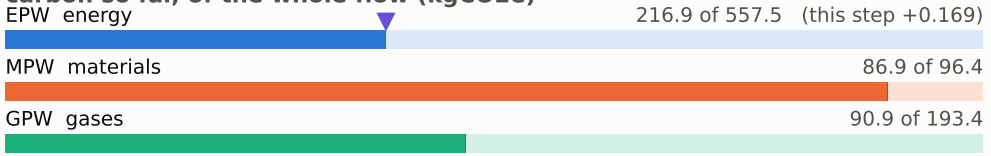

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

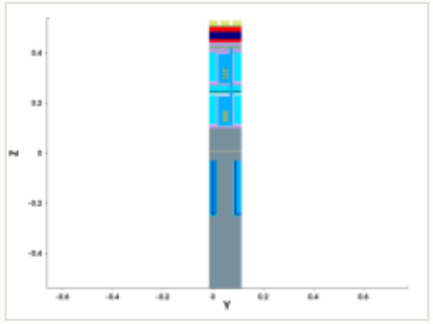

y cut at 0.049 µm

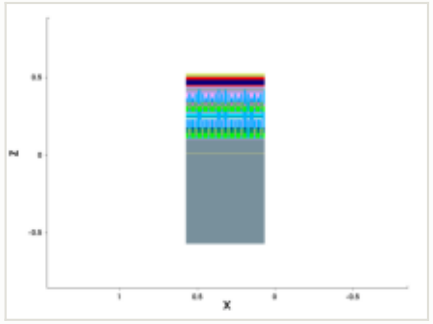

mask for this step

no mask for this step

steps by process area

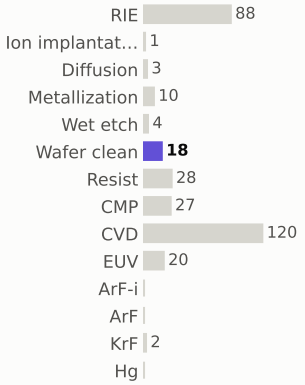

materials deposited (g)



gases emitted (g)

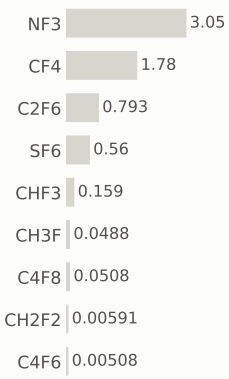

Step #3530: CVD

depo_isotropic · CVD

1.31	396.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

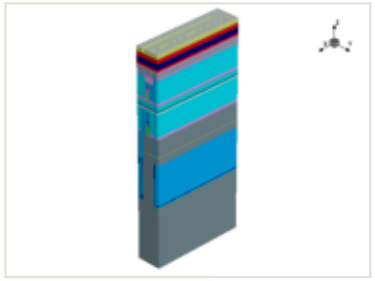

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

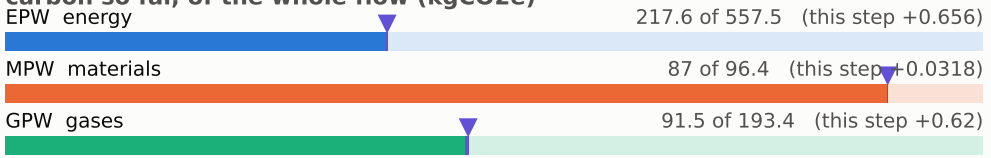

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

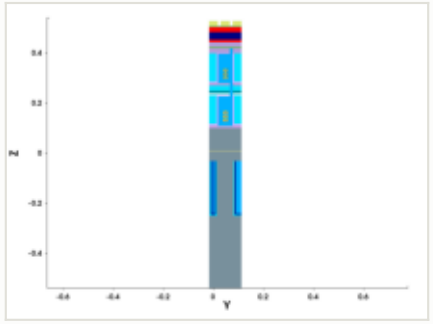

y cut at 0.049 µm

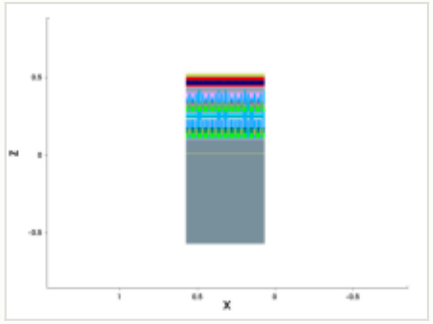

mask for this step

no mask for this step

steps by process area

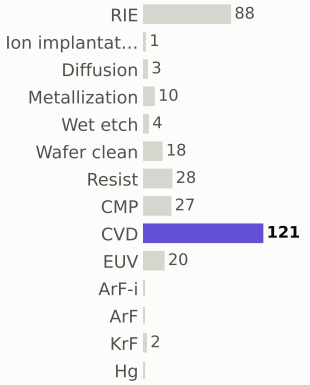

materials deposited (g)

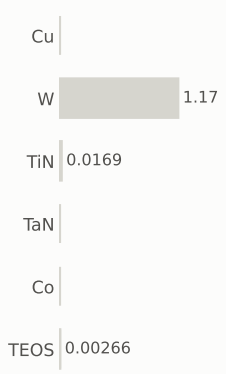

gases emitted (g)



Step #3540: RIE

etch_anisotropic · RIE

1.04	397.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

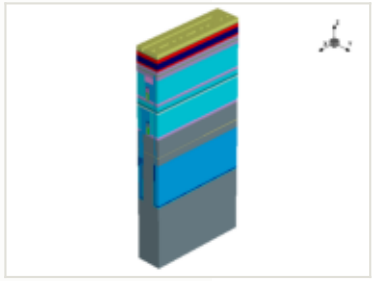

x cut at 0.385 µm

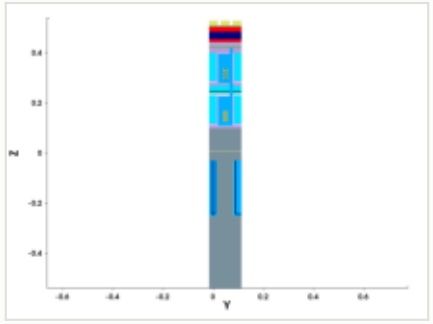

y cut at 0.049 µm

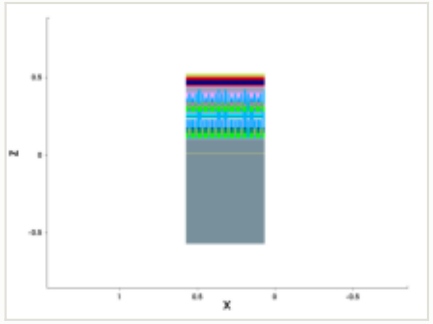

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 218.4 of 557.5 (this step +0.801)

MPW materials — 87 of 96.4 (this step +0.0571)

GPW gases — 91.7 of 193.4 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

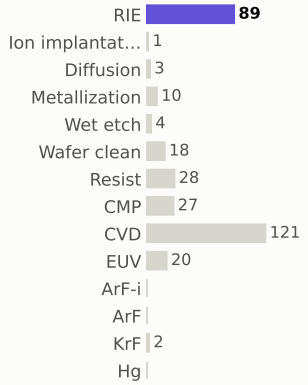

materials deposited (g)

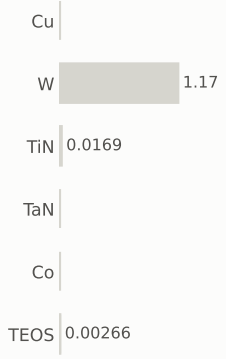

gases emitted (g)

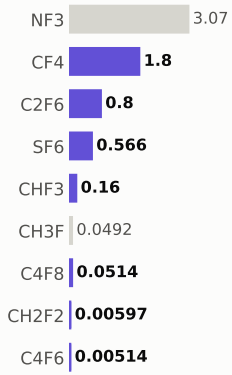

Step #3550: Wafer_clean

clean · Wafer_clean

0.169	397.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

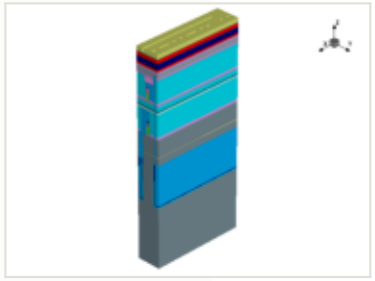

x cut at 0.385 µm

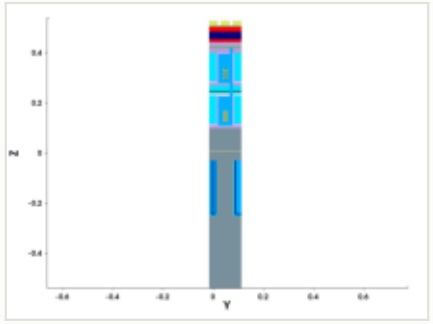

y cut at 0.049 µm

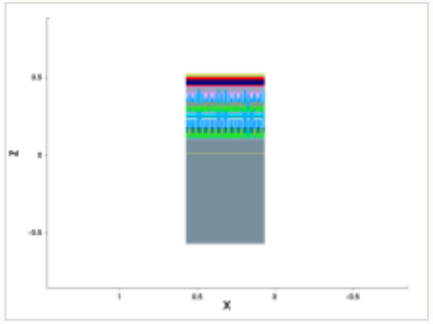

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

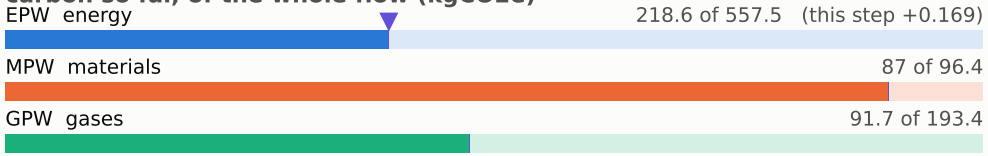

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

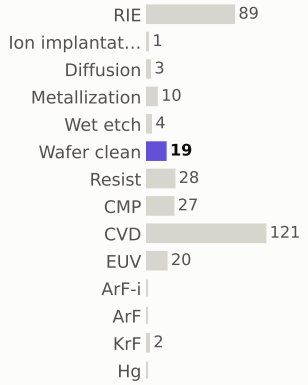

materials deposited (g)



gases emitted (g)

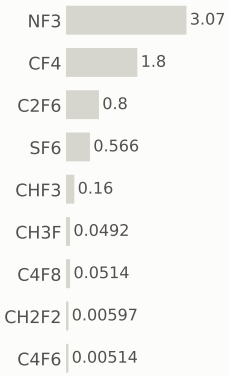

Step #3560: Resist

depo_fill · Resist

0.169	397.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

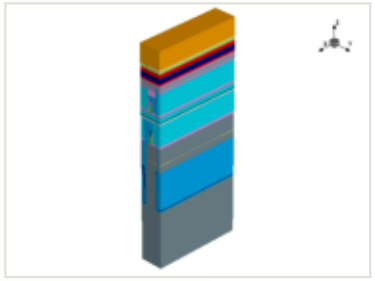

x cut at 0.385 µm

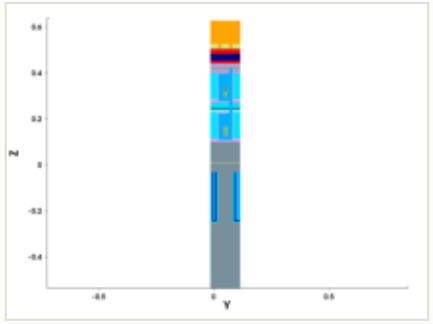

y cut at 0.049 µm

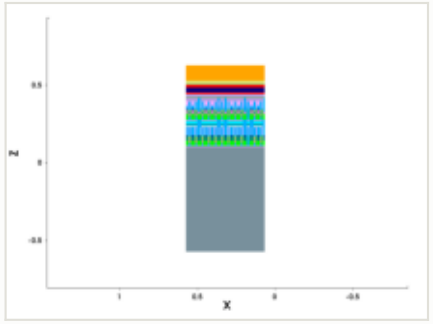

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

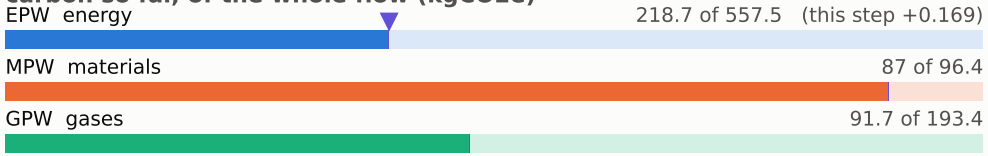

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

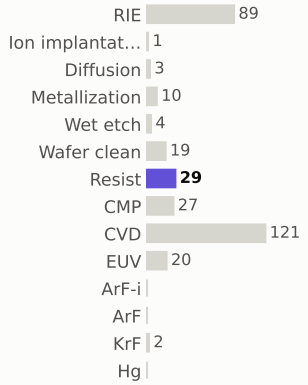

materials deposited (g)



gases emitted (g)

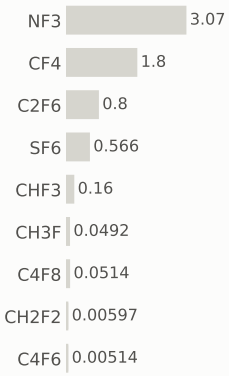

Step #3570: CVD

depo_fill · CVD

1.31	398.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

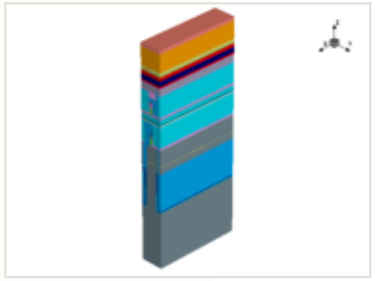

x cut at 0.385 µm

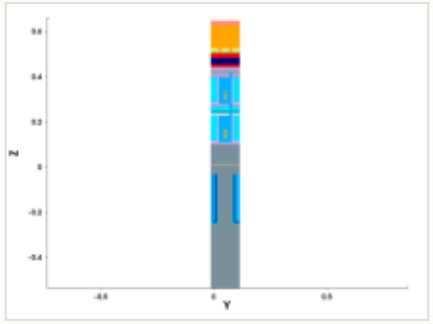

y cut at 0.049 µm

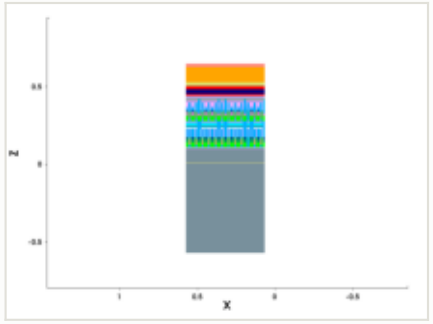

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

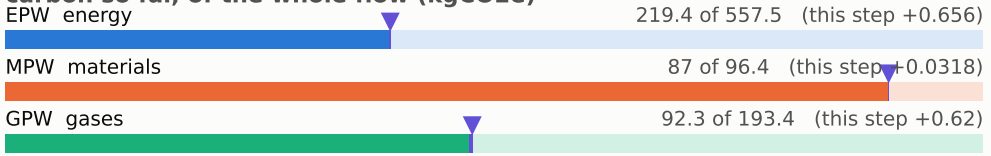

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

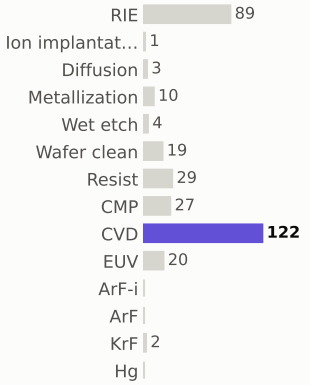

materials deposited (g)

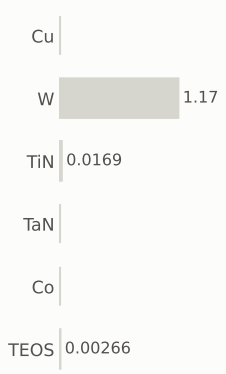

gases emitted (g)

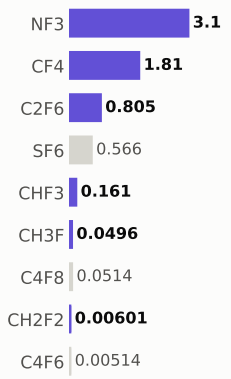

Step #3580: Wafer_clean

clean · Wafer_clean

0.169	399.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

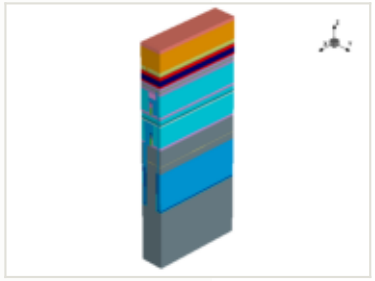

x cut at 0.385 µm

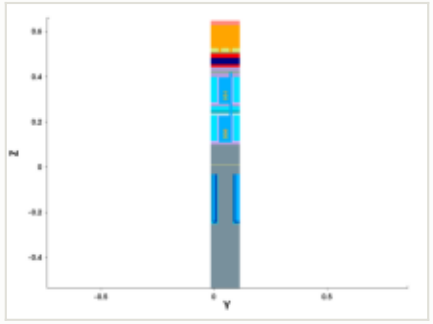

y cut at 0.049 µm

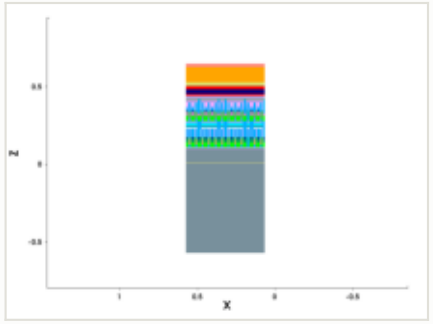

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

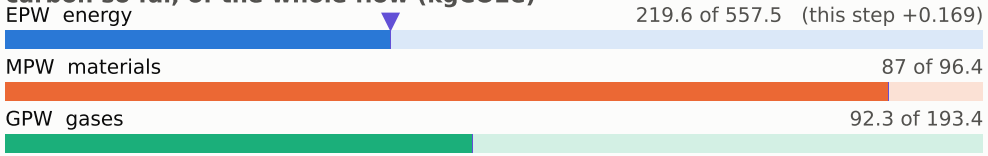

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

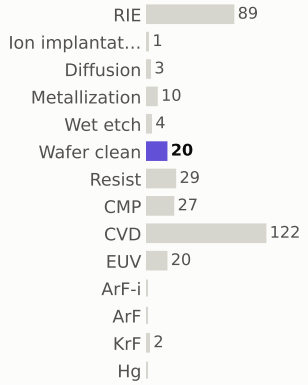

materials deposited (g)



gases emitted (g)

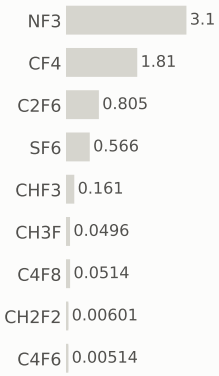

Step #3590: EUV

litho_patterning · EUV

1.96	400.9	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

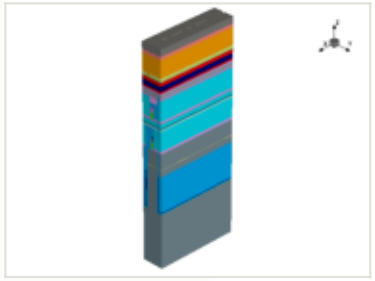

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

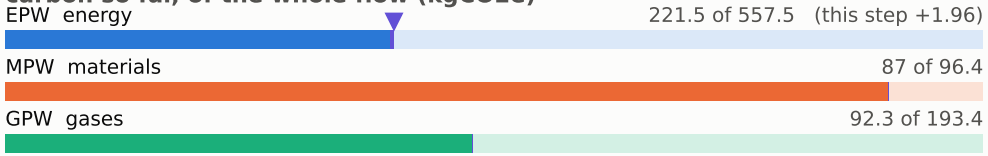

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

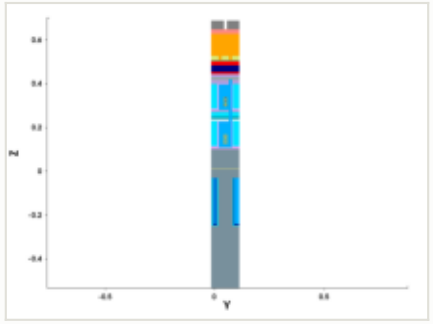

y cut at 0.049 µm

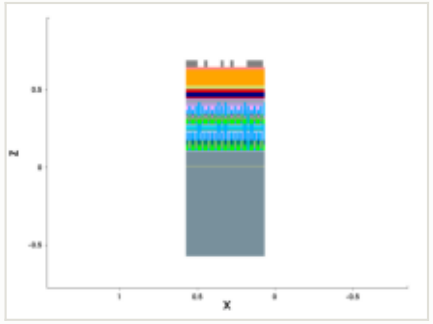

mask: layer 10202:0 (GDSII)

steps by process area

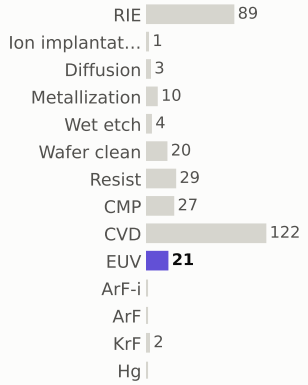

materials deposited (g)

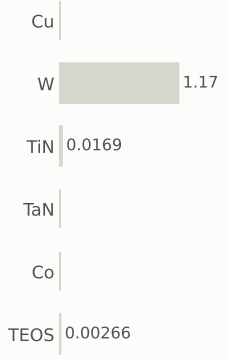

gases emitted (g)

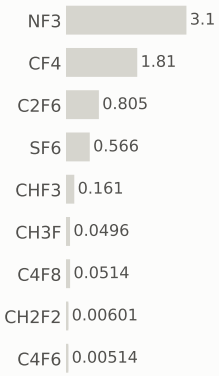

Step #3600: RIE

etch_anisotropic · RIE

1.04	402.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

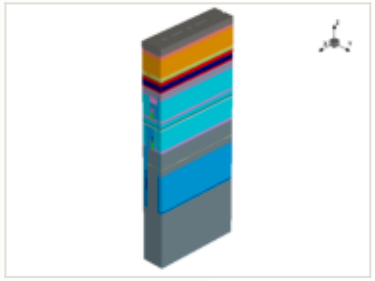

x cut at 0.385 µm

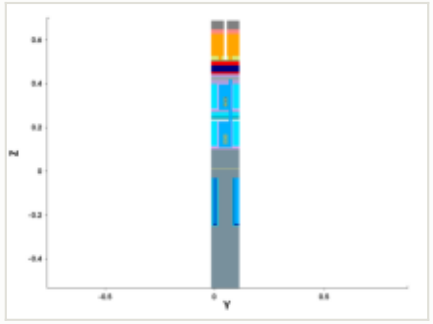

y cut at 0.049 µm

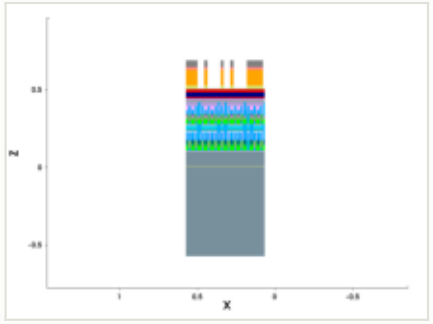

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

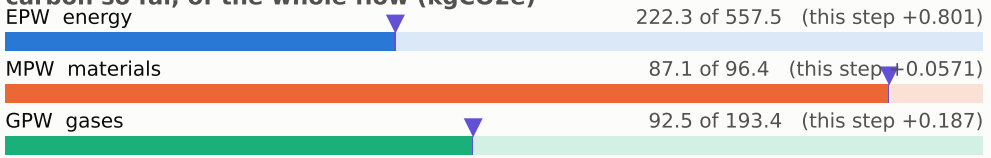

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

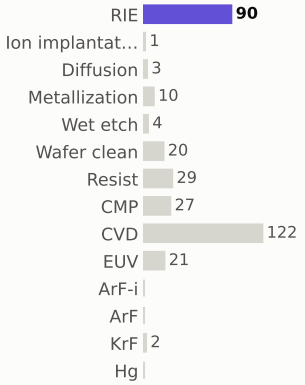

materials deposited (g)



gases emitted (g)

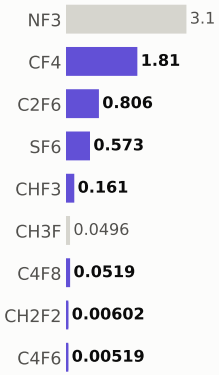

Step #3610: Wafer_clean

etch_strip · Wafer_clean

0.169	402.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

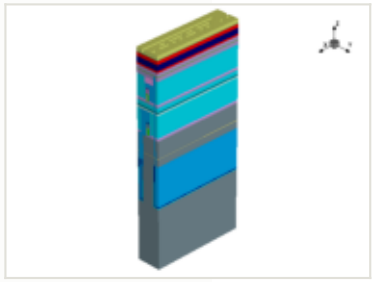

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

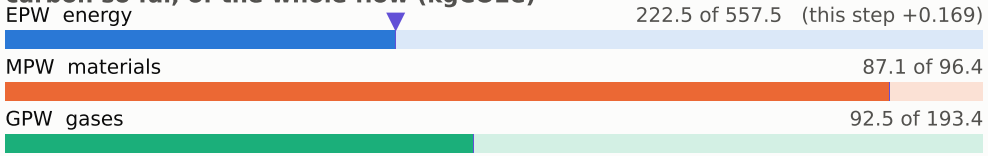

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

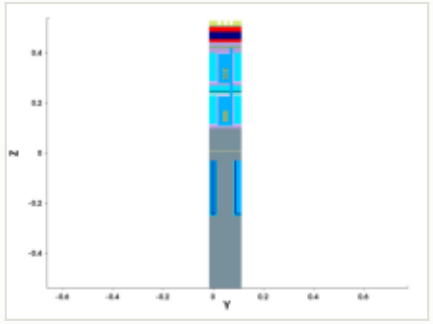

y cut at 0.049 µm

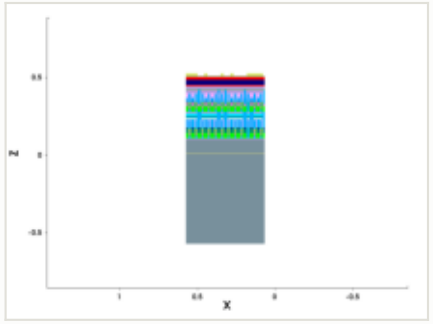

mask for this step

no mask for this step

steps by process area

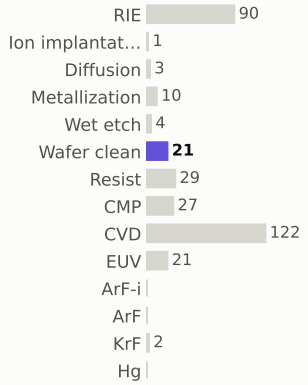

materials deposited (g)



gases emitted (g)

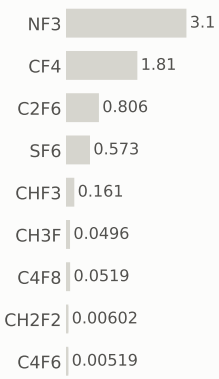

Step #3620: RIE

etch_anisotropic · RIE

1.04	403.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

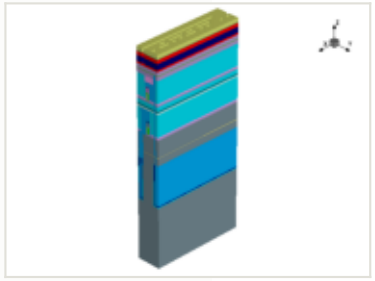

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

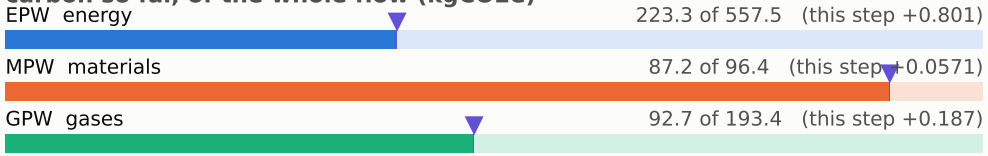

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

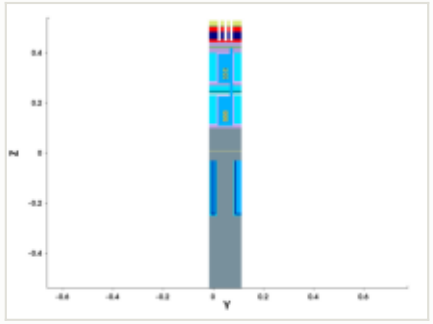

y cut at 0.049 µm

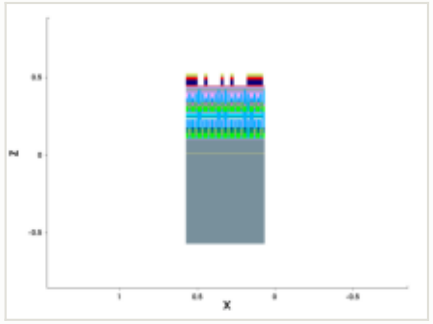

mask for this step

no mask for this step

steps by process area

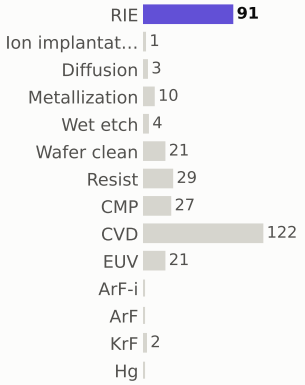

materials deposited (g)

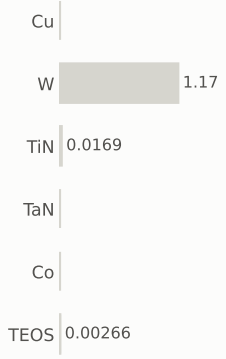

gases emitted (g)



Step #3630: Wafer_clean

clean · Wafer_clean

0.169	403.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

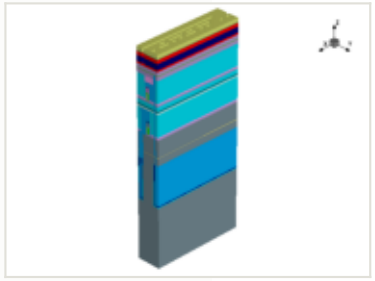

x cut at 0.385 µm

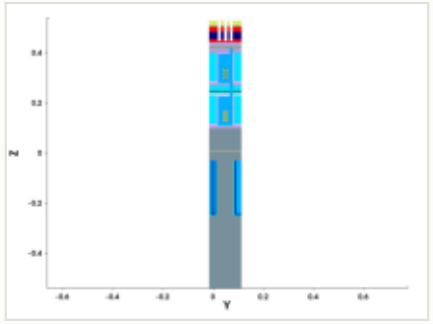

y cut at 0.049 µm

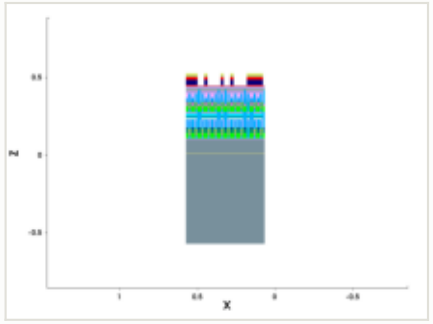

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

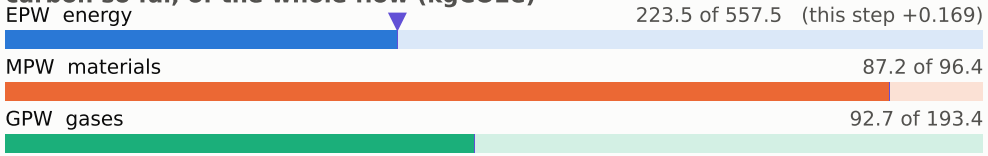

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

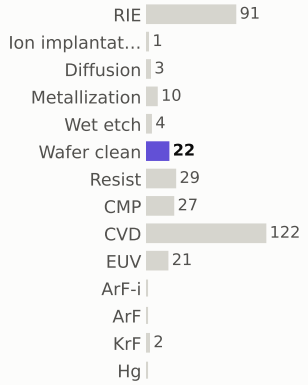

materials deposited (g)



gases emitted (g)

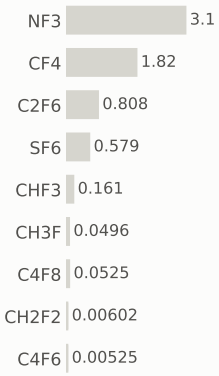

Step #3640: RIE

etch_anisotropic · RIE

1.04	404.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

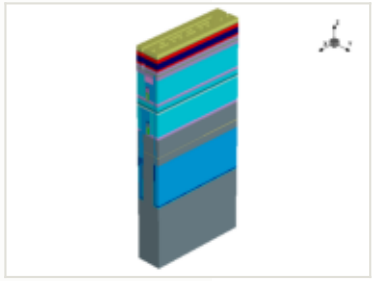

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

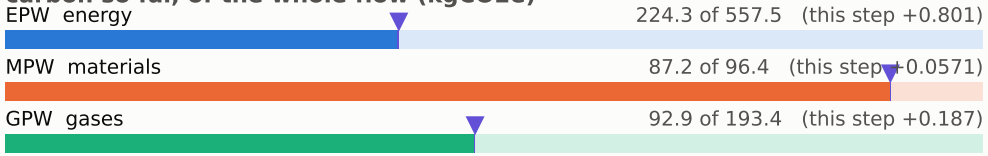

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

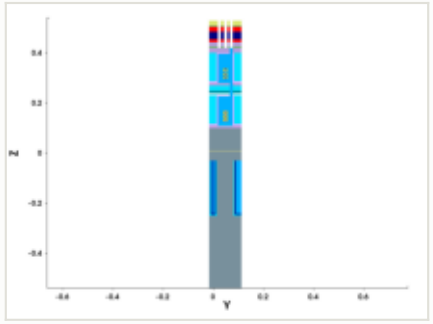

y cut at 0.049 µm

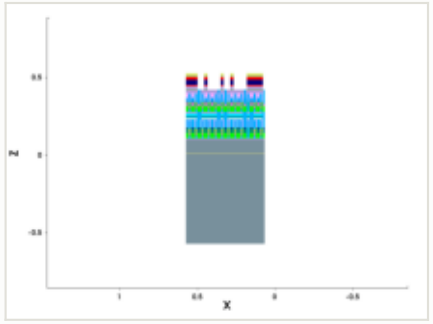

mask for this step

no mask for this step

steps by process area

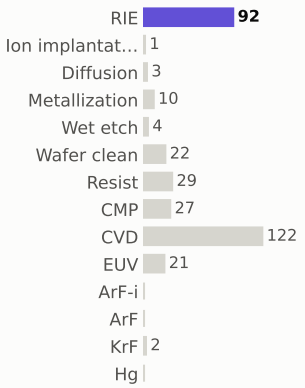

materials deposited (g)

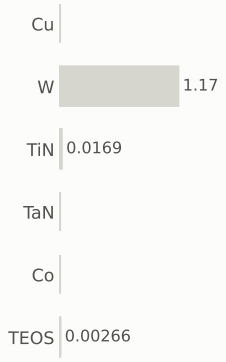

gases emitted (g)



Step #3650: Wafer_clean

clean · Wafer_clean

0.169	404.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

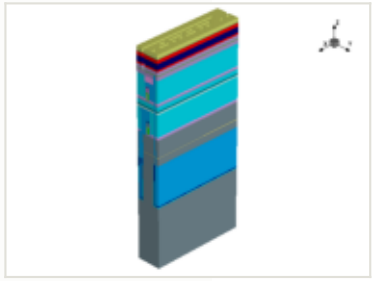

x cut at 0.385 µm

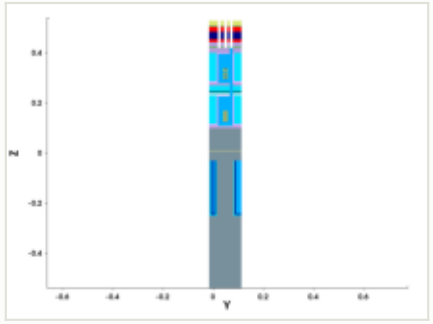

y cut at 0.049 µm

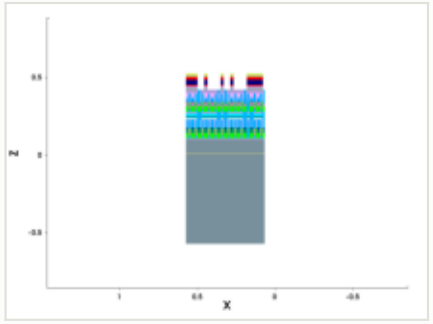

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

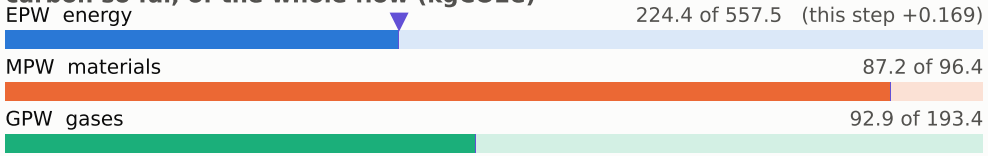

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

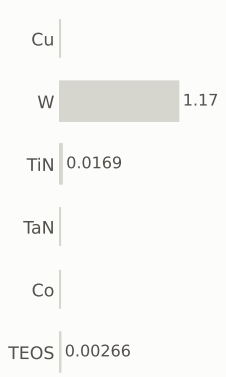

gases emitted (g)



Step #3660: Metallization

depo_ellipsoidal · Metallization

1.2	405.8	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

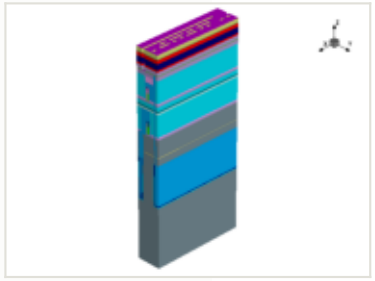

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

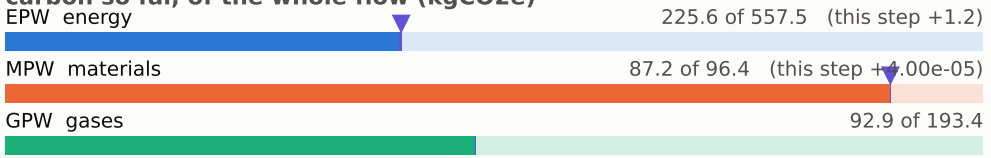

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

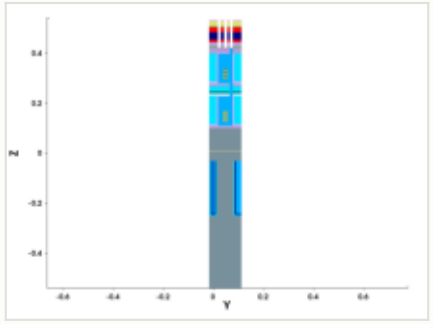

y cut at 0.049 µm

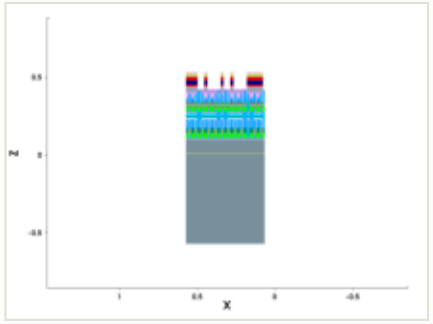

mask for this step

no mask for this step

steps by process area

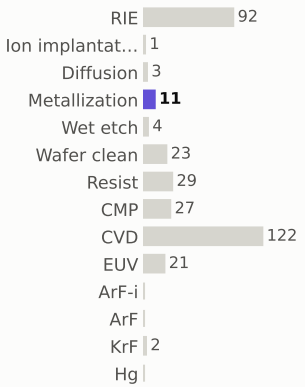

materials deposited (g)

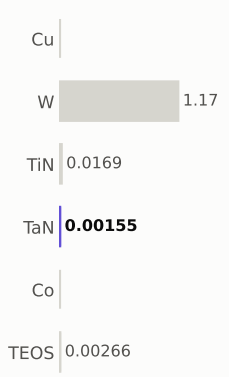

gases emitted (g)



Step #3670: Metallization

depo_fill · Metallization

1.21	407.0	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

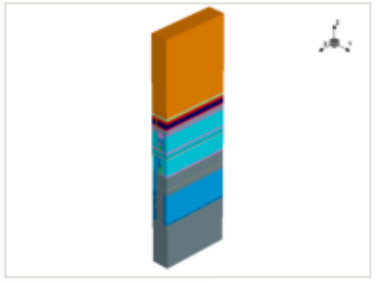

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

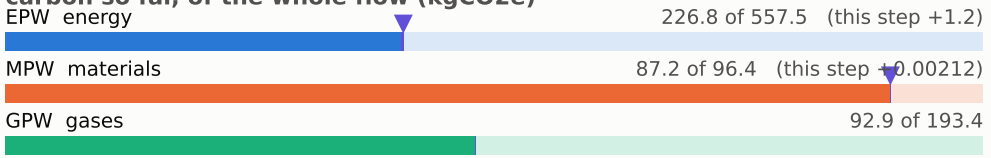

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

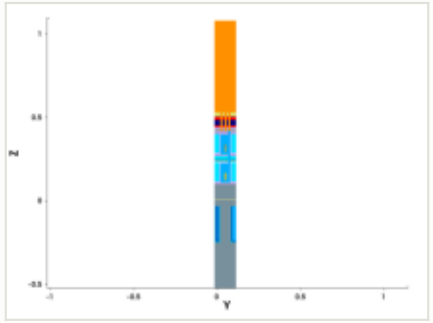

y cut at 0.049 µm

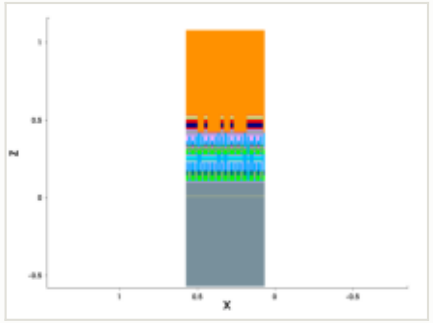

mask for this step

no mask for this step

steps by process area

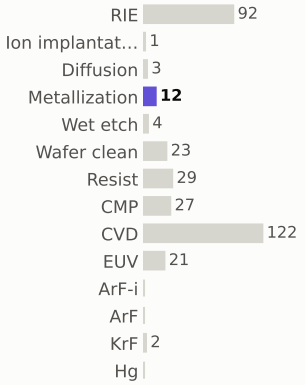

materials deposited (g)

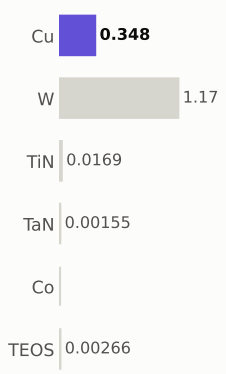

gases emitted (g)

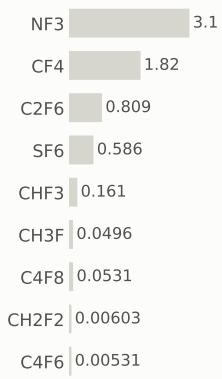

Step #3680: Diffusion

treatment · Diffusion

0.801	407.8	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

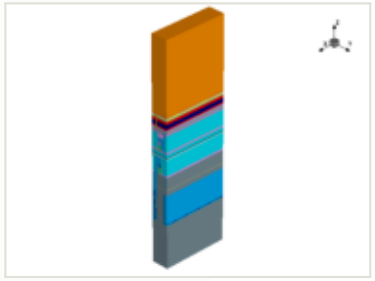

x cut at 0.385 µm

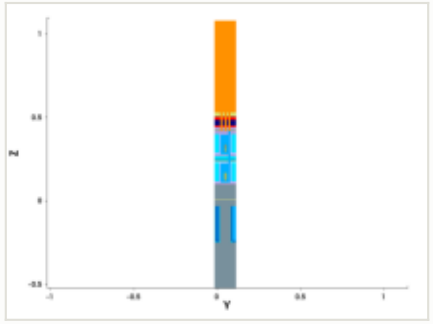

y cut at 0.049 µm

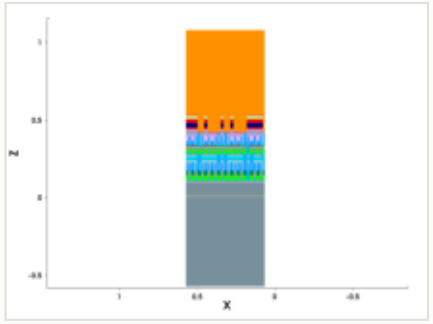

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

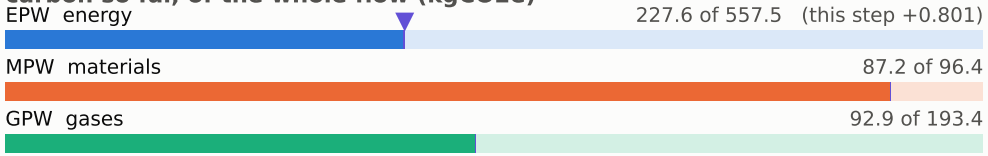

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

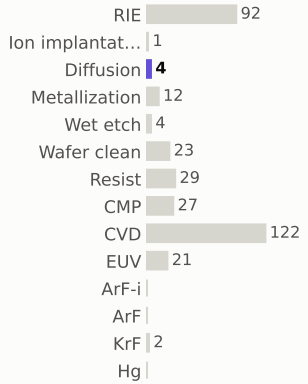

materials deposited (g)



gases emitted (g)

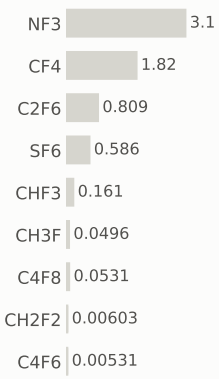

Step #3690: CMP

etch_cmp · CMP

0.169	407.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

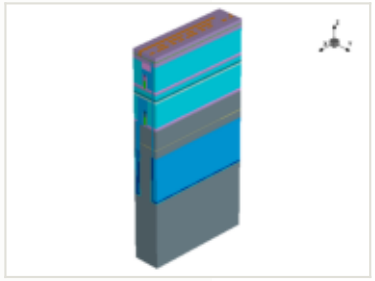

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

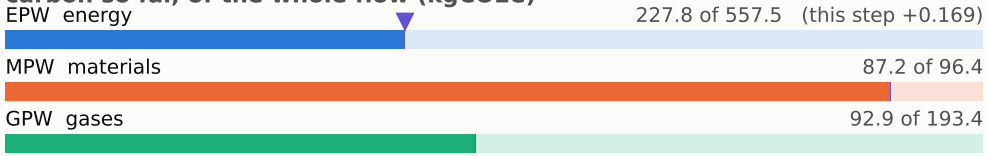

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

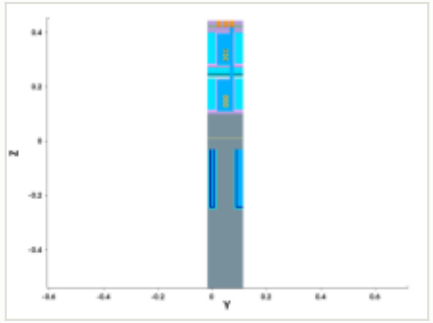

y cut at 0.049 µm

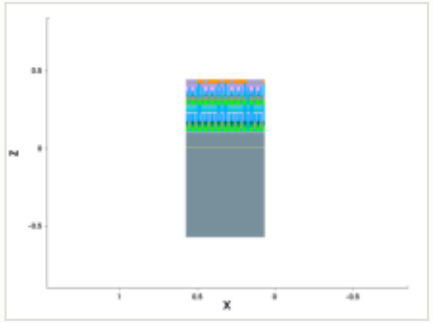

mask for this step

no mask for this step

steps by process area

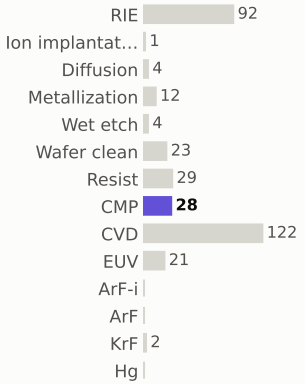

materials deposited (g)



gases emitted (g)



Step #3700: Metallization

depo_isotropic · Metallization

1.2	409.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

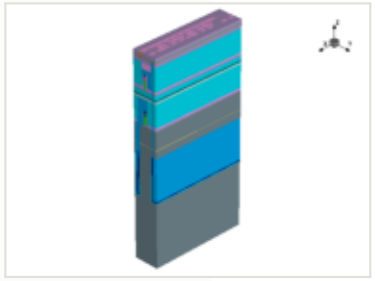

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

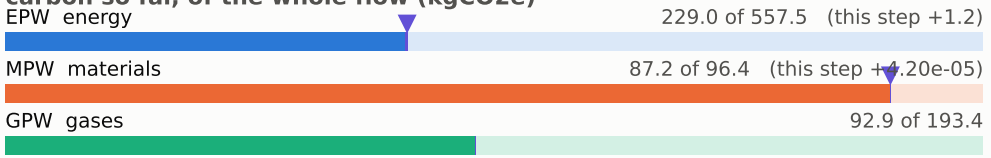

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

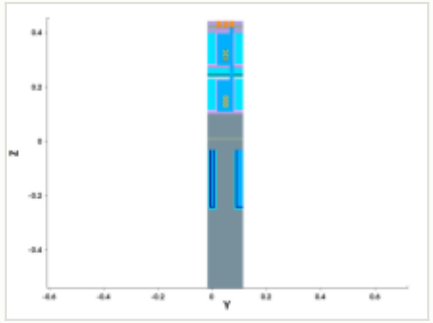

y cut at 0.049 µm

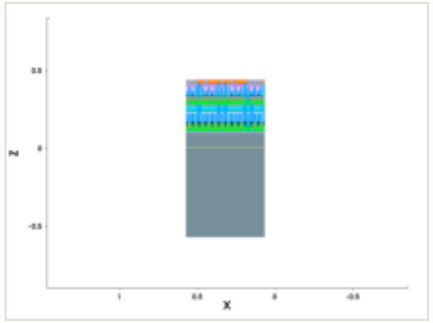

mask for this step

no mask for this step

steps by process area

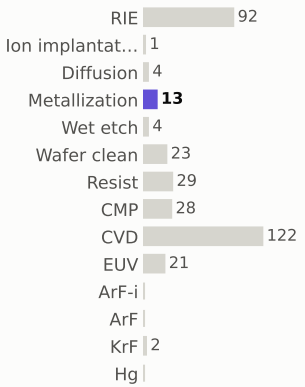

materials deposited (g)

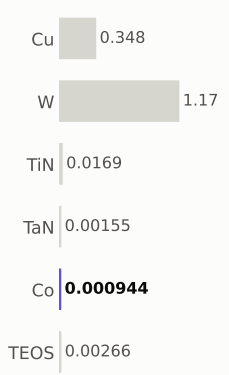

gases emitted (g)



Step #3720: CVD

depo_fill · CVD

1.31	410.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

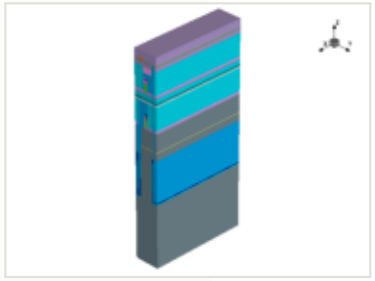

this step

process area	CVD
material	—
thickness	0.024 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

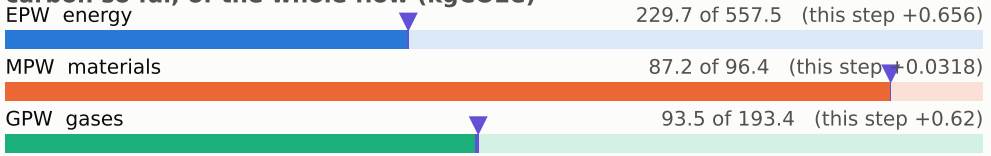

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

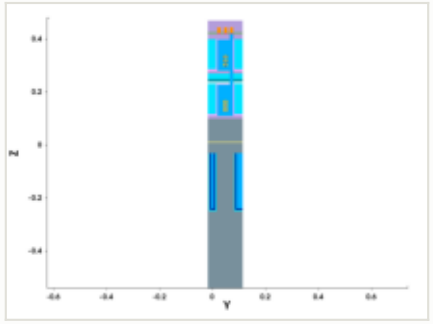

y cut at 0.049 µm

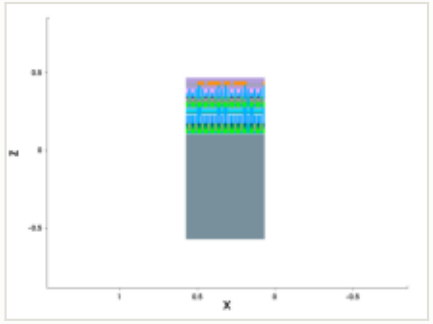

mask for this step

no mask for this step

steps by process area

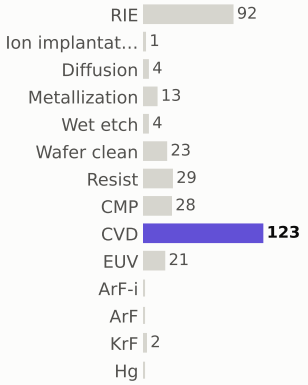

materials deposited (g)

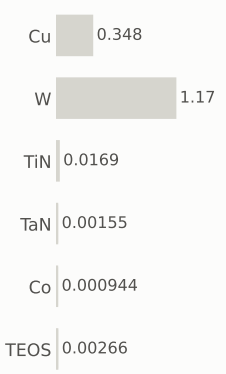

gases emitted (g)

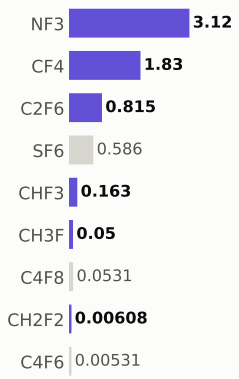

Step #3730: Diffusion

treatment · Diffusion

0.801	411.2	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

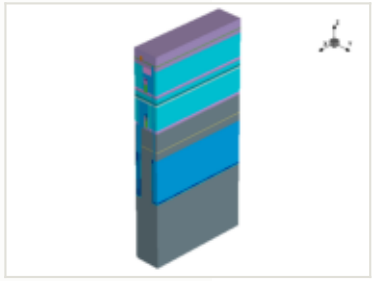

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

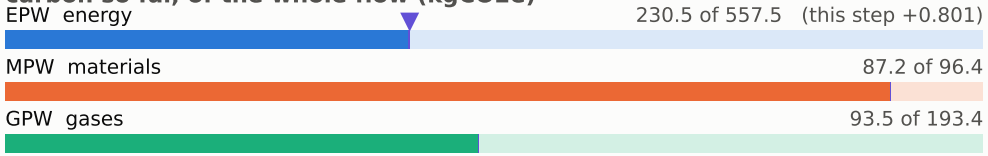

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

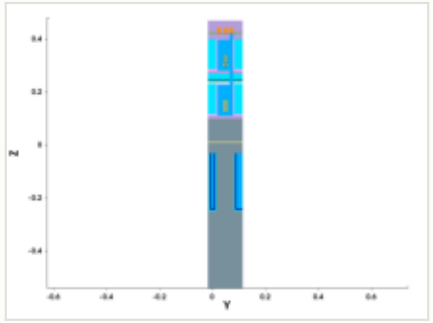

y cut at 0.049 µm

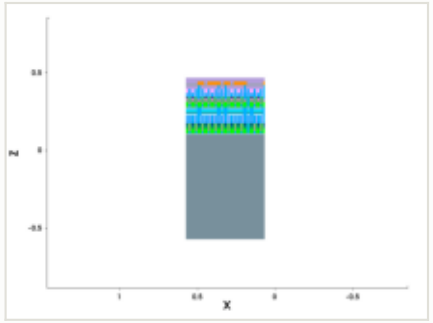

mask for this step

no mask for this step

steps by process area

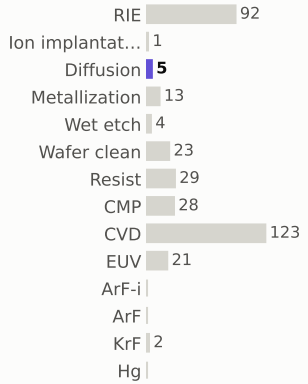

materials deposited (g)



gases emitted (g)



Step #3740: Wafer_clean

clean · Wafer_clean

0.169	411.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

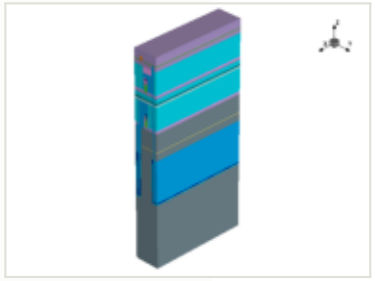

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

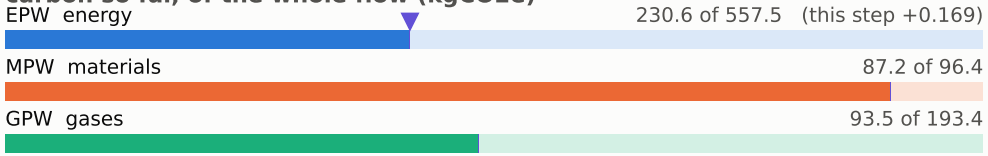

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

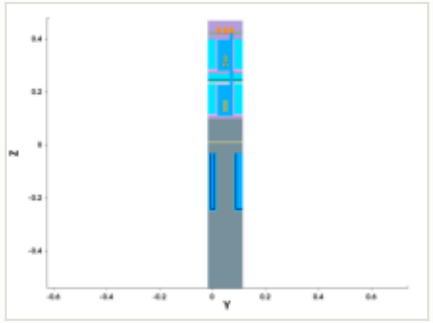

y cut at 0.049 µm

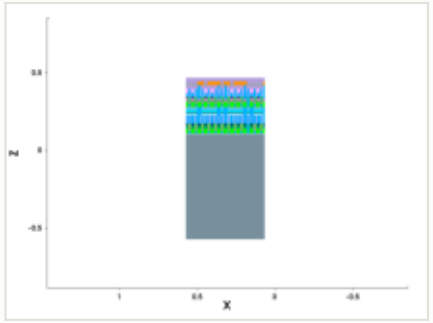

mask for this step

no mask for this step

steps by process area

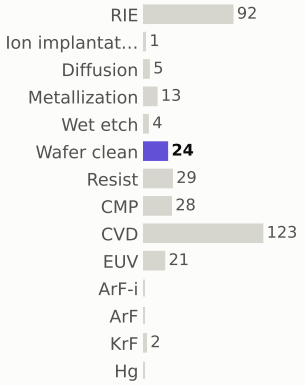

materials deposited (g)

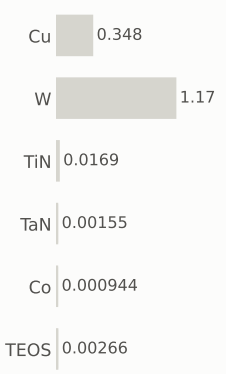

gases emitted (g)

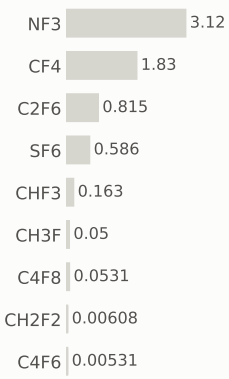

Step #3750: CVD

depo_fill · CVD

1.31	412.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

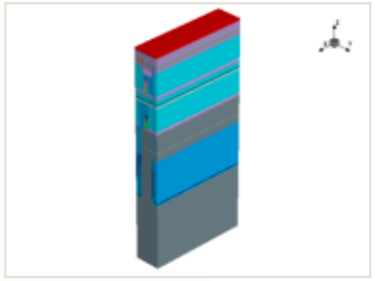

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

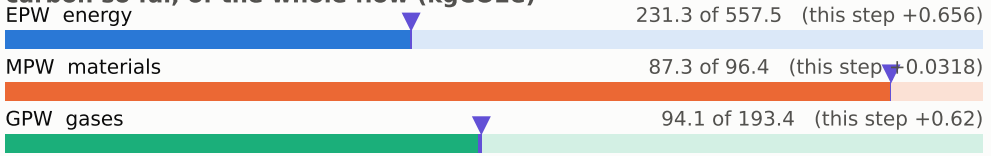

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

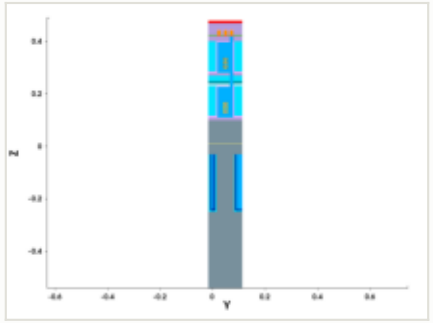

y cut at 0.049 µm

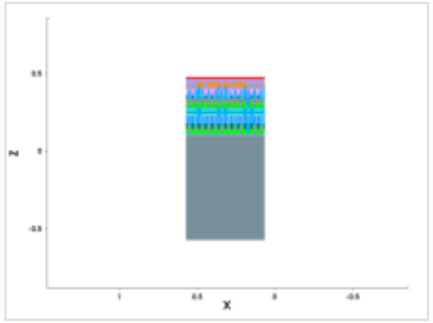

mask for this step

no mask for this step

steps by process area

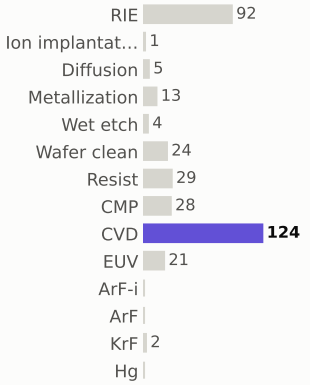

materials deposited (g)

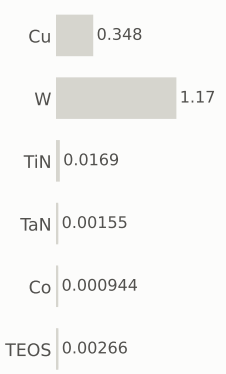

gases emitted (g)

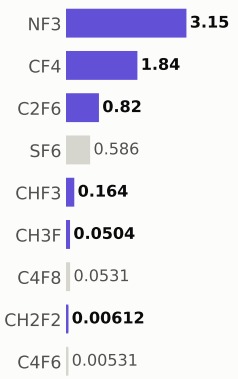

Step #3760: Resist

depo_fill · Resist

0.169	412.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

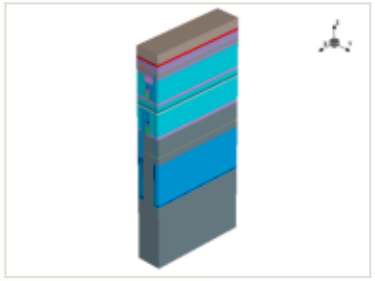

this step

process area	Resist
material	—
thickness	0.05 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

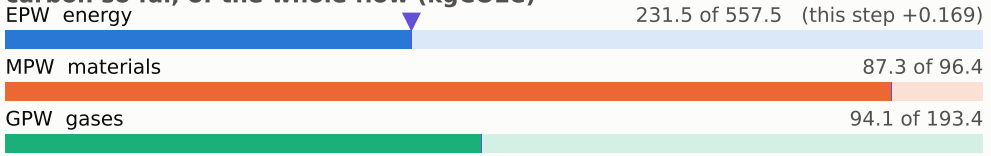

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

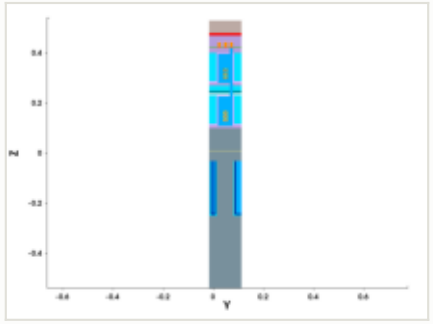

y cut at 0.049 µm

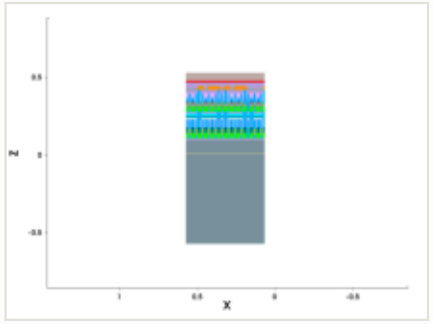

mask for this step

no mask for this step

steps by process area

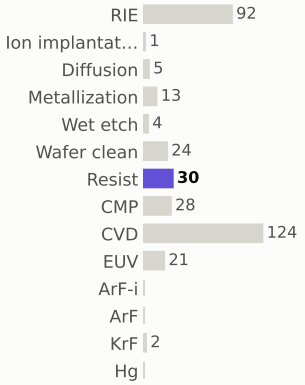

materials deposited (g)

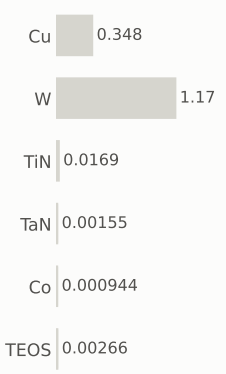

gases emitted (g)

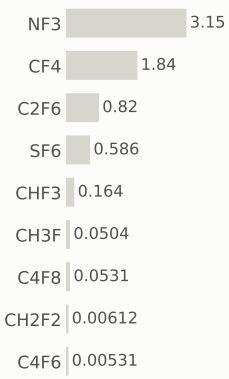

Step #3770: CVD

depo_fill · CVD

1.31	414.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

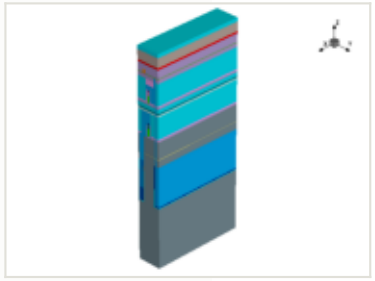

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

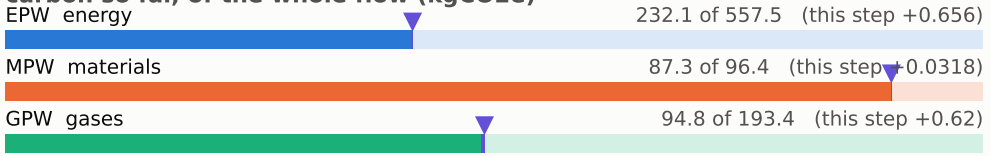

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

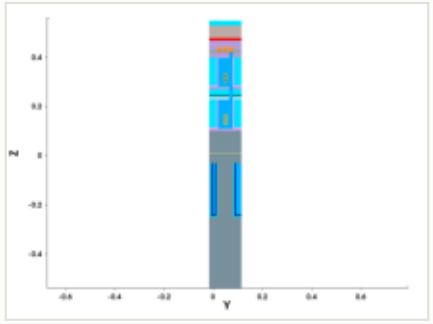

y cut at 0.049 µm

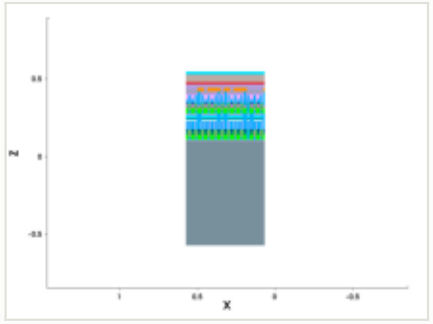

mask for this step

no mask for this step

steps by process area

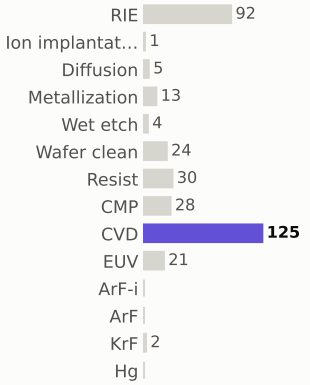

materials deposited (g)

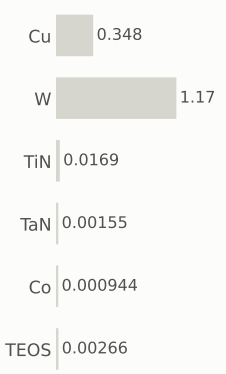

gases emitted (g)

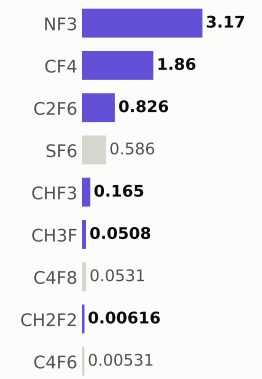

Step #3780: CVD

depo_fill · CVD

1.31	415.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

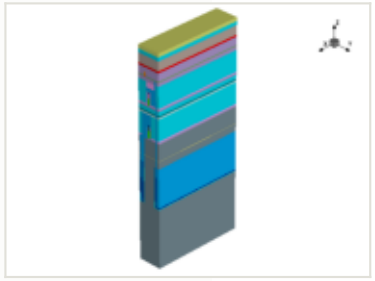

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

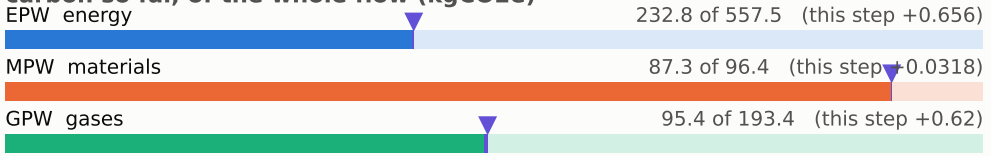

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

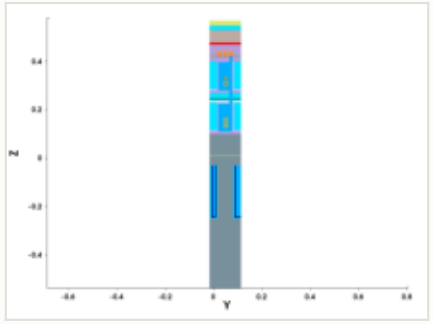

y cut at 0.049 µm

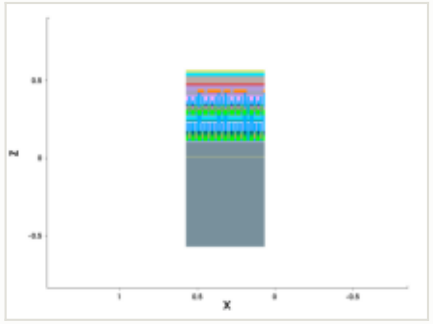

mask for this step

no mask for this step

steps by process area

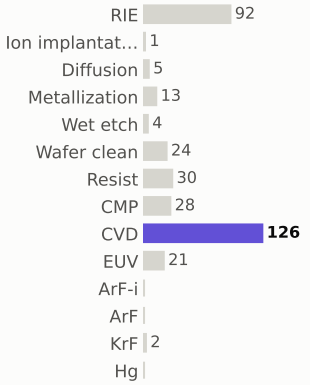

materials deposited (g)

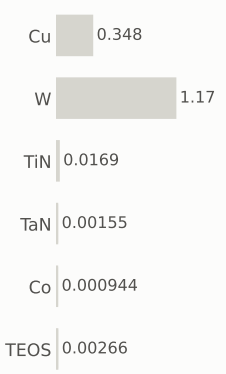

gases emitted (g)

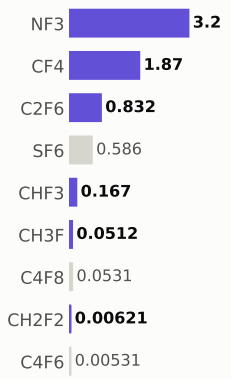

Step #3790: Resist

depo_fill · Resist

0.169	415.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

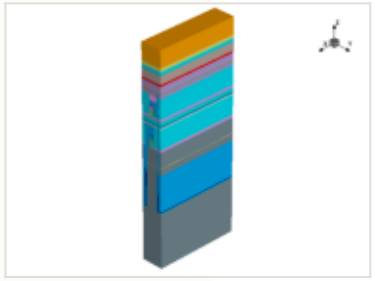

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

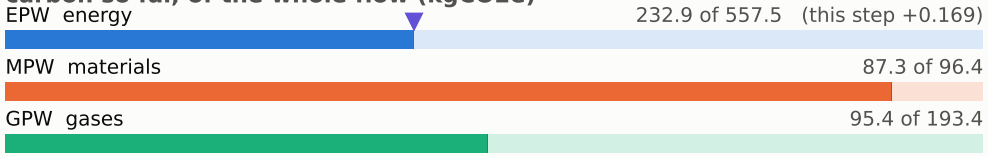

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

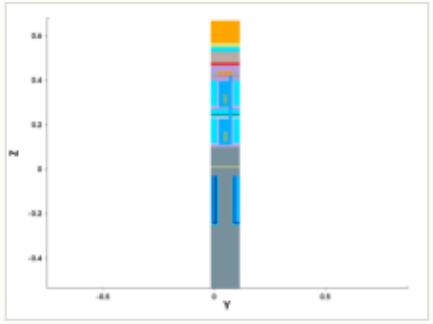

y cut at 0.049 µm

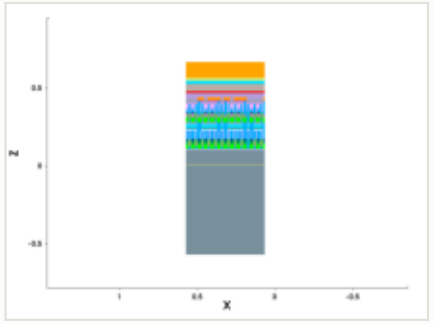

mask for this step

no mask for this step

steps by process area

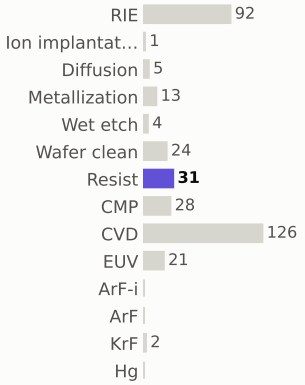

materials deposited (g)

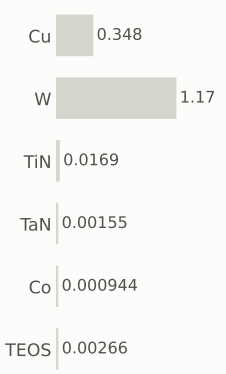

gases emitted (g)

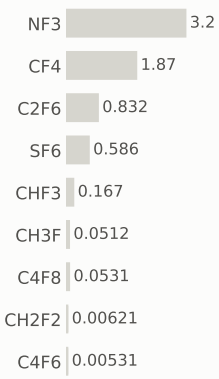

Step #3800: CVD

depo_fill · CVD

1.31	417.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

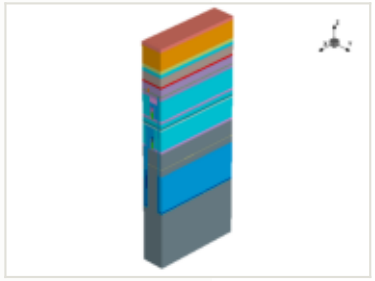

x cut at 0.385 µm

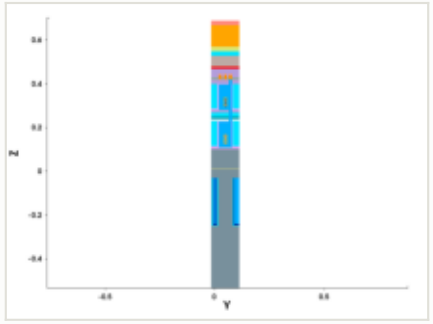

y cut at 0.049 µm

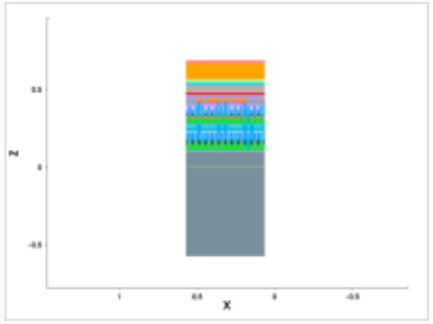

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

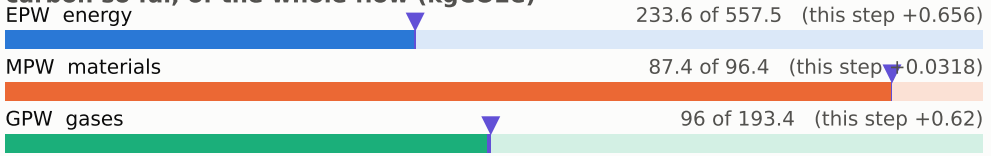

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

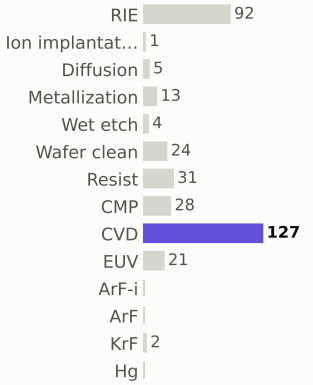

materials deposited (g)

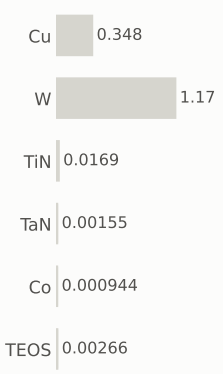

gases emitted (g)



Step #3810: Wafer_clean

clean · Wafer_clean

0.169	417.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

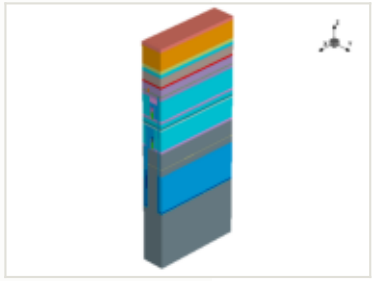

x cut at 0.385 µm

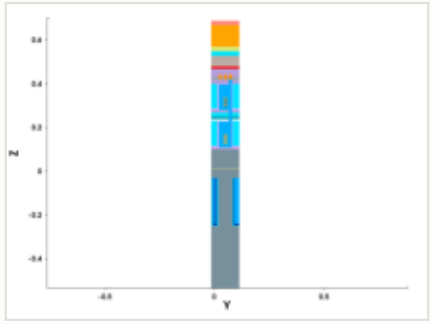

y cut at 0.049 µm

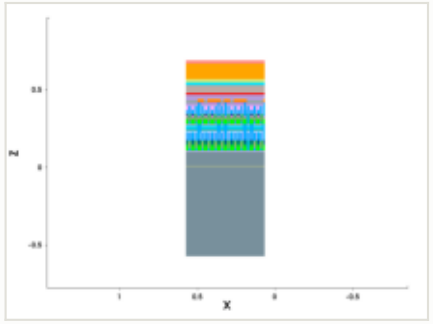

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

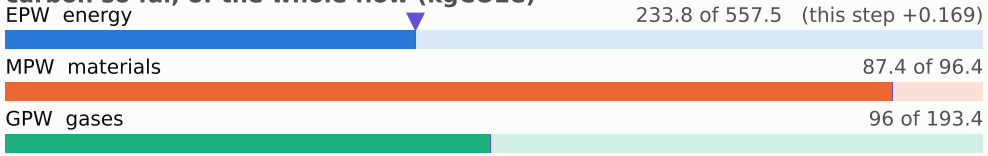

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

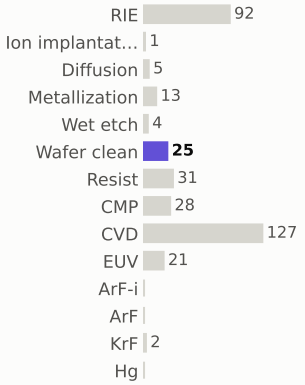

materials deposited (g)

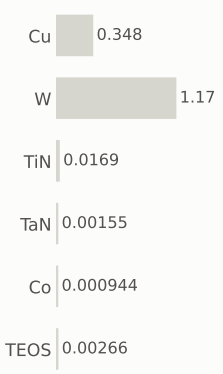

gases emitted (g)

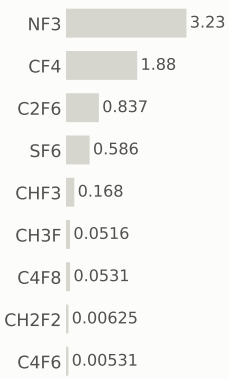

Step #3820: EUV

litho_patterning · EUV

1.96	419.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

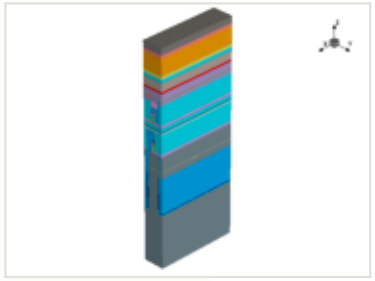

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

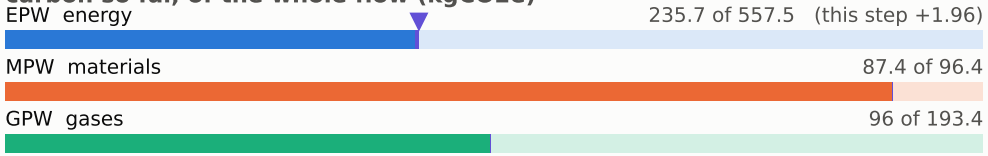

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

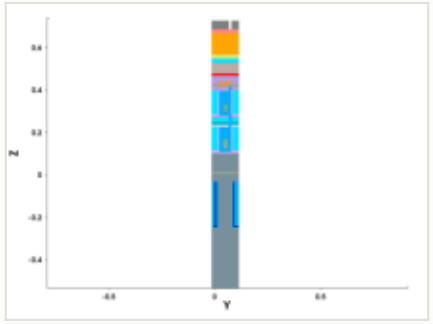

y cut at 0.049 µm

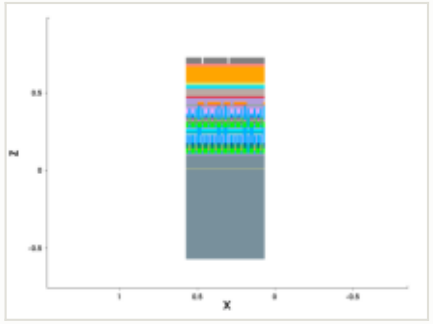

mask: layer 10221:0 (GDSII)

steps by process area

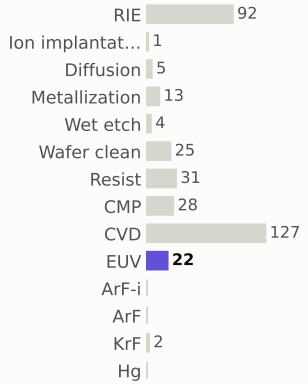

materials deposited (g)

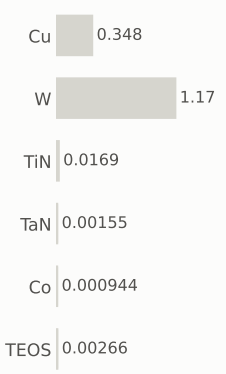

gases emitted (g)

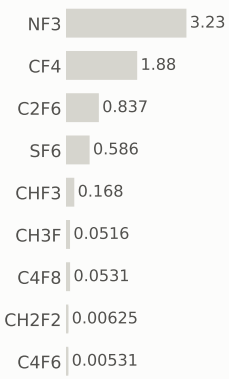

Step #3830: RIE

etch_anisotropic · RIE

1.04	420.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

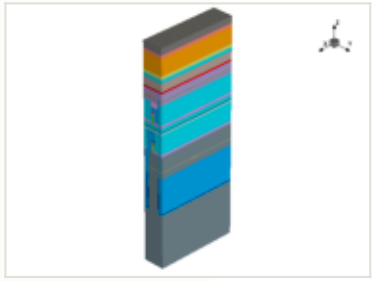

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

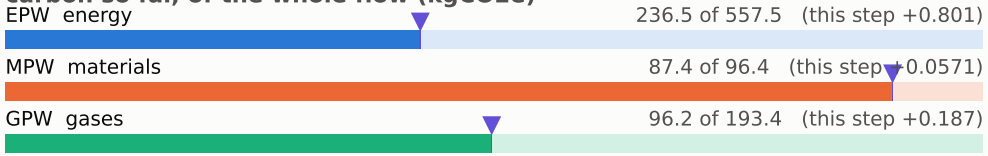

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

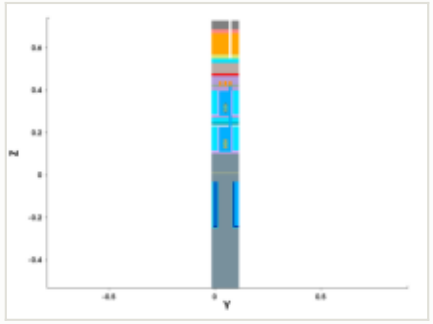

y cut at 0.049 µm

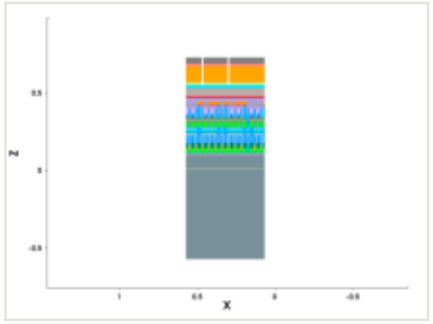

mask for this step

no mask for this step

steps by process area

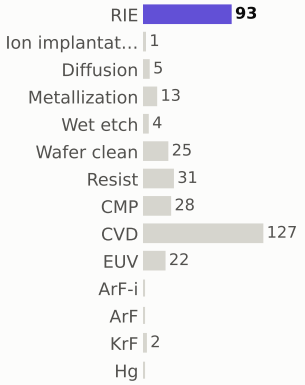

materials deposited (g)

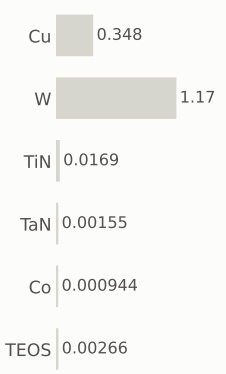

gases emitted (g)

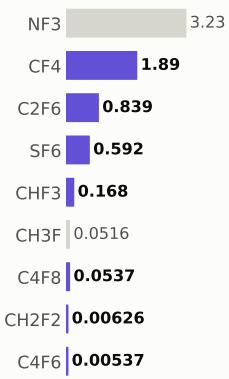

Step #3840: Wafer_clean

etch_strip · Wafer_clean

0.169	420.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

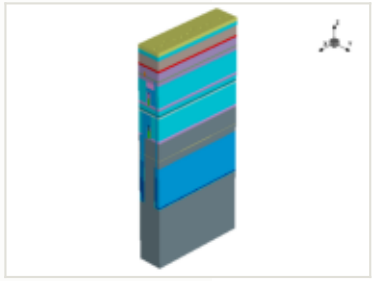

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

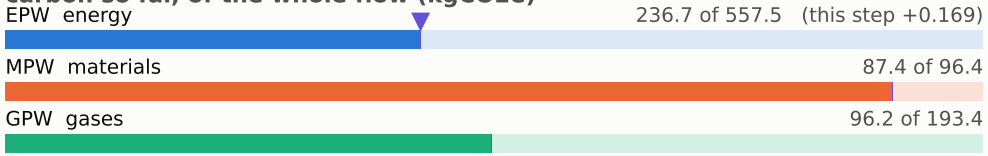

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

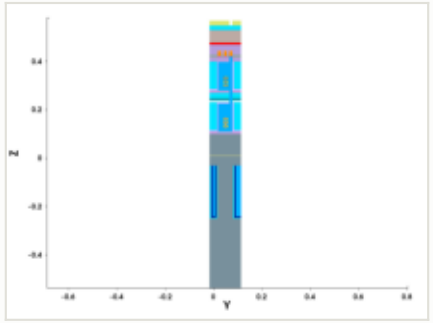

y cut at 0.049 µm

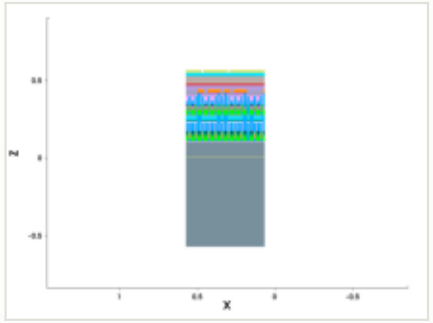

mask for this step

no mask for this step

steps by process area

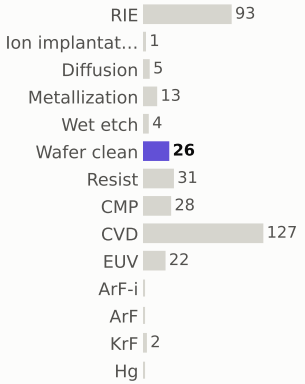

materials deposited (g)



gases emitted (g)



Step #3850: Resist

depo_fill · Resist

0.169	420.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

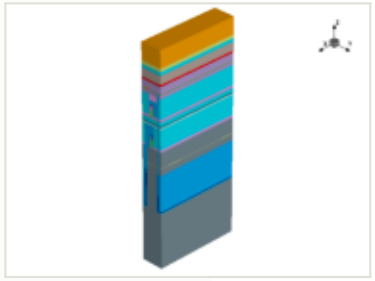

x cut at 0.385 µm

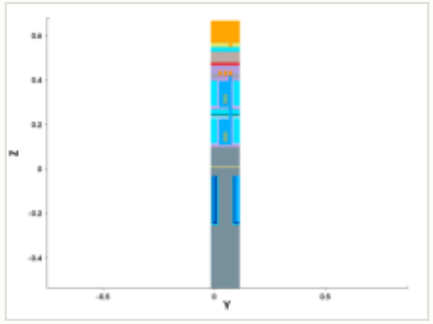

y cut at 0.049 µm

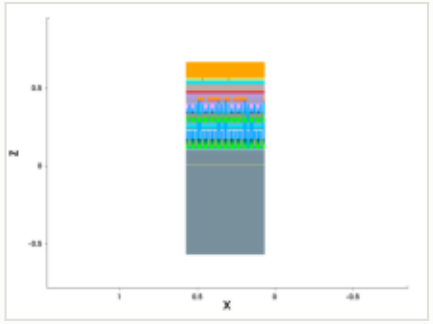

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

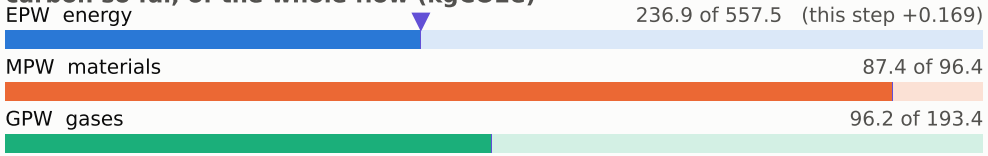

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

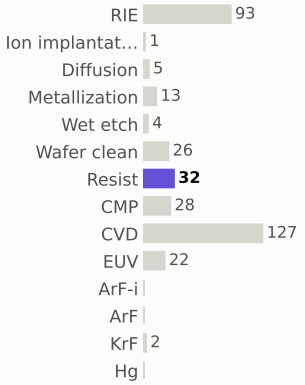

materials deposited (g)

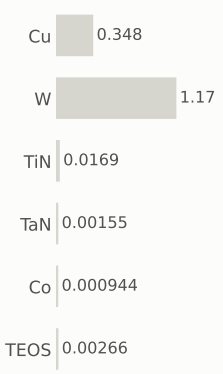

gases emitted (g)

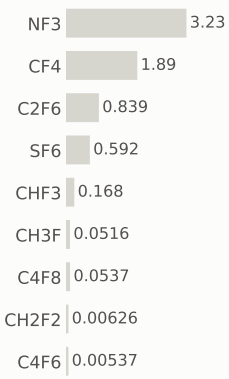

Step #3860: CVD

depo_fill · CVD

1.31	421.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

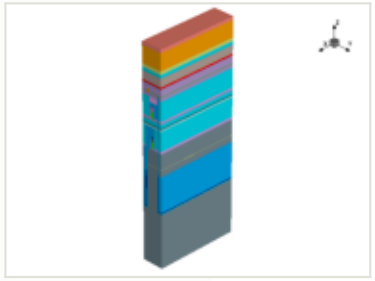

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

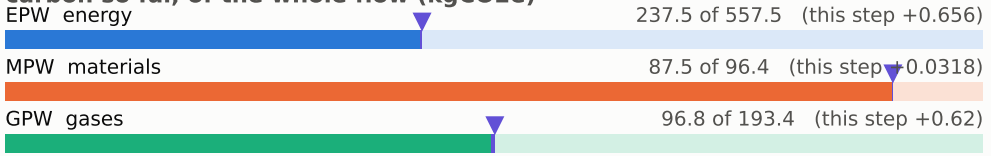

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

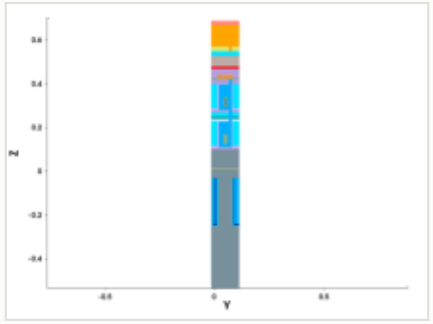

y cut at 0.049 µm

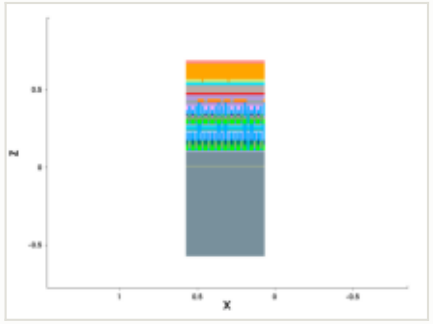

mask for this step

no mask for this step

steps by process area

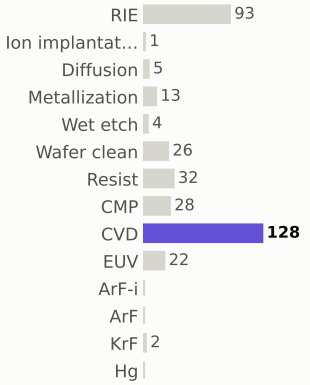

materials deposited (g)

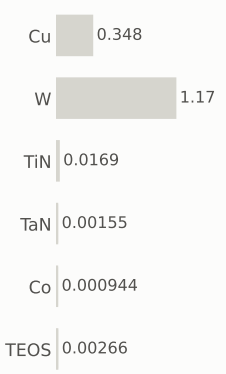

gases emitted (g)

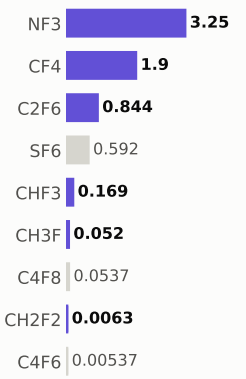

Step #3870: Wafer_clean

clean · Wafer_clean

0.169	422.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

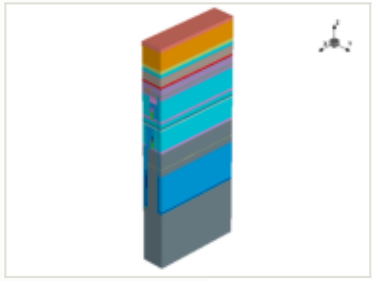

x cut at 0.385 µm

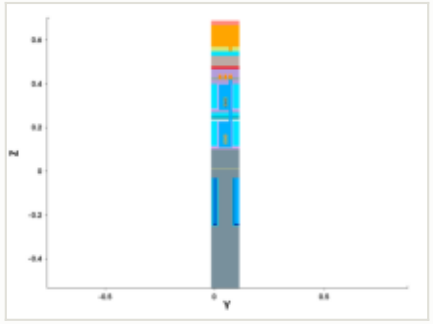

y cut at 0.049 µm

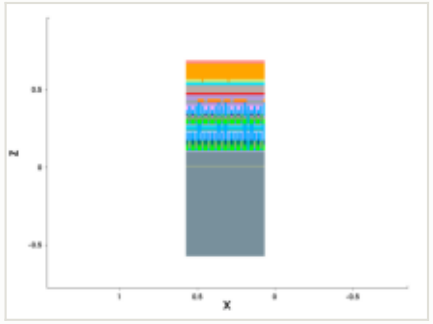

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

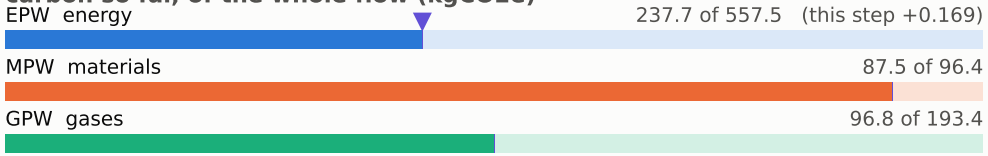

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

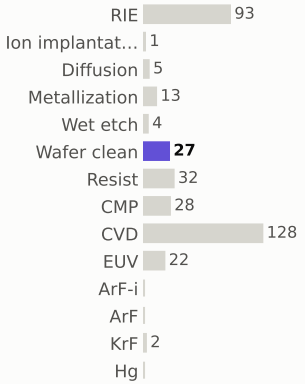

materials deposited (g)

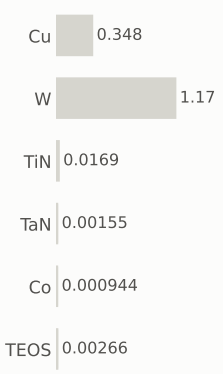

gases emitted (g)

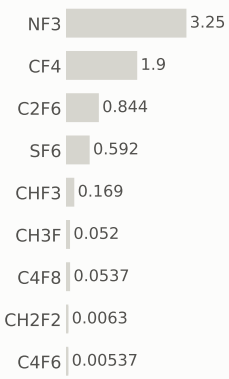

Step #3880: EUV

litho_patterning · EUV

1.96	423.9	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

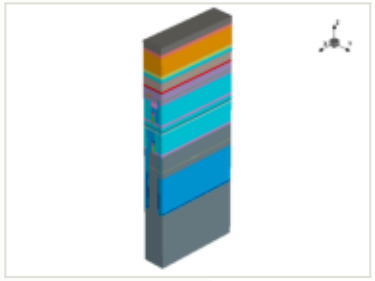

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

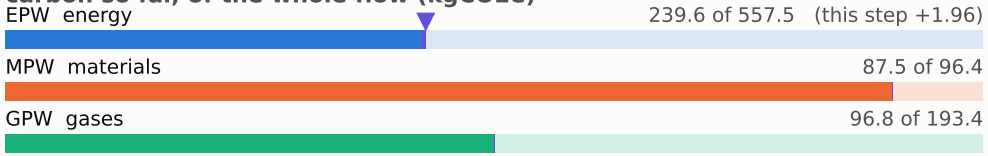

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

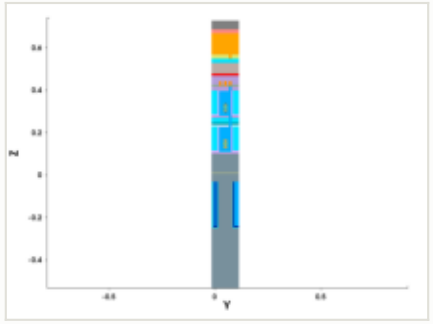

y cut at 0.049 µm

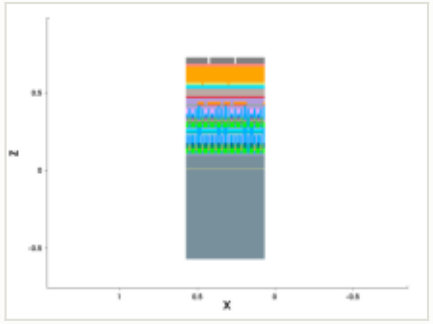

mask: layer 10222:0 (GDSII)

steps by process area

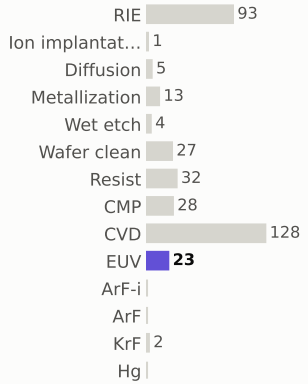

materials deposited (g)

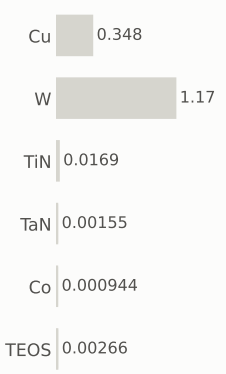

gases emitted (g)

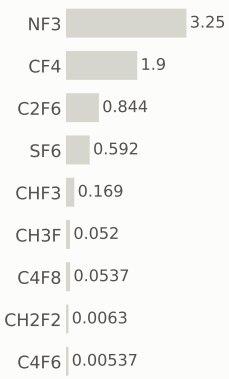

Step #3890: RIE

etch_anisotropic · RIE

1.04	425.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

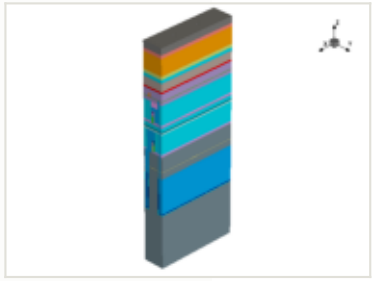

x cut at 0.385 µm

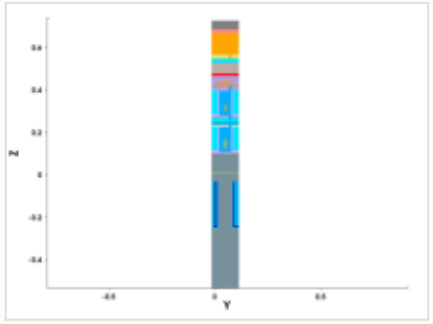

y cut at 0.049 µm

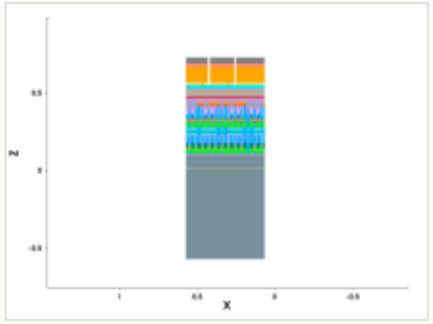

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

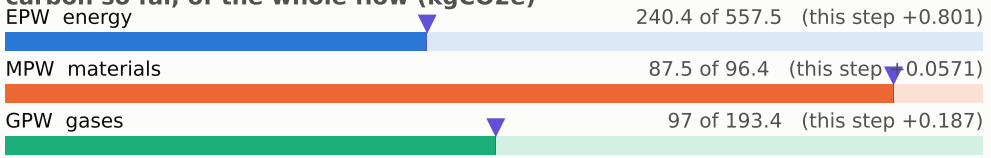

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

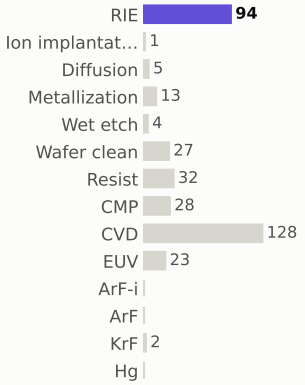

materials deposited (g)

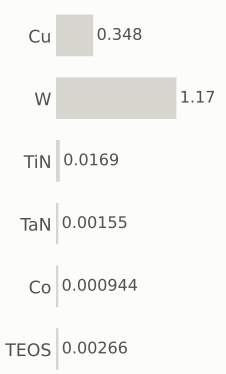

gases emitted (g)

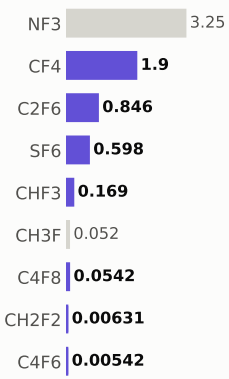

Step #3900: Wafer_clean

etch_strip · Wafer_clean

0.169	425.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

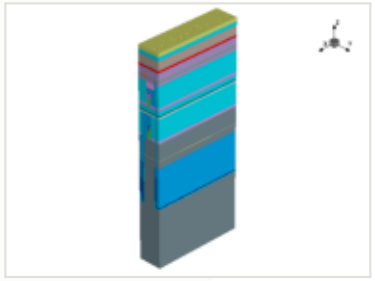

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

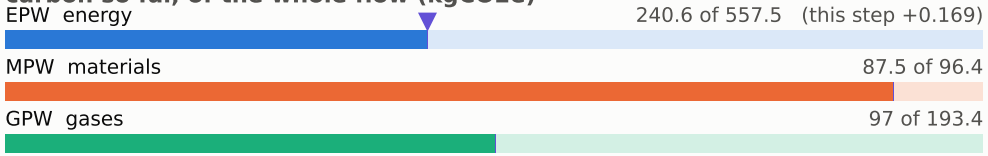

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

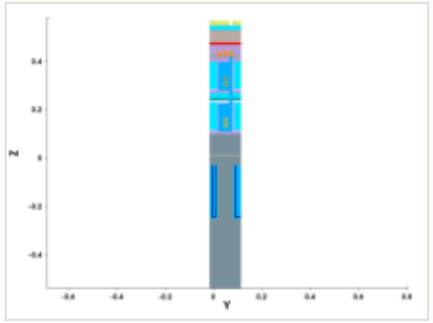

y cut at 0.049 µm

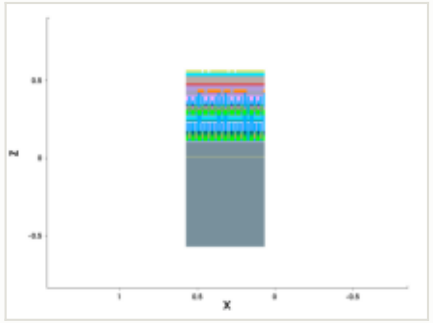

mask for this step

no mask for this step

steps by process area

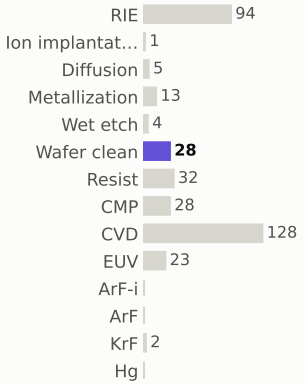

materials deposited (g)

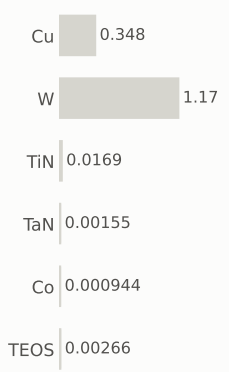

gases emitted (g)



Step #3910: RIE

etch_anisotropic · RIE

1.04	426.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

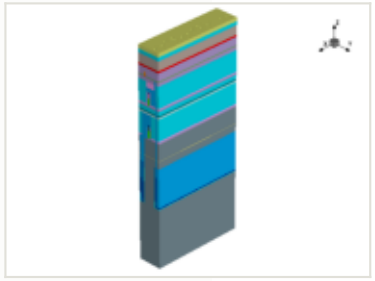

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

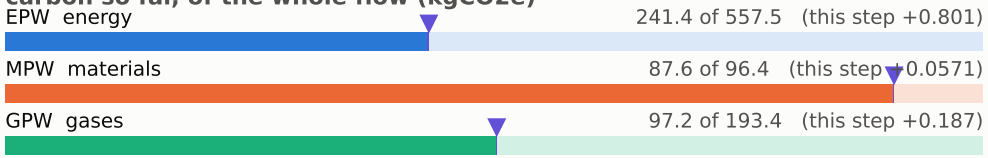

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

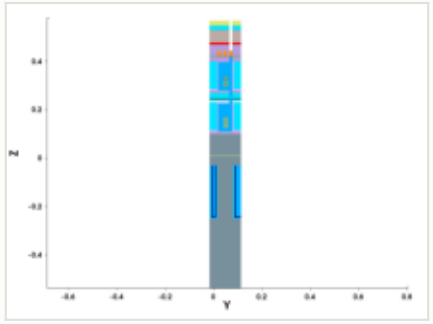

y cut at 0.049 µm

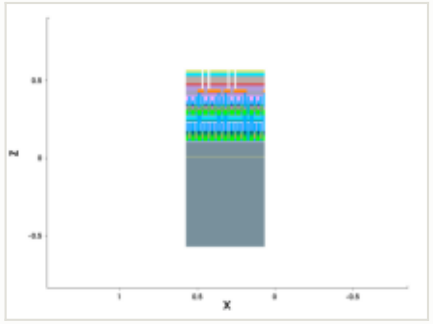

mask for this step

no mask for this step

steps by process area

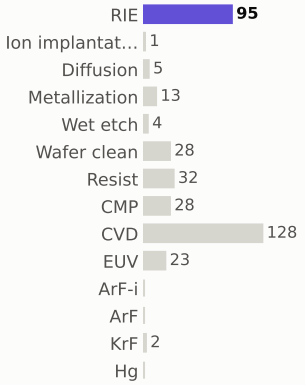

materials deposited (g)

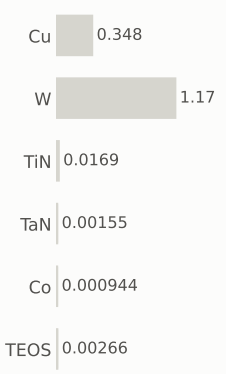

gases emitted (g)

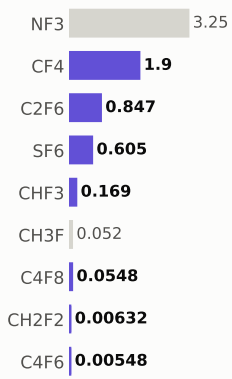

Step #3920: Wafer_clean

clean · Wafer_clean

0.169	426.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

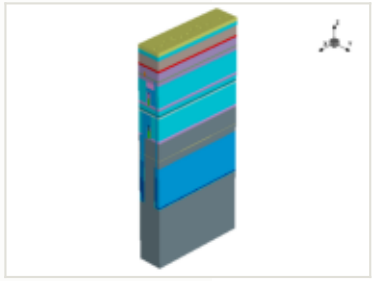

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

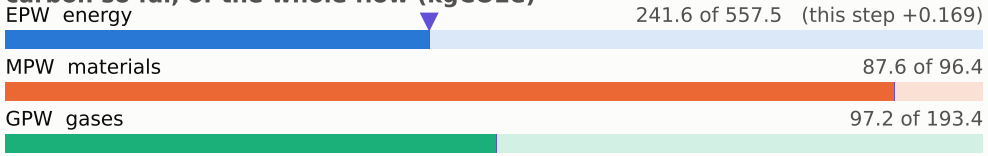

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

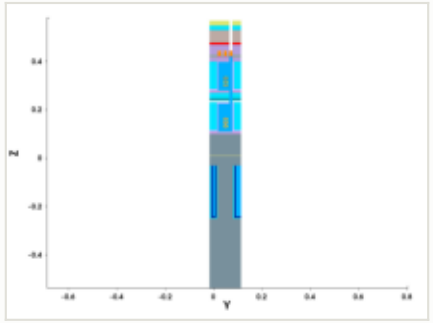

y cut at 0.049 µm

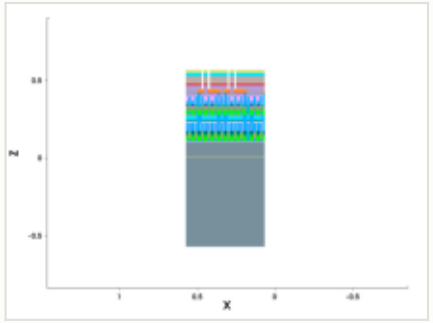

mask for this step

no mask for this step

steps by process area

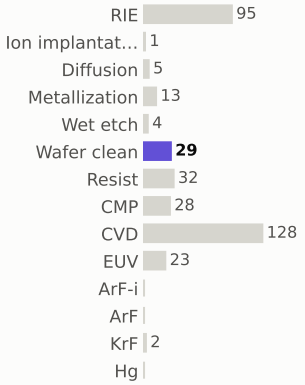

materials deposited (g)

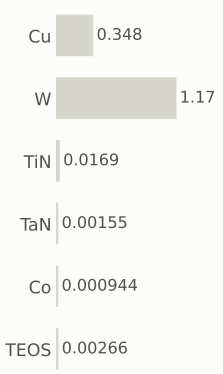

gases emitted (g)

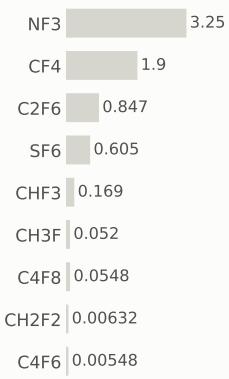

Step #3930: Metallization

depo_fill · Metallization

1.21	427.6	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

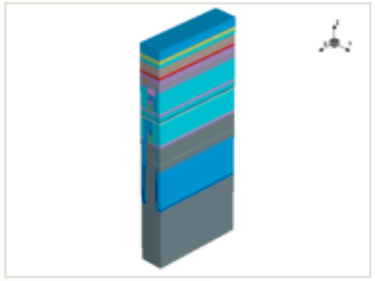

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

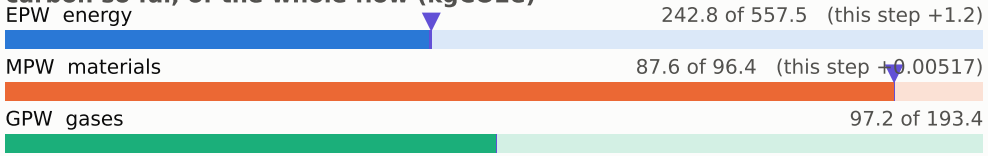

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

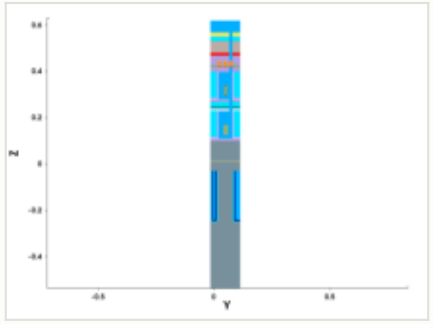

y cut at 0.049 µm

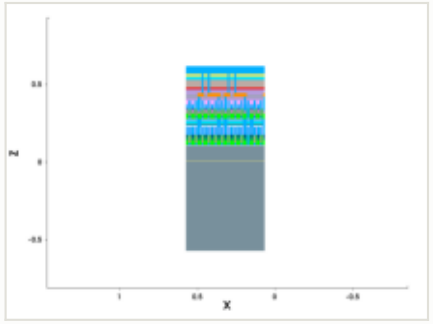

mask for this step

no mask for this step

steps by process area

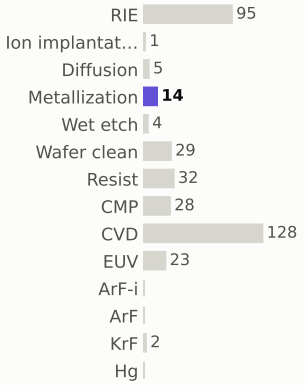

materials deposited (g)

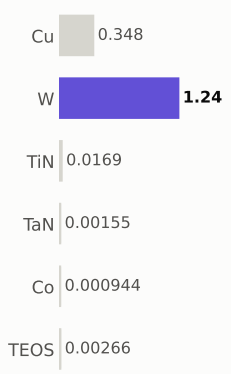

gases emitted (g)

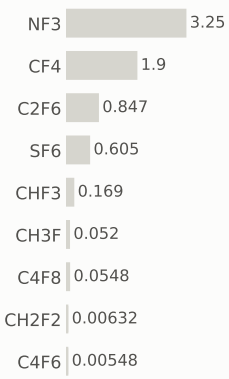

Step #3940: CMP

etch_cmp · CMP

0.169	427.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

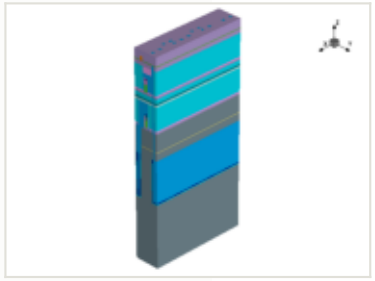

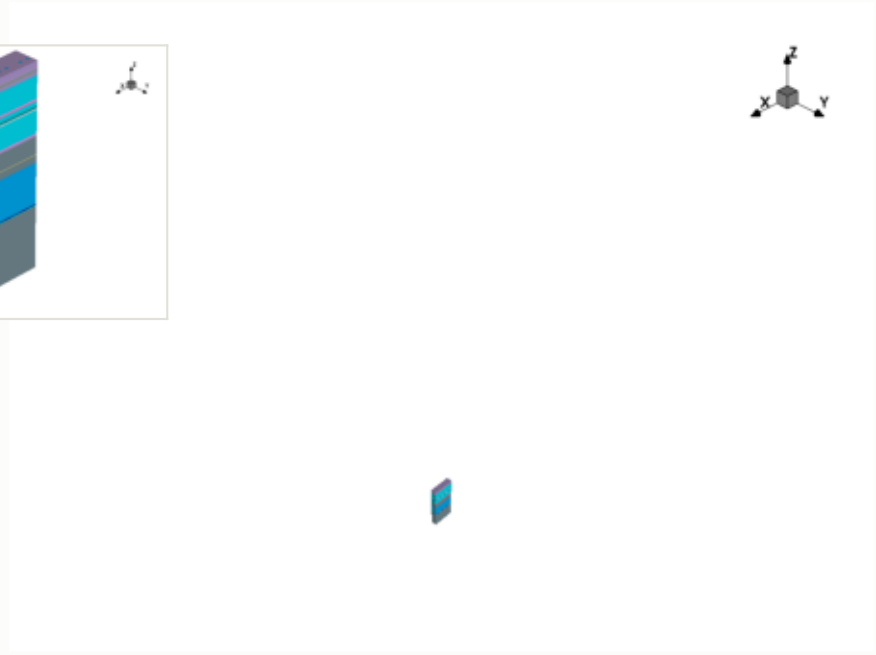

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

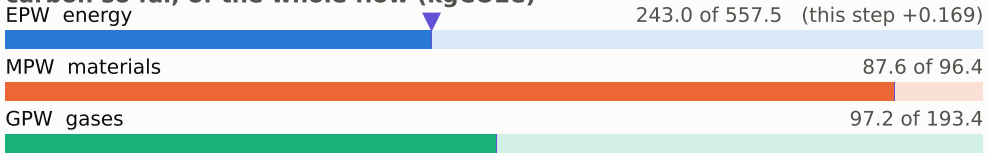

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

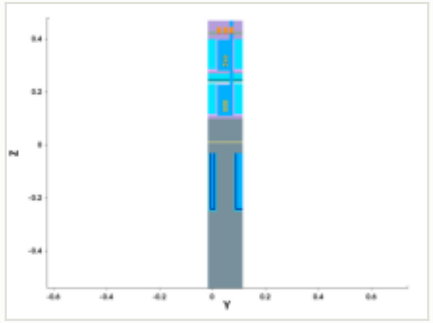

y cut at 0.049 µm

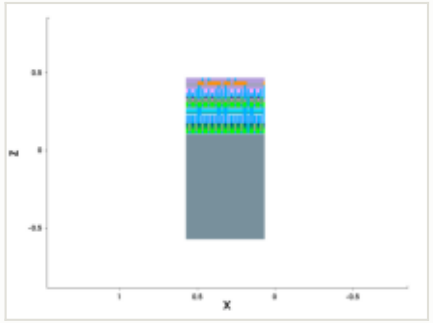

mask for this step

no mask for this step

steps by process area

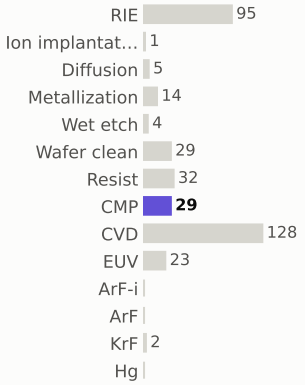

materials deposited (g)

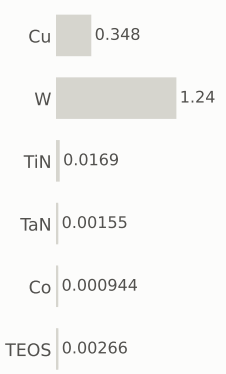

gases emitted (g)

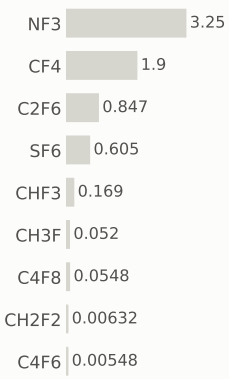

Step #3950: CVD

depo_fill · CVD

1.31	429.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

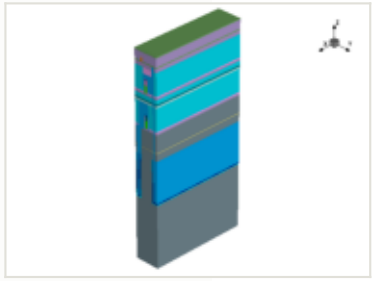

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

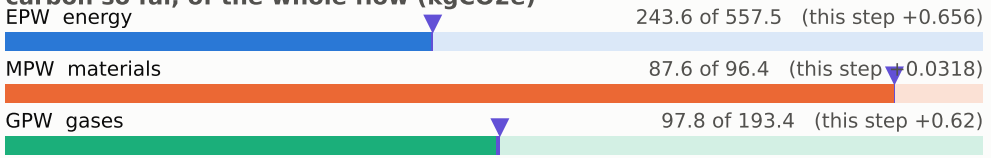

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

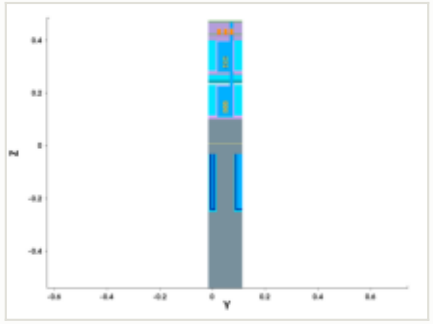

y cut at 0.049 µm

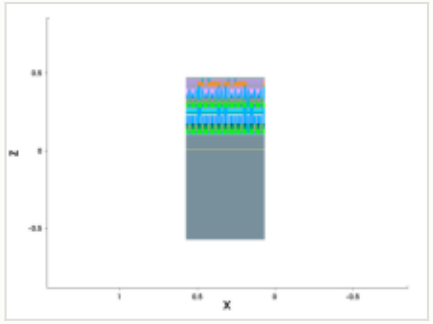

mask for this step

no mask for this step

steps by process area

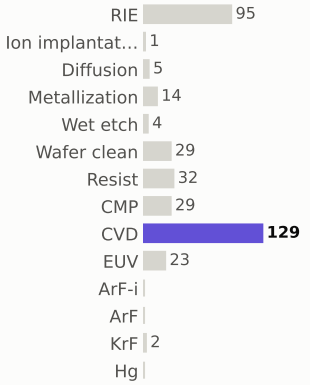

materials deposited (g)

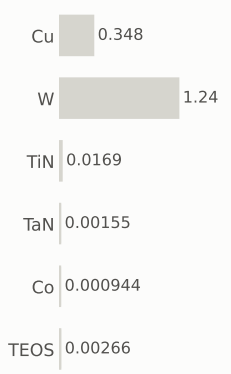

gases emitted (g)



Step #3960: CVD

depo_fill · CVD

1.31	430.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

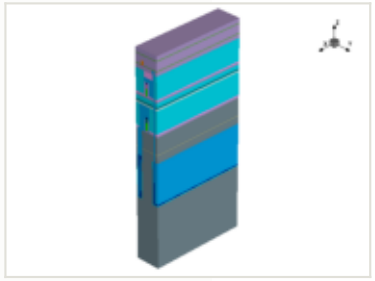

this step

process area	CVD
material	—
thickness	0.022 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

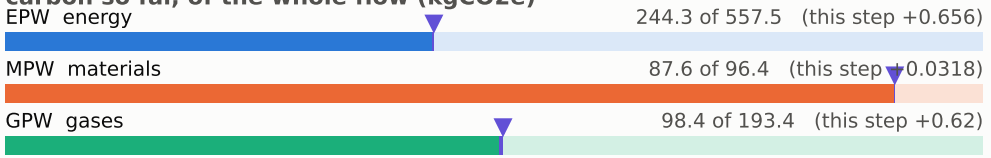

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

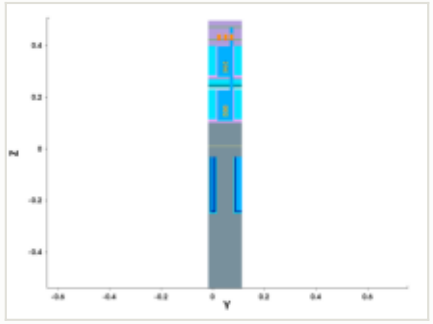

y cut at 0.049 µm

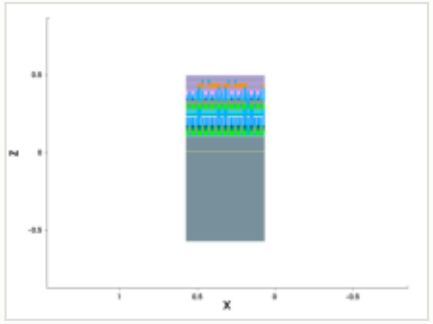

mask for this step

no mask for this step

steps by process area

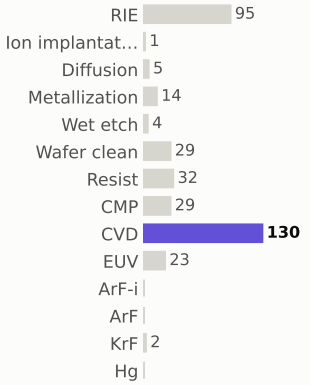

materials deposited (g)

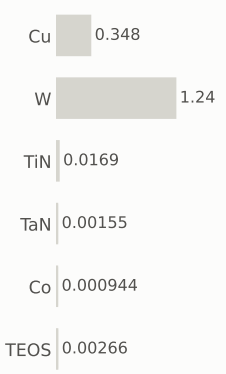

gases emitted (g)

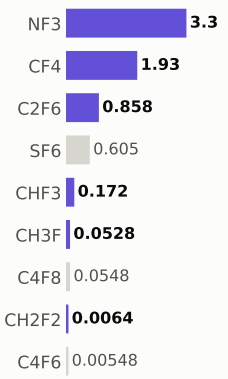

Step #3970: Diffusion

treatment · Diffusion

0.801	431.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

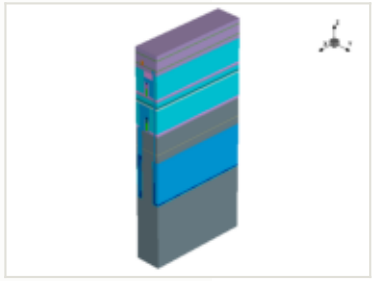

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

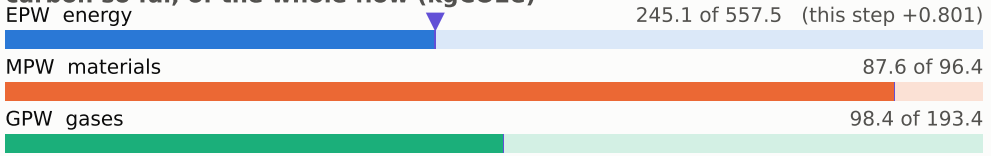

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

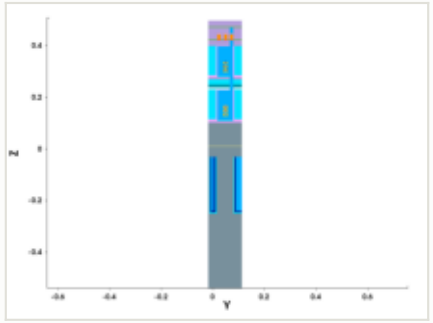

y cut at 0.049 µm

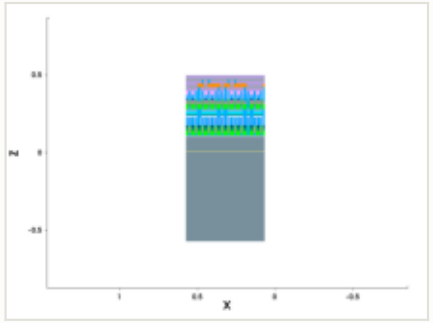

mask for this step

no mask for this step

steps by process area

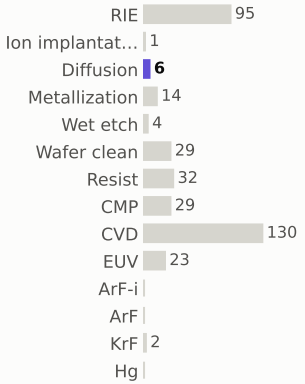

materials deposited (g)



gases emitted (g)



Step #3980: Wafer_clean

clean · Wafer_clean

0.169	431.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

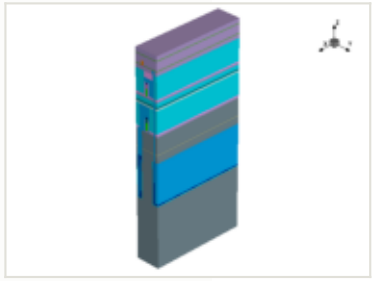

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

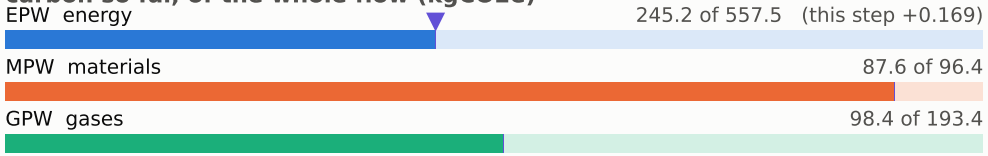

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

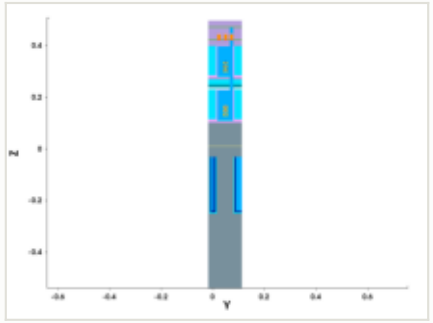

y cut at 0.049 µm

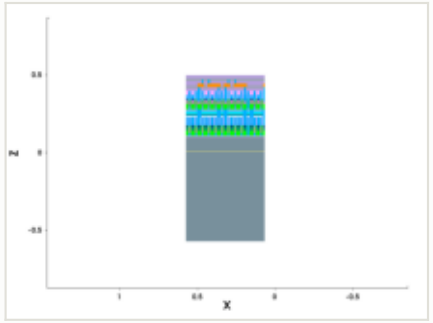

mask for this step

no mask for this step

steps by process area

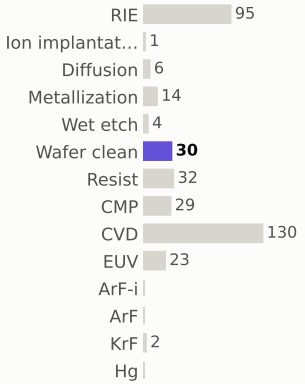

materials deposited (g)



gases emitted (g)



Step #3990: CVD

depo_fill · CVD

1.31	432.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

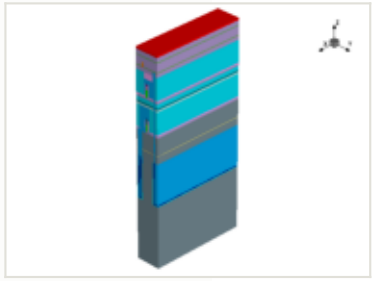

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

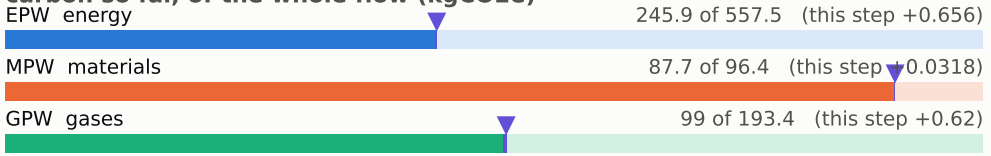

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

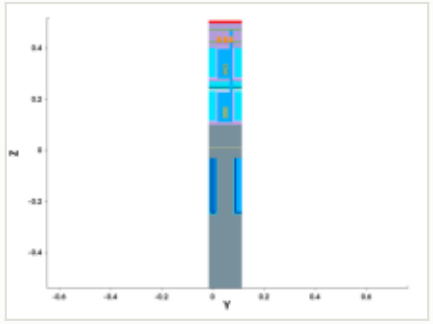

y cut at 0.049 µm

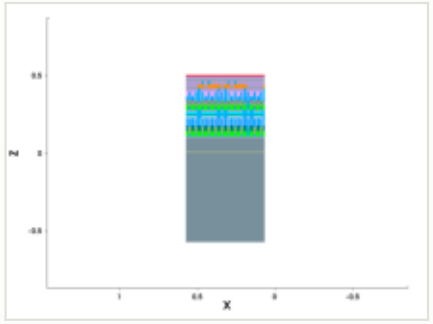

mask for this step

no mask for this step

steps by process area

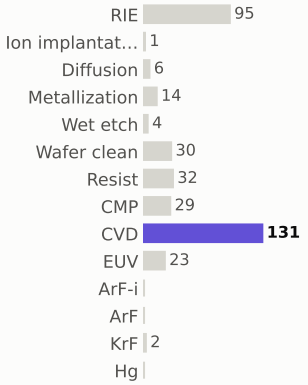

materials deposited (g)

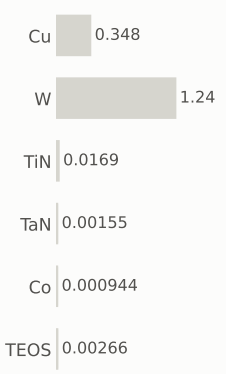

gases emitted (g)

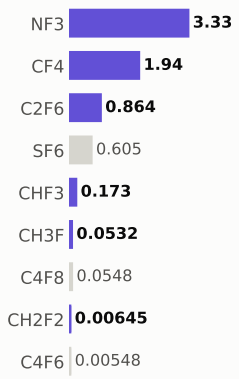

Step #4000: CVD

depo_fill · CVD

1.31	433.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

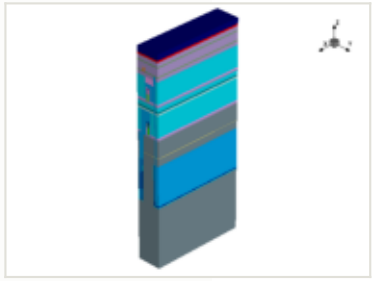

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

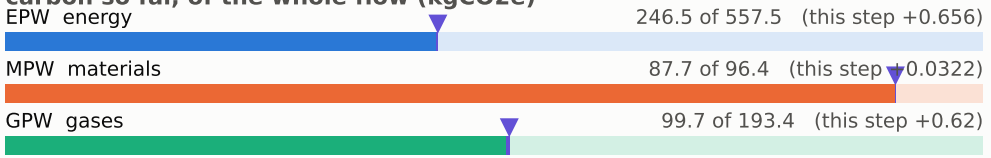

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

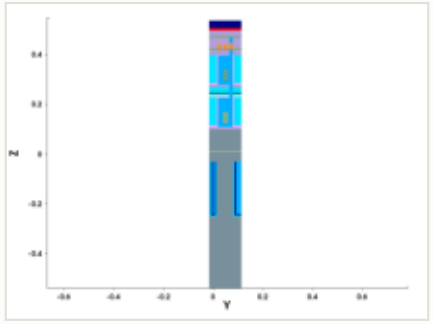

y cut at 0.049 µm

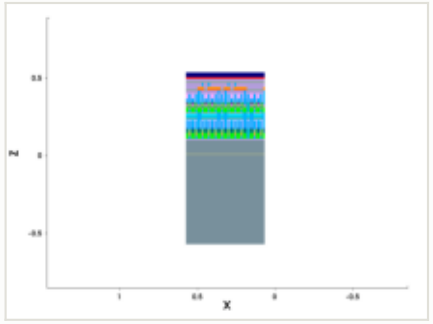

mask for this step

no mask for this step

steps by process area

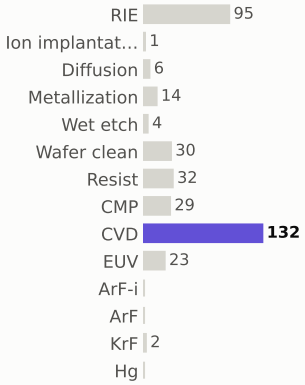

materials deposited (g)

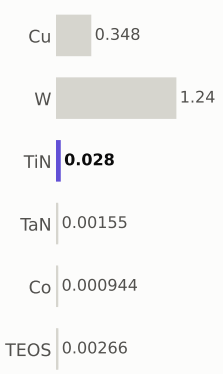

gases emitted (g)

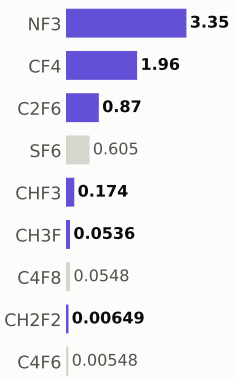

Step #4010: Wafer_clean

clean · Wafer_clean

0.169	434.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

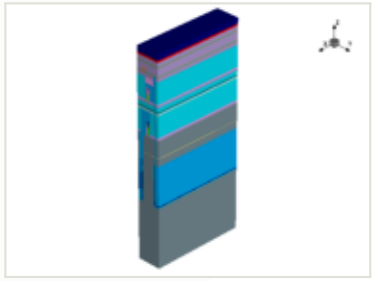

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

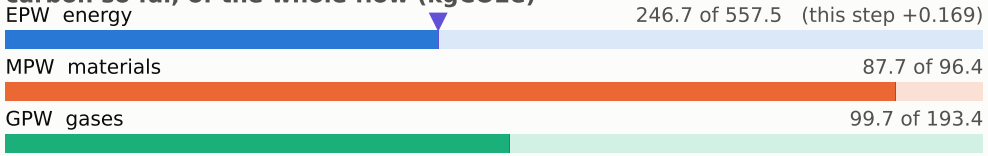

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

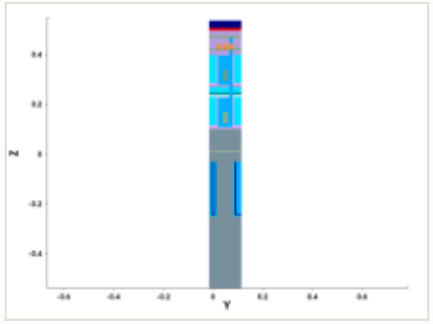

y cut at 0.049 µm

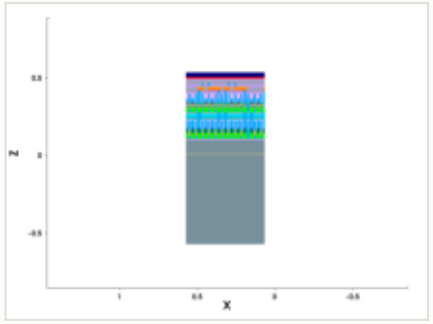

mask for this step

no mask for this step

steps by process area

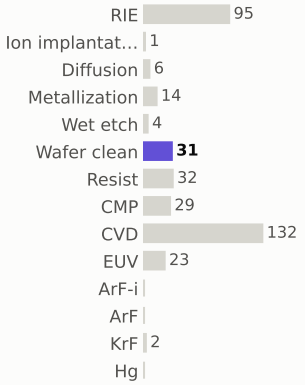

materials deposited (g)

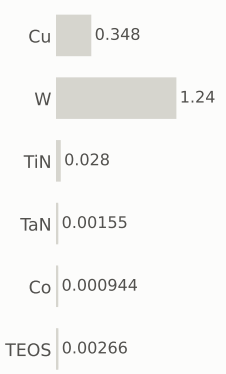

gases emitted (g)

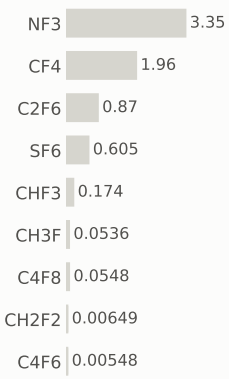

Step #4020: CVD

depo_fill · CVD

1.31	435.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

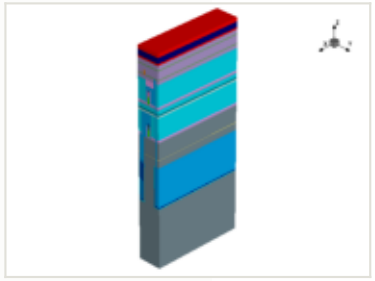

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

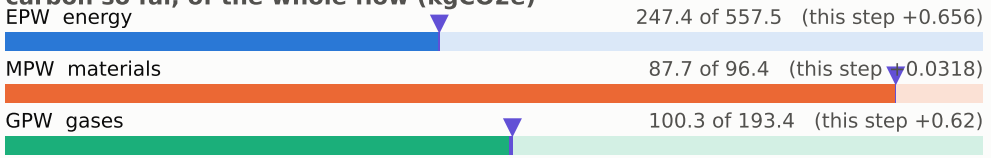

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

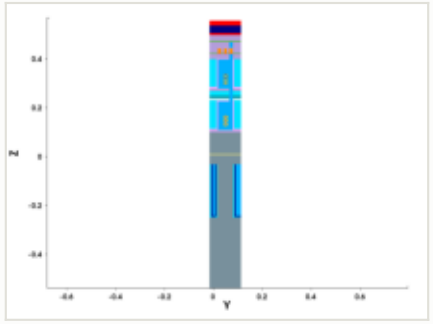

y cut at 0.049 µm

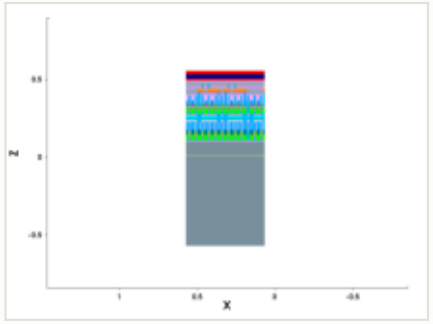

mask for this step

no mask for this step

steps by process area

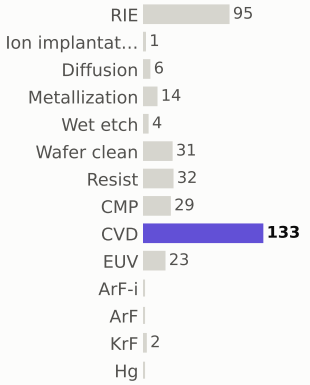

materials deposited (g)

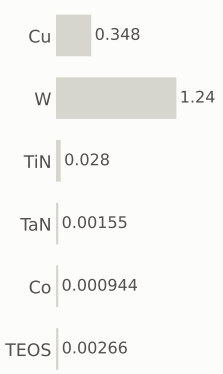

gases emitted (g)

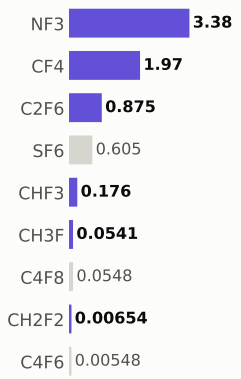

Step #4030: CVD

depo_fill · CVD

1.31	436.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

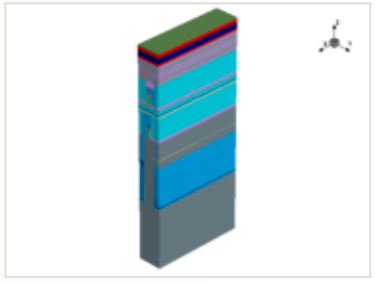

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

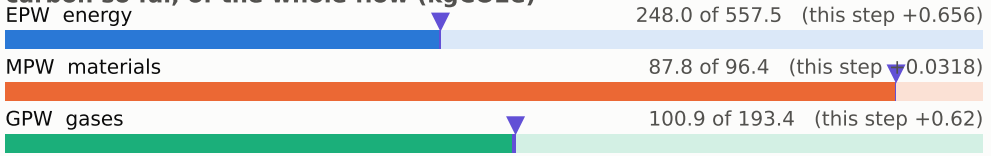

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

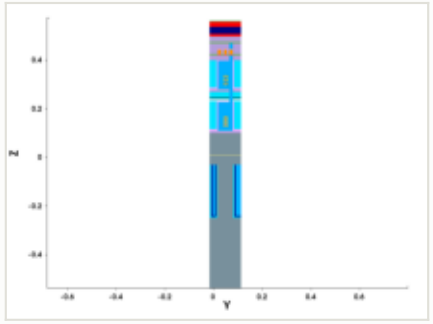

y cut at 0.049 µm

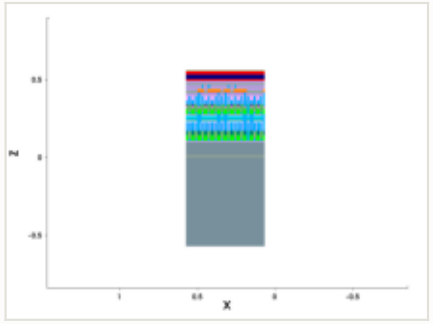

mask for this step

no mask for this step

steps by process area

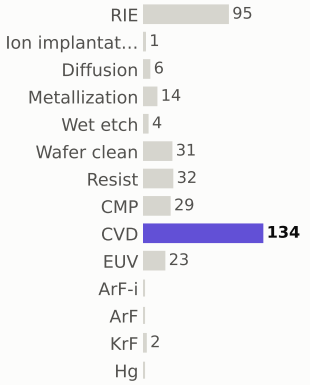

materials deposited (g)

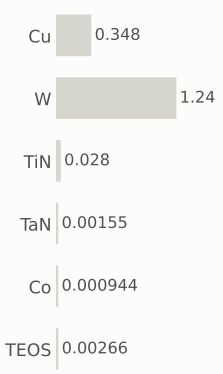

gases emitted (g)

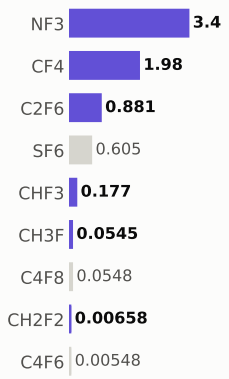

Step #4040: CVD

depo_fill · CVD

1.31	438.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

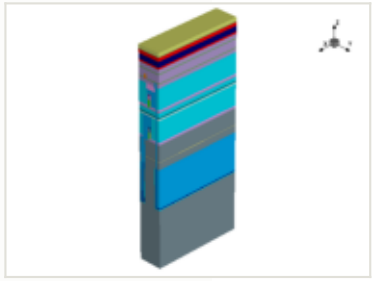

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

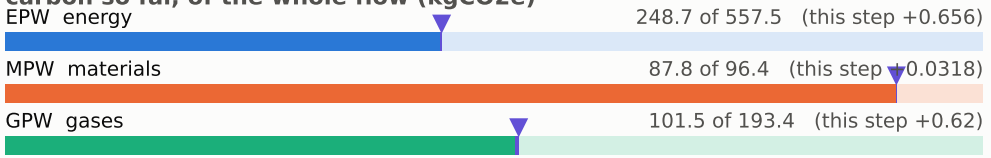

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

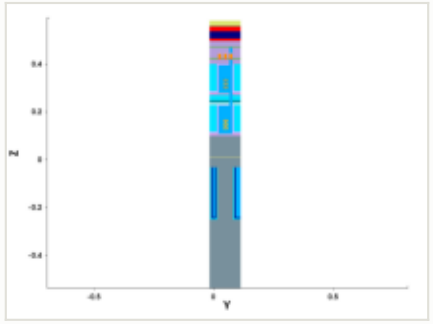

y cut at 0.049 µm

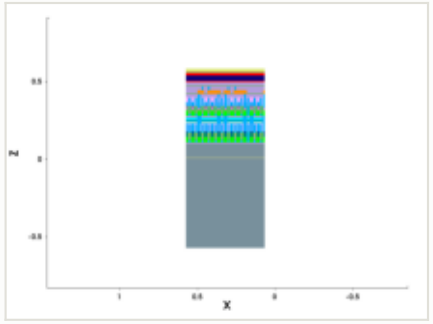

mask for this step

no mask for this step

steps by process area

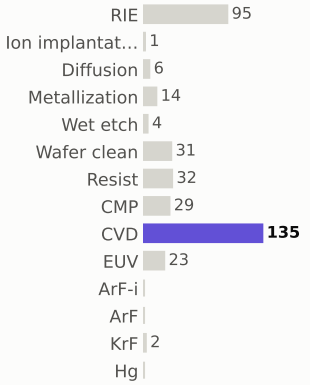

materials deposited (g)

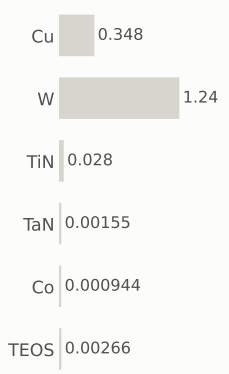

gases emitted (g)

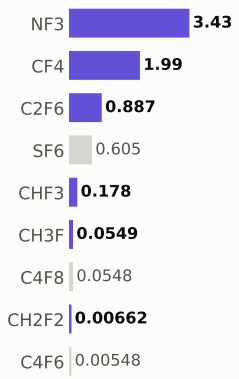

Step #4050: Resist

depo_fill · Resist

0.169	438.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

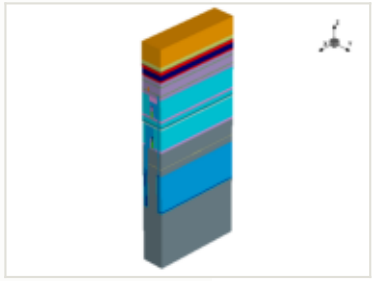

x cut at 0.385 µm

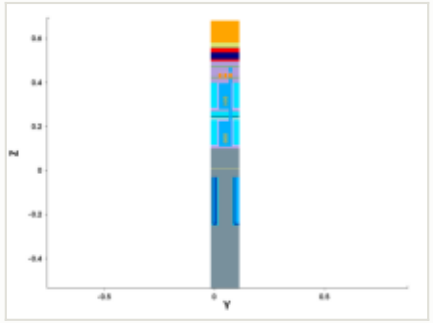

y cut at 0.049 µm

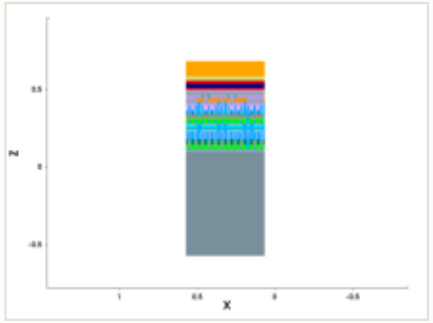

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

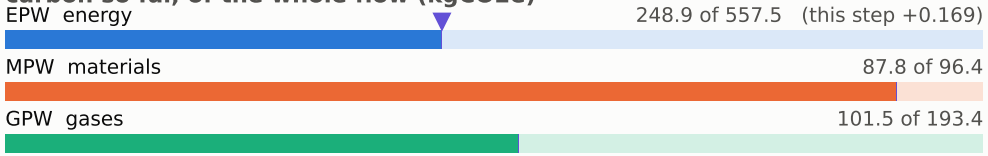

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

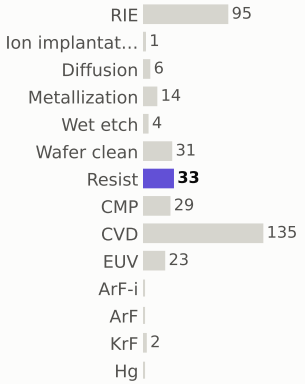

materials deposited (g)

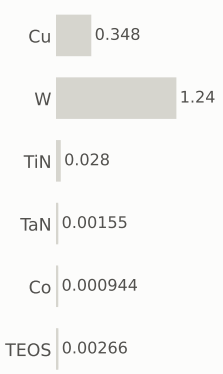

gases emitted (g)

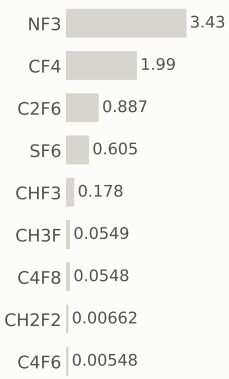

Step #4060: CVD

depo_fill · CVD

1.31	439.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

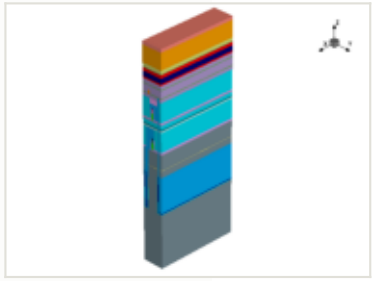

x cut at 0.385 µm

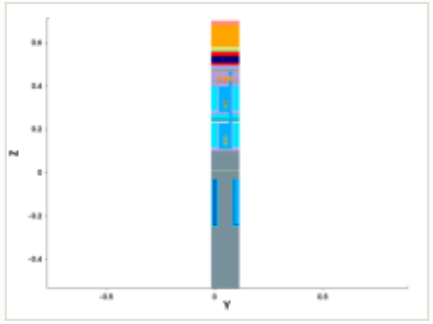

y cut at 0.049 µm

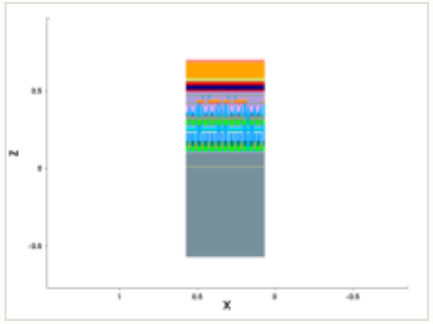

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

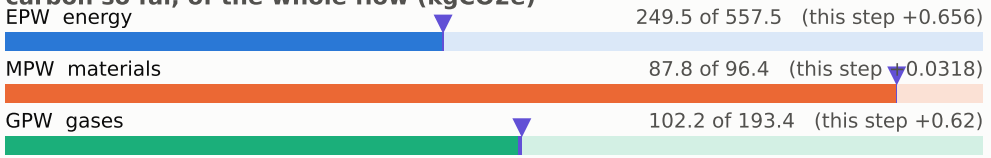

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

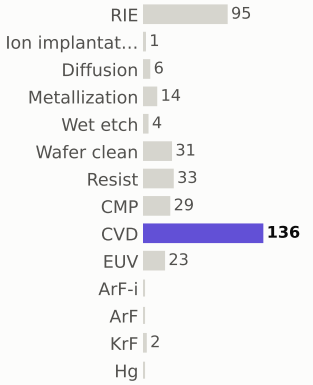

materials deposited (g)

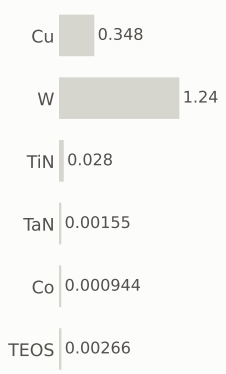

gases emitted (g)

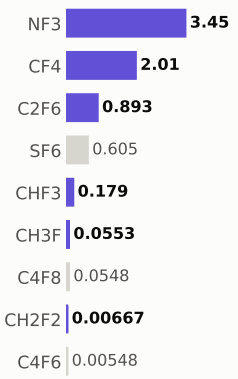

Step #4070: Wafer_clean

clean · Wafer_clean

0.169	439.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

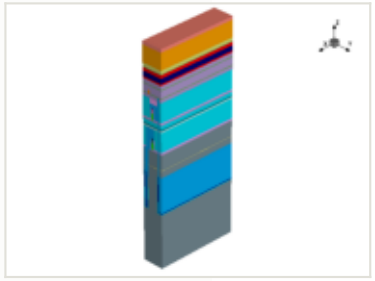

x cut at 0.385 µm

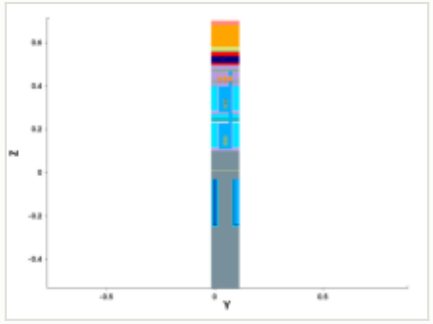

y cut at 0.049 µm

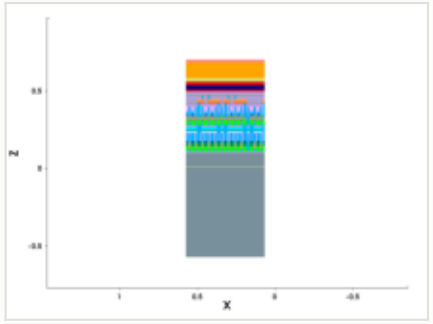

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

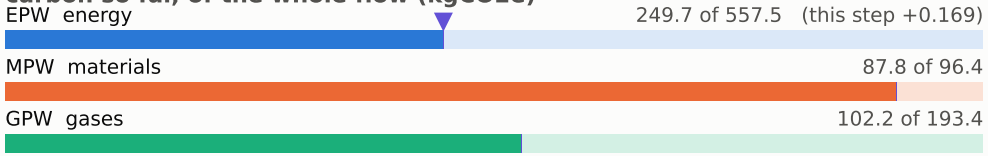

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

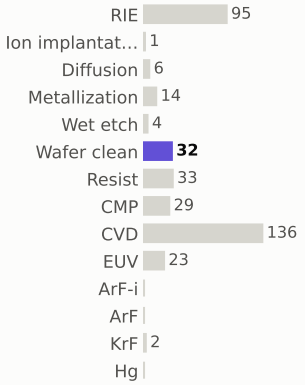

materials deposited (g)

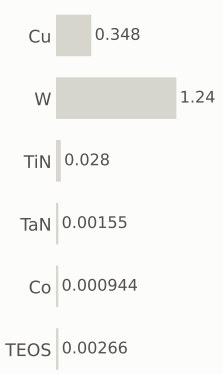

gases emitted (g)

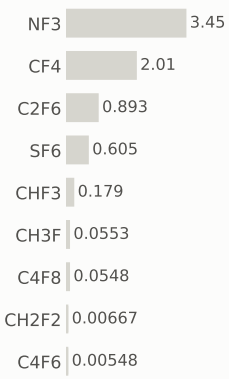

Step #4080: EUV

litho_patterning · EUV

1.96	441.6	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

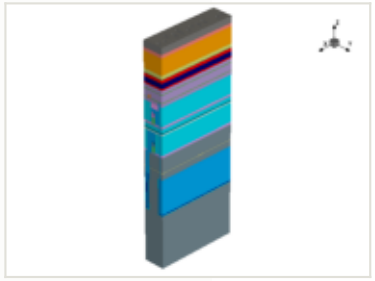

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

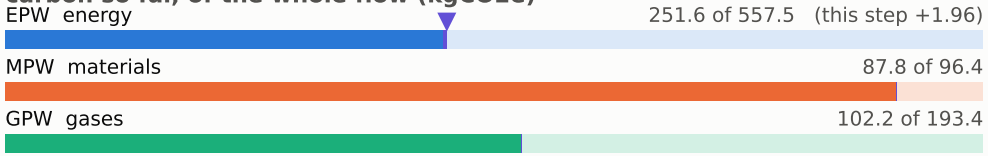

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

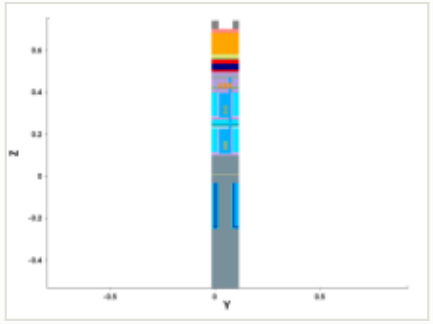

y cut at 0.049 µm

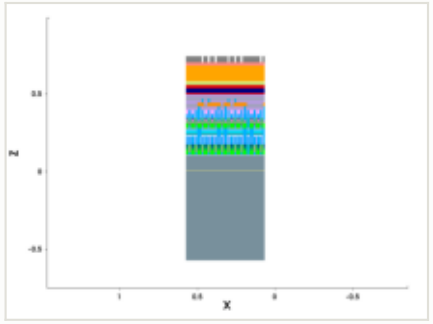

mask: layer 10251:0 (GDSII)

steps by process area

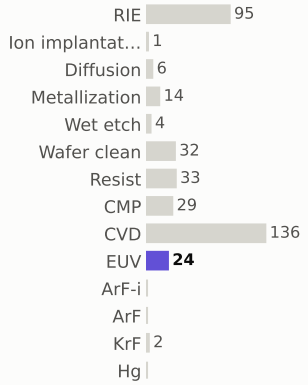

materials deposited (g)

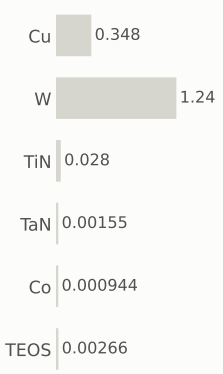

gases emitted (g)

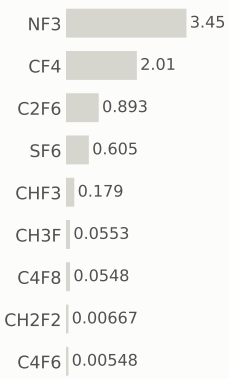

Step #4090: RIE

etch_anisotropic · RIE

1.04	442.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

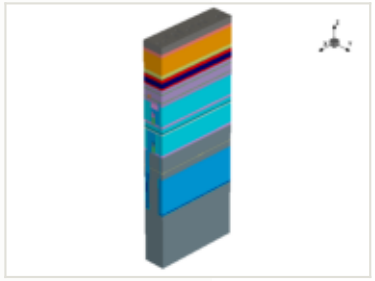

x cut at 0.385 µm

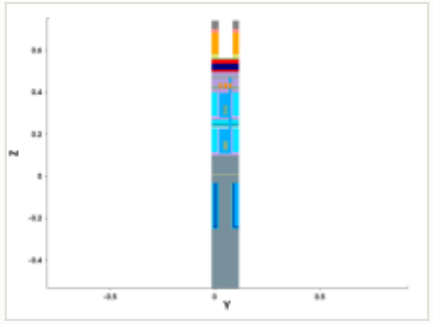

y cut at 0.049 µm

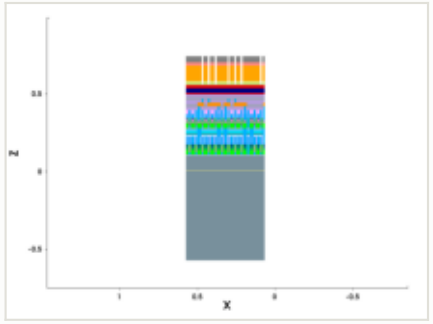

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

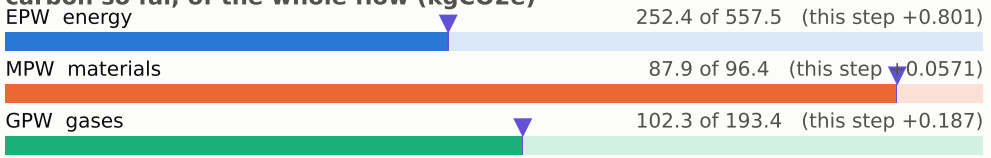

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

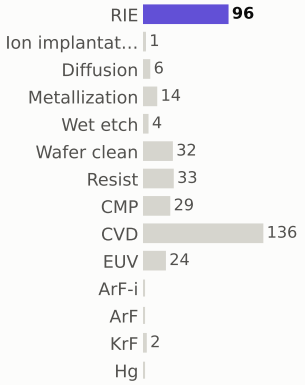

materials deposited (g)

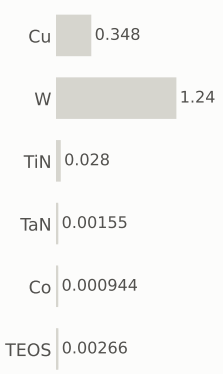

gases emitted (g)

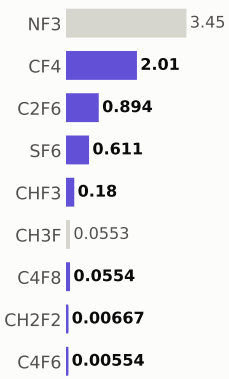

Step #4100: Wafer_clean

etch_strip · Wafer_clean

0.169	442.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

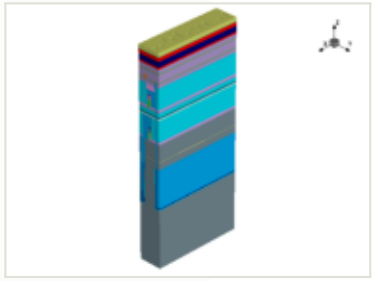

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

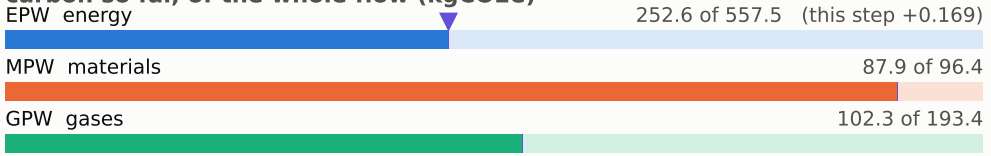

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

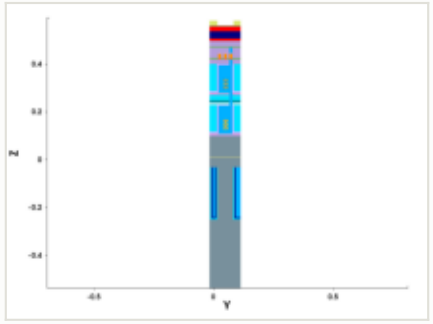

y cut at 0.049 µm

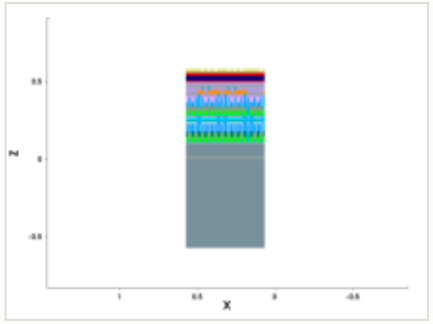

mask for this step

no mask for this step

steps by process area

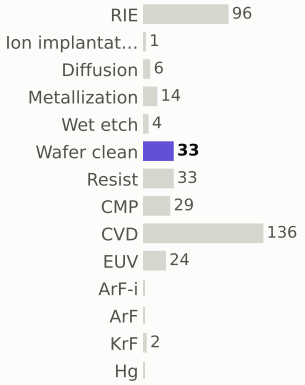

materials deposited (g)

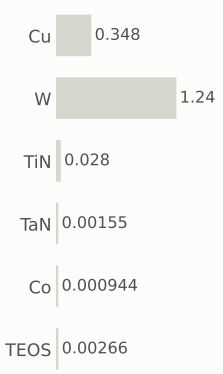

gases emitted (g)

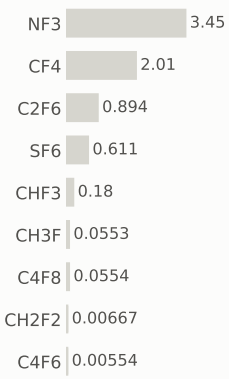

Step #4110: CVD

depo_isotropic · CVD

1.31	444.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

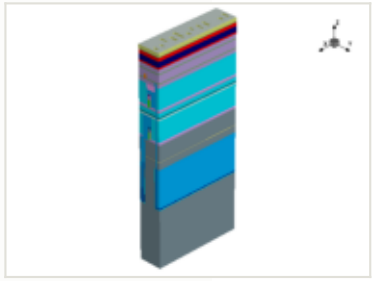

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

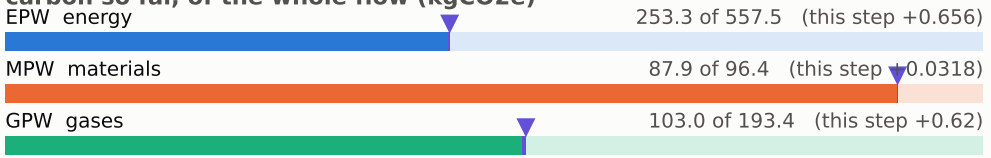

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

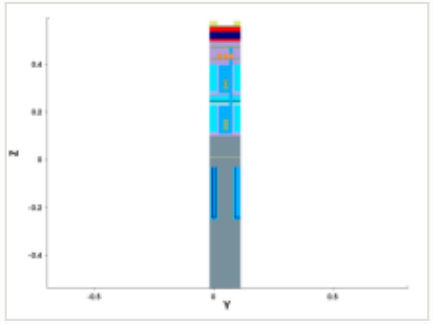

y cut at 0.049 µm

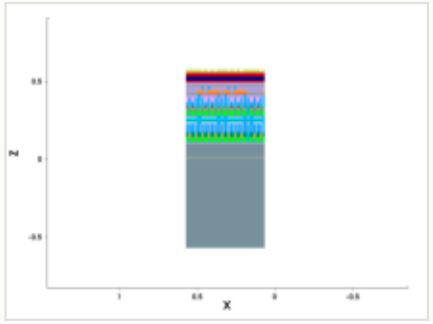

mask for this step

no mask for this step

steps by process area

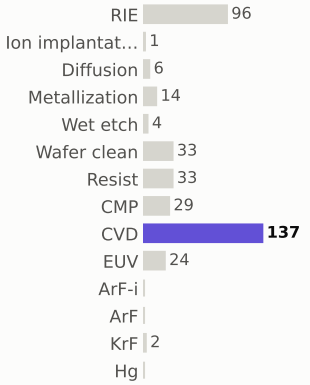

materials deposited (g)

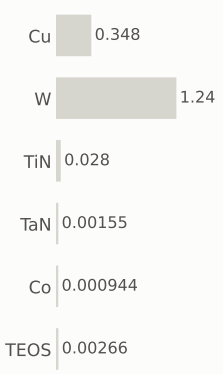

gases emitted (g)

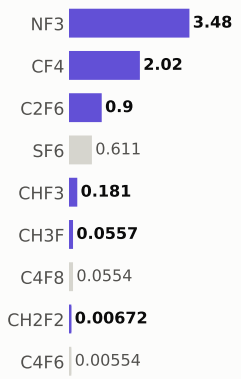

Step #4120: RIE

etch_anisotropic · RIE

1.04	445.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

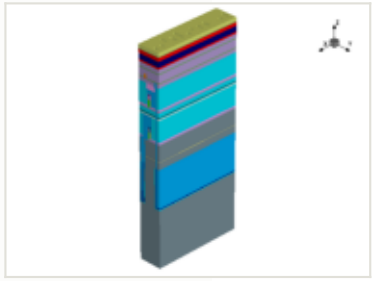

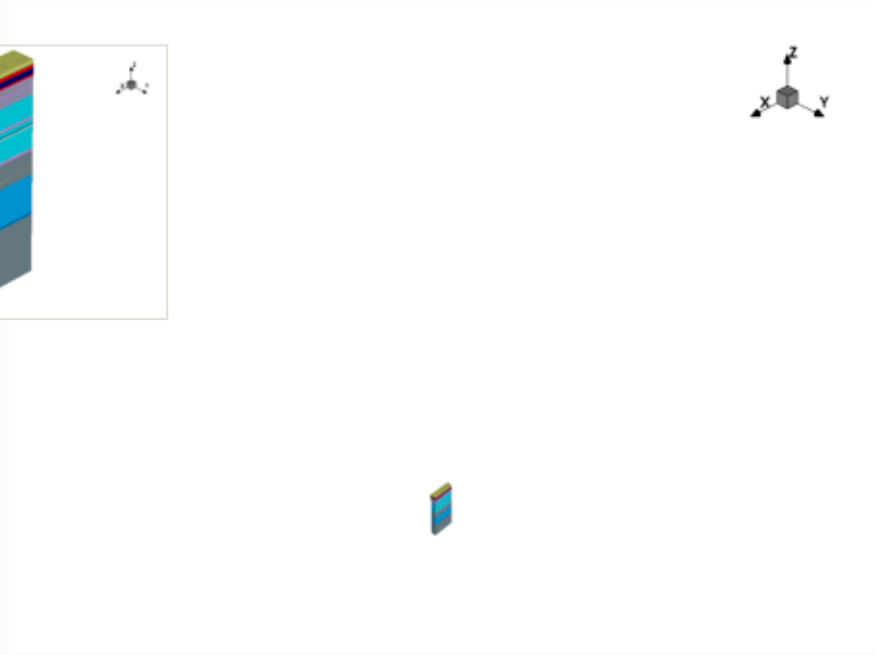

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

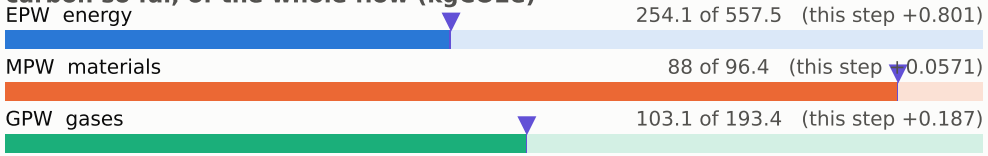

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

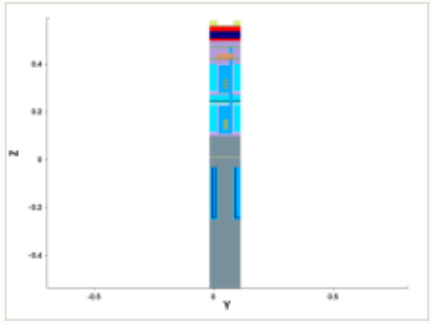

y cut at 0.049 µm

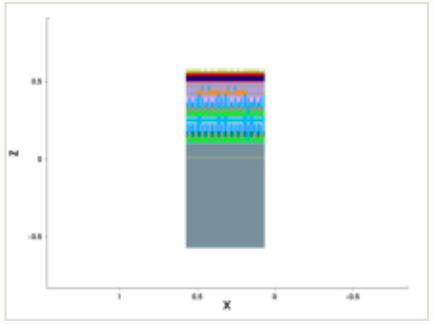

mask for this step

no mask for this step

steps by process area

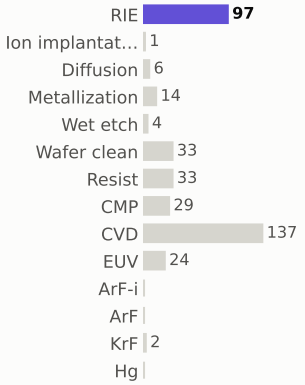

materials deposited (g)

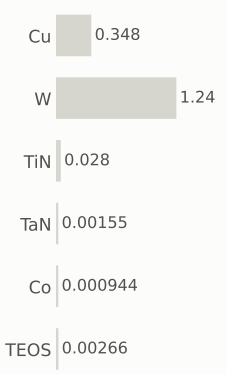

gases emitted (g)

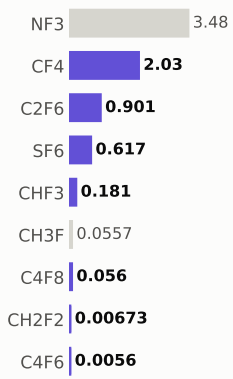

Step #4130: Wafer_clean

clean · Wafer_clean

0.169	445.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

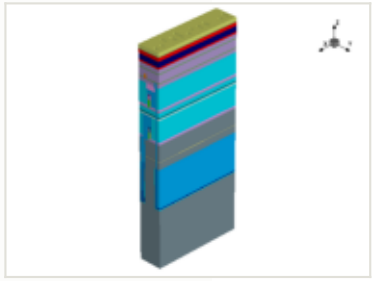

x cut at 0.385 µm

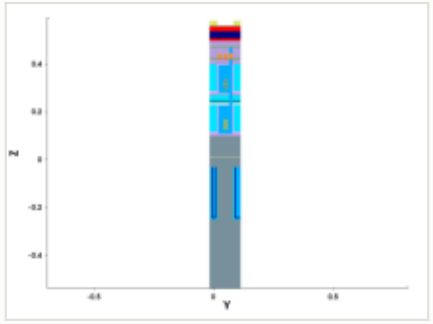

y cut at 0.049 µm

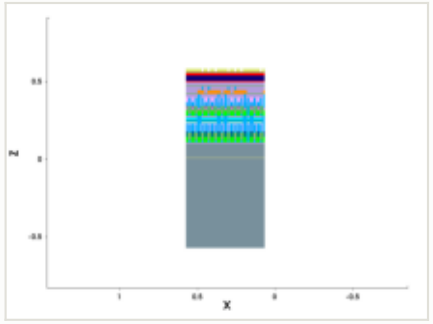

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

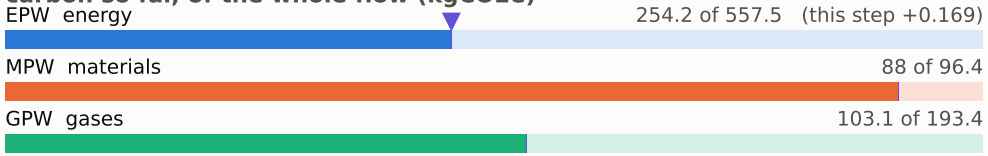

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

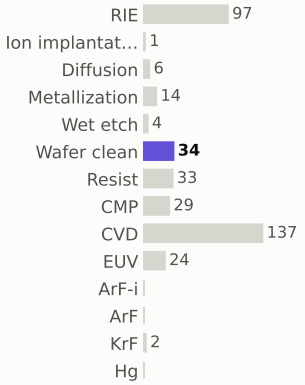

materials deposited (g)

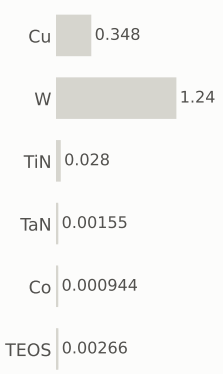

gases emitted (g)

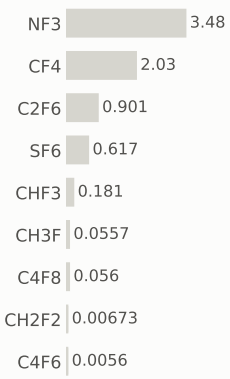

Step #4140: Resist

depo_fill · Resist

0.169	445.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

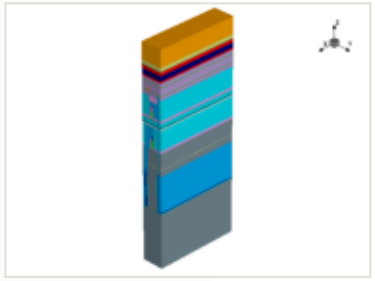

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

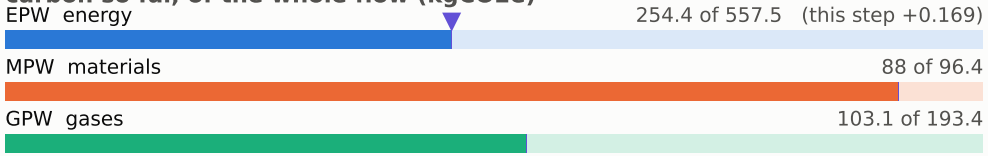

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

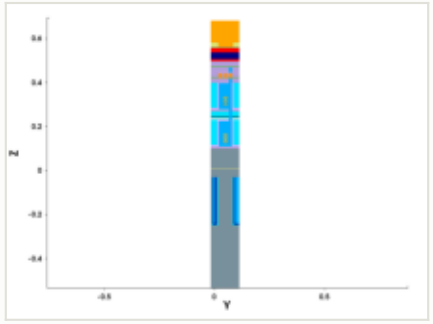

y cut at 0.049 µm

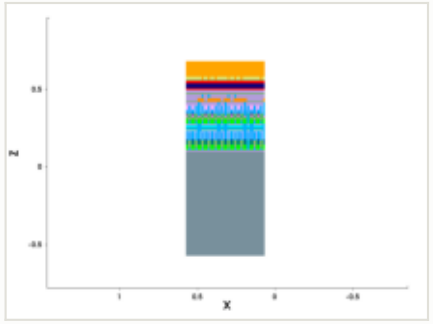

mask for this step

no mask for this step

steps by process area

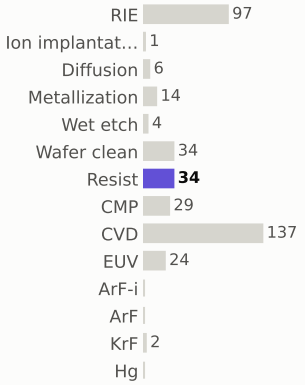

materials deposited (g)

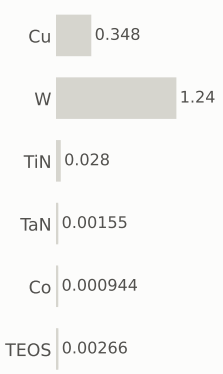

gases emitted (g)

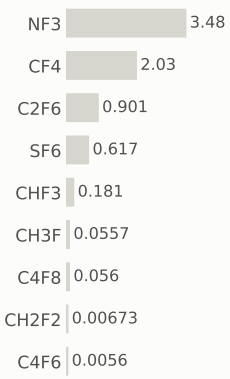

Step #4150: CVD

depo_fill · CVD

1.31	446.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

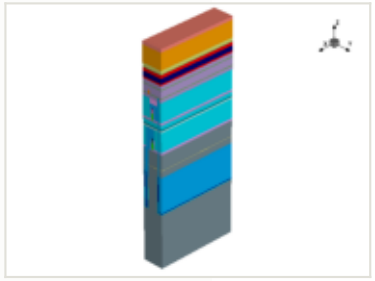

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

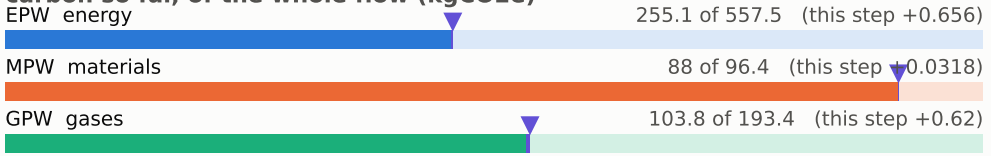

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

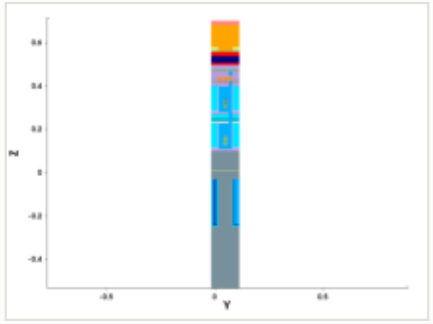

y cut at 0.049 µm

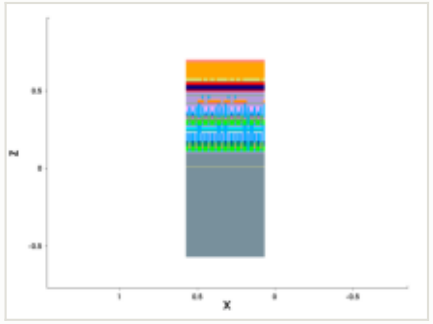

mask for this step

no mask for this step

steps by process area

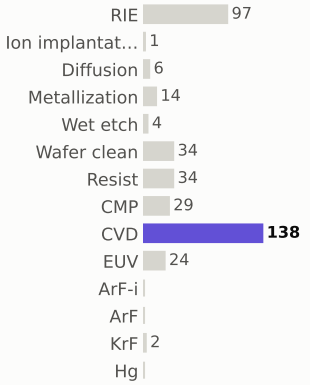

materials deposited (g)

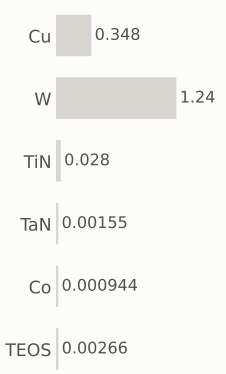

gases emitted (g)

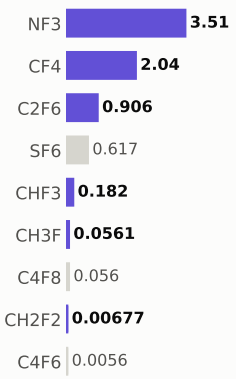

Step #4160: Wafer_clean

clean · Wafer_clean

0.169	447.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

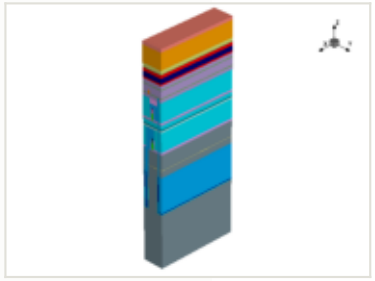

x cut at 0.385 µm

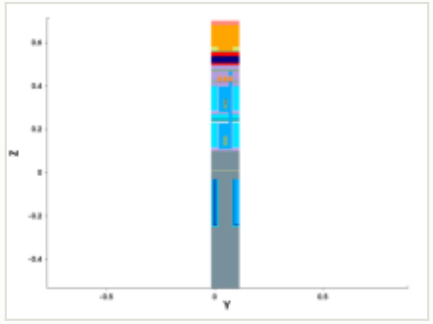

y cut at 0.049 µm

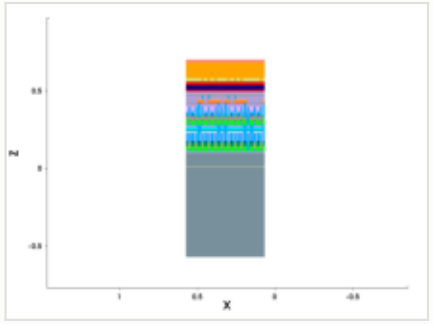

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

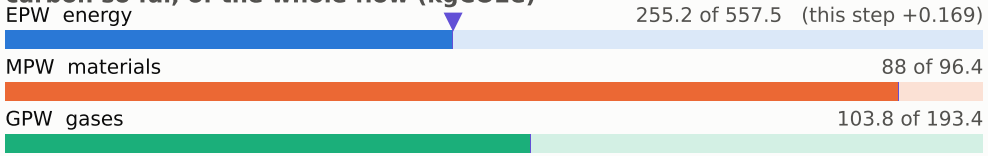

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

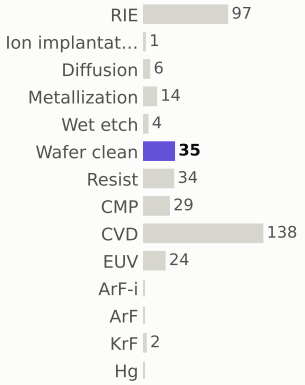

materials deposited (g)

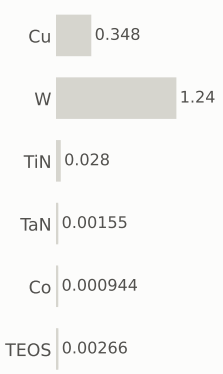

gases emitted (g)

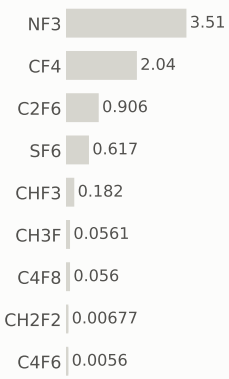

Step #4170: EUV

litho_patterning · EUV

1.96	449.0	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

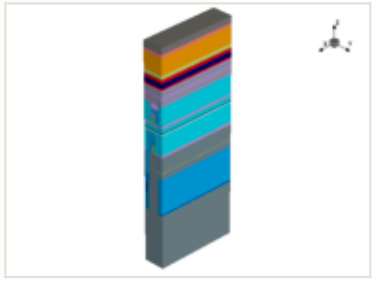

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

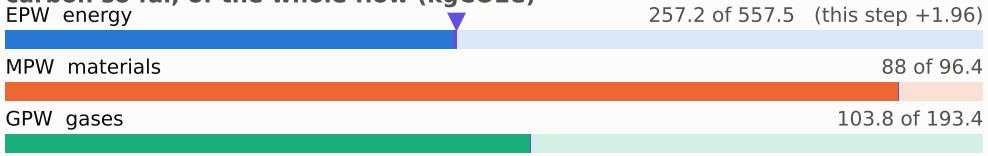

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

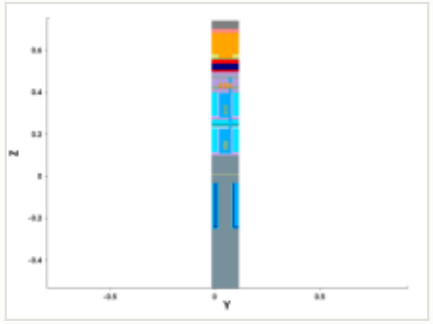

y cut at 0.049 µm

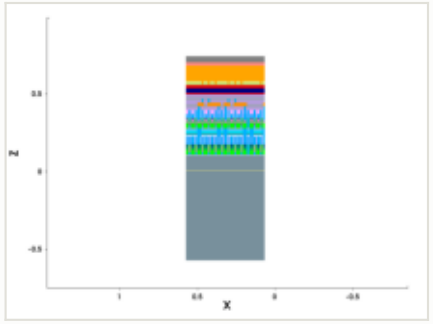

mask: layer 10252:0 (GDSII)

nothing in the clip window

steps by process area

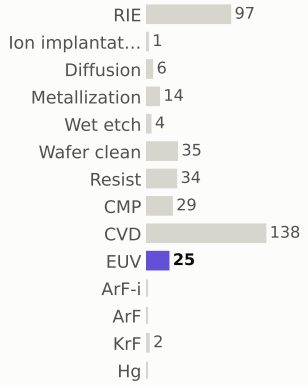

materials deposited (g)

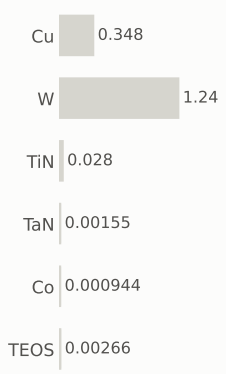

gases emitted (g)

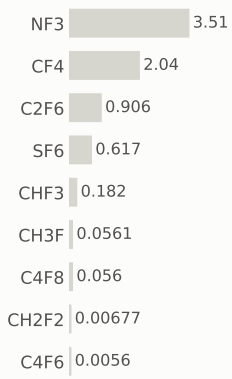

Step #4180: RIE

etch_anisotropic · RIE

1.04	450.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

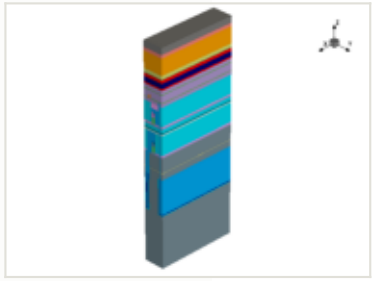

x cut at 0.385 µm

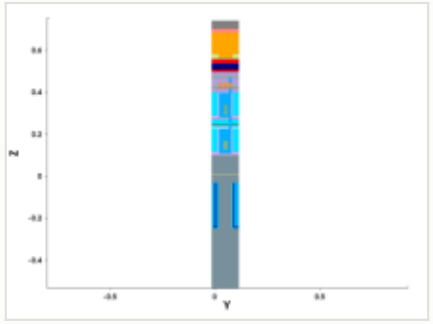

y cut at 0.049 µm

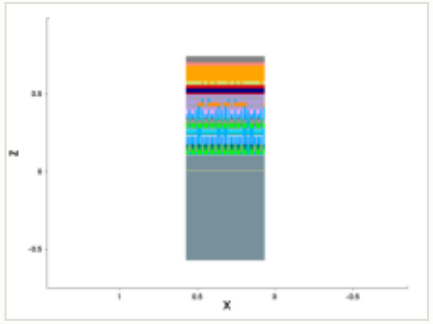

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

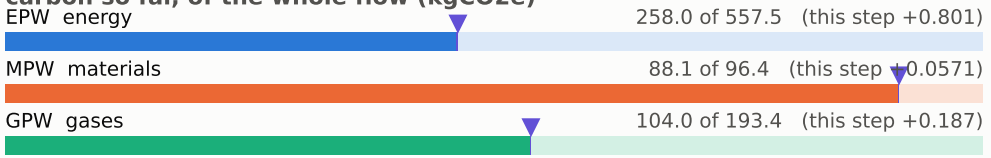

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

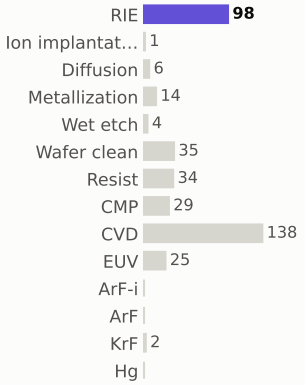

materials deposited (g)

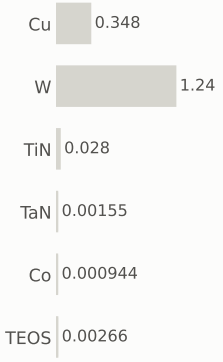

gases emitted (g)

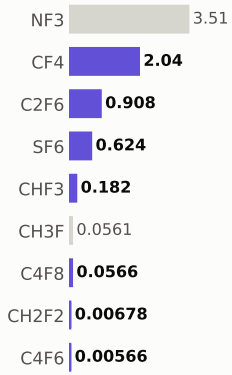

Step #4190: Wafer_clean

etch_strip · Wafer_clean

0.169	450.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

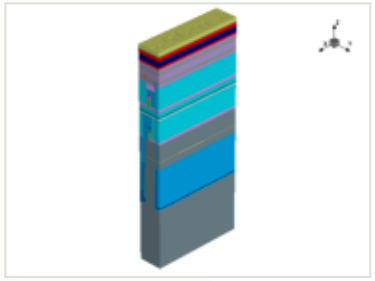

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

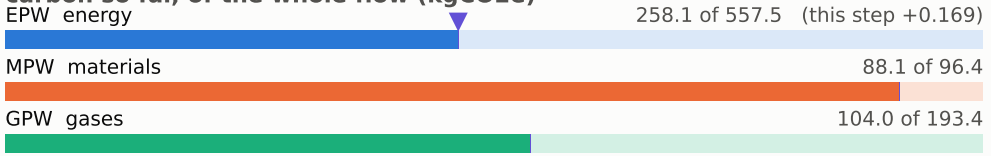

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

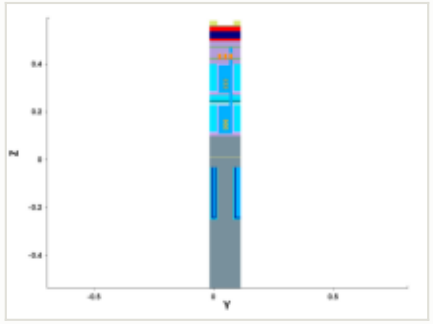

y cut at 0.049 µm

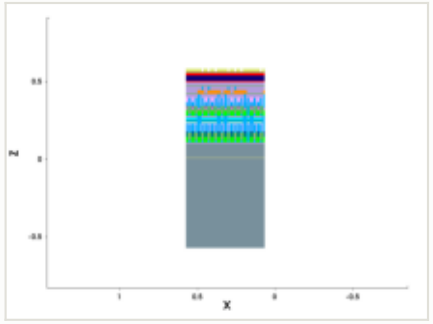

mask for this step

no mask for this step

steps by process area

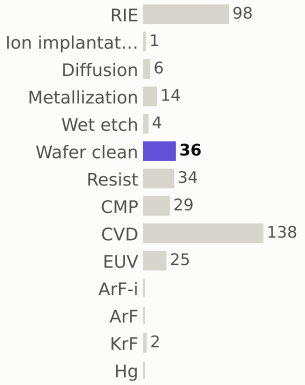

materials deposited (g)

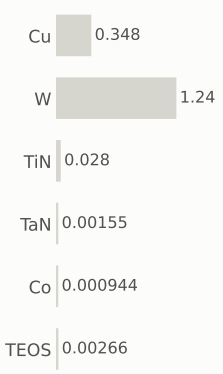

gases emitted (g)

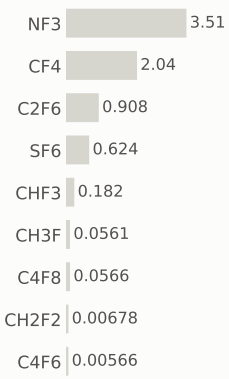

Step #4200: RIE

etch_anisotropic · RIE

1.04	451.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

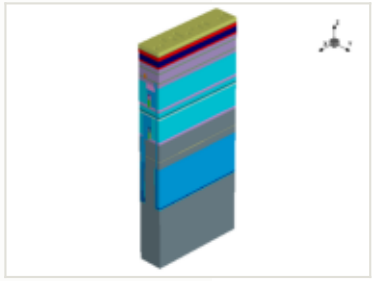

x cut at 0.385 µm

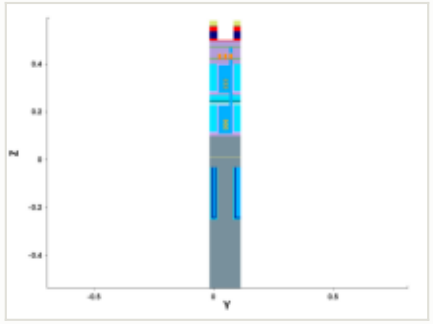

y cut at 0.049 µm

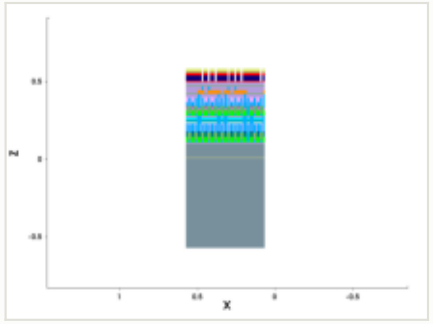

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

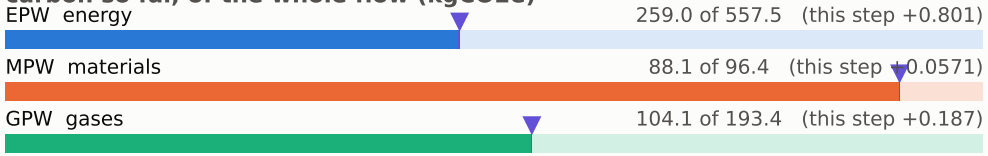

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

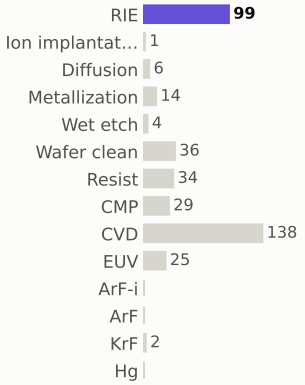

materials deposited (g)

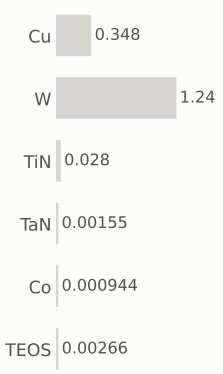

gases emitted (g)

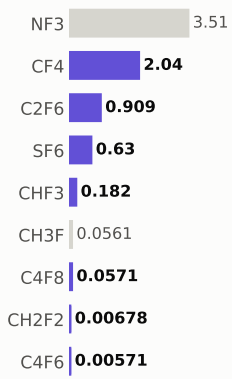

Step #4210: Wafer_clean

clean · Wafer_clean

0.169	451.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

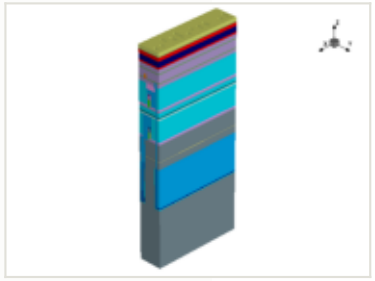

x cut at 0.385 µm

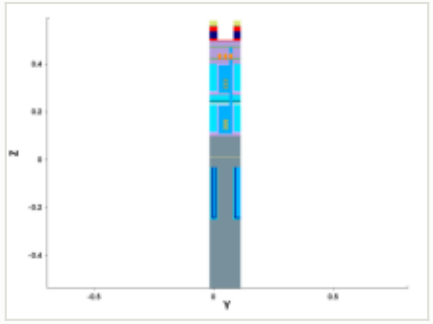

y cut at 0.049 µm

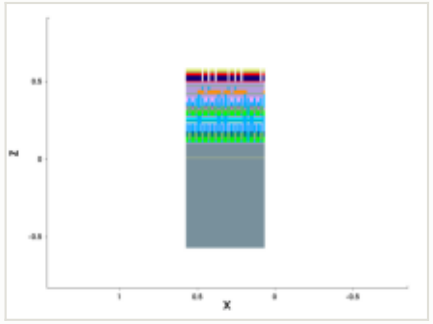

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

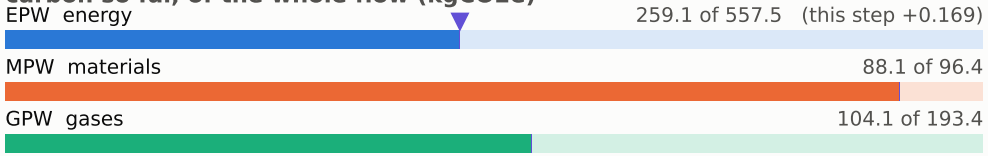

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

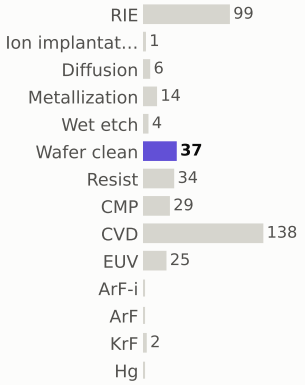

materials deposited (g)

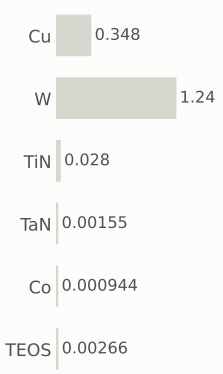

gases emitted (g)

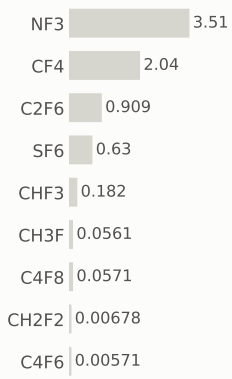

Step #4220: RIE

etch_anisotropic · RIE

1.04	452.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

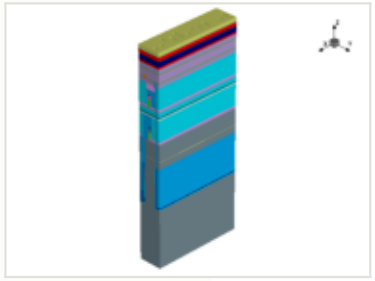

x cut at 0.385 µm

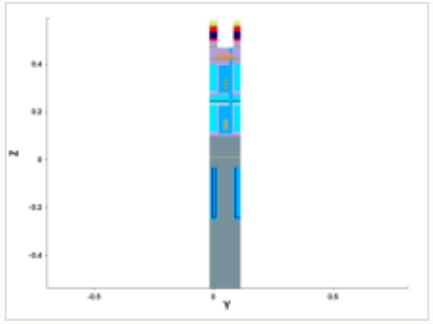

y cut at 0.049 µm

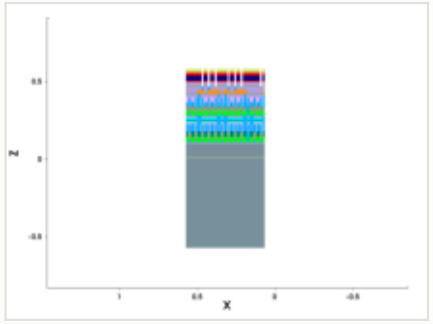

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

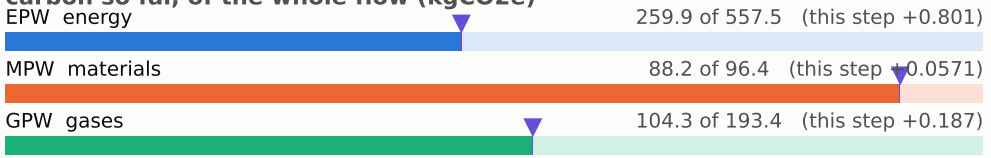

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

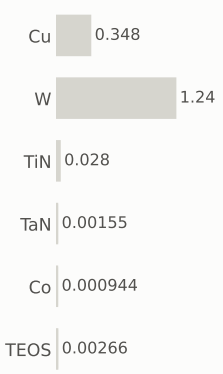

gases emitted (g)

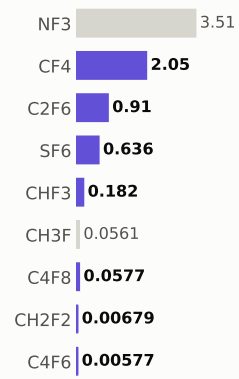

Step #4230: Wafer_clean

clean · Wafer_clean

0.169	452.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

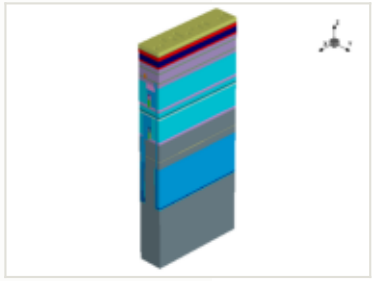

x cut at 0.385 µm

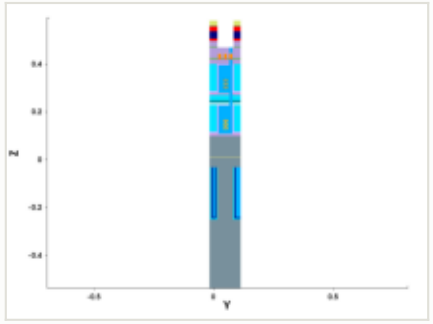

y cut at 0.049 µm

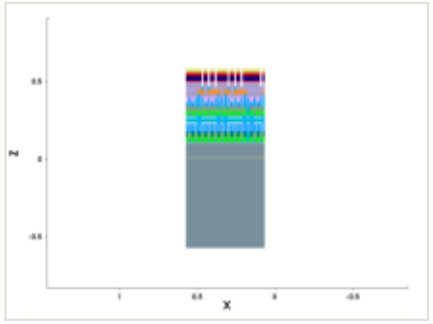

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

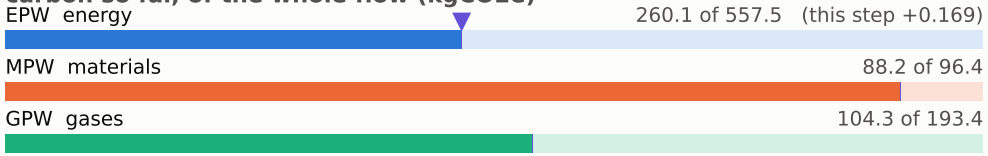

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

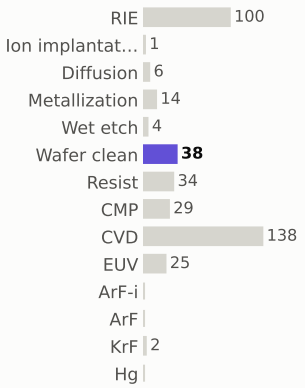

materials deposited (g)

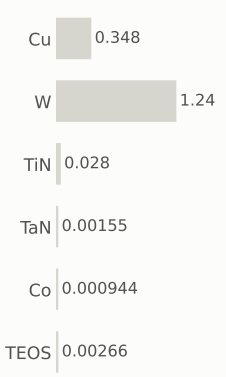

gases emitted (g)

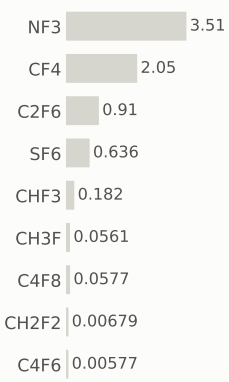

Step #4240: Metallization

depo_ellipsoidal · Metallization

1.2	453.8	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

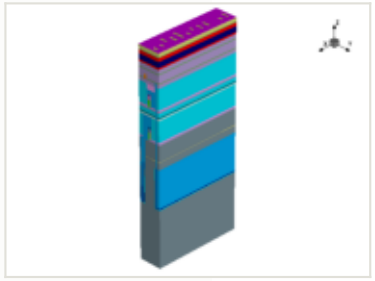

x cut at 0.385 µm

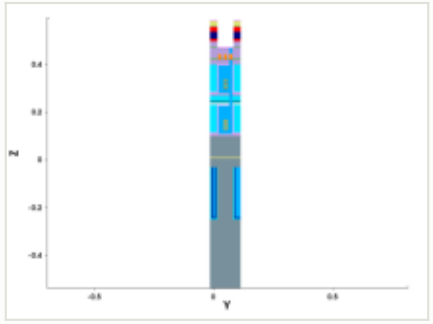

y cut at 0.049 µm

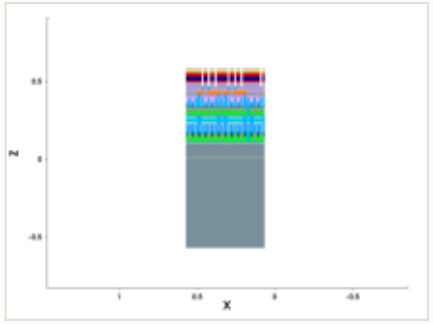

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

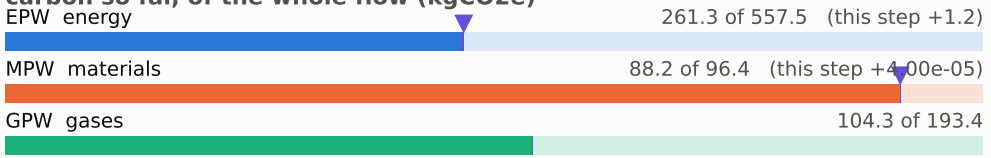

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

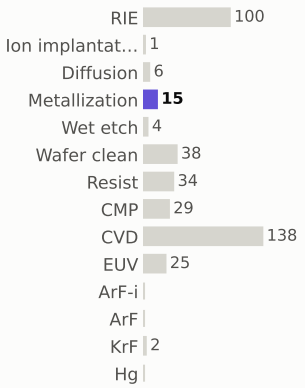

materials deposited (g)

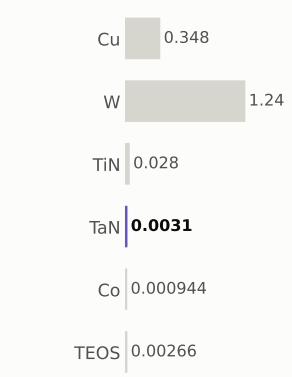

gases emitted (g)

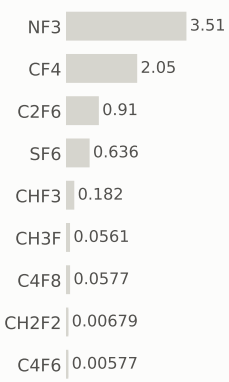

Step #4250: Metallization

depo_fill · Metallization

1.21	455.0	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

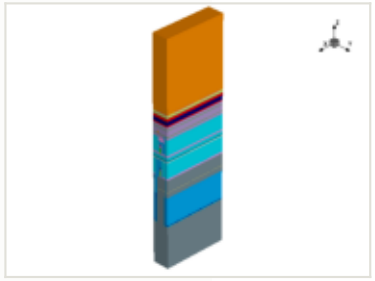

x cut at 0.385 µm

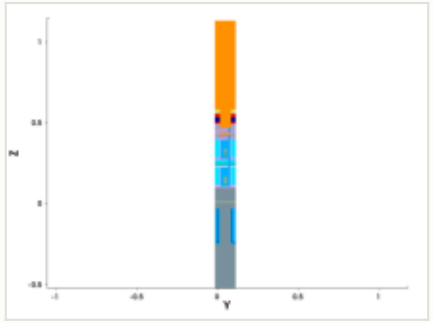

y cut at 0.049 µm

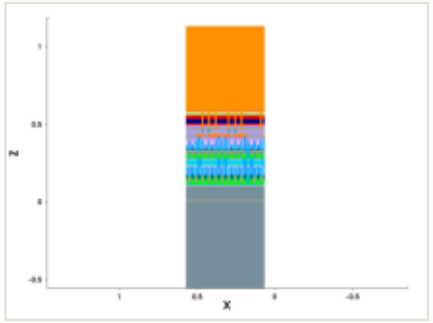

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Cu	EPW tool	0.86 kgCO2e
thickness	0.55 µm	EPW overhead	0.344 kgCO2e
material GWP	6.09011 gCO2e/g	MPW	0.00212 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

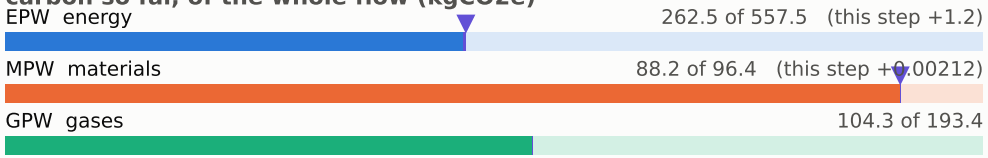

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

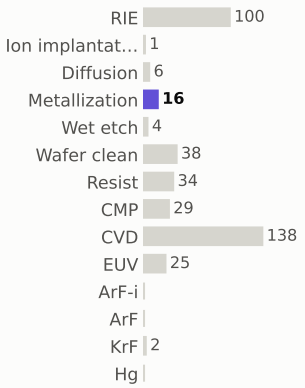

materials deposited (g)

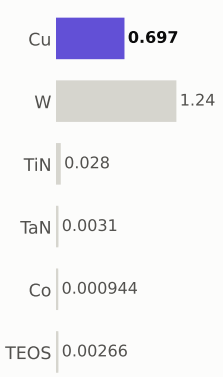

gases emitted (g)

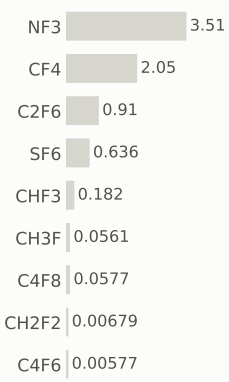

Step #4260: Diffusion

treatment · Diffusion

0.801	455.8	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

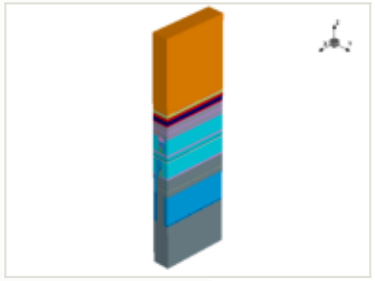

x cut at 0.385 µm

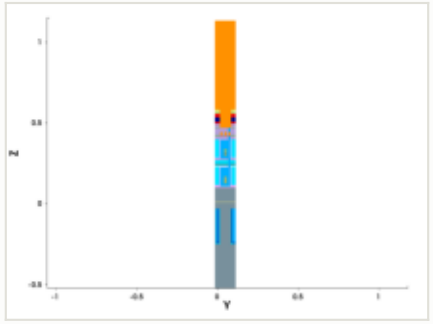

y cut at 0.049 µm

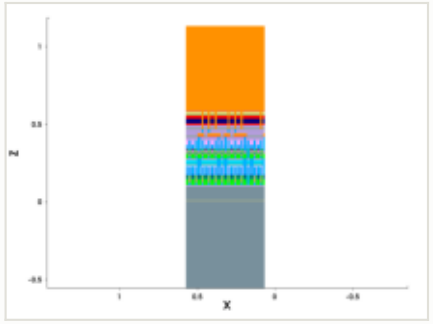

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

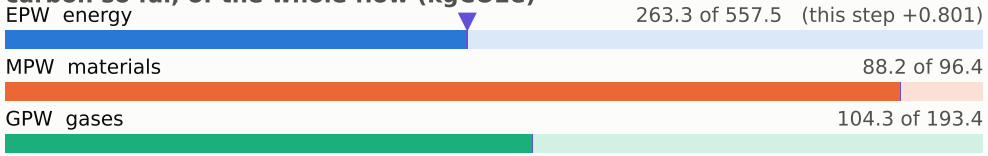

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

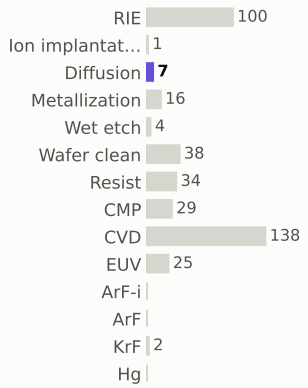

materials deposited (g)

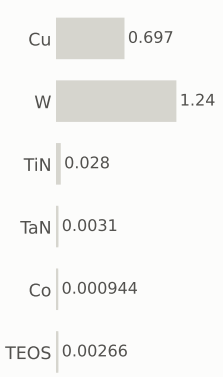

gases emitted (g)

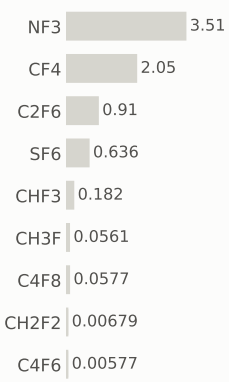

Step #4270: CMP

etch_cmp · CMP

0.169	456.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

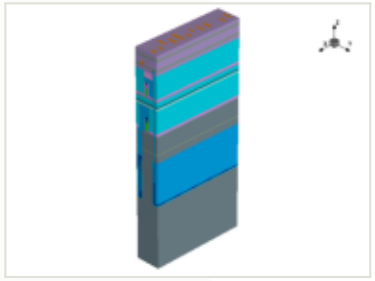

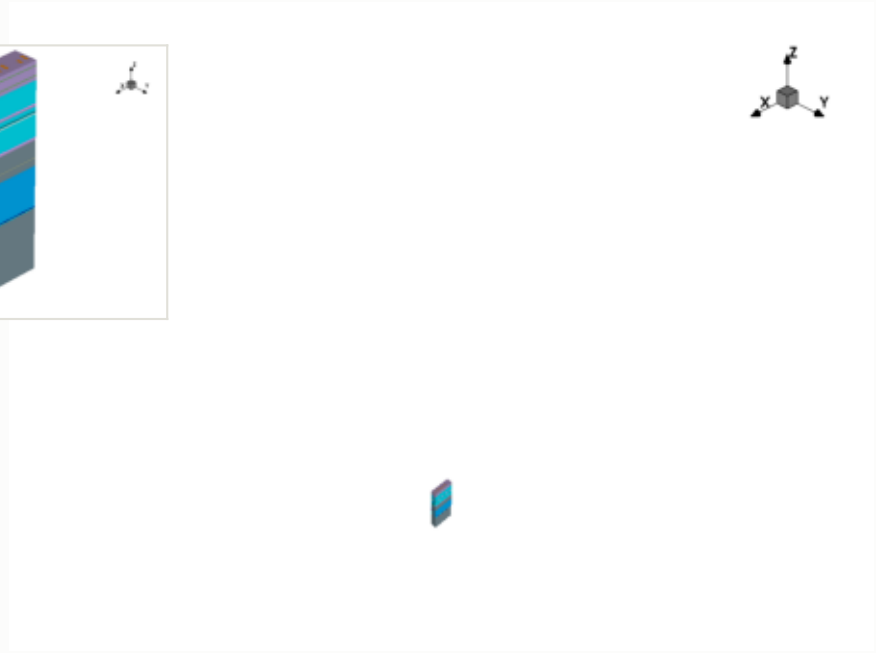

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

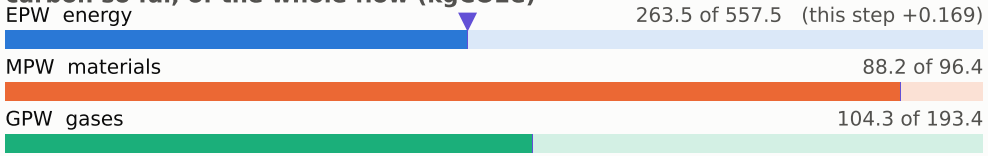

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

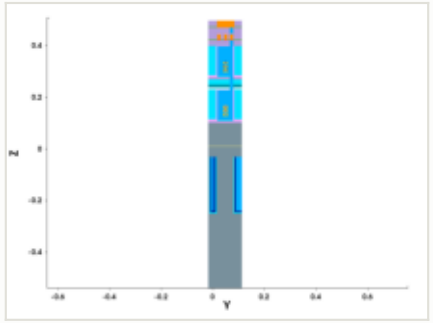

y cut at 0.049 µm

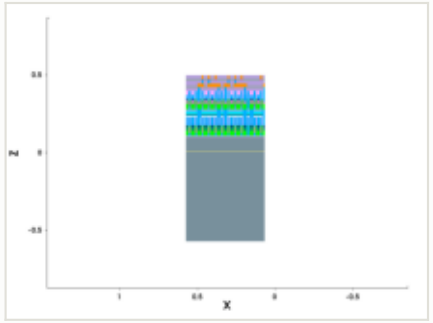

mask for this step

no mask for this step

steps by process area

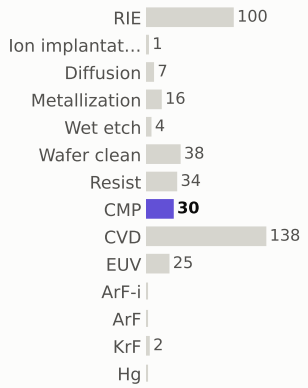

materials deposited (g)

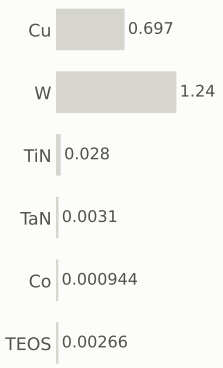

gases emitted (g)

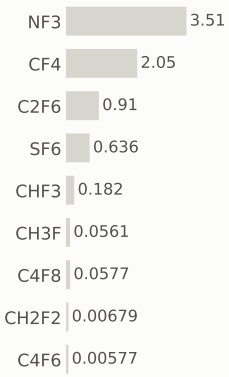

Step #4280: Metallization

depo_isotropic · Metallization

1.2	457.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

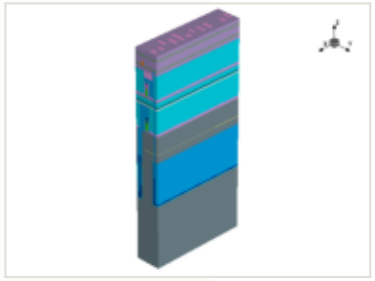

x cut at 0.385 µm

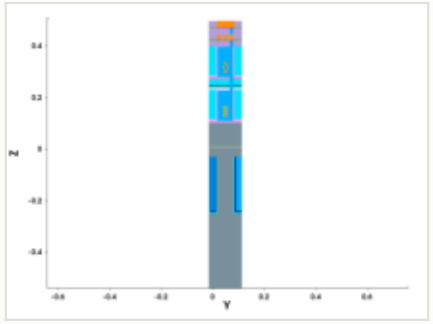

y cut at 0.049 µm

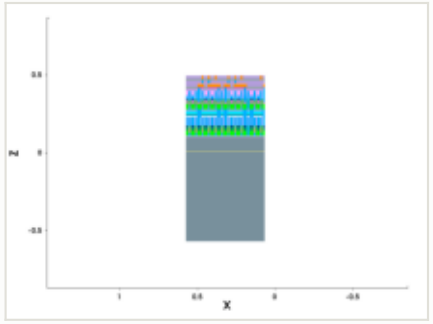

mask for this step

no mask for this step

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

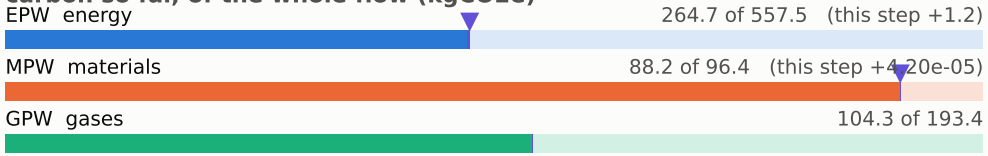

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

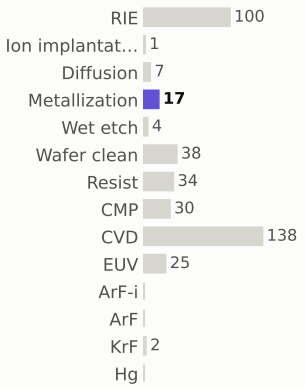

materials deposited (g)

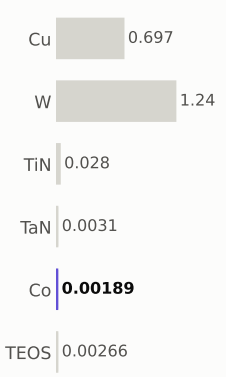

gases emitted (g)

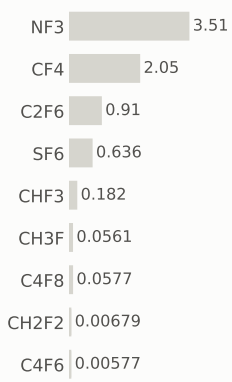

Step #4300: CVD

depo_fill · CVD

1.31	458.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

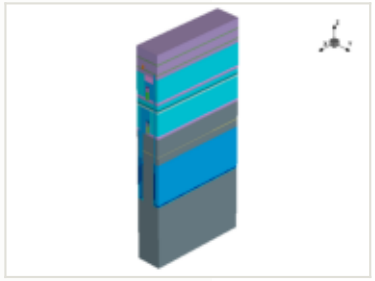

this step

process area	CVD
material	—
thickness	0.024 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

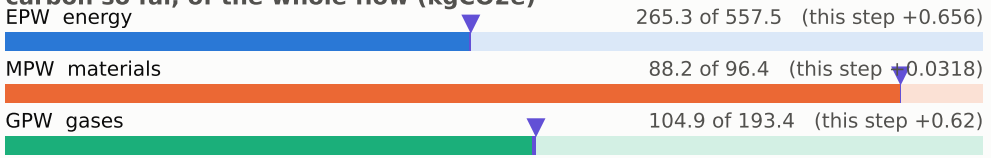

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

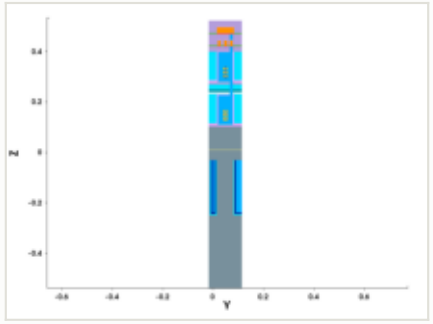

y cut at 0.049 µm

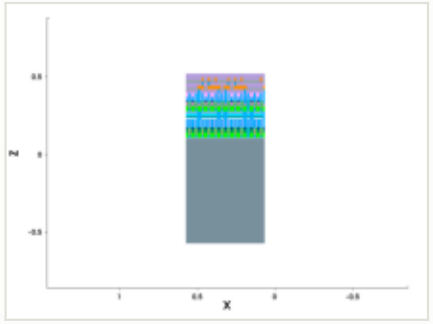

mask for this step

no mask for this step

steps by process area

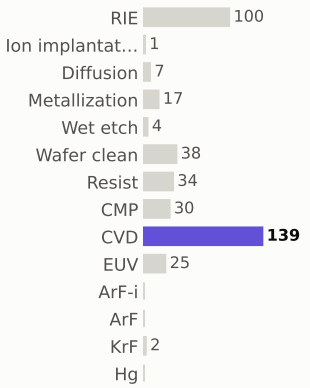

materials deposited (g)

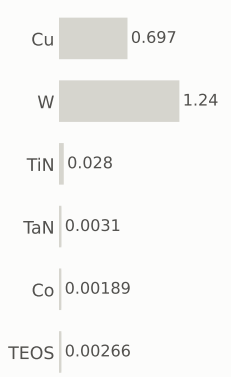

gases emitted (g)

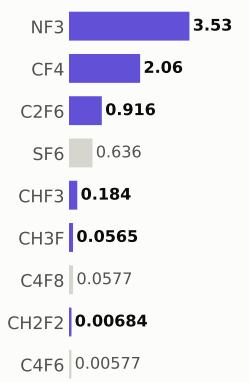

Step #4310: Diffusion

treatment · Diffusion

0.801	459.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

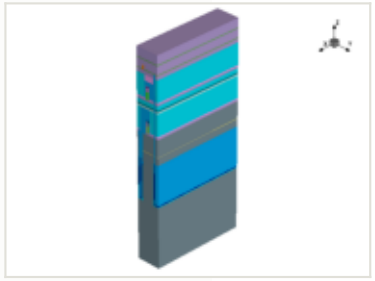

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

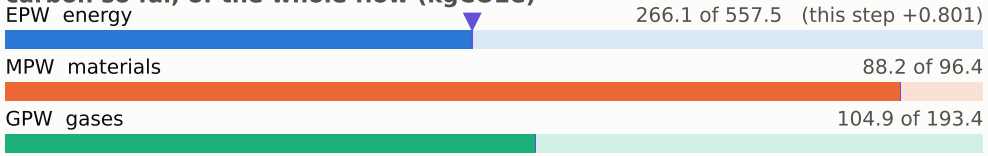

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

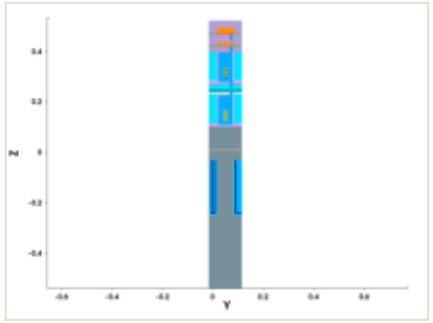

y cut at 0.049 µm

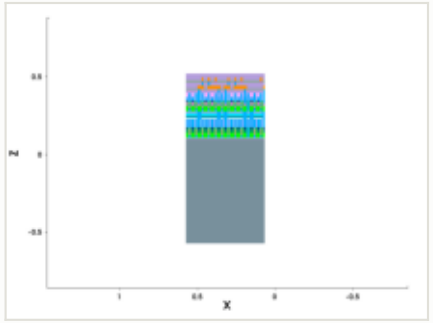

mask for this step

no mask for this step

steps by process area

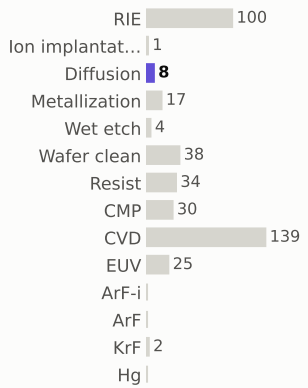

materials deposited (g)

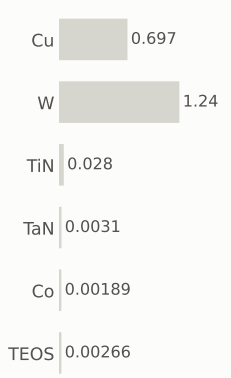

gases emitted (g)

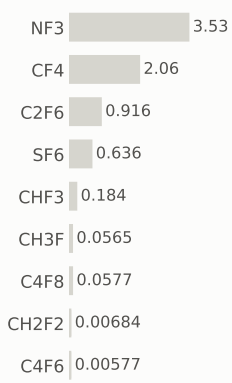

Step #4320: Wafer_clean

clean · Wafer_clean

0.169	459.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

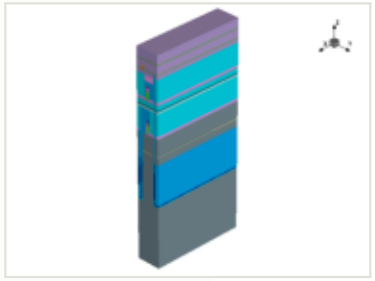

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

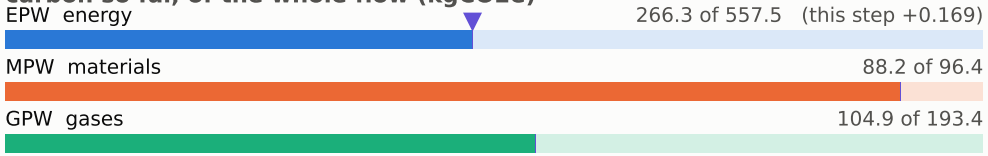

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

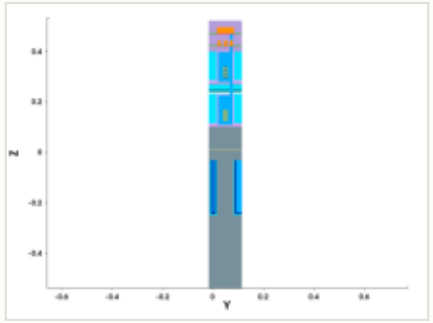

y cut at 0.049 µm

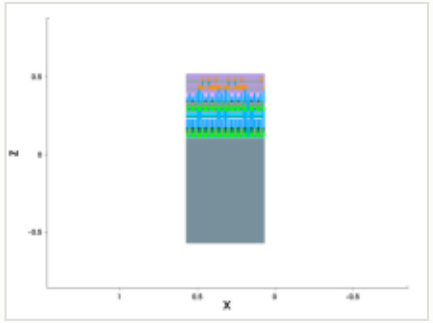

mask for this step

no mask for this step

steps by process area

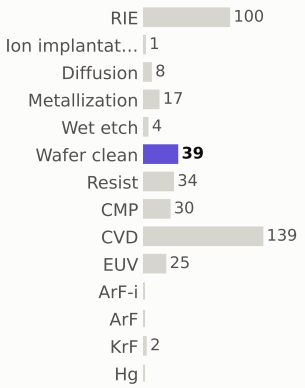

materials deposited (g)

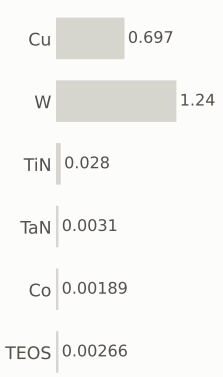

gases emitted (g)

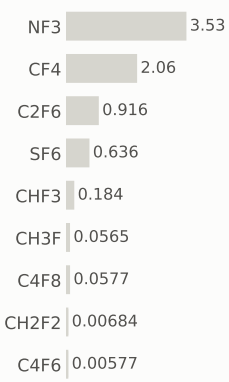

Step #4330: CVD

depo_fill · CVD

1.31	460.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

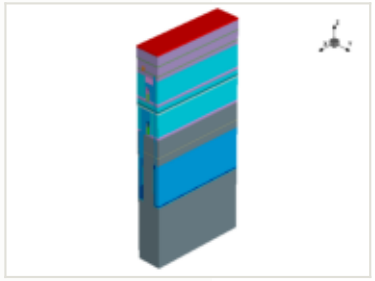

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

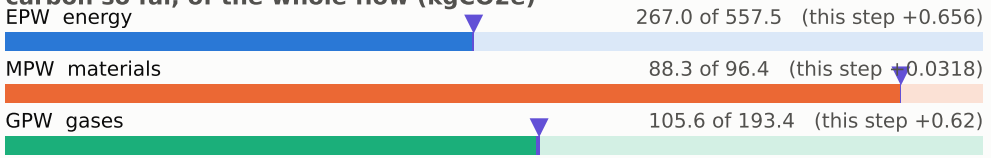

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

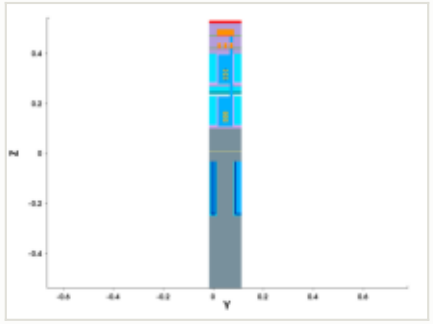

y cut at 0.049 µm

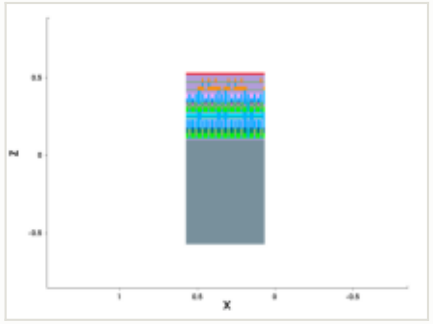

mask for this step

no mask for this step

steps by process area

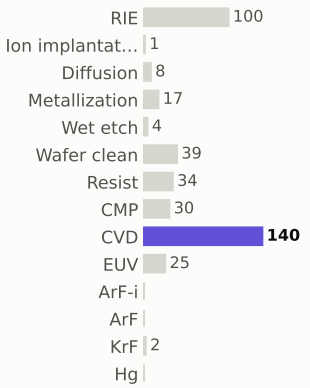

materials deposited (g)

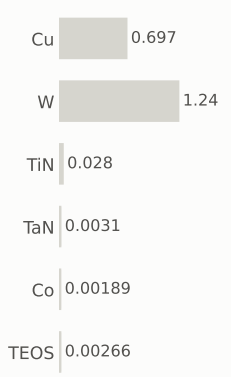

gases emitted (g)

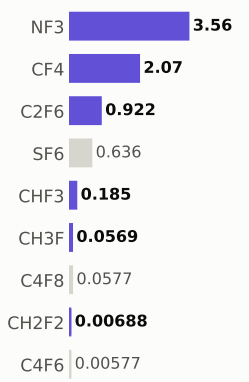

Step #4340: Resist

depo_fill · Resist

0.169	460.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

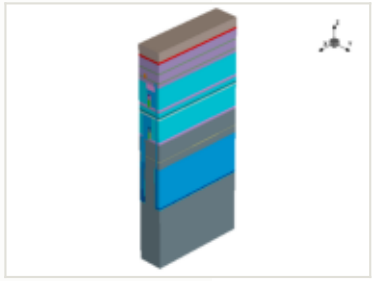

this step

process area	Resist
material	—
thickness	0.05 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

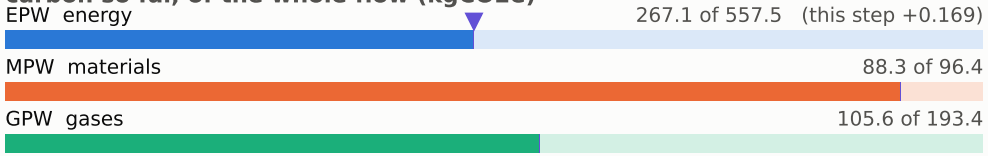

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

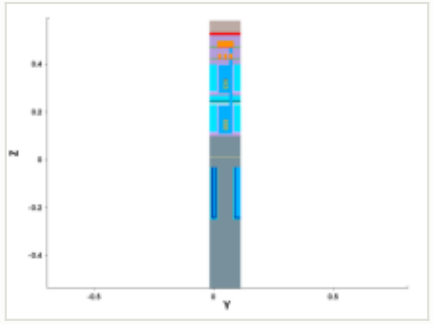

y cut at 0.049 µm

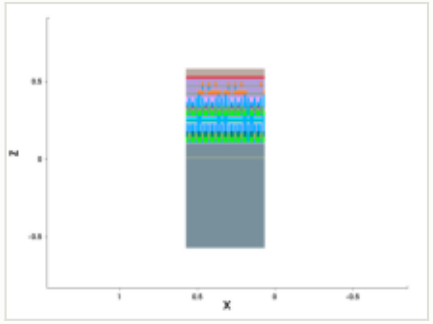

mask for this step

no mask for this step

steps by process area

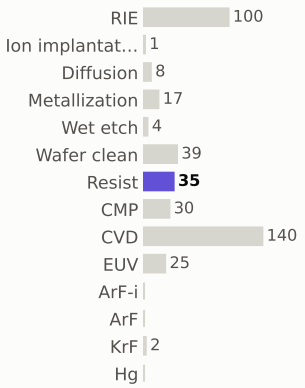

materials deposited (g)

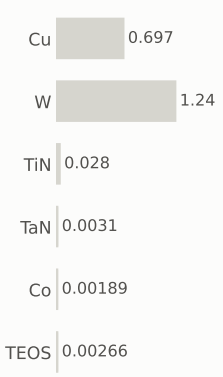

gases emitted (g)

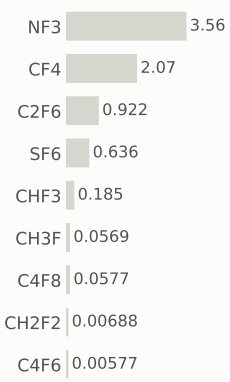

Step #4350: CVD

depo_fill · CVD

1.31	462.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

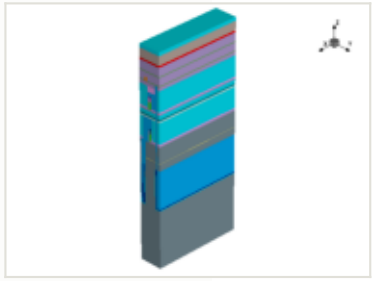

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

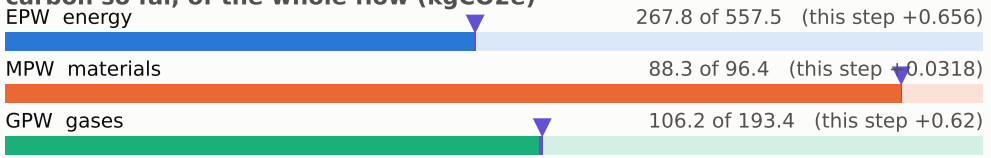

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

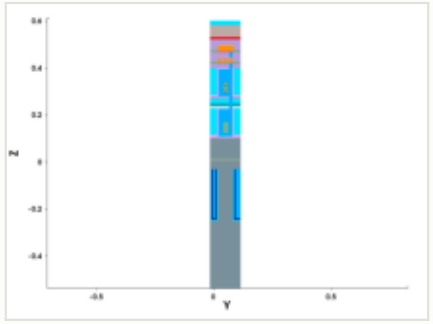

y cut at 0.049 µm

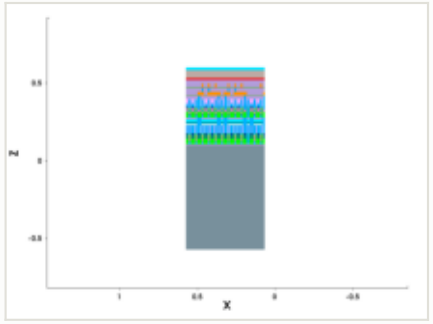

mask for this step

no mask for this step

steps by process area

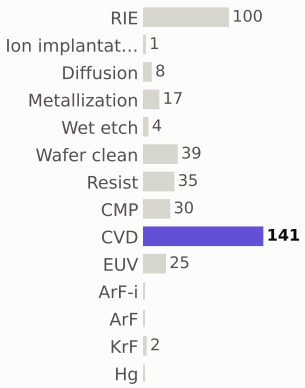

materials deposited (g)

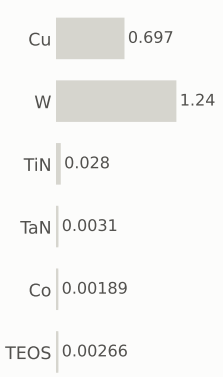

gases emitted (g)

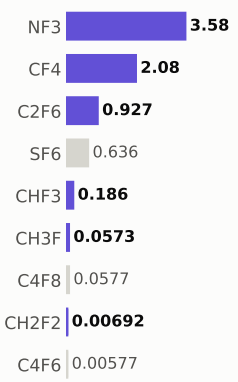

Step #4360: CVD

depo_fill · CVD

1.31	463.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

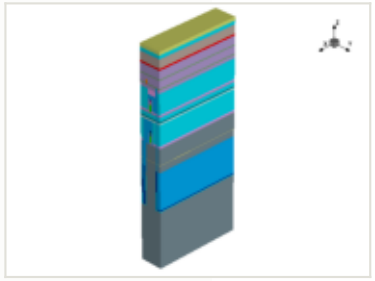

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

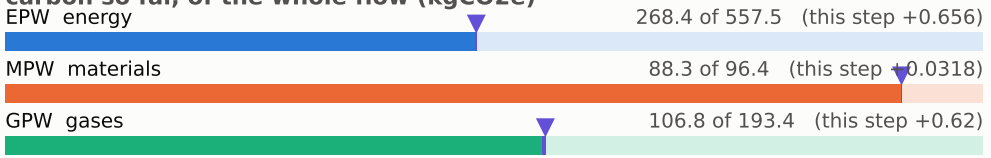

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

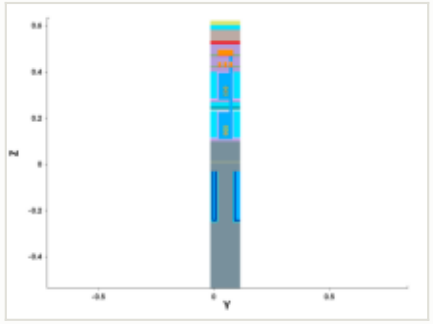

y cut at 0.049 µm

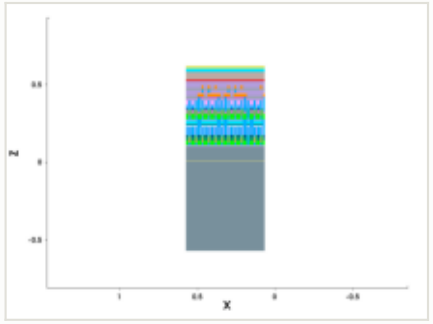

mask for this step

no mask for this step

steps by process area

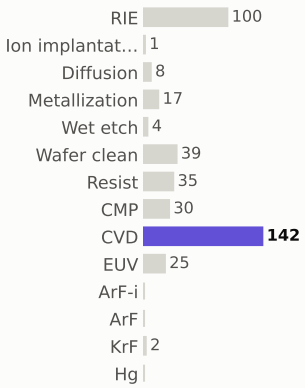

materials deposited (g)

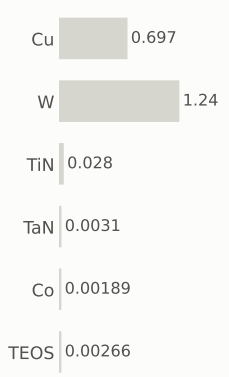

gases emitted (g)

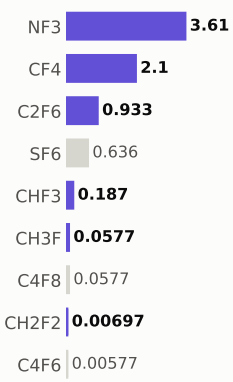

Step #4370: Resist

depo_fill · Resist

0.169	463.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

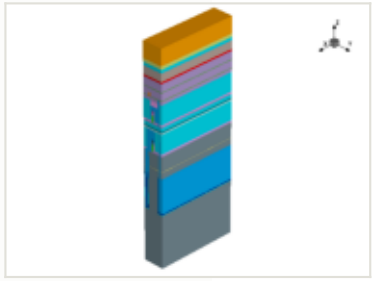

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

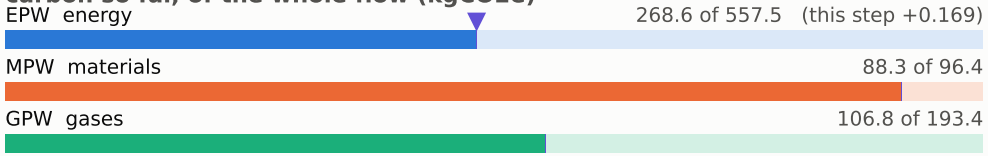

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

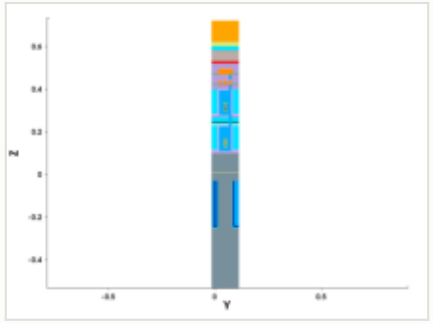

y cut at 0.049 µm

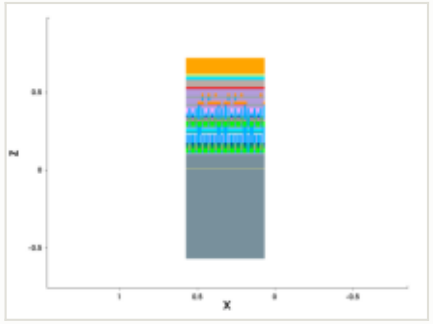

mask for this step

no mask for this step

steps by process area

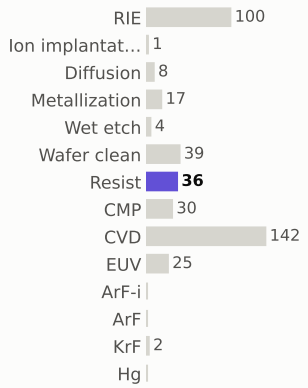

materials deposited (g)

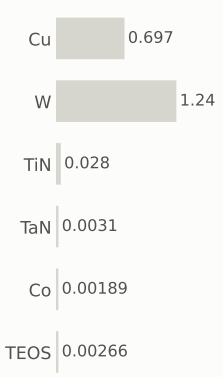

gases emitted (g)

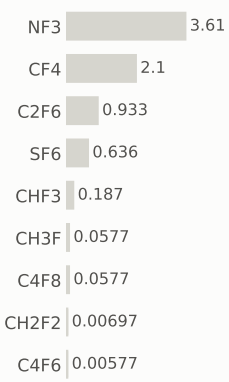

Step #4380: CVD

depo_fill · CVD

1.31	465.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

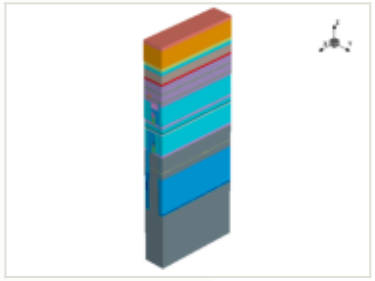

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

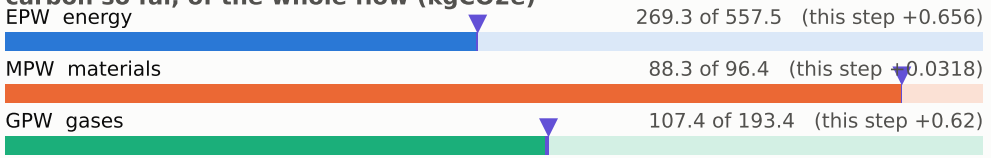

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

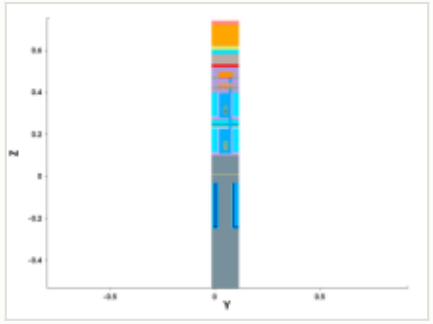

y cut at 0.049 µm

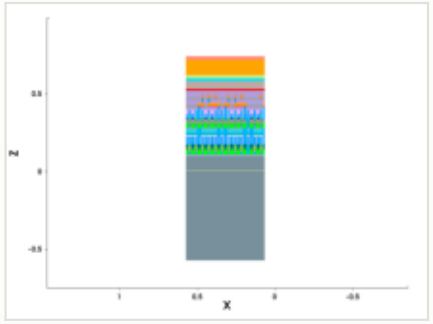

mask for this step

no mask for this step

steps by process area

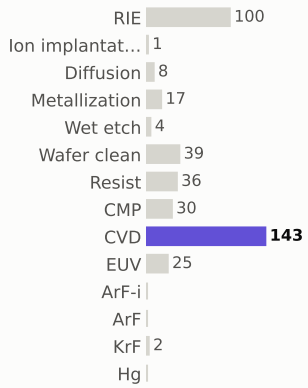

materials deposited (g)

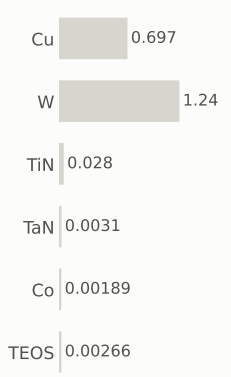

gases emitted (g)

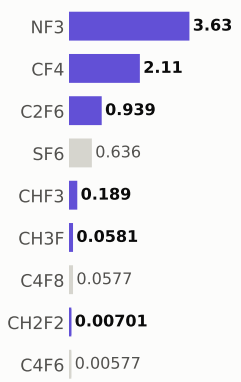

Step #4390: Wafer_clean

clean · Wafer_clean

0.169	465.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

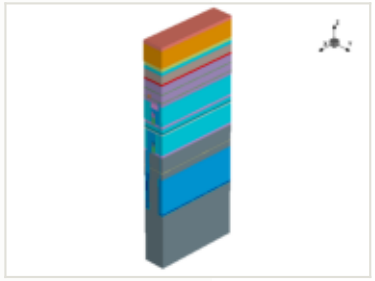

x cut at 0.385 µm

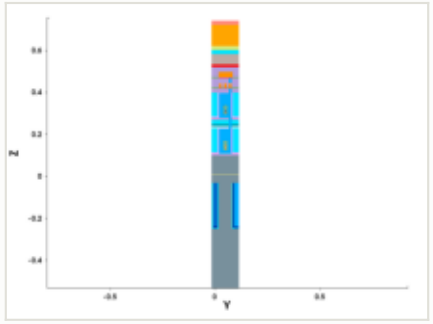

y cut at 0.049 µm

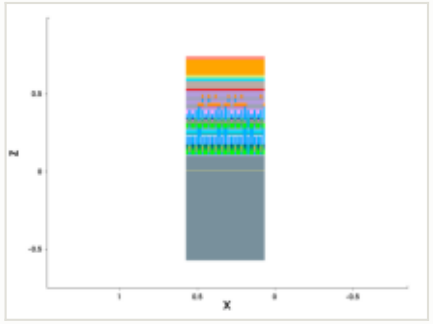

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

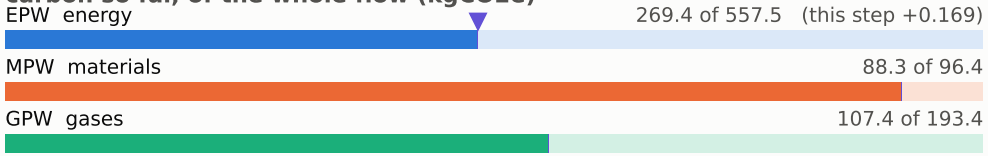

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

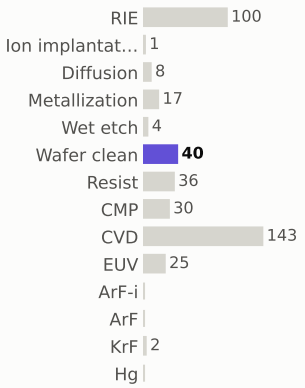

materials deposited (g)

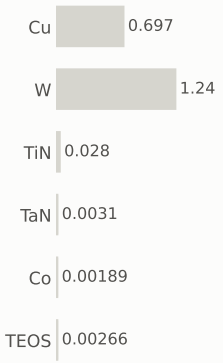

gases emitted (g)

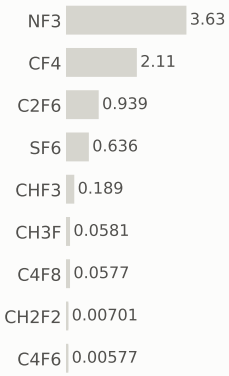

Step #4400: EUV

litho_patterning · EUV

1.96	467.2	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

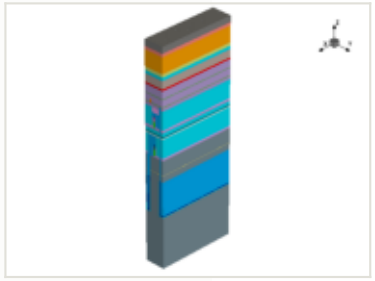

x cut at 0.385 µm

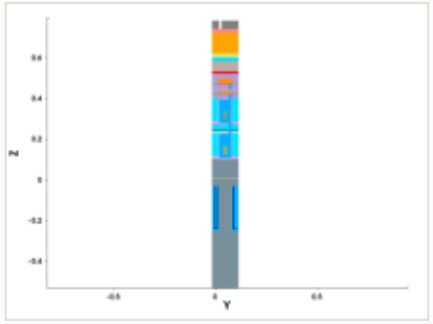

y cut at 0.049 µm

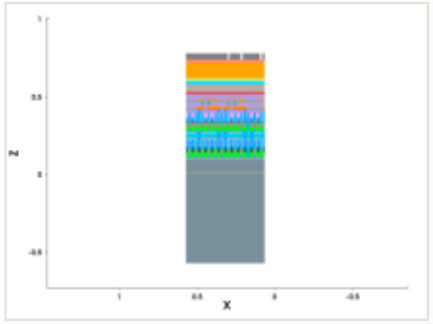

mask: layer 10271:0 (GDSII)

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

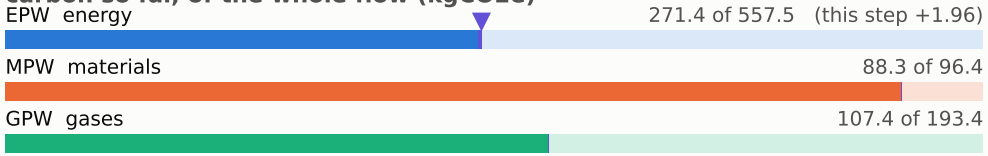

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

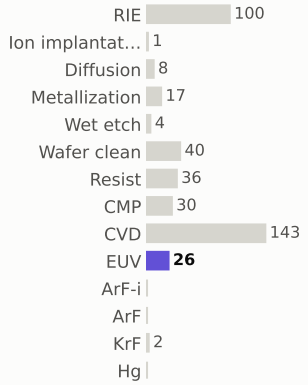

materials deposited (g)

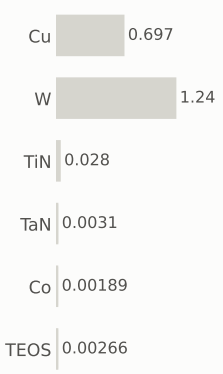

gases emitted (g)

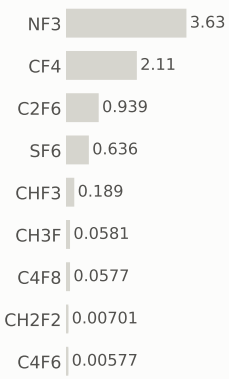

Step #4410: RIE

etch_anisotropic · RIE

1.04	468.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

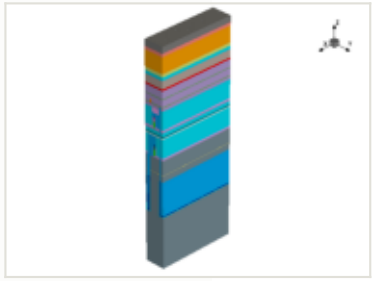

x cut at 0.385 µm

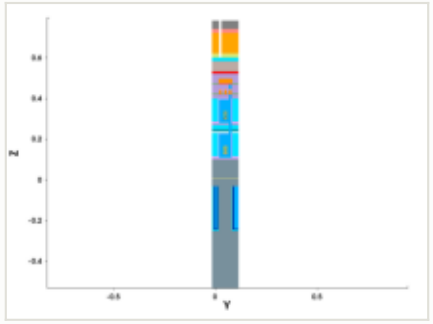

y cut at 0.049 µm

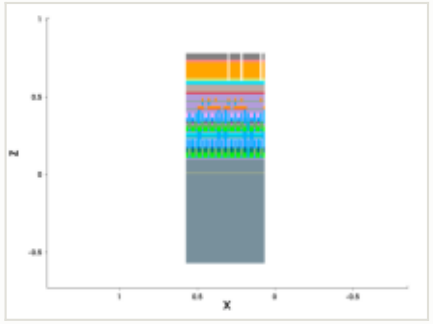

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

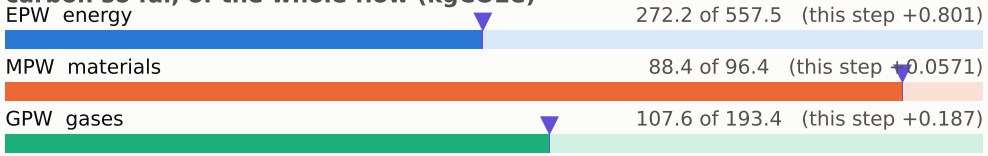

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

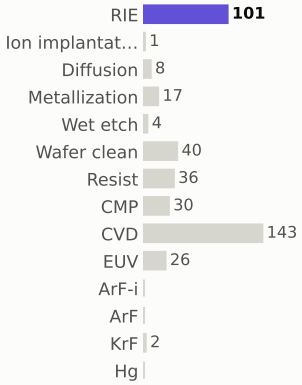

materials deposited (g)



gases emitted (g)

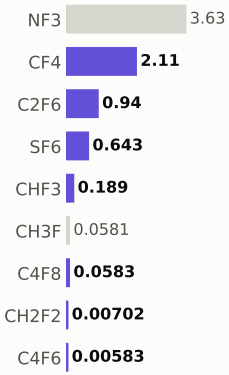

Step #4420: Wafer_clean

etch_strip · Wafer_clean

0.169	468.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

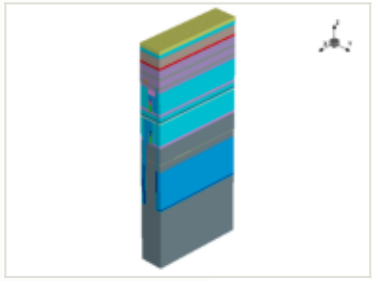

x cut at 0.385 µm

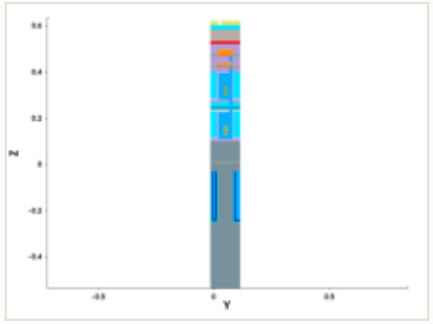

y cut at 0.049 µm

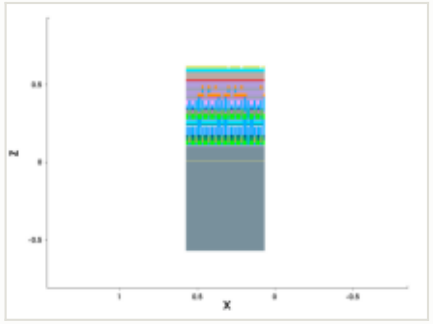

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

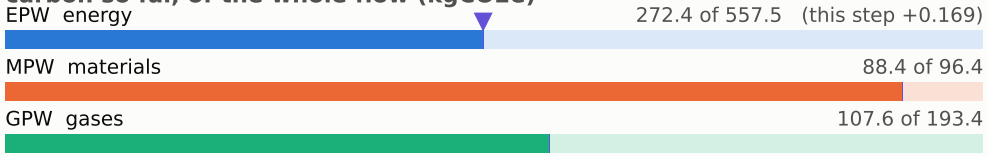

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

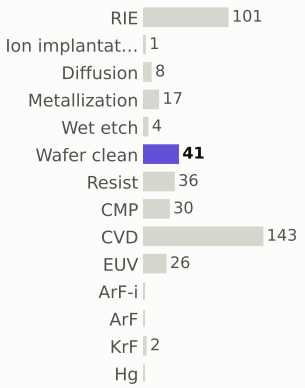

materials deposited (g)

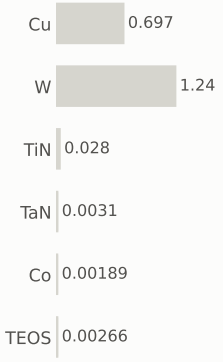

gases emitted (g)

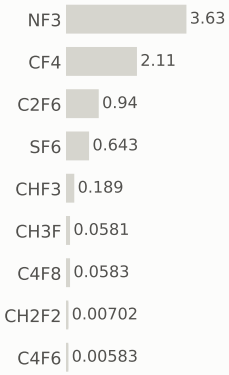

Step #4430: Resist

depo_fill · Resist

0.169	468.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

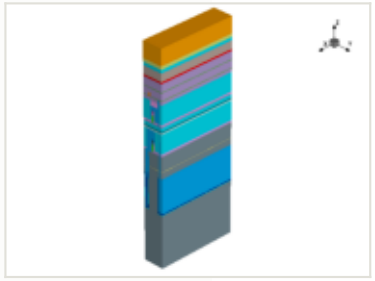

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

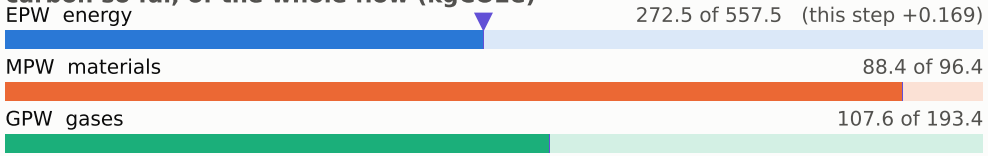

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

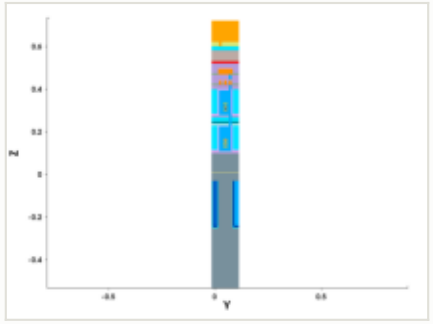

y cut at 0.049 µm

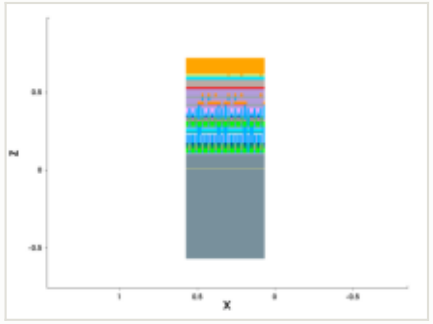

mask for this step

no mask for this step

steps by process area

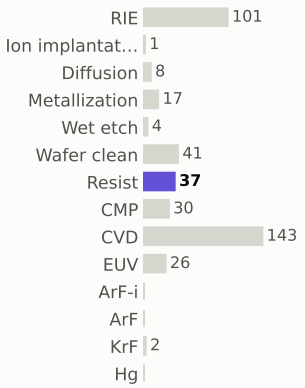

materials deposited (g)

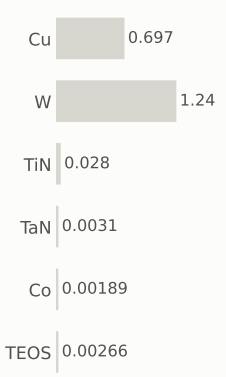

gases emitted (g)

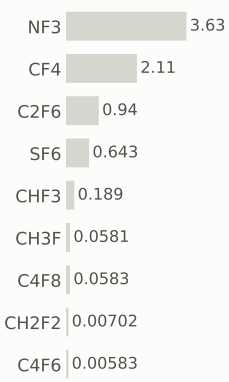

Step #4440: CVD

depo_fill · CVD

1.31	469.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

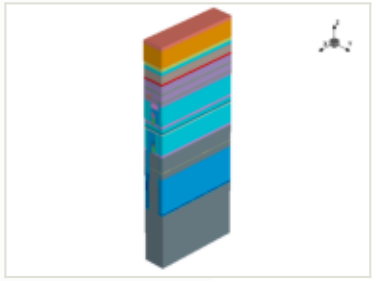

x cut at 0.385 µm

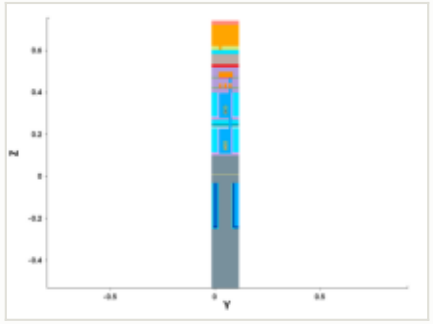

y cut at 0.049 µm

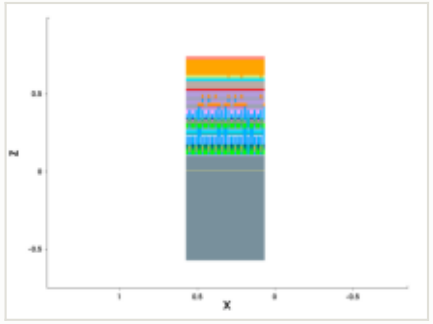

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

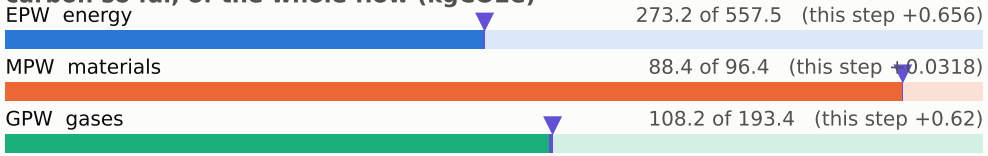

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

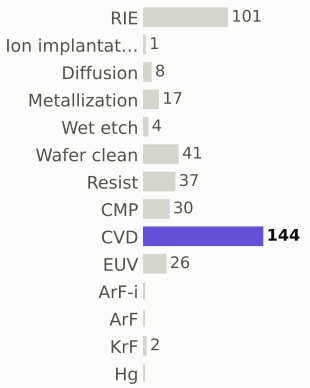

materials deposited (g)

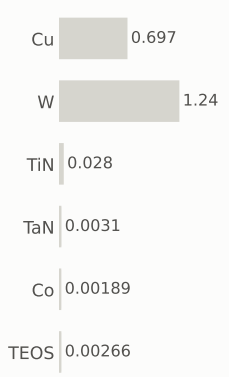

gases emitted (g)

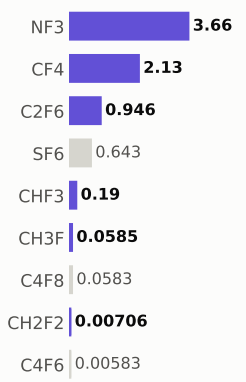

Step #4450: Wafer_clean

clean · Wafer_clean

0.169	470.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

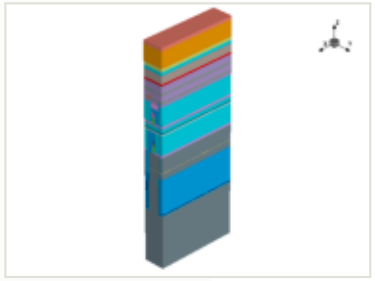

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

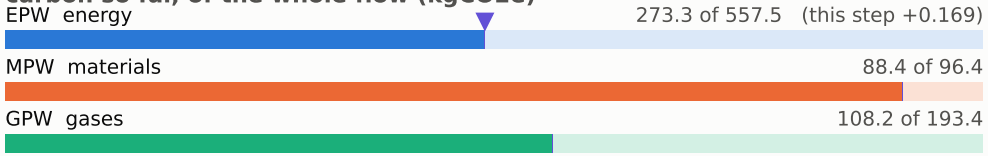

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

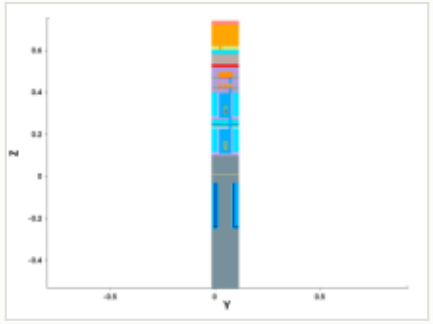

y cut at 0.049 µm

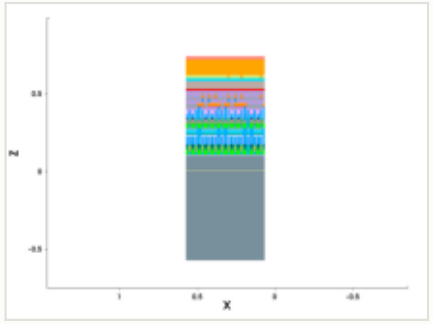

mask for this step

no mask for this step

steps by process area

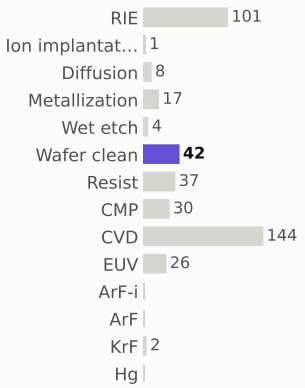

materials deposited (g)

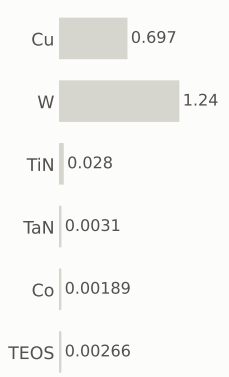

gases emitted (g)

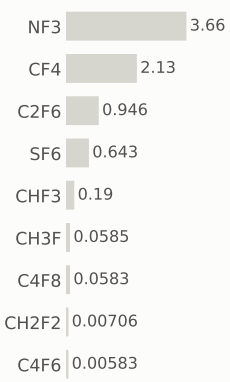

Step #4460: EUV

litho_patterning · EUV

1.96	472.0	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

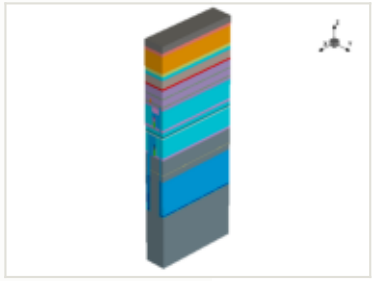

x cut at 0.385 µm

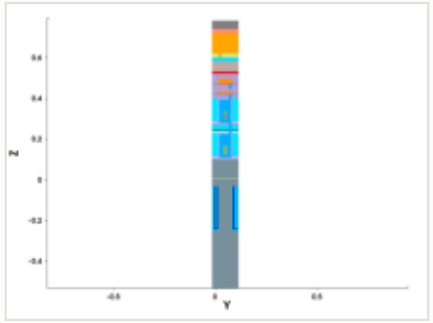

y cut at 0.049 µm

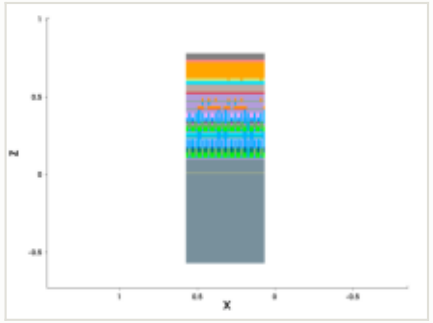

mask: layer 10272:0 (GDSII)

nothing in the clip window

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

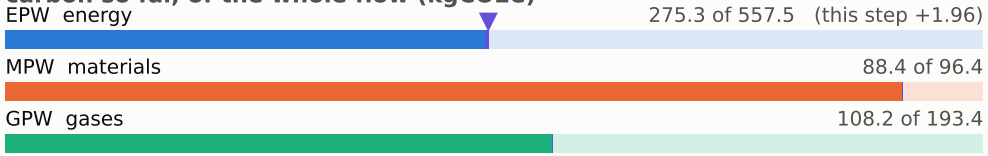

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

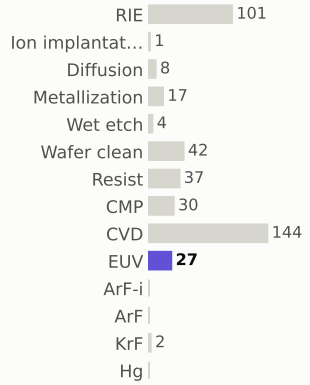

materials deposited (g)

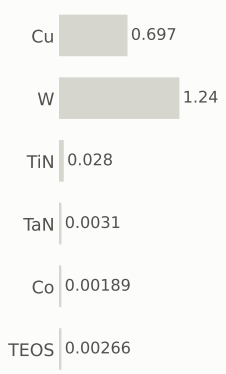

gases emitted (g)

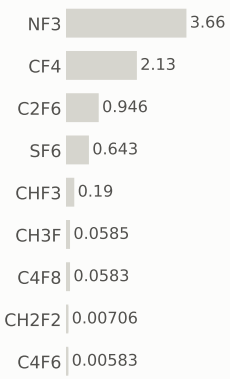

Step #4470: RIE

etch_anisotropic · RIE

1.04	473.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

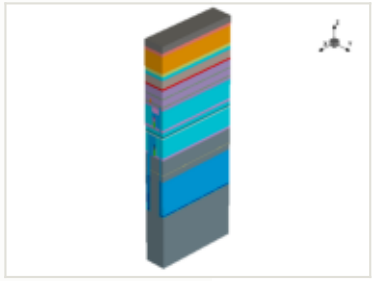

x cut at 0.385 µm

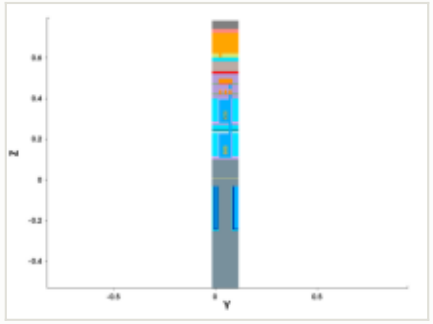

y cut at 0.049 µm

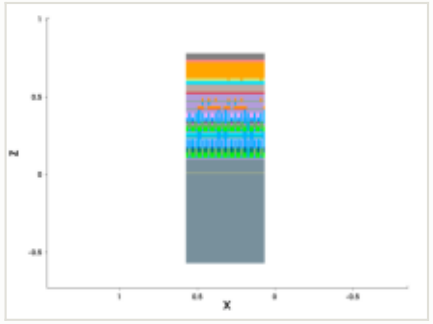

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

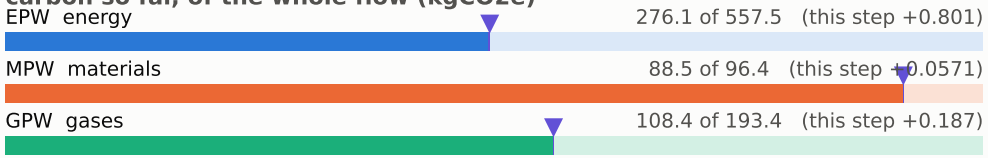

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

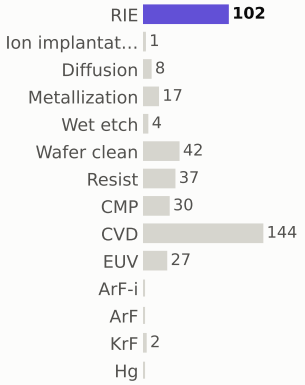

materials deposited (g)

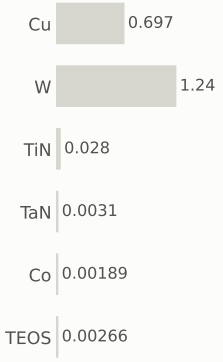

gases emitted (g)

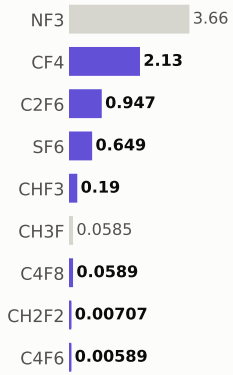

Step #4480: Wafer_clean

etch_strip · Wafer_clean

0.169	473.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

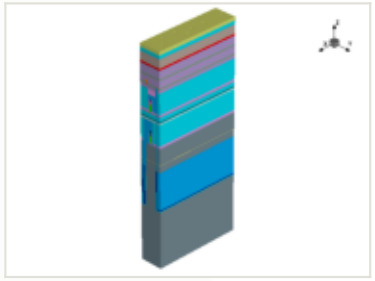

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

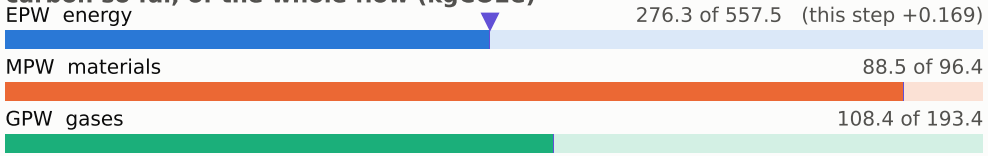

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

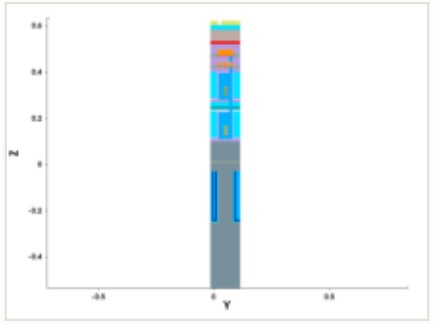

y cut at 0.049 µm

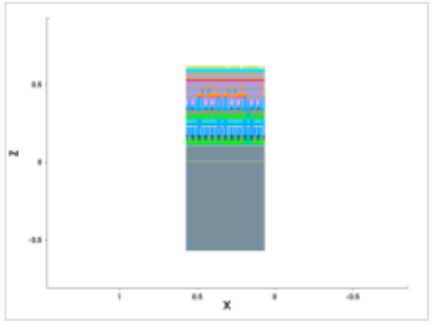

mask for this step

no mask for this step

steps by process area

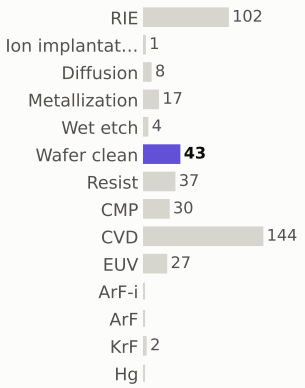

materials deposited (g)

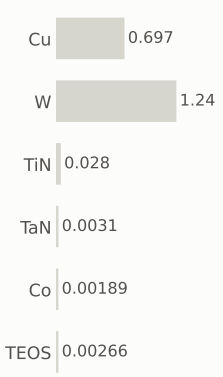

gases emitted (g)

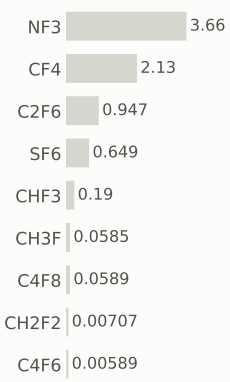

Step #4490: RIE

etch_anisotropic · RIE

1.04	474.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

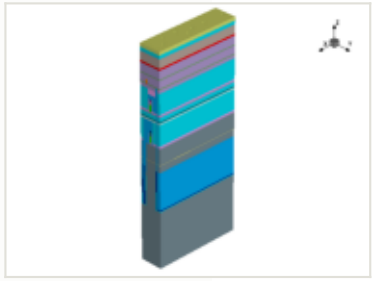

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

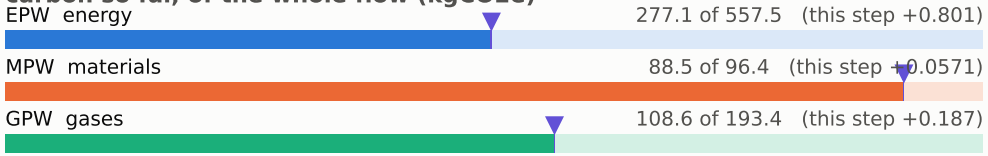

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

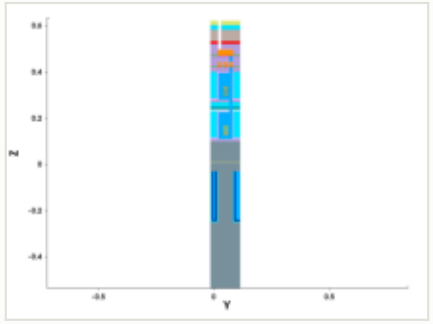

y cut at 0.049 µm

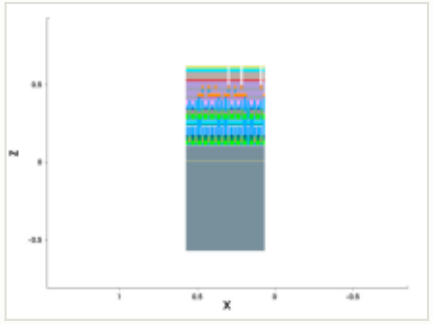

mask for this step

no mask for this step

steps by process area

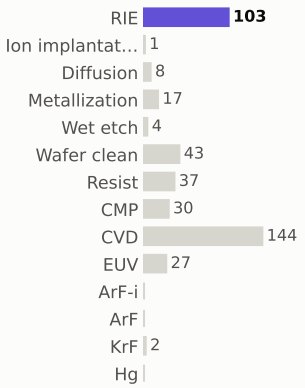

materials deposited (g)

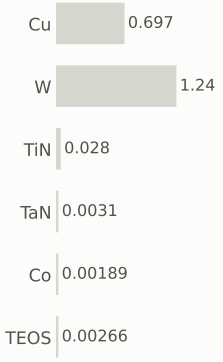

gases emitted (g)

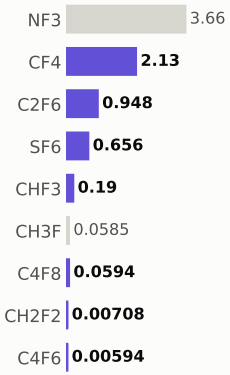

Step #4500: Wafer_clean

clean · Wafer_clean

0.169	474.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

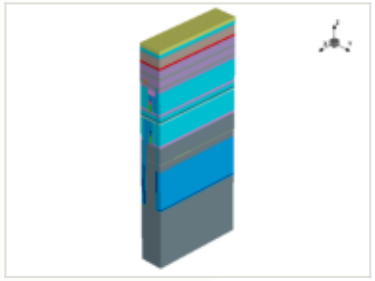

x cut at 0.385 µm

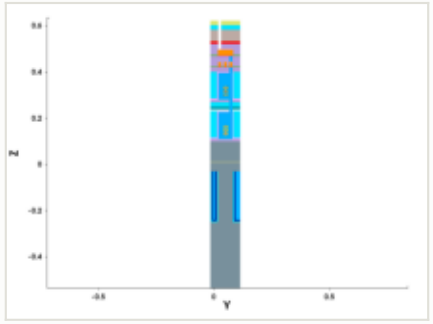

y cut at 0.049 µm

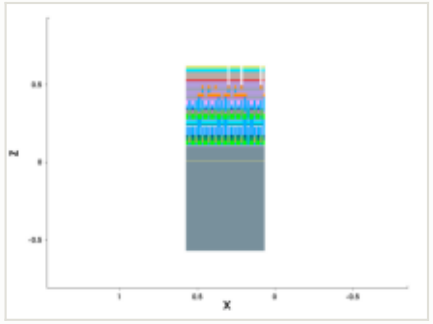

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

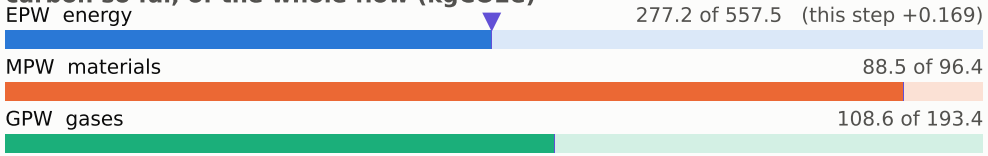

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

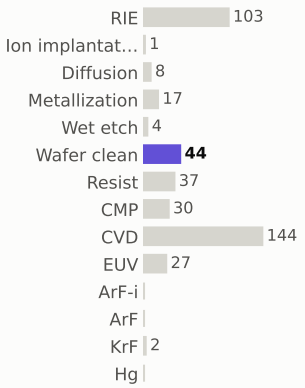

materials deposited (g)

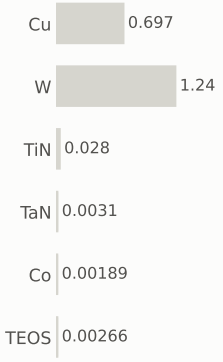

gases emitted (g)

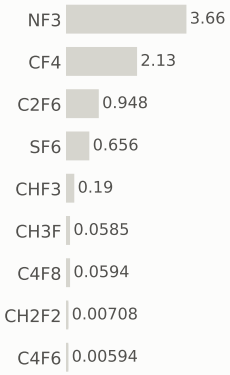

Step #4510: Metallization

depo_fill · Metallization

1.21	475.6	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

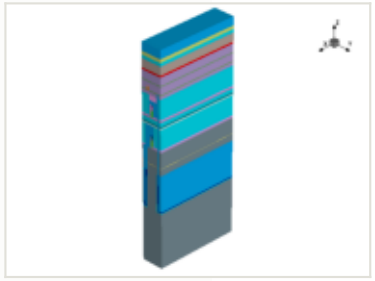

x cut at 0.385 µm

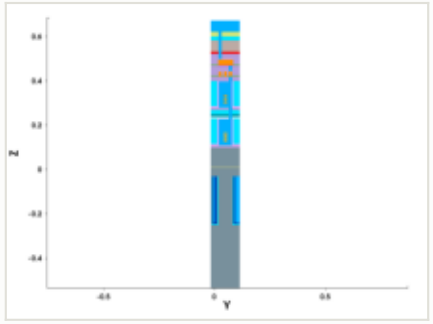

y cut at 0.049 µm

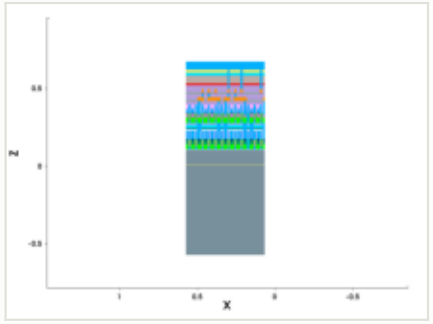

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	W	EPW tool	0.86 kgCO2e
thickness	0.05 µm	EPW overhead	0.344 kgCO2e
material GWP	75.8149 gCO2e/g	MPW	0.00517 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

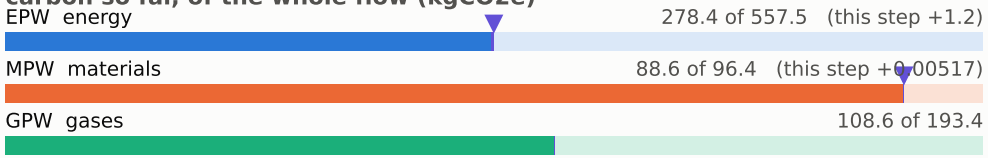

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

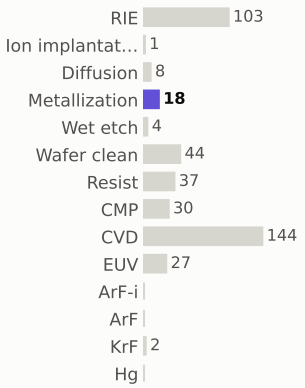

materials deposited (g)

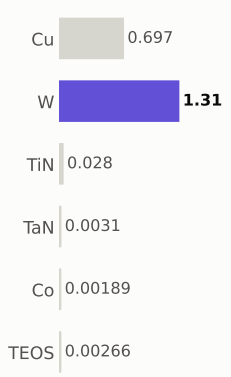

gases emitted (g)

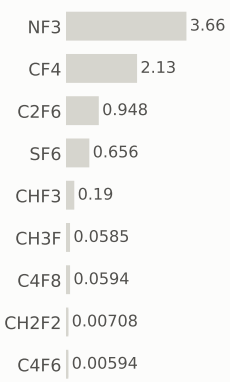

Step #4520: CMP

etch_cmp · CMP

0.169	475.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

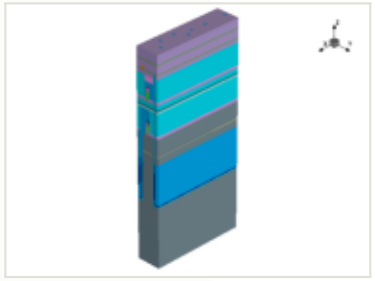

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

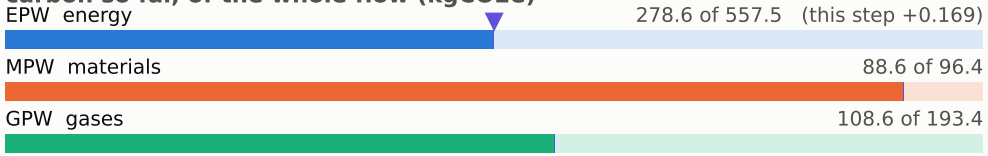

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

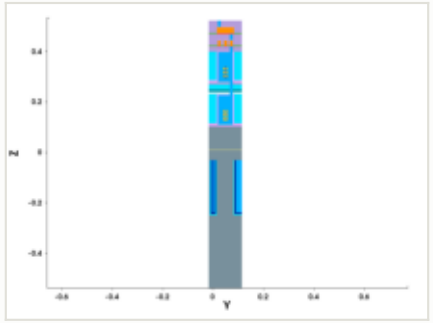

y cut at 0.049 µm

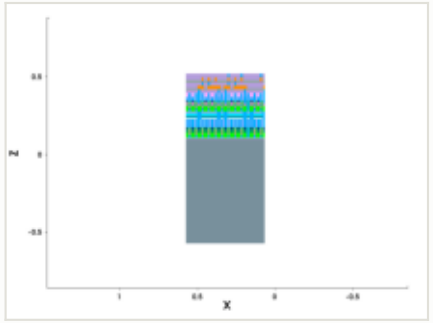

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

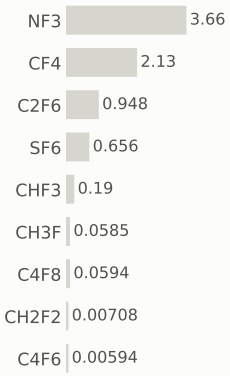

Step #4530: CVD

depo_fill · CVD

1.31	477.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

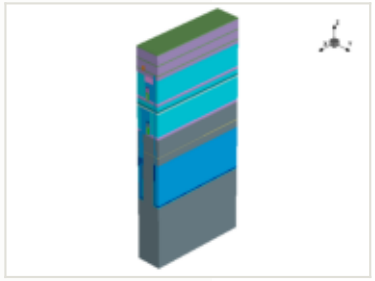

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

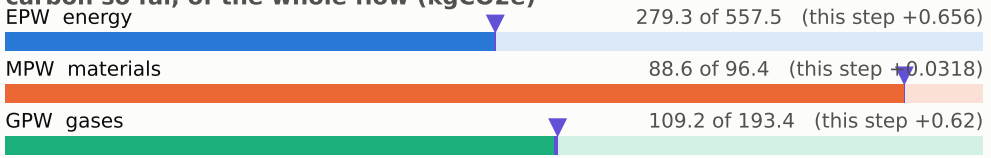

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

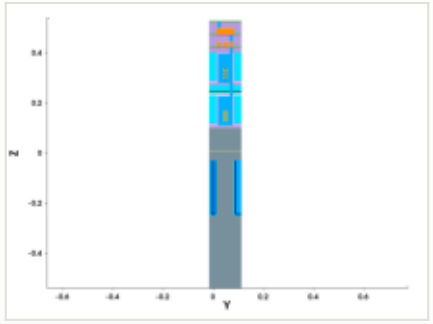

y cut at 0.049 µm

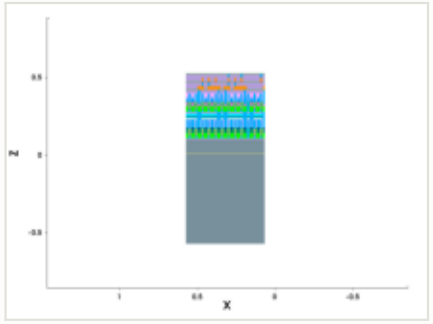

mask for this step

no mask for this step

steps by process area

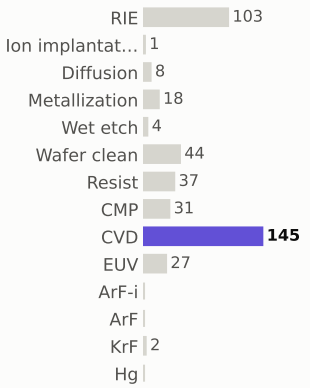

materials deposited (g)

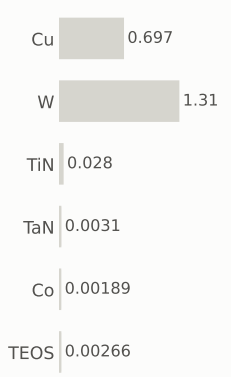

gases emitted (g)



Step #4540: CVD

depo_fill · CVD

1.31	478.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

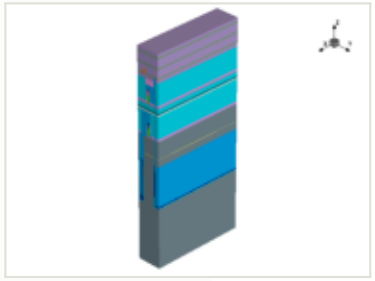

this step

process area	CVD
material	—
thickness	0.018 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

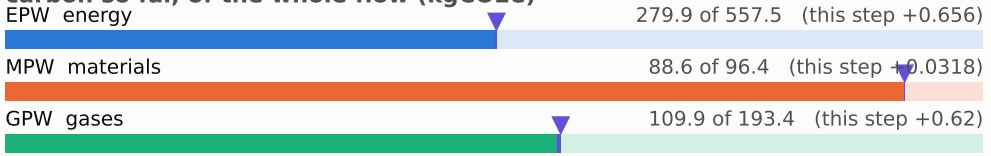

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

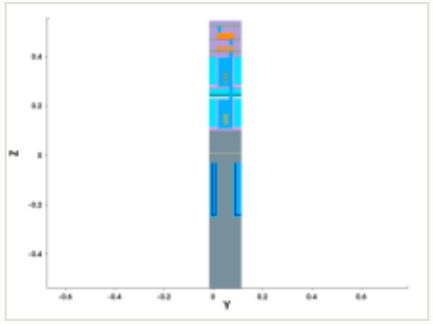

y cut at 0.049 µm

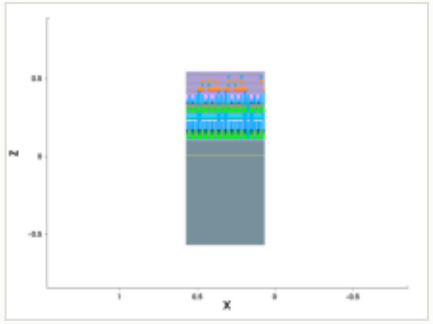

mask for this step

no mask for this step

steps by process area

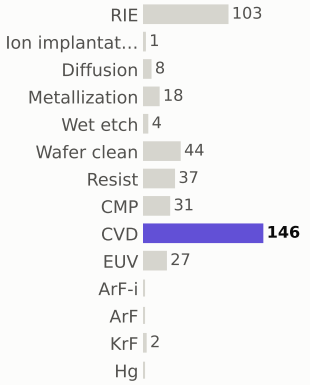

materials deposited (g)

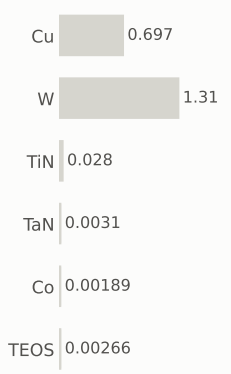

gases emitted (g)

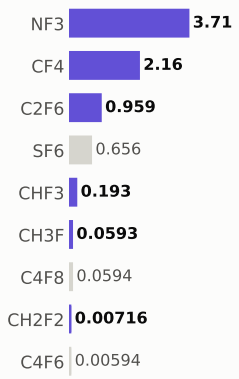

Step #4550: Diffusion

treatment · Diffusion

0.801	479.2	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

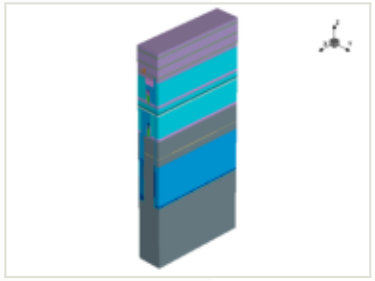

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

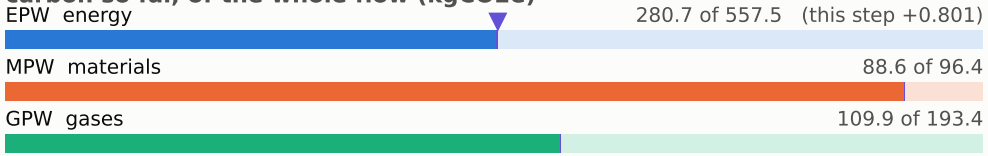

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

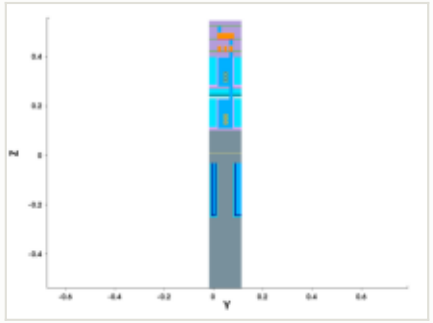

y cut at 0.049 µm

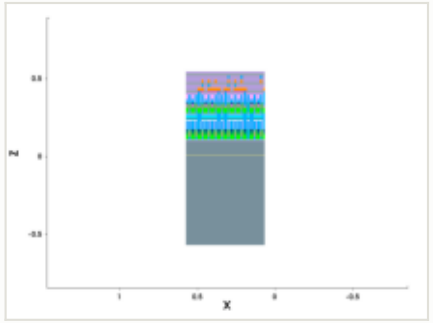

mask for this step

no mask for this step

steps by process area



materials deposited (g)

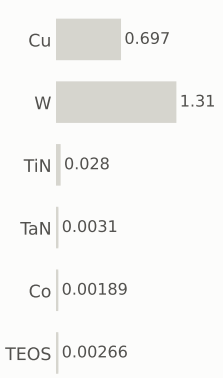

gases emitted (g)

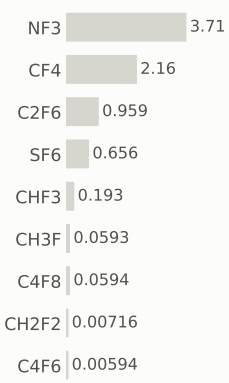

Step #4560: Wafer_clean

clean · Wafer_clean

0.169	479.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

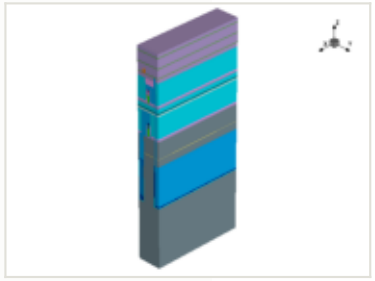

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

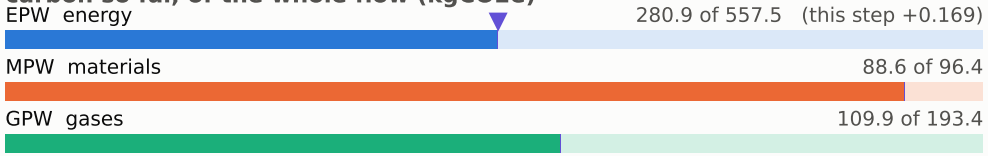

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

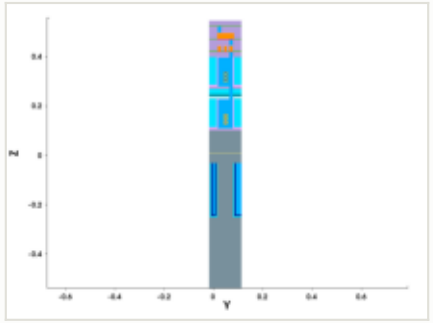

y cut at 0.049 µm

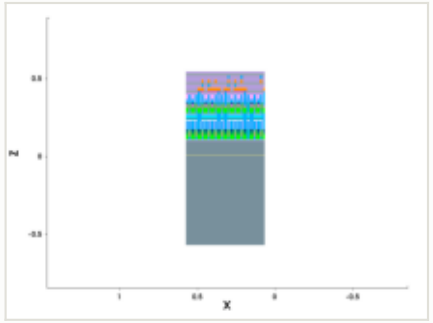

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)

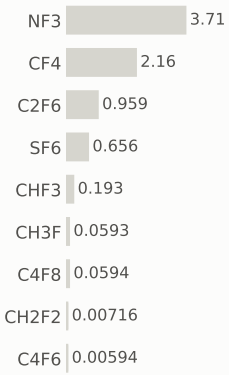

Step #4570: CVD

depo_fill · CVD

1.31	480.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

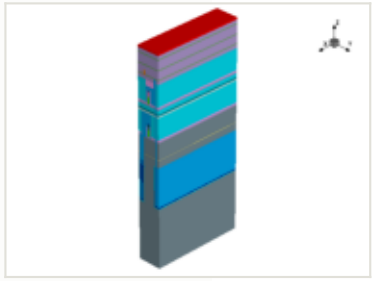

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

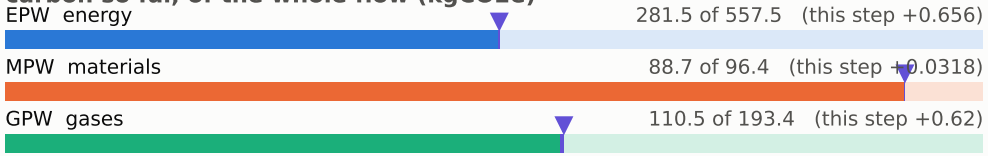

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

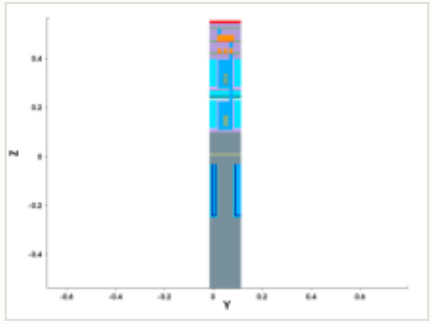

y cut at 0.049 µm

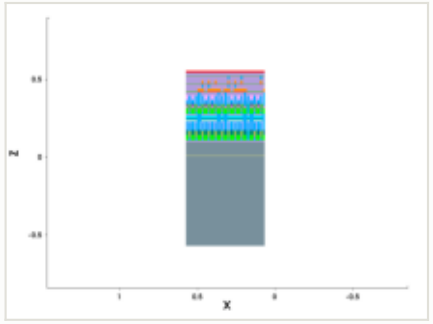

mask for this step

no mask for this step

steps by process area

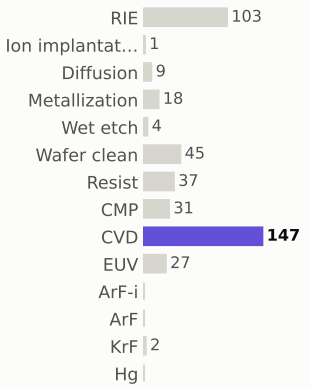

materials deposited (g)

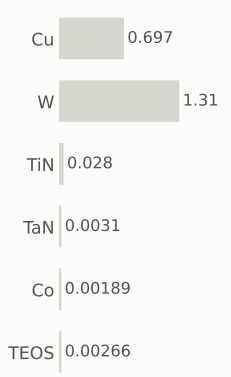

gases emitted (g)

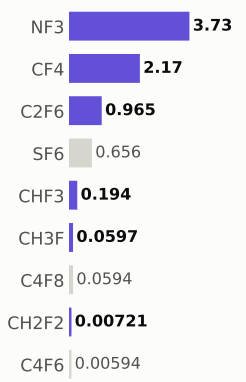

Step #4580: CVD

depo_fill · CVD

1.31	482.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

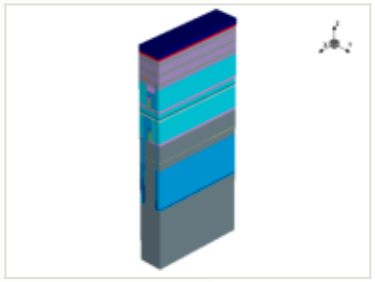

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

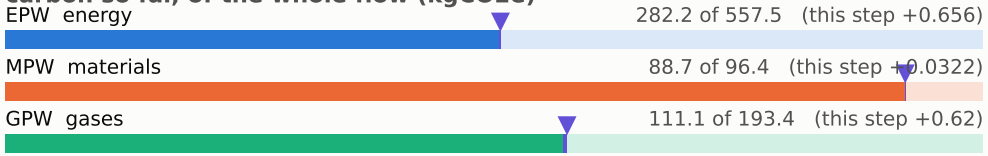

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

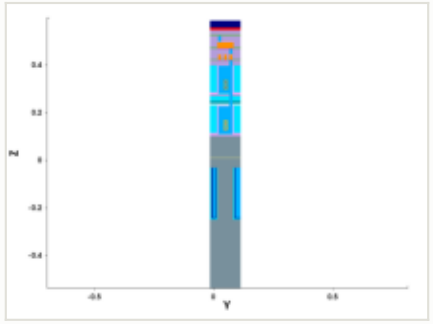

y cut at 0.049 µm

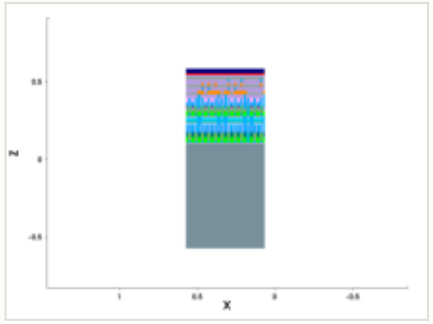

mask for this step

no mask for this step

steps by process area

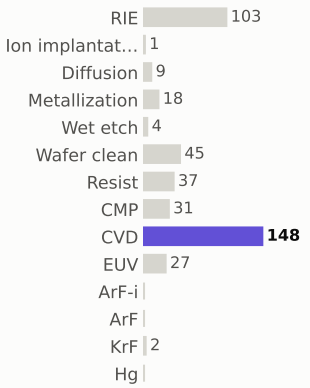

materials deposited (g)

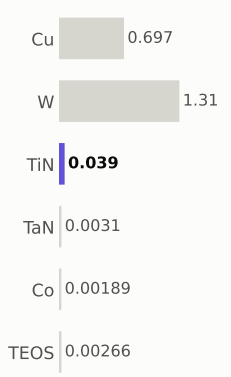

gases emitted (g)

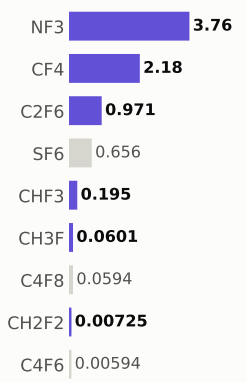

Step #4590: Wafer_clean

clean · Wafer_clean

0.169	482.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

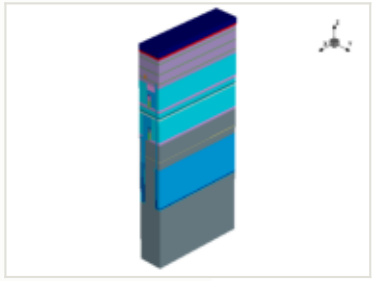

x cut at 0.385 µm

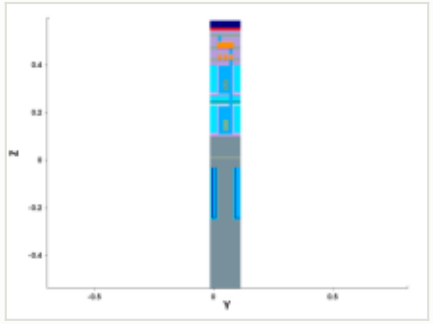

y cut at 0.049 µm

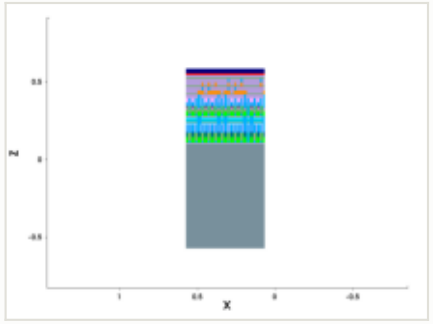

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

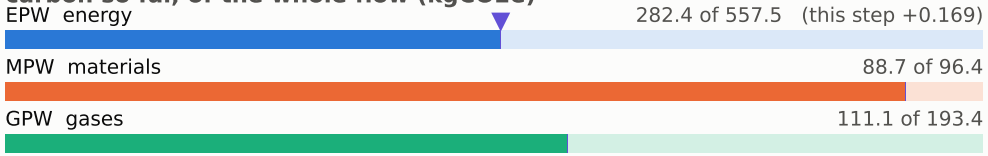

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

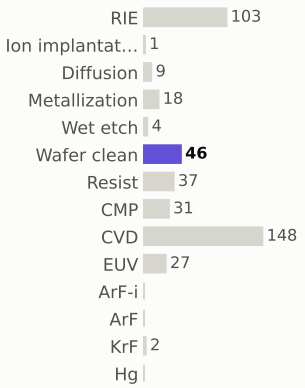

materials deposited (g)



gases emitted (g)

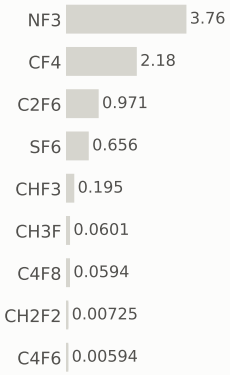

Step #4600: CVD

depo_fill · CVD

1.31	483.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

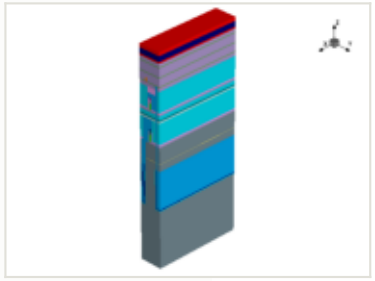

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

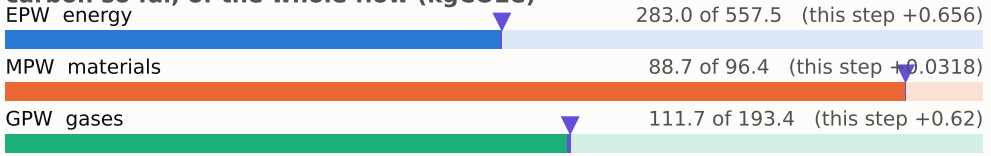

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

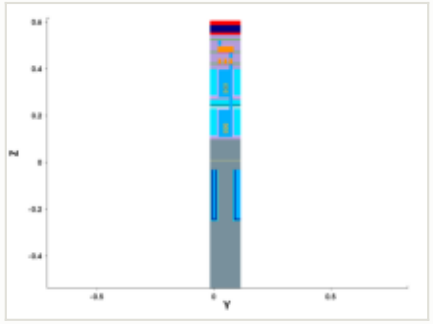

y cut at 0.049 µm

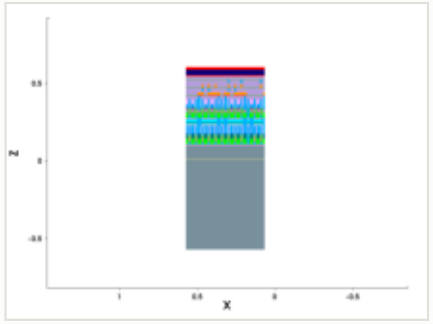

mask for this step

no mask for this step

steps by process area

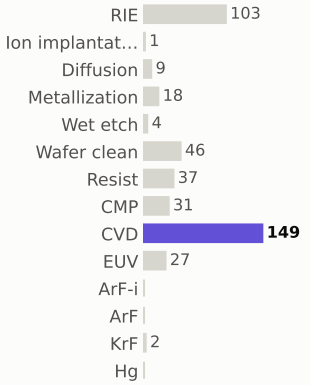

materials deposited (g)

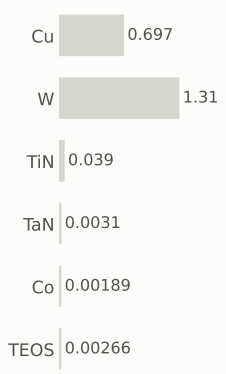

gases emitted (g)

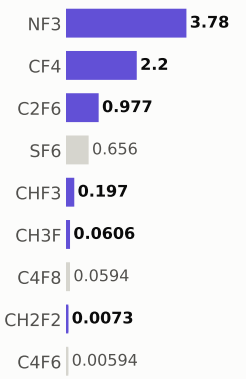

Step #4610: CVD

depo_fill · CVD

1.31	484.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

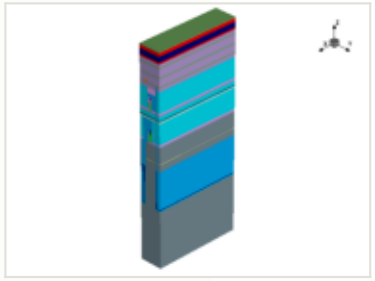

x cut at 0.385 µm

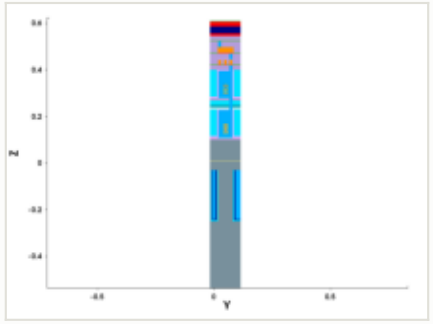

y cut at 0.049 µm

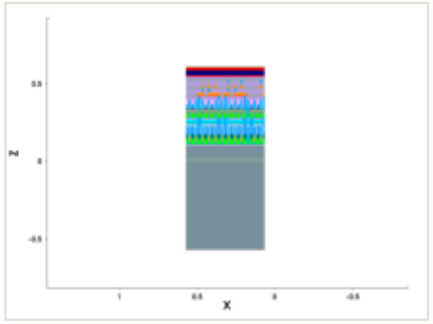

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

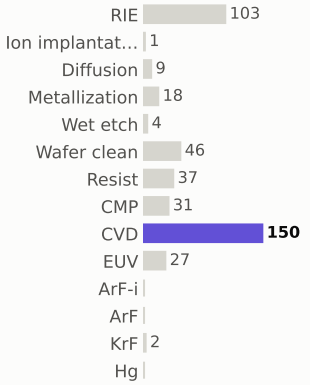

materials deposited (g)

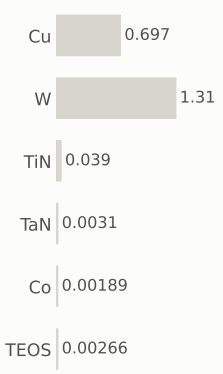

gases emitted (g)

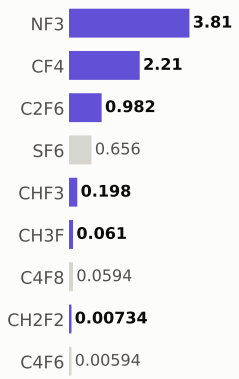

Step #4620: CVD

depo_fill · CVD

1.31	486.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

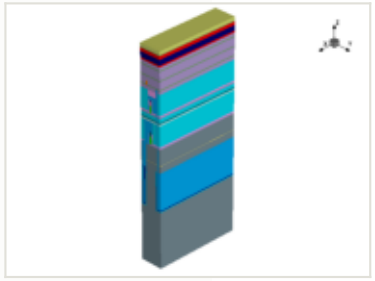

x cut at 0.385 µm

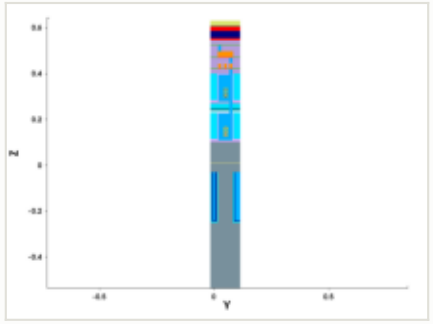

y cut at 0.049 µm

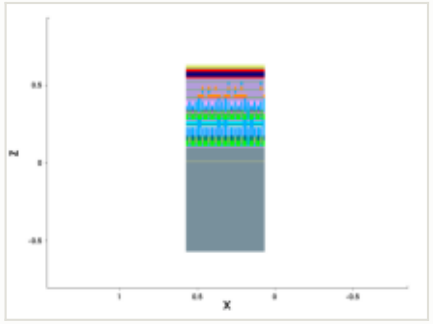

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

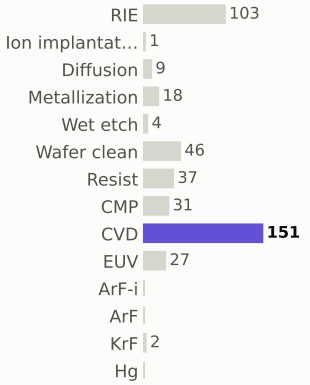

materials deposited (g)

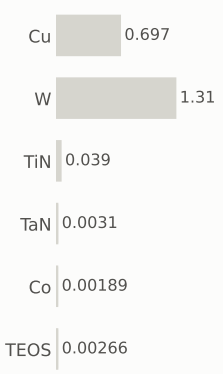

gases emitted (g)

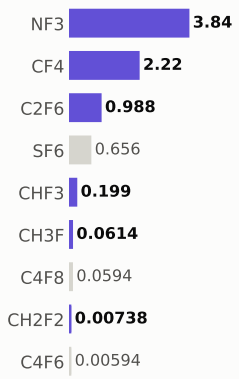

Step #4630: Resist

depo_fill · Resist

0.169	486.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

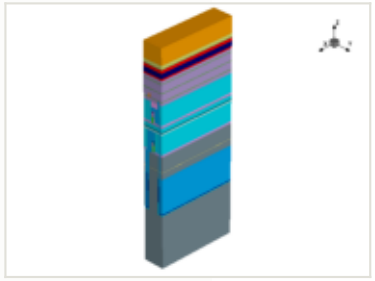

x cut at 0.385 µm

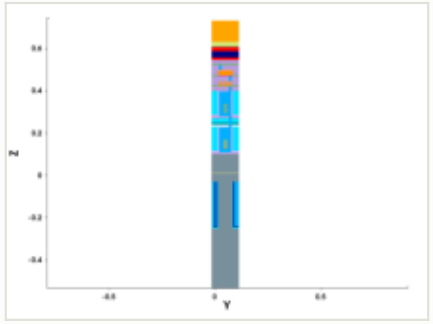

y cut at 0.049 µm

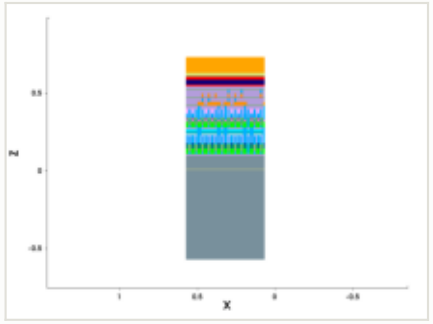

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

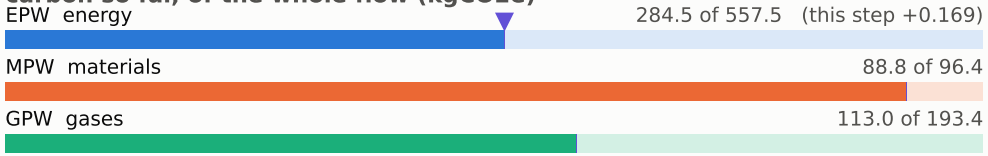

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

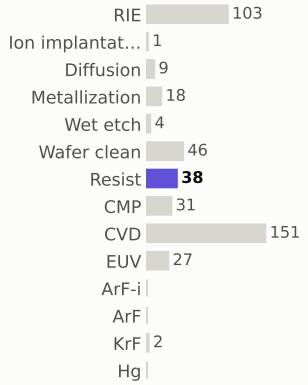

materials deposited (g)

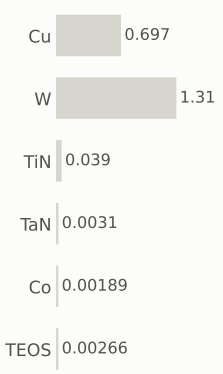

gases emitted (g)

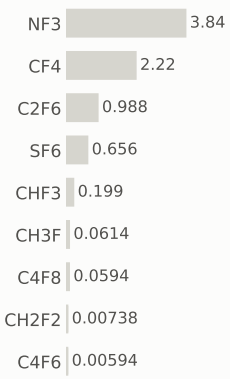

Step #4640: CVD

depo_fill · CVD

1.31	487.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

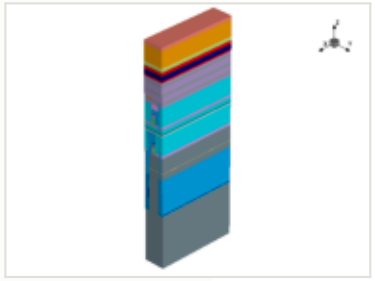

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

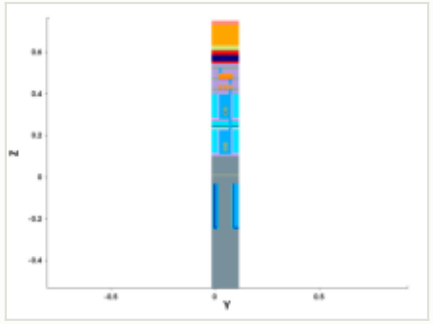

y cut at 0.049 µm

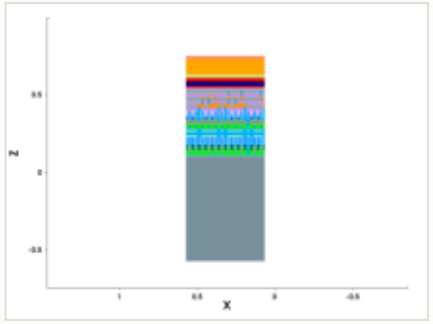

mask for this step

no mask for this step

steps by process area

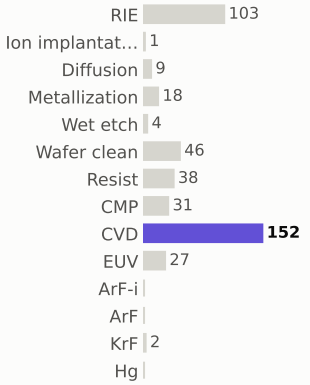

materials deposited (g)

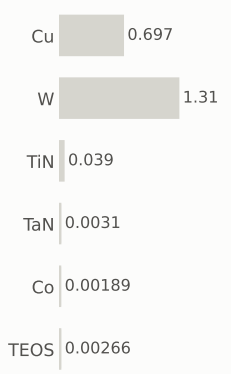

gases emitted (g)

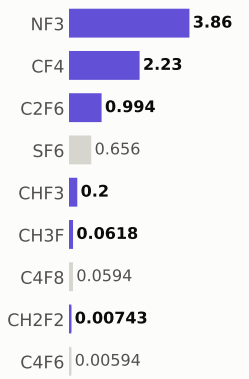

Step #4650: Wafer_clean

clean · Wafer_clean

0.169	487.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

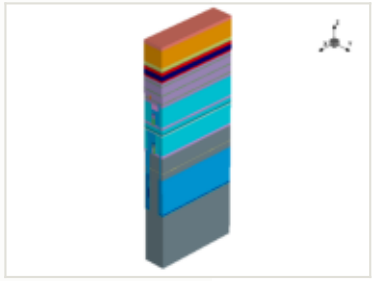

x cut at 0.385 µm

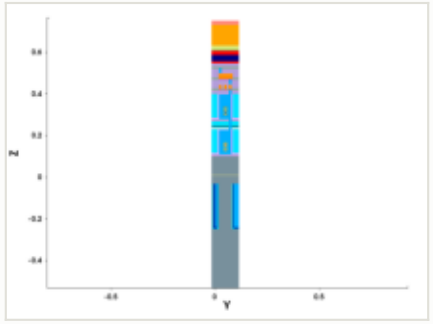

y cut at 0.049 µm

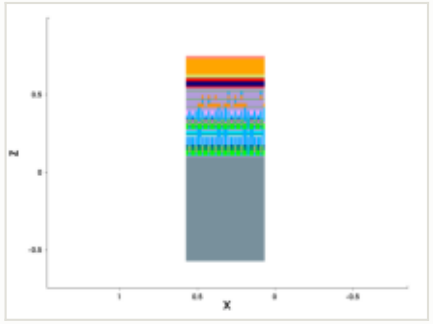

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

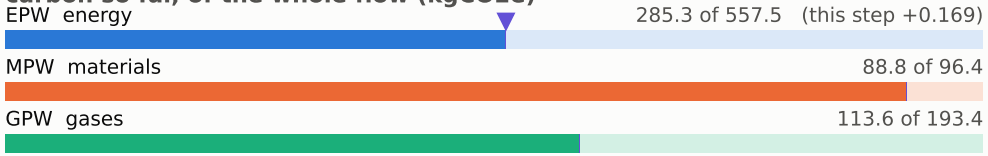

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

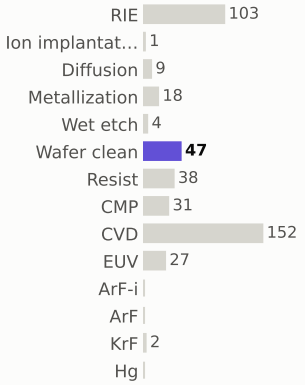

materials deposited (g)

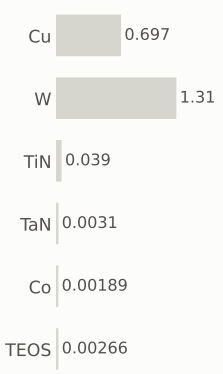

gases emitted (g)

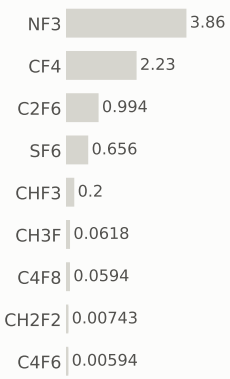

Step #4660: EUV

litho_patterning · EUV

1.96	489.7	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

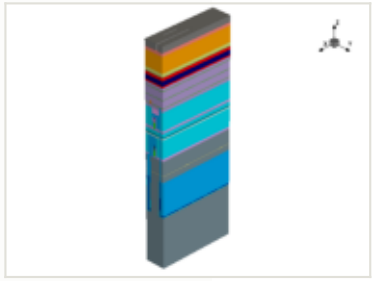

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

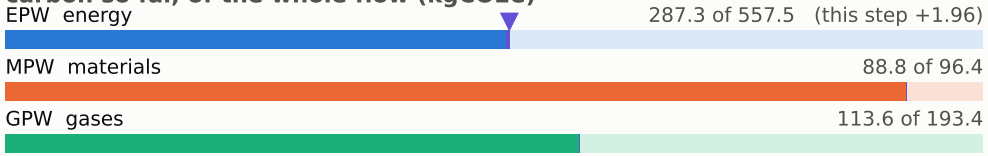

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

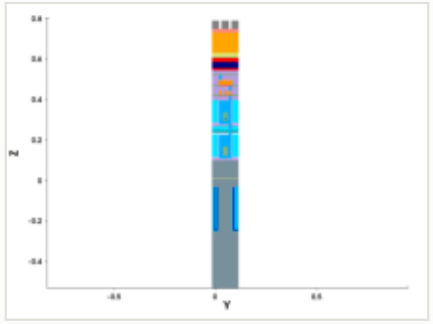

y cut at 0.049 µm

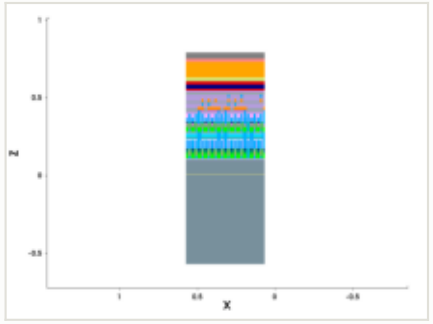

mask: layer 10301:0 (GDSII)



steps by process area

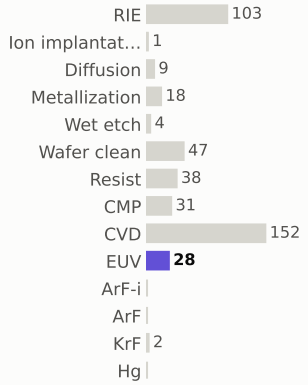

materials deposited (g)



gases emitted (g)

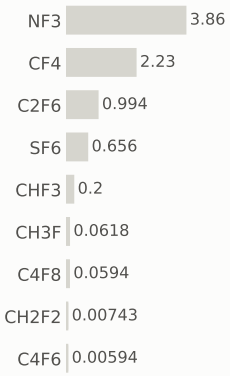

Step #4670: RIE

etch_anisotropic · RIE

1.04	490.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

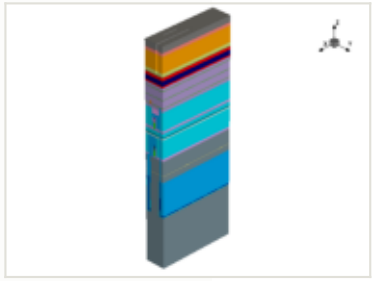

x cut at 0.385 µm

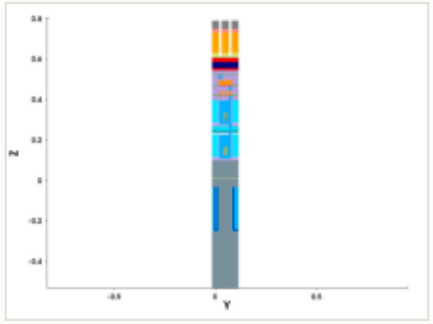

y cut at 0.049 µm

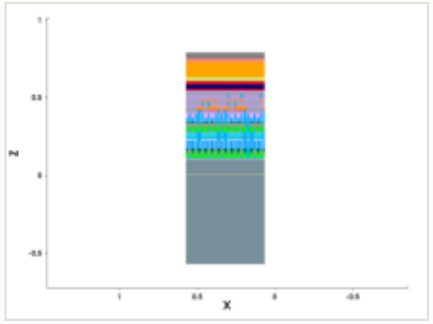

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

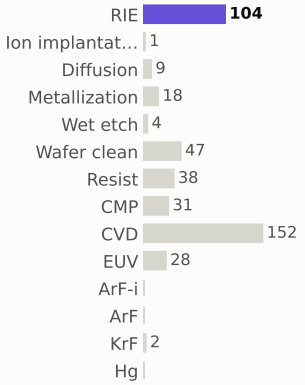

materials deposited (g)

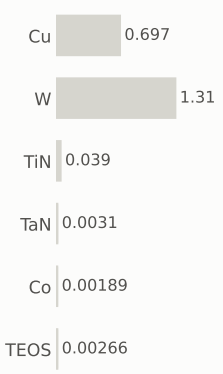

gases emitted (g)

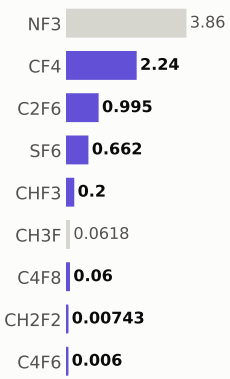

Step #4680: Wafer_clean

etch_strip · Wafer_clean

0.169	490.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

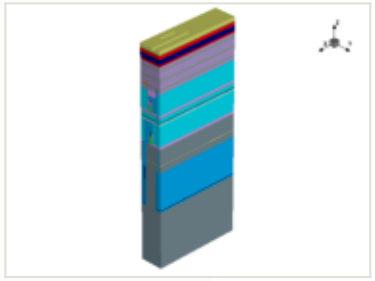

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

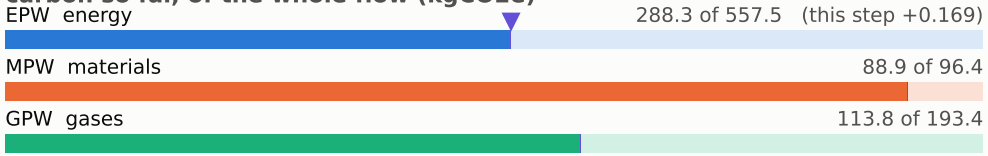

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

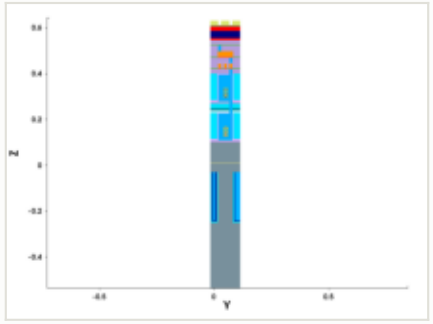

y cut at 0.049 µm

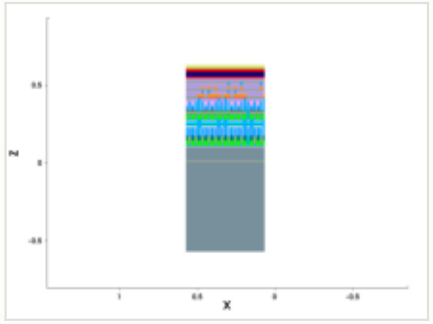

mask for this step

no mask for this step

steps by process area

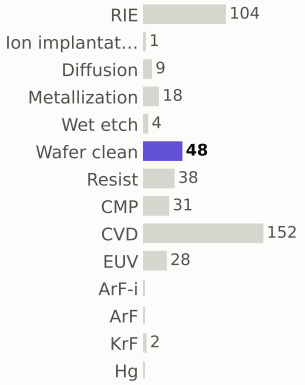

materials deposited (g)



gases emitted (g)



Step #4690: CVD

depo_isotropic · CVD

1.31	492.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

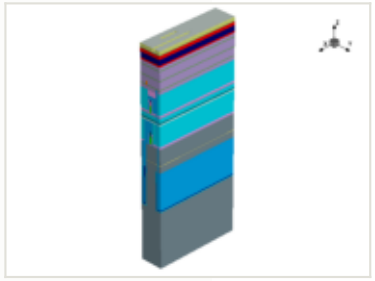

x cut at 0.385 µm

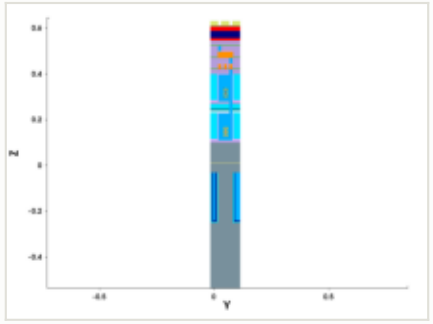

y cut at 0.049 µm

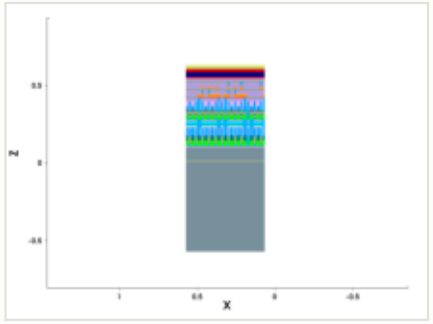

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

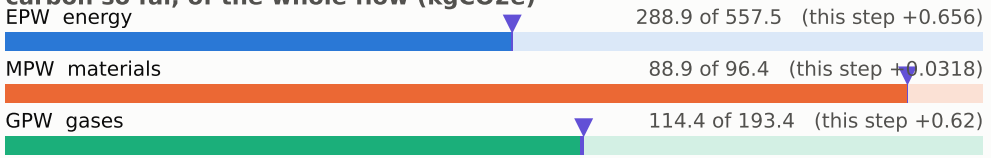

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

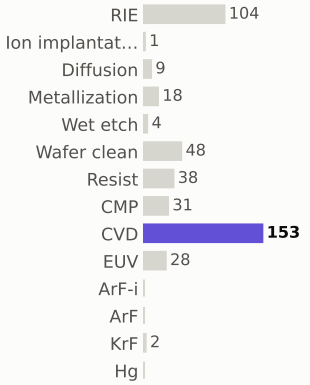

materials deposited (g)

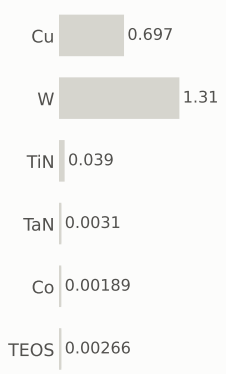

gases emitted (g)

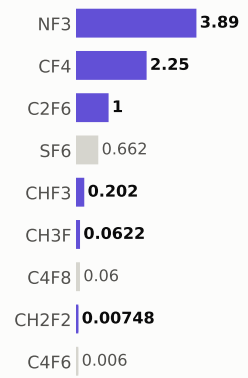

Step #4700: RIE

etch_anisotropic · RIE

1.04	493.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

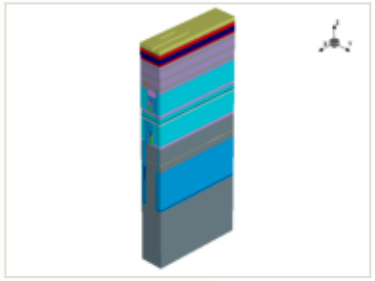

x cut at 0.385 µm

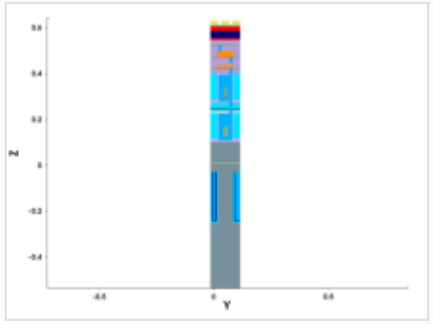

y cut at 0.049 µm

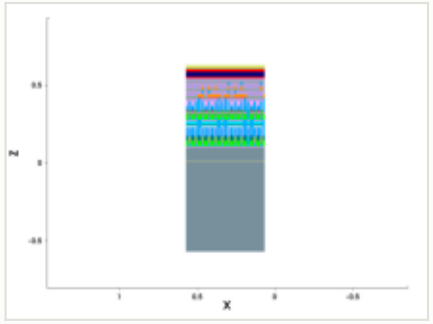

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

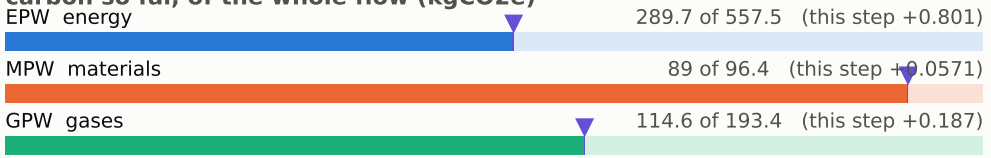

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

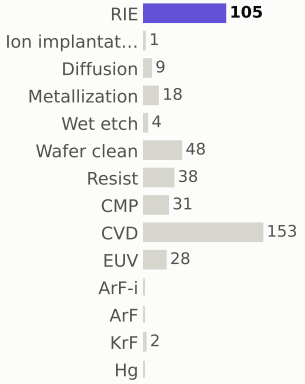

materials deposited (g)



gases emitted (g)

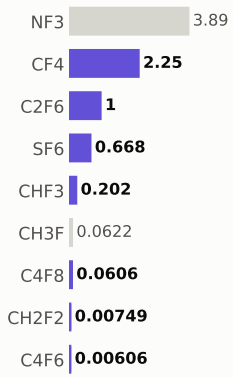

Step #4710: Wafer_clean

clean · Wafer_clean

0.169	493.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

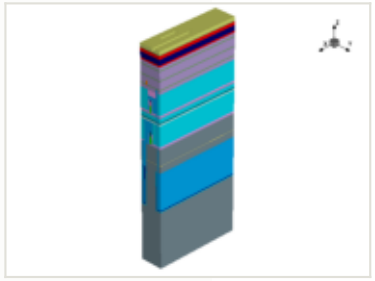

x cut at 0.385 µm

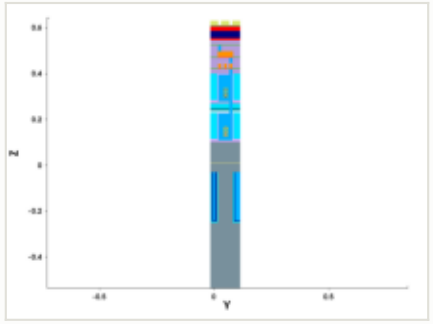

y cut at 0.049 µm

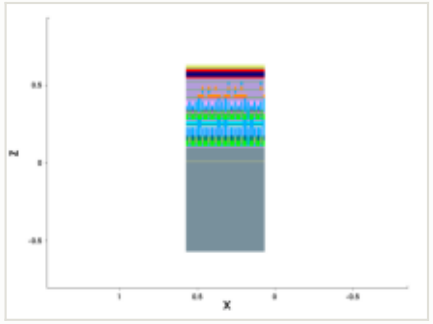

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

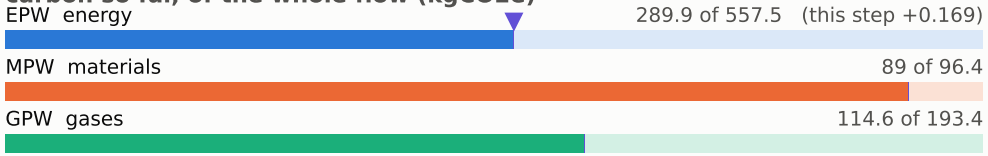

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

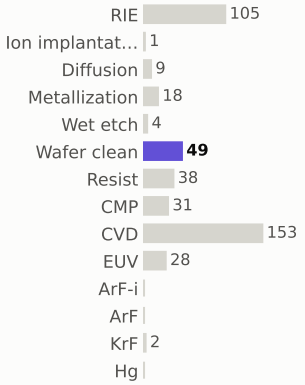

materials deposited (g)



gases emitted (g)

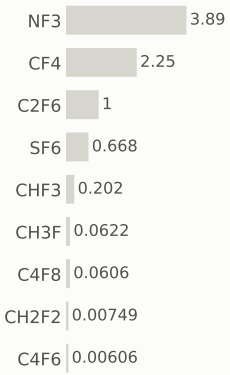

Step #4720: Resist

depo_fill · Resist

0.169	493.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

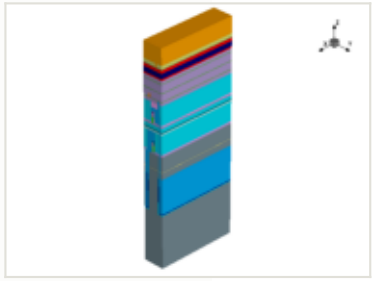

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

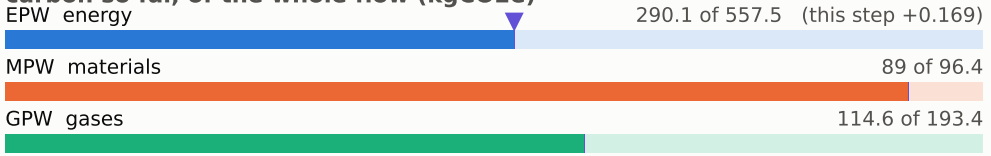

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

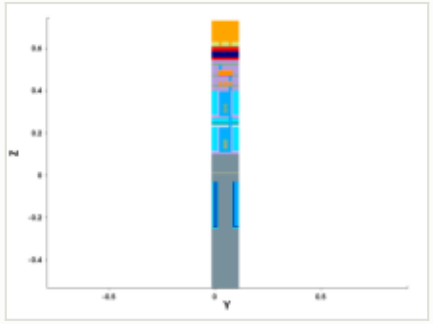

y cut at 0.049 µm

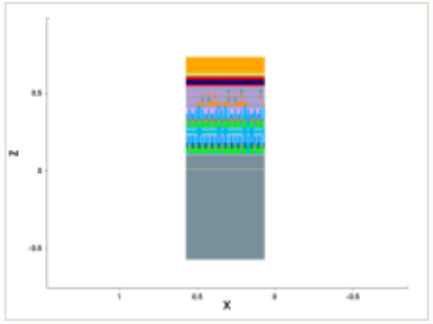

mask for this step

no mask for this step

steps by process area

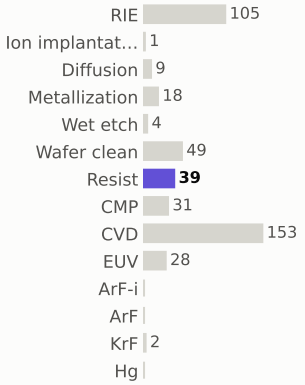

materials deposited (g)

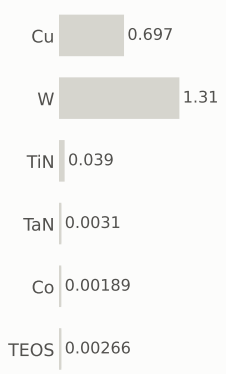

gases emitted (g)

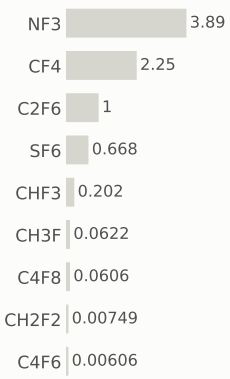

Step #4730: CVD

depo_fill · CVD

1.31	494.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

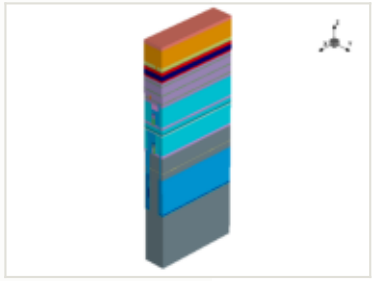

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

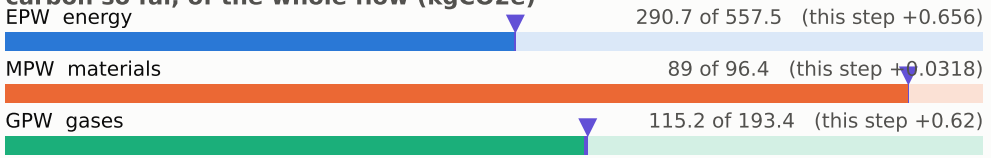

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

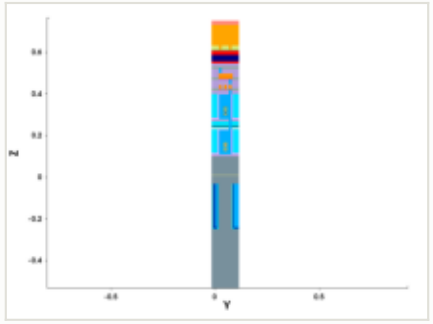

y cut at 0.049 µm

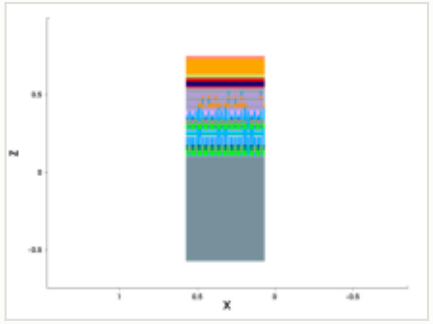

mask for this step

no mask for this step

steps by process area

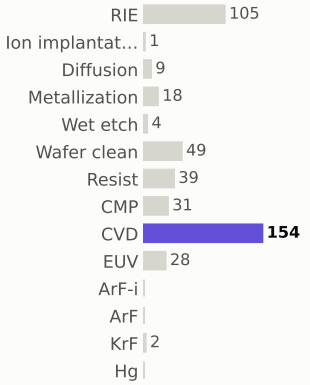

materials deposited (g)

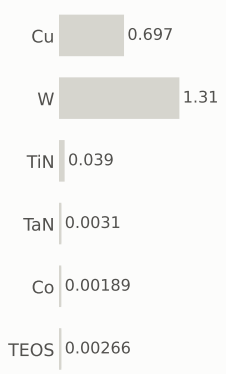

gases emitted (g)

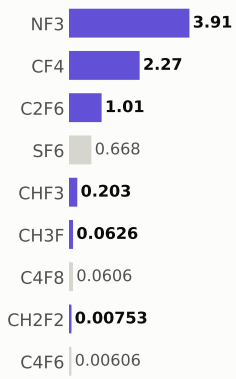

Step #4740: Wafer_clean

clean · Wafer_clean

0.169	495.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

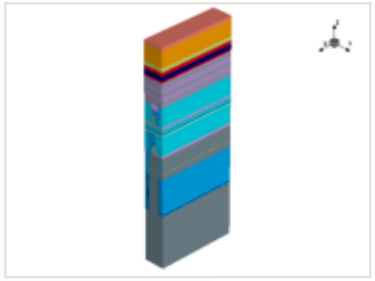

x cut at 0.385 µm

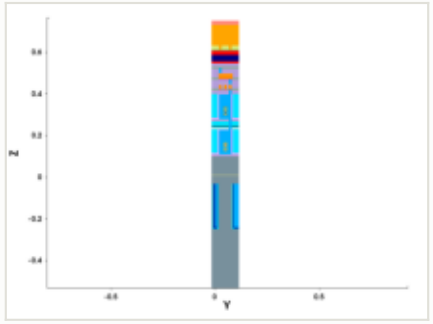

y cut at 0.049 µm

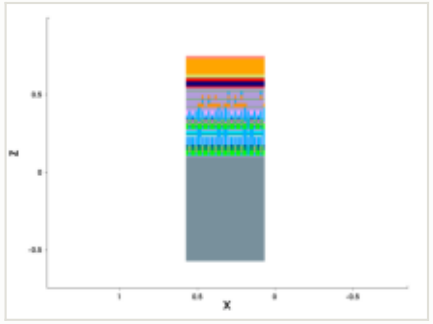

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

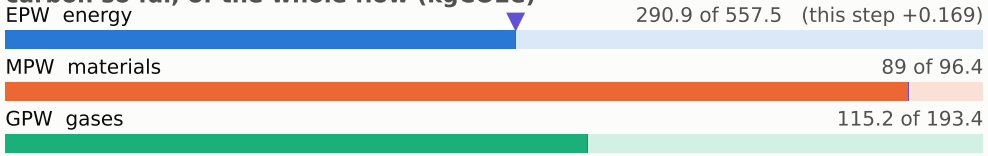

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

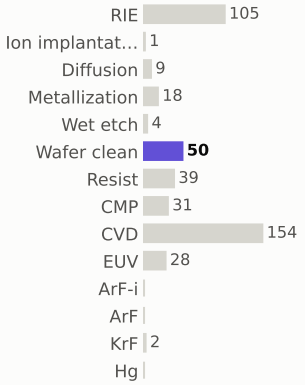

materials deposited (g)

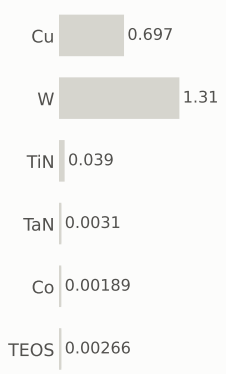

gases emitted (g)

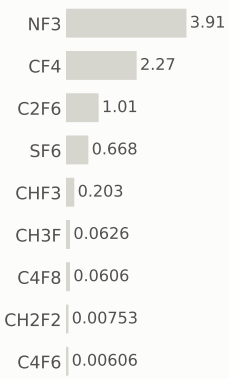

Step #4750: EUV

litho_patterning · EUV

1.96	497.0	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

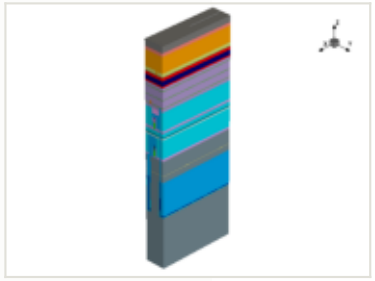

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

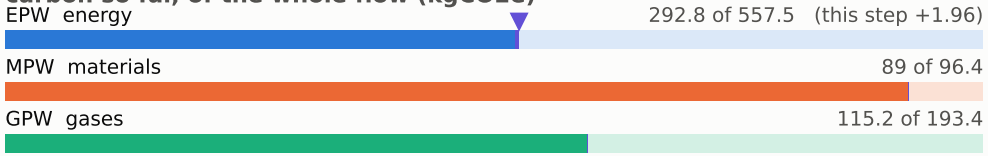

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

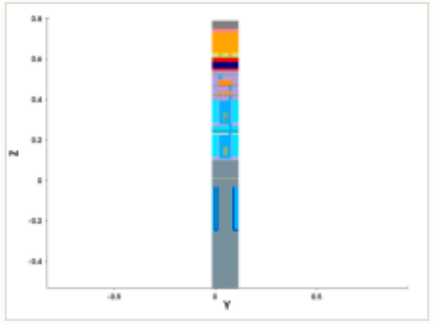

y cut at 0.049 µm

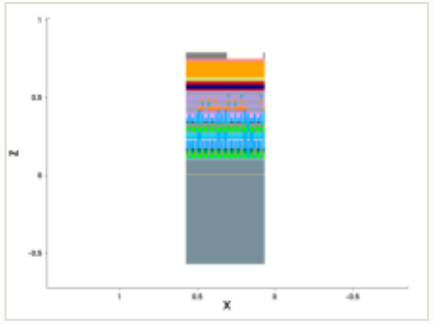

mask: layer 10302:0 (GDSII)



steps by process area

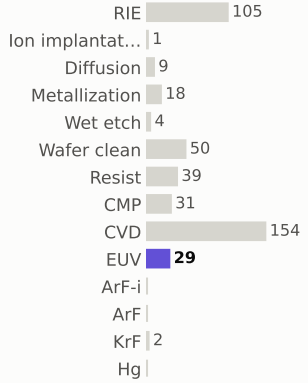

materials deposited (g)



gases emitted (g)

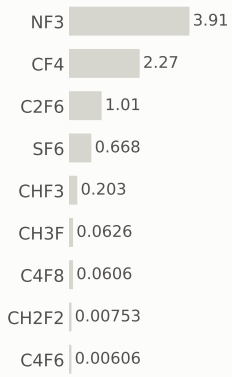

Step #4760: RIE

etch_anisotropic · RIE

1.04	498.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

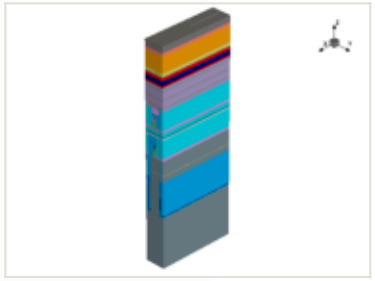

x cut at 0.385 µm

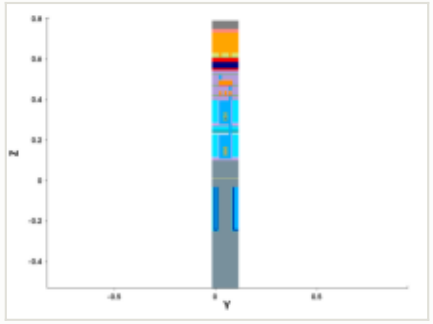

y cut at 0.049 µm

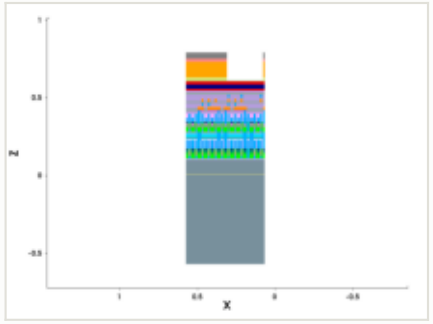

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

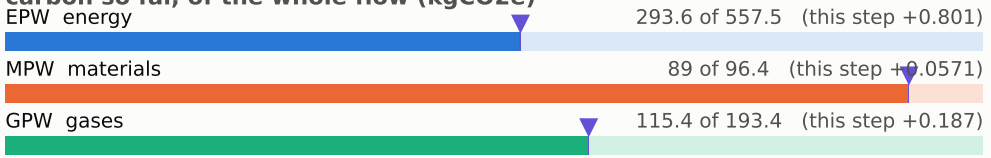

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

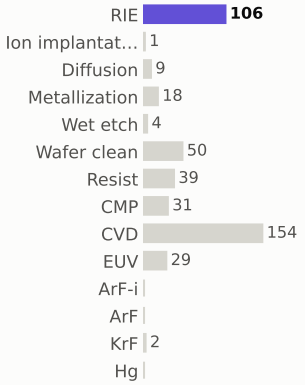

materials deposited (g)



gases emitted (g)

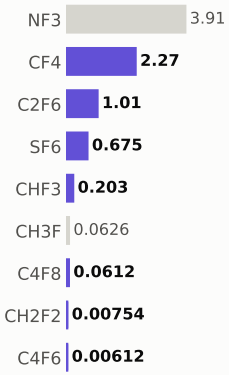

Step #4770: Wafer_clean

etch_strip · Wafer_clean

0.169	498.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

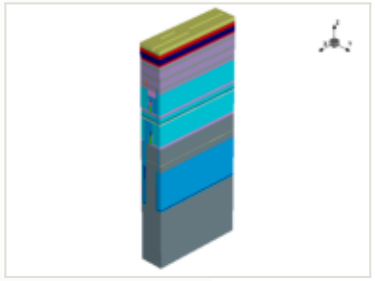

x cut at 0.385 µm

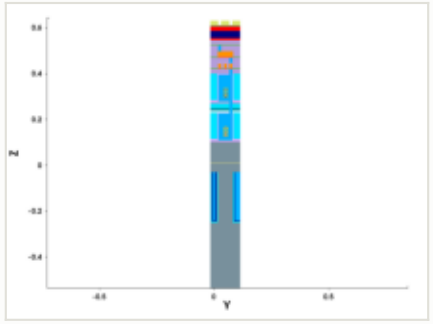

y cut at 0.049 µm

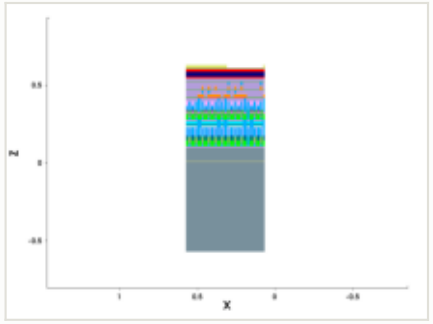

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

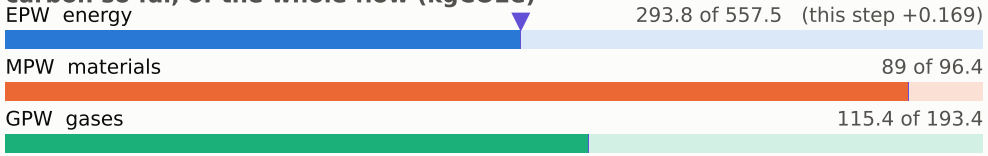

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

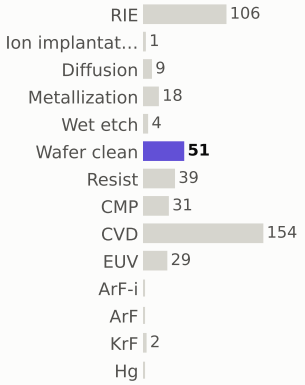

materials deposited (g)

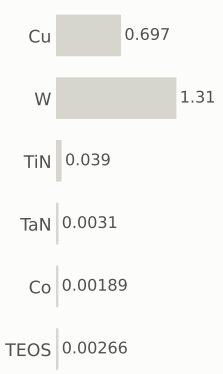

gases emitted (g)

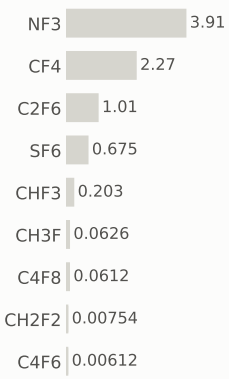

Step #4780: RIE

etch_anisotropic · RIE

1.04	499.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

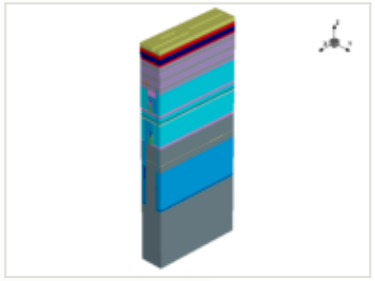

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

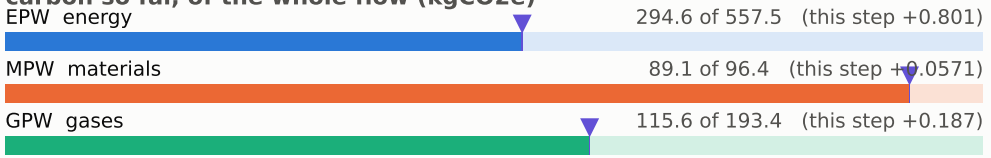

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

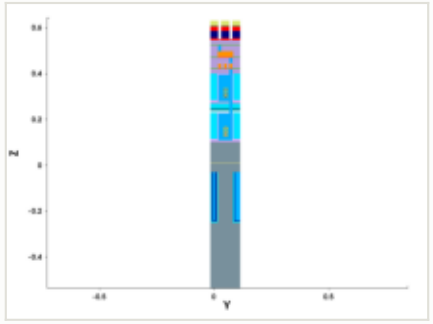

y cut at 0.049 µm

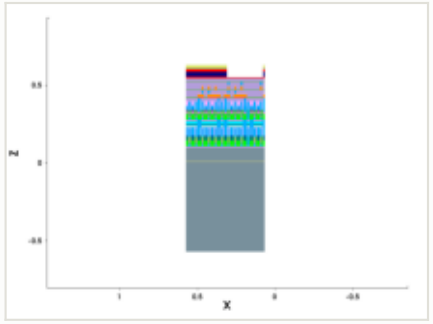

mask for this step

no mask for this step

steps by process area

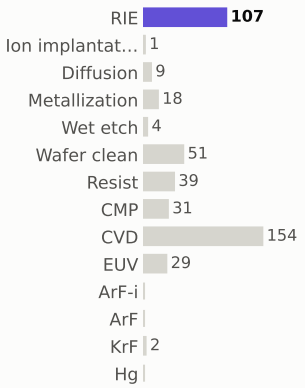

materials deposited (g)

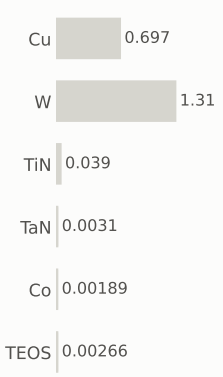

gases emitted (g)

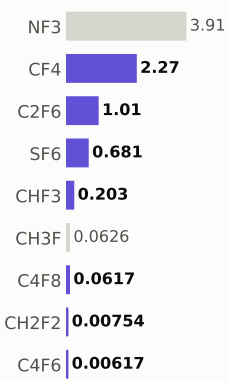

Step #4790: Wafer_clean

clean · Wafer_clean

0.169	499.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

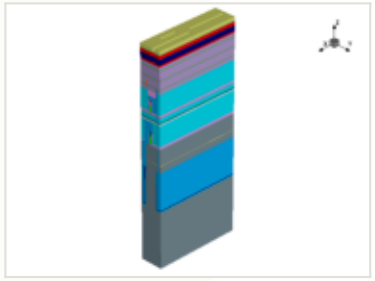

x cut at 0.385 µm

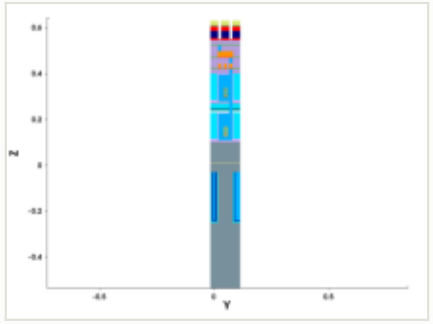

y cut at 0.049 µm

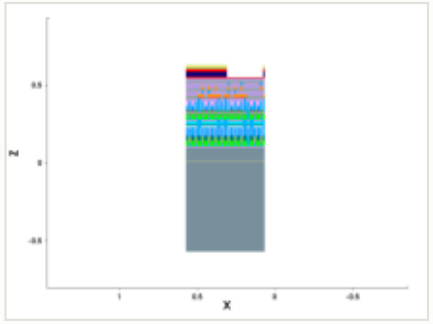

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

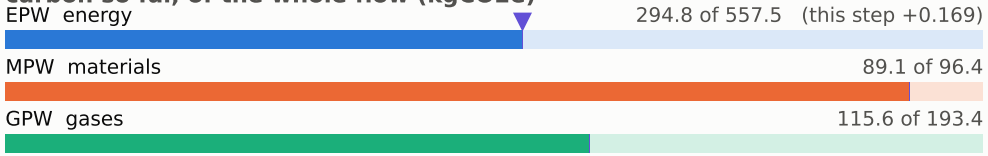

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

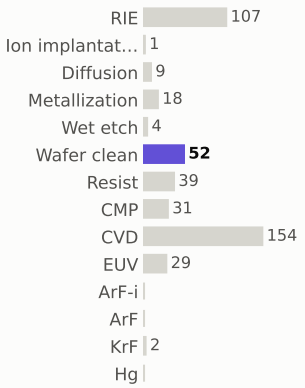

materials deposited (g)

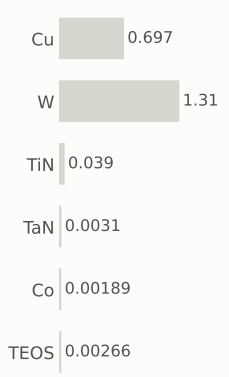

gases emitted (g)

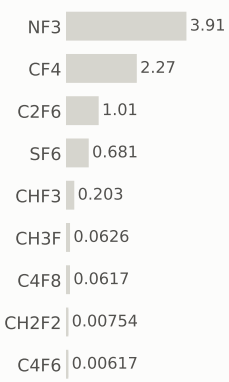

Step #4800: RIE

etch_anisotropic · RIE

1.04	500.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

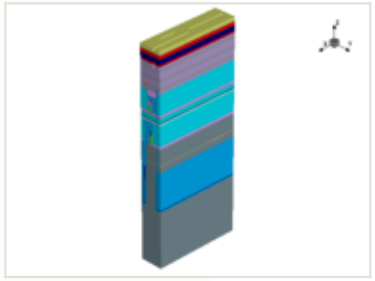

x cut at 0.385 µm

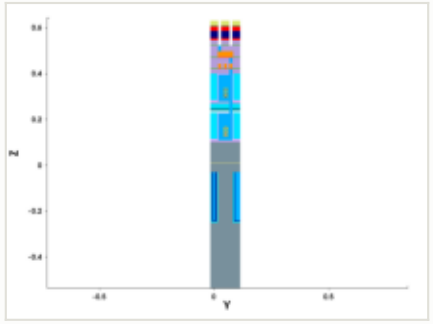

y cut at 0.049 µm

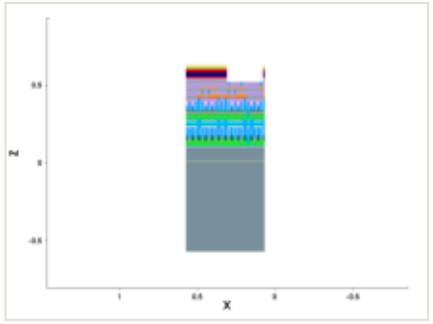

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

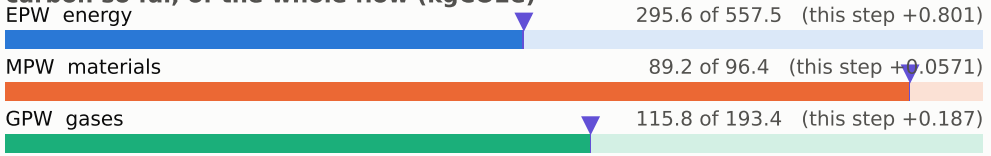

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

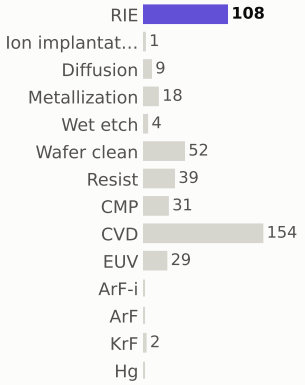

materials deposited (g)



gases emitted (g)

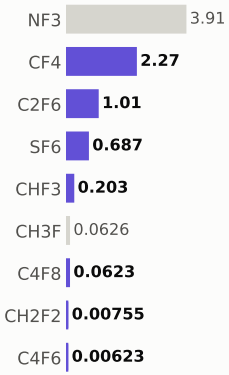

Step #4810: Wafer_clean

clean · Wafer_clean

0.169	500.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

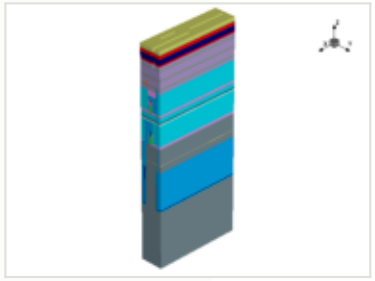

x cut at 0.385 µm

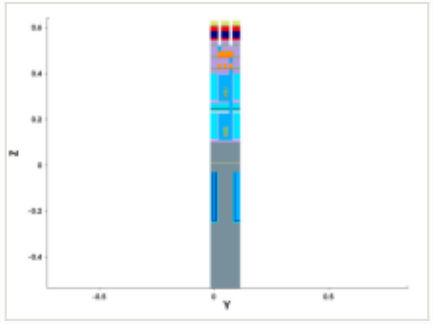

y cut at 0.049 µm

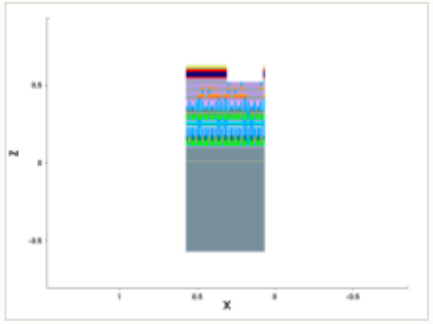

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

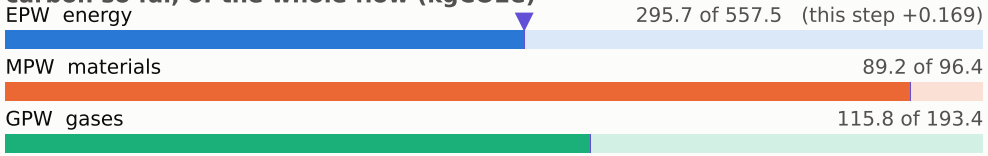

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

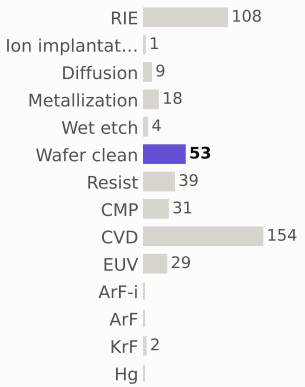

materials deposited (g)



gases emitted (g)

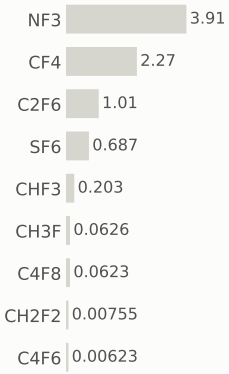

Step #4820: Metallization

depo_ellipsoidal · Metallization

1.2	501.9	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

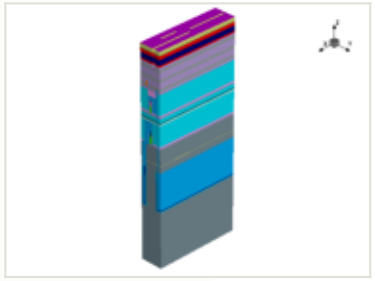

x cut at 0.385 µm

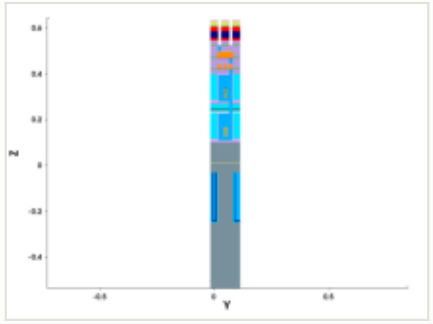

y cut at 0.049 µm

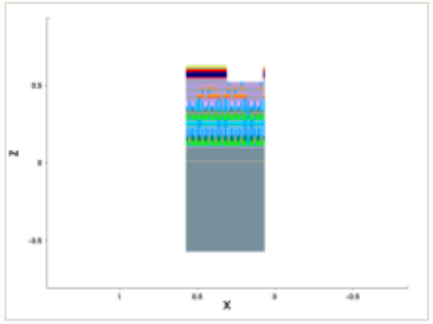

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

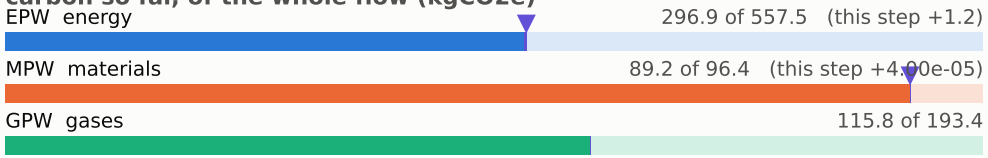

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

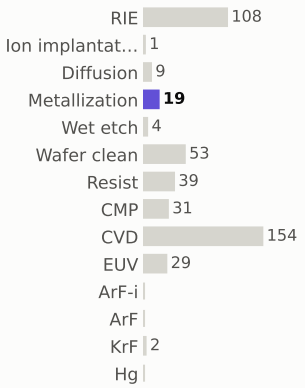

materials deposited (g)



gases emitted (g)

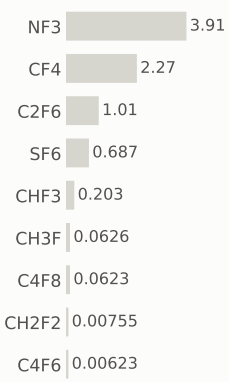

Step #4830: Metallization

depo_fill · Metallization

1.21	503.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

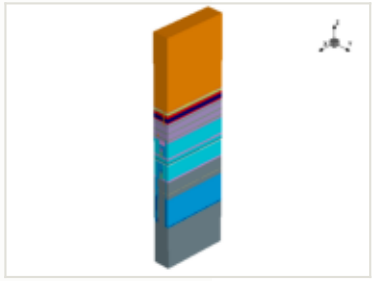

x cut at 0.385 µm

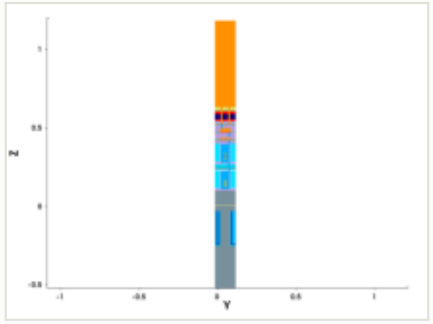

y cut at 0.049 µm

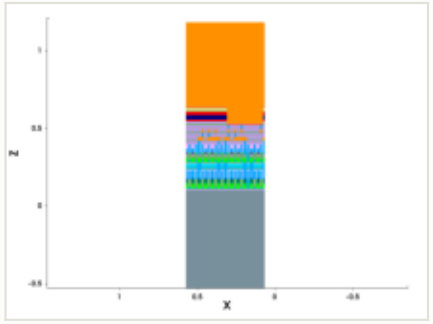

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

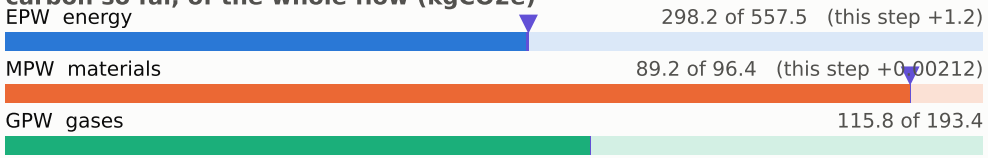

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

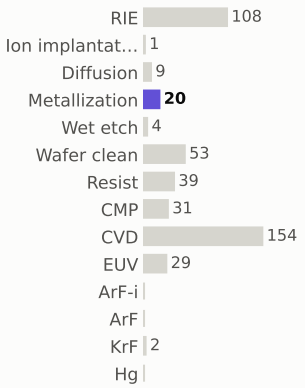

materials deposited (g)



gases emitted (g)

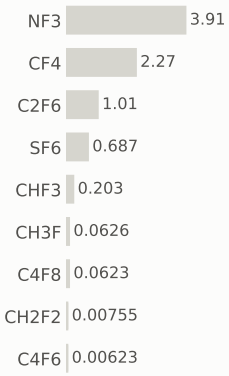

Step #4840: Diffusion

treatment · Diffusion

0.801	503.9	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

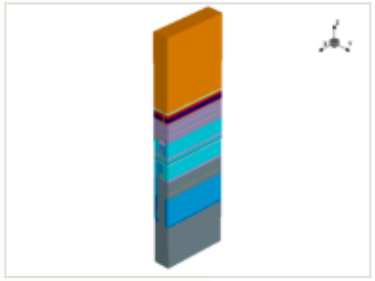

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

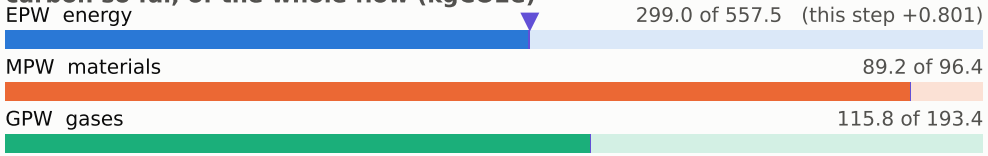

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

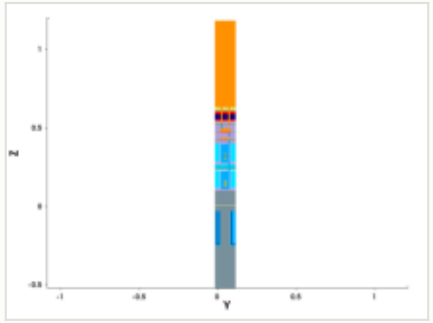

y cut at 0.049 µm

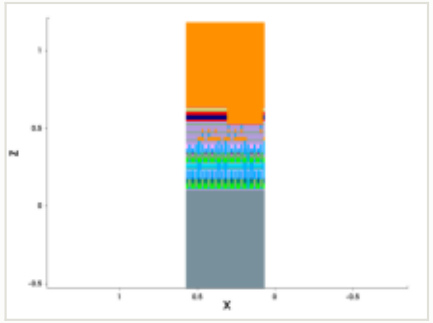

mask for this step

no mask for this step

steps by process area

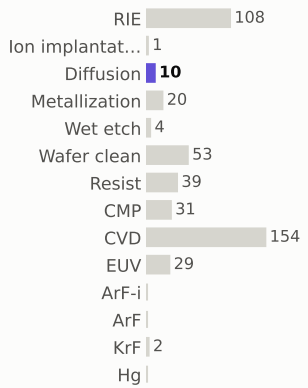

materials deposited (g)

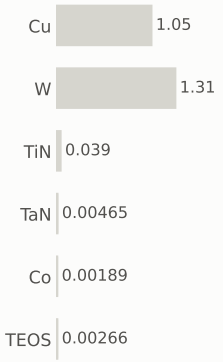

gases emitted (g)

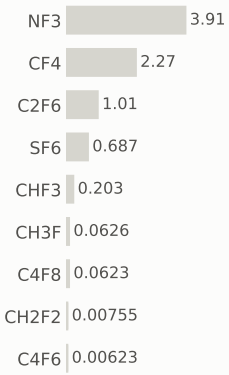

Step #4850: CMP

etch_cmp · CMP

0.169	504.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

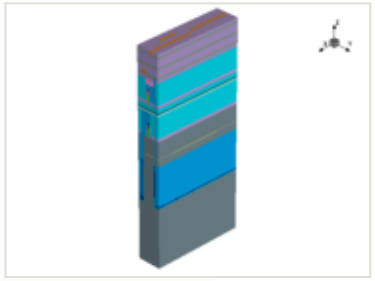

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

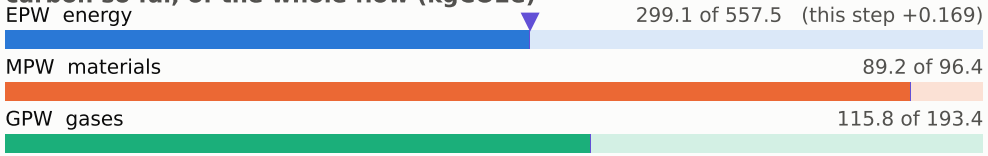

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

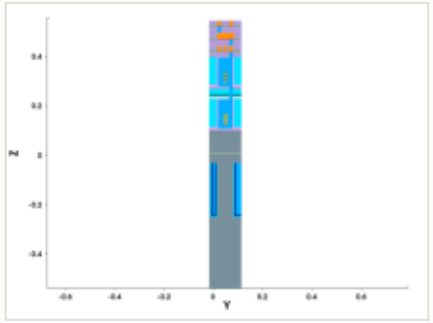

y cut at 0.049 µm

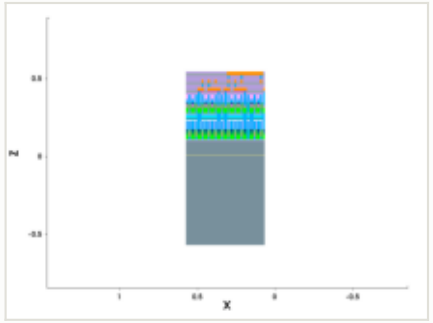

mask for this step

no mask for this step

steps by process area

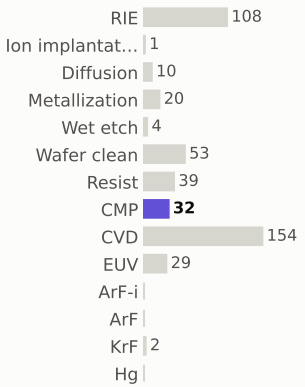

materials deposited (g)

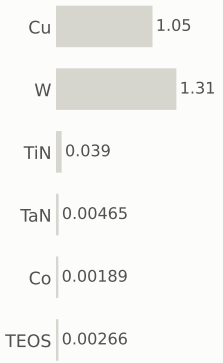

gases emitted (g)

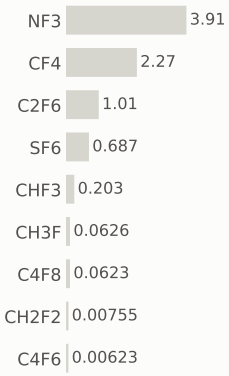

Step #4860: Metallization

depo_isotropic · Metallization

1.2	505.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

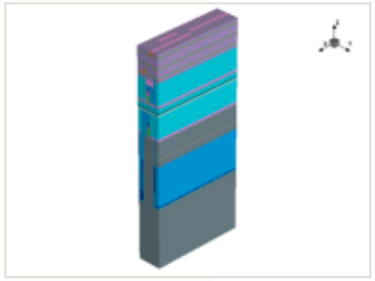

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

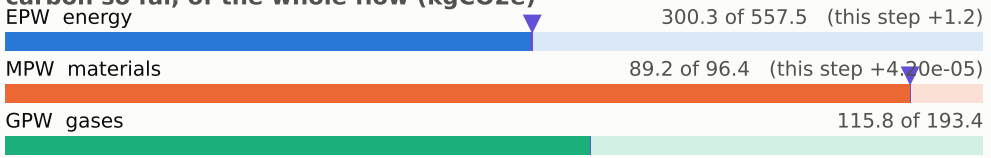

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

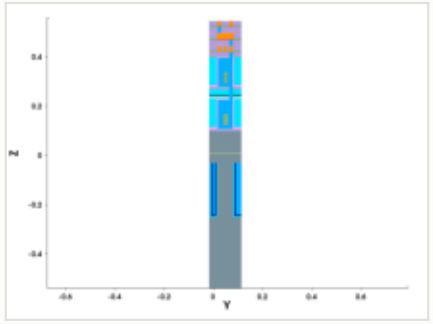

y cut at 0.049 µm

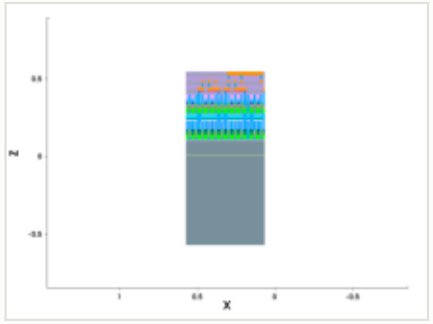

mask for this step

no mask for this step

steps by process area

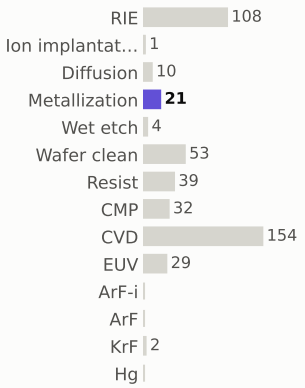

materials deposited (g)

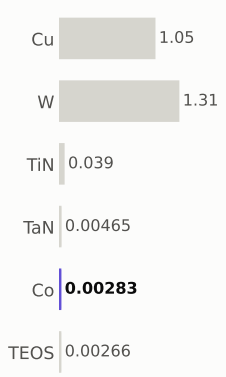

gases emitted (g)

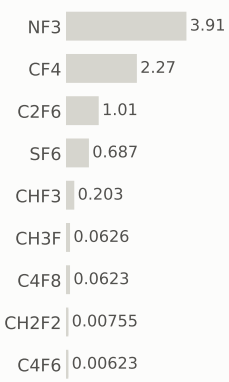

Step #4880: CVD

depo_fill · CVD

1.31	506.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

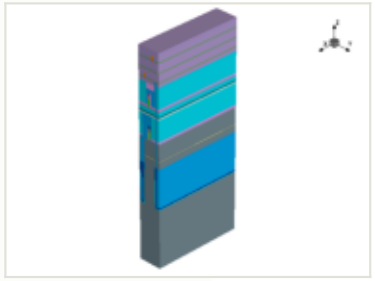

this step

process area	CVD
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

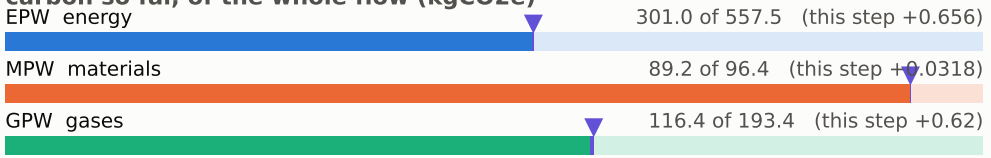

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

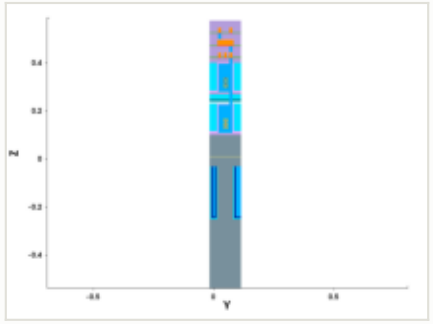

y cut at 0.049 µm

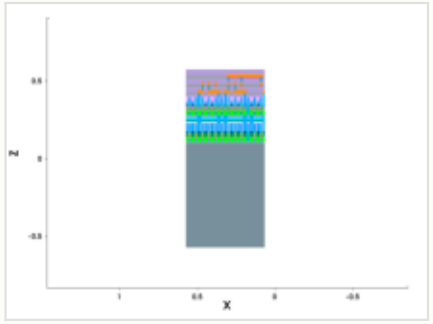

mask for this step

no mask for this step

steps by process area

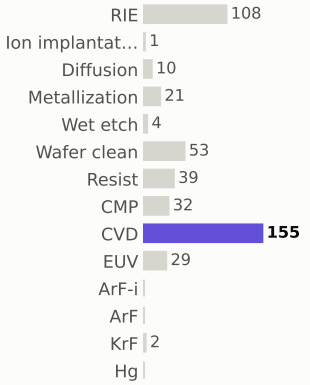

materials deposited (g)

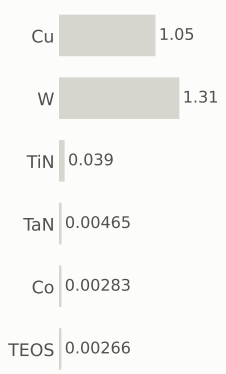

gases emitted (g)

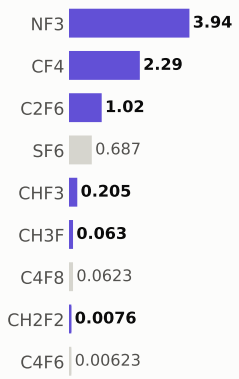

Step #4890: Diffusion

treatment · Diffusion

0.801	507.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

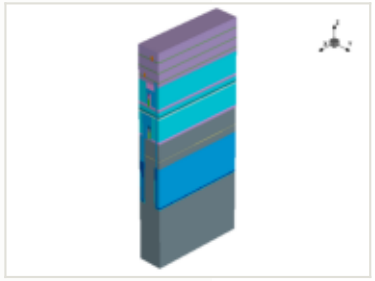

x cut at 0.385 µm

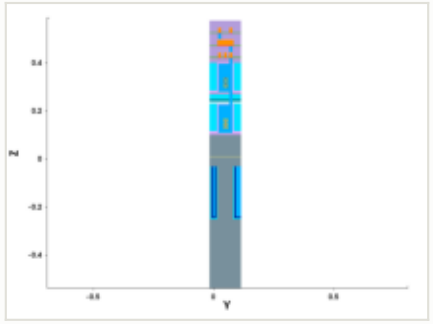

y cut at 0.049 µm

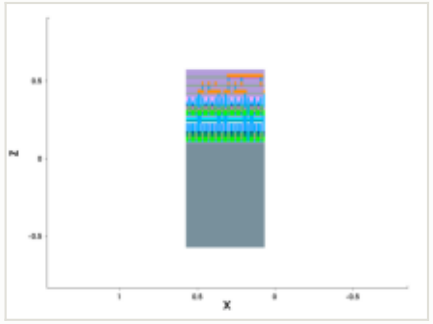

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

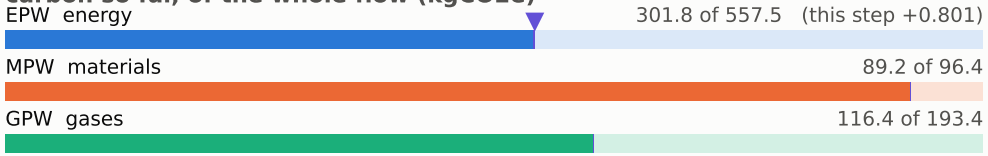

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

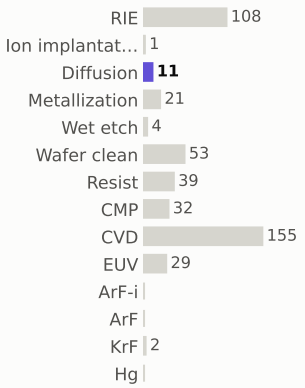

materials deposited (g)

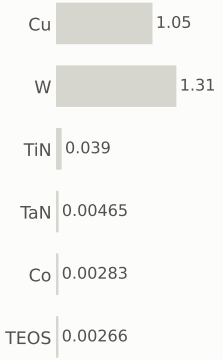

gases emitted (g)

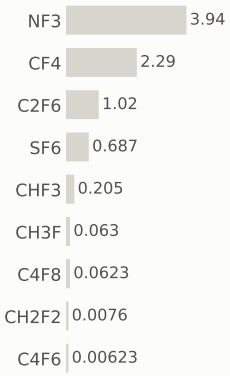

Step #4900: Wafer_clean

clean · Wafer_clean

0.169	507.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

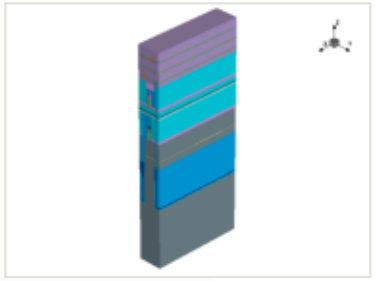

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

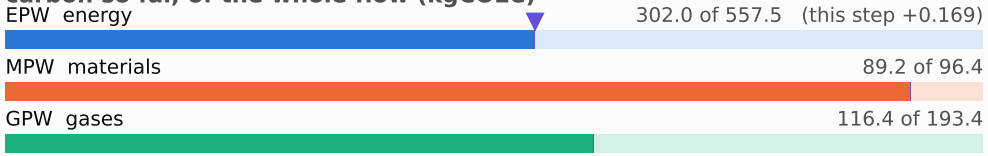

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

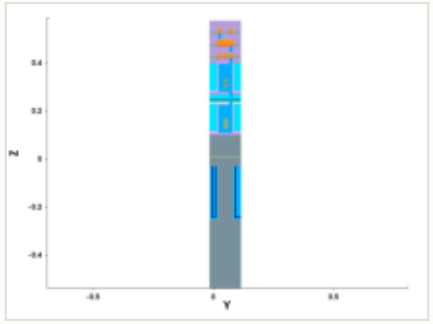

y cut at 0.049 µm

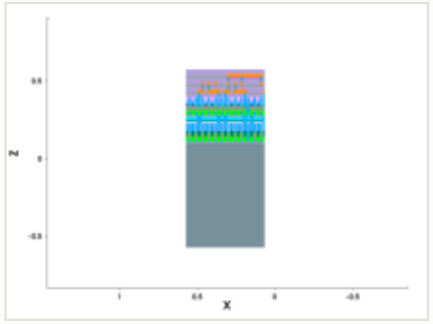

mask for this step

no mask for this step

steps by process area

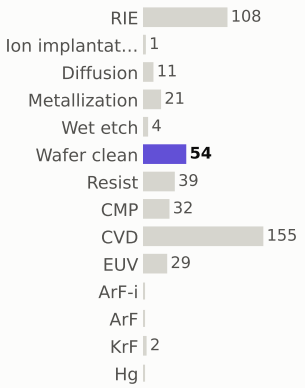

materials deposited (g)

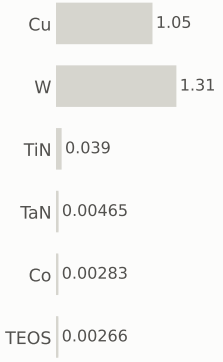

gases emitted (g)

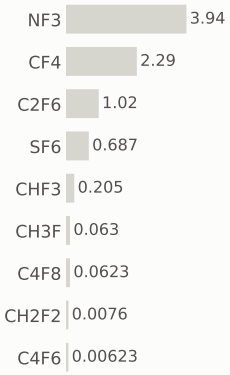

Step #4910: CVD

depo_fill · CVD

1.31	508.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

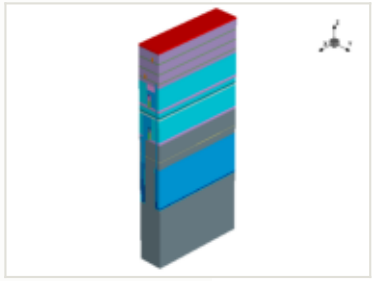

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

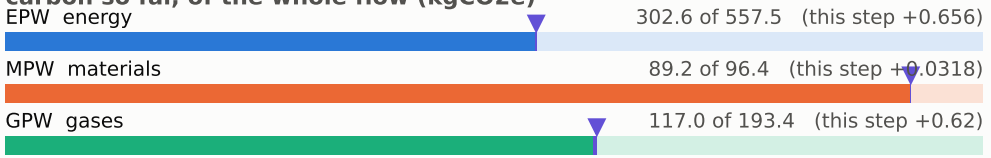

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

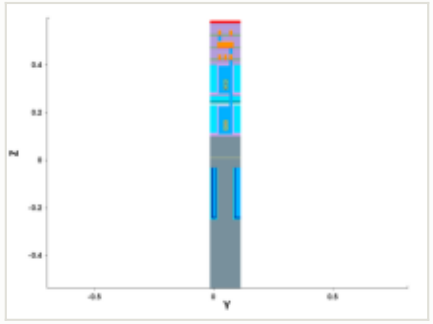

y cut at 0.049 µm

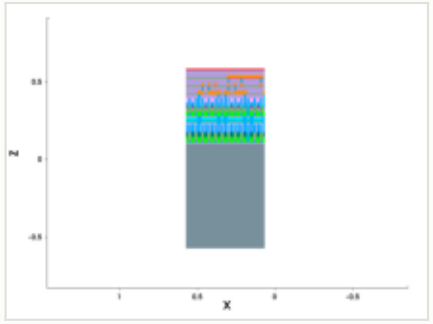

mask for this step

no mask for this step

steps by process area

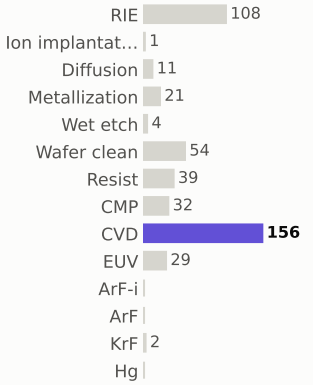

materials deposited (g)

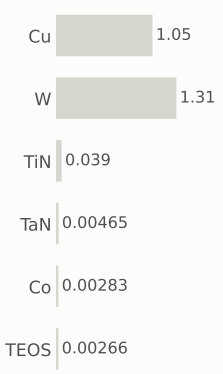

gases emitted (g)

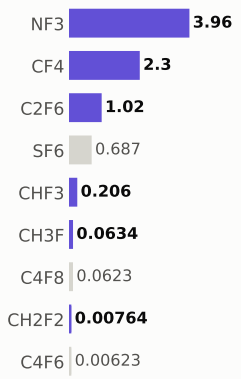

Step #4920: Resist

depo_fill · Resist

0.169	509.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

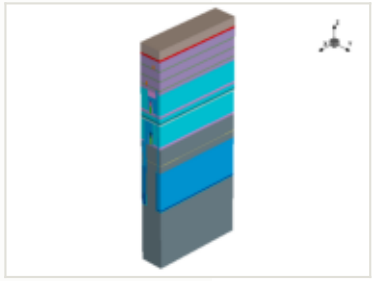

this step

process area	Resist
material	—
thickness	0.05 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

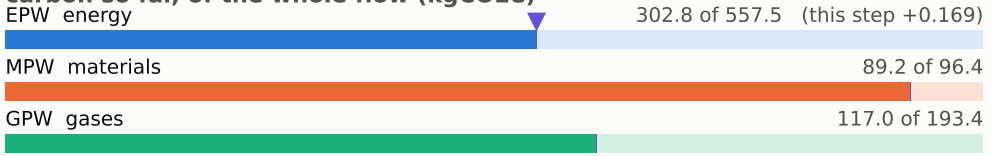

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

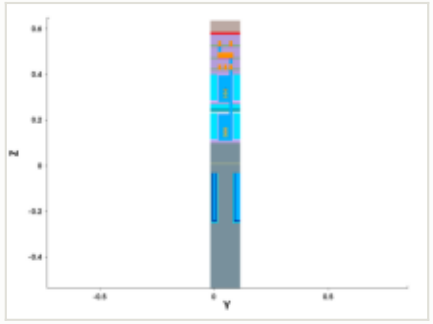

y cut at 0.049 µm

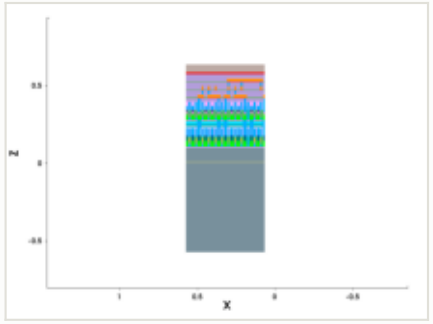

mask for this step

no mask for this step

steps by process area

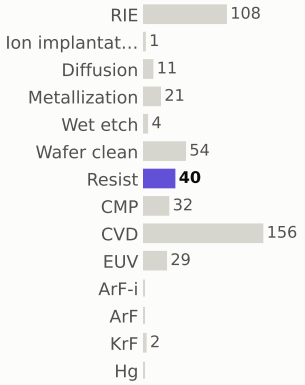

materials deposited (g)

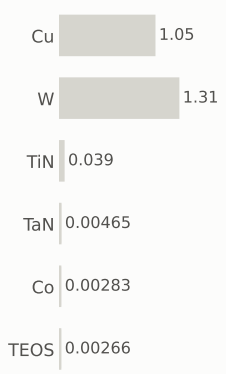

gases emitted (g)

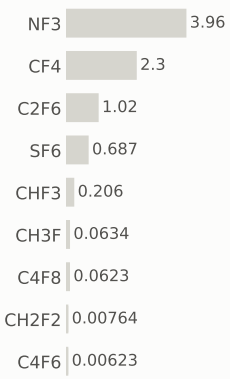

Step #4930: CVD

depo_fill · CVD

1.31	510.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

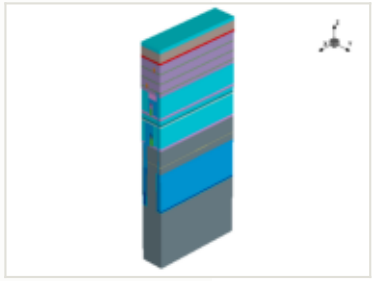

x cut at 0.385 µm

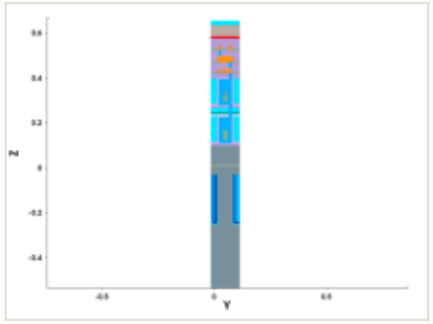

y cut at 0.049 µm

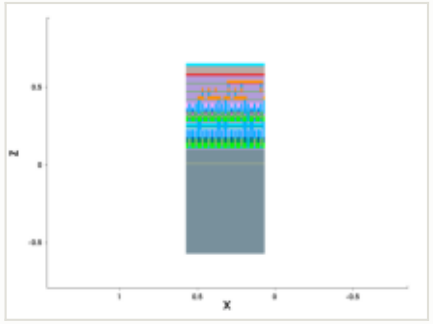

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

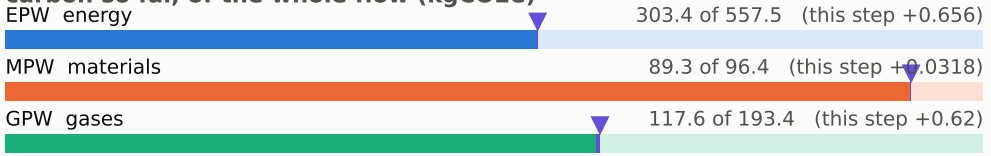

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

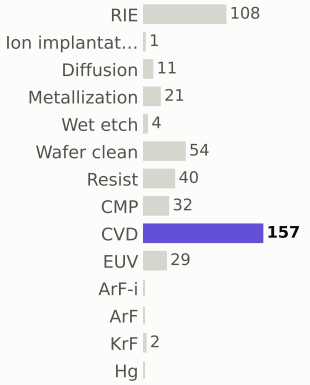

materials deposited (g)

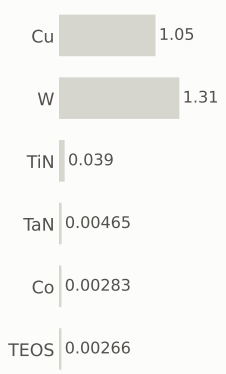

gases emitted (g)



Step #4940: CVD

depo_fill · CVD

1.31	511.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

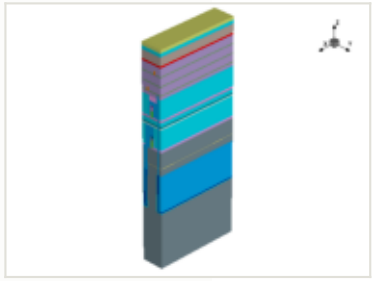

x cut at 0.385 µm

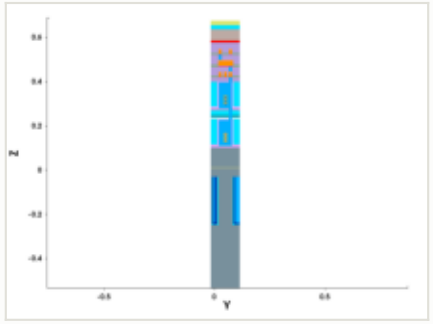

y cut at 0.049 µm

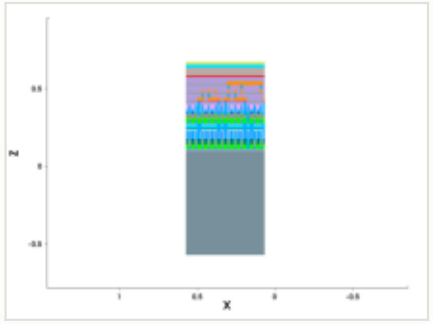

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

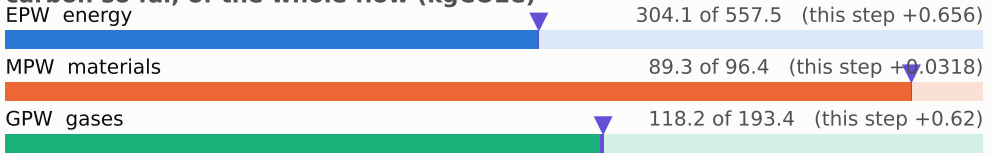

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

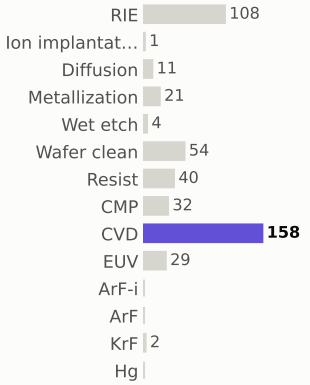

materials deposited (g)



gases emitted (g)

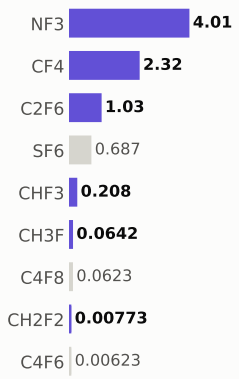

Step #4950: Resist

depo_fill · Resist

0.169	511.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

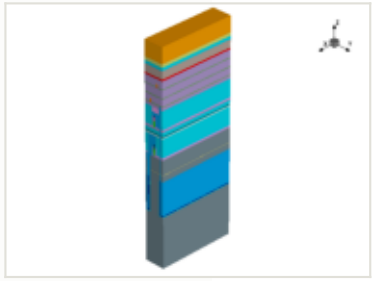

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

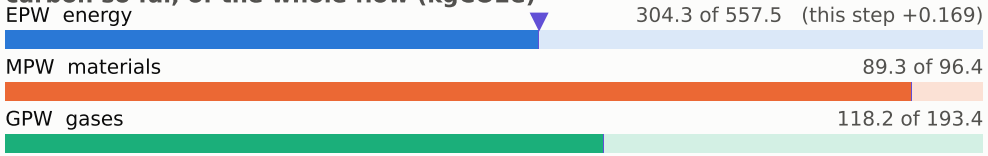

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

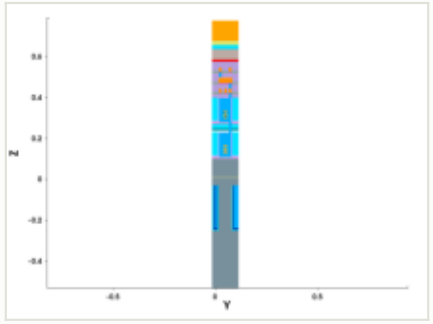

y cut at 0.049 µm

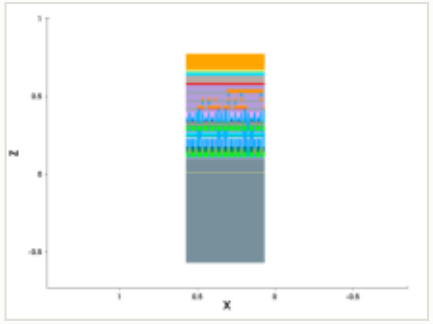

mask for this step

no mask for this step

steps by process area

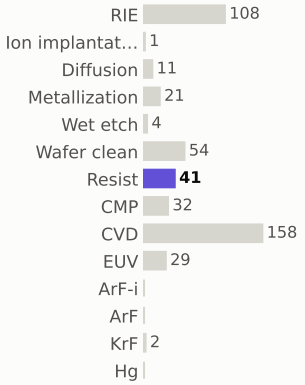

materials deposited (g)

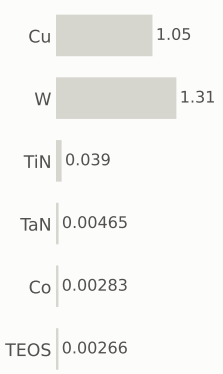

gases emitted (g)

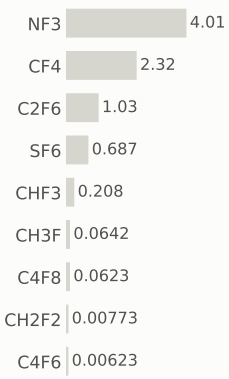

Step #4960: CVD

depo_fill · CVD

1.31	513.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

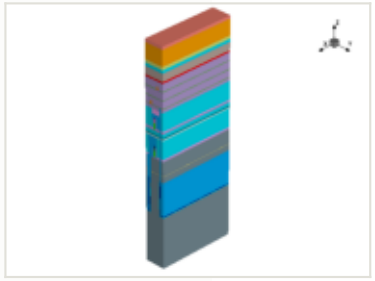

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

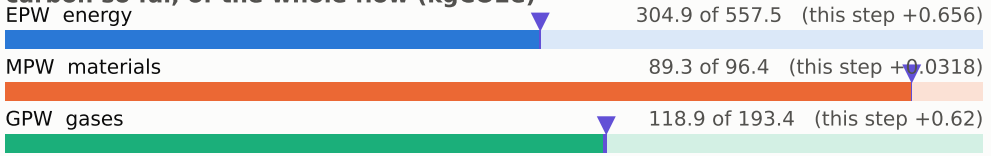

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

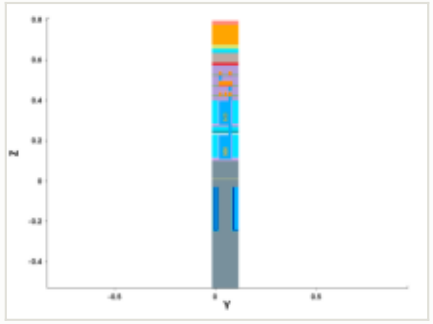

y cut at 0.049 µm

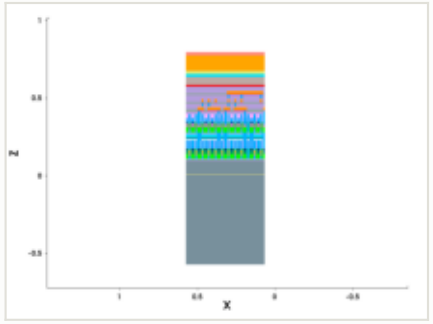

mask for this step

no mask for this step

steps by process area

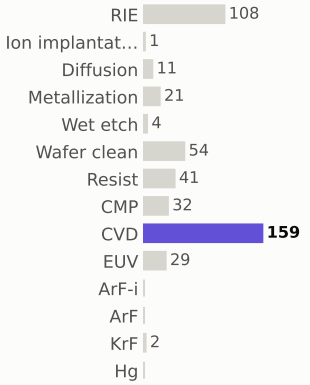

materials deposited (g)

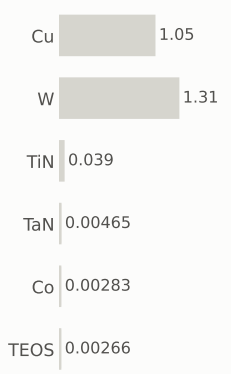

gases emitted (g)

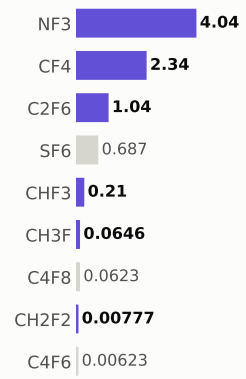

Step #4970: Wafer_clean

clean · Wafer_clean

0.169	513.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

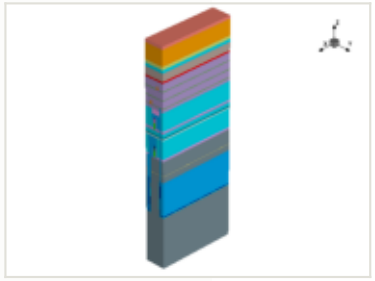

x cut at 0.385 µm

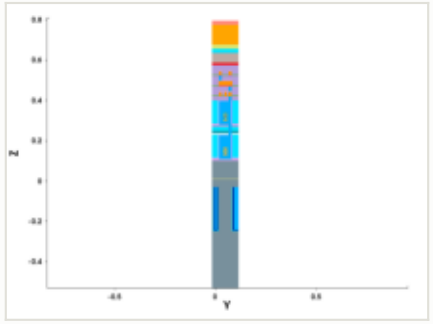

y cut at 0.049 µm

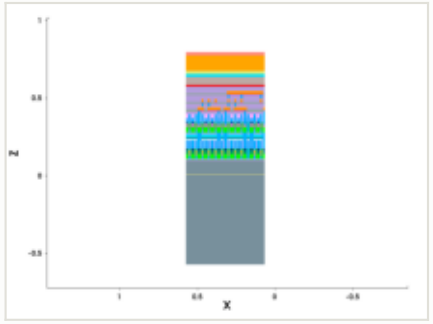

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

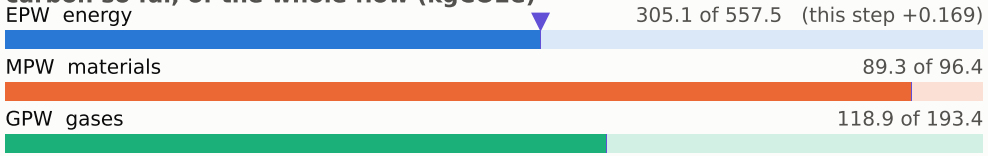

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

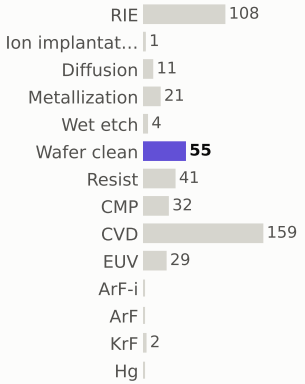

materials deposited (g)

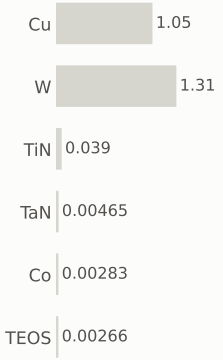

gases emitted (g)

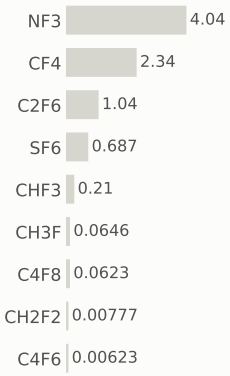

Step #4980: EUV

litho_patterning · EUV

1.96	515.2	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

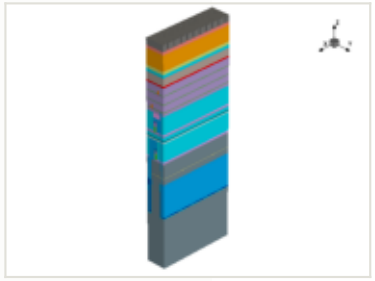

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

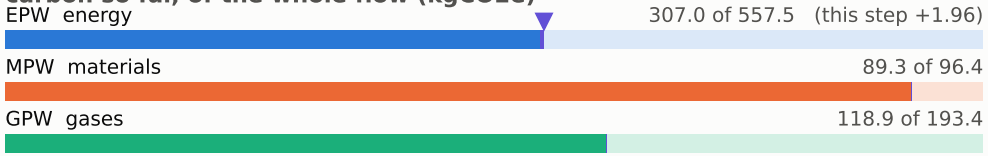

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

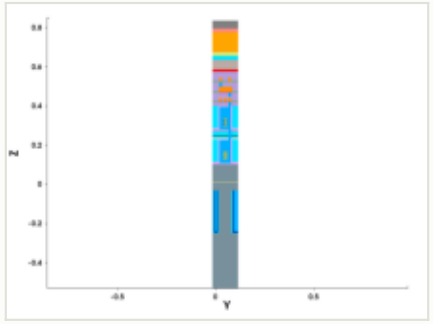

y cut at 0.049 µm

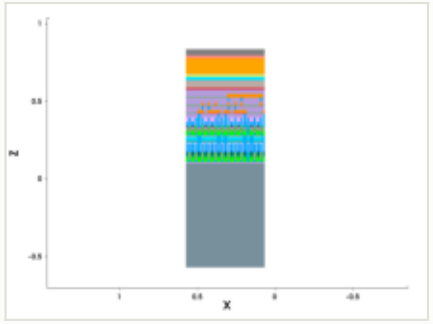

mask: layer 10321:0 (GDSII)



steps by process area

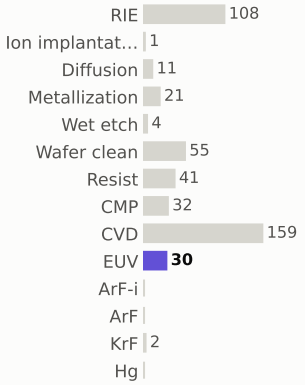

materials deposited (g)

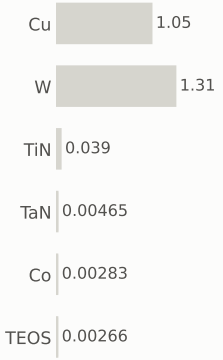

gases emitted (g)

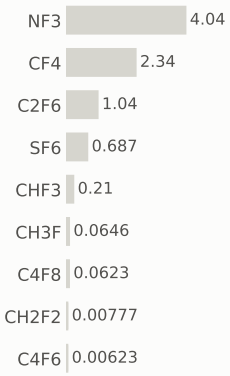

Step #4990: RIE

etch_anisotropic · RIE

1.04	516.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

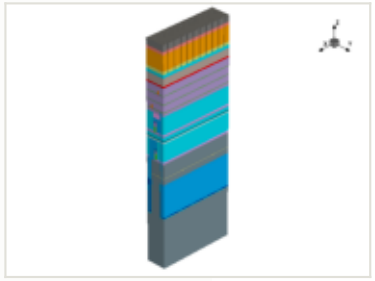

x cut at 0.385 µm

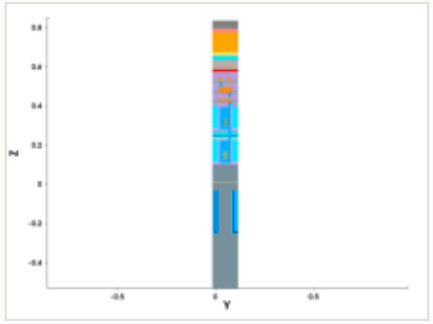

y cut at 0.049 µm

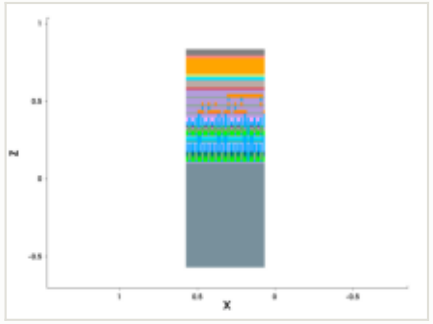

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

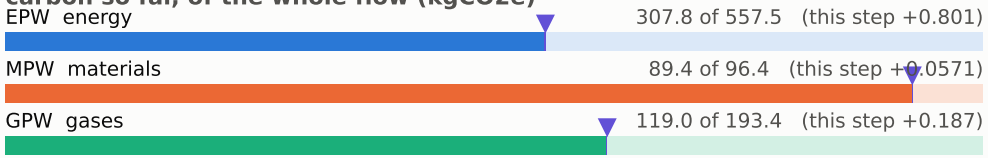

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

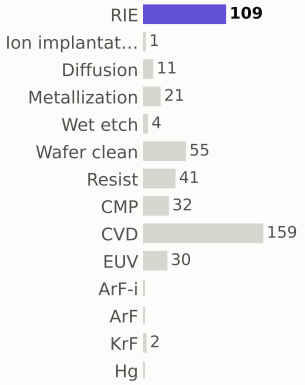

materials deposited (g)

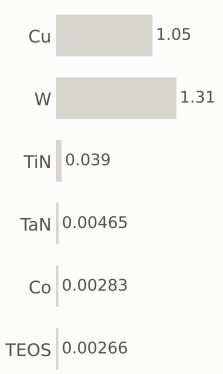

gases emitted (g)

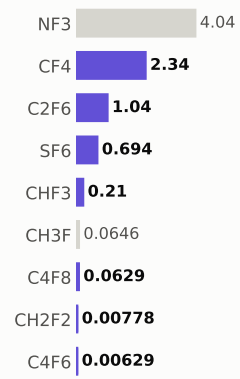

Step #5000: Wafer_clean

etch_strip · Wafer_clean

0.169	516.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

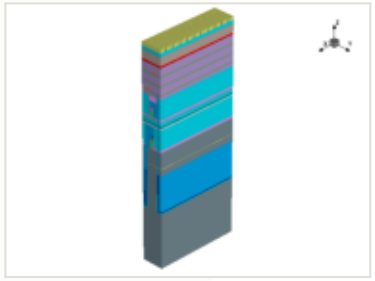

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

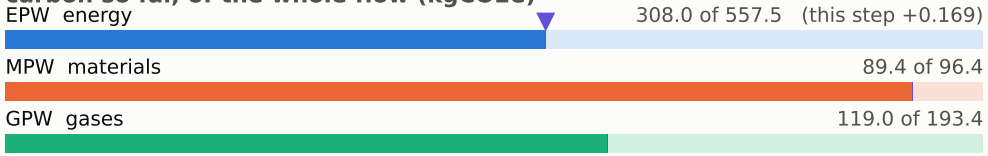

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

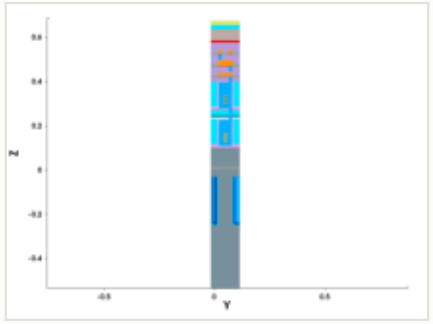

y cut at 0.049 µm

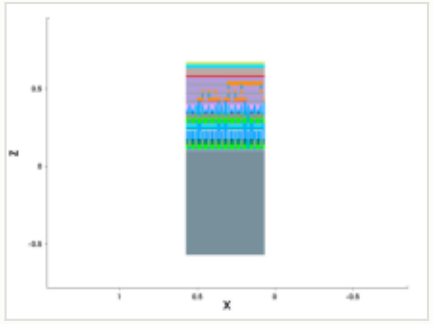

mask for this step

no mask for this step

steps by process area

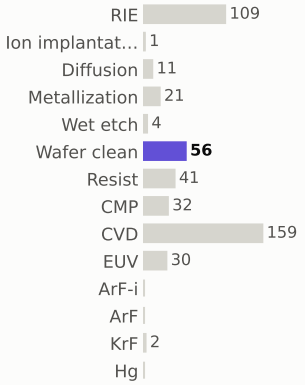

materials deposited (g)

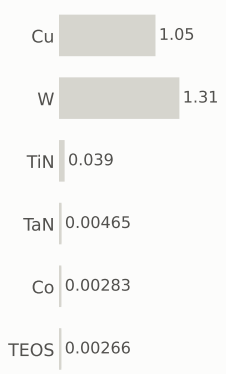

gases emitted (g)

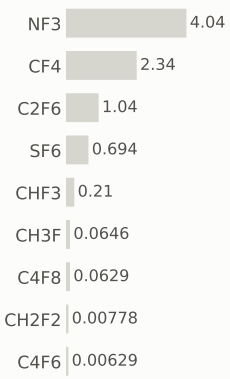

Step #5010: Resist

depo_fill · Resist

0.169	516.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

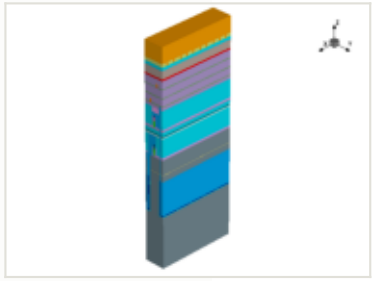

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

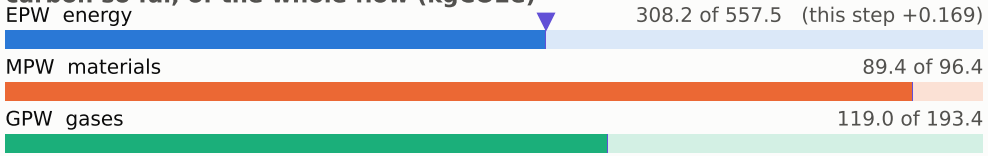

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

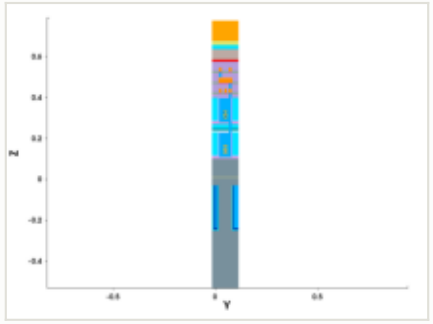

y cut at 0.049 µm

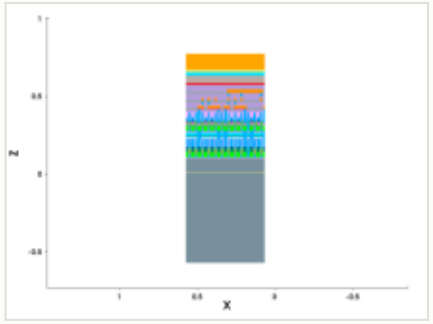

mask for this step

no mask for this step

steps by process area

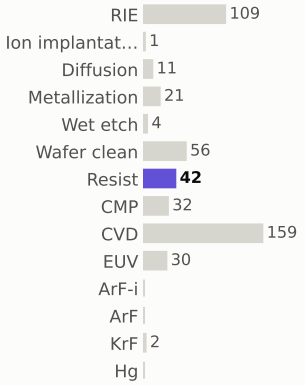

materials deposited (g)

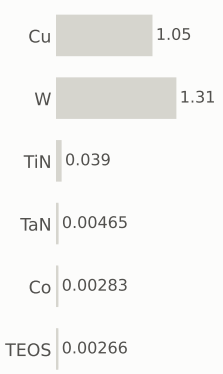

gases emitted (g)

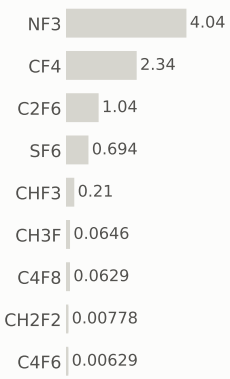

Step #5020: CVD

depo_fill · CVD

1.31	517.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

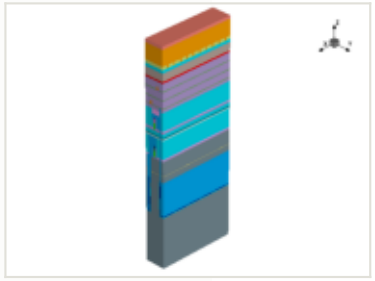

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

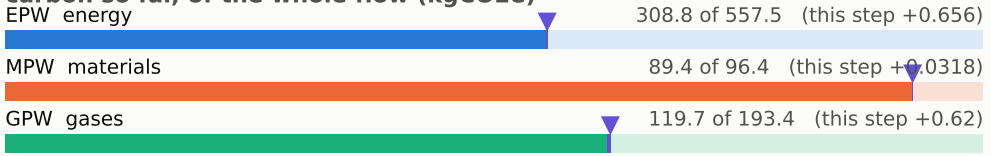

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

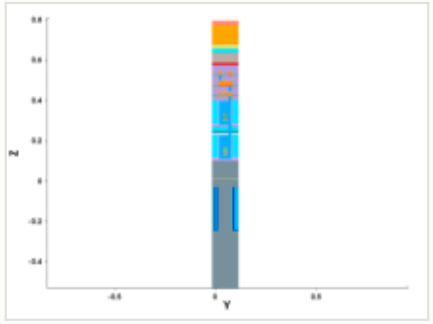

y cut at 0.049 µm

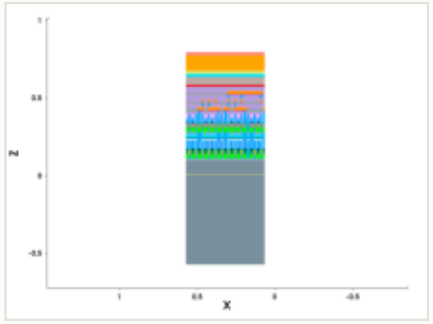

mask for this step

no mask for this step

steps by process area

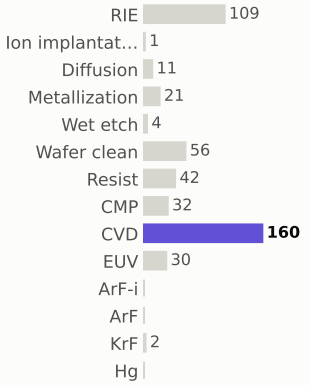

materials deposited (g)

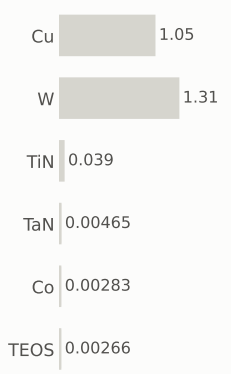

gases emitted (g)

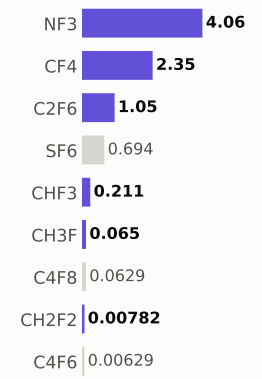

Step #5030: Wafer_clean

clean · Wafer_clean

0.169	518.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

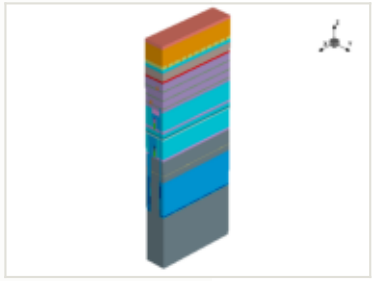

x cut at 0.385 µm

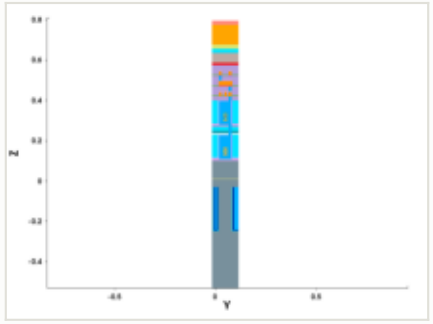

y cut at 0.049 µm

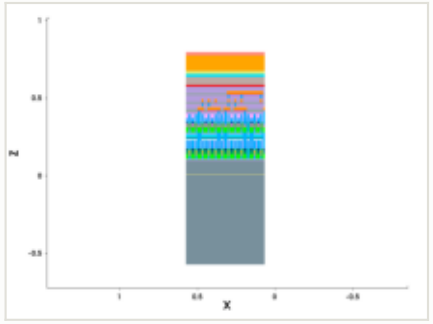

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

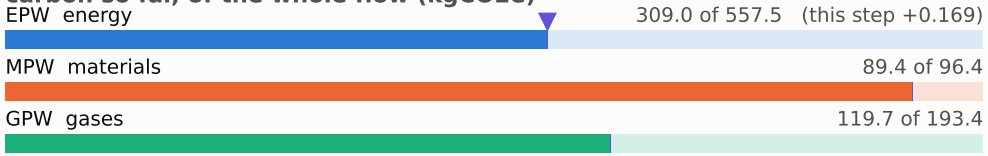

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

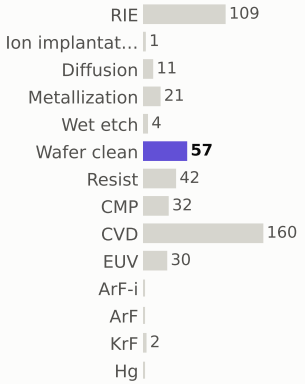

materials deposited (g)

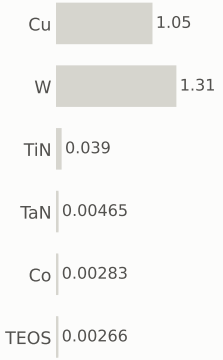

gases emitted (g)

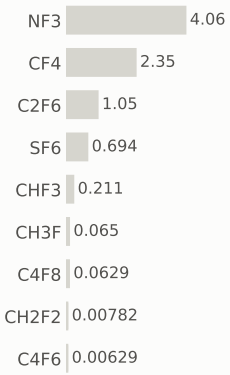

Step #5040: EUV

litho_patterning · EUV

1.96	520.0	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

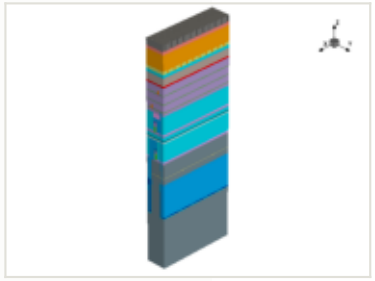

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

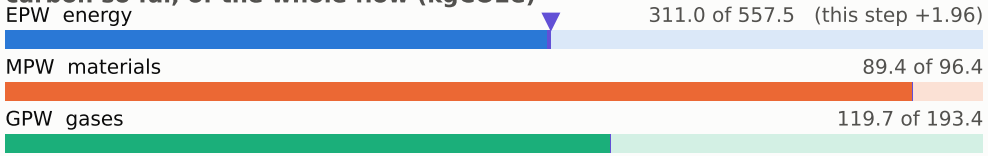

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

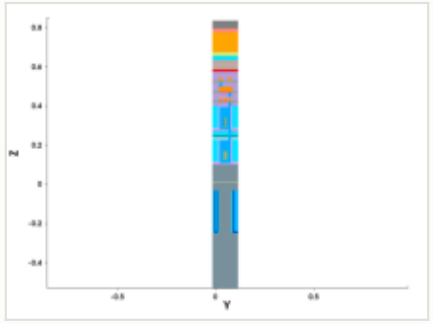

y cut at 0.049 µm

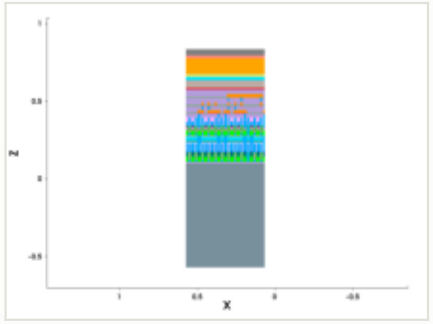

mask: layer 10322:0 (GDSII)

steps by process area

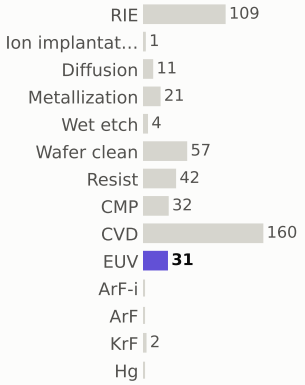

materials deposited (g)



gases emitted (g)

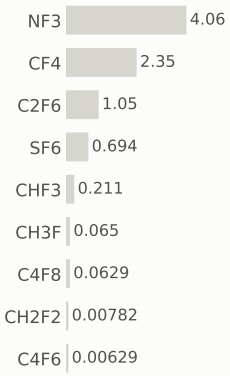

Step #5050: RIE

etch_anisotropic · RIE

1.04	521.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

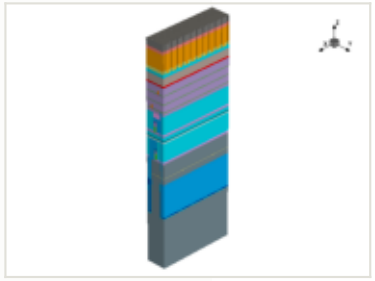

x cut at 0.385 µm

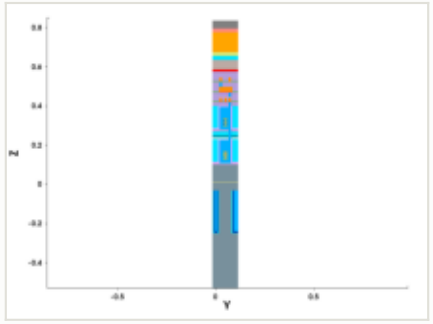

y cut at 0.049 µm

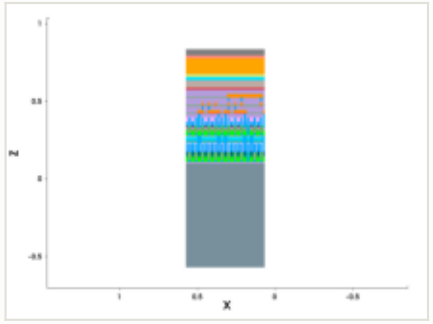

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

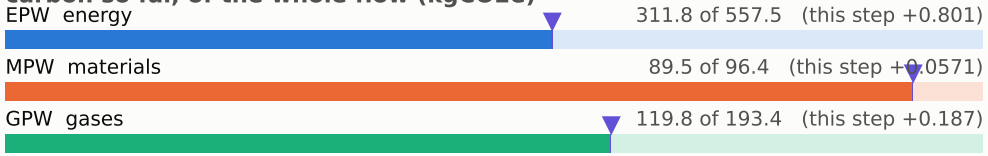

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

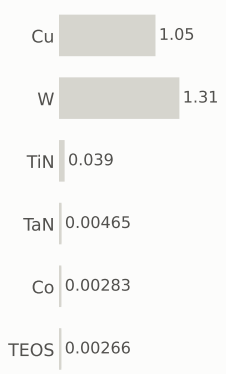

gases emitted (g)

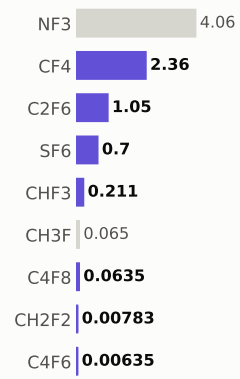

Step #5060: Wafer_clean

etch_strip · Wafer_clean

0.169	521.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

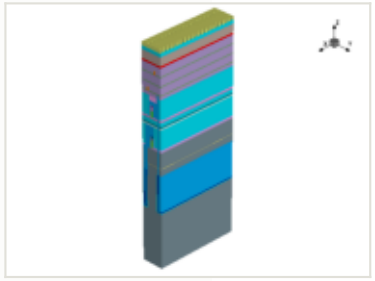

x cut at 0.385 µm

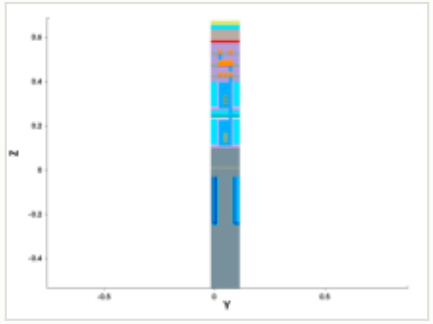

y cut at 0.049 µm

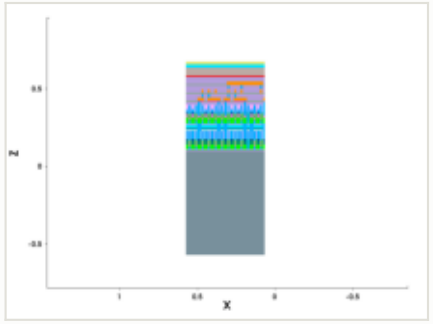

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

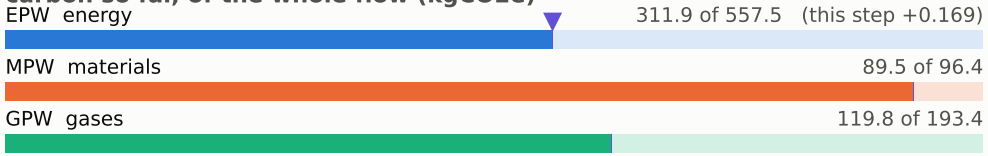

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

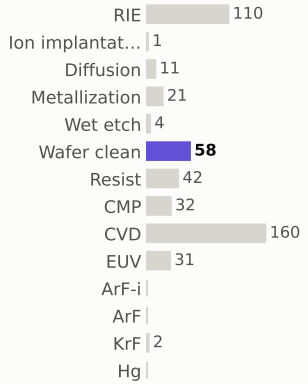

materials deposited (g)

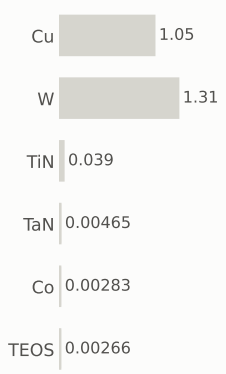

gases emitted (g)

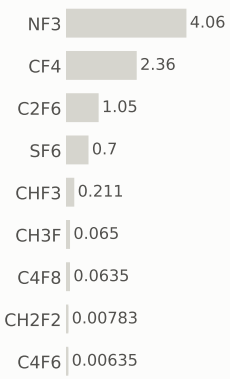

Step #5070: RIE

etch_anisotropic · RIE

1.04	522.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

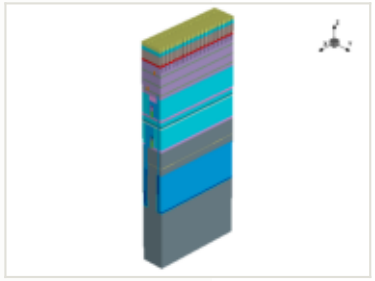

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

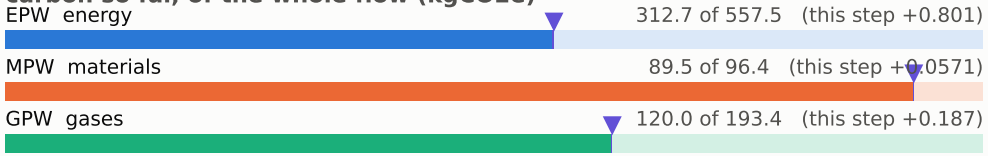

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

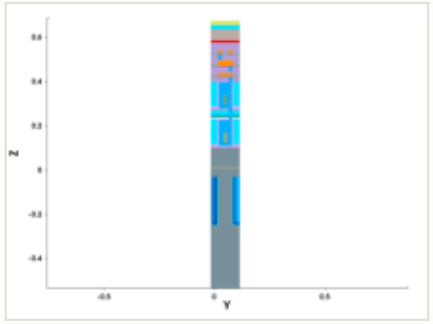

y cut at 0.049 µm

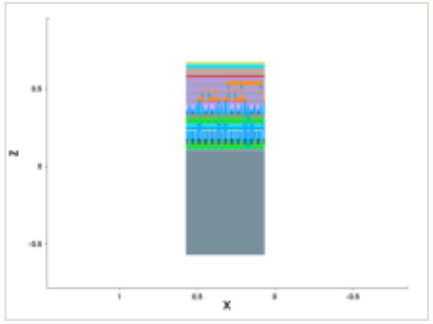

mask for this step

no mask for this step

steps by process area

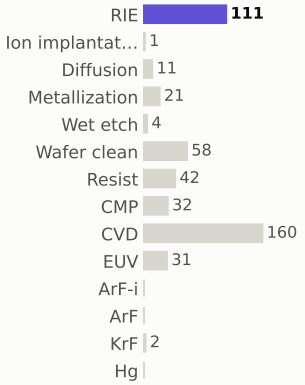

materials deposited (g)

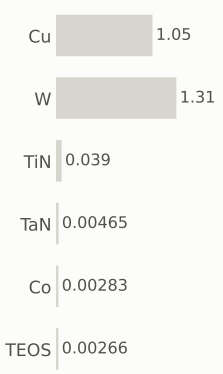

gases emitted (g)

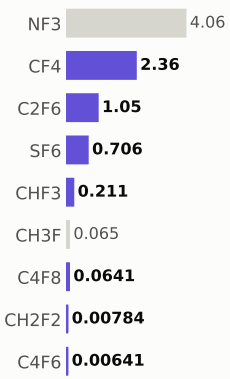

Step #5080: Wafer_clean

clean · Wafer_clean

0.169	522.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

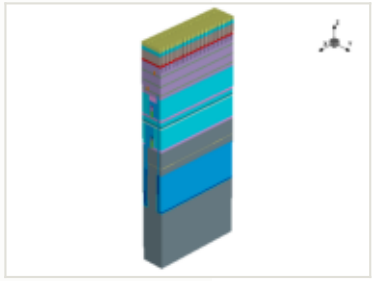

x cut at 0.385 µm

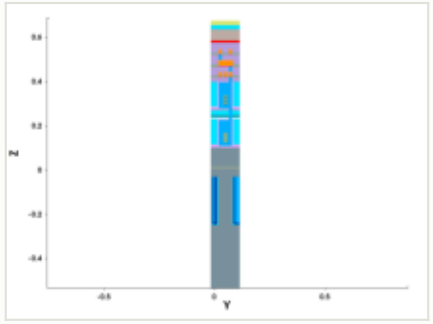

y cut at 0.049 µm

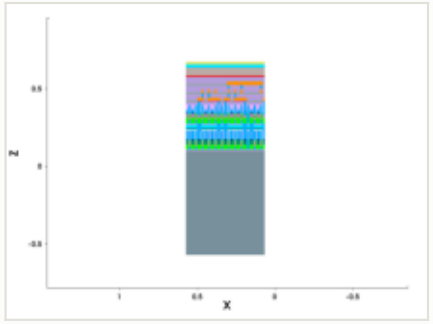

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

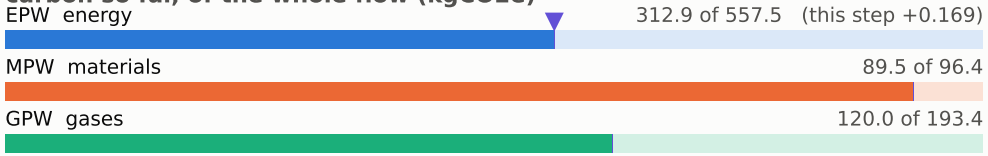

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

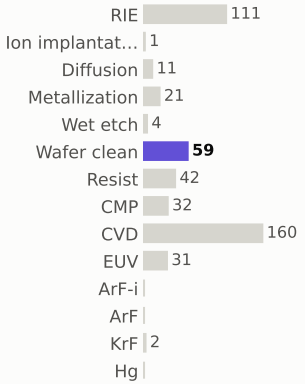

materials deposited (g)



gases emitted (g)

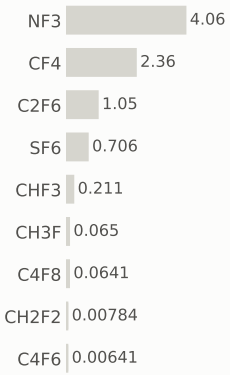

Step #5090: Metallization

depo_fill · Metallization

1.21	523.7	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

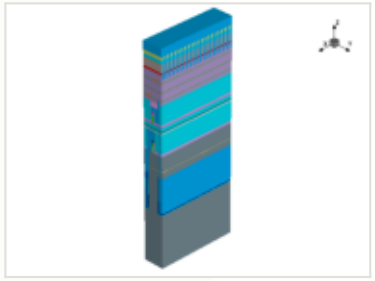

x cut at 0.385 µm

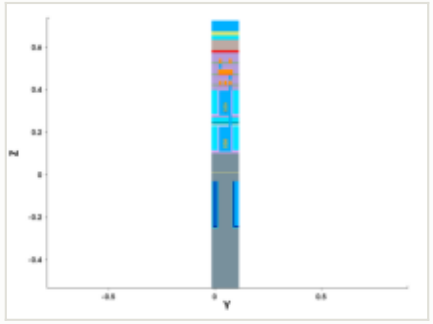

y cut at 0.049 µm

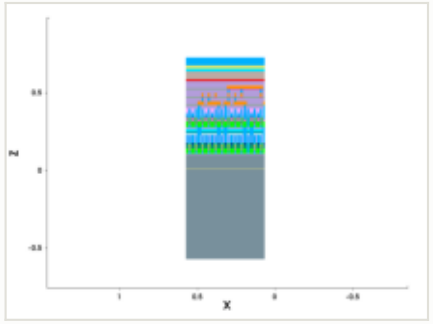

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

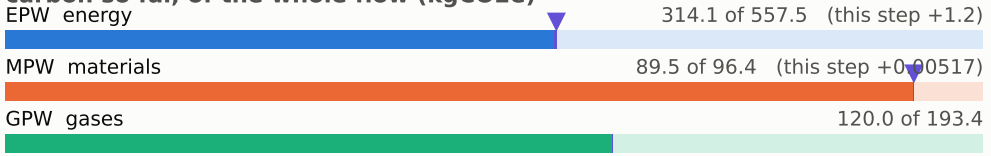

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

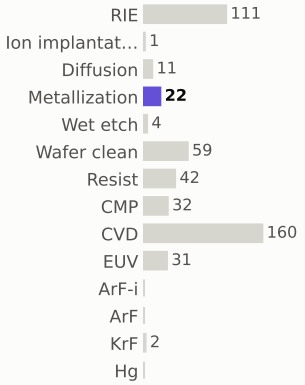

materials deposited (g)



gases emitted (g)

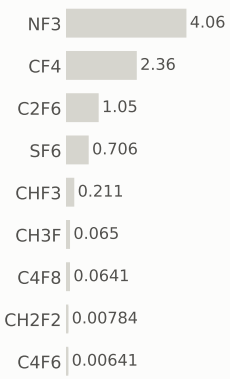

Step #5100: CMP

etch_cmp · CMP

0.169	523.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

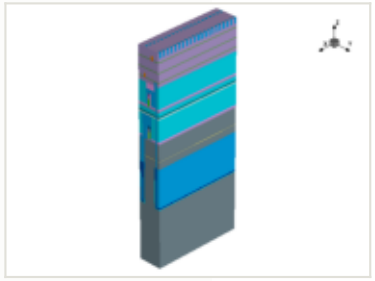

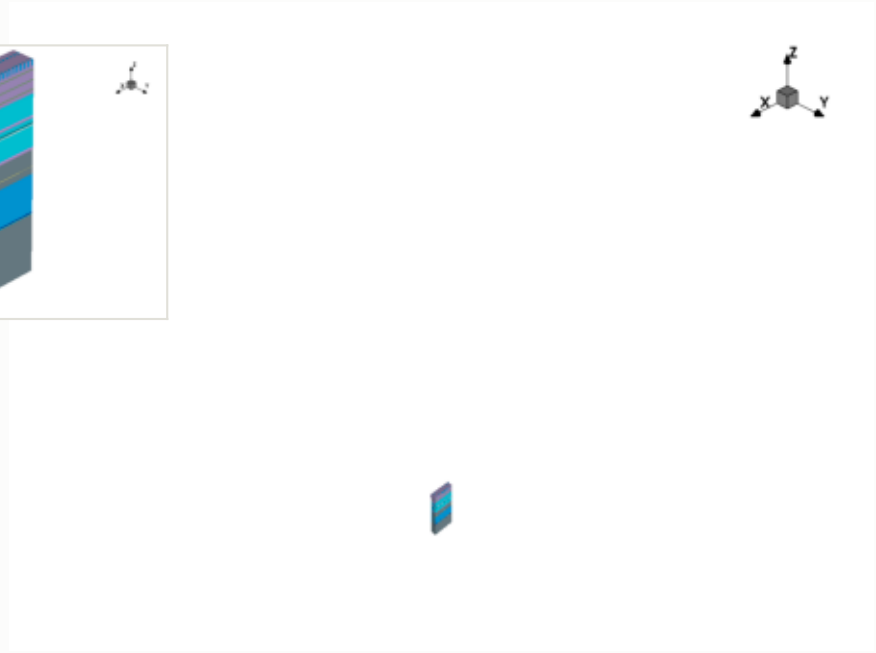

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

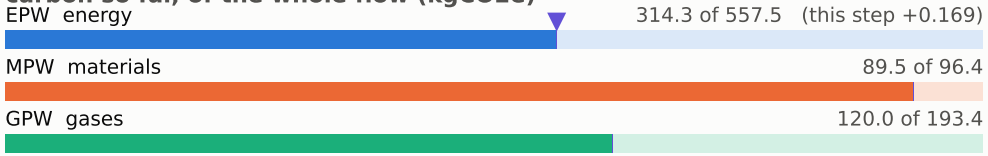

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

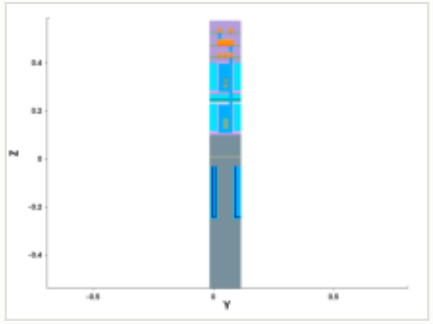

y cut at 0.049 µm

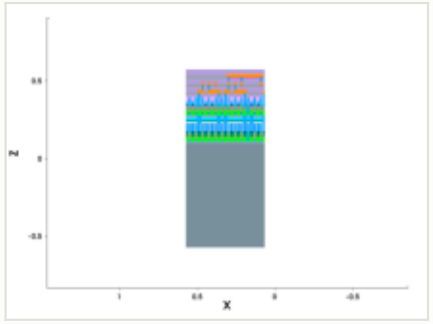

mask for this step

no mask for this step

steps by process area

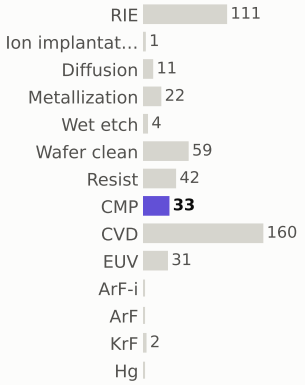

materials deposited (g)



gases emitted (g)

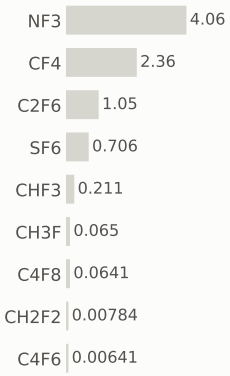

Step #5110: CVD

depo_fill · CVD

1.31	525.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

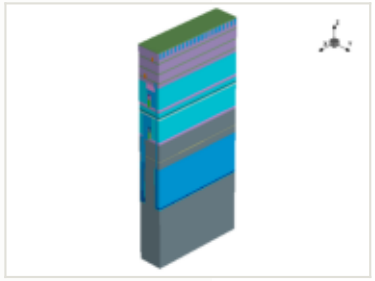

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

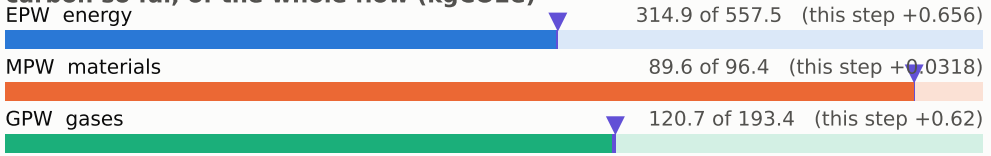

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

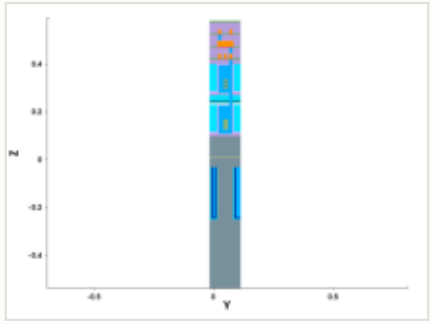

y cut at 0.049 µm

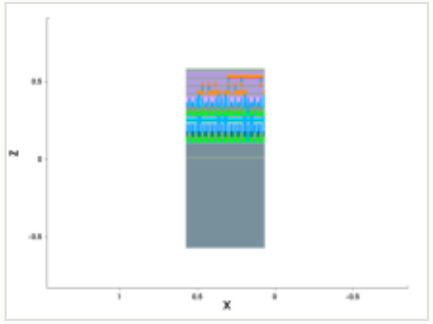

mask for this step

no mask for this step

steps by process area

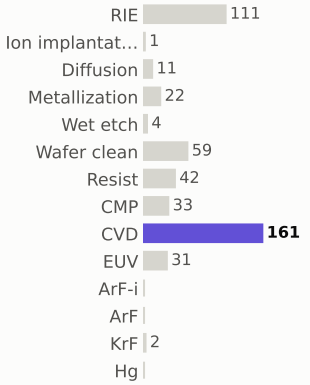

materials deposited (g)

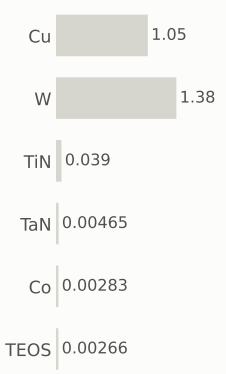

gases emitted (g)

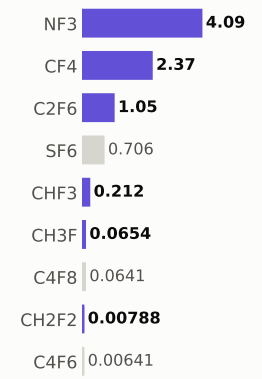

Step #5120: CVD

depo_fill · CVD

1.31	526.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.022 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

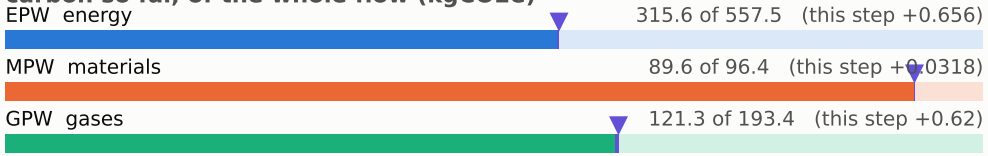

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

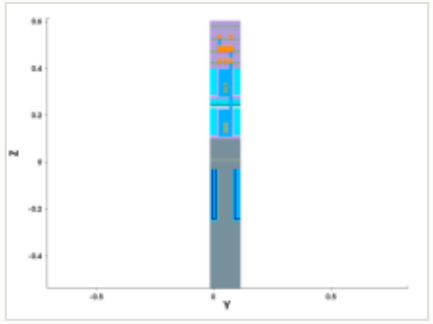

y cut at 0.049 µm

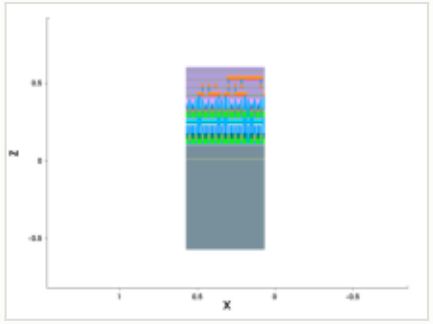

mask for this step

no mask for this step

steps by process area

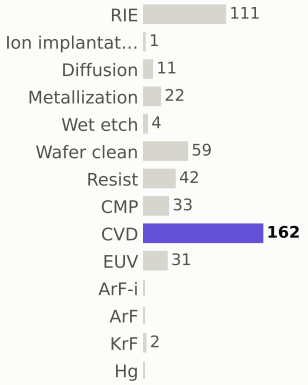

materials deposited (g)

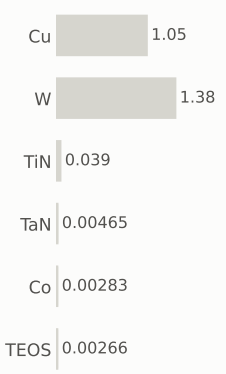

gases emitted (g)

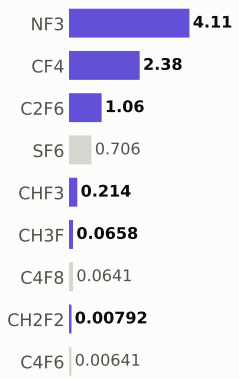

Step #5130: Diffusion

treatment · Diffusion

0.801	527.2	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

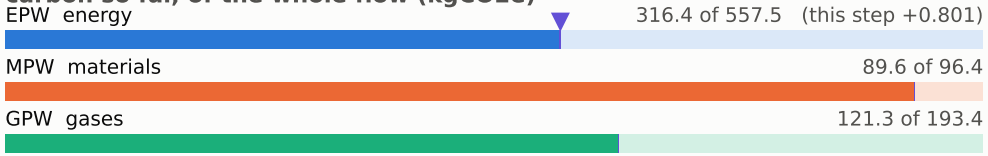

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

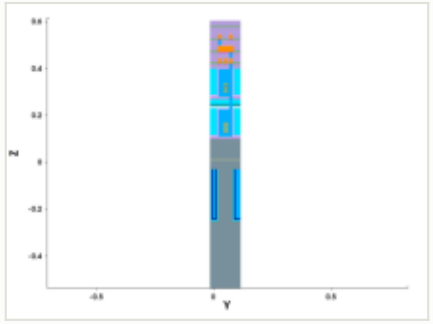

y cut at 0.049 µm

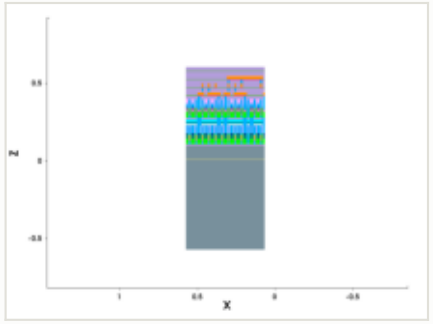

mask for this step

no mask for this step

steps by process area

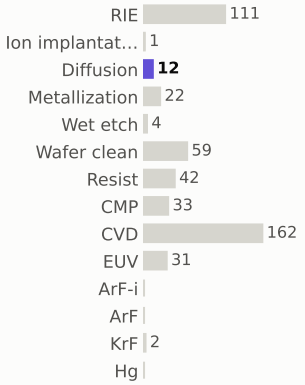

materials deposited (g)

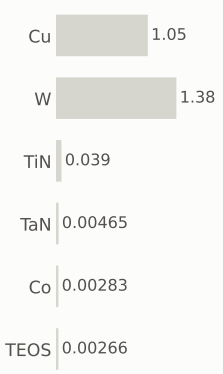

gases emitted (g)

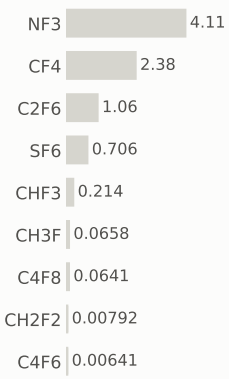

Step #5140: Wafer_clean

clean · Wafer_clean

0.169	527.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

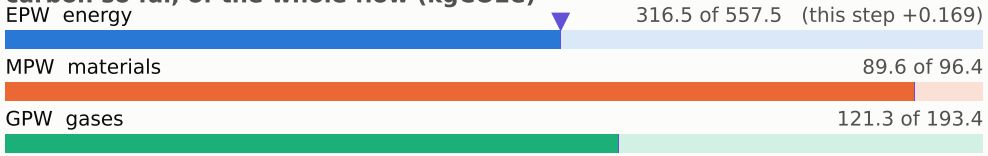

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

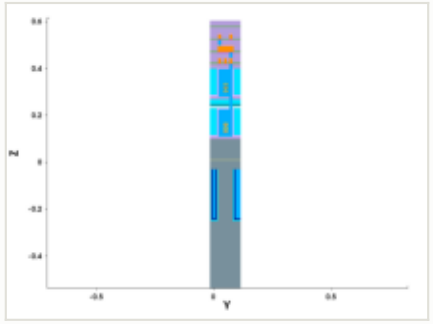

y cut at 0.049 µm

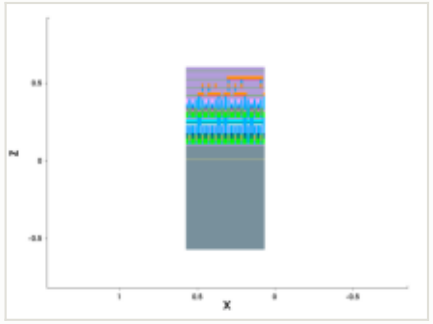

mask for this step

no mask for this step

steps by process area

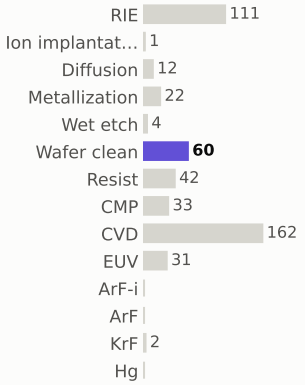

materials deposited (g)

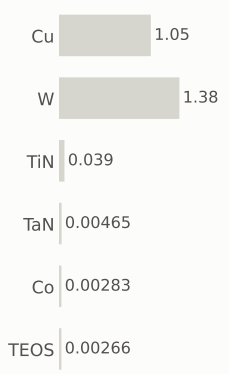

gases emitted (g)

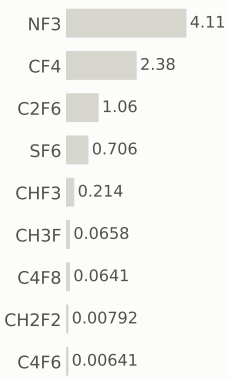

Step #5150: CVD

depo_fill · CVD

1.31	528.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

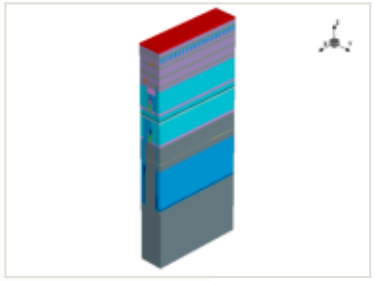

x cut at 0.385 µm

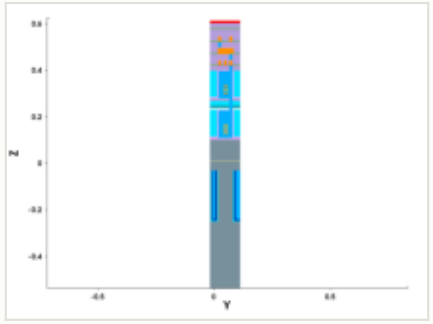

y cut at 0.049 µm

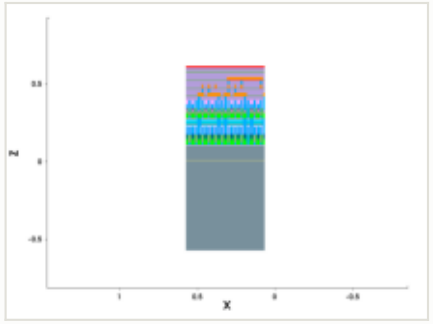

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

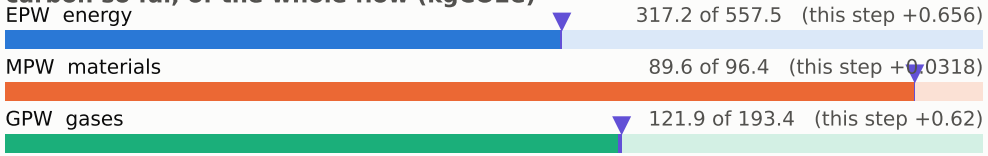

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

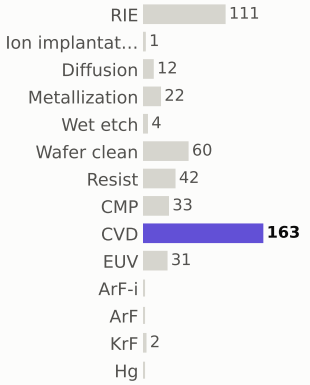

materials deposited (g)

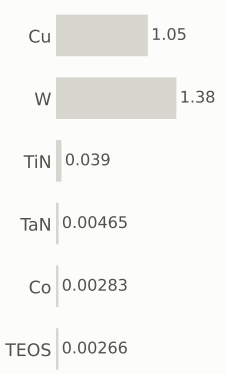

gases emitted (g)



Step #5160: CVD

depo_fill · CVD

1.31	530.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

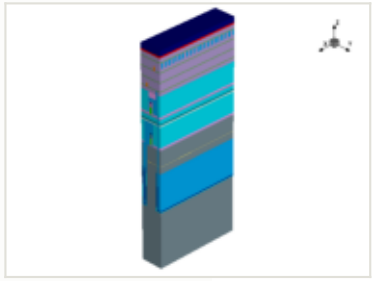

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0322 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

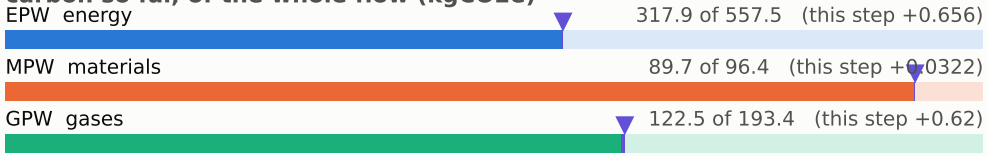

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

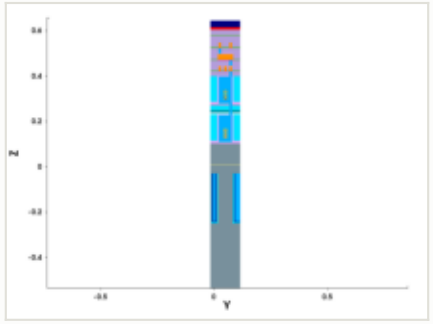

y cut at 0.049 µm

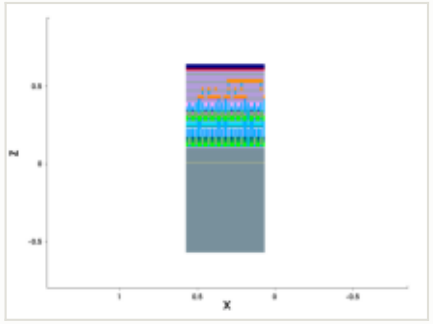

mask for this step

no mask for this step

steps by process area

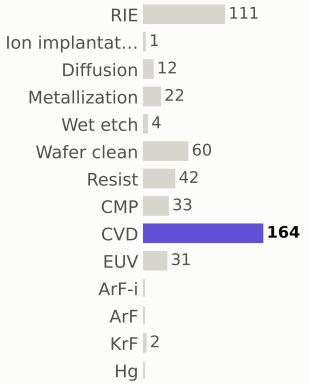

materials deposited (g)

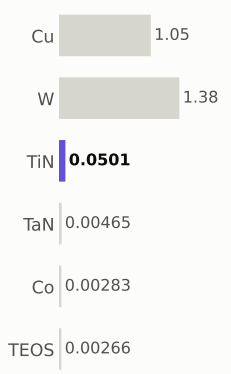

gases emitted (g)

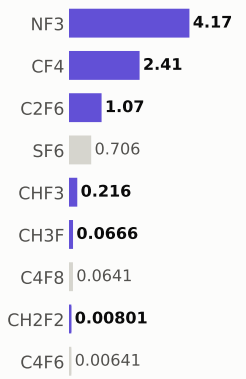

Step #5170: Wafer_clean

clean · Wafer_clean

0.169	530.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

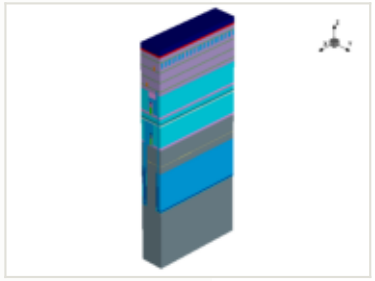

x cut at 0.385 µm

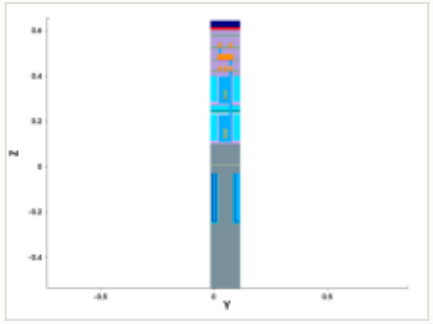

y cut at 0.049 µm

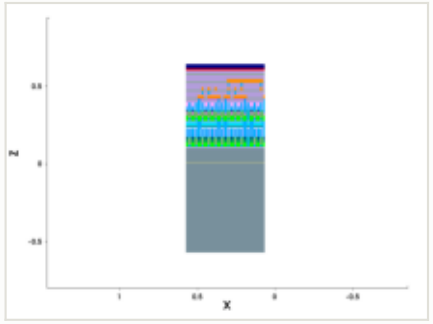

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

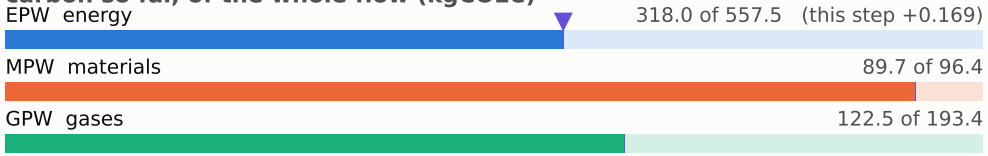

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

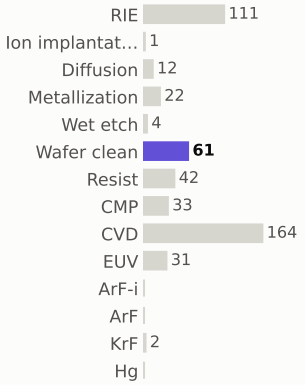

materials deposited (g)

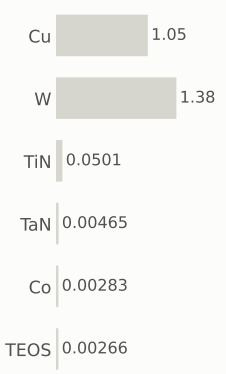

gases emitted (g)

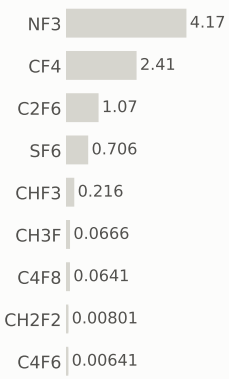

Step #5180: CVD

depo_fill · CVD

1.31	531.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

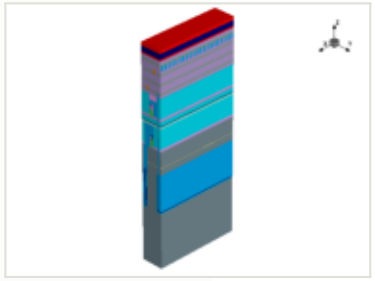

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

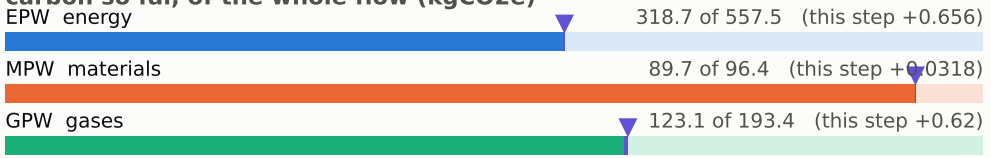

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

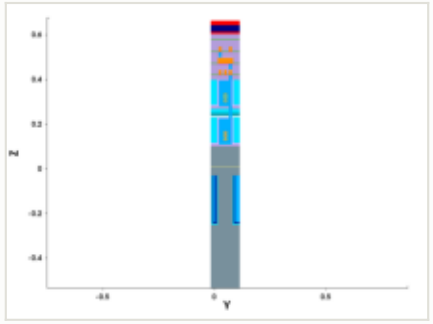

y cut at 0.049 µm

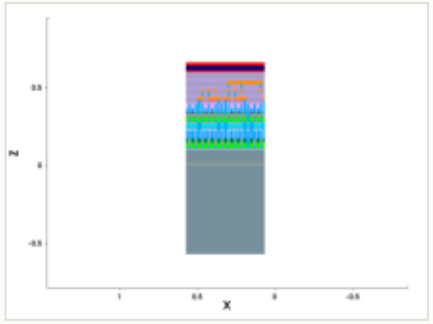

mask for this step

no mask for this step

steps by process area

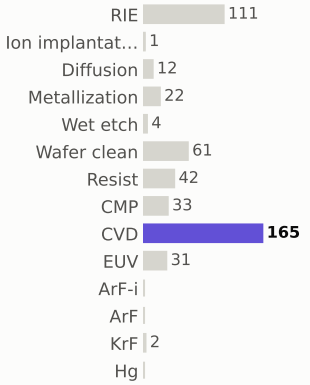

materials deposited (g)

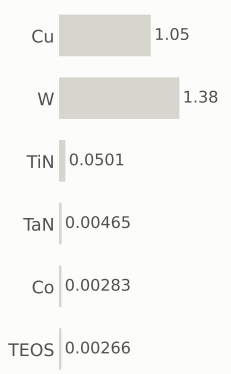

gases emitted (g)



Step #5190: CVD

depo_fill · CVD

1.31	532.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

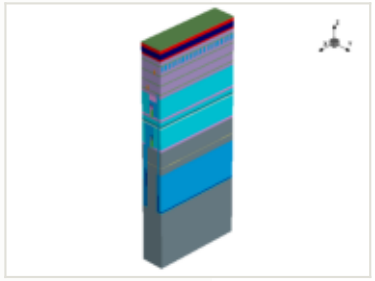

this step

process area	CVD
material	—
thickness	0.005 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

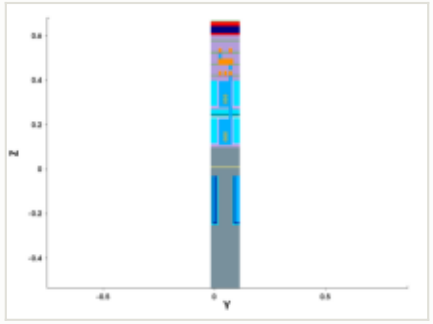

y cut at 0.049 µm

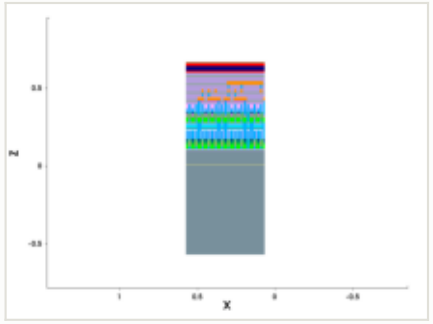

mask for this step

no mask for this step

steps by process area

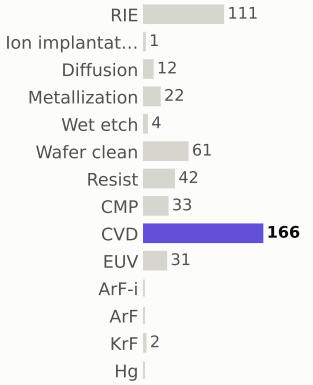

materials deposited (g)

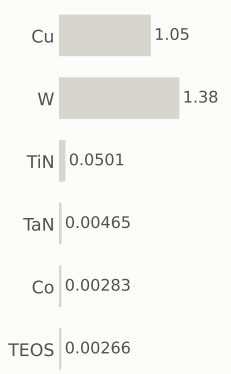

gases emitted (g)

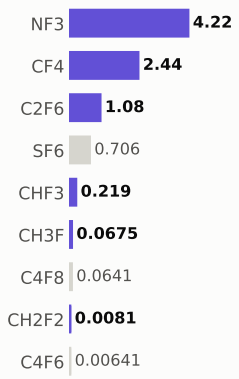

Step #5200: CVD

depo_fill · CVD

1.31	534.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

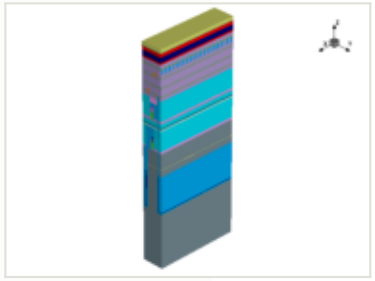

x cut at 0.385 µm

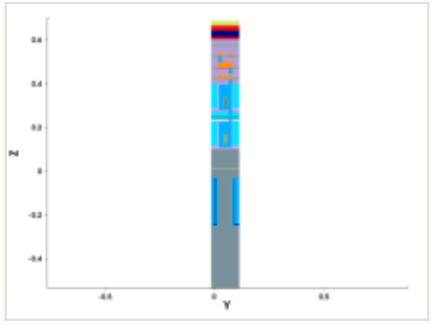

y cut at 0.049 µm

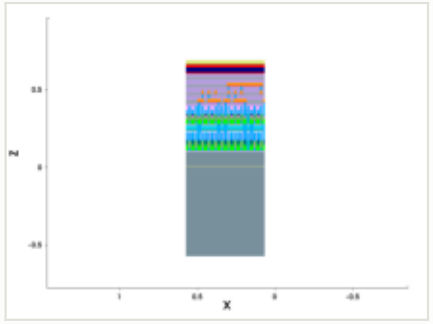

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

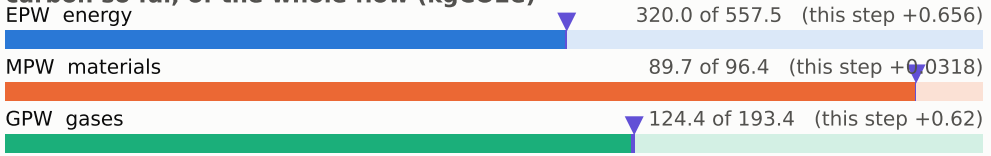

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

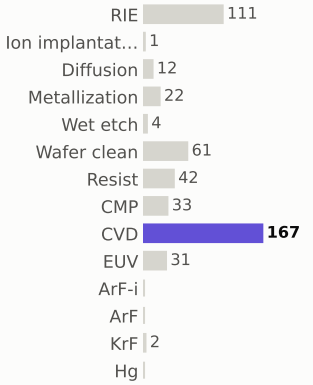

materials deposited (g)

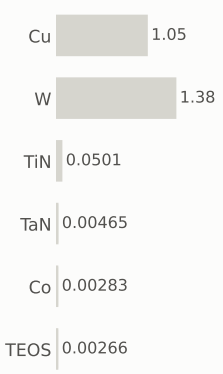

gases emitted (g)

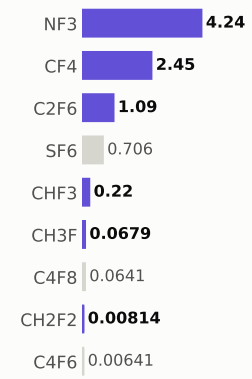

Step #5210: Resist

depo_fill · Resist

0.169	534.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

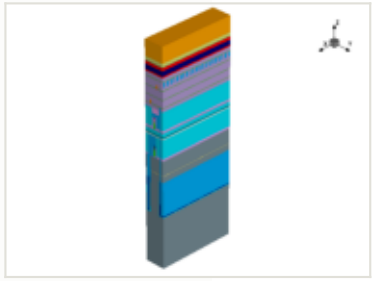

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

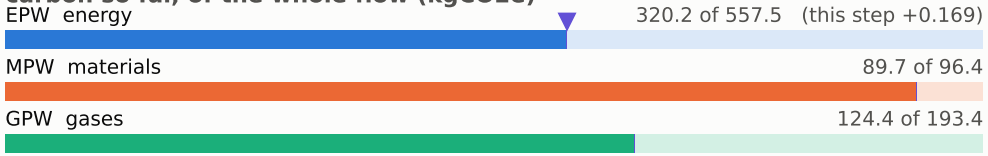

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

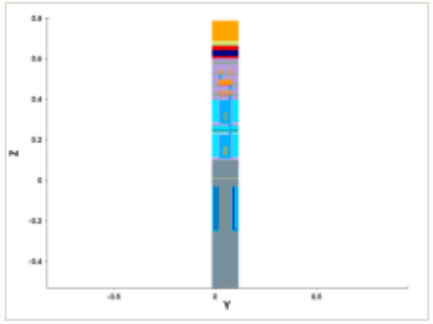

y cut at 0.049 µm

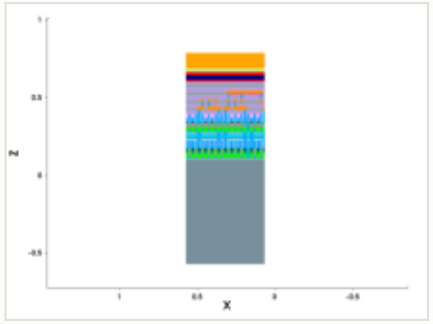

mask for this step

no mask for this step

steps by process area

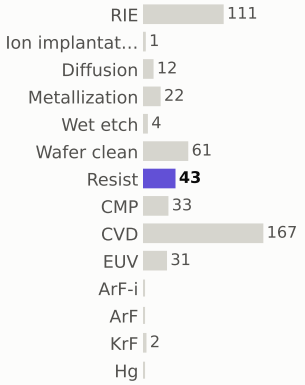

materials deposited (g)

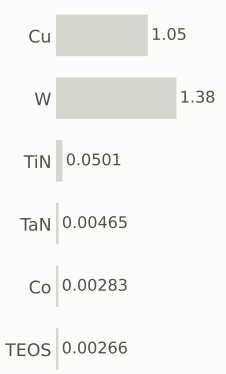

gases emitted (g)

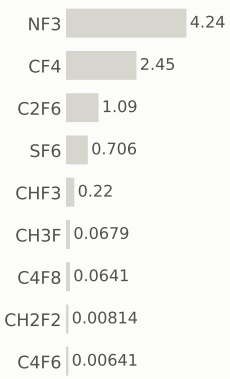

Step #5220: CVD

depo_fill · CVD

1.31	535.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

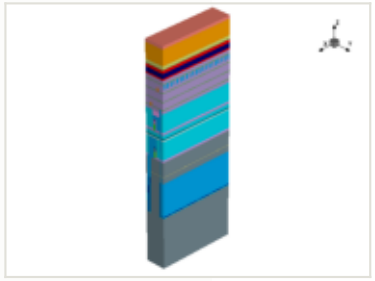

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

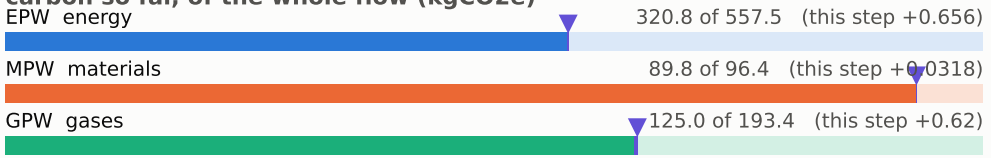

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

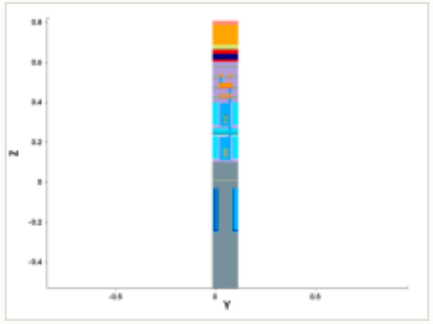

y cut at 0.049 µm

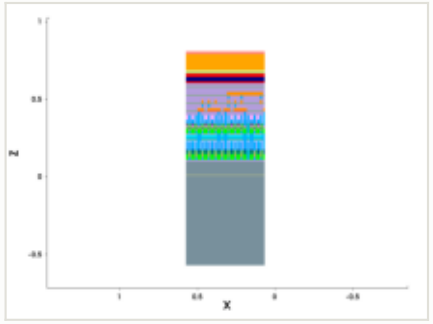

mask for this step

no mask for this step

steps by process area

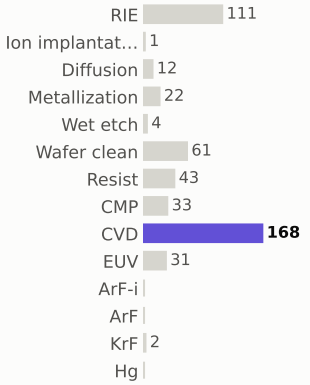

materials deposited (g)

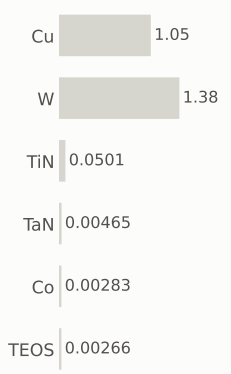

gases emitted (g)

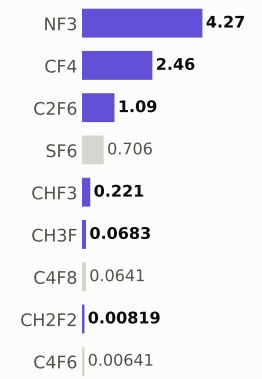

Step #5230: Wafer_clean

clean · Wafer_clean

0.169	535.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

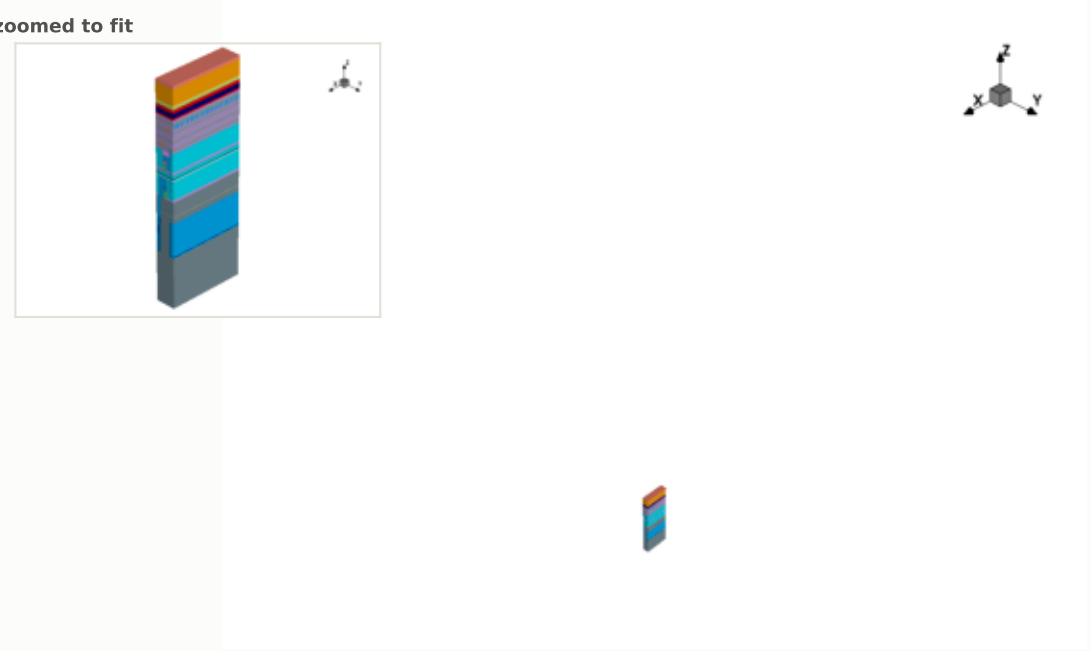

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

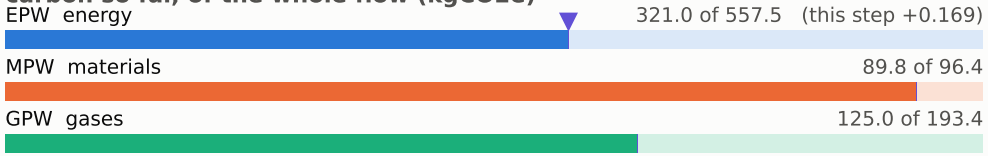

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

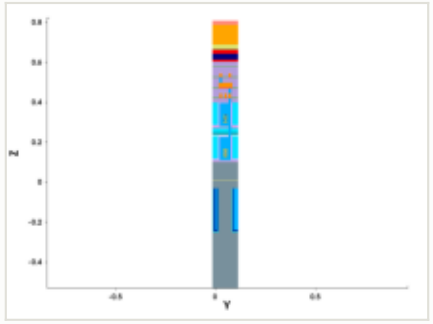

y cut at 0.049 µm

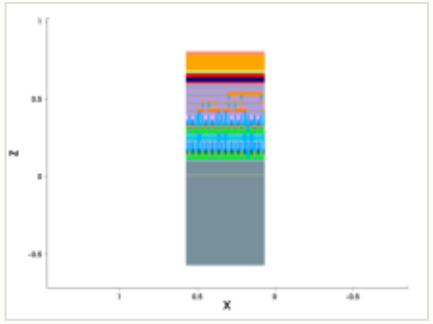

mask for this step

no mask for this step

steps by process area

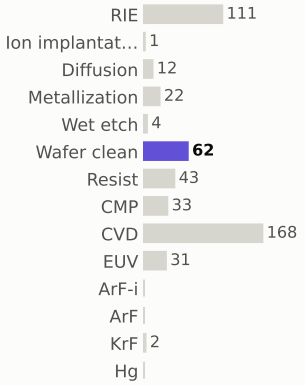

materials deposited (g)

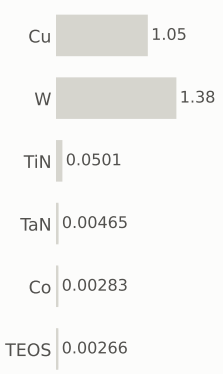

gases emitted (g)

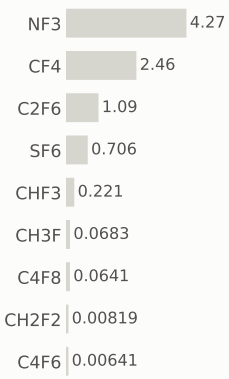

Step #5240: EUV

litho_patterning · EUV

1.96	537.7	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

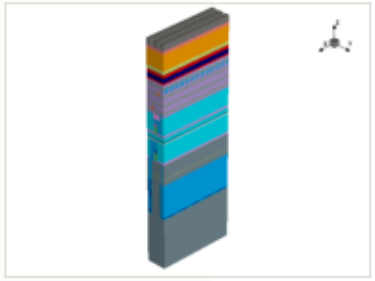

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

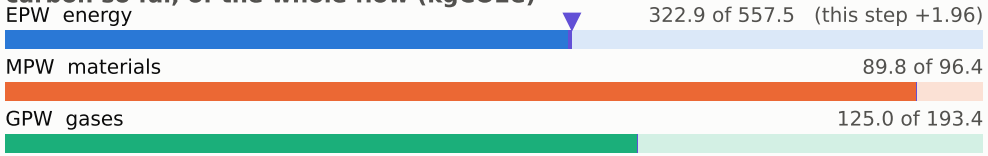

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

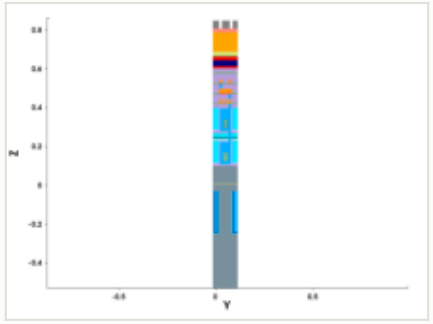

y cut at 0.049 µm

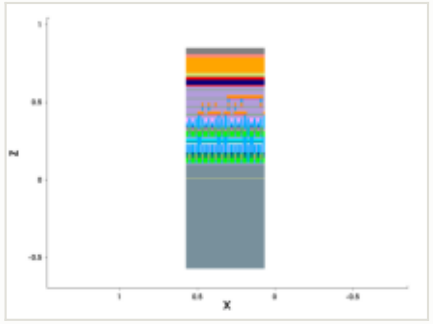

mask: layer 10351:0 (GDSII)



steps by process area

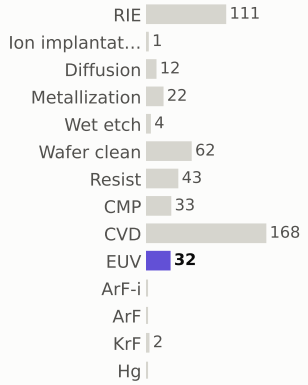

materials deposited (g)

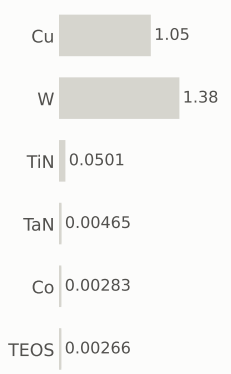

gases emitted (g)

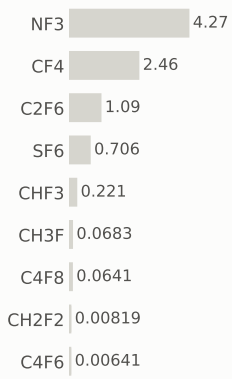

Step #5250: RIE

etch_anisotropic · RIE

1.04	538.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

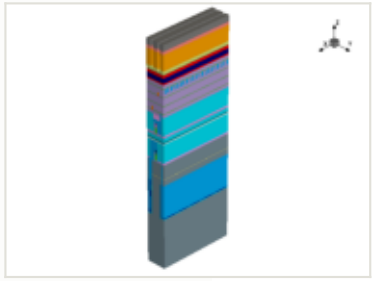

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

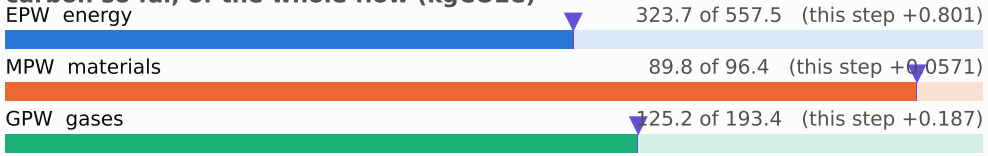

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

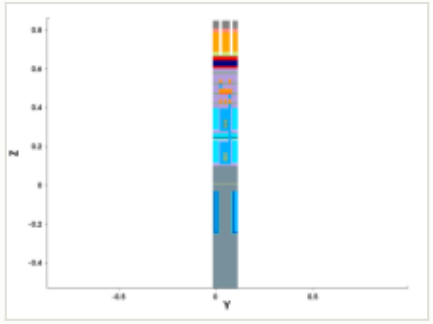

y cut at 0.049 µm

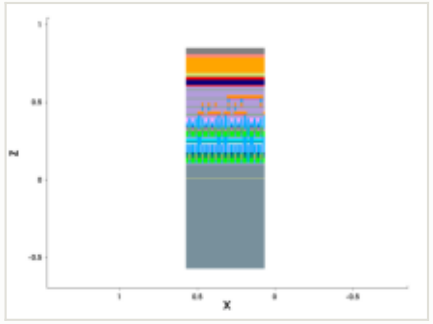

mask for this step

no mask for this step

steps by process area

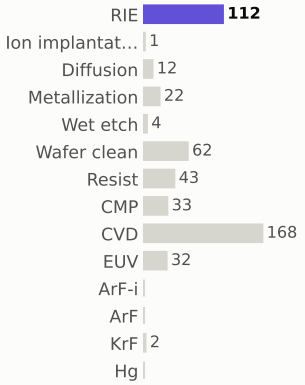

materials deposited (g)

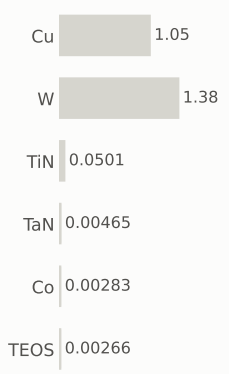

gases emitted (g)

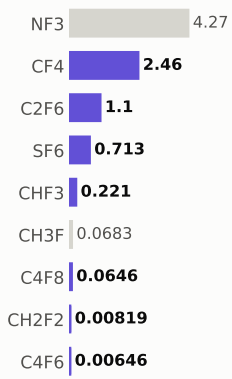

Step #5260: Wafer_clean

etch_strip · Wafer_clean

0.169	538.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

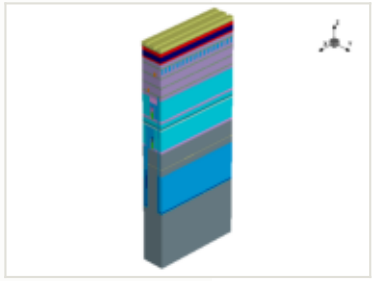

x cut at 0.385 µm

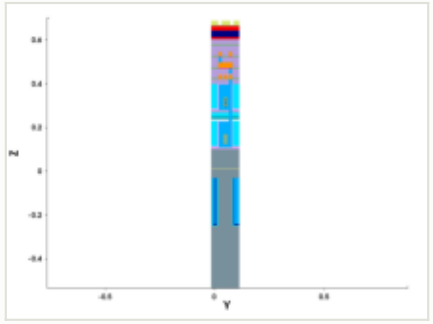

y cut at 0.049 µm

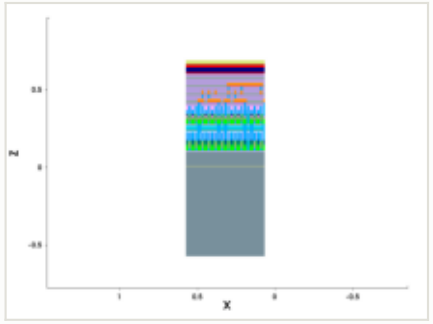

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

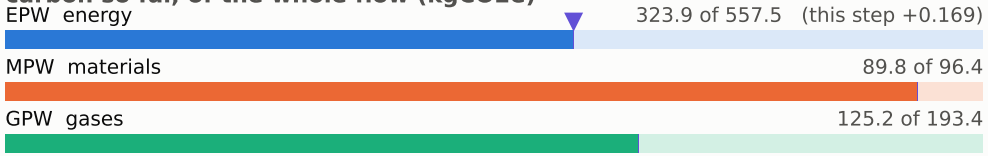

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

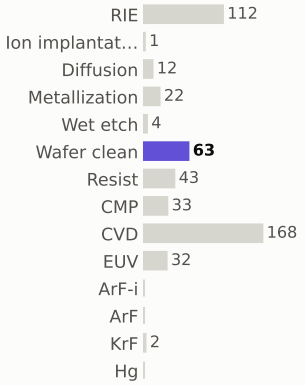

materials deposited (g)

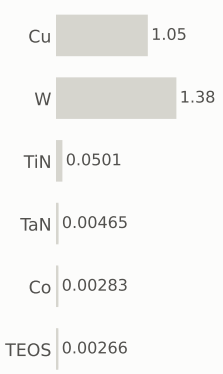

gases emitted (g)

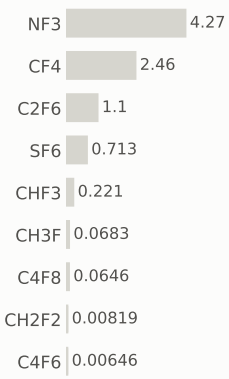

Step #5270: CVD

depo_isotropic · CVD

1.31	540.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

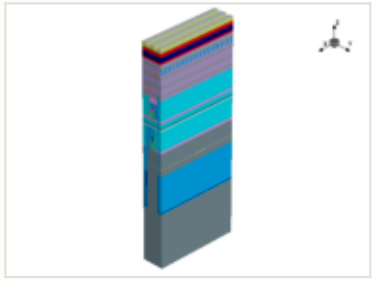

x cut at 0.385 µm

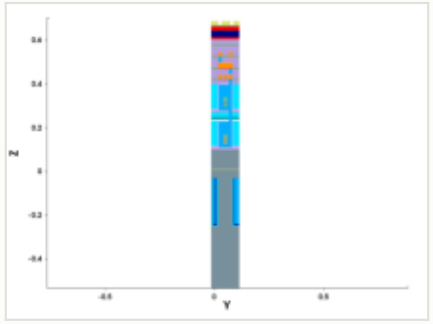

y cut at 0.049 µm

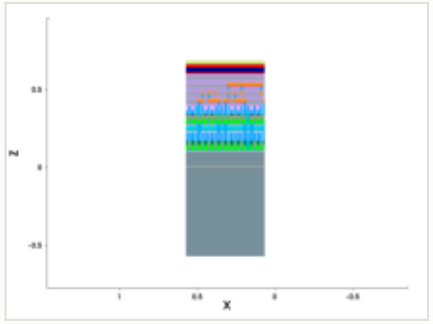

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

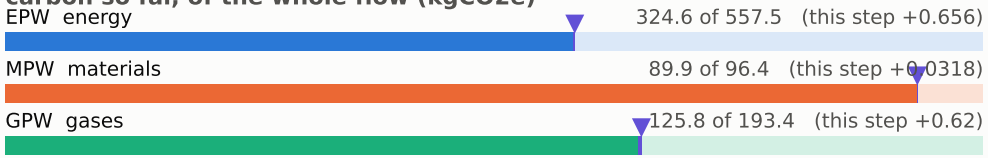

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

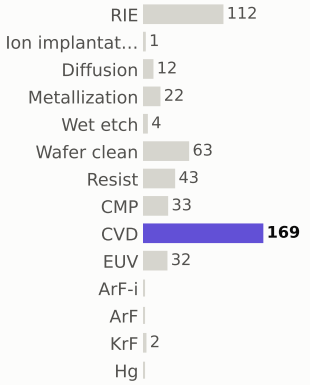

materials deposited (g)

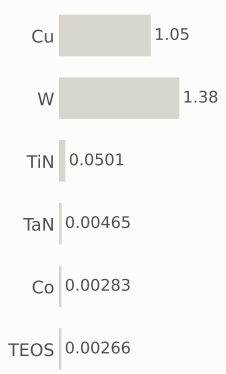

gases emitted (g)



Step #5280: RIE

etch_anisotropic · RIE

1.04	541.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

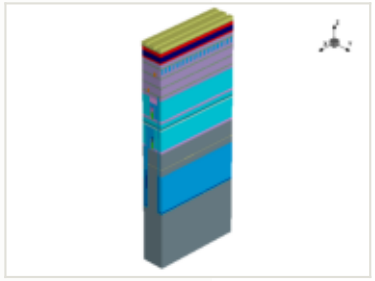

x cut at 0.385 µm

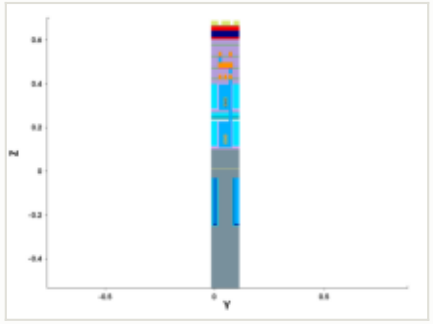

y cut at 0.049 µm

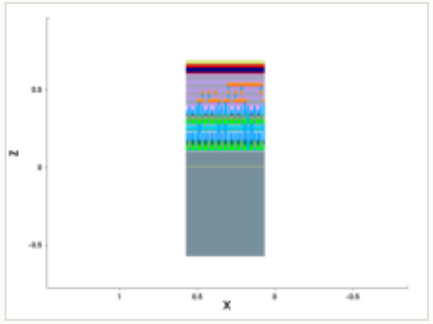

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

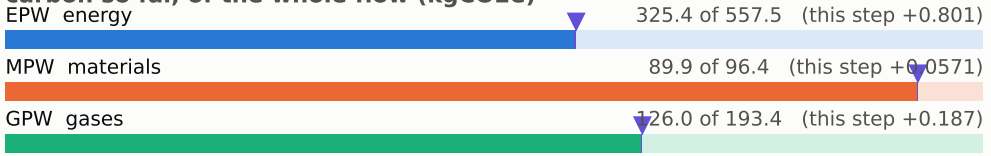

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

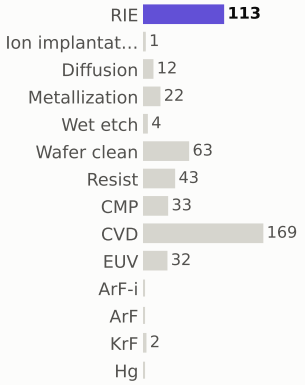

materials deposited (g)



gases emitted (g)

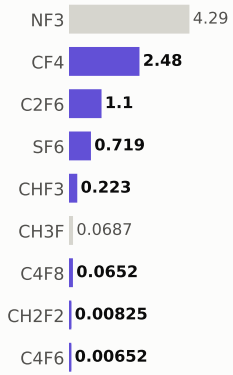

Step #5290: Wafer_clean

clean · Wafer_clean

0.169	541.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

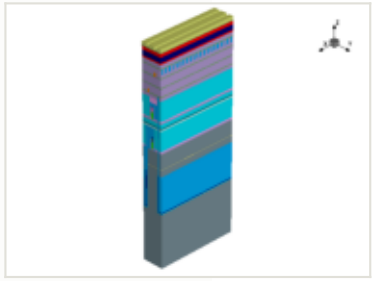

x cut at 0.385 µm

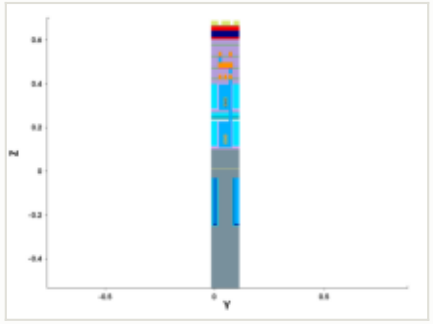

y cut at 0.049 µm

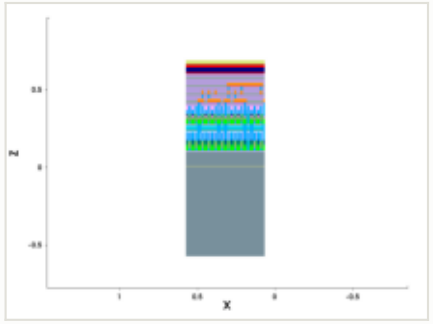

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

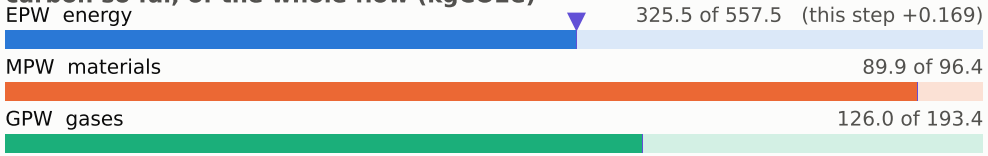

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

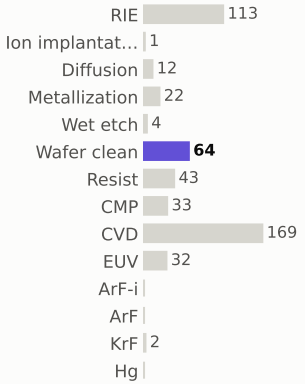

materials deposited (g)



gases emitted (g)

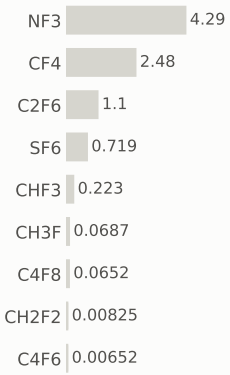

Step #5300: Resist

depo_fill · Resist

0.169	541.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

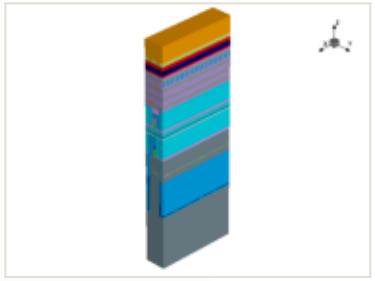

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

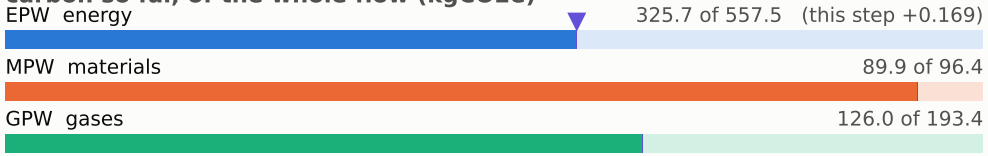

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

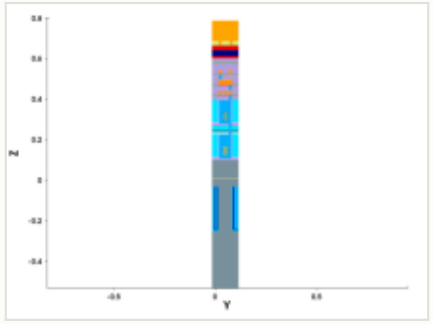

y cut at 0.049 µm

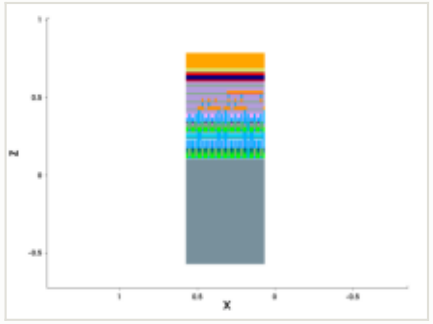

mask for this step

no mask for this step

steps by process area

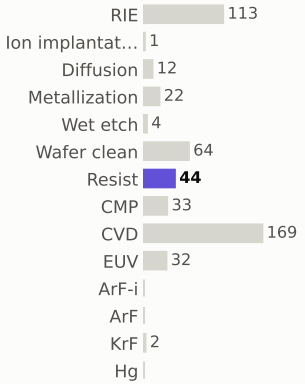

materials deposited (g)

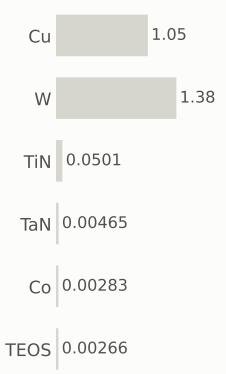

gases emitted (g)

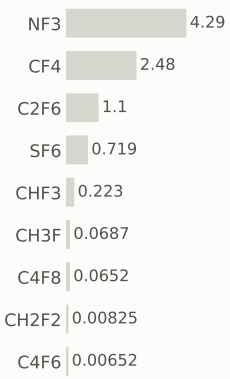

Step #5310: CVD

depo_fill · CVD

1.31	542.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

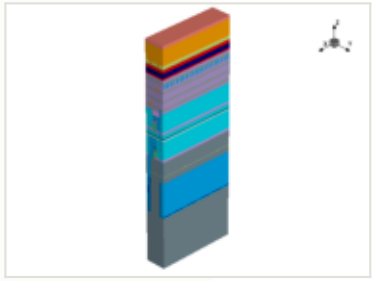

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

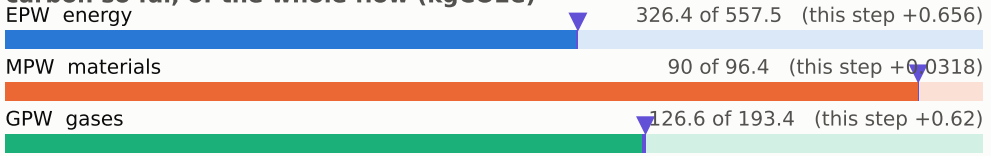

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

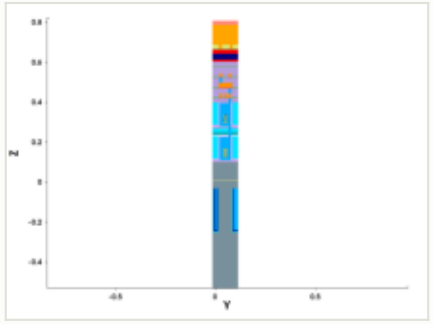

y cut at 0.049 µm

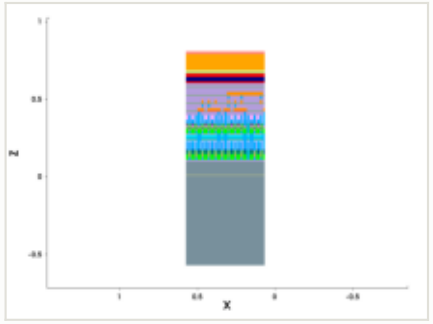

mask for this step

no mask for this step

steps by process area

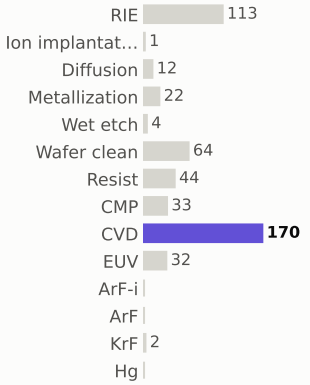

materials deposited (g)

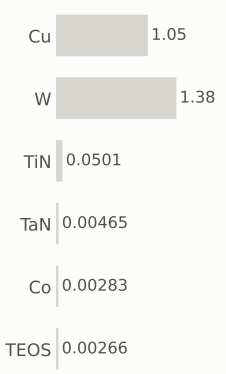

gases emitted (g)

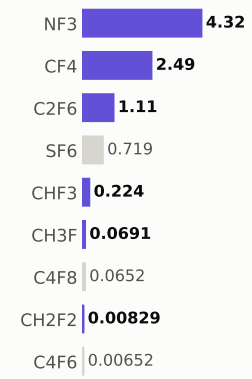

Step #5320: Wafer_clean

clean · Wafer_clean

0.169	543.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

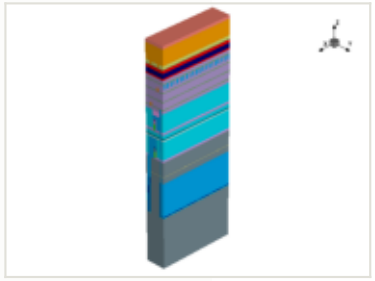

x cut at 0.385 µm

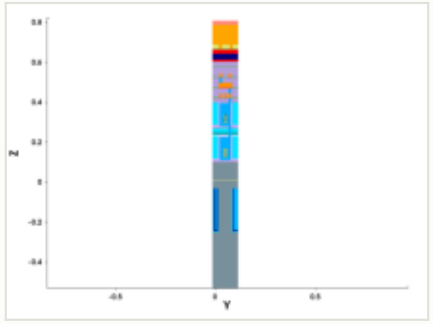

y cut at 0.049 µm

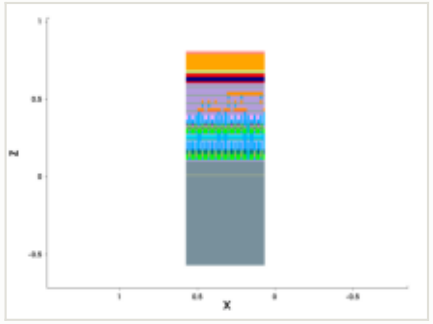

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

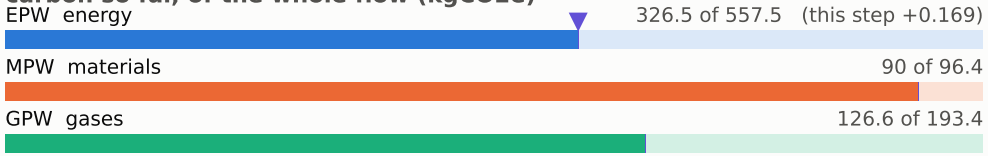

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

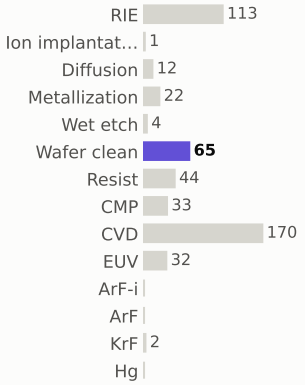

materials deposited (g)

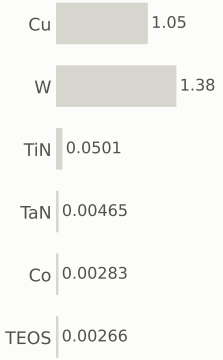

gases emitted (g)

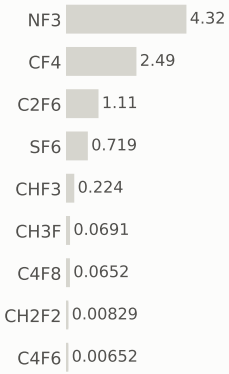

Step #5330: EUV

litho_patterning · EUV

1.96	545.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

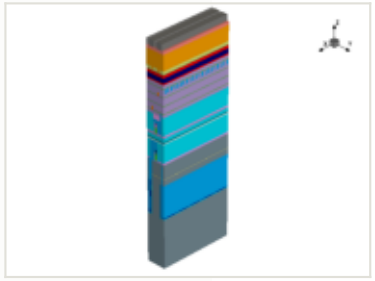

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

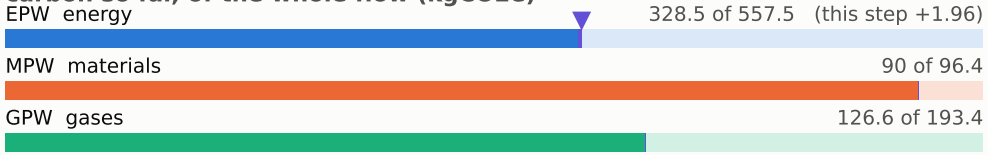

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

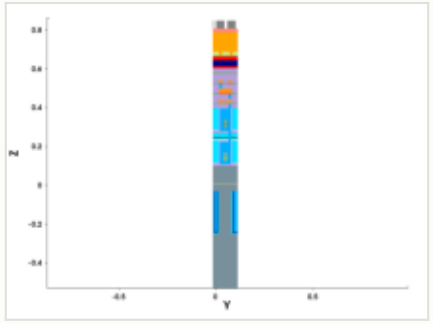

y cut at 0.049 µm

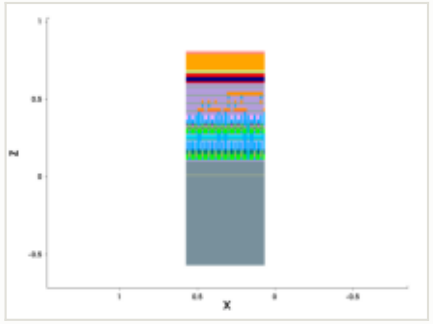

mask: layer 10352:0 (GDSII)

steps by process area

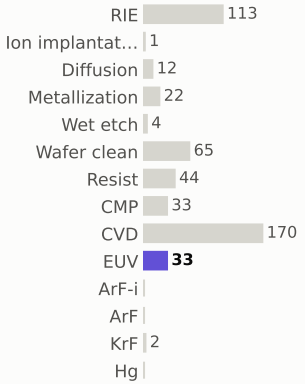

materials deposited (g)

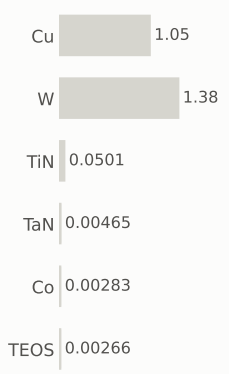

gases emitted (g)

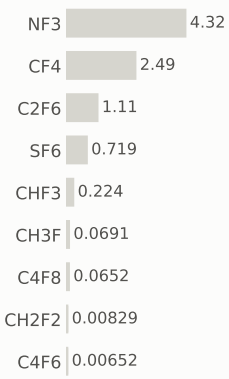

Step #5340: RIE

etch_anisotropic · RIE

1.04	546.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

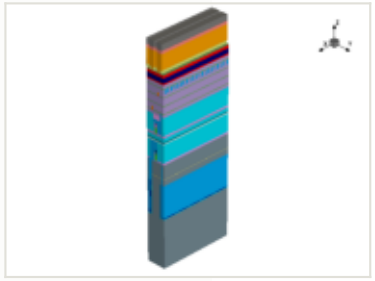

x cut at 0.385 µm

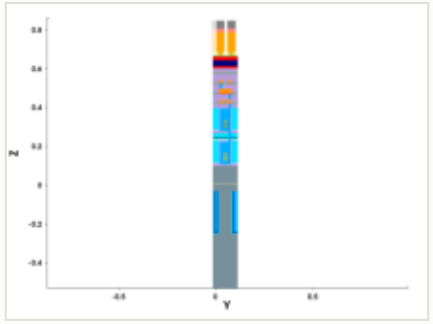

y cut at 0.049 µm

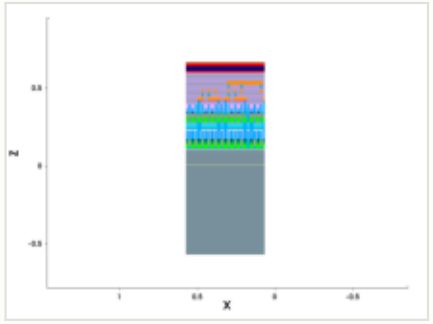

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

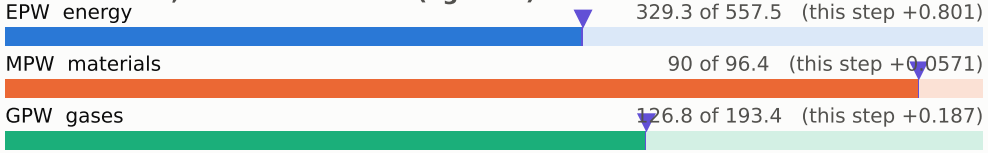

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

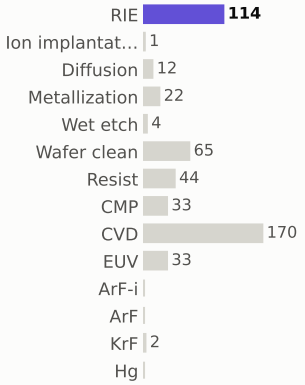

materials deposited (g)

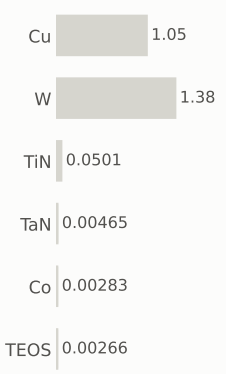

gases emitted (g)

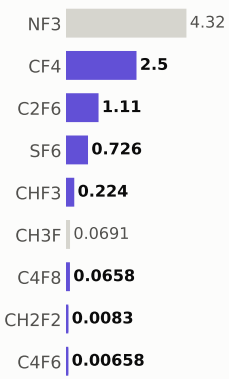

Step #5350: Wafer_clean

etch_strip · Wafer_clean

0.169	546.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

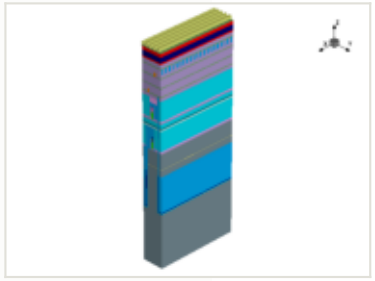

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

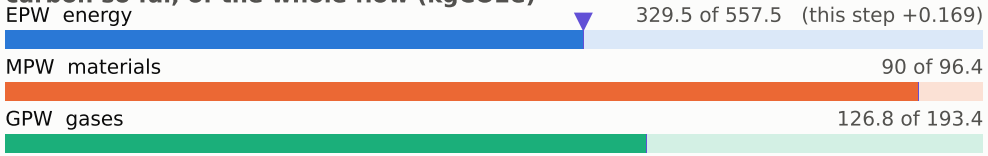

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

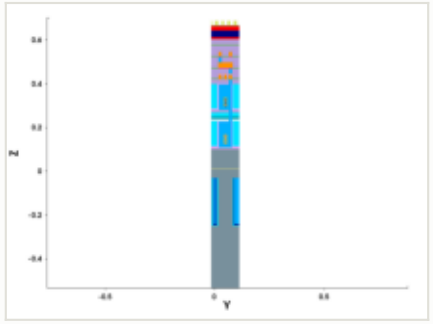

y cut at 0.049 µm

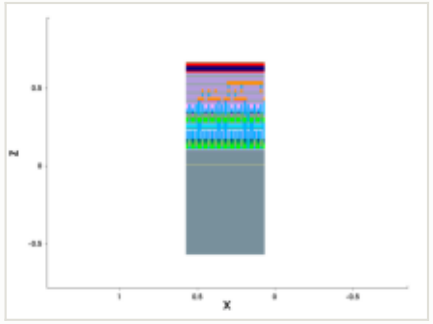

mask for this step

no mask for this step

steps by process area

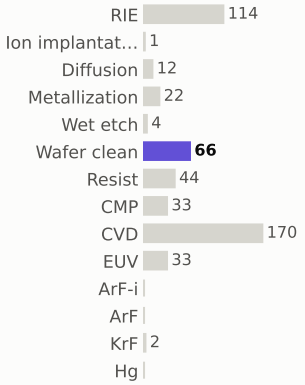

materials deposited (g)

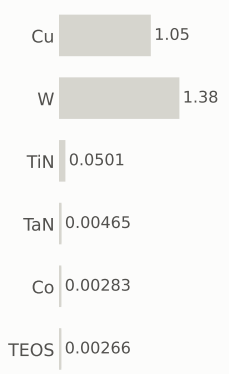

gases emitted (g)

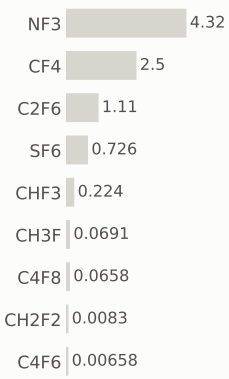

Step #5360: RIE

etch_anisotropic · RIE

1.04	547.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

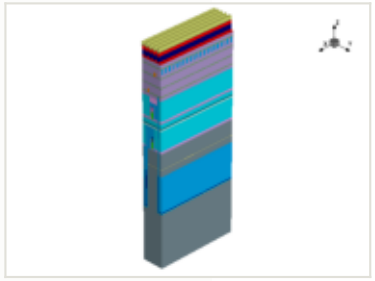

x cut at 0.385 µm

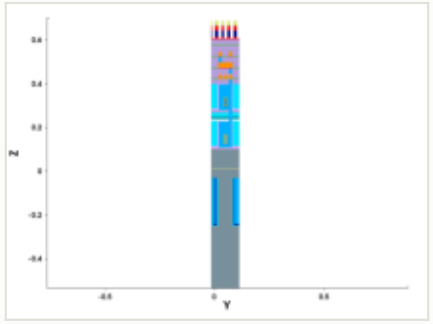

y cut at 0.049 µm

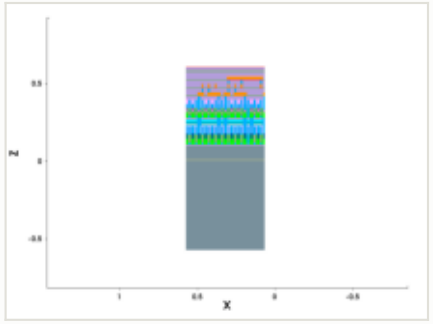

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

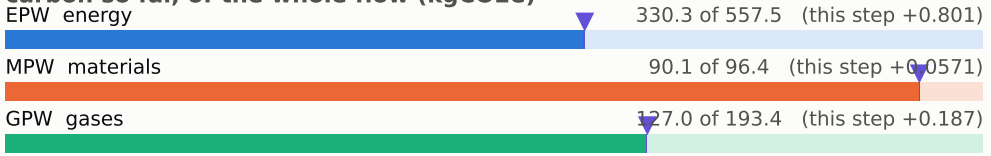

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

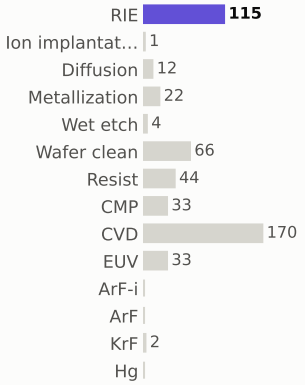

materials deposited (g)

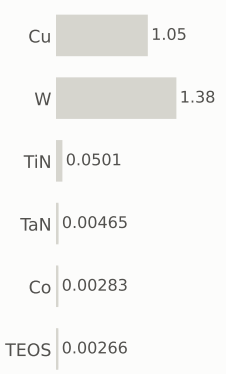

gases emitted (g)

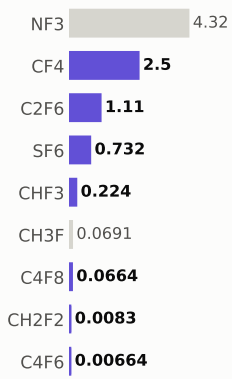

Step #5370: Wafer_clean

clean · Wafer_clean

0.169	547.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

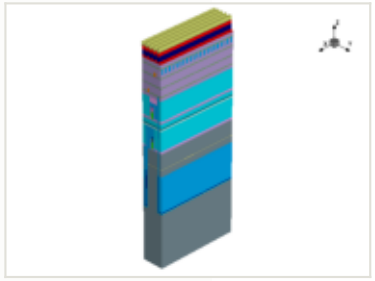

x cut at 0.385 µm

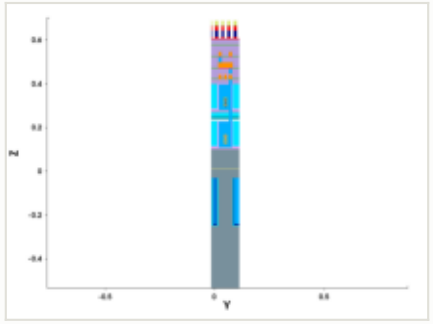

y cut at 0.049 µm

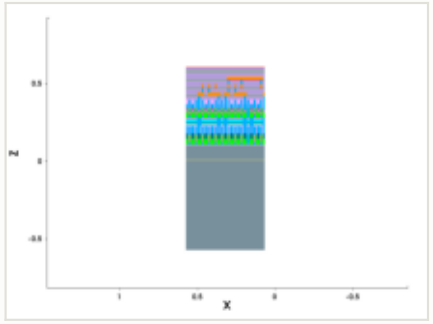

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

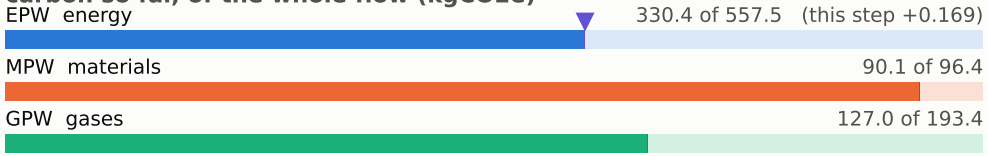

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

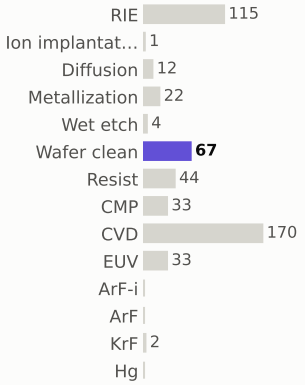

materials deposited (g)



gases emitted (g)

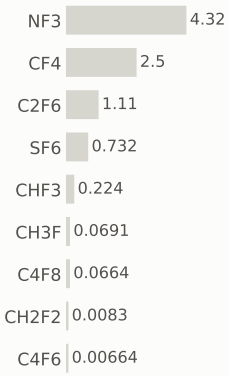

Step #5380: RIE

etch_anisotropic · RIE

1.04	548.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

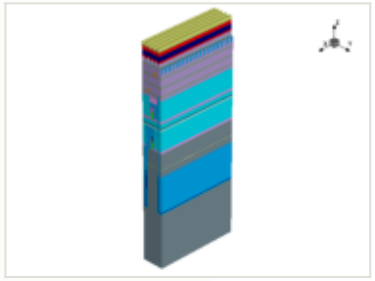

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

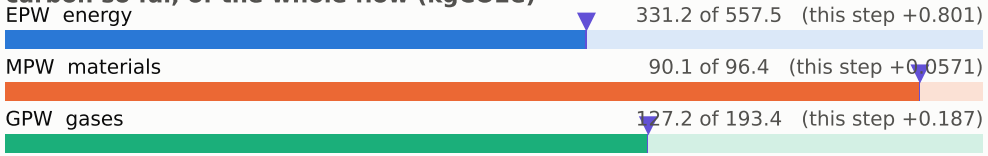

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

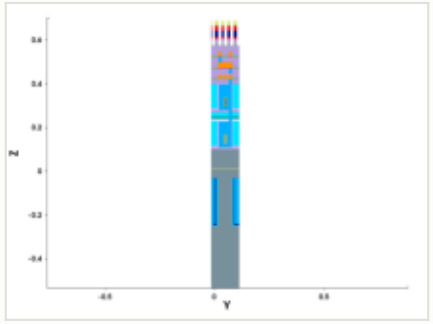

y cut at 0.049 µm

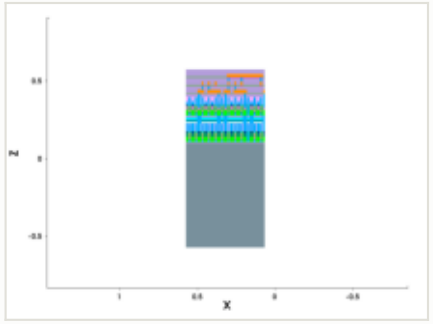

mask for this step

no mask for this step

steps by process area

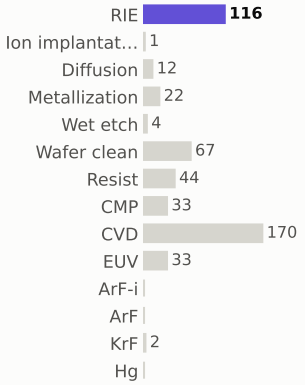

materials deposited (g)

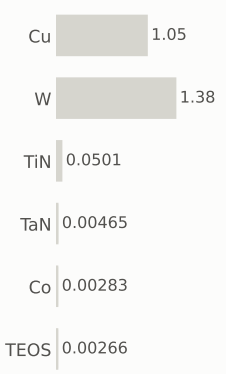

gases emitted (g)

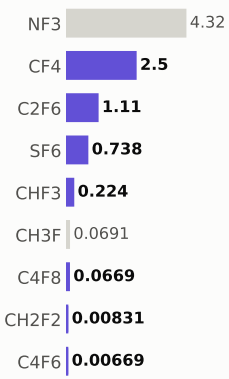

Step #5390: Wafer_clean

clean · Wafer_clean

0.169	548.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

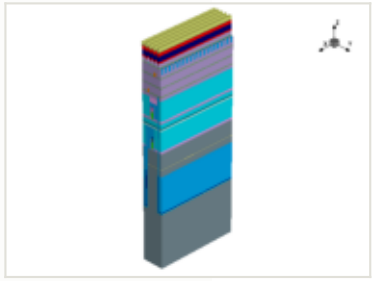

x cut at 0.385 µm

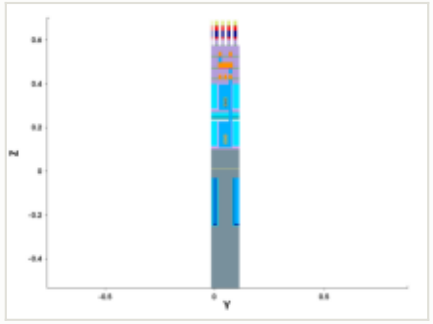

y cut at 0.049 µm

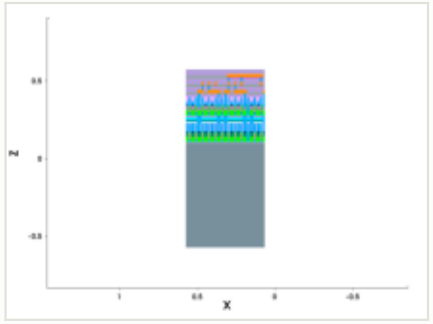

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

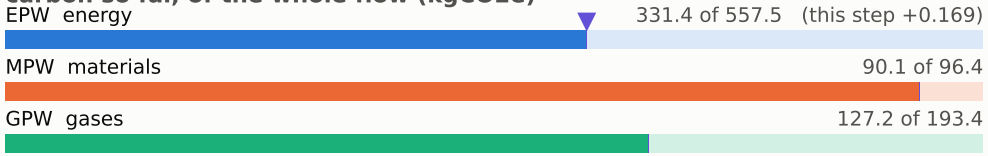

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

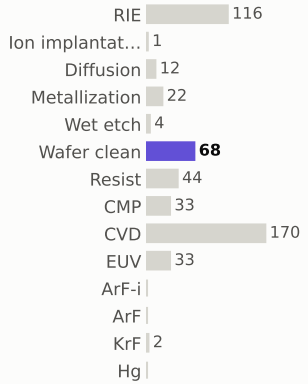

materials deposited (g)



gases emitted (g)

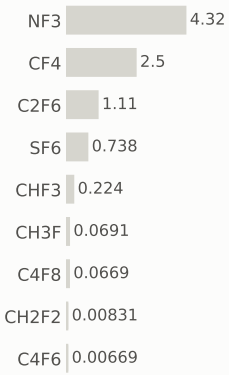

Step #5400: Metallization

depo_ellipsoidal · Metallization

1.2	549.9	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

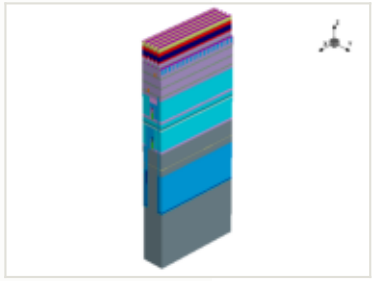

x cut at 0.385 µm

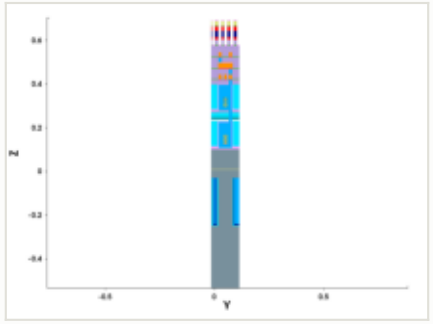

y cut at 0.049 µm

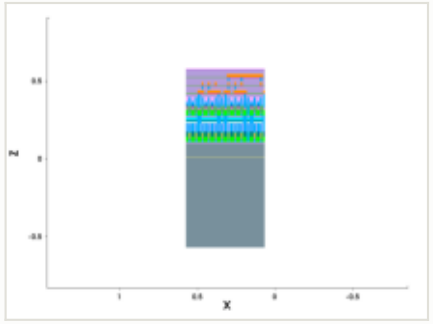

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

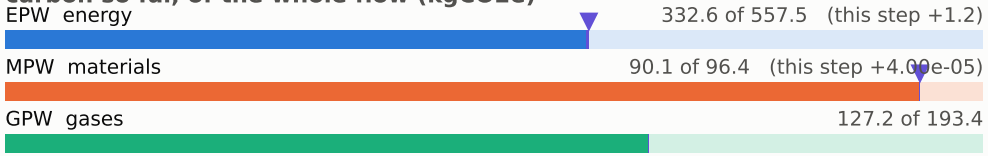

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

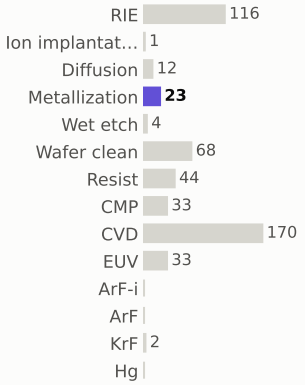

materials deposited (g)

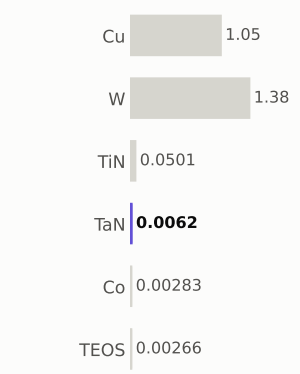

gases emitted (g)

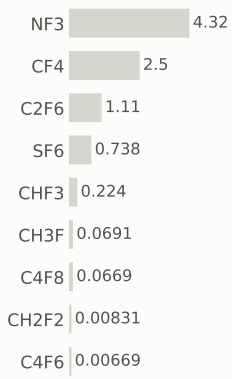

Step #5410: Metallization

depo_fill · Metallization

1.21	551.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

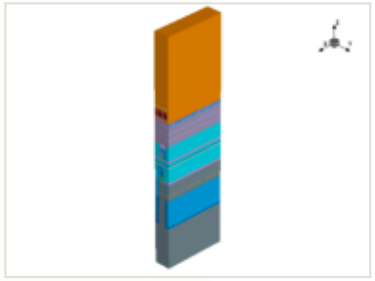

x cut at 0.385 µm

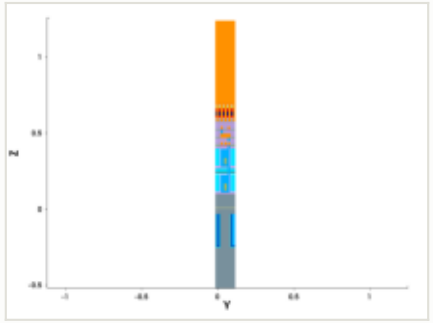

y cut at 0.049 µm

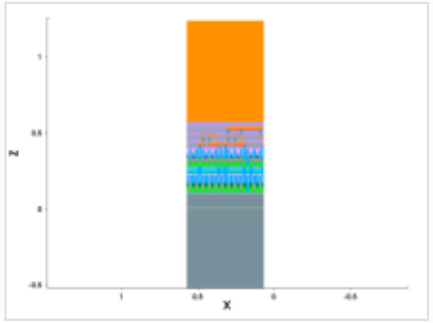

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

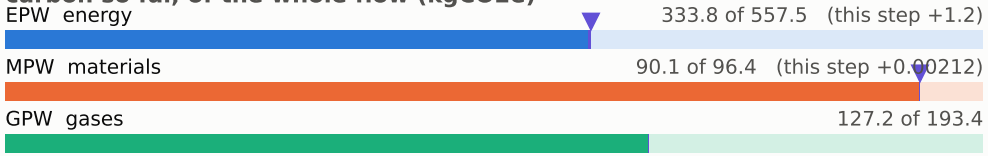

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

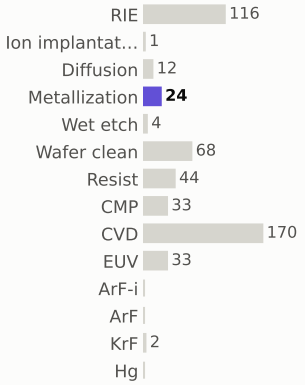

materials deposited (g)

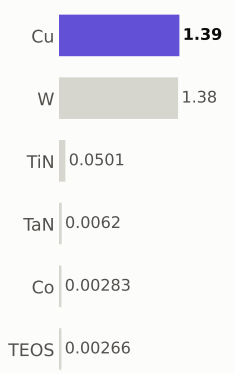

gases emitted (g)

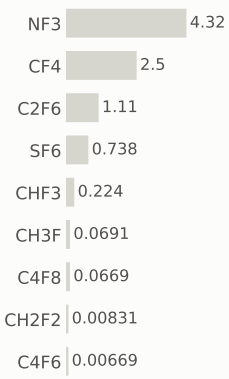

Step #5420: Diffusion

treatment · Diffusion

0.801	551.9	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

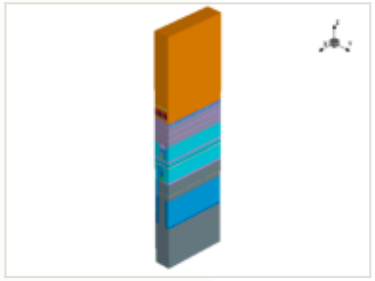

x cut at 0.385 µm

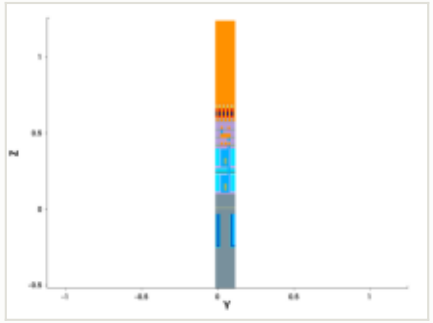

y cut at 0.049 µm

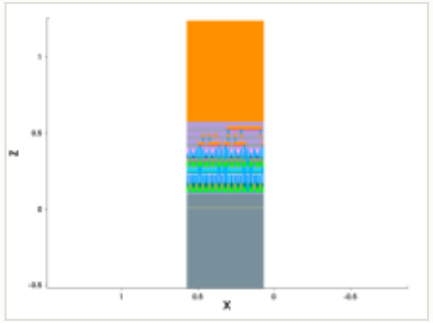

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

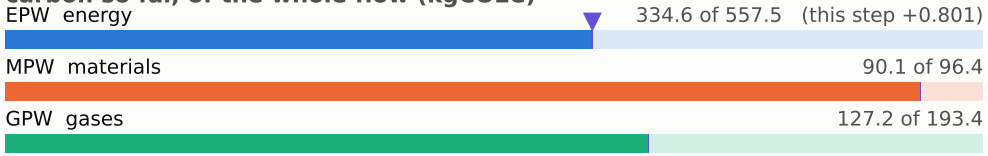

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

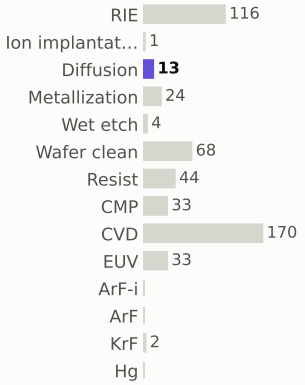

materials deposited (g)

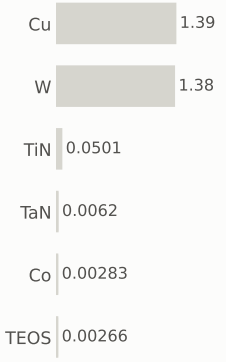

gases emitted (g)

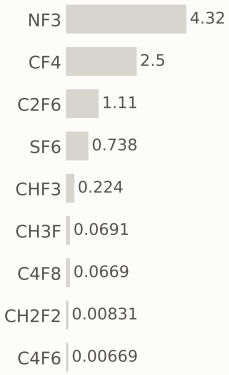

Step #5430: CMP

etch_cmp · CMP

0.169	552.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

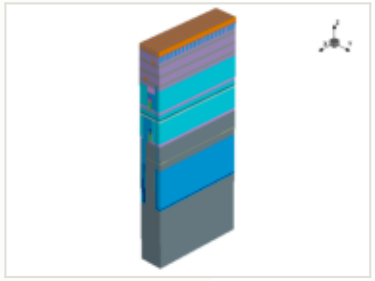

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

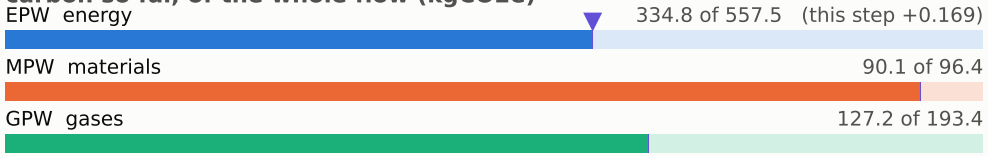

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

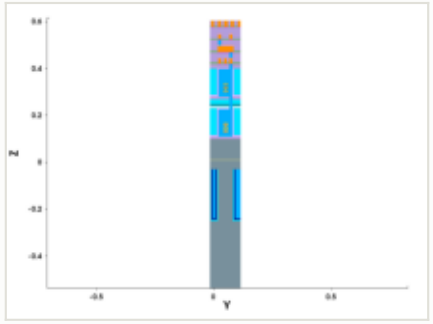

y cut at 0.049 µm

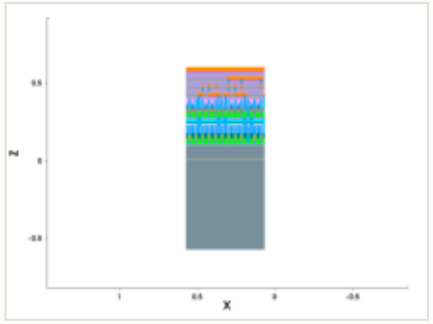

mask for this step

no mask for this step

steps by process area

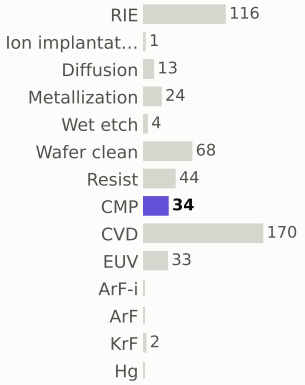

materials deposited (g)

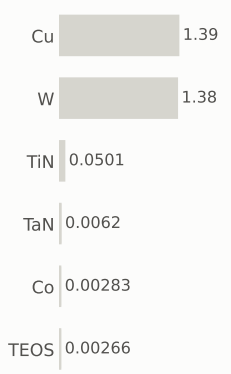

gases emitted (g)

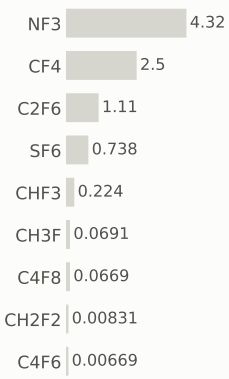

Step #5440: Metallization

depo_isotropic · Metallization

1.2	553.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

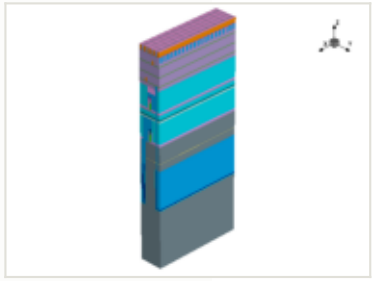

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

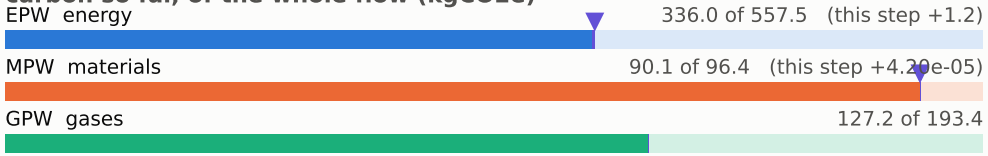

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

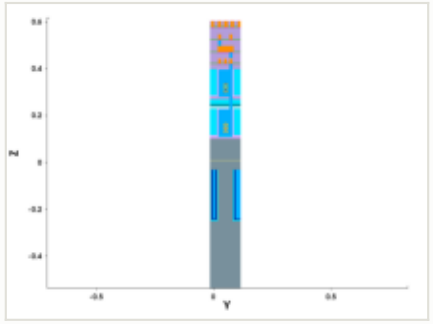

y cut at 0.049 µm

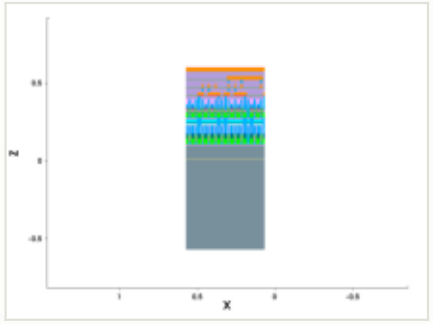

mask for this step

no mask for this step

steps by process area

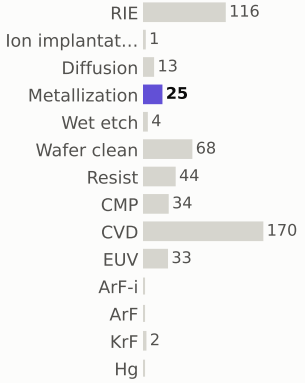

materials deposited (g)

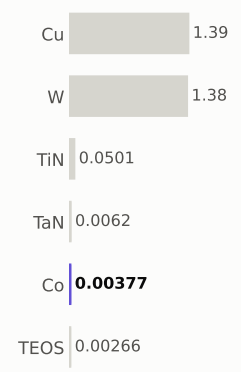

gases emitted (g)

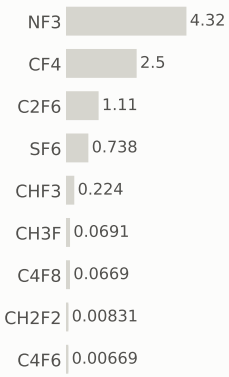

Step #5460: CVD

depo_fill · CVD

1.31	554.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

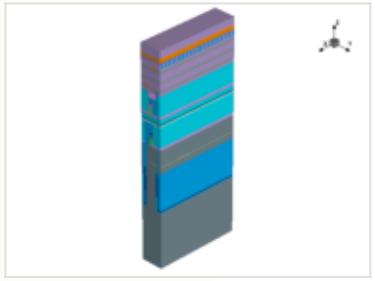

this step

process area	CVD
material	—
thickness	0.042 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

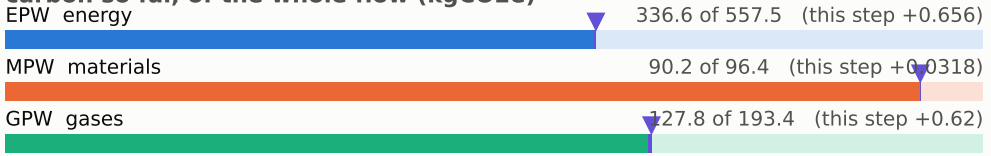

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

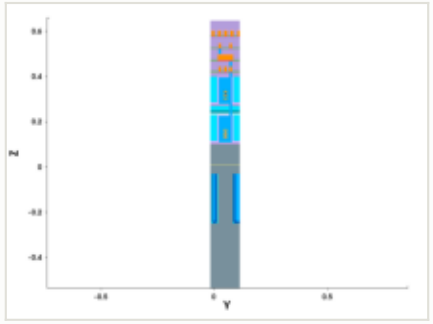

y cut at 0.049 µm

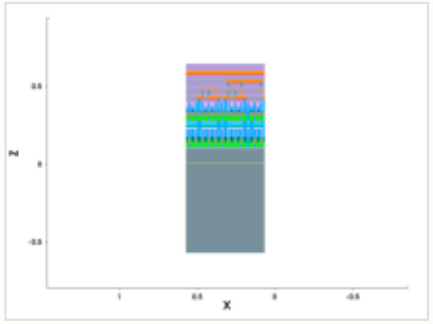

mask for this step

no mask for this step

steps by process area

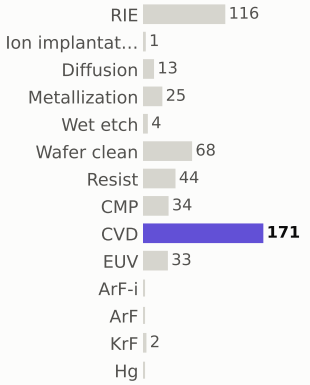

materials deposited (g)

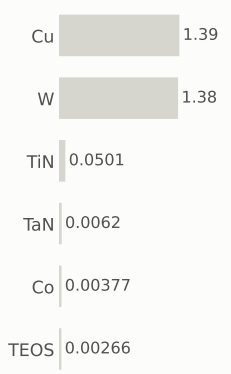

gases emitted (g)

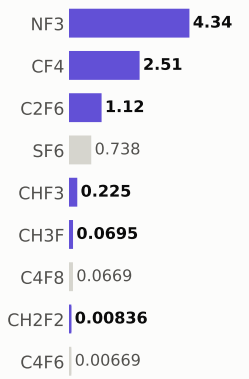

Step #5470: Diffusion

treatment · Diffusion

0.801	555.4	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

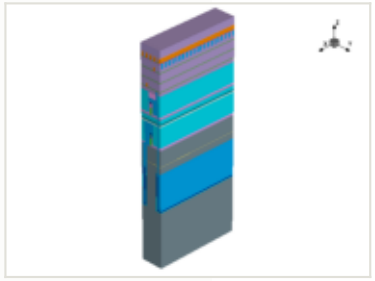

x cut at 0.385 µm

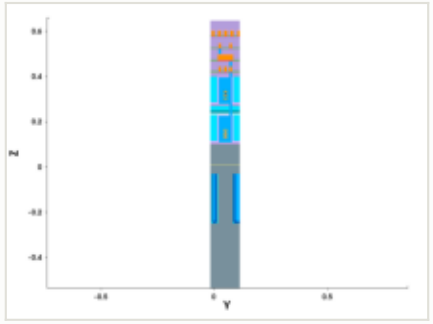

y cut at 0.049 µm

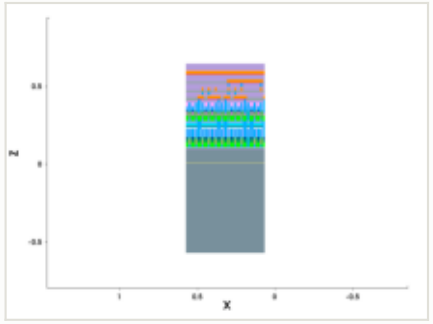

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

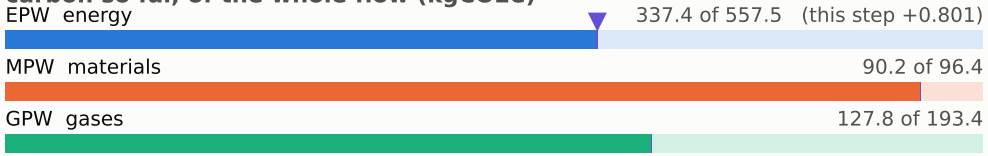

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

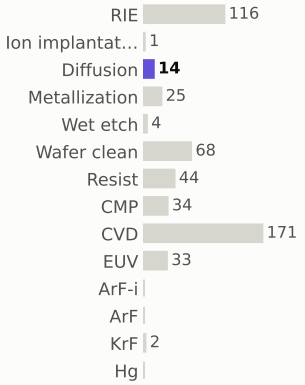

materials deposited (g)

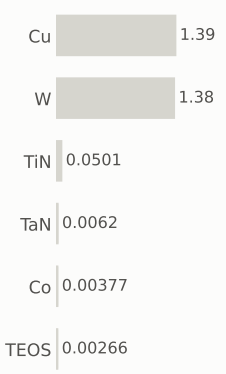

gases emitted (g)

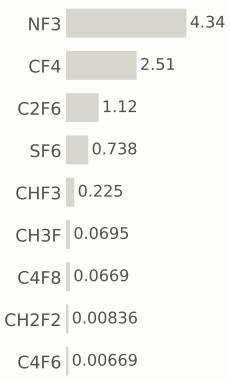

Step #5480: Wafer_clean

clean · Wafer_clean

0.169	555.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

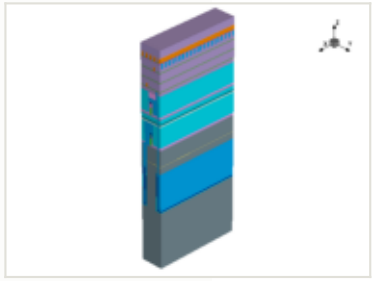

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

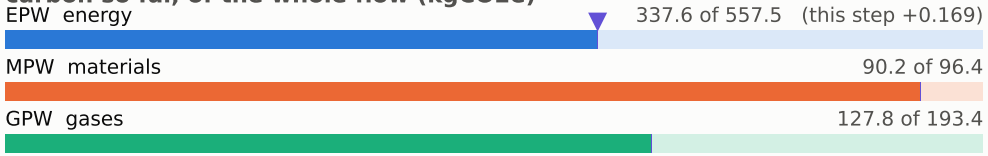

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

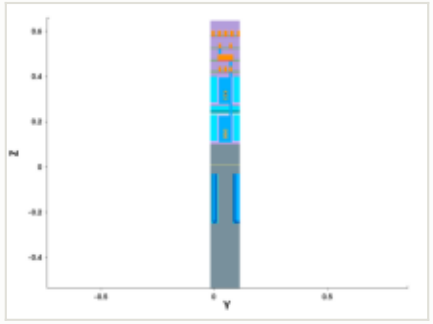

y cut at 0.049 µm

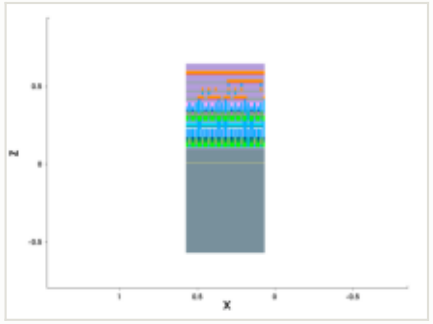

mask for this step

no mask for this step

steps by process area

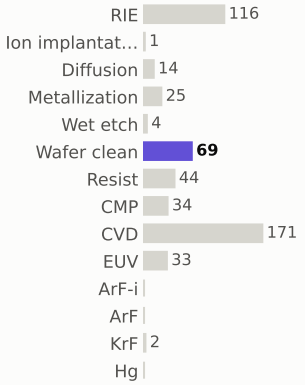

materials deposited (g)

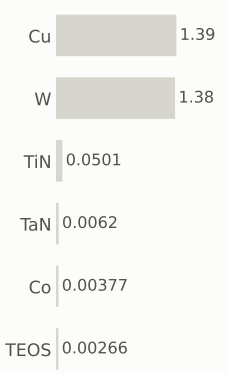

gases emitted (g)

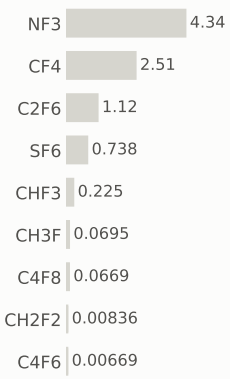

Step #5490: CVD

depo_fill · CVD

1.31	556.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

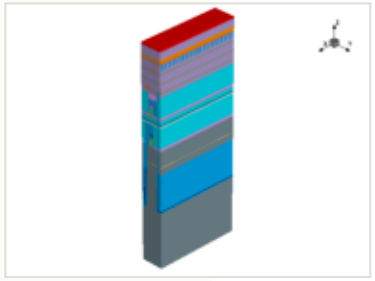

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

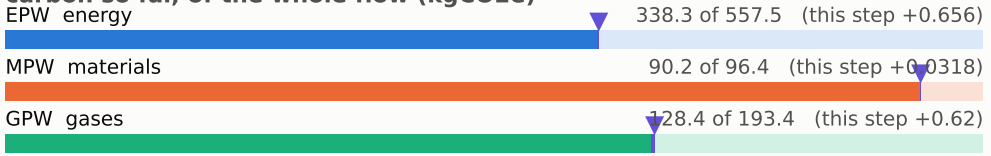

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

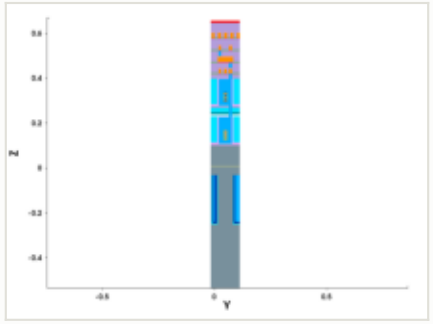

y cut at 0.049 µm

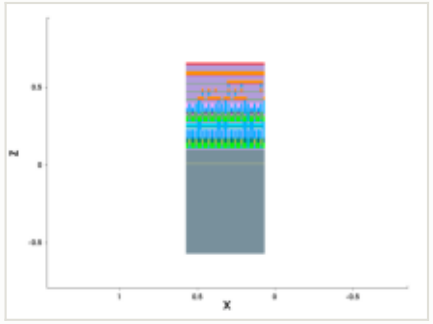

mask for this step

no mask for this step

steps by process area

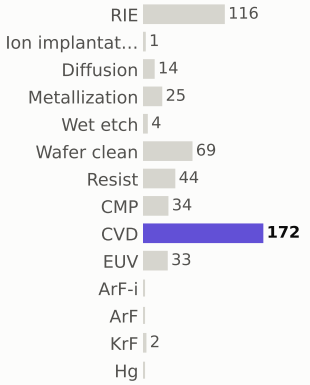

materials deposited (g)

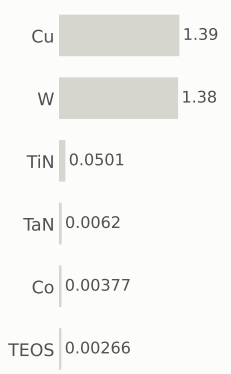

gases emitted (g)

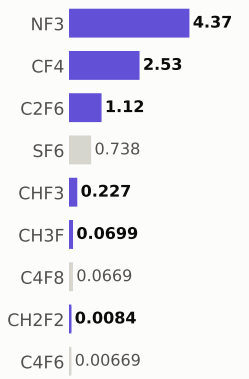

Step #5500: Resist

depo_fill · Resist

0.169	557.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

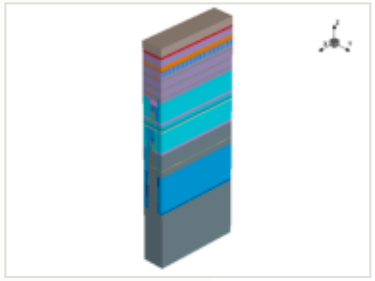

this step

process area	Resist
material	—
thickness	0.05 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

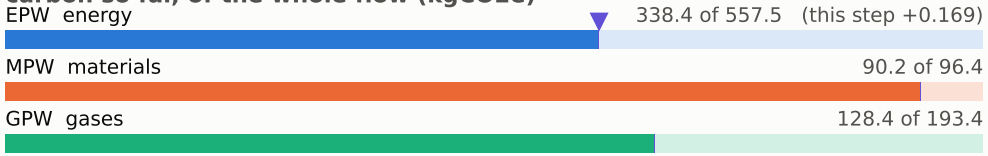

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

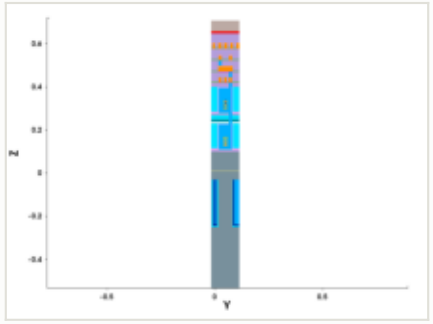

y cut at 0.049 µm

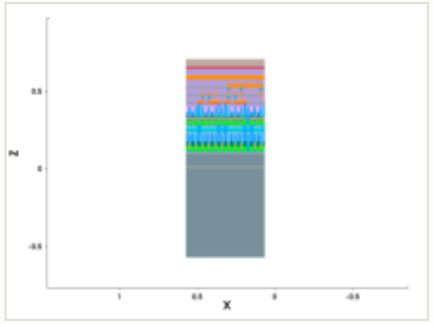

mask for this step

no mask for this step

steps by process area

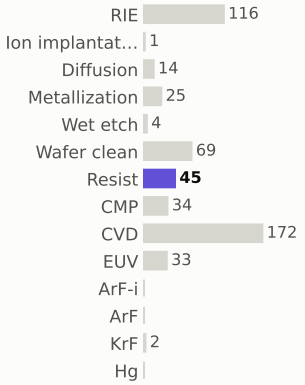

materials deposited (g)

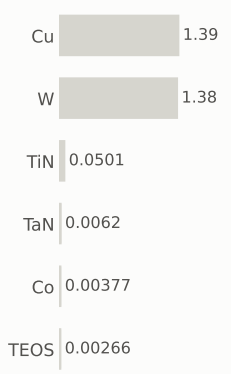

gases emitted (g)

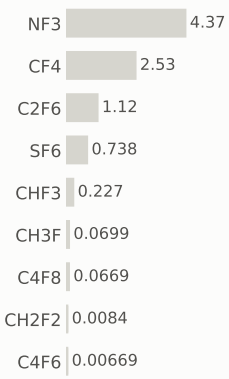

Step #5510: CVD

depo_fill · CVD

1.31	558.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

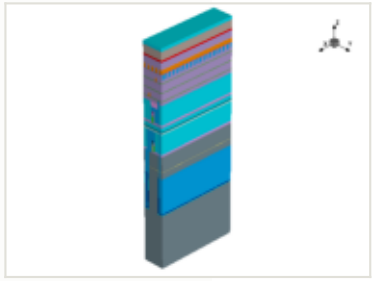

x cut at 0.385 µm

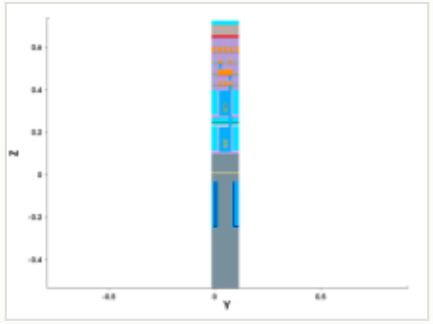

y cut at 0.049 µm

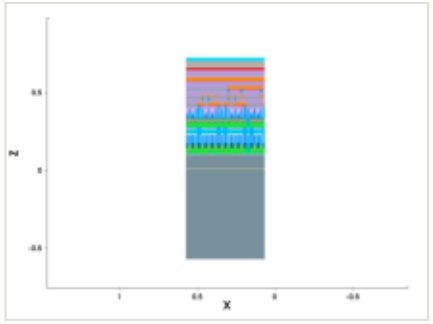

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

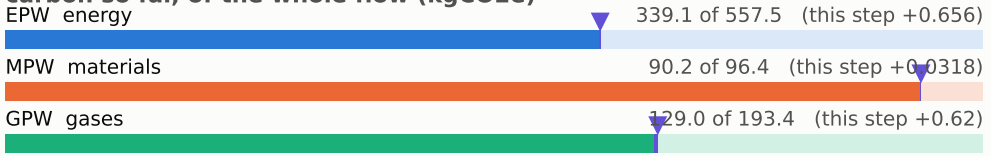

embodied carbon up to each step (kgCO2e per wafer)

steps by process area

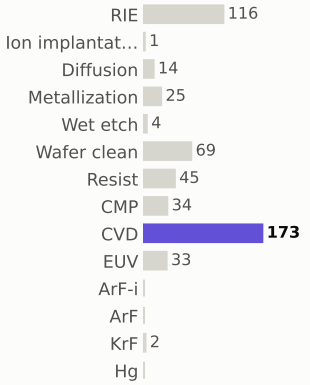

materials deposited (g)

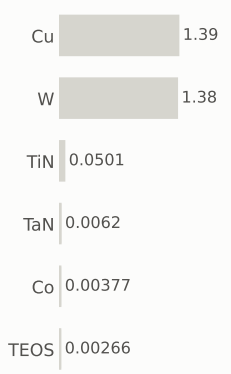

gases emitted (g)

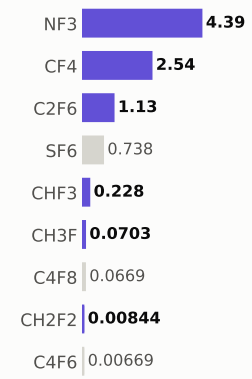

Step #5520: CVD

depo_fill · CVD

1.31	559.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

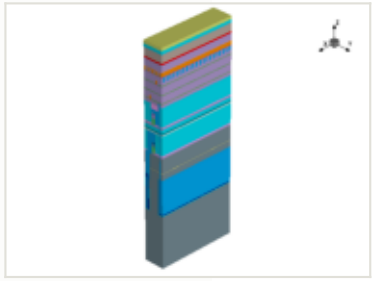

x cut at 0.385 µm

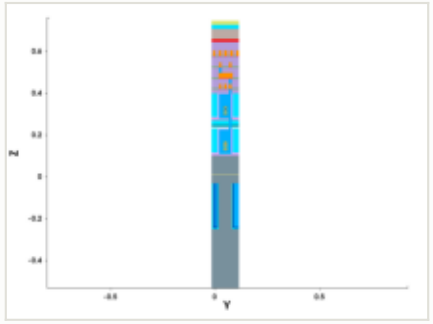

y cut at 0.049 µm

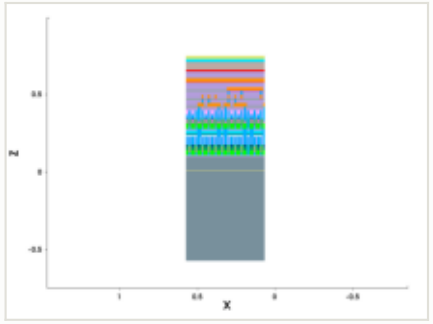

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

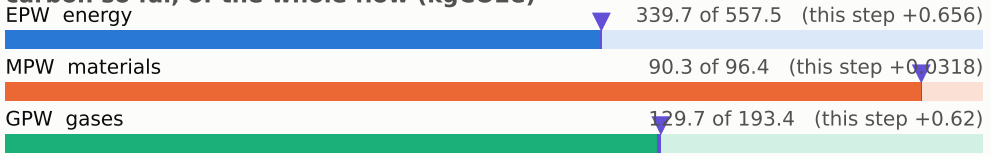

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

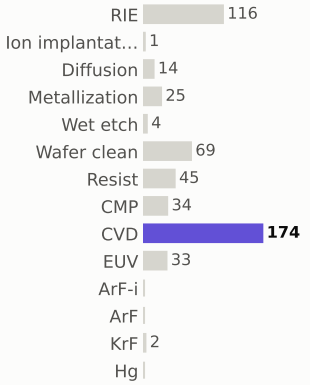

materials deposited (g)

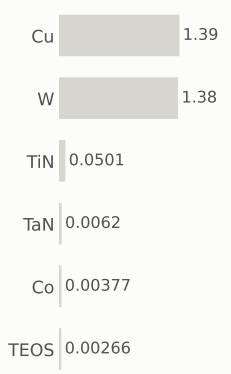

gases emitted (g)

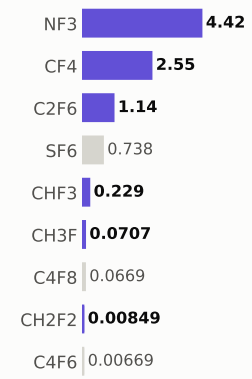

Step #5530: Resist

depo_fill · Resist

0.169	559.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

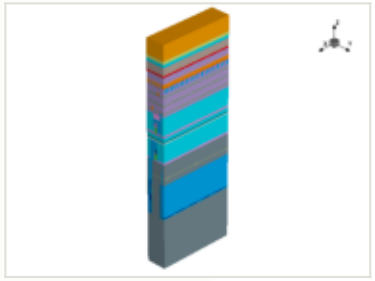

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

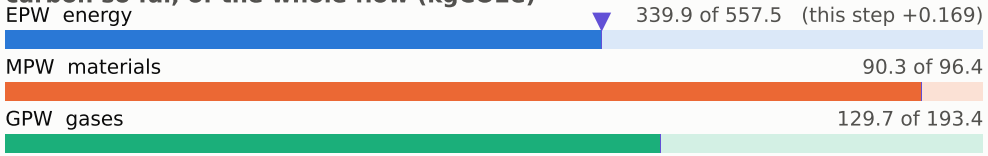

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

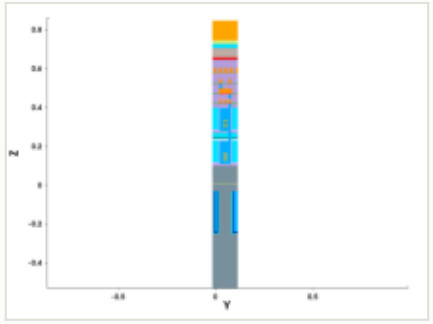

y cut at 0.049 µm

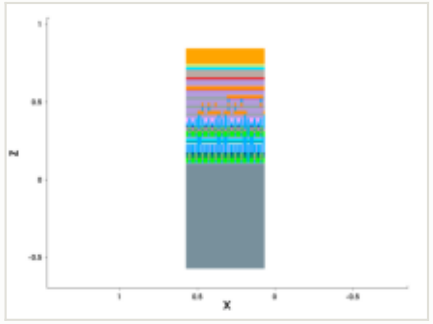

mask for this step

no mask for this step

steps by process area

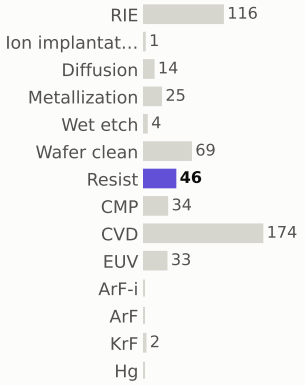

materials deposited (g)

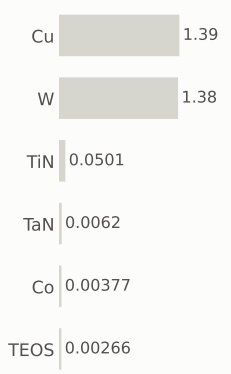

gases emitted (g)

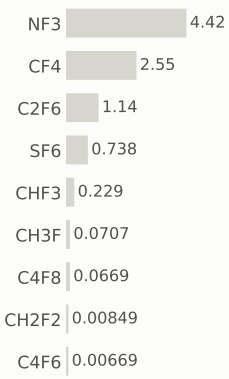

Step #5540: CVD

depo_fill · CVD

1.31	561.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

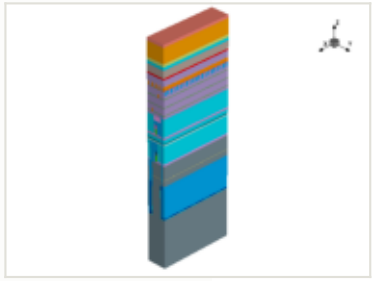

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

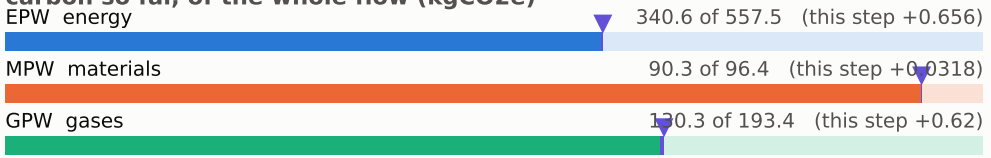

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

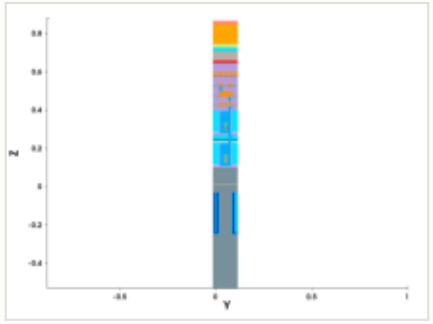

y cut at 0.049 µm

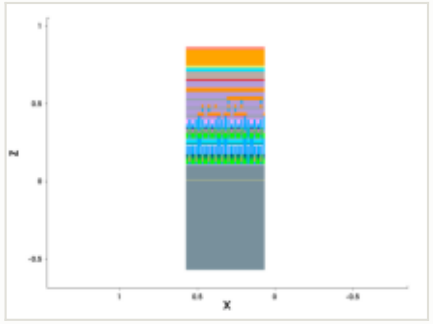

mask for this step

no mask for this step

steps by process area

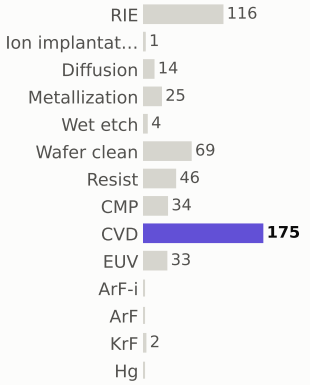

materials deposited (g)

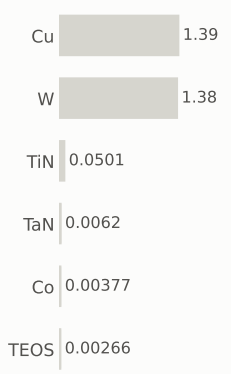

gases emitted (g)

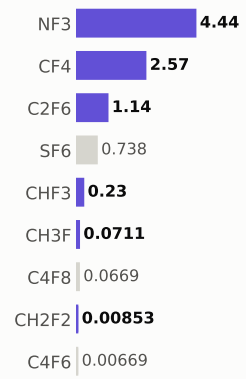

Step #5550: Wafer_clean

clean · Wafer_clean

0.169	561.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

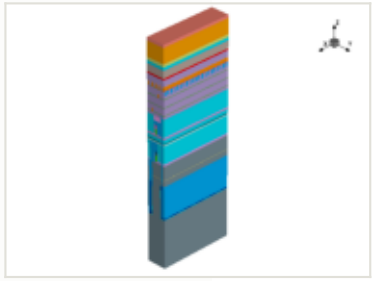

x cut at 0.385 µm

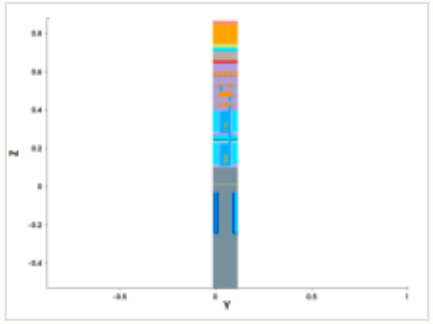

y cut at 0.049 µm

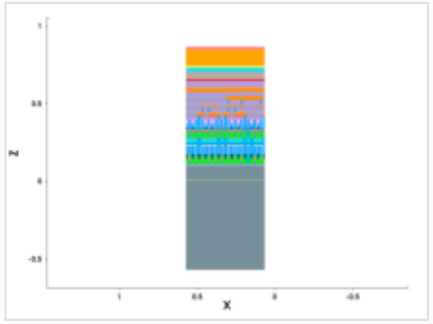

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

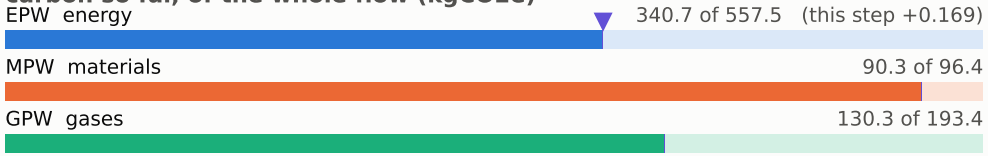

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

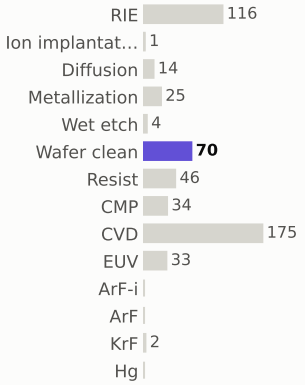

materials deposited (g)

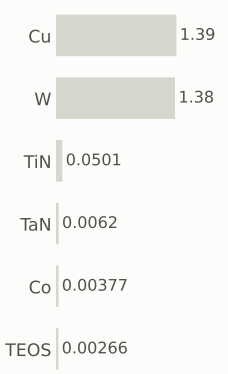

gases emitted (g)

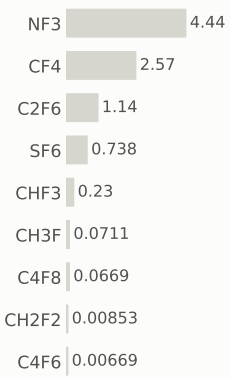

Step #5560: EUV

litho_patterning · EUV

1.96	563.3	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

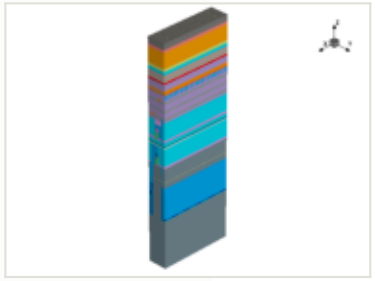

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

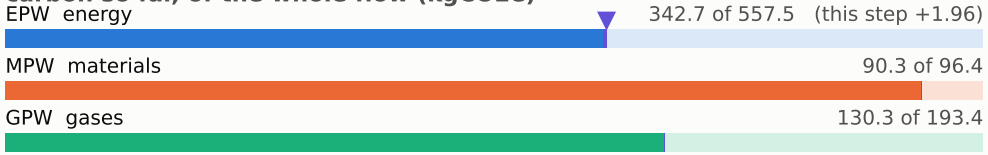

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

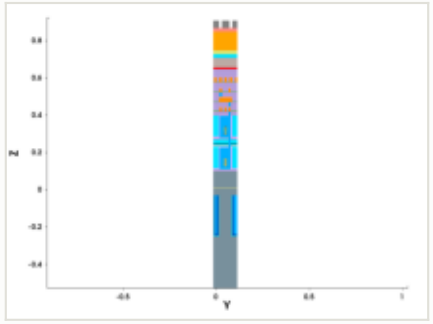

y cut at 0.049 µm

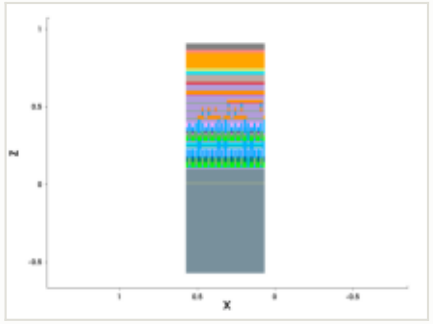

mask: layer 10371:0 (GDSII)

steps by process area

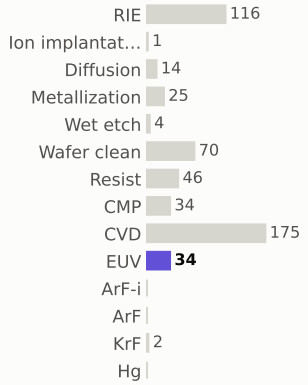

materials deposited (g)

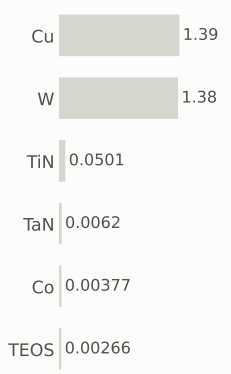

gases emitted (g)

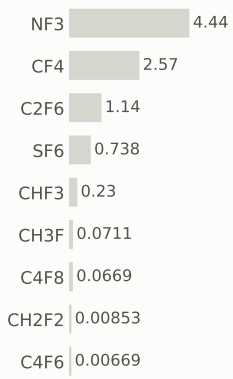

Step #5570: RIE

etch_anisotropic · RIE

1.04	564.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

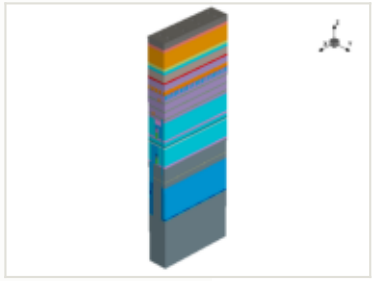

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

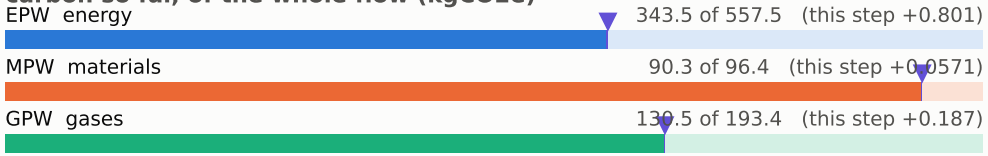

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

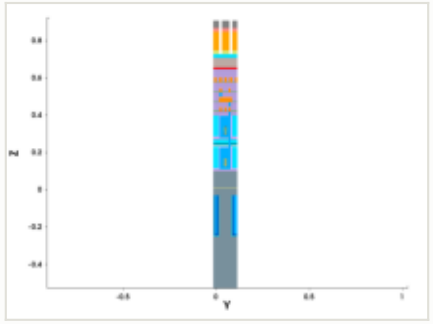

y cut at 0.049 µm

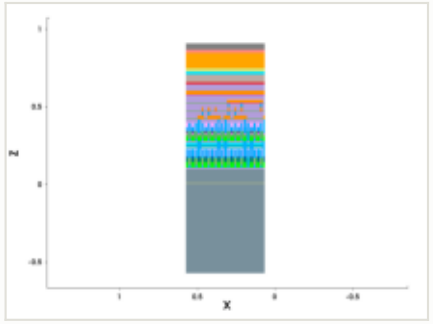

mask for this step

no mask for this step

steps by process area

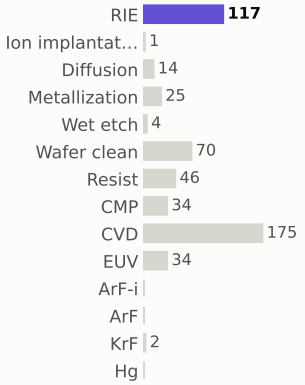

materials deposited (g)

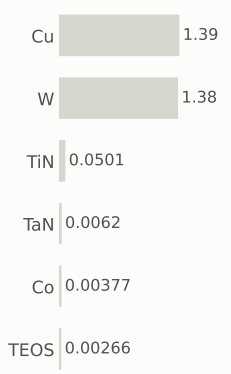

gases emitted (g)

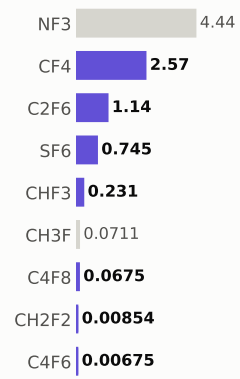

Step #5580: Wafer_clean

etch_strip · Wafer_clean

0.169	564.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

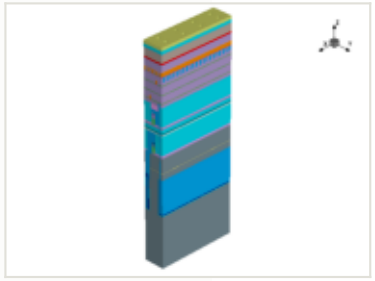

x cut at 0.385 µm

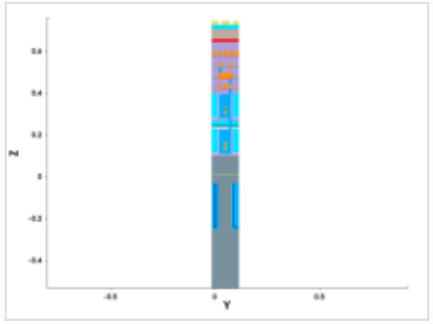

y cut at 0.049 µm

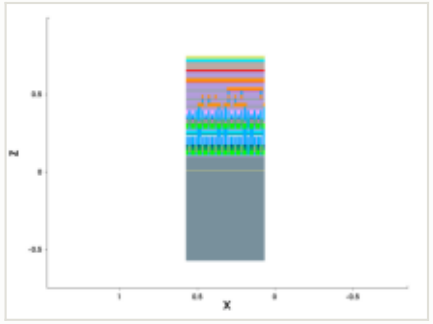

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

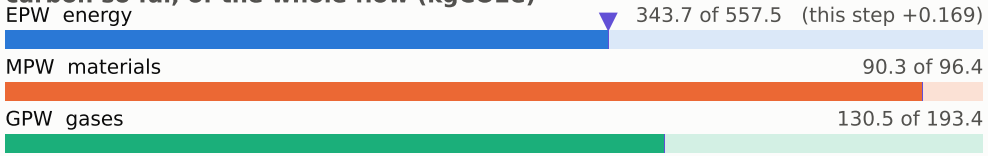

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

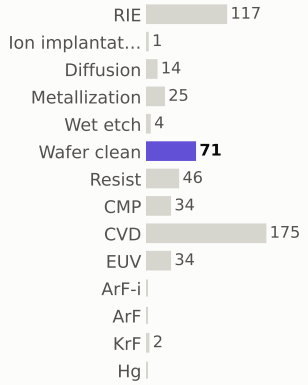

materials deposited (g)

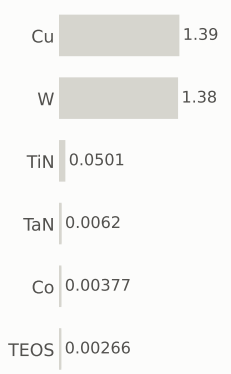

gases emitted (g)

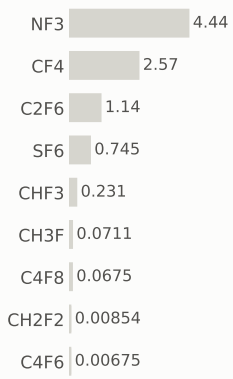

Step #5590: Resist

depo_fill · Resist

0.169	564.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

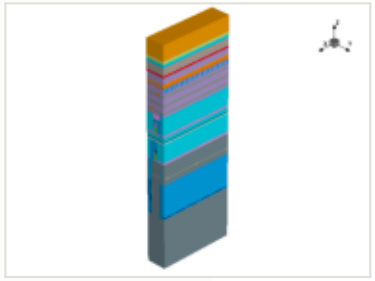

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

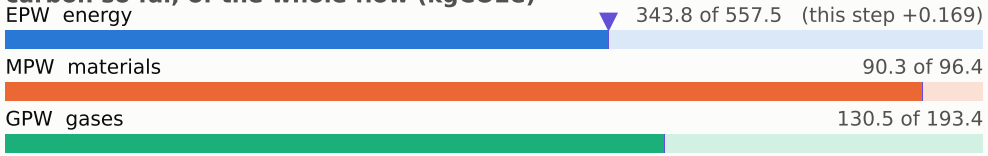

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

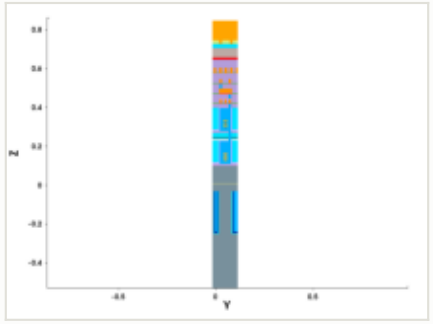

y cut at 0.049 µm

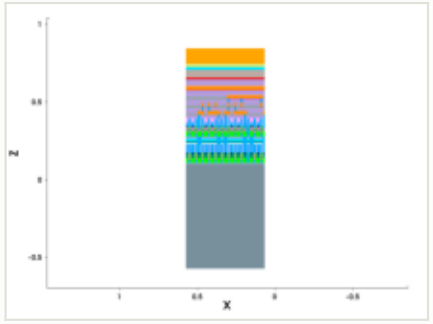

mask for this step

no mask for this step

steps by process area

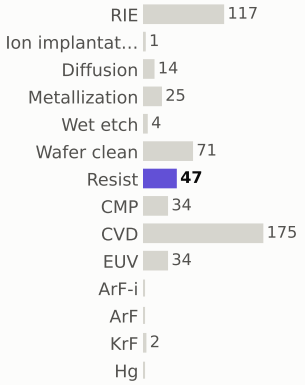

materials deposited (g)

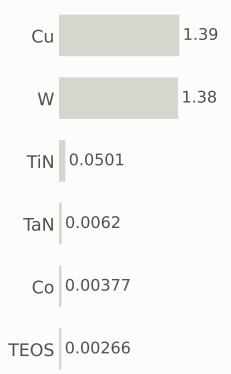

gases emitted (g)

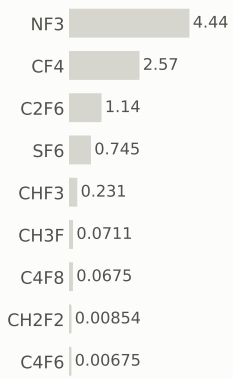

Step #5600: CVD

depo_fill · CVD

1.31	566.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

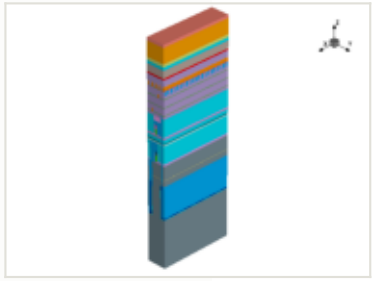

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

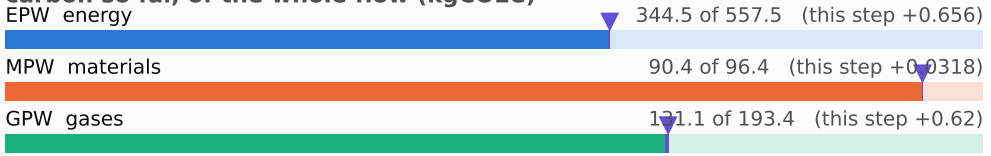

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

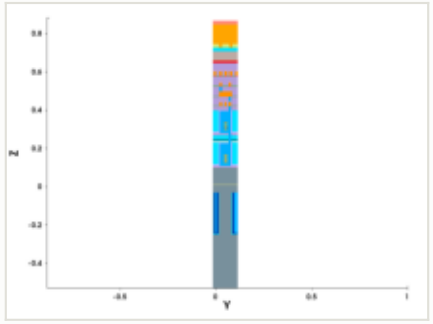

y cut at 0.049 µm

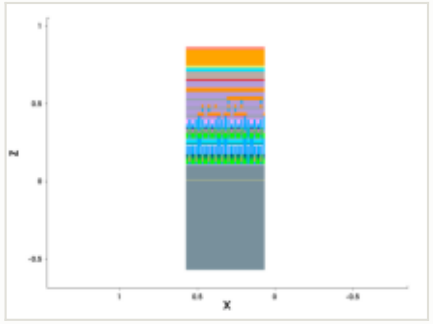

mask for this step

no mask for this step

steps by process area

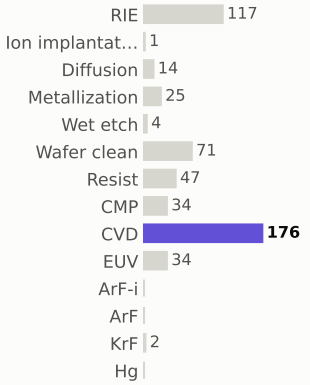

materials deposited (g)

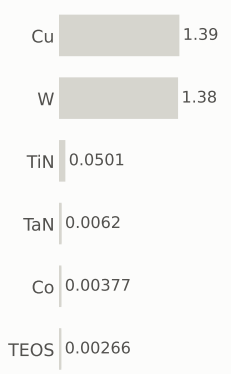

gases emitted (g)



Step #5610: Wafer_clean

clean · Wafer_clean

0.169	566.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

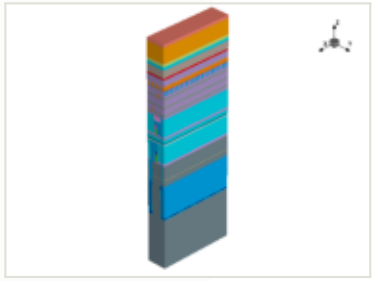

x cut at 0.385 µm

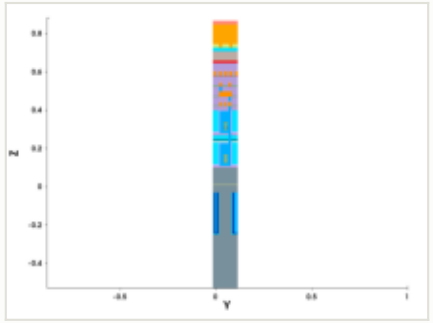

y cut at 0.049 µm

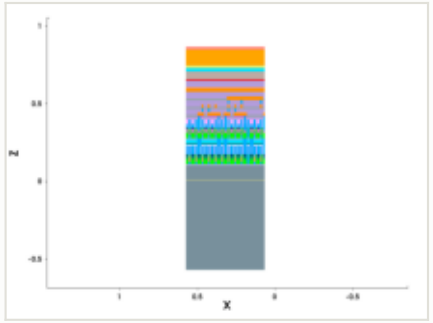

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

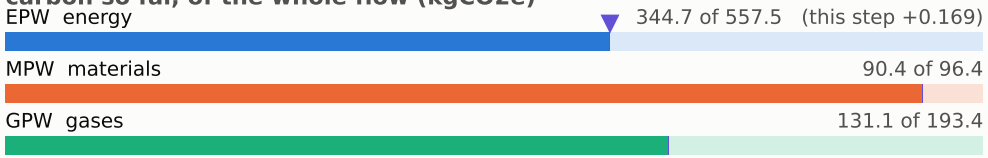

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

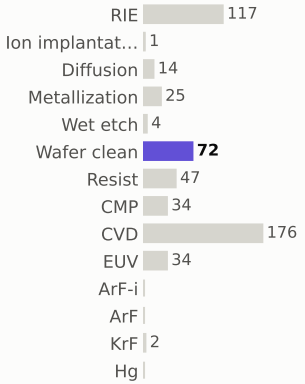

materials deposited (g)

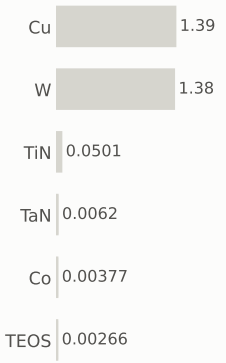

gases emitted (g)

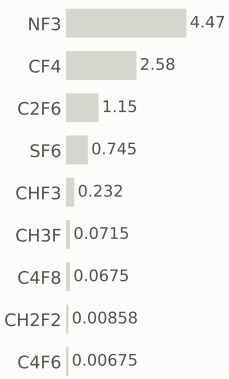

Step #5620: EUV

litho_patterning · EUV

1.96	568.1	0.23%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

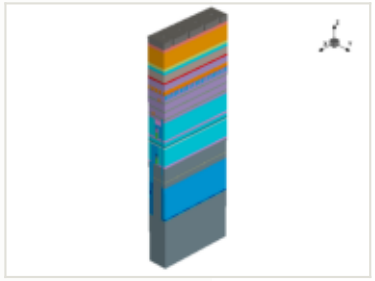

x cut at 0.385 µm

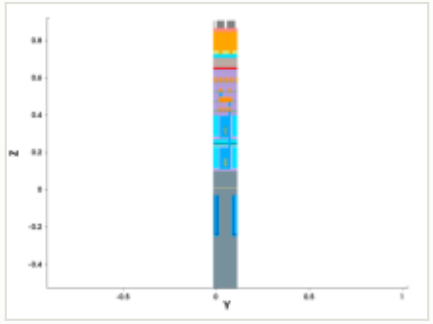

y cut at 0.049 µm

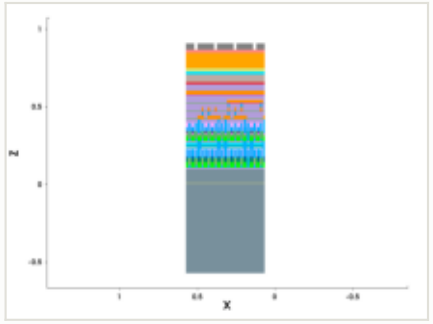

mask: layer 10372:0 (GDSII)

this step

process area	EUV
material	—
thickness	—
material GWP	—
input gases	—
energy	3.25 kWh + 1.3 overhead

EPW	1.96 kgCO2e
EPW tool	1.4 kgCO2e
EPW overhead	0.559 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.96 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

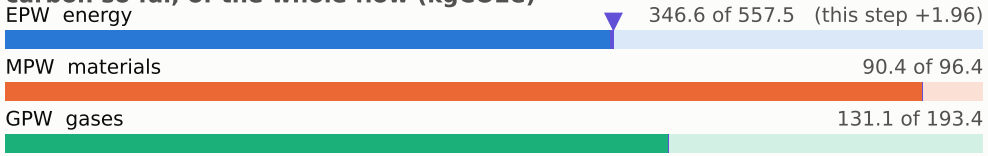

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

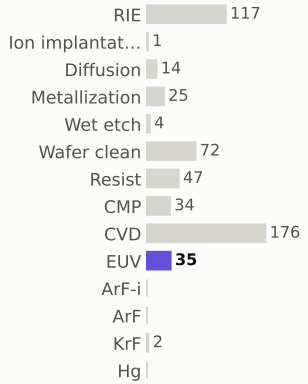

materials deposited (g)

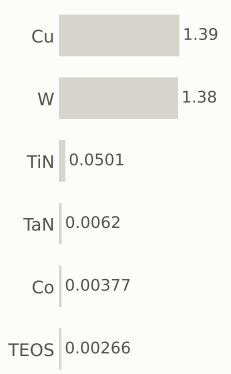

gases emitted (g)

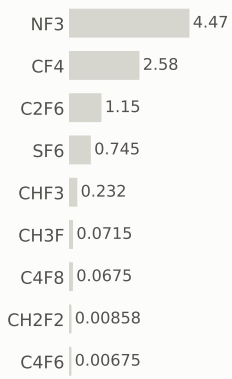

Step #5630: RIE

etch_anisotropic · RIE

1.04	569.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

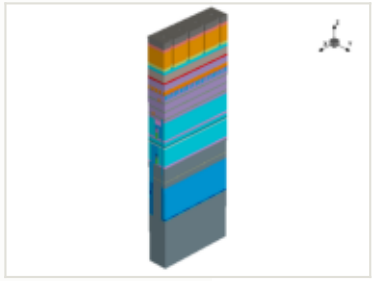

x cut at 0.385 µm

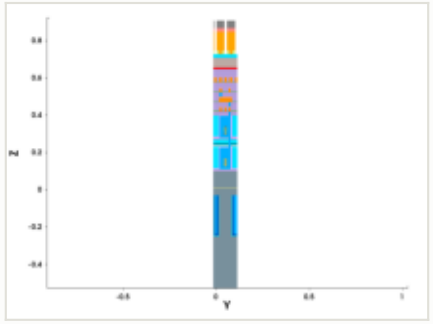

y cut at 0.049 µm

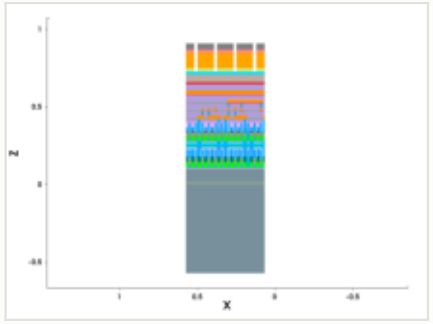

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

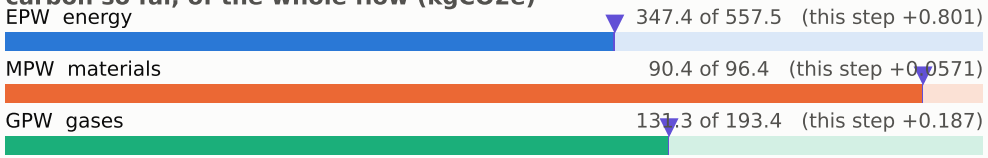

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

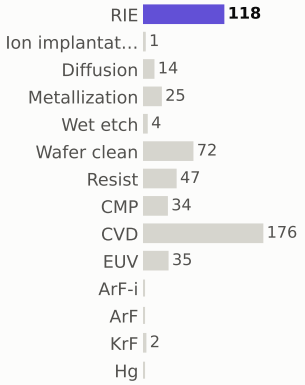

materials deposited (g)

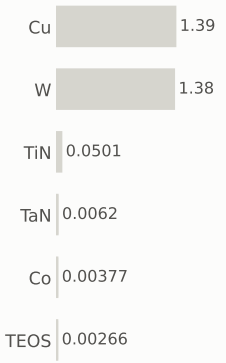

gases emitted (g)

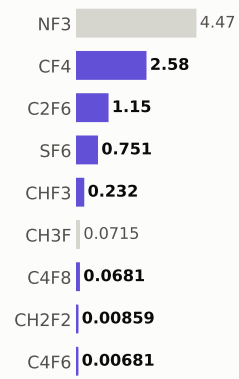

Step #5640: Wafer_clean

etch_strip · Wafer_clean

0.169	569.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

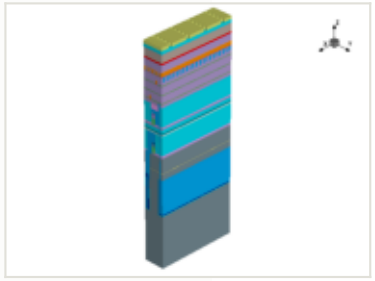

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

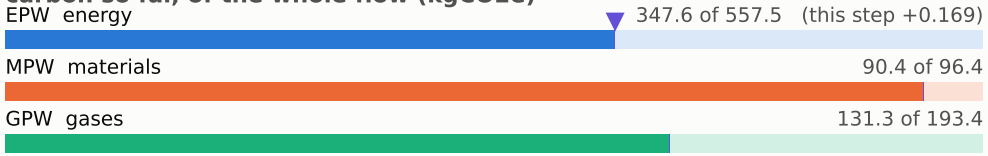

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

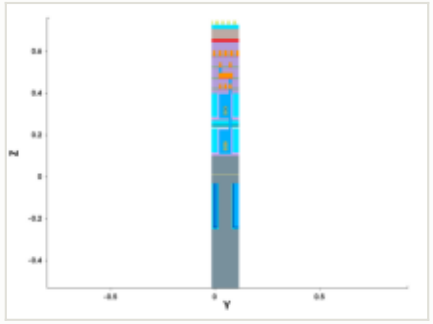

y cut at 0.049 µm

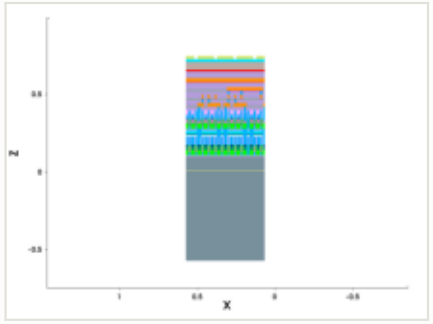

mask for this step

no mask for this step

steps by process area

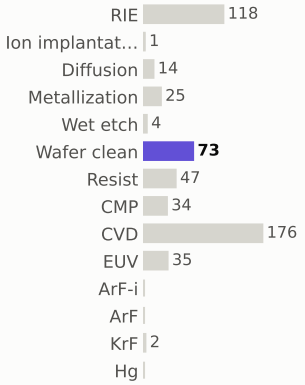

materials deposited (g)

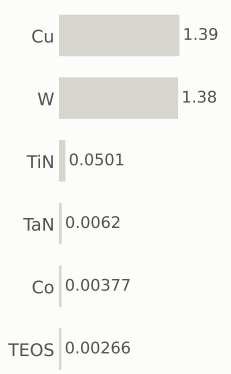

gases emitted (g)

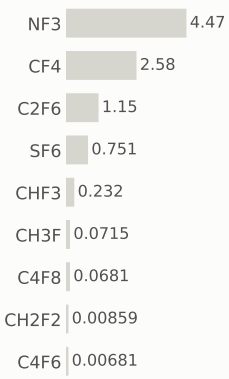

Step #5650: RIE

etch_anisotropic · RIE

1.04	570.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

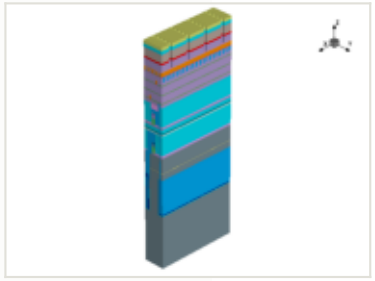

x cut at 0.385 µm

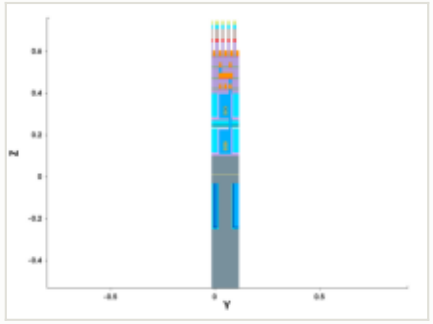

y cut at 0.049 µm

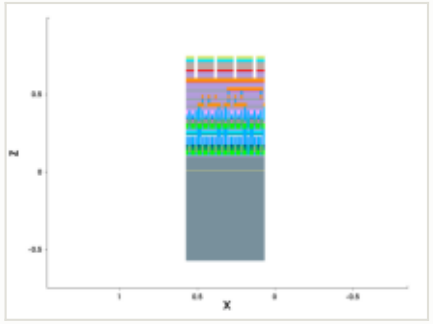

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

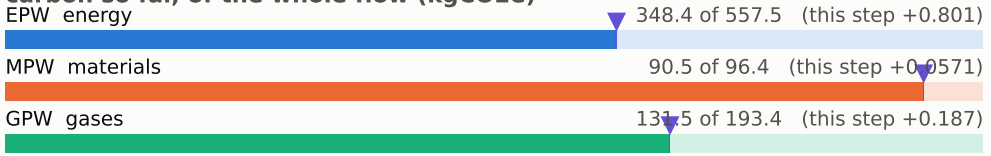

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

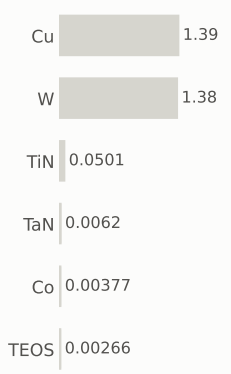

gases emitted (g)

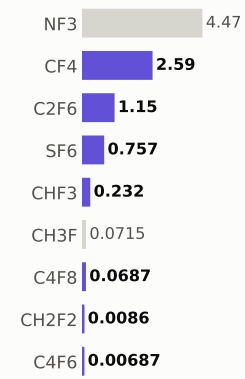

Step #5660: Wafer_clean

clean · Wafer_clean

0.169	570.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

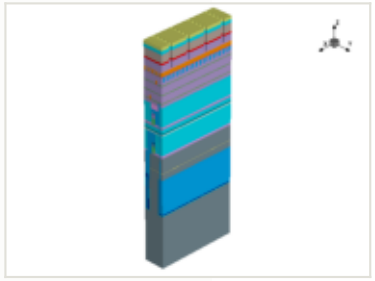

x cut at 0.385 µm

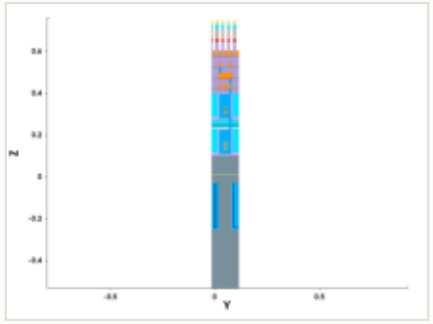

y cut at 0.049 µm

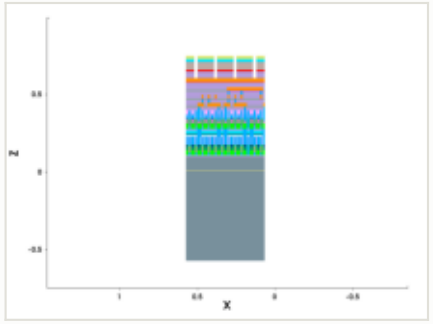

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

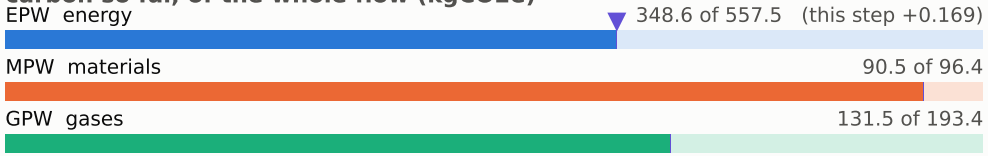

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

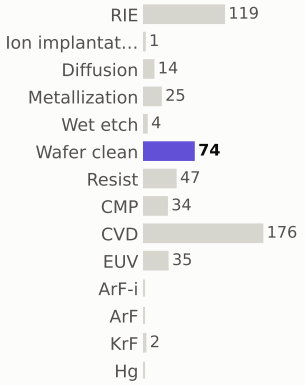

materials deposited (g)

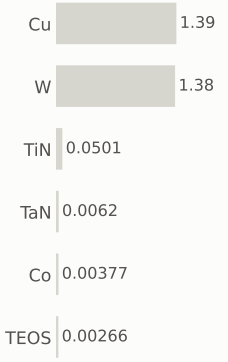

gases emitted (g)

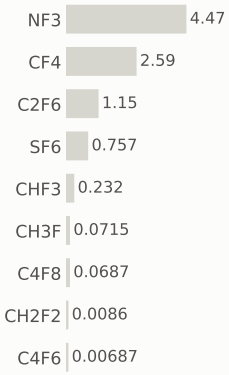

Step #5670: Metallization

depo_fill · Metallization

1.21	571.7	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

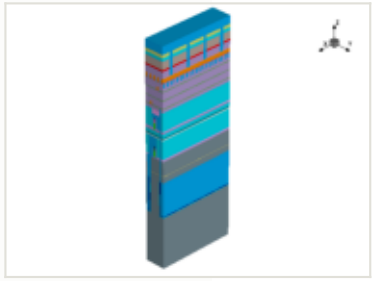

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

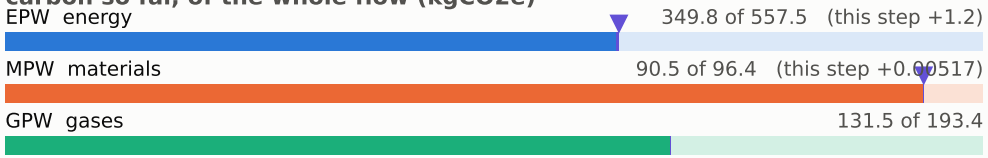

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

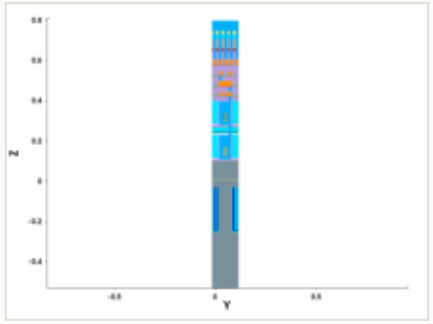

y cut at 0.049 µm

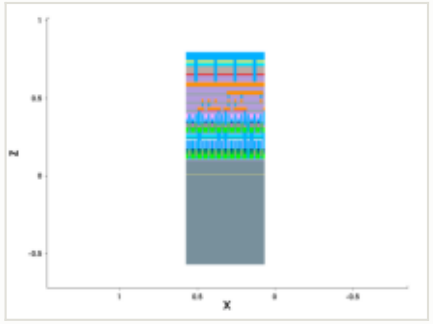

mask for this step

no mask for this step

steps by process area

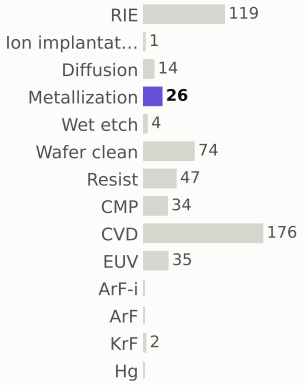

materials deposited (g)

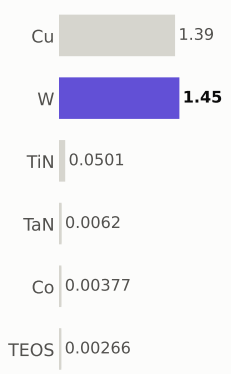

gases emitted (g)

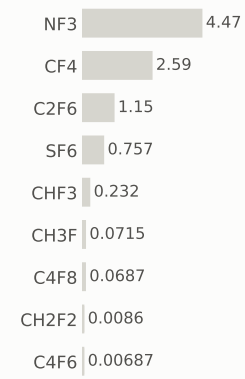

Step #5680: CMP

etch_cmp · CMP

0.169	571.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

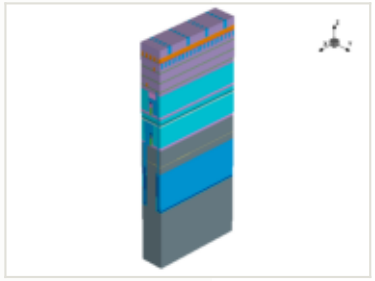

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

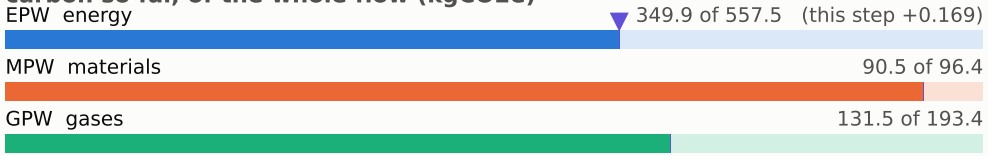

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

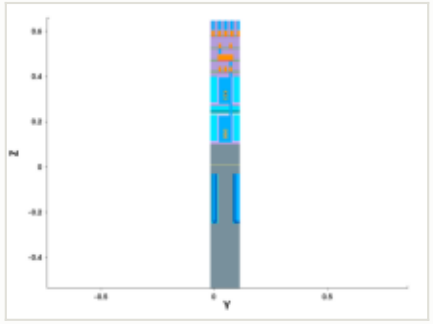

y cut at 0.049 µm

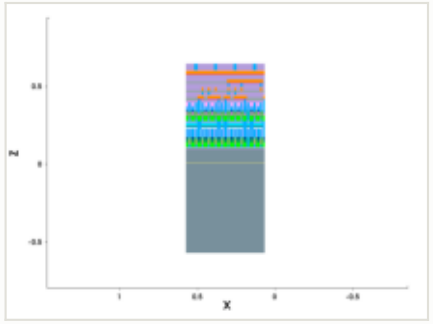

mask for this step

no mask for this step

steps by process area

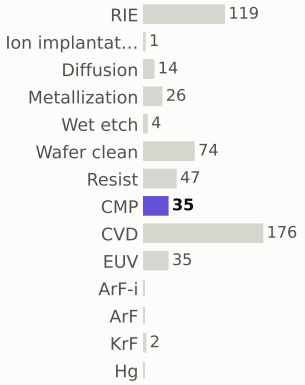

materials deposited (g)

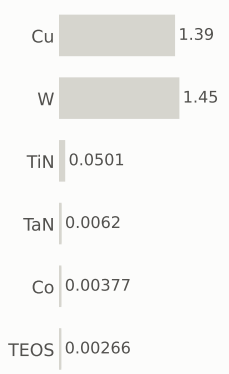

gases emitted (g)

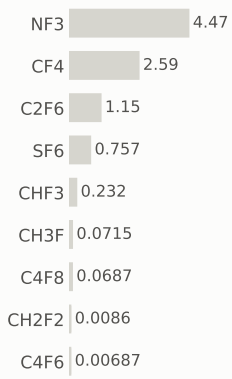

Step #5690: CVD

depo_fill · CVD

1.31	573.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

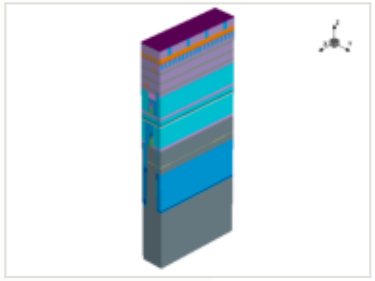

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

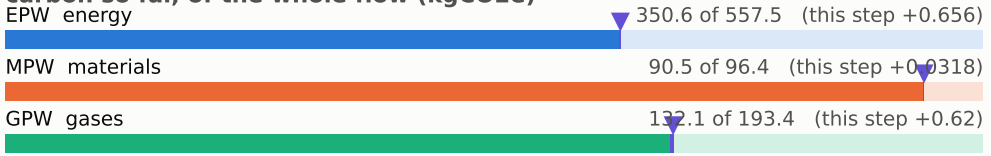

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

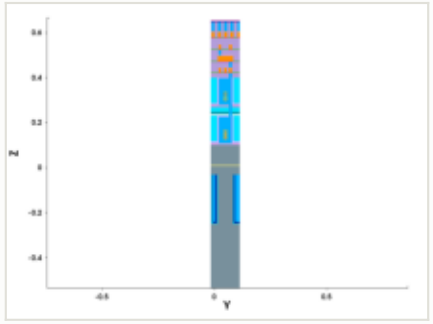

y cut at 0.049 µm

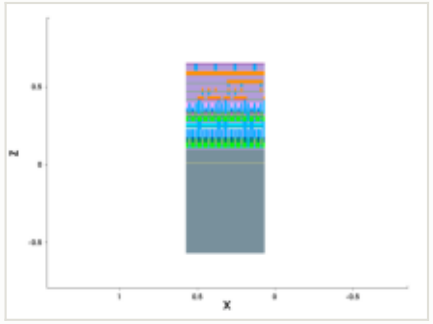

mask for this step

no mask for this step

steps by process area

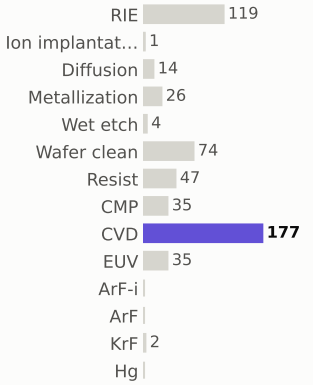

materials deposited (g)

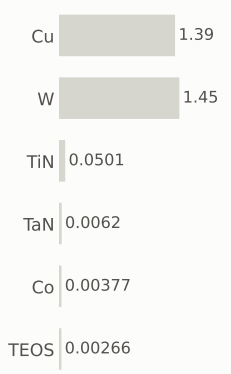

gases emitted (g)



Step #5700: CVD

depo_fill · CVD

1.31	574.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

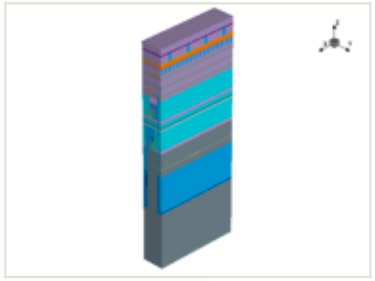

x cut at 0.385 µm

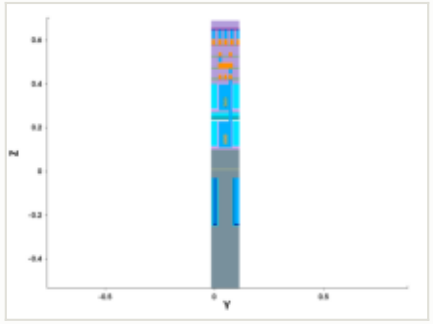

y cut at 0.049 µm

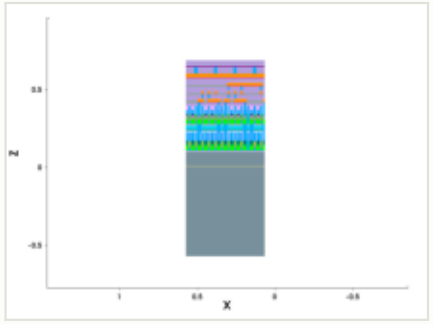

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.036 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

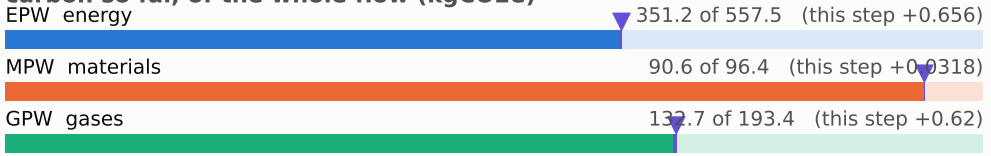

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

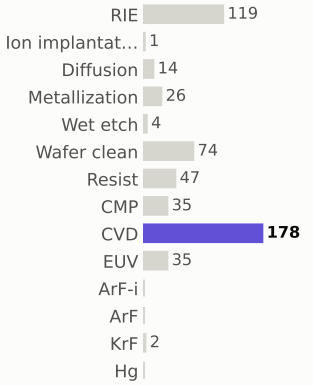

materials deposited (g)

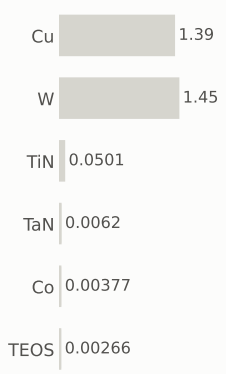

gases emitted (g)

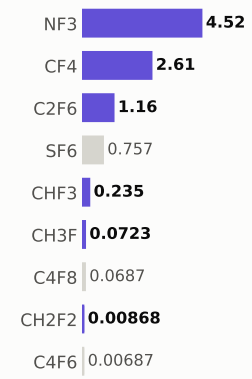

Step #5710: Diffusion

treatment · Diffusion

0.801	575.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

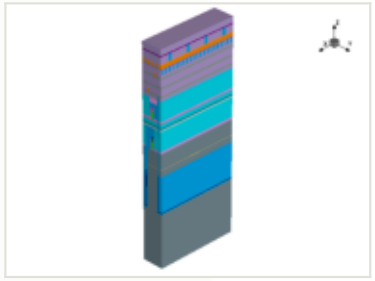

x cut at 0.385 µm

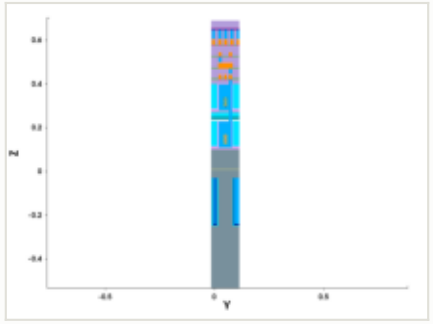

y cut at 0.049 µm

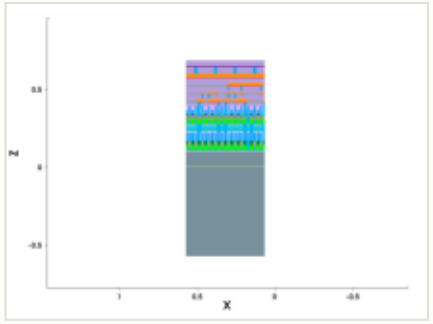

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

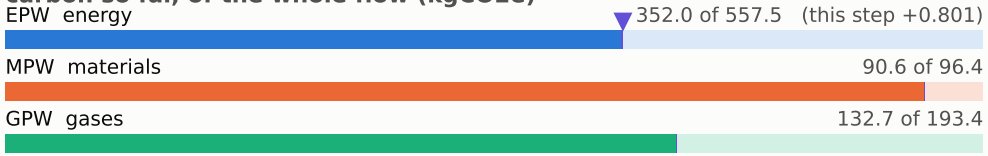

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

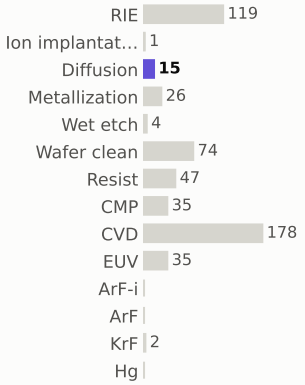

materials deposited (g)

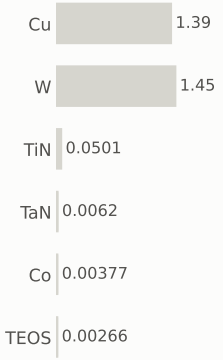

gases emitted (g)

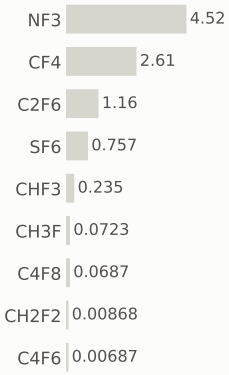

Step #5720: Wafer_clean

clean · Wafer_clean

0.169	575.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

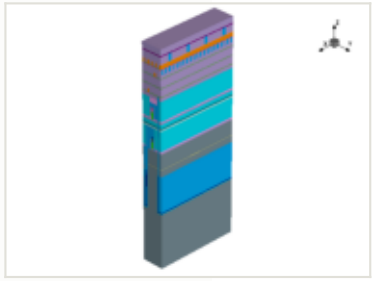

x cut at 0.385 µm

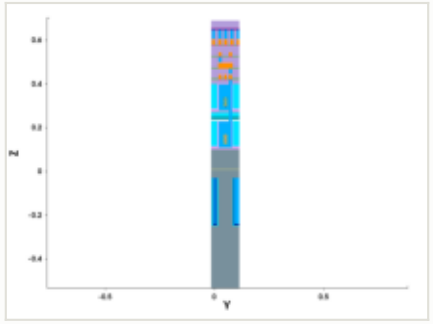

y cut at 0.049 µm

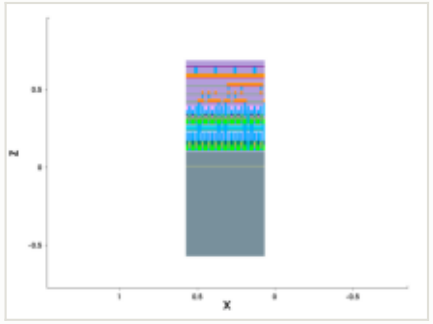

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

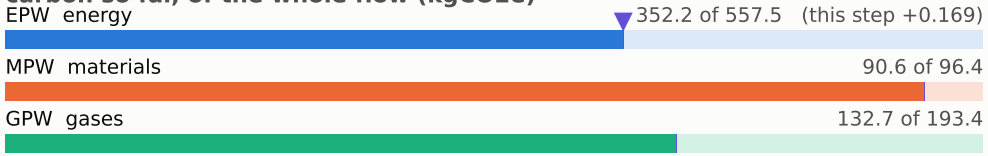

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

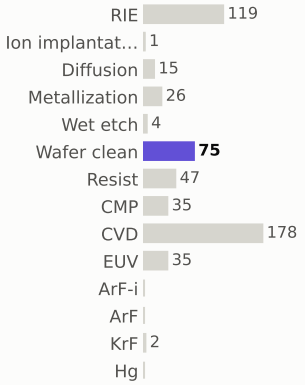

materials deposited (g)

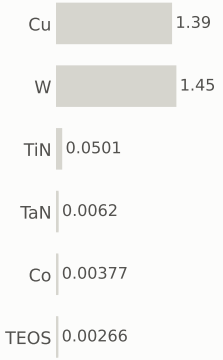

gases emitted (g)

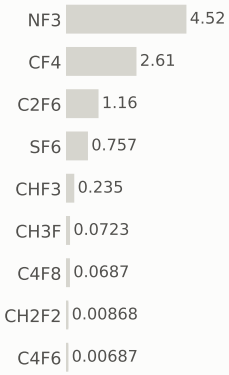

Step #5730: CVD

depo_fill · CVD

1.31	576.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

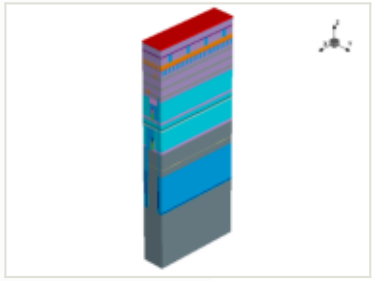

x cut at 0.385 µm

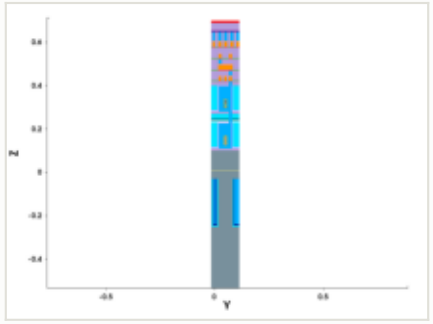

y cut at 0.049 µm

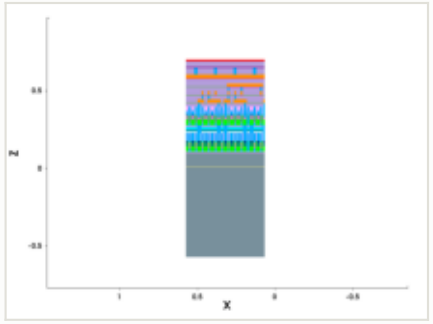

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

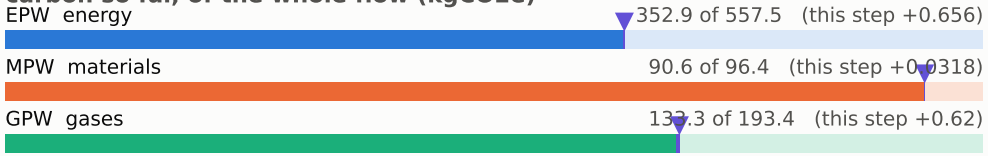

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

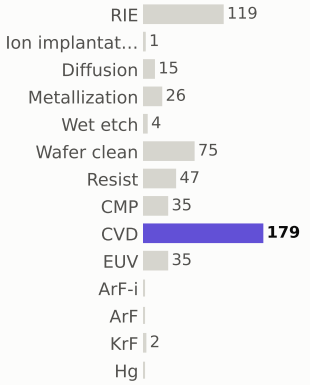

materials deposited (g)

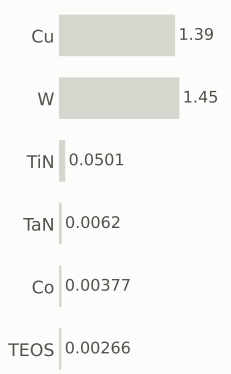

gases emitted (g)



Step #5740: CVD

depo_fill · CVD

1.31	578.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

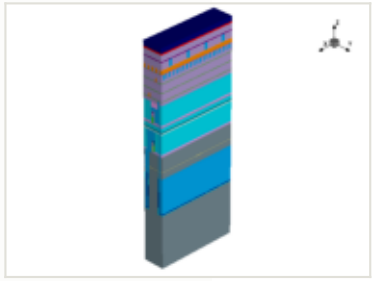

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

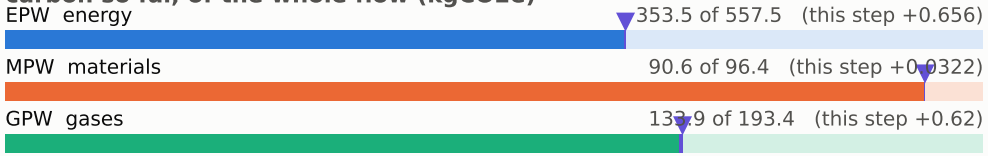

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

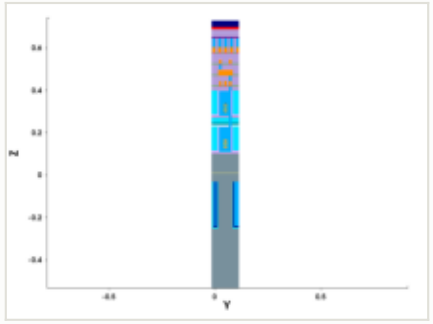

y cut at 0.049 µm

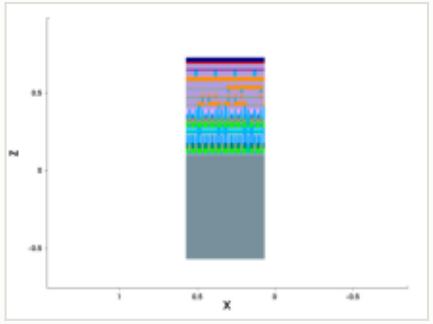

mask for this step

no mask for this step

steps by process area

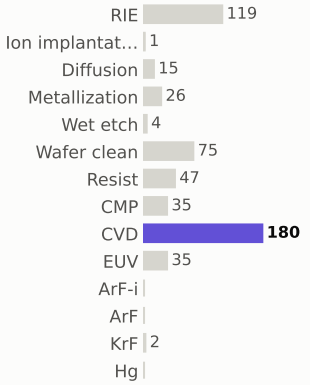

materials deposited (g)

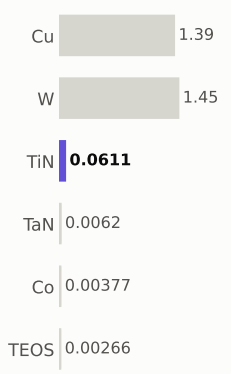

gases emitted (g)

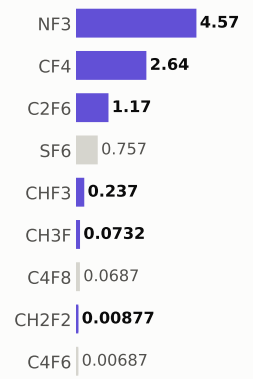

Step #5750: Wafer_clean

clean · Wafer_clean

0.169	578.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

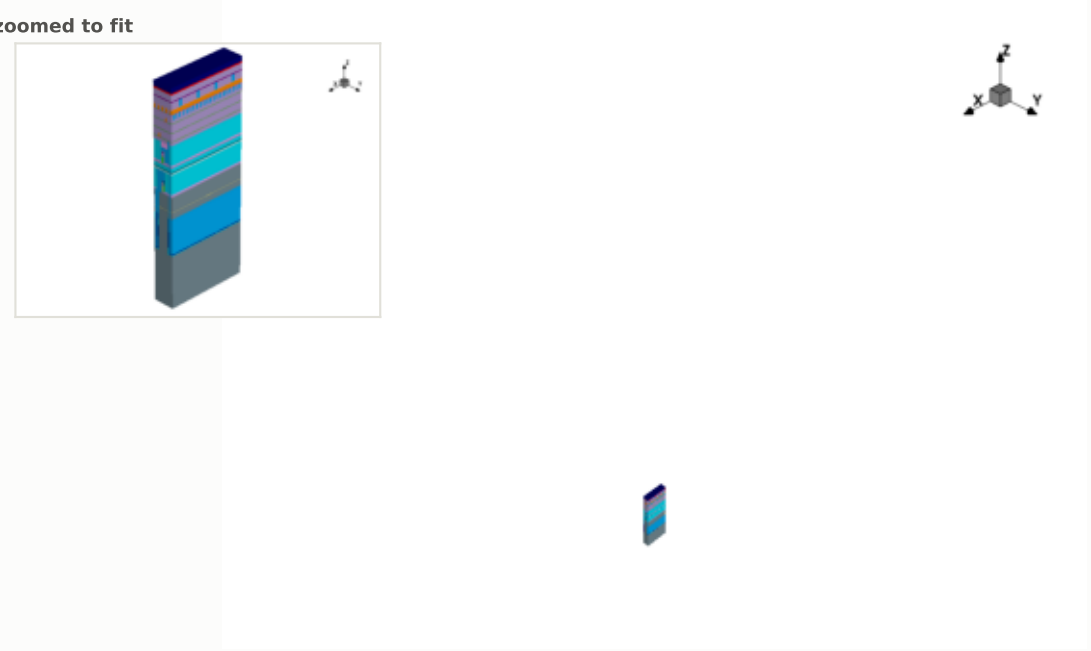

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

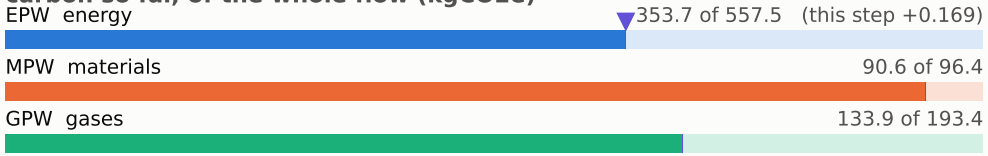

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

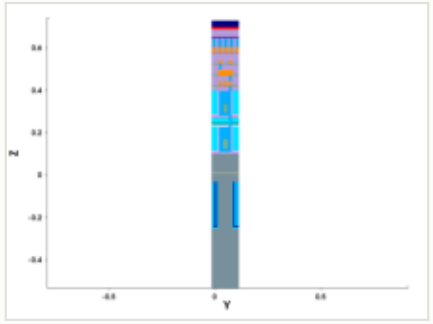

y cut at 0.049 µm

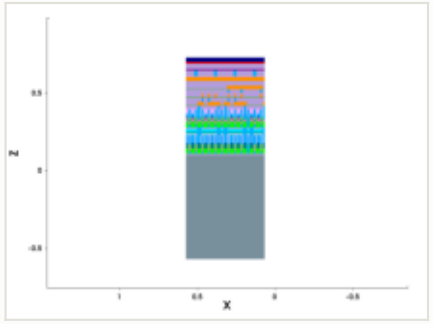

mask for this step

no mask for this step

steps by process area

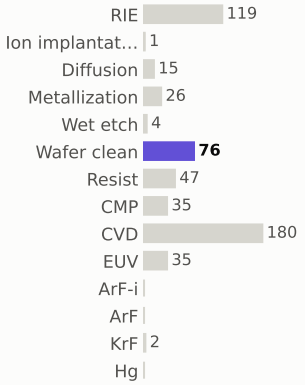

materials deposited (g)

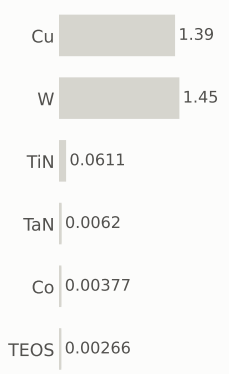

gases emitted (g)

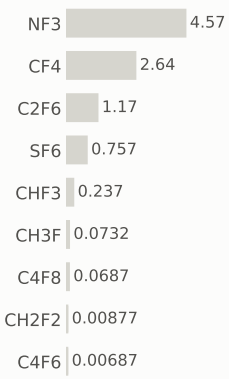

Step #5760: CVD

depo_fill · CVD

1.31	579.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

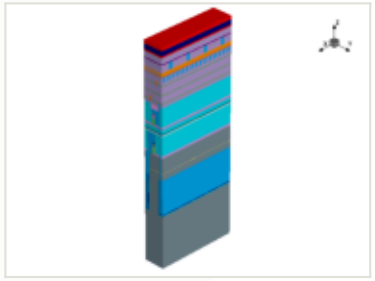

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

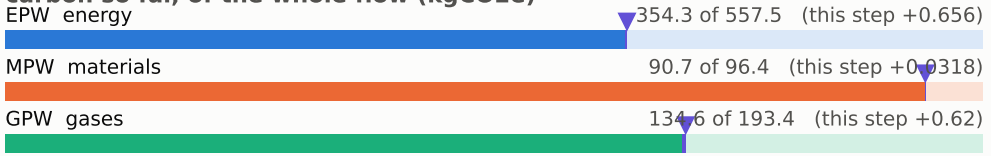

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

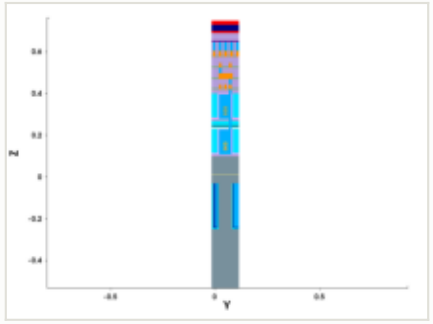

y cut at 0.049 µm

no cut image (make spx)

mask for this step

no mask for this step

steps by process area

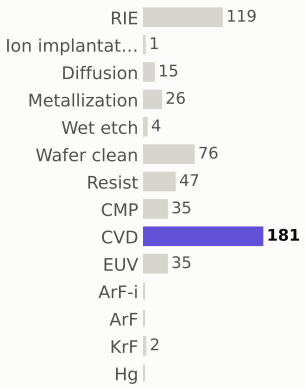

materials deposited (g)

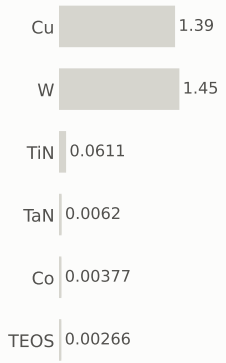

gases emitted (g)

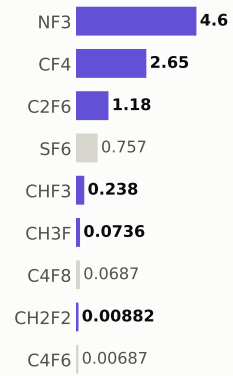

Step #5770: CVD

depo_fill · CVD

1.31	580.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

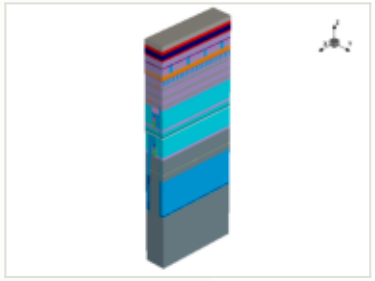

x cut at 0.385 µm

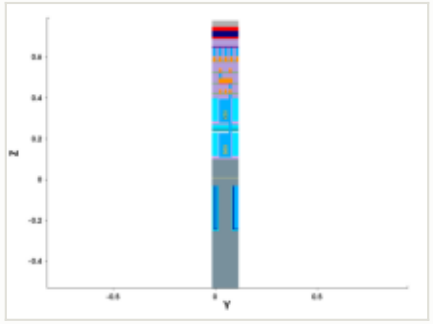

y cut at 0.049 µm

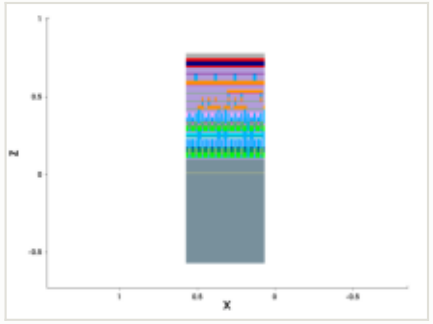

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

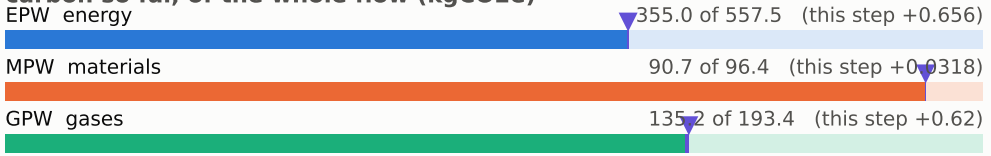

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

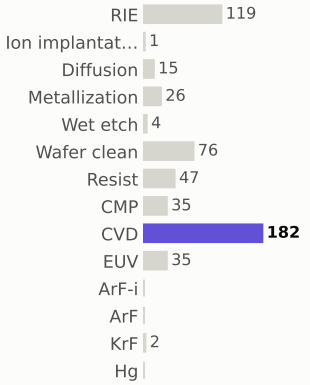

materials deposited (g)

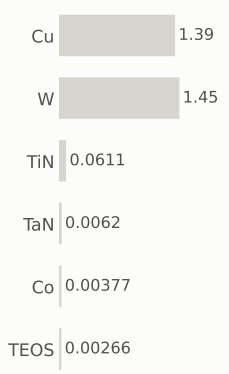

gases emitted (g)

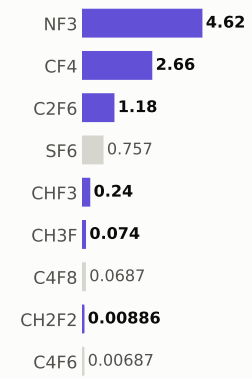

Step #5780: Resist

depo_fill · Resist

0.169	581.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

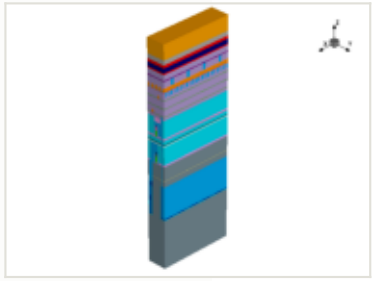

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

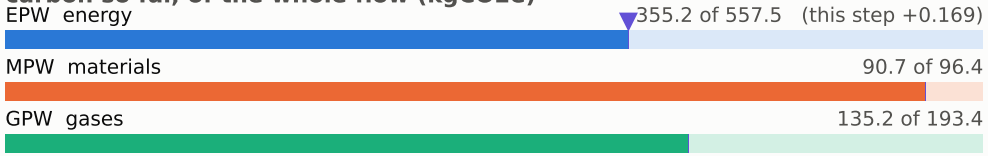

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

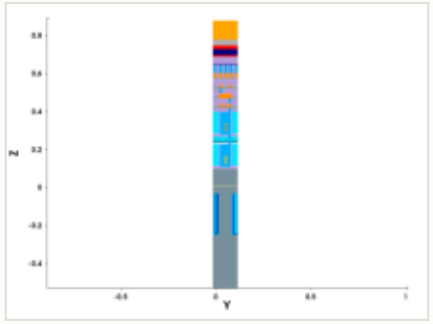

y cut at 0.049 µm

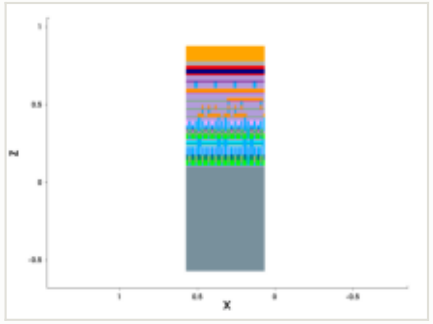

mask for this step

no mask for this step

steps by process area

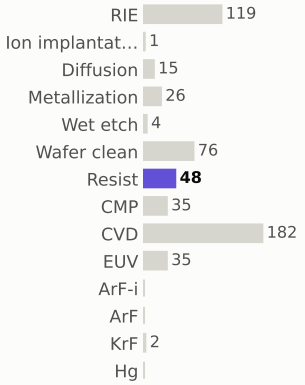

materials deposited (g)

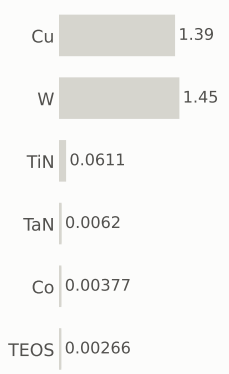

gases emitted (g)

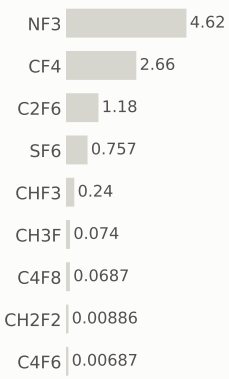

Step #5790: CVD

depo_fill · CVD

1.31	582.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

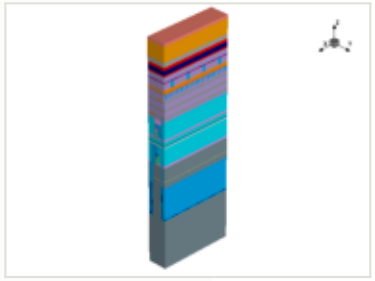

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

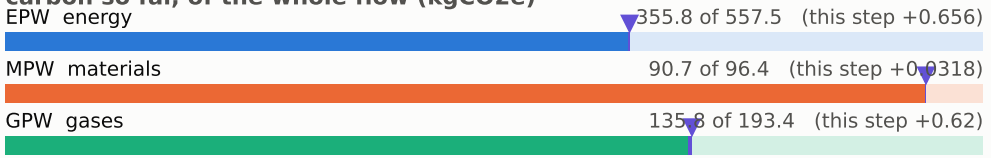

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

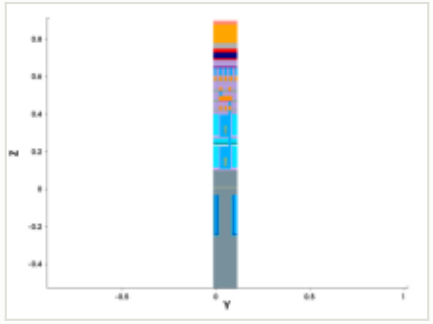

y cut at 0.049 µm

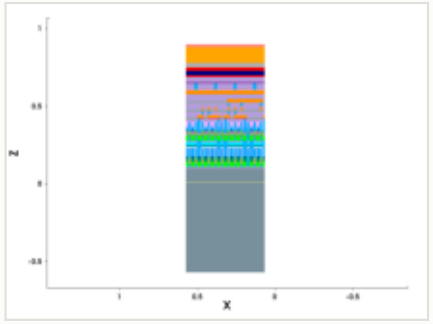

mask for this step

no mask for this step

steps by process area

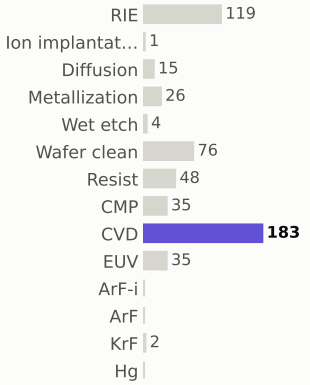

materials deposited (g)

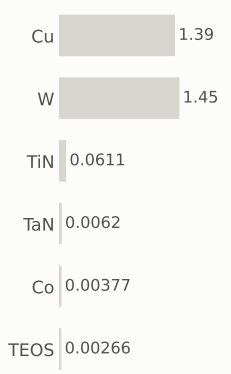

gases emitted (g)

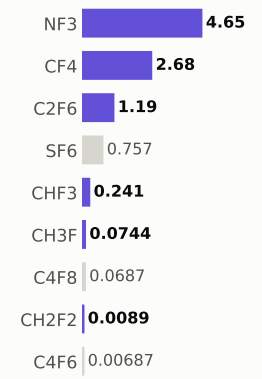

Step #5800: Wafer_clean

clean · Wafer_clean

0.169	582.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

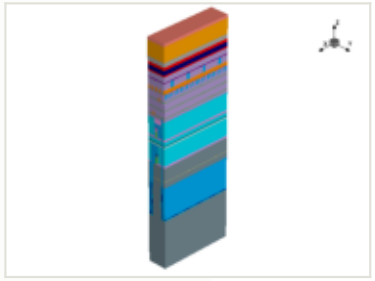

x cut at 0.385 µm

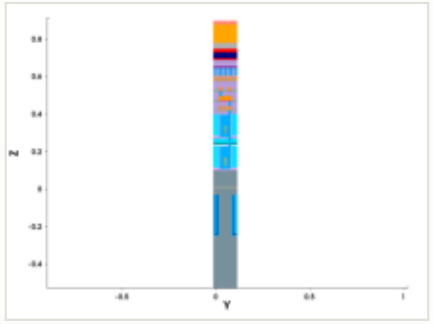

y cut at 0.049 µm

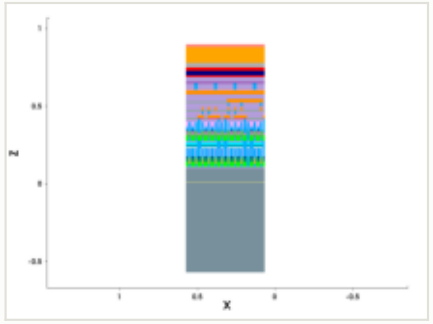

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

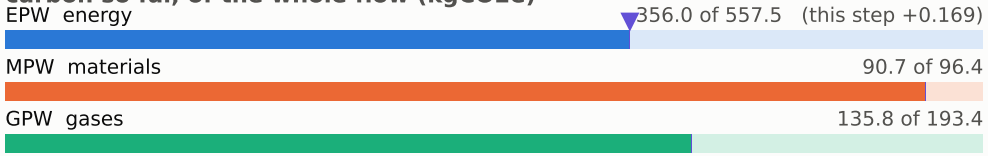

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

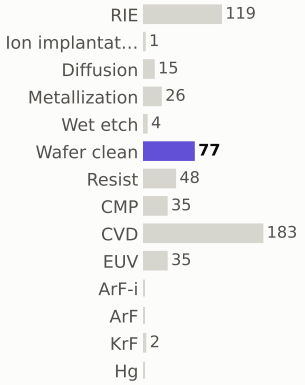

materials deposited (g)

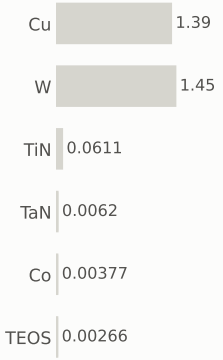

gases emitted (g)

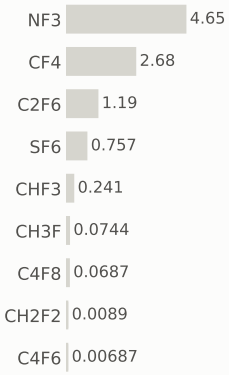

Step #5810: ArF-i

litho_patterning · ArF-i

0.217	582.7	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

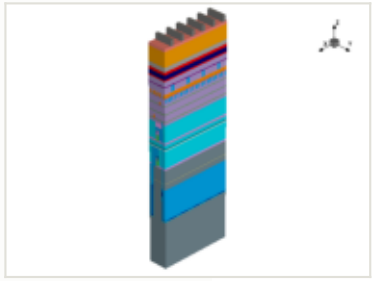

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

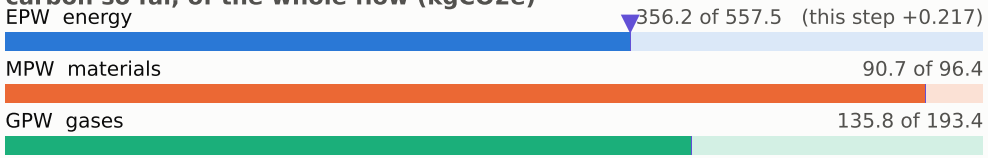

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

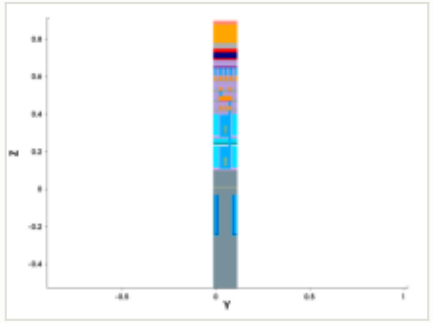

y cut at 0.049 µm

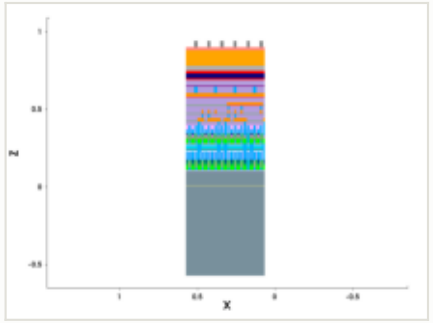

mask: layer 10401:0, positive (GDSII)

steps by process area

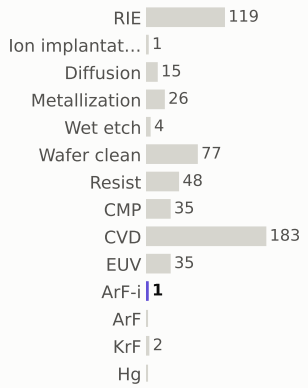

materials deposited (g)

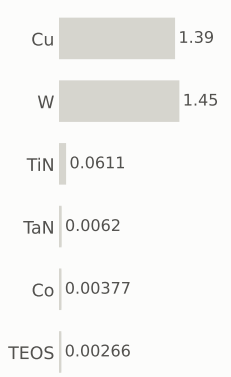

gases emitted (g)



Step #5820: Ion_implantation

treatment · Ion_implantation

0.801	583.5	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

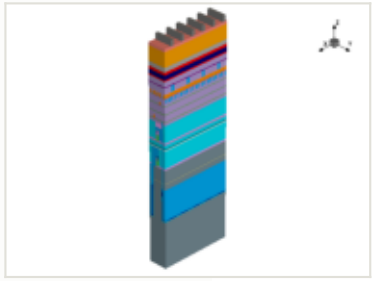

x cut at 0.385 µm

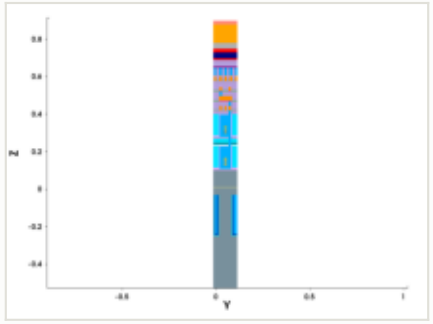

y cut at 0.049 µm

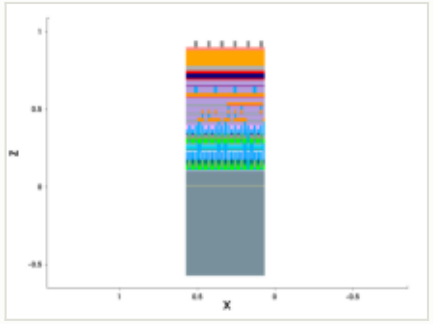

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

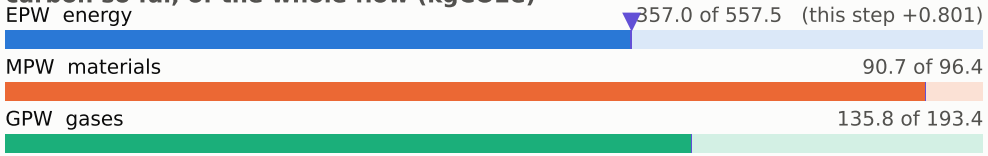

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

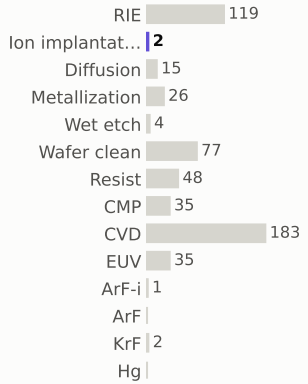

materials deposited (g)

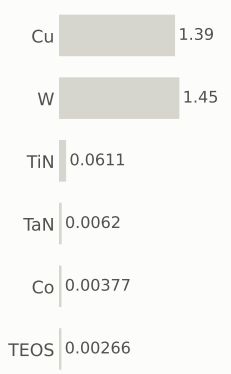

gases emitted (g)

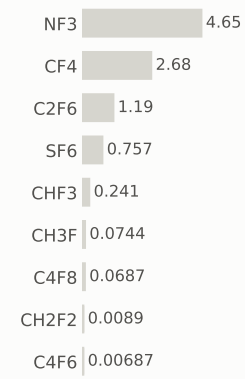

Step #5830: RIE

etch_anisotropic · RIE

1.04	584.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

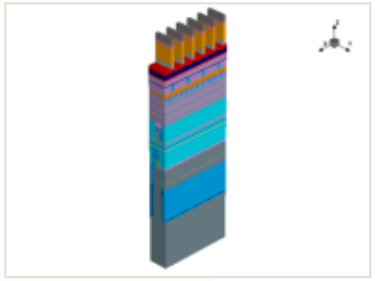

x cut at 0.385 µm

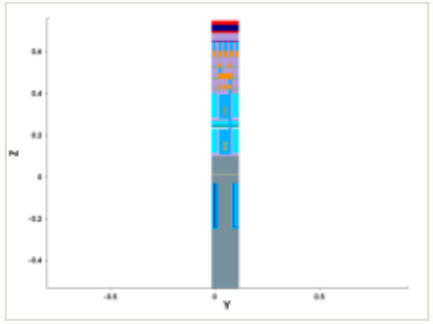

y cut at 0.049 µm

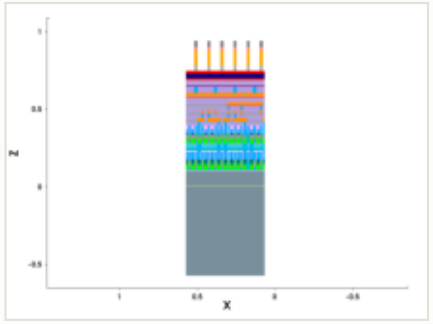

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

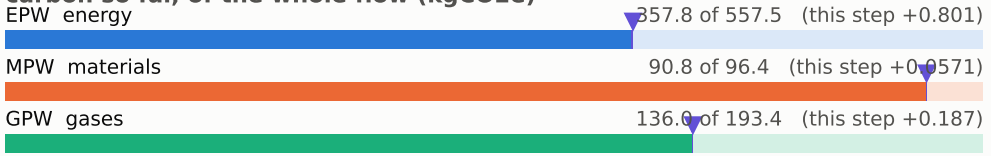

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

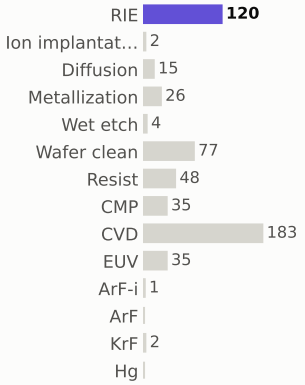

materials deposited (g)

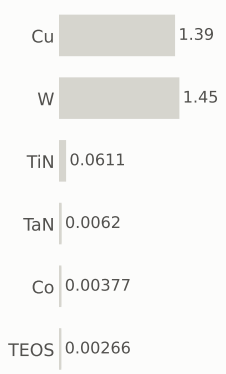

gases emitted (g)

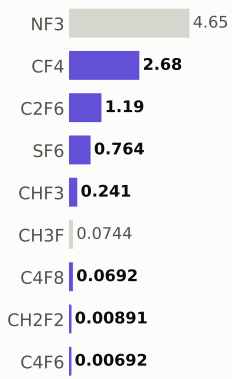

Step #5840: Wafer_clean

etch_strip · Wafer_clean

0.169	584.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

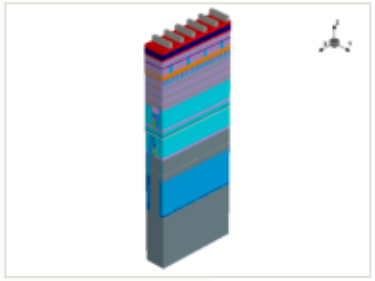

x cut at 0.385 µm

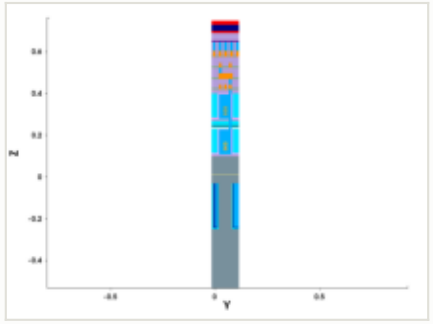

y cut at 0.049 µm

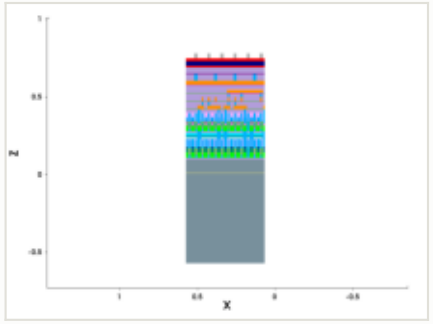

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

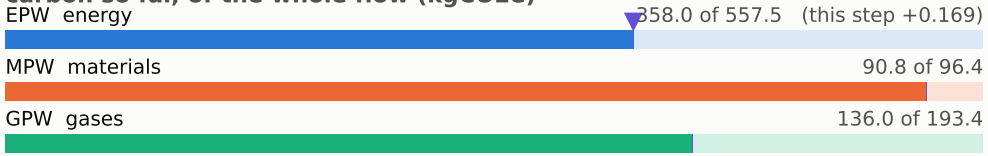

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

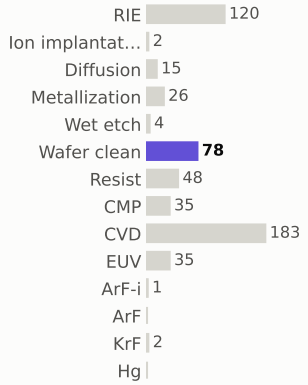

materials deposited (g)

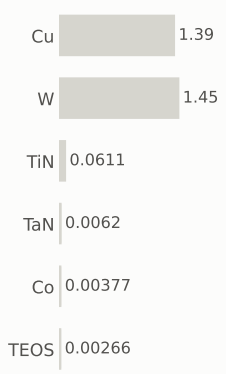

gases emitted (g)

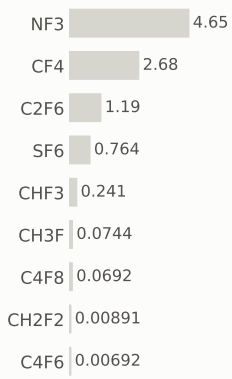

Step #5850: CVD

depo_isotropic · CVD

1.31	586.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

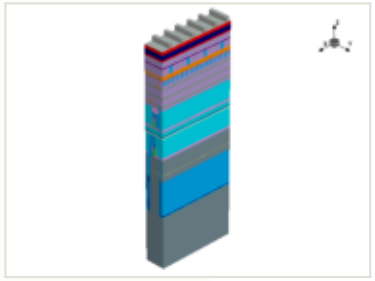

x cut at 0.385 µm

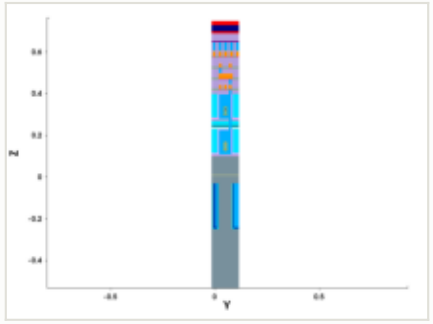

y cut at 0.049 µm

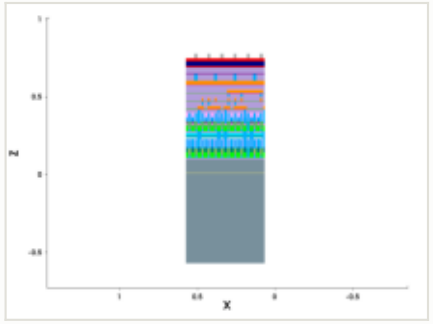

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

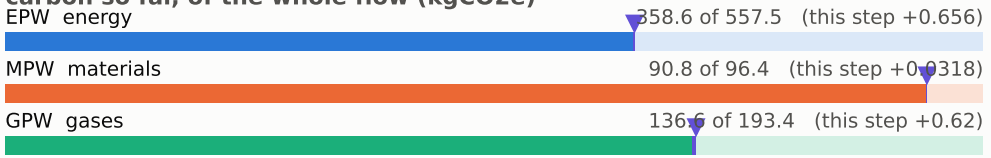

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

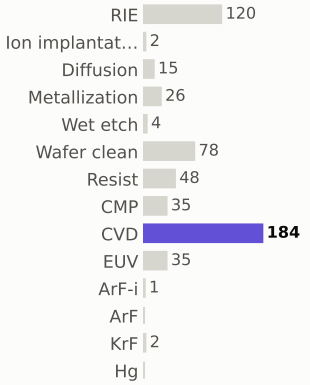

materials deposited (g)

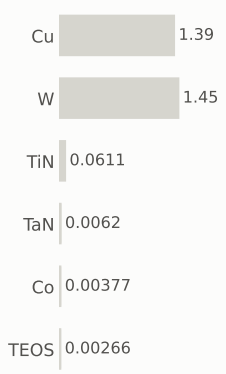

gases emitted (g)



Step #5860: RIE

etch_anisotropic · RIE

1.04	587.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

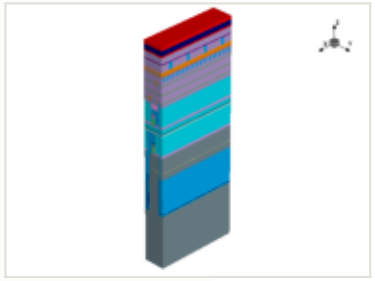

x cut at 0.385 µm

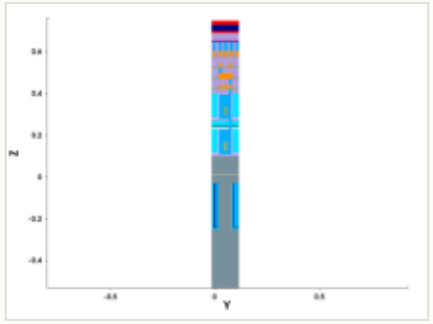

y cut at 0.049 µm

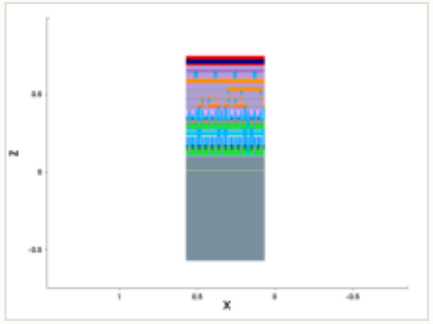

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

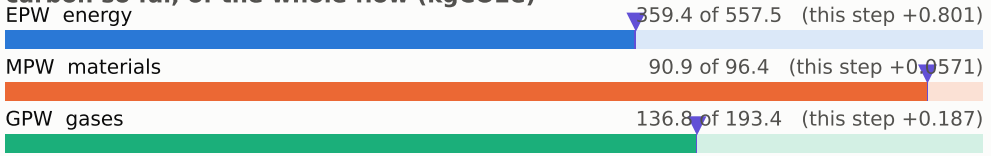

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

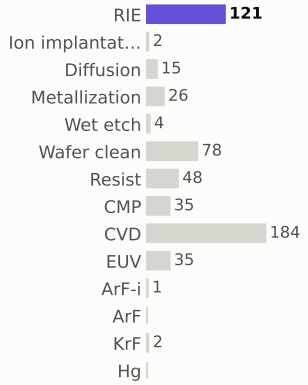

materials deposited (g)

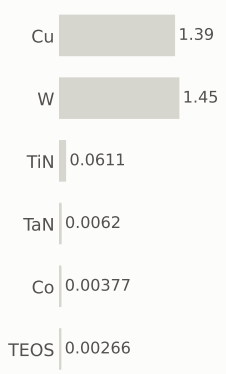

gases emitted (g)

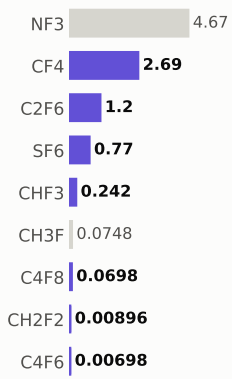

Step #5870: Wafer_clean

etch_strip · Wafer_clean

0.169	587.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

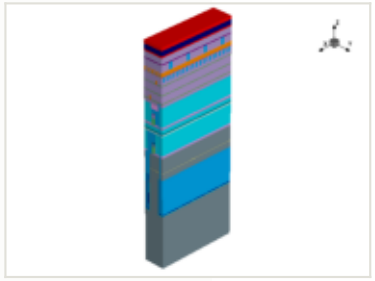

x cut at 0.385 µm

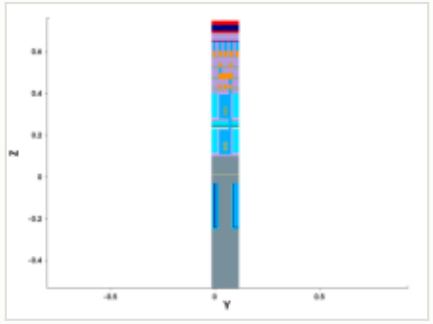

y cut at 0.049 µm

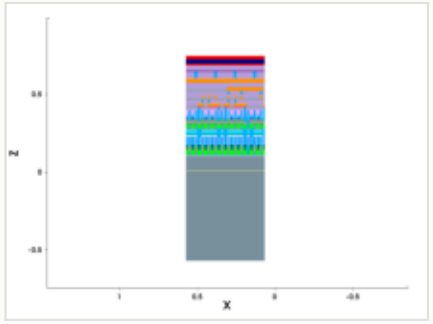

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

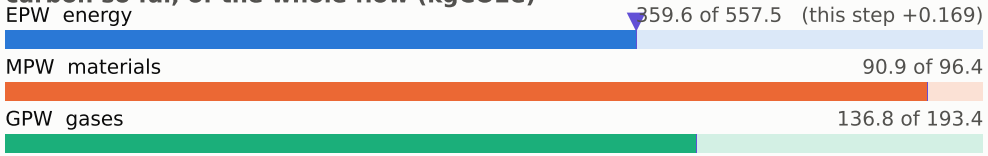

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

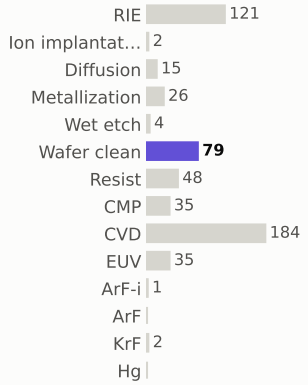

materials deposited (g)



gases emitted (g)

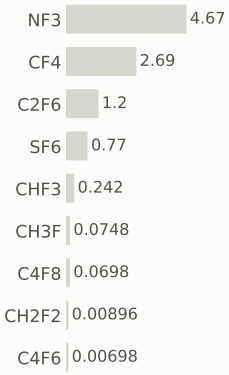

Step #5880: Resist

depo_fill · Resist

0.169	587.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

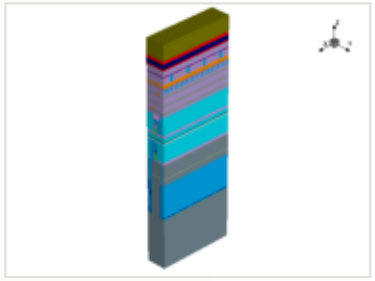

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

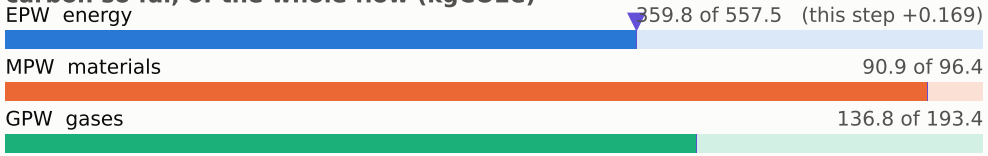

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

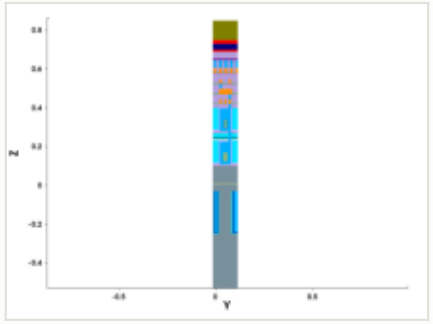

y cut at 0.049 µm

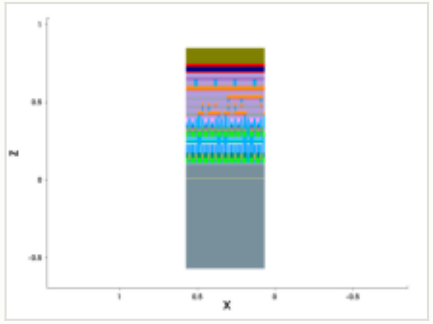

mask for this step

no mask for this step

steps by process area

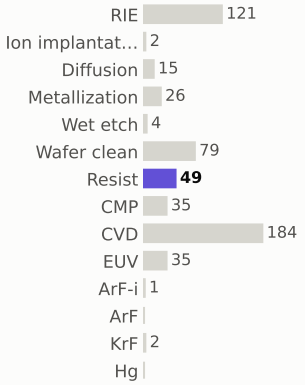

materials deposited (g)

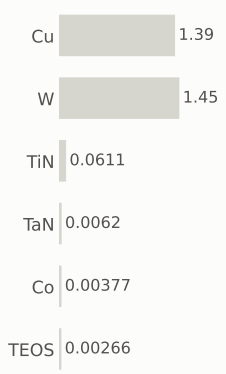

gases emitted (g)

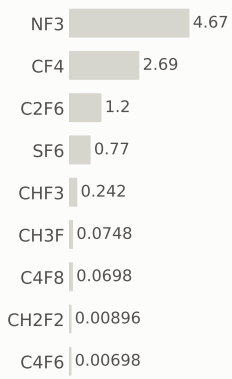

Step #5890: Wafer_clean

clean · Wafer_clean

0.169	587.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

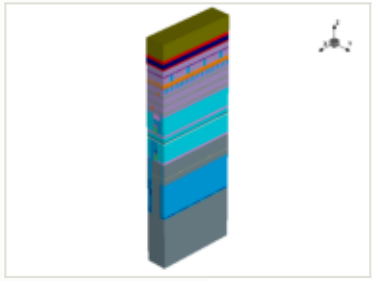

x cut at 0.385 µm

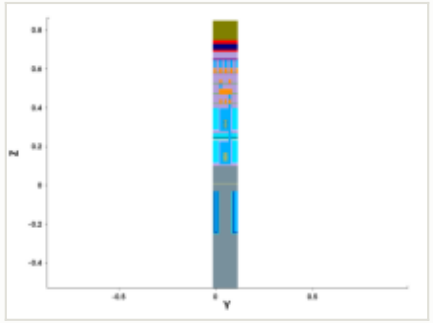

y cut at 0.049 µm

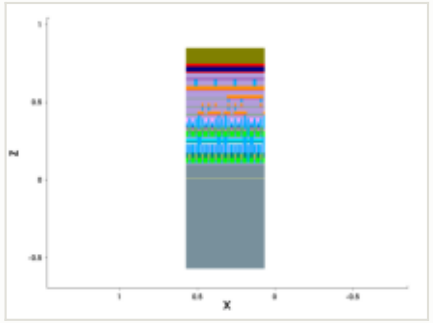

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

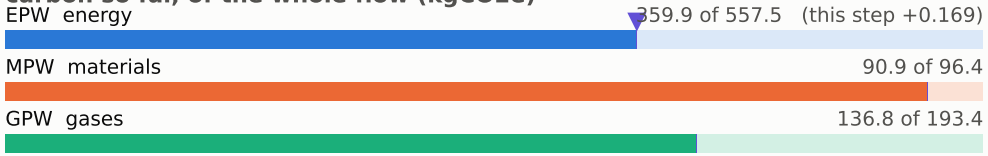

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

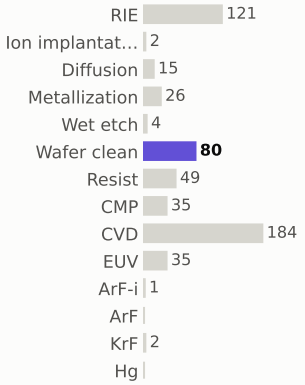

materials deposited (g)

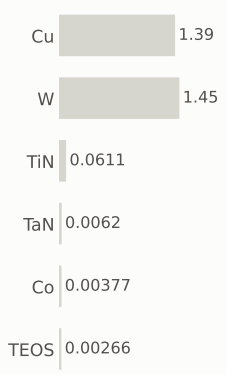

gases emitted (g)

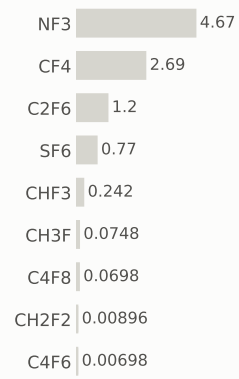

Step #5900: ArF-i

litho_patterning · ArF-i

0.217	587.8	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

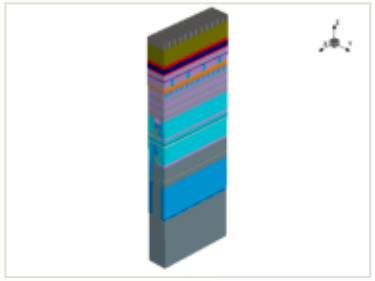

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

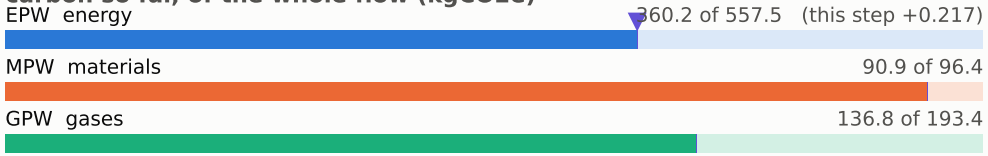

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

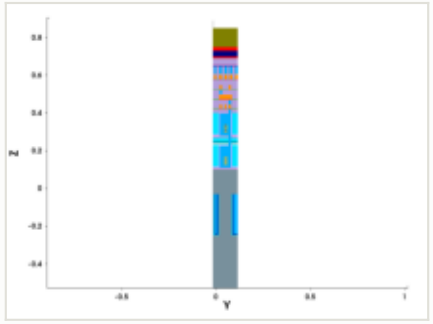

y cut at 0.049 µm

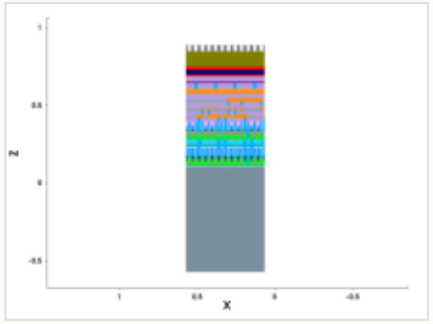

mask: layer 40:0 (GDSII)

steps by process area

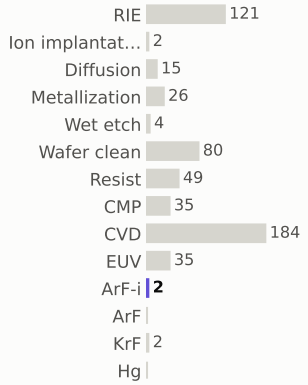

materials deposited (g)

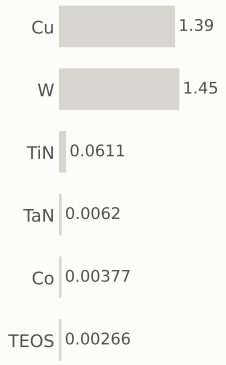

gases emitted (g)

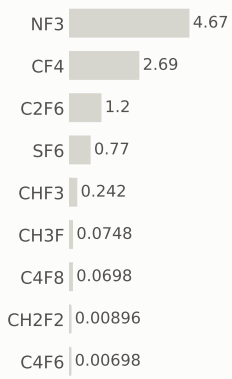

Step #5910: RIE

etch_anisotropic · RIE

1.04	588.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

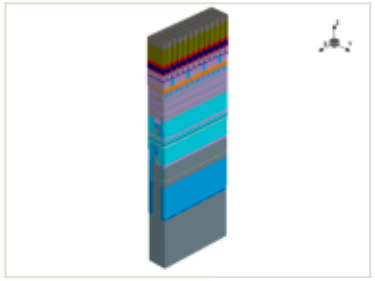

x cut at 0.385 µm

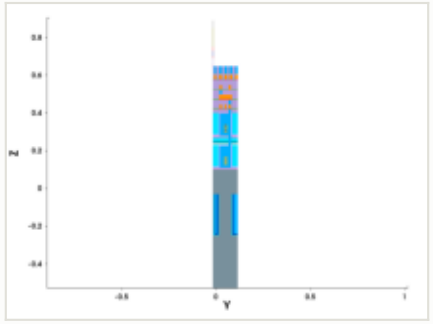

y cut at 0.049 µm

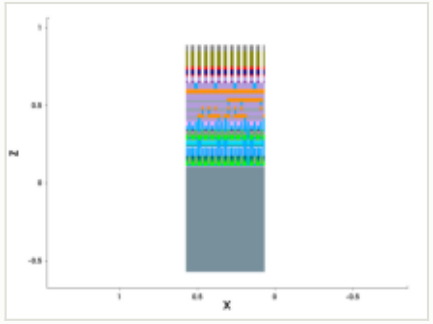

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

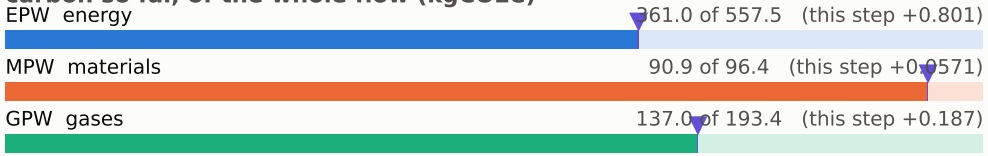

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

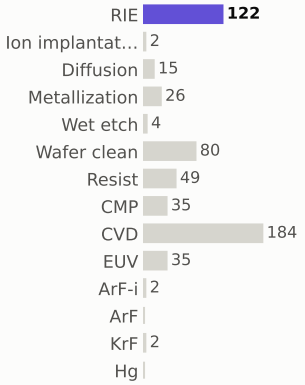

materials deposited (g)

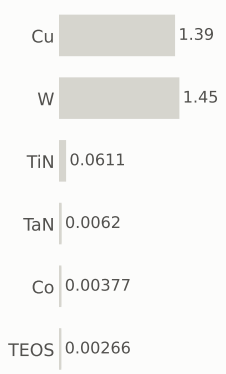

gases emitted (g)

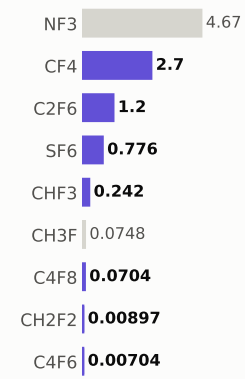

Step #5920: Wafer_clean

etch_strip · Wafer_clean

0.169	589.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

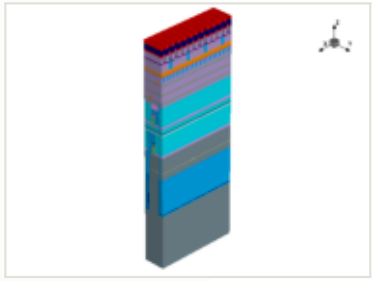

x cut at 0.385 µm

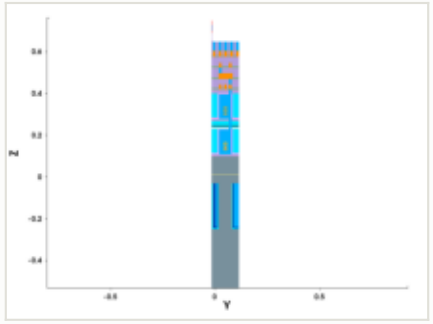

y cut at 0.049 µm

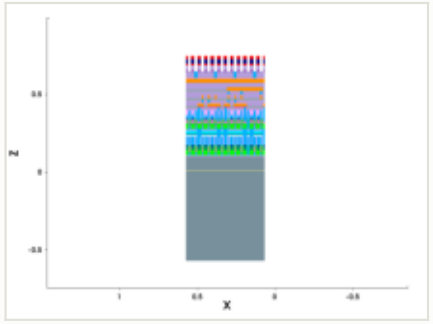

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

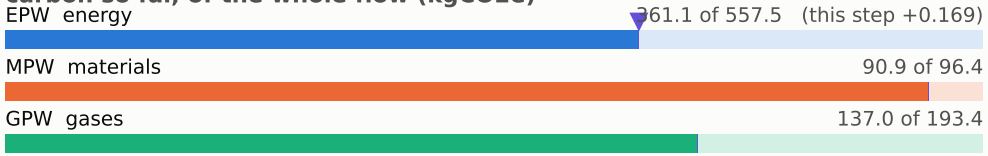

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

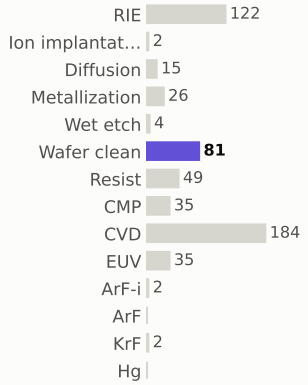

materials deposited (g)

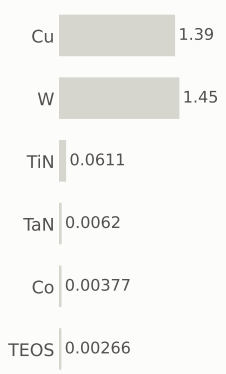

gases emitted (g)

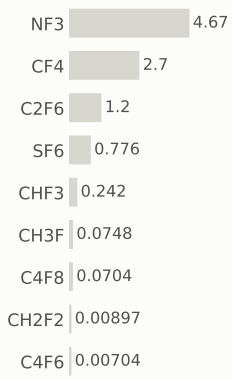

Step #5930: Metallization

depo_ellipsoidal · Metallization

1.2	590.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

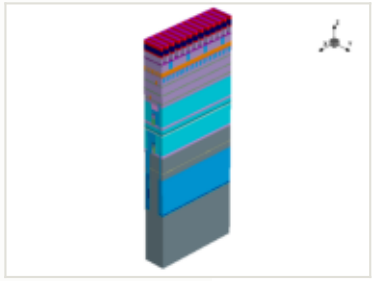

x cut at 0.385 µm

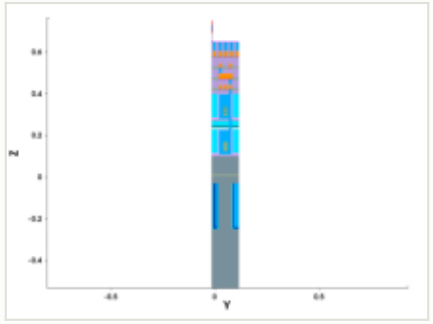

y cut at 0.049 µm

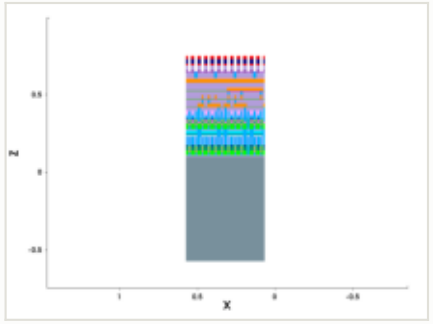

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

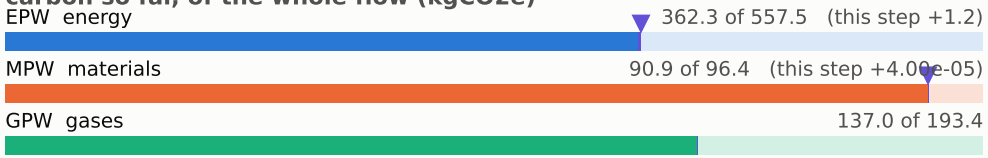

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

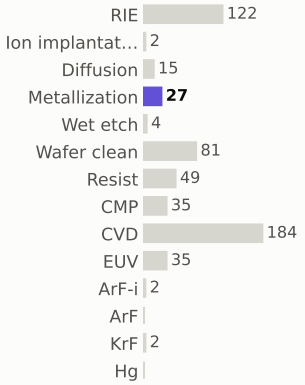

materials deposited (g)

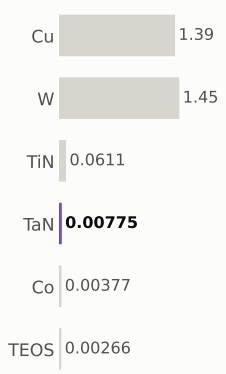

gases emitted (g)

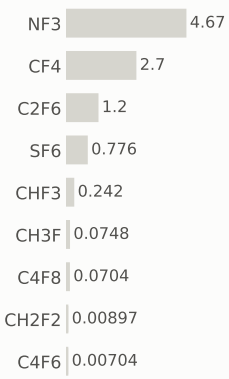

Step #5940: Metallization

depo_fill · Metallization

1.21	591.4	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

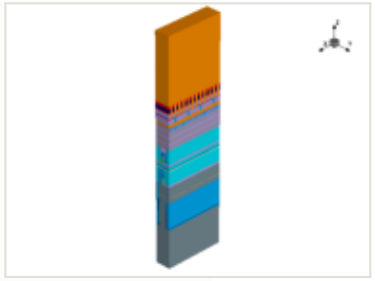

x cut at 0.385 µm

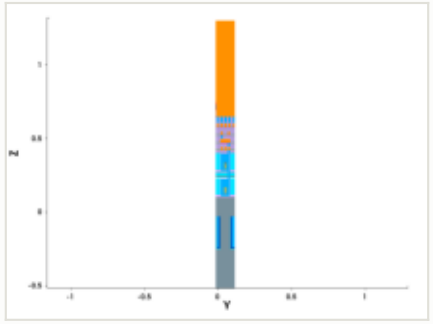

y cut at 0.049 µm

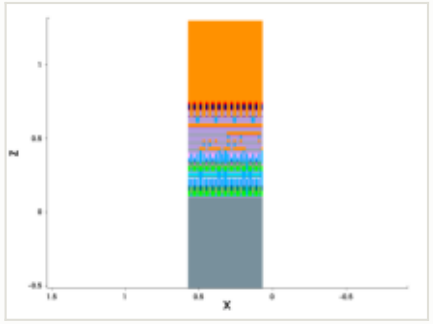

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

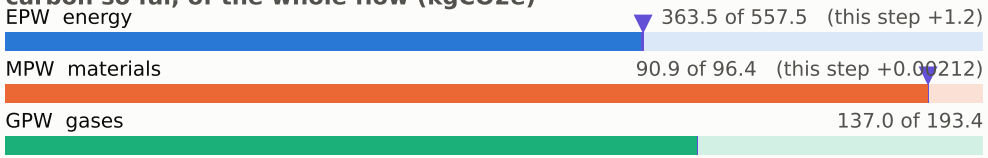

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

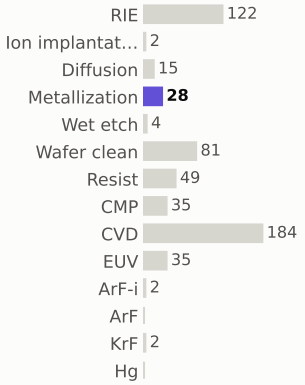

materials deposited (g)

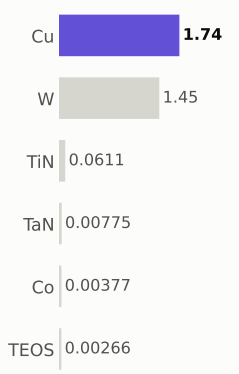

gases emitted (g)

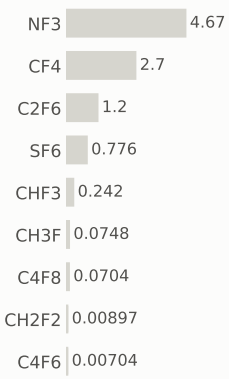

Step #5950: Diffusion

treatment · Diffusion

0.801	592.2	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

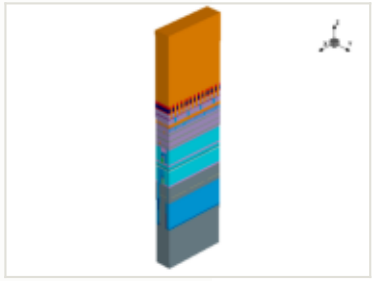

x cut at 0.385 µm

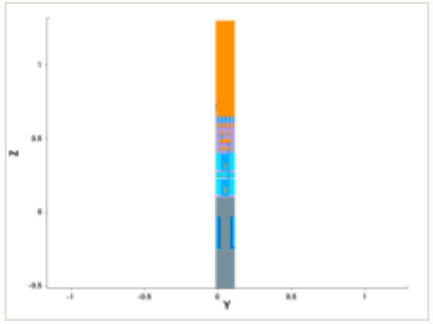

y cut at 0.049 µm

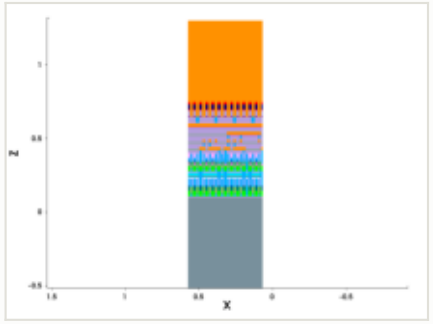

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

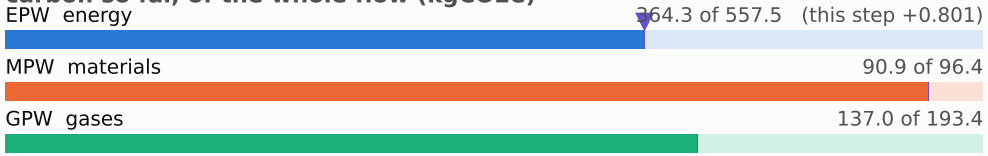

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

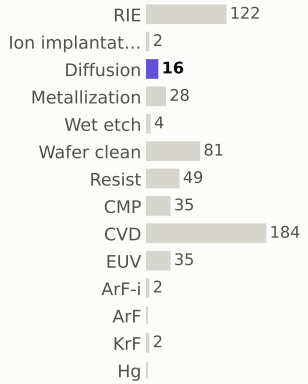

materials deposited (g)

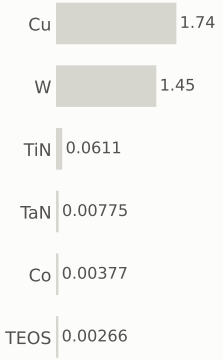

gases emitted (g)

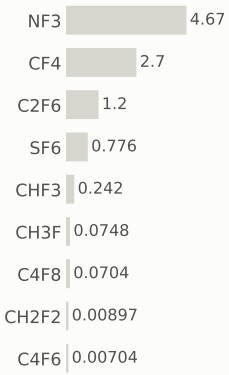

Step #5960: CMP

etch_cmp · CMP

0.169	592.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

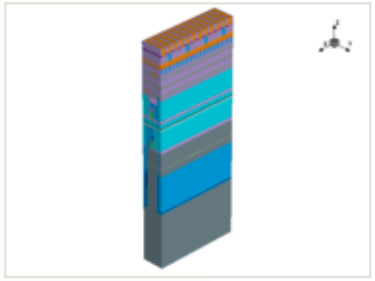

x cut at 0.385 µm

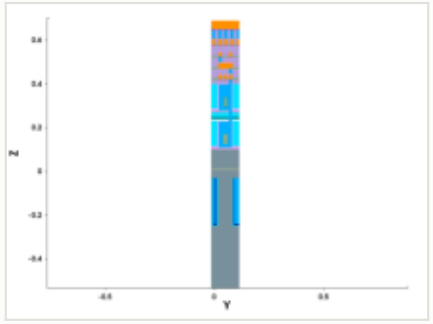

y cut at 0.049 µm

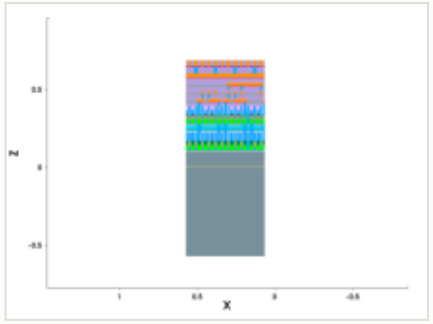

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

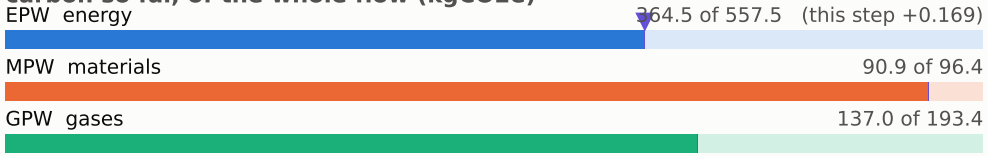

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

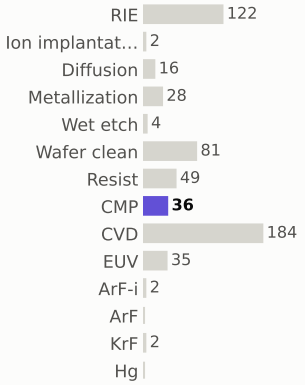

materials deposited (g)

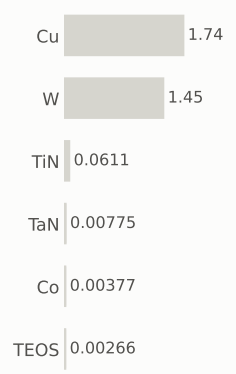

gases emitted (g)

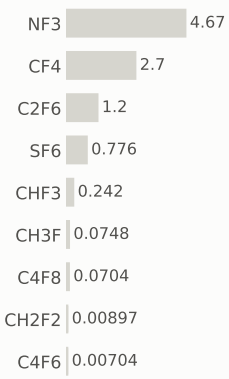

Step #5970: Metallization

depo_isotropic · Metallization

1.2	593.6	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

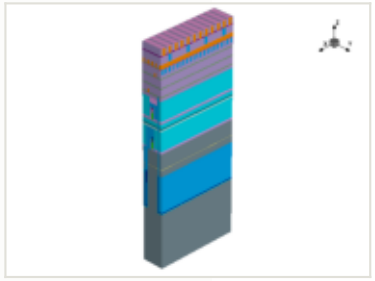

x cut at 0.385 µm

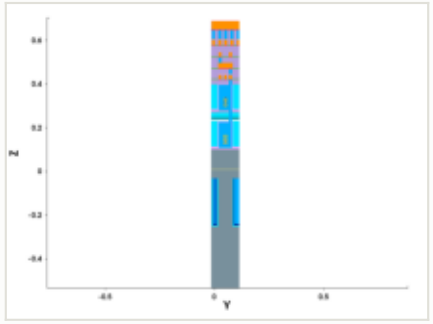

y cut at 0.049 µm

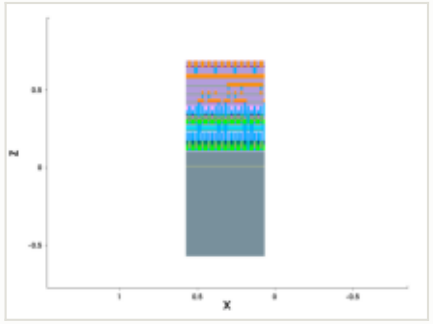

mask for this step

no mask for this step

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

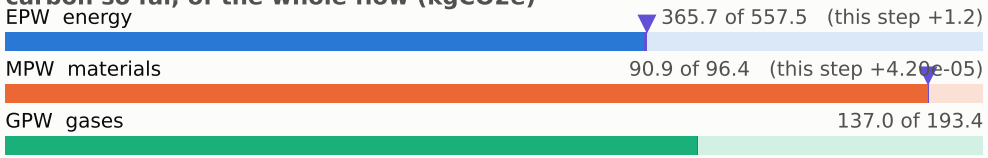

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

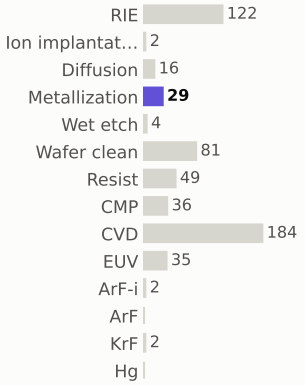

materials deposited (g)

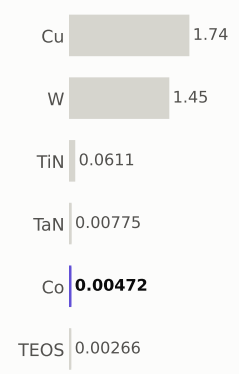

gases emitted (g)

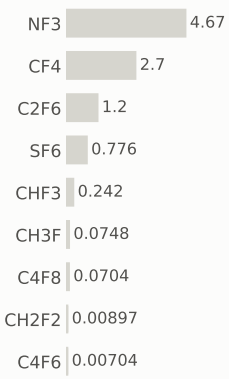

Step #5990: CVD

depo_fill · CVD

1.31	594.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

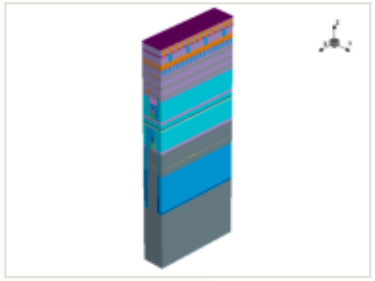

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

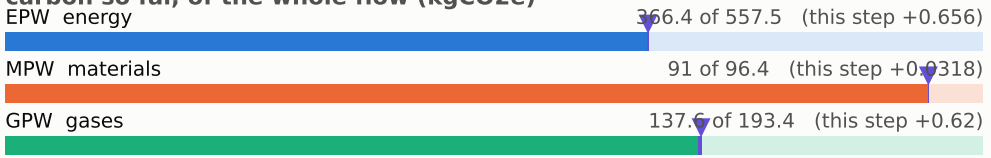

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

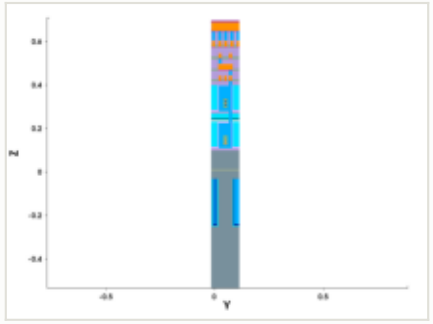

y cut at 0.049 µm

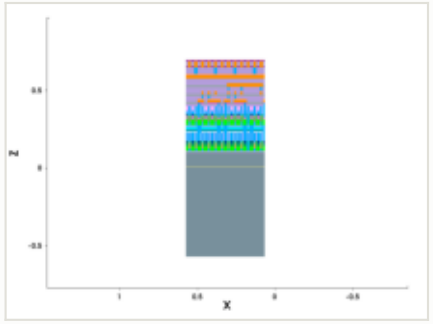

mask for this step

no mask for this step

steps by process area

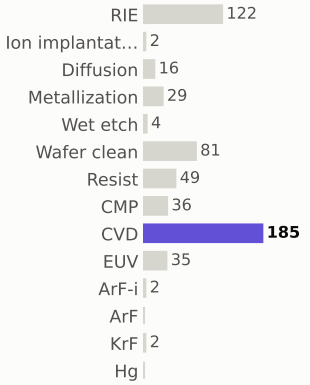

materials deposited (g)

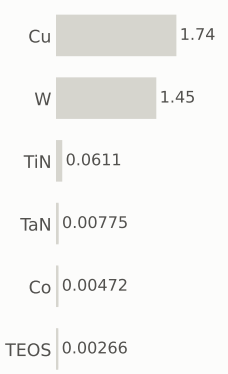

gases emitted (g)



Step #6000: CVD

depo_fill · CVD

1.31	596.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

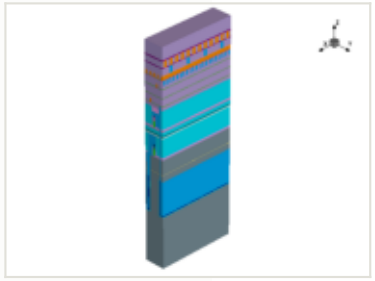

x cut at 0.385 µm

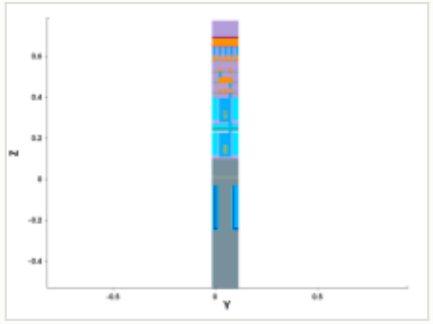

y cut at 0.049 µm

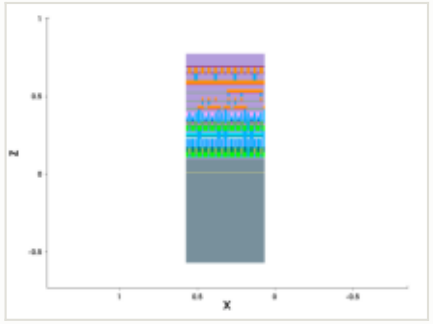

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.078 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

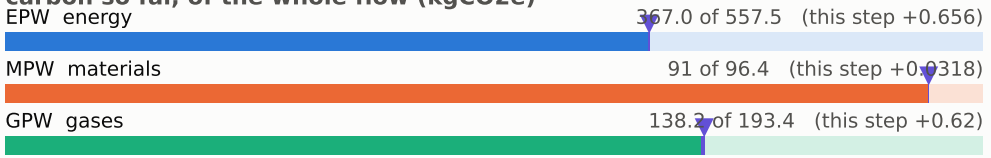

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

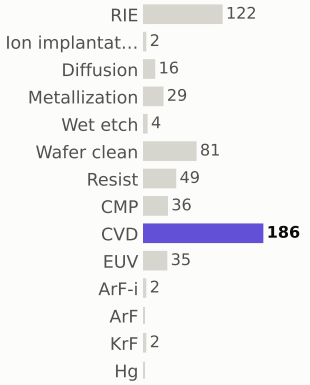

materials deposited (g)

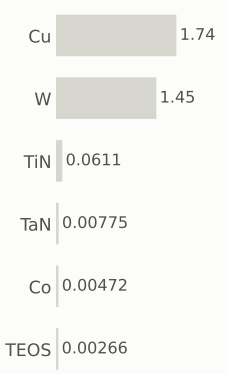

gases emitted (g)

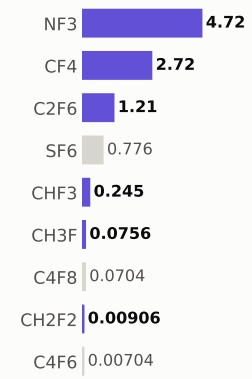

Step #6010: Diffusion

treatment · Diffusion

0.801	597.0	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

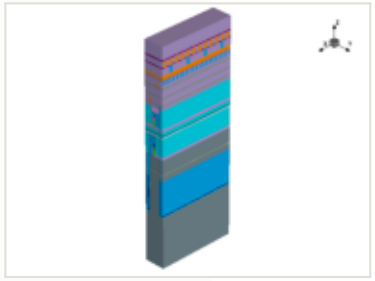

x cut at 0.385 µm

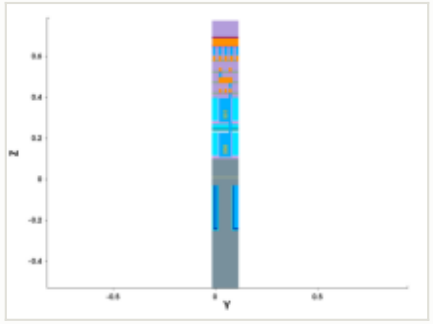

y cut at 0.049 µm

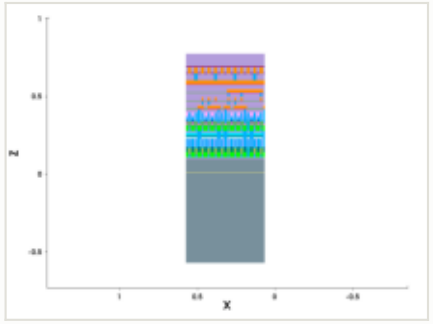

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

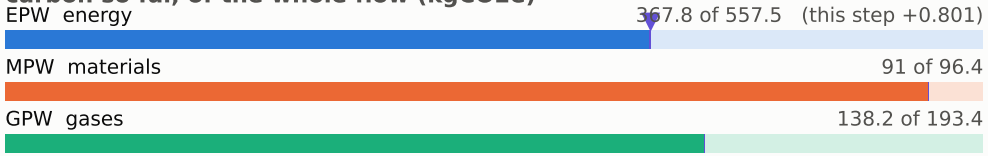

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

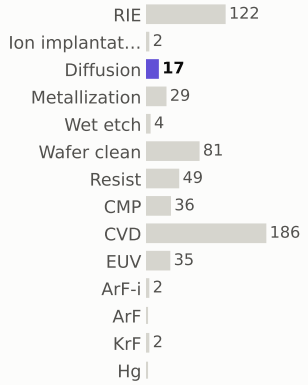

materials deposited (g)

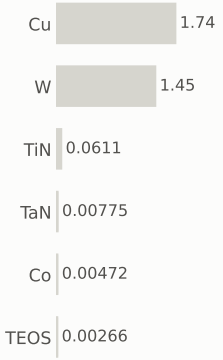

gases emitted (g)

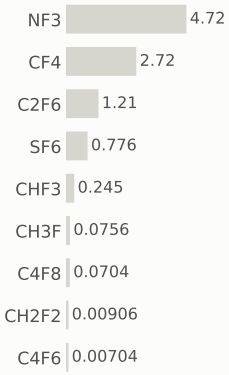

Step #6020: Wafer_clean

clean · Wafer_clean

0.169	597.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

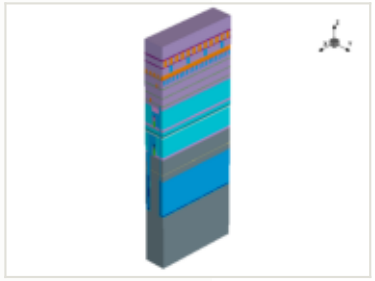

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

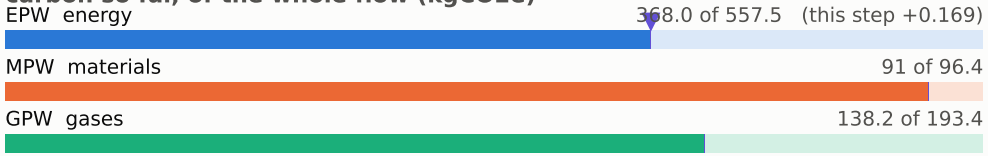

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

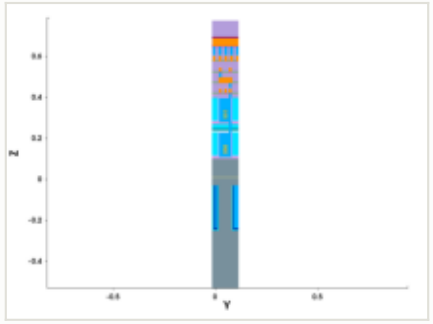

y cut at 0.049 µm

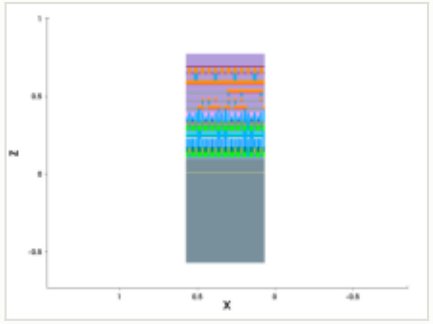

mask for this step

no mask for this step

steps by process area

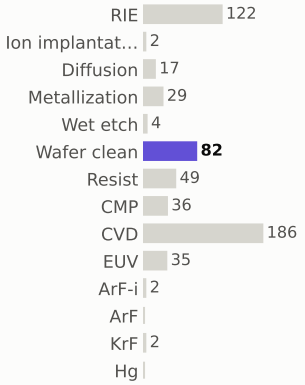

materials deposited (g)

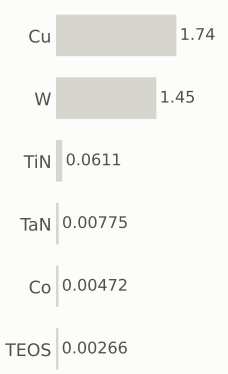

gases emitted (g)

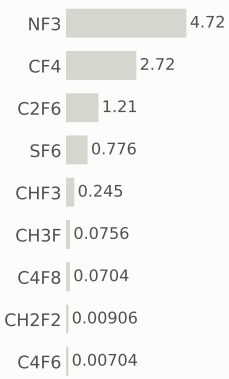

Step #6030: CVD

depo_fill · CVD

1.31	598.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

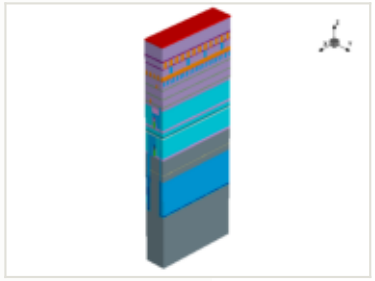

x cut at 0.385 µm

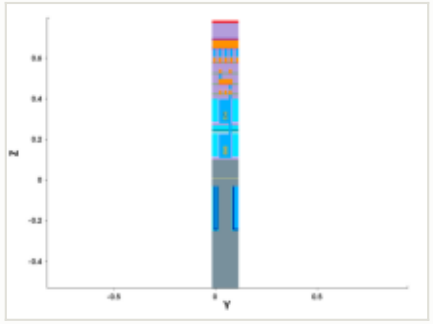

y cut at 0.049 µm

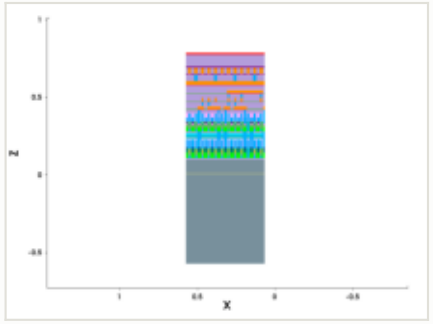

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

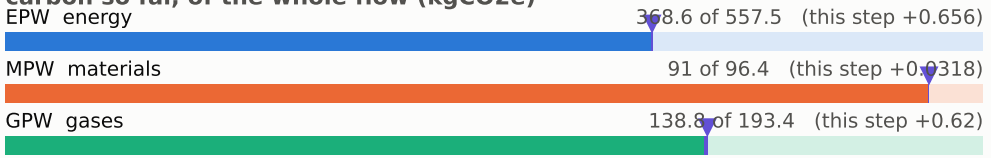

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

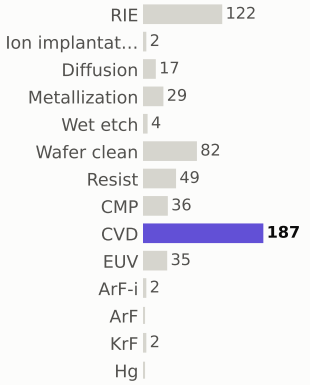

materials deposited (g)

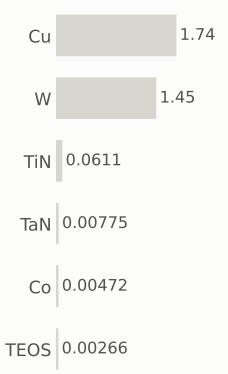

gases emitted (g)

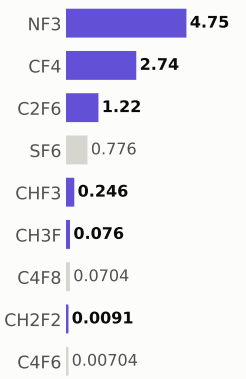

Step #6040: CVD

depo_fill · CVD

1.31	599.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

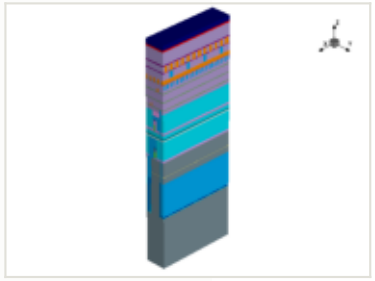

x cut at 0.385 µm

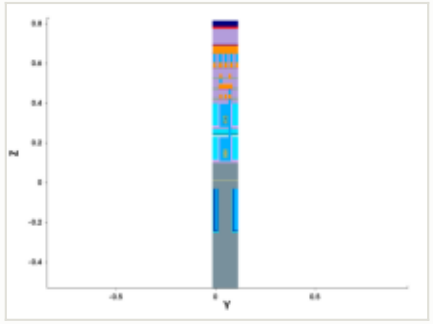

y cut at 0.049 µm

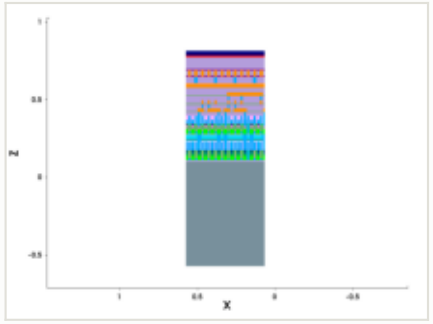

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

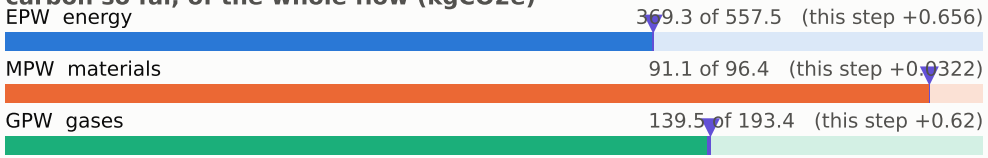

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

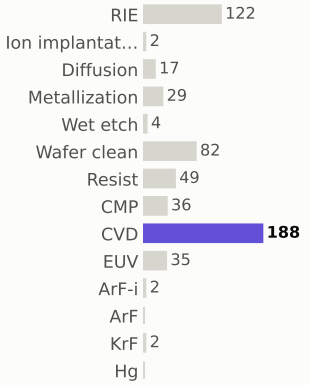

materials deposited (g)

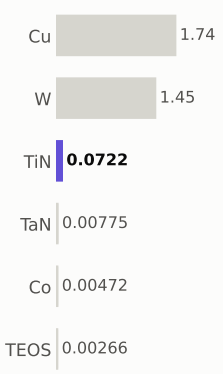

gases emitted (g)

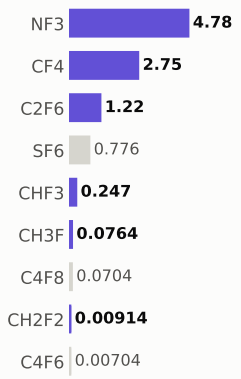

Step #6050: Wafer_clean

clean · Wafer_clean

0.169	600.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

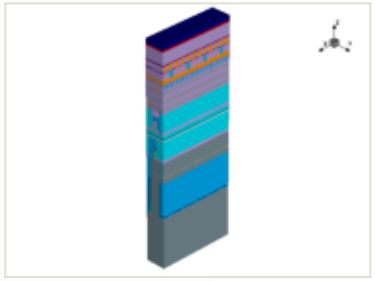

x cut at 0.385 µm

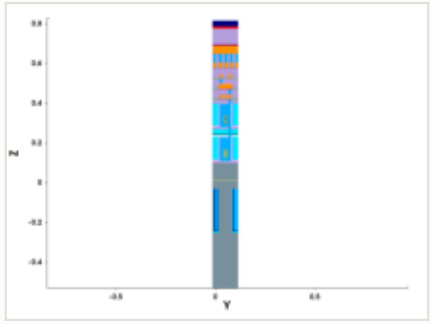

y cut at 0.049 µm

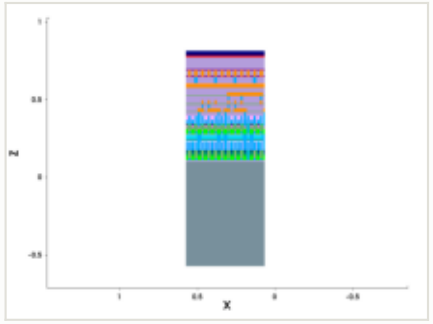

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

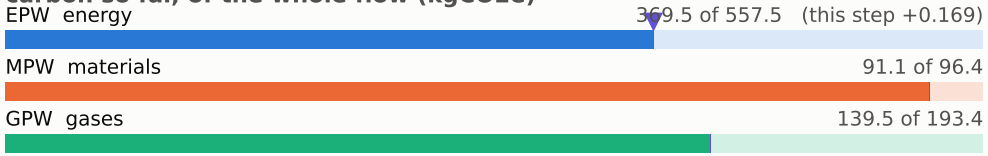

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

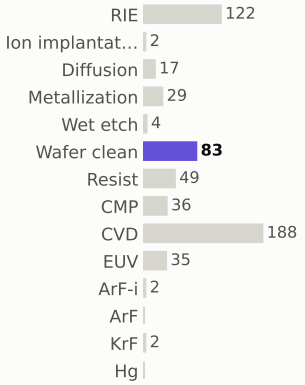

materials deposited (g)

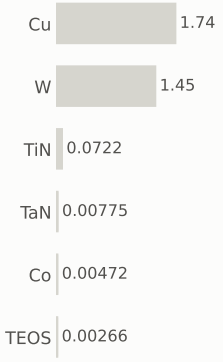

gases emitted (g)

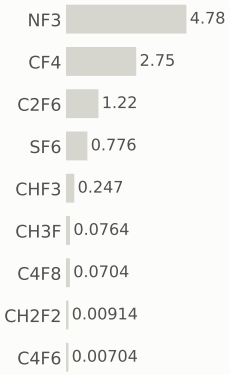

Step #6060: CVD

depo_fill · CVD

1.31	601.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

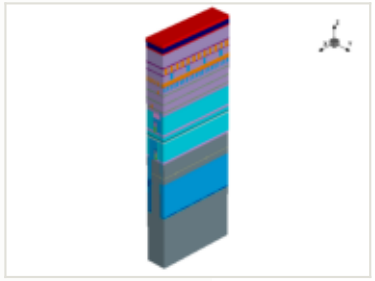

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

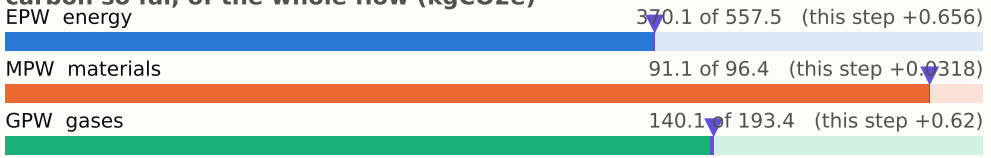

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

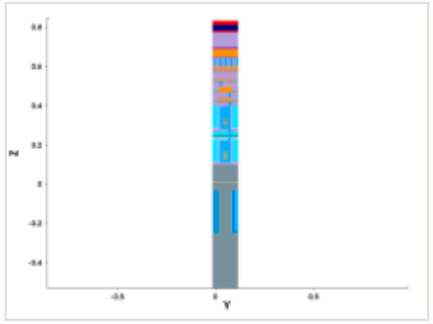

y cut at 0.049 µm

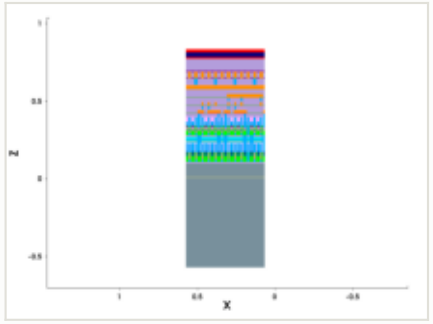

mask for this step

no mask for this step

steps by process area

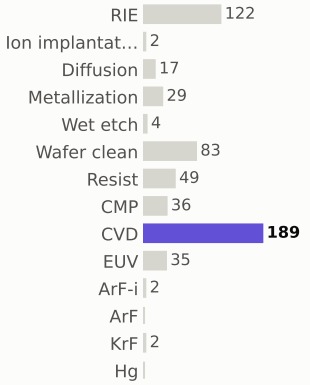

materials deposited (g)

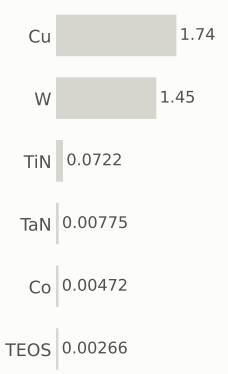

gases emitted (g)

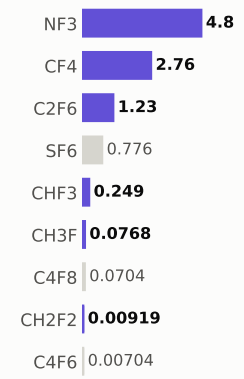

Step #6070: CVD

depo_fill · CVD

1.31	602.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

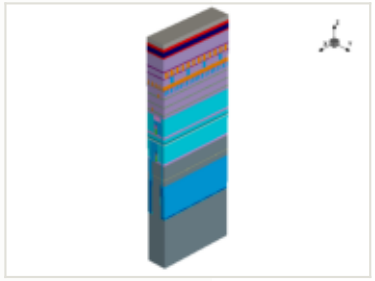

x cut at 0.385 µm

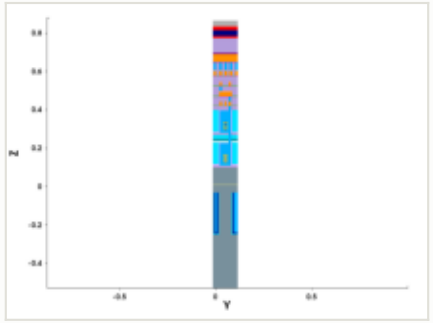

y cut at 0.049 µm

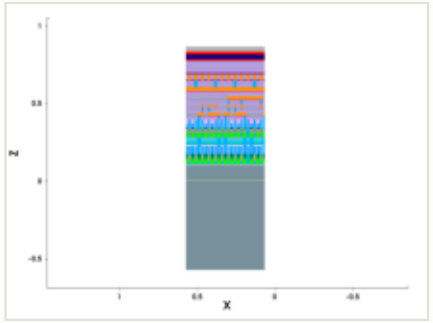

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

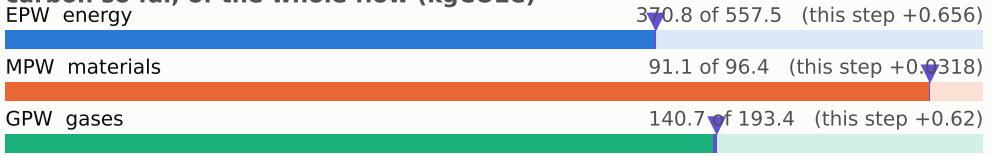

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

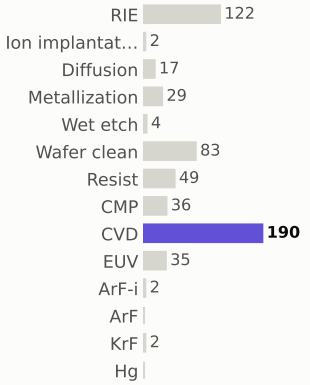

materials deposited (g)

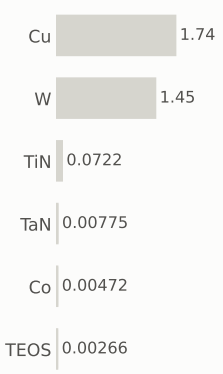

gases emitted (g)

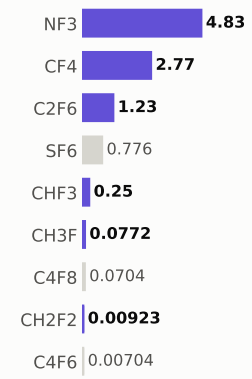

Step #6080: Resist

depo_fill · Resist

0.169	602.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

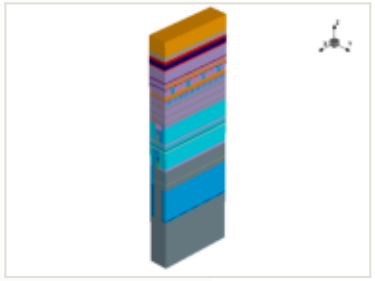

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

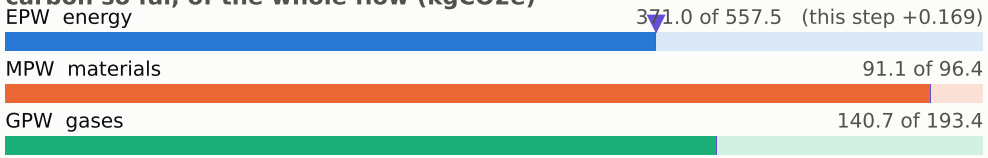

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

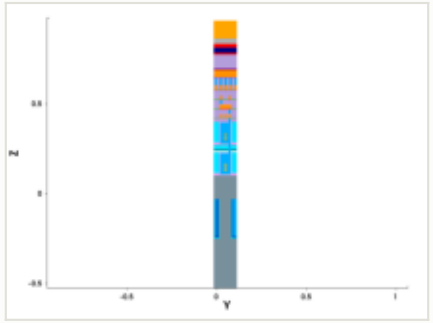

y cut at 0.049 µm

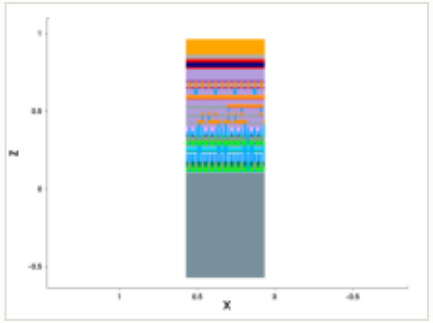

mask for this step

no mask for this step

steps by process area

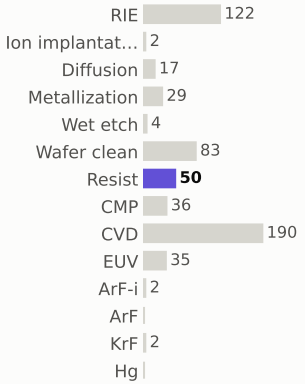

materials deposited (g)



gases emitted (g)



Step #6090: CVD

depo_fill · CVD

1.31	604.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

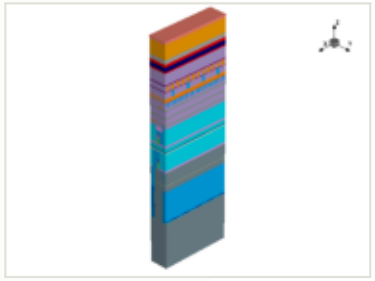

x cut at 0.385 µm

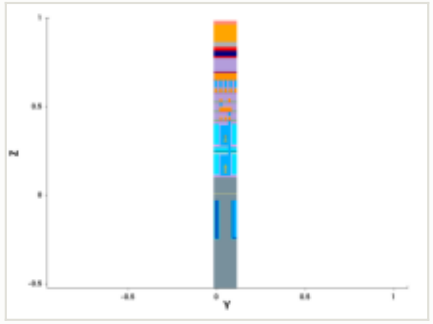

y cut at 0.049 µm

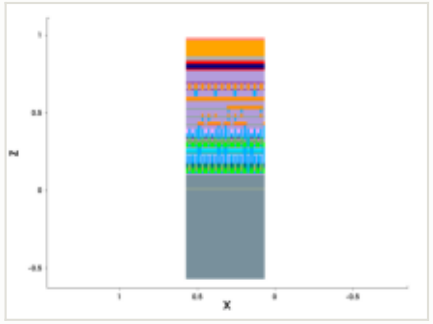

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

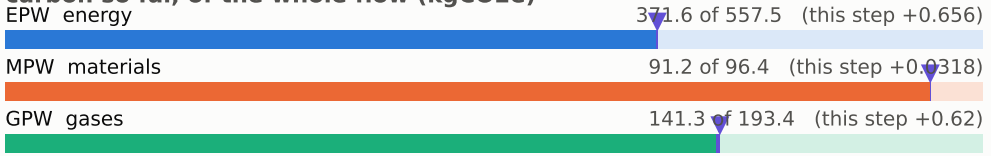

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

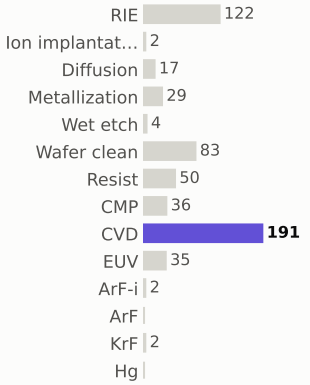

materials deposited (g)



gases emitted (g)



Step #6100: Wafer_clean

clean · Wafer_clean

0.169	604.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

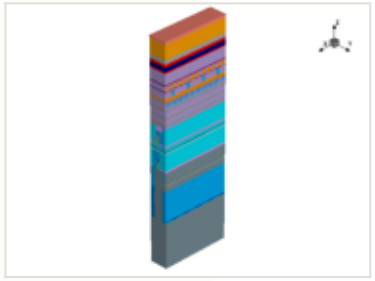

x cut at 0.385 µm

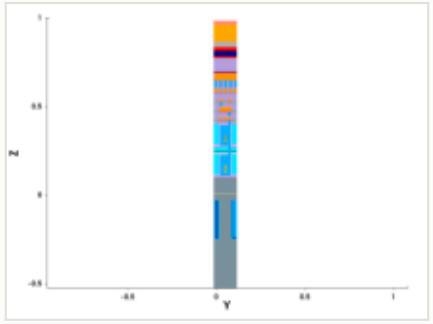

y cut at 0.049 µm

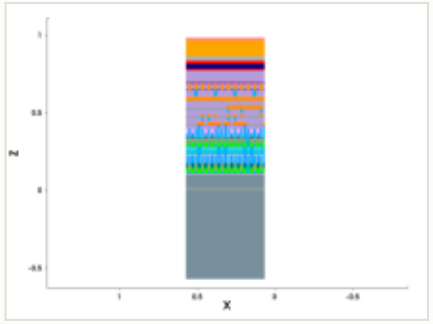

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

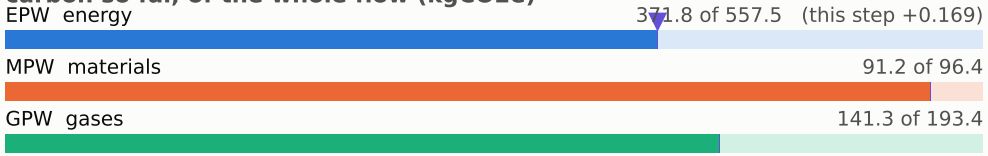

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

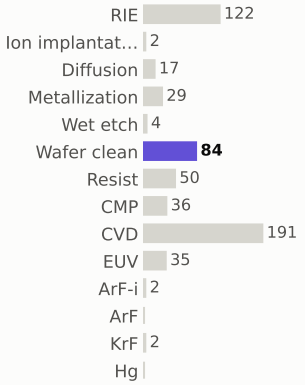

materials deposited (g)

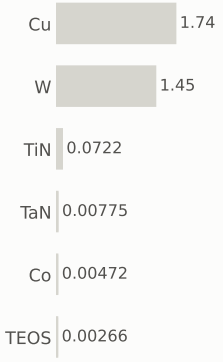

gases emitted (g)

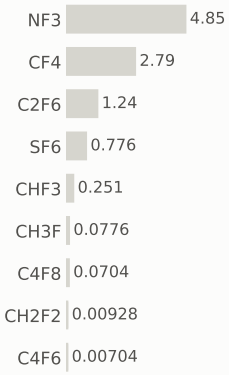

Step #6110: ArF-i

litho_patterning · ArF-i

0.217	604.5	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

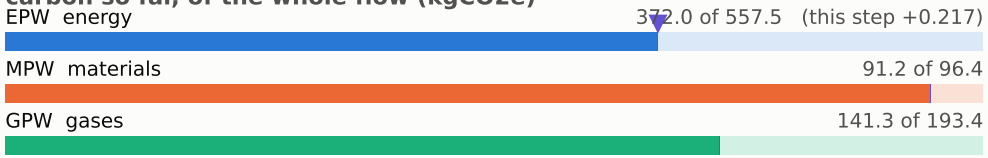

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

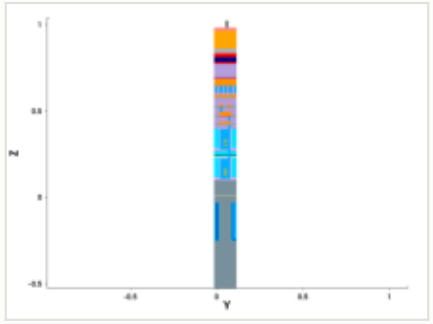

y cut at 0.049 µm

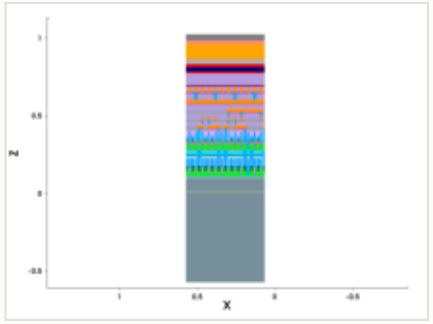

mask: layer 10451:0, positive (GDSII)

steps by process area

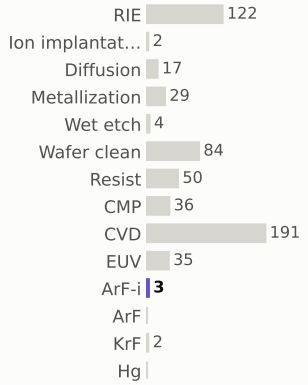

materials deposited (g)



gases emitted (g)

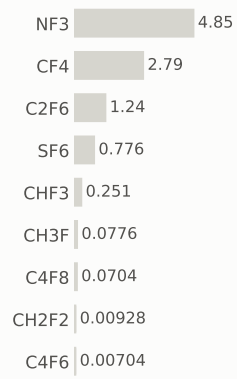

Step #6120: Ion_implantation

treatment · Ion_implantation

0.801	605.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

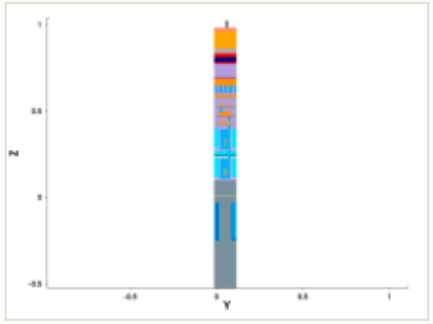

y cut at 0.049 µm

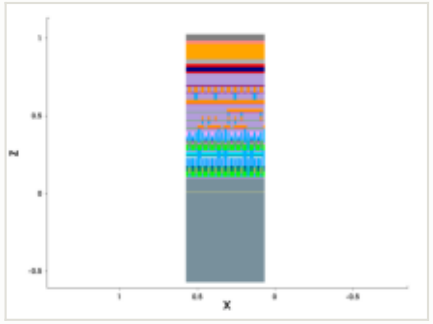

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

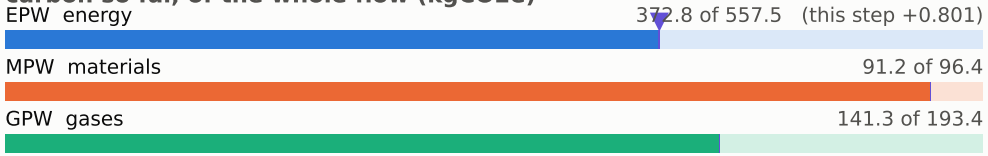

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

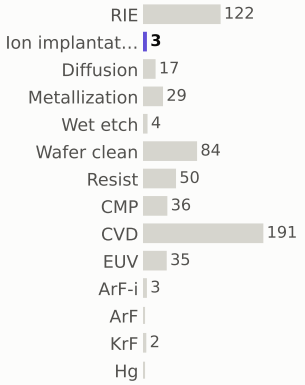

materials deposited (g)

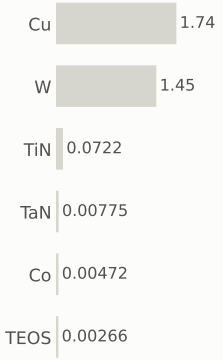

gases emitted (g)

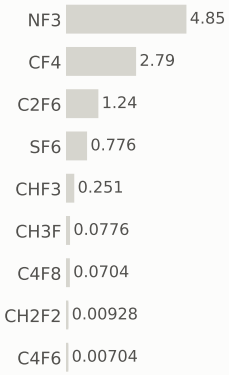

Step #6130: RIE

etch_anisotropic · RIE

1.04	606.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

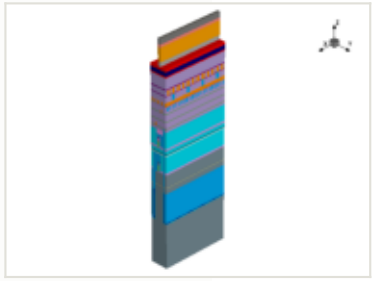

x cut at 0.385 µm

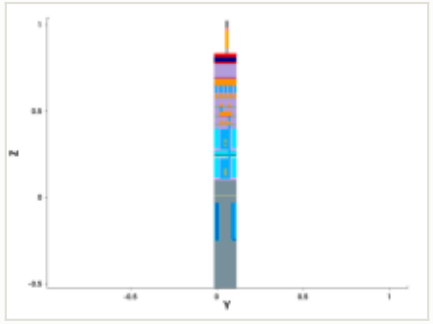

y cut at 0.049 µm

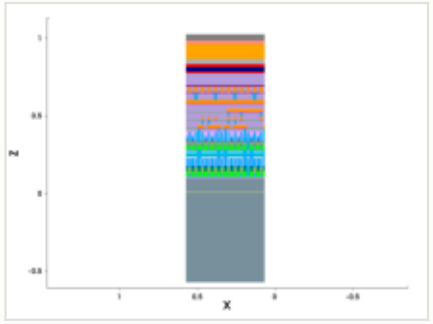

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

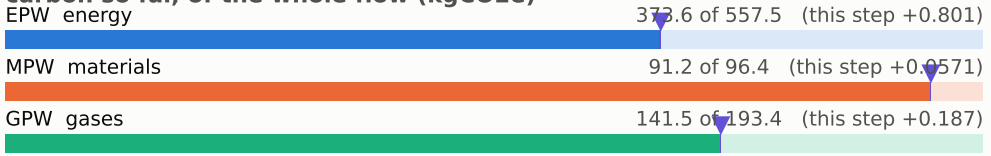

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

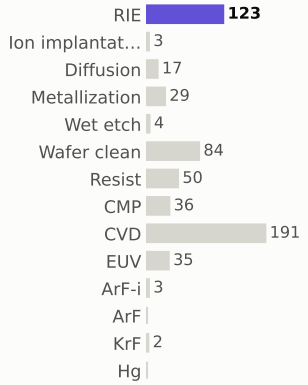

materials deposited (g)

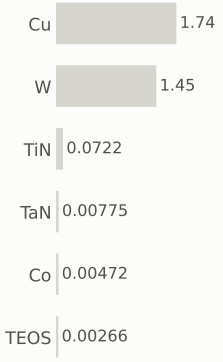

gases emitted (g)

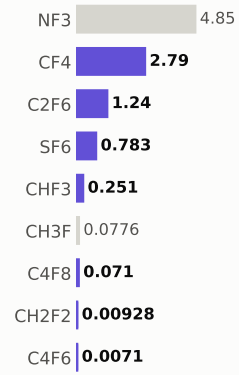

Step #6140: Wafer_clean

etch_strip · Wafer_clean

0.169	606.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

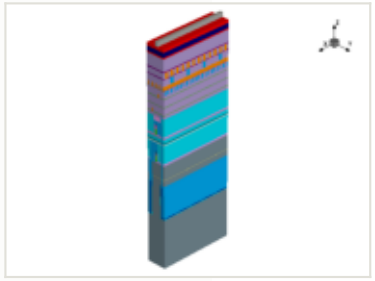

x cut at 0.385 µm

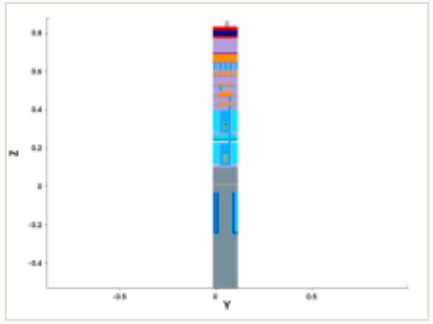

y cut at 0.049 µm

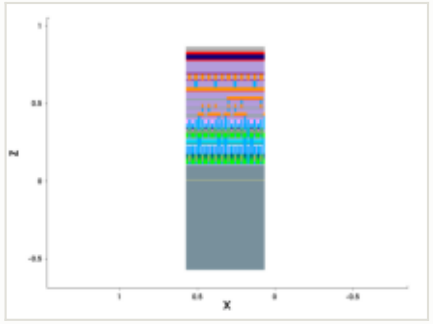

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

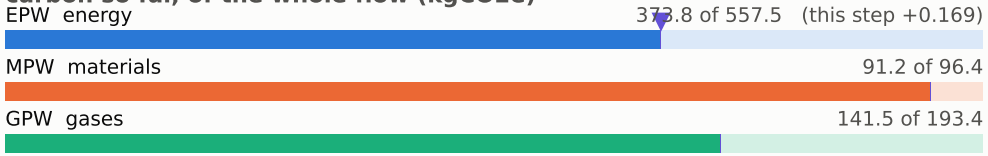

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

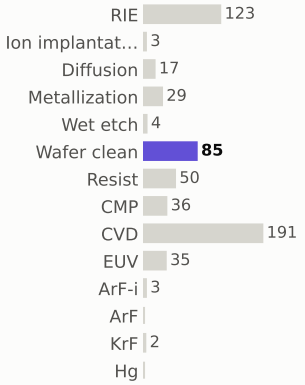

materials deposited (g)

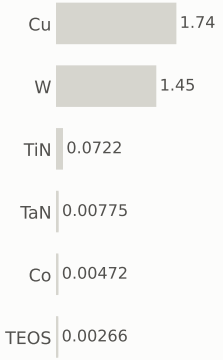

gases emitted (g)

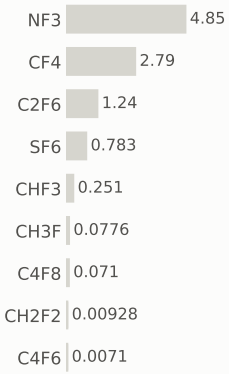

Step #6150: CVD

depo_isotropic · CVD

1.31	607.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

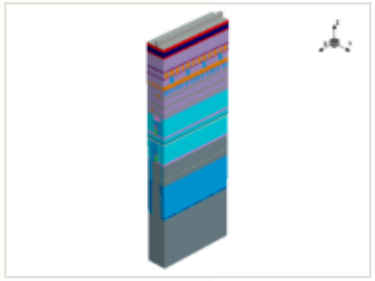

x cut at 0.385 µm

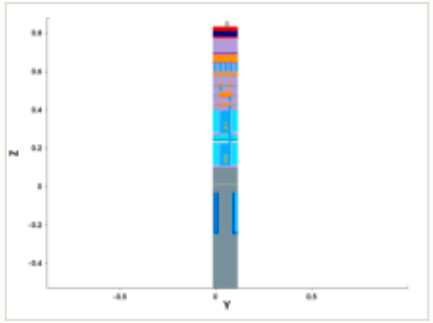

y cut at 0.049 µm

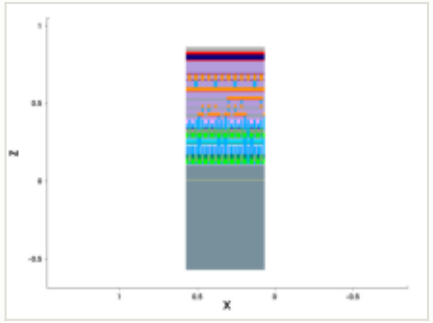

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

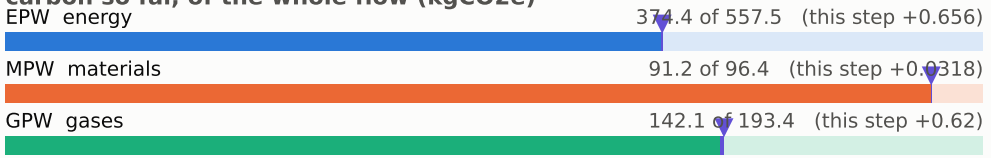

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

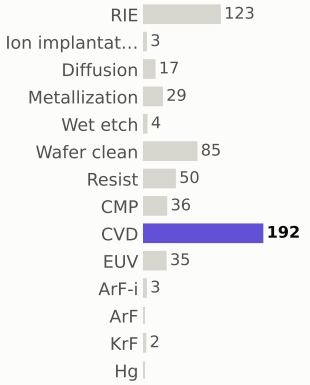

materials deposited (g)

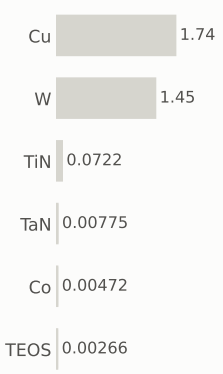

gases emitted (g)

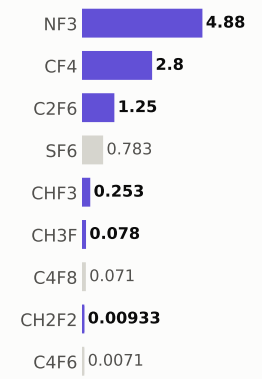

Step #6160: RIE

etch_anisotropic · RIE

1.04	608.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

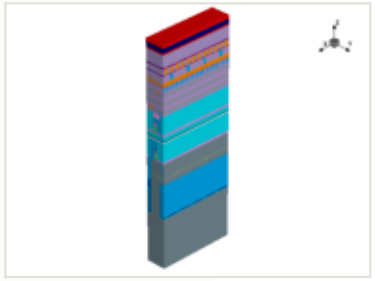

x cut at 0.385 µm

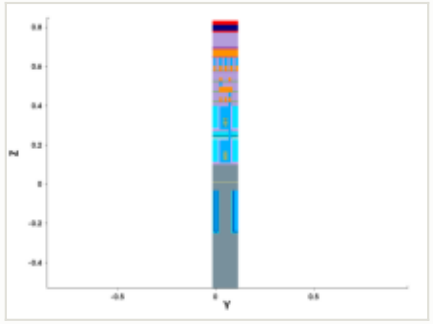

y cut at 0.049 µm

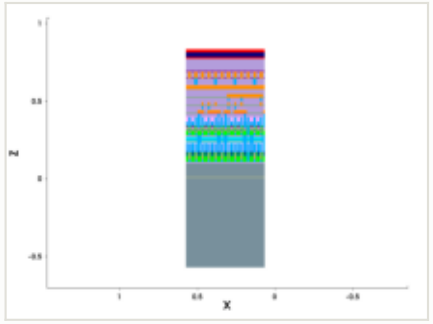

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

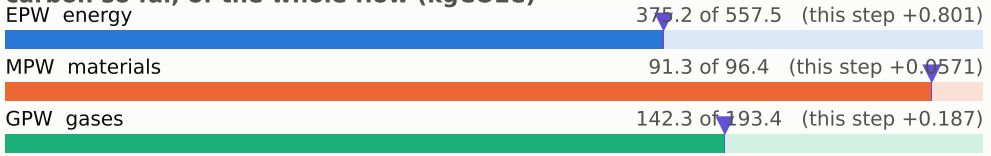

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

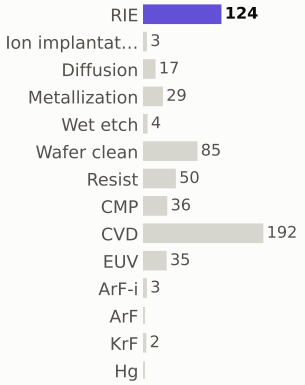

materials deposited (g)

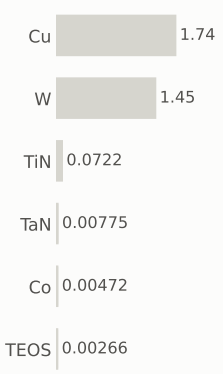

gases emitted (g)

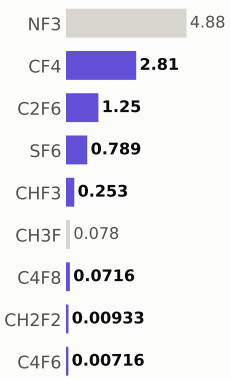

Step #6170: Wafer_clean

etch_strip · Wafer_clean

0.169	609.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

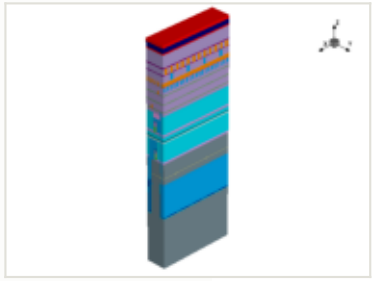

x cut at 0.385 µm

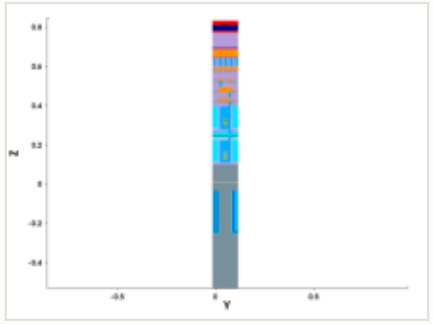

y cut at 0.049 µm

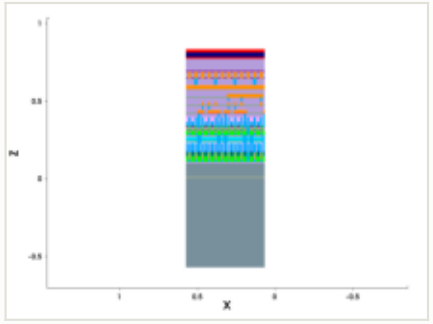

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

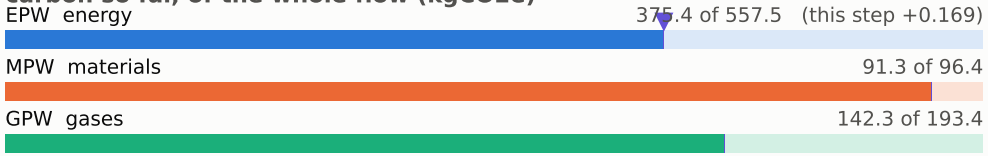

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

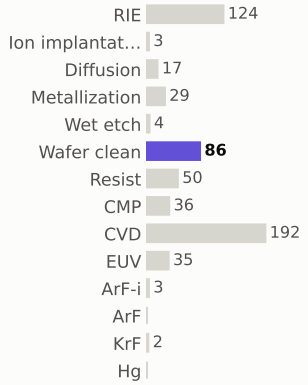

materials deposited (g)

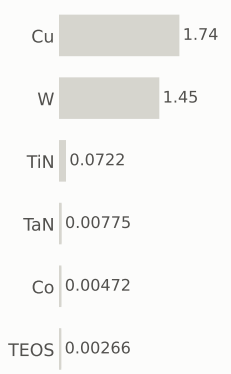

gases emitted (g)

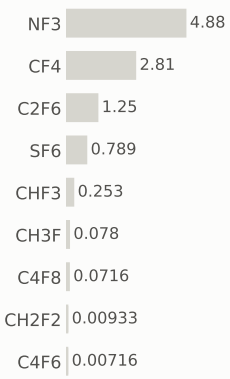

Step #6180: Resist

depo_fill · Resist

0.169	609.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

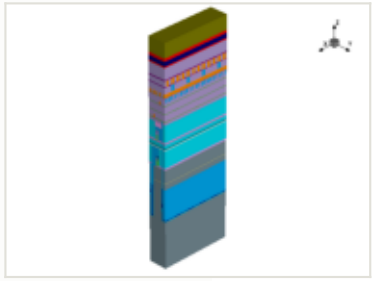

x cut at 0.385 µm

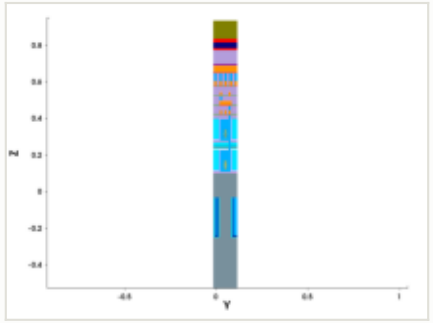

y cut at 0.049 µm

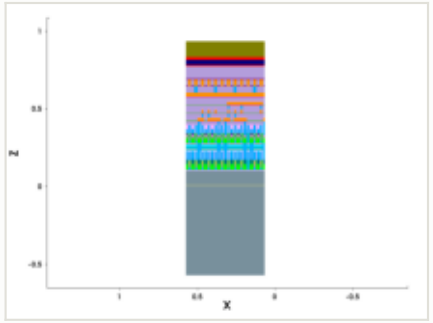

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

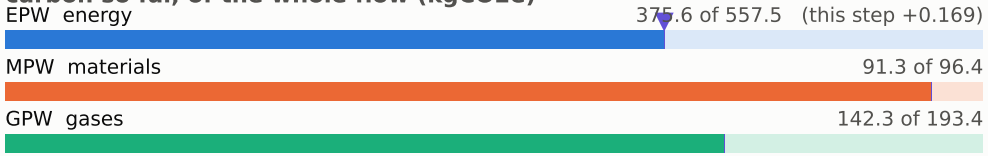

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

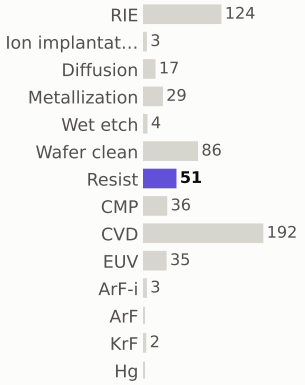

materials deposited (g)

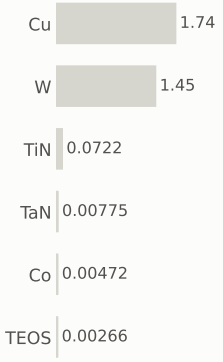

gases emitted (g)

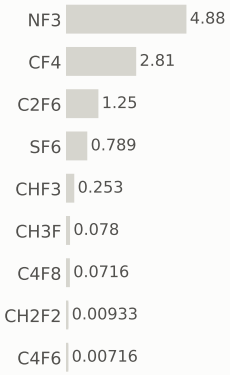

Step #6190: Wafer_clean

clean · Wafer_clean

0.169	609.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

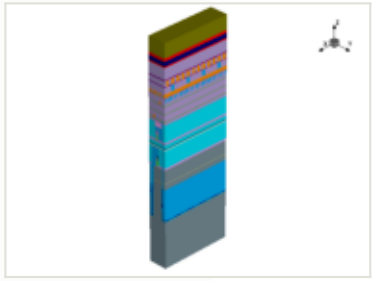

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

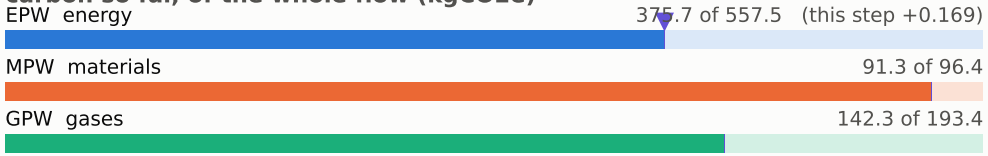

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

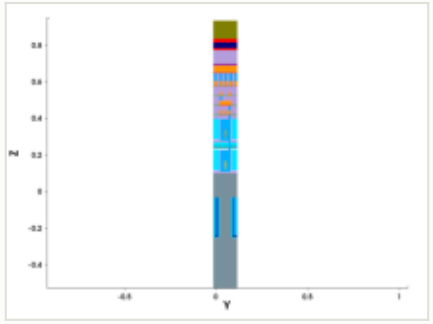

y cut at 0.049 µm

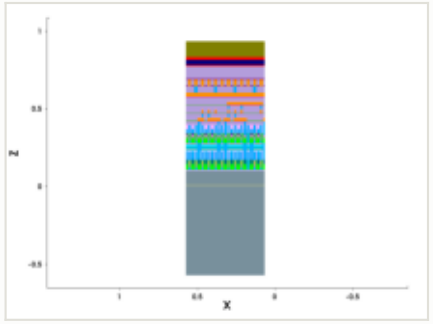

mask for this step

no mask for this step

steps by process area

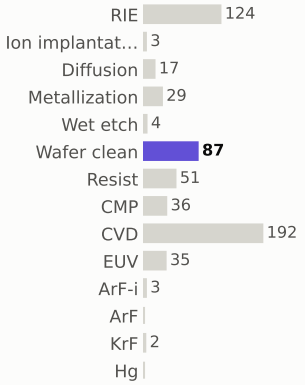

materials deposited (g)

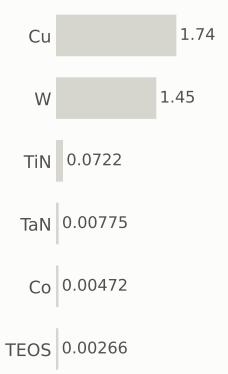

gases emitted (g)

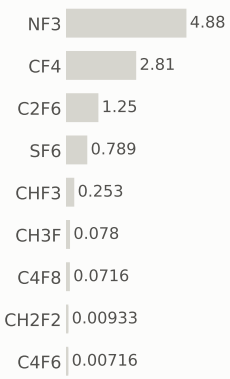

Step #6200: ArF-i

litho_patterning · ArF-i

0.217	609.6	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

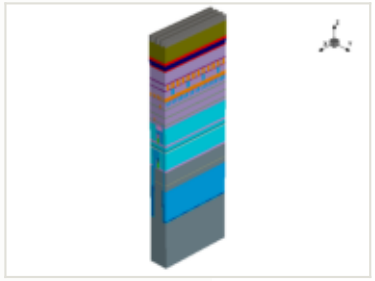

x cut at 0.385 µm

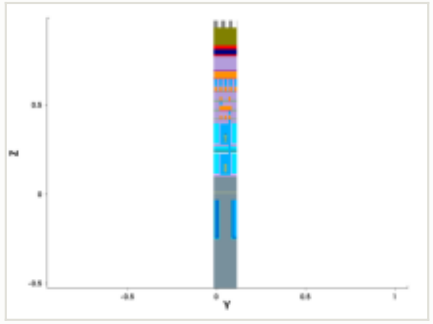

y cut at 0.049 µm

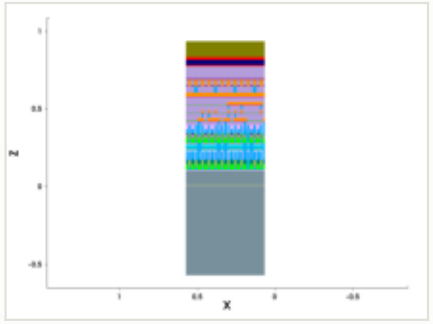

mask: layer 45:0 (GDSII)



this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

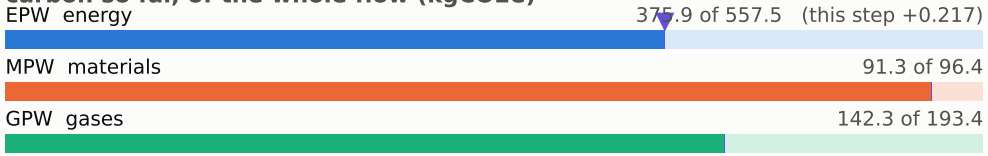

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

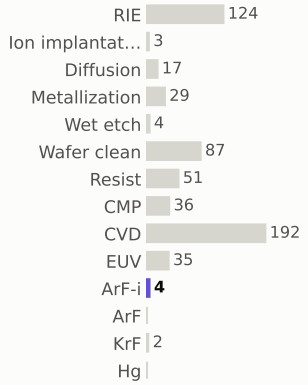

materials deposited (g)



gases emitted (g)

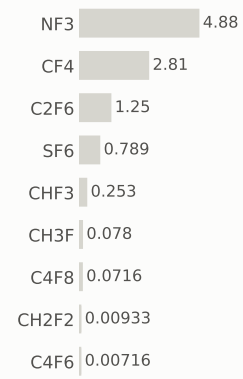

Step #6210: RIE

etch_anisotropic · RIE

1.04	610.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

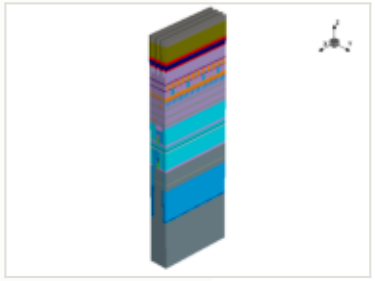

x cut at 0.385 µm

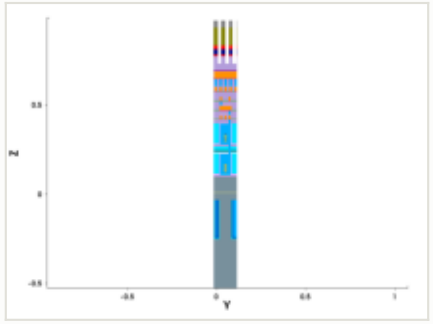

y cut at 0.049 µm

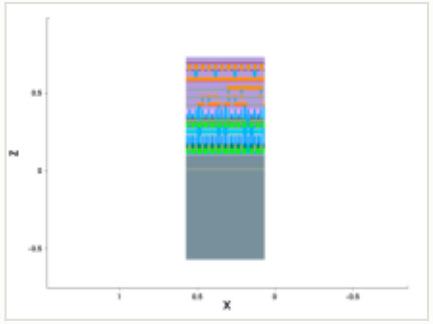

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

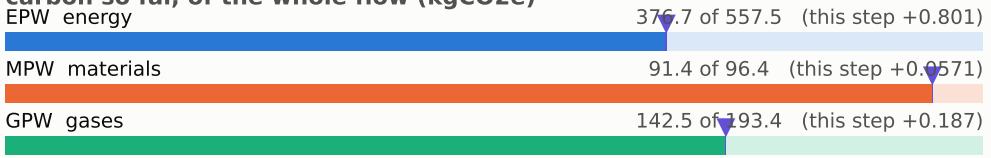

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

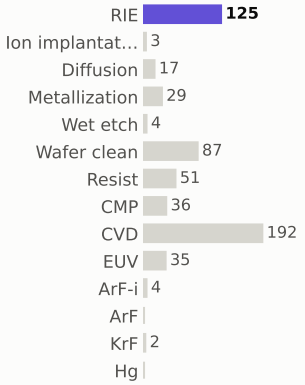

materials deposited (g)

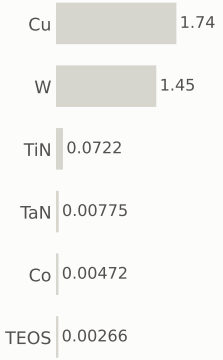

gases emitted (g)

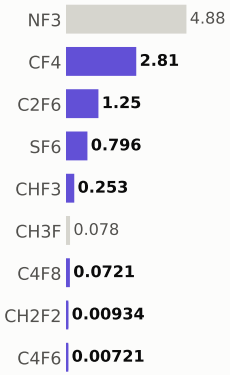

Step #6220: Wafer_clean

etch_strip · Wafer_clean

0.169	610.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

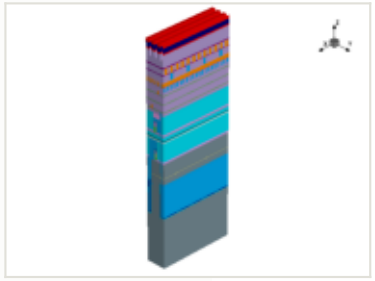

x cut at 0.385 µm

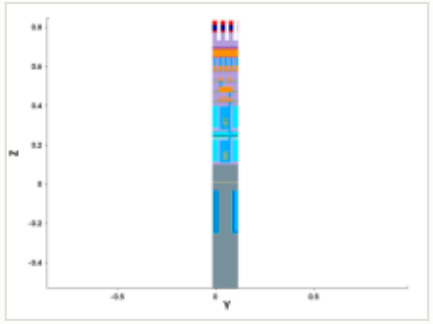

y cut at 0.049 µm

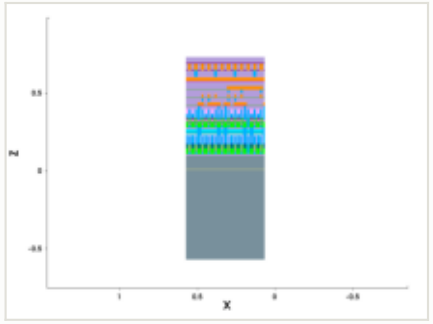

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

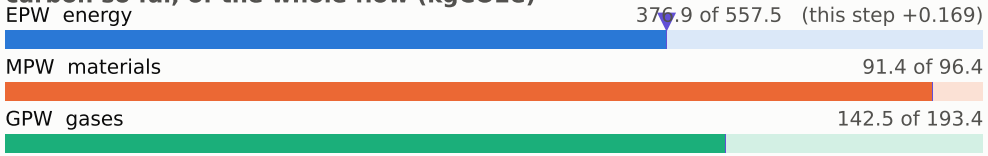

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

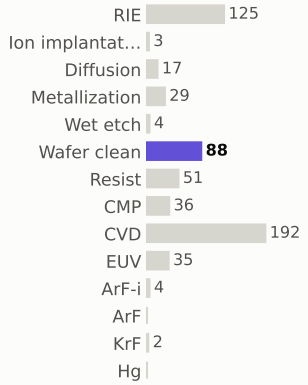

materials deposited (g)

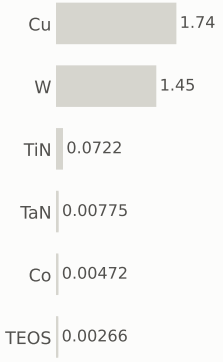

gases emitted (g)

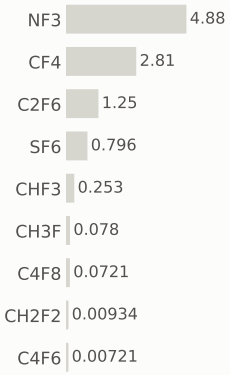

Step #6230: Resist

depo_fill · Resist

0.169	610.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

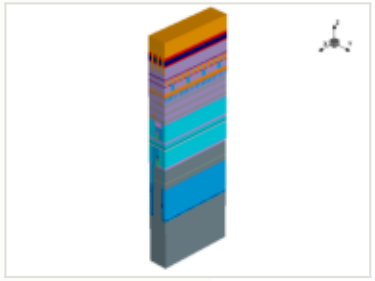

x cut at 0.385 µm

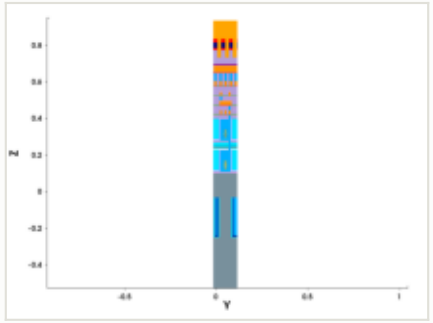

y cut at 0.049 µm

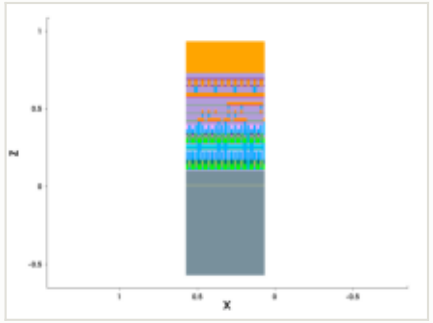

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

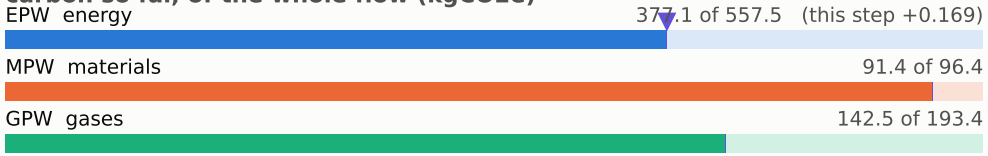

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

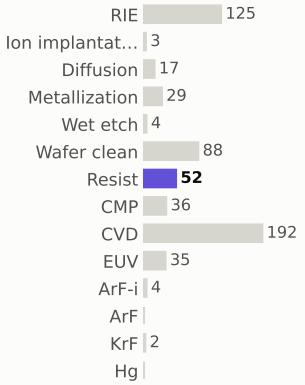

materials deposited (g)



gases emitted (g)

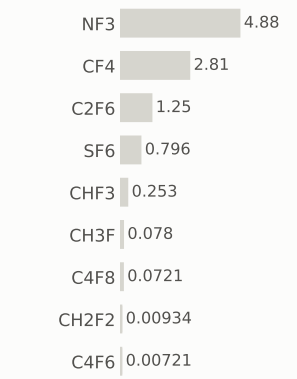

Step #6240: CVD

depo_fill · CVD

1.31	612.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

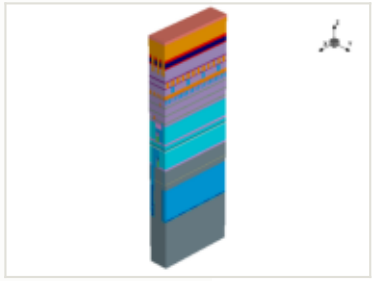

x cut at 0.385 µm

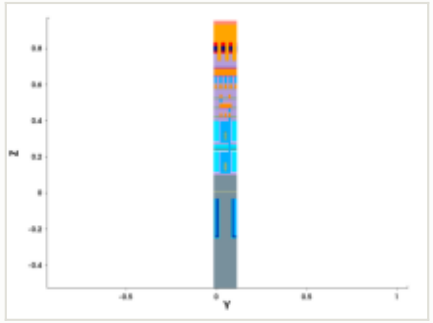

y cut at 0.049 µm

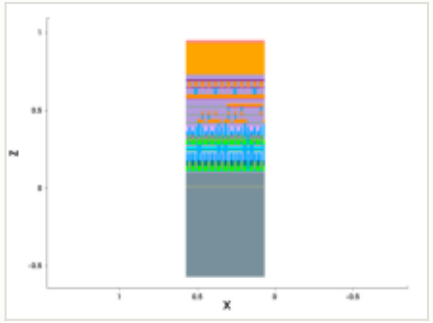

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

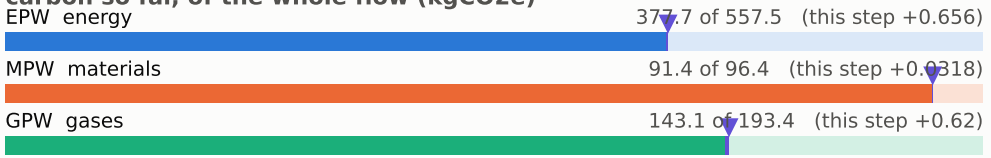

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

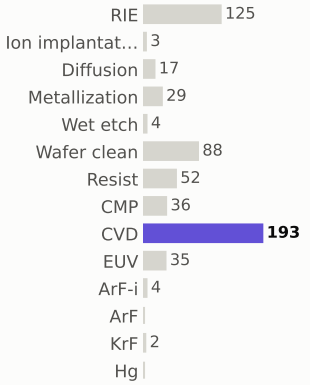

materials deposited (g)



gases emitted (g)

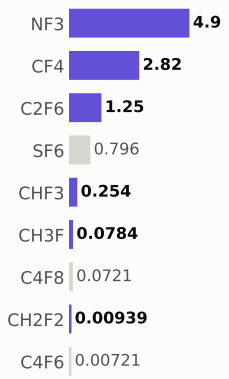

Step #6250: Wafer_clean

clean · Wafer_clean

0.169	612.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

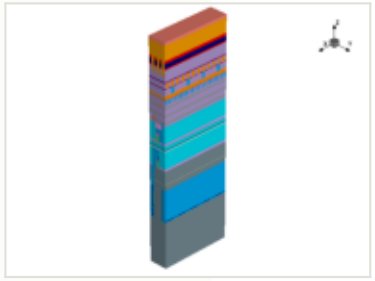

x cut at 0.385 µm

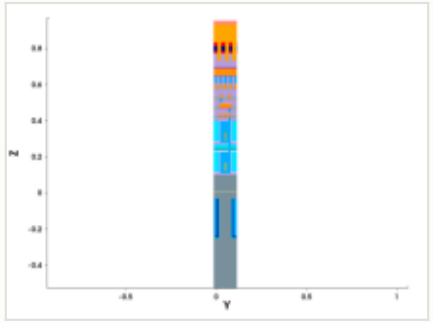

y cut at 0.049 µm

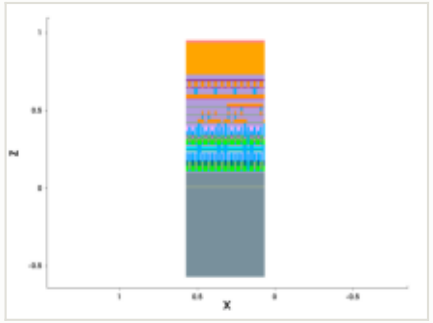

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

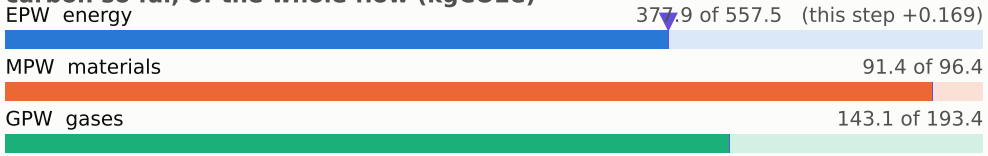

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

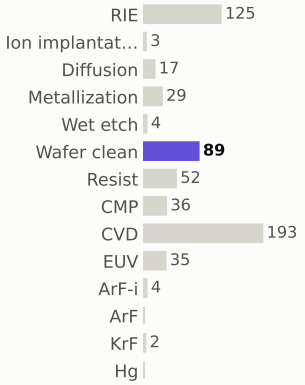

materials deposited (g)

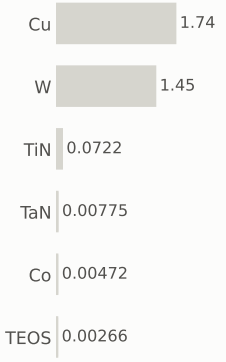

gases emitted (g)

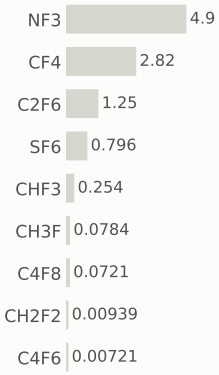

Step #6260: ArF-i

litho_patterning · ArF-i

0.217	612.6	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

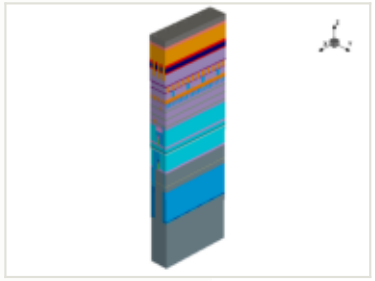

x cut at 0.385 µm

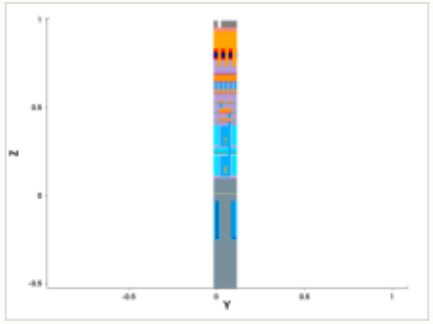

y cut at 0.049 µm

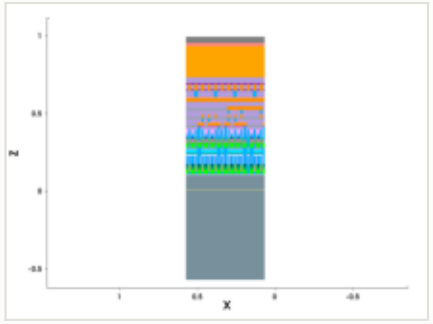

mask: layer 10421:0 (GDSII)

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

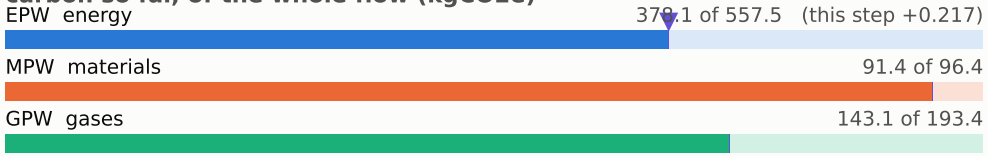

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

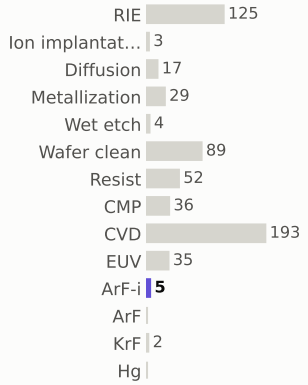

materials deposited (g)

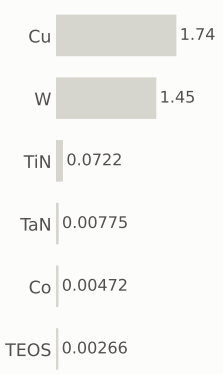

gases emitted (g)

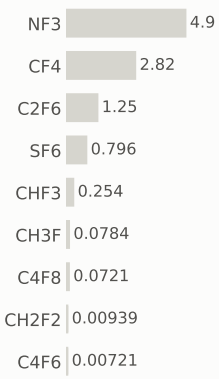

Step #6270: RIE

etch_anisotropic · RIE

1.04	613.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

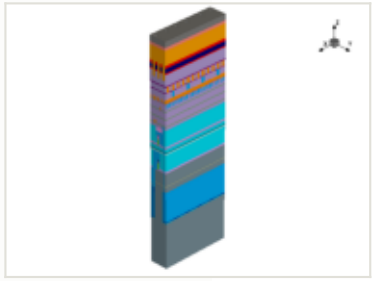

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

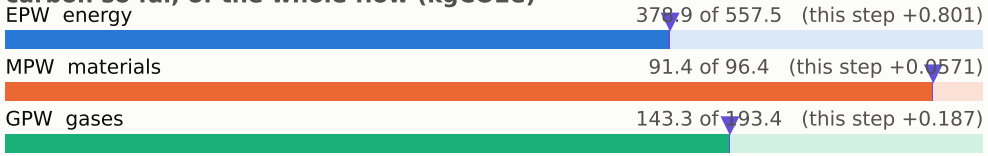

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

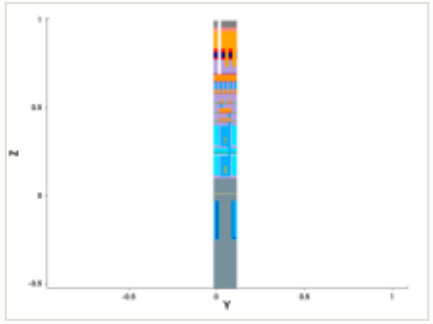

y cut at 0.049 µm

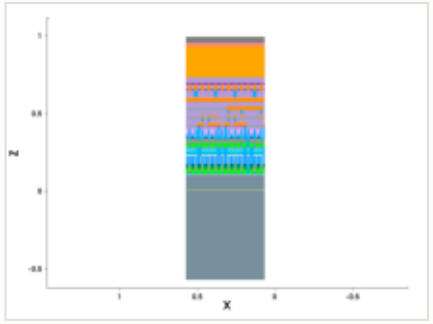

mask for this step

no mask for this step

steps by process area

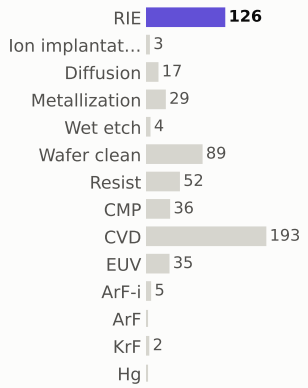

materials deposited (g)

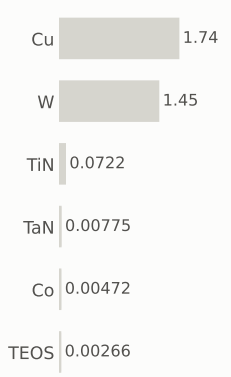

gases emitted (g)



Step #6280: Wafer_clean

etch_strip · Wafer_clean

0.169	613.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

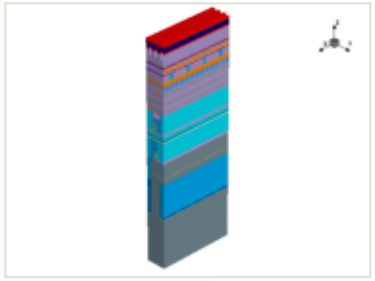

x cut at 0.385 µm

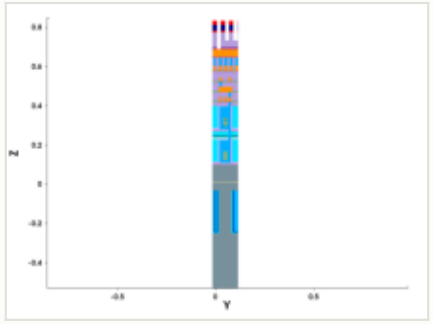

y cut at 0.049 µm

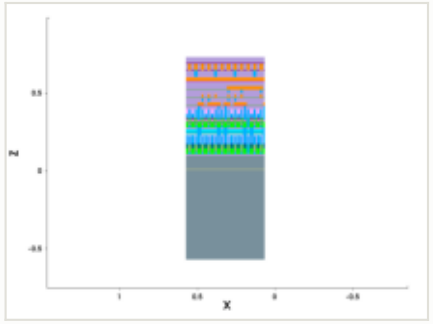

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

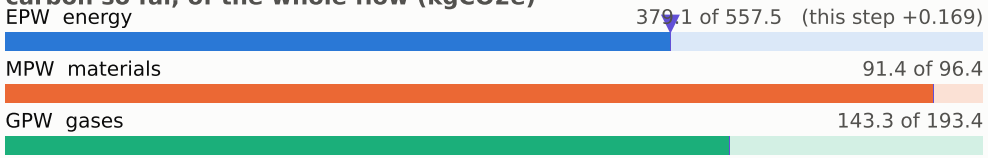

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

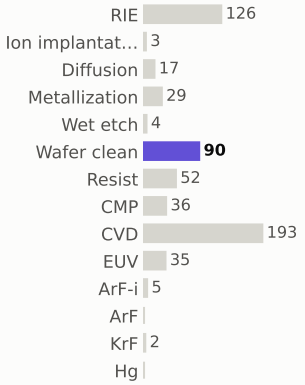

materials deposited (g)

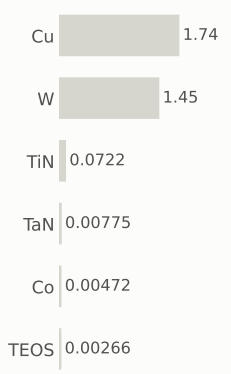

gases emitted (g)

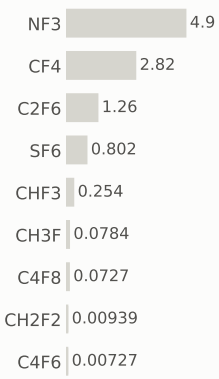

Step #6290: Resist

depo_fill · Resist

0.169	614.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

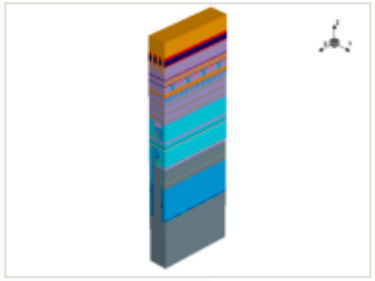

x cut at 0.385 µm

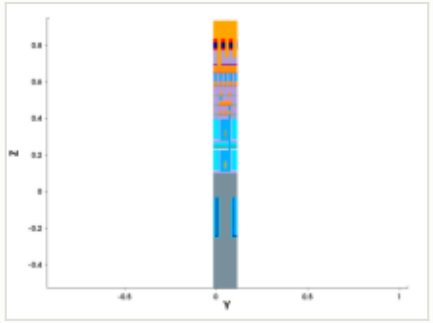

y cut at 0.049 µm

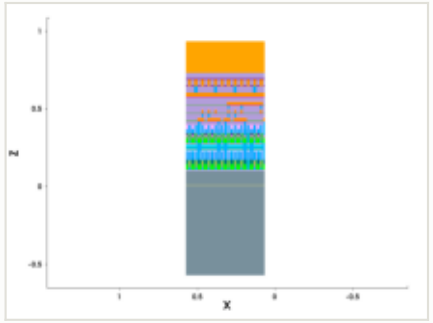

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

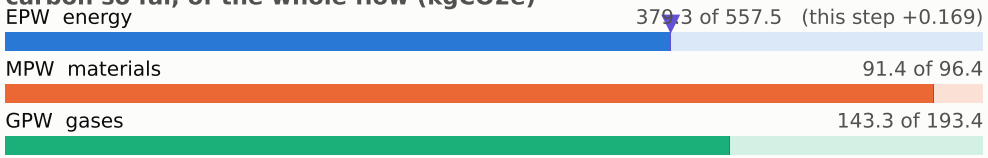

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

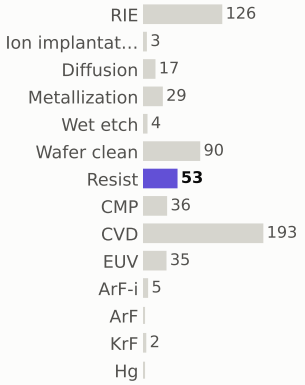

materials deposited (g)

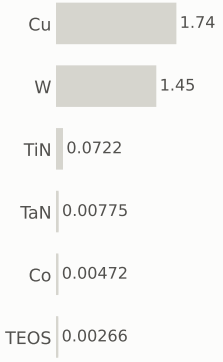

gases emitted (g)

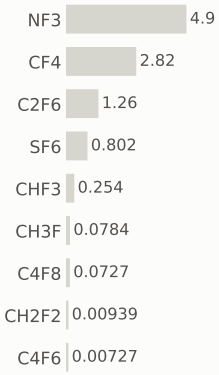

Step #6300: CVD

depo_fill · CVD

1.31	615.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

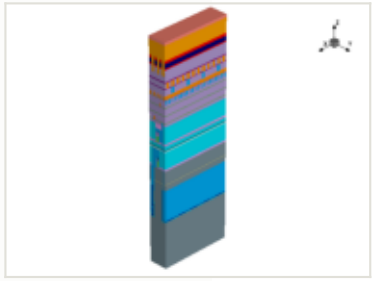

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

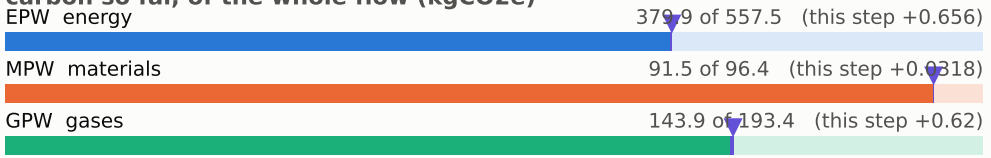

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

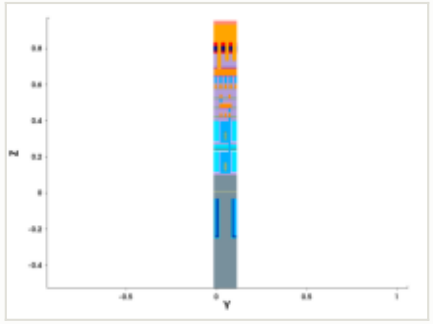

y cut at 0.049 µm

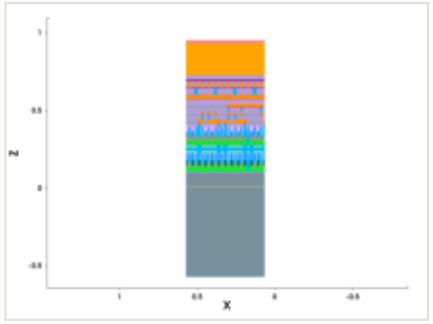

mask for this step

no mask for this step

steps by process area

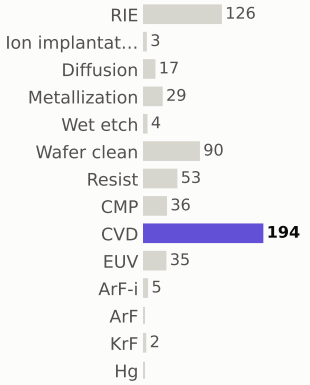

materials deposited (g)

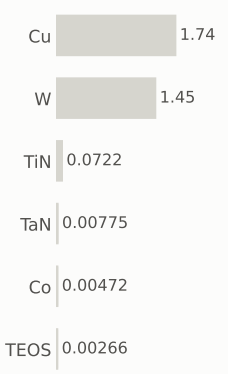

gases emitted (g)



Step #6310: Wafer_clean

clean · Wafer_clean

0.169	615.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

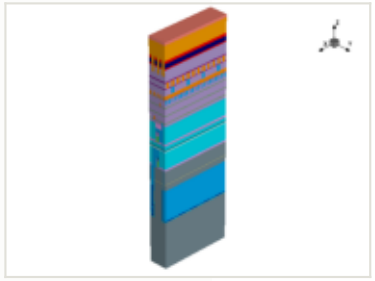

x cut at 0.385 µm

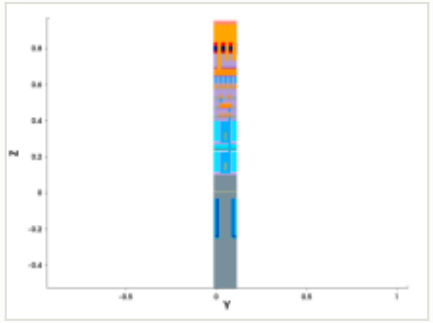

y cut at 0.049 µm

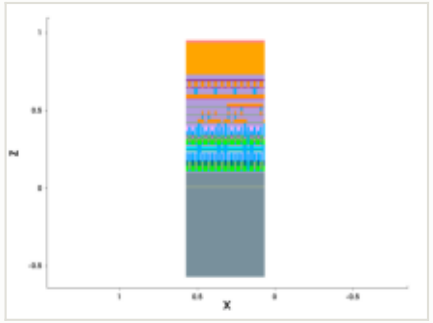

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

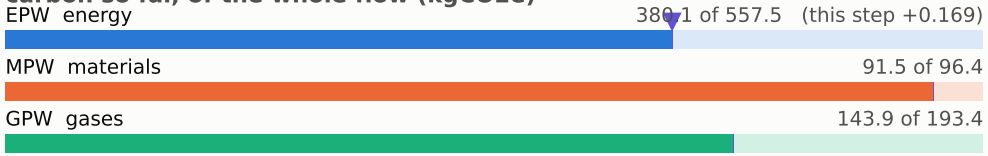

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

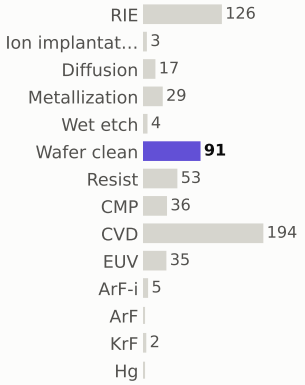

materials deposited (g)



gases emitted (g)

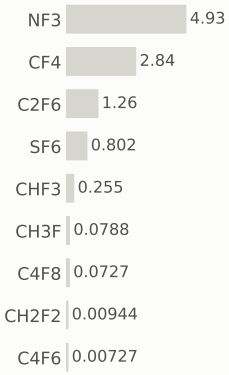

Step #6320: ArF-i

litho_patterning · ArF-i

0.217	615.7	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

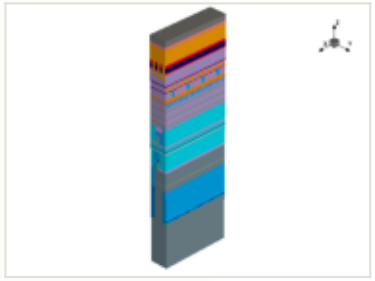

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

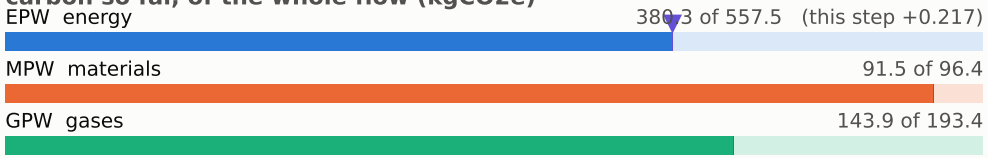

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

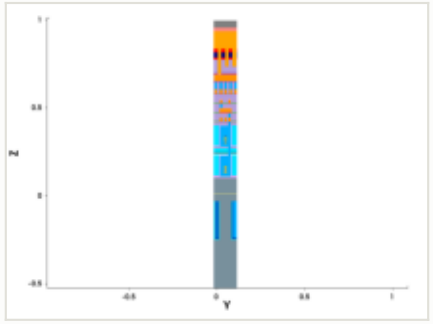

y cut at 0.049 µm

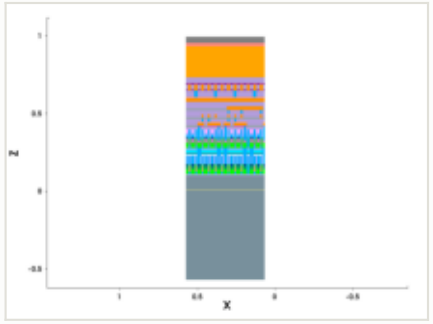

mask: layer 10422:0 (GDSII)

steps by process area

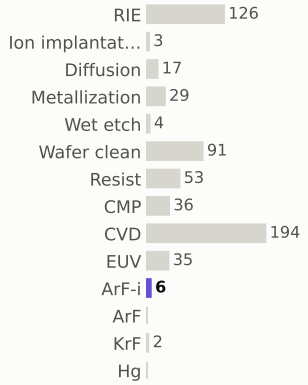

materials deposited (g)

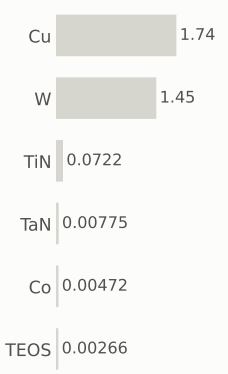

gases emitted (g)

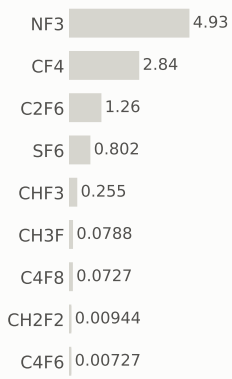

Step #6330: RIE

etch_anisotropic · RIE

1.04	616.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

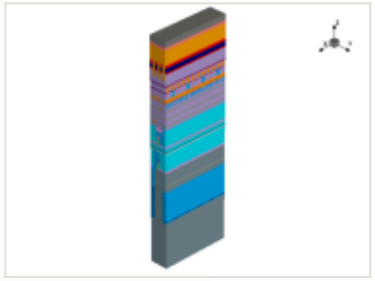

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

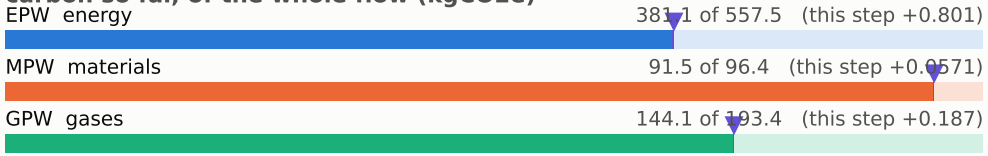

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

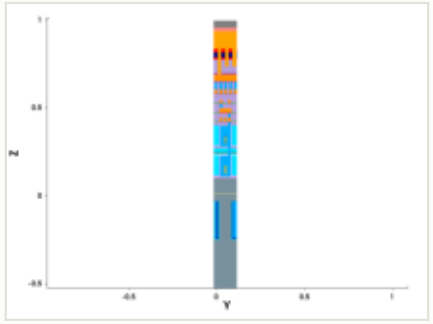

y cut at 0.049 µm

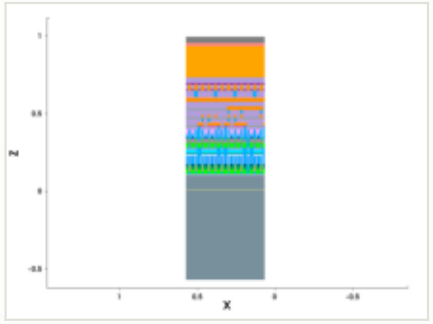

mask for this step

no mask for this step

steps by process area

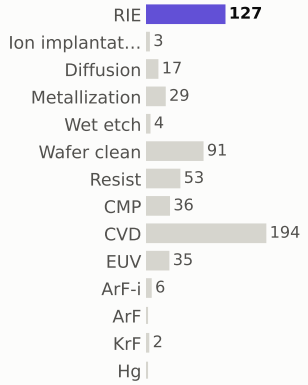

materials deposited (g)

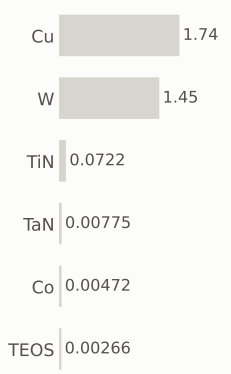

gases emitted (g)

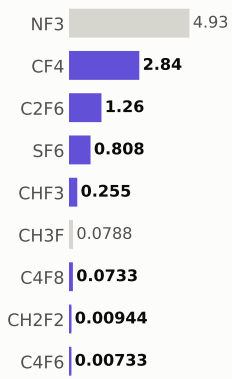

Step #6340: Wafer_clean

etch_strip · Wafer_clean

0.169	616.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

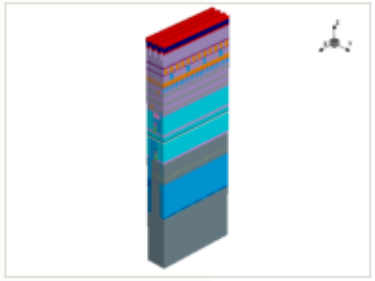

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

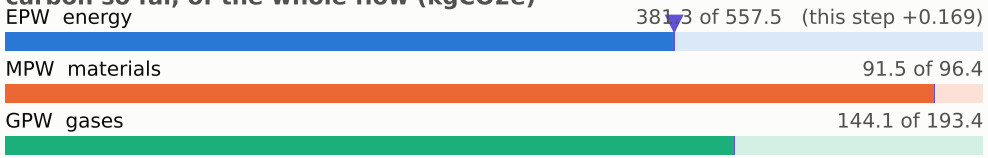

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

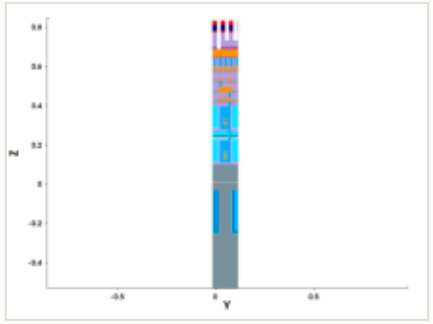

y cut at 0.049 µm

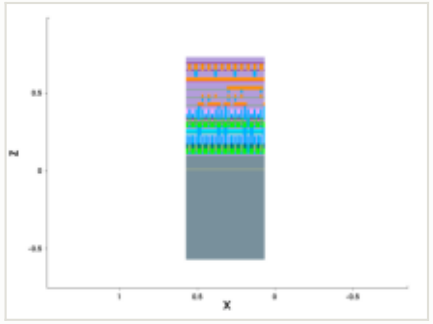

mask for this step

no mask for this step

steps by process area

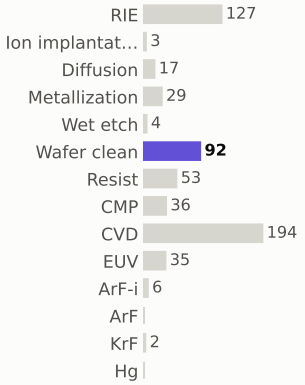

materials deposited (g)

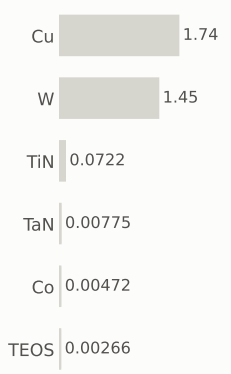

gases emitted (g)

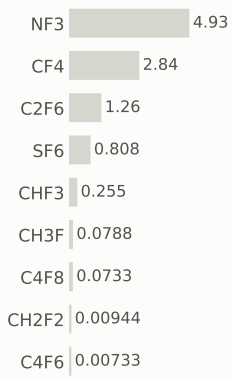

Step #6350: Resist

depo_fill · Resist

0.169	617.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

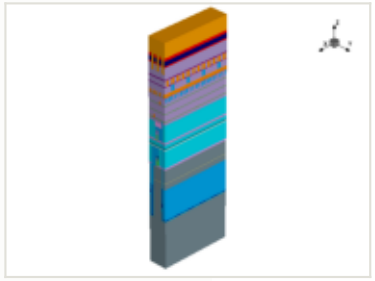

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

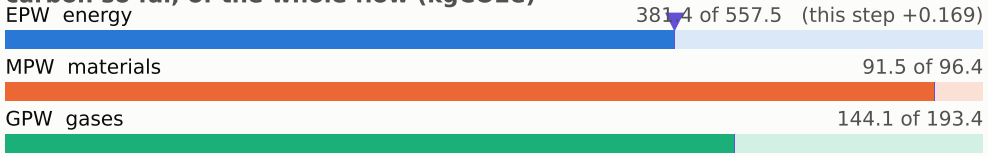

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

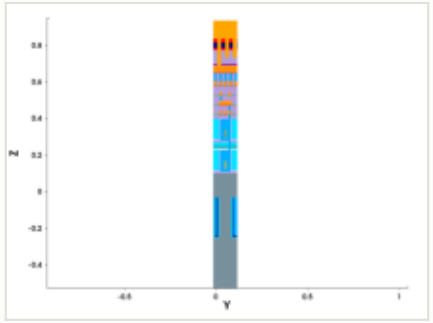

y cut at 0.049 µm

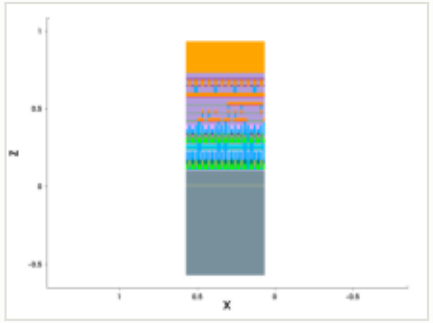

mask for this step

no mask for this step

steps by process area

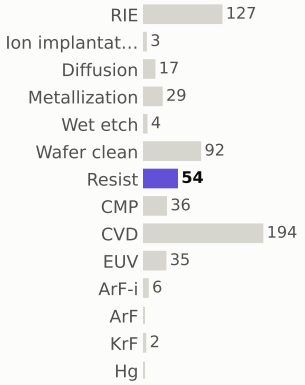

materials deposited (g)

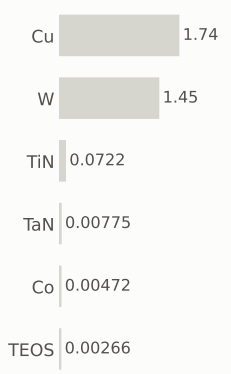

gases emitted (g)

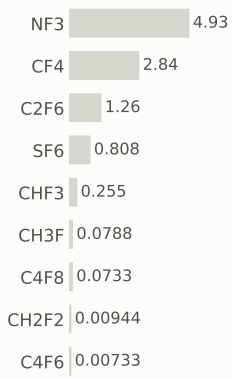

Step #6360: CVD

depo_fill · CVD

1.31	618.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

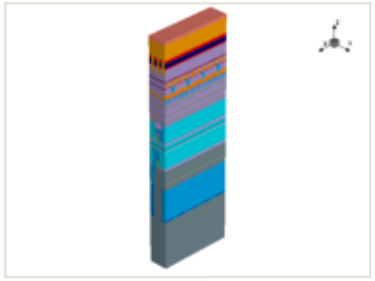

x cut at 0.385 µm

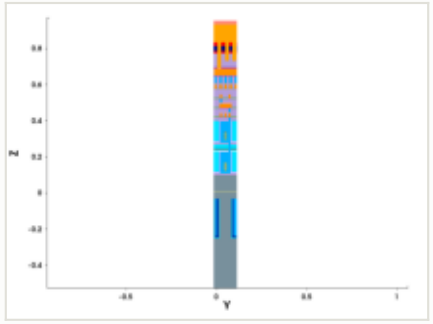

y cut at 0.049 µm

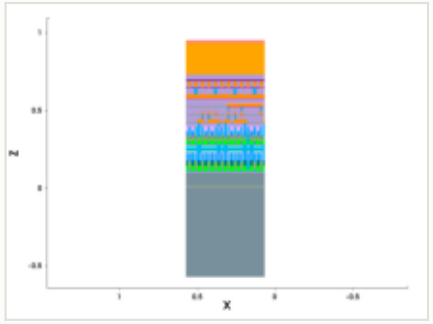

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

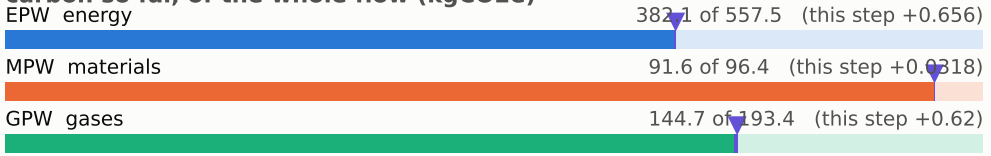

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

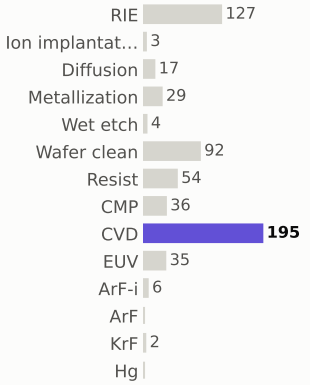

materials deposited (g)



gases emitted (g)

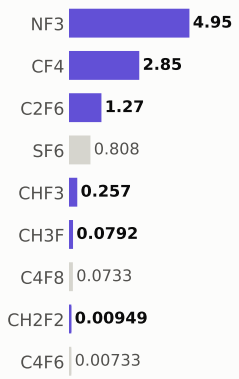

Step #6370: Wafer_clean

clean · Wafer_clean

0.169	618.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

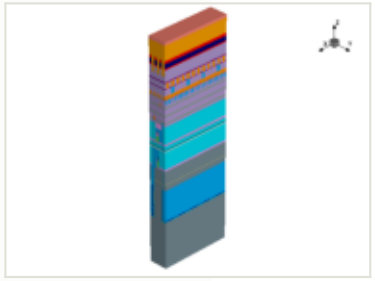

x cut at 0.385 µm

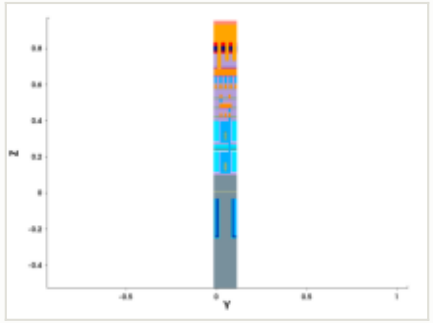

y cut at 0.049 µm

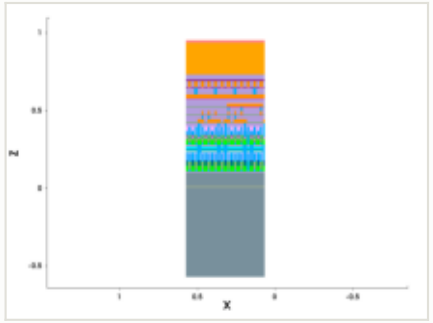

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

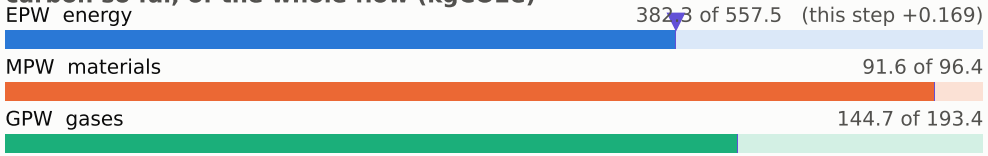

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

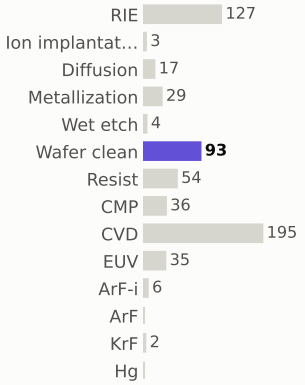

materials deposited (g)

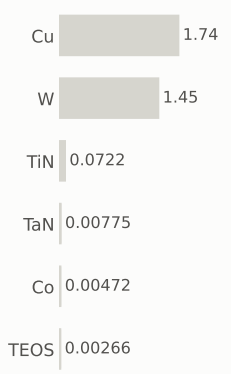

gases emitted (g)

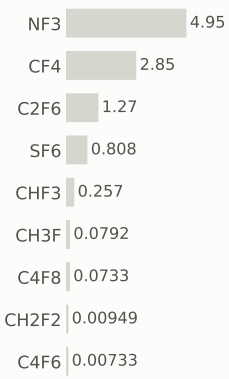

Step #6380: ArF-i

litho_patterning · ArF-i

0.217	618.8	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

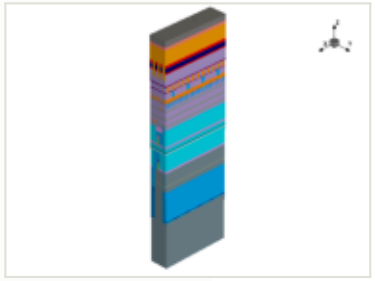

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

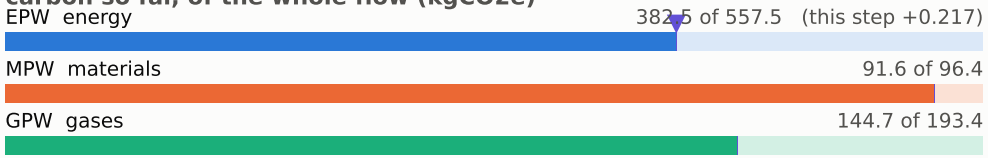

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

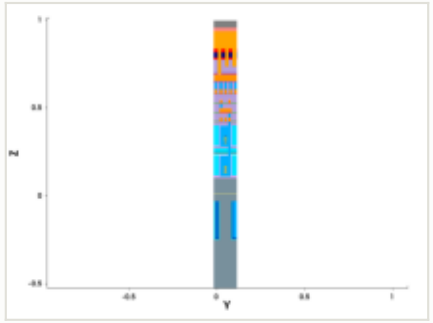

y cut at 0.049 µm

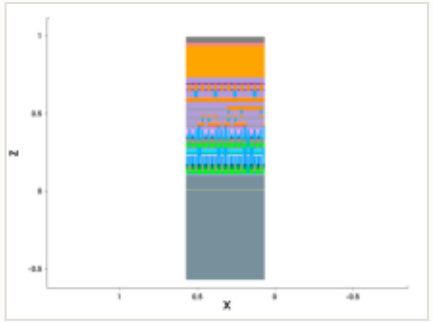

mask: layer 10423:0 (GDSII)

steps by process area

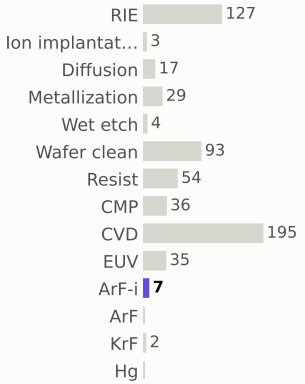

materials deposited (g)

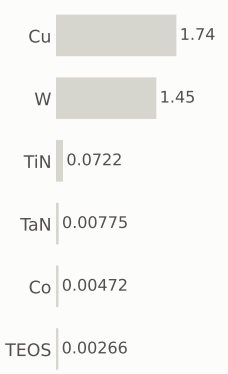

gases emitted (g)

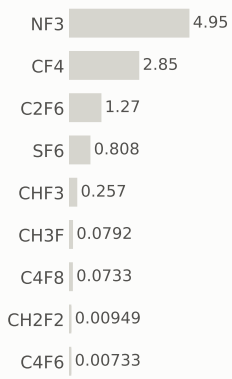

Step #6390: RIE

etch_anisotropic · RIE

1.04	619.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

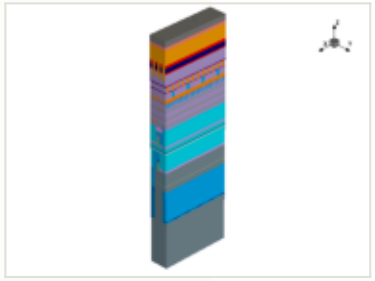

x cut at 0.385 µm

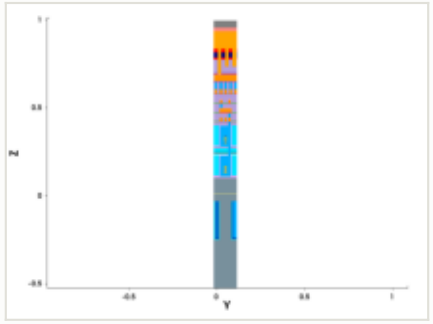

y cut at 0.049 µm

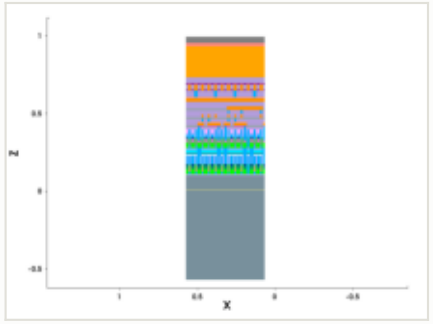

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

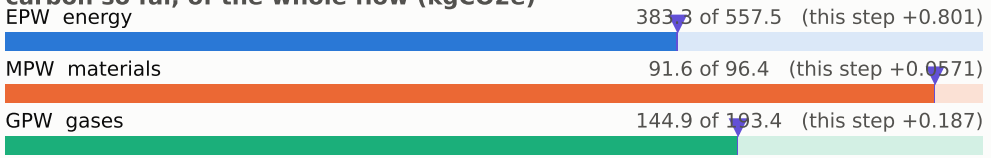

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

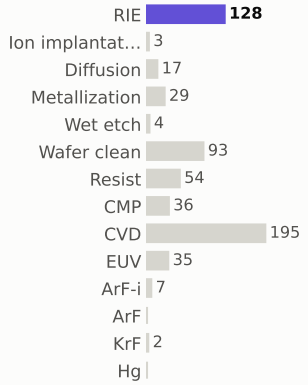

materials deposited (g)

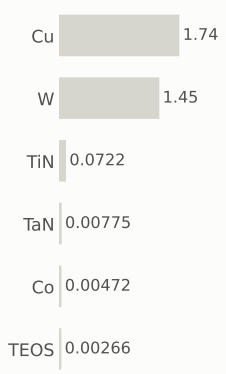

gases emitted (g)

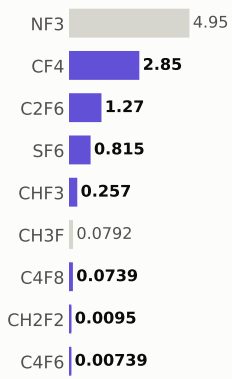

Step #6400: Wafer_clean

etch_strip · Wafer_clean

0.169	620.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

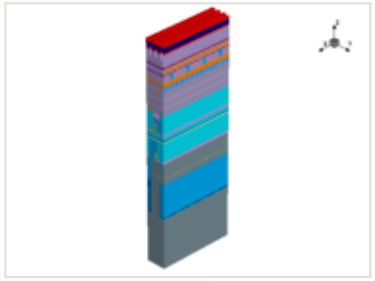

x cut at 0.385 µm

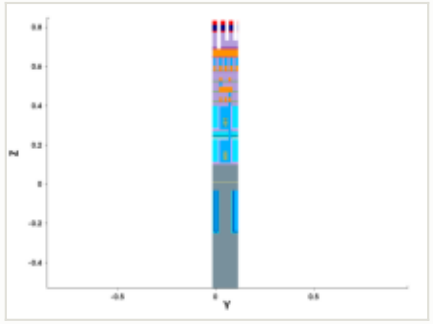

y cut at 0.049 µm

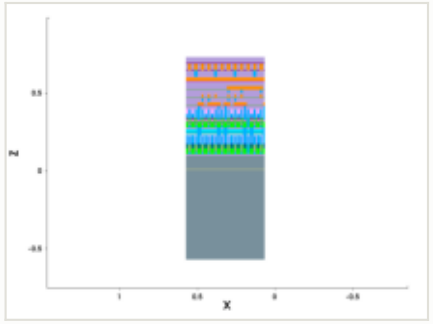

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

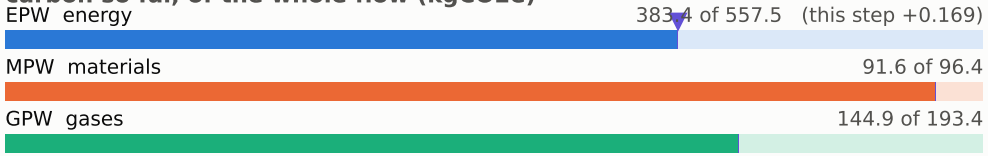

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

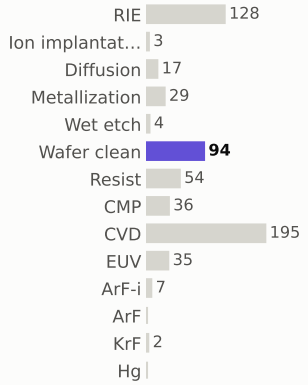

materials deposited (g)

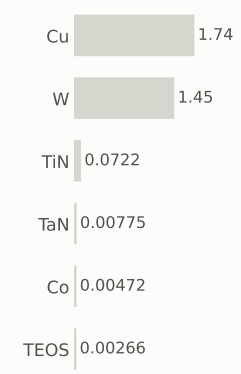

gases emitted (g)

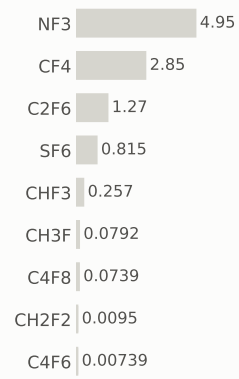

Step #6410: Resist

depo_fill · Resist

0.169	620.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

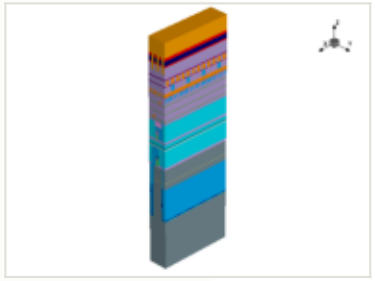

x cut at 0.385 µm

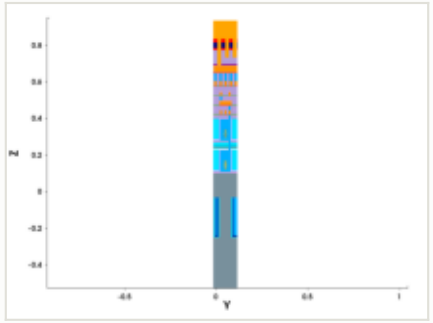

y cut at 0.049 µm

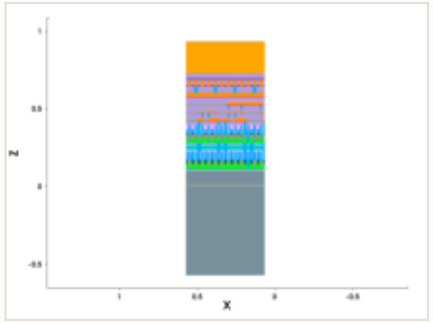

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

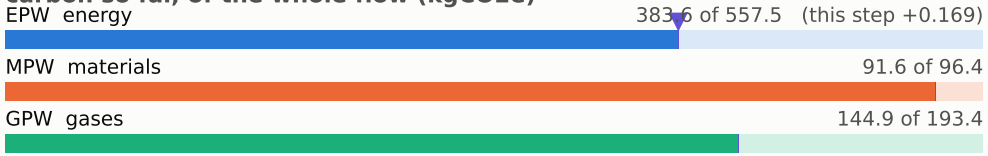

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

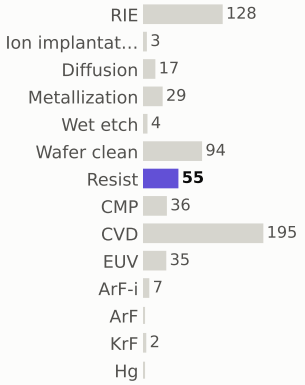

materials deposited (g)



gases emitted (g)

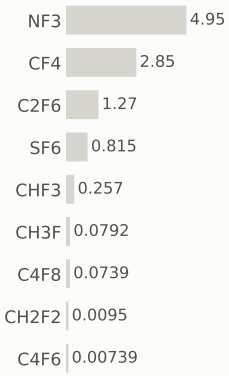

Step #6420: CVD

depo_fill · CVD

1.31	621.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

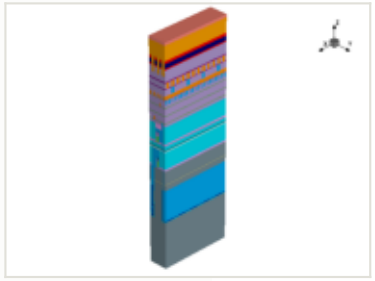

x cut at 0.385 µm

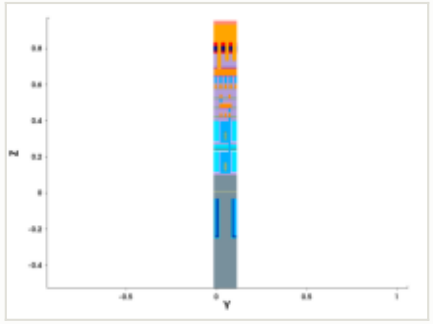

y cut at 0.049 µm

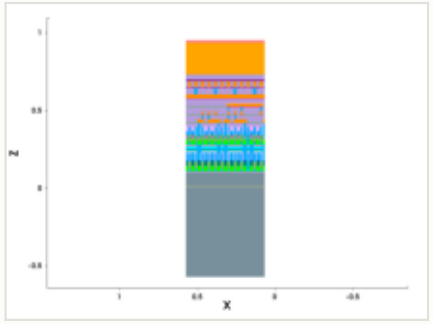

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

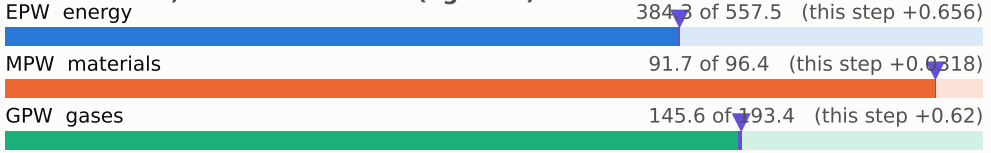

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

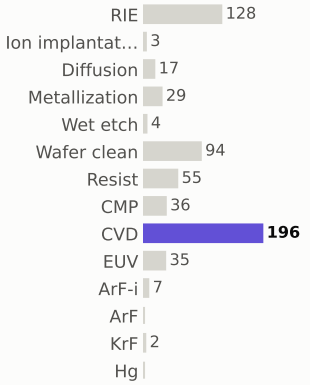

materials deposited (g)

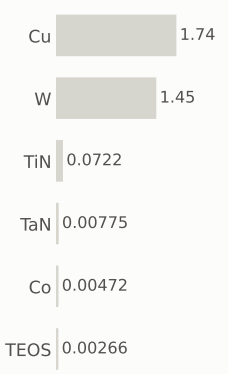

gases emitted (g)

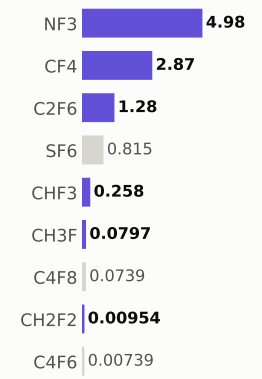

Step #6430: Wafer_clean

clean · Wafer_clean

0.169	621.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

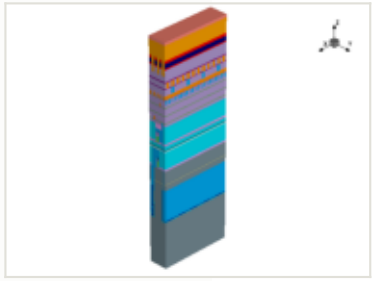

x cut at 0.385 µm

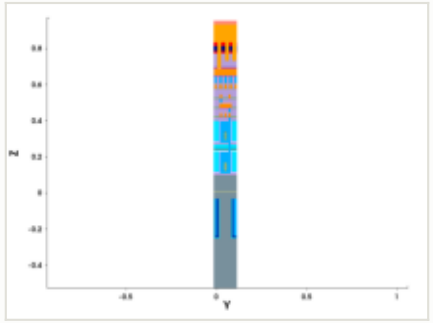

y cut at 0.049 µm

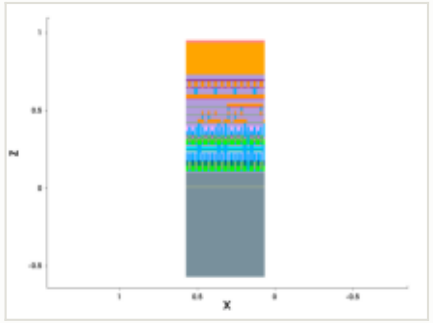

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

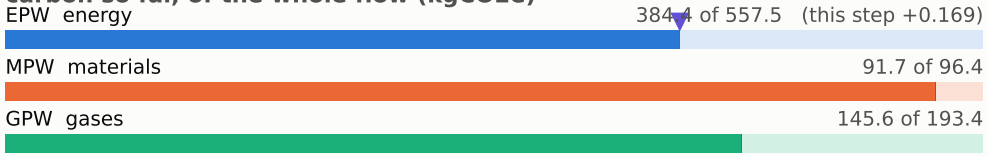

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

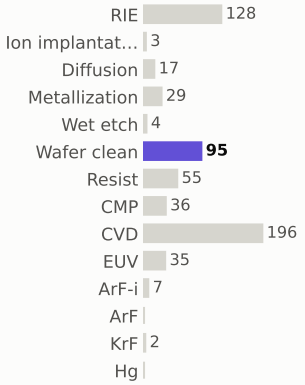

materials deposited (g)

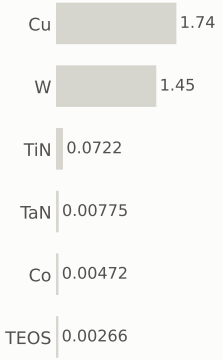

gases emitted (g)

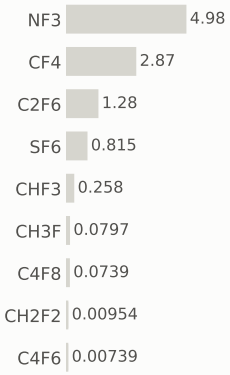

Step #6440: ArF-i

litho_patterning · ArF-i

0.217	621.9	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

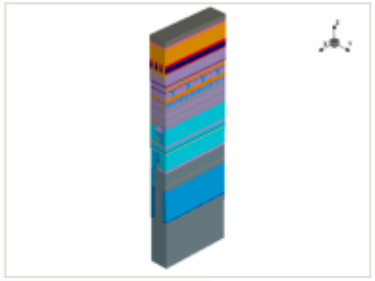

x cut at 0.385 µm

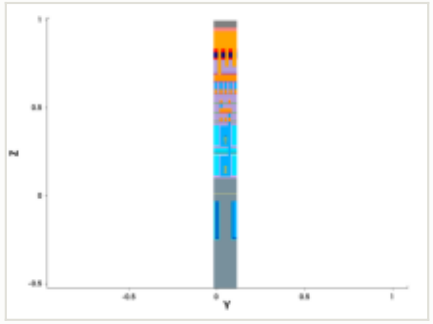

y cut at 0.049 µm

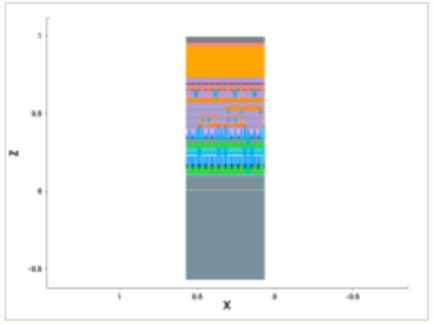

mask: layer 10424:0 (GDSII)

nothing in the clip window

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

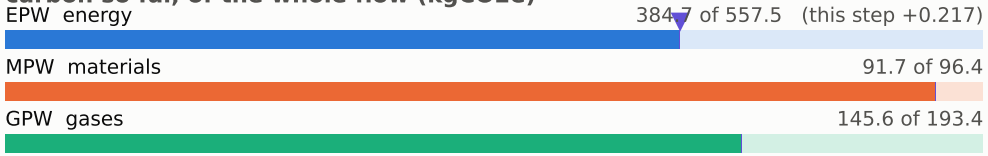

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

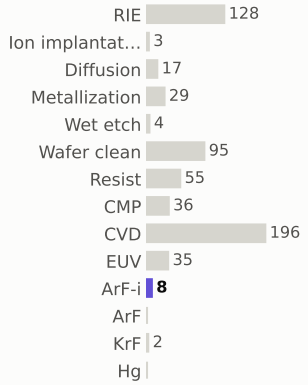

materials deposited (g)

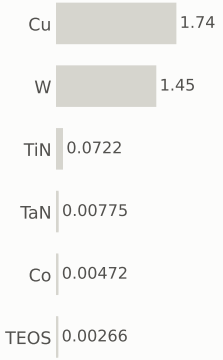

gases emitted (g)

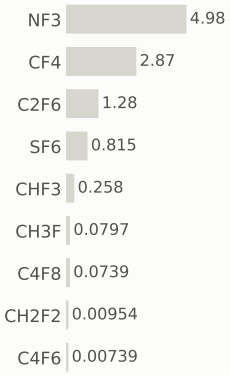

Step #6450: RIE

etch_anisotropic · RIE

1.04	622.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

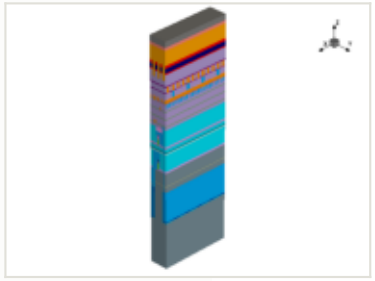

x cut at 0.385 µm

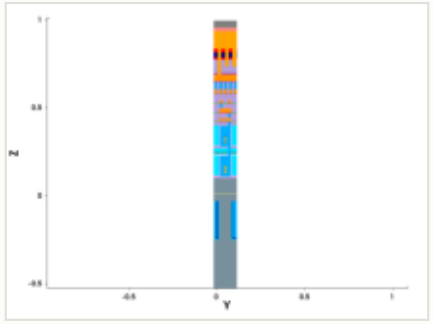

y cut at 0.049 µm

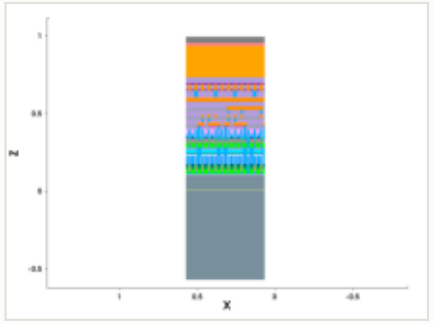

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

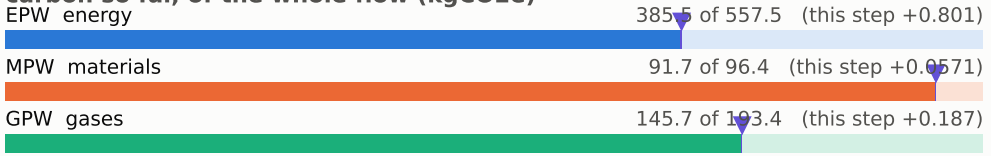

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

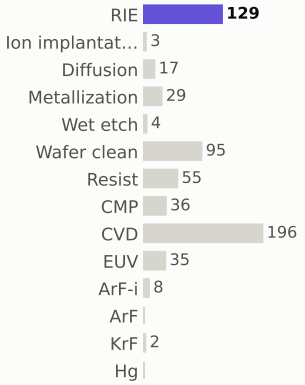

materials deposited (g)

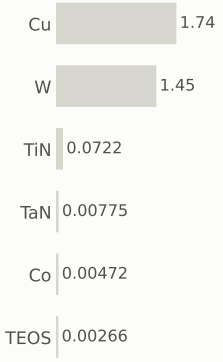

gases emitted (g)

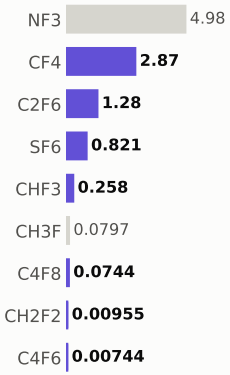

Step #6460: Wafer_clean

etch_strip · Wafer_clean

0.169	623.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

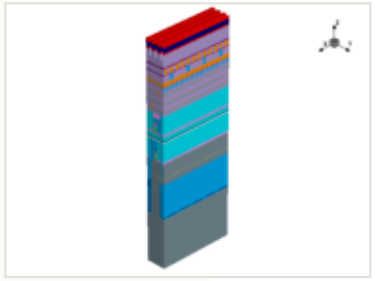

x cut at 0.385 µm

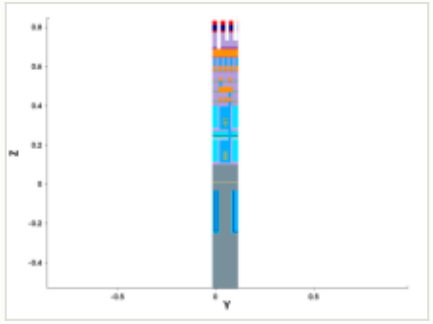

y cut at 0.049 µm

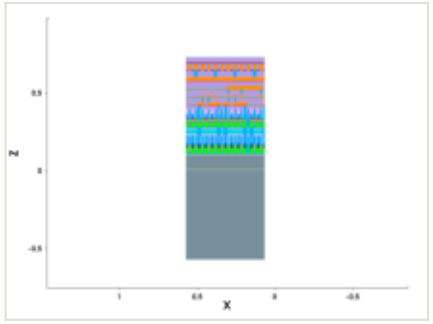

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

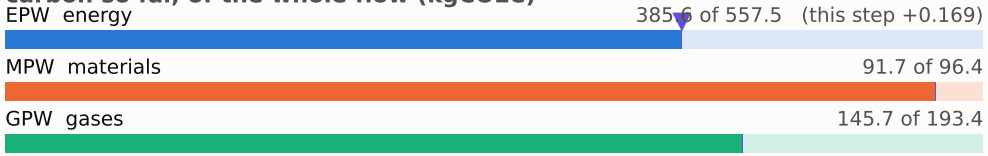

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

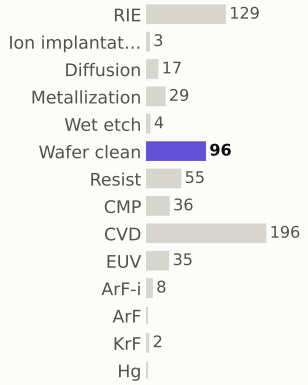

materials deposited (g)

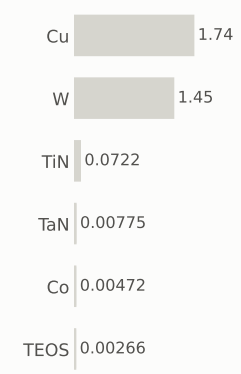

gases emitted (g)

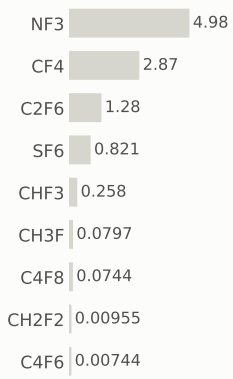

Step #6470: Metallization

depo_ellipsoidal · Metallization

1.2	624.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

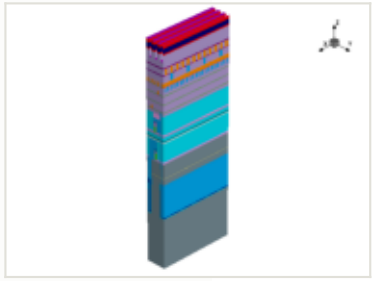

x cut at 0.385 µm

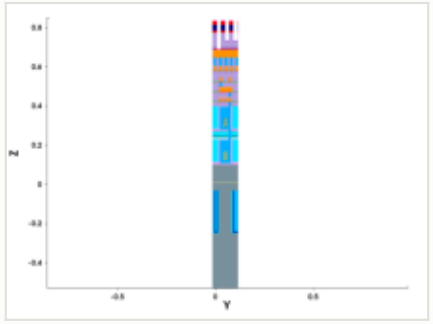

y cut at 0.049 µm

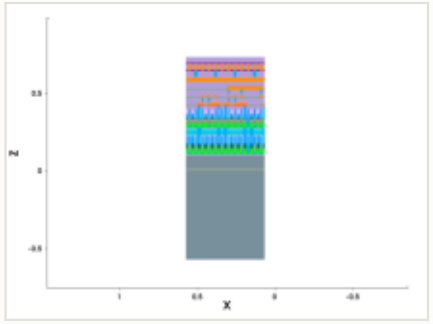

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

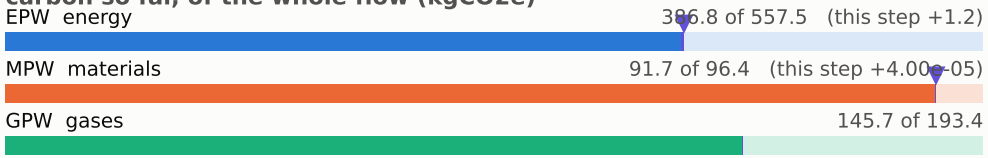

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

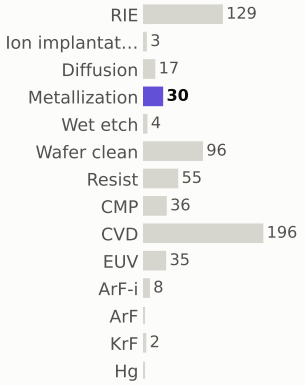

materials deposited (g)

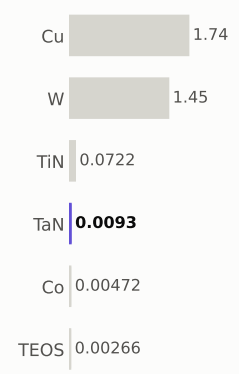

gases emitted (g)

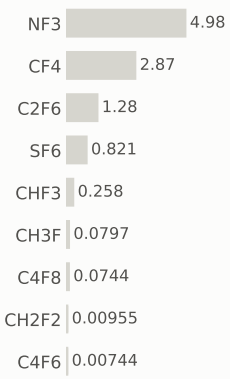

Step #6480: Metallization

depo_fill · Metallization

1.21	625.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

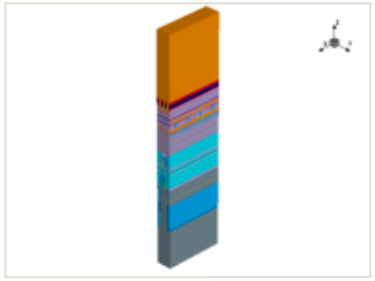



x cut at 0.385 µm

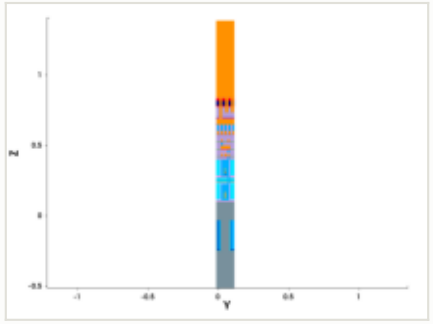

y cut at 0.049 µm

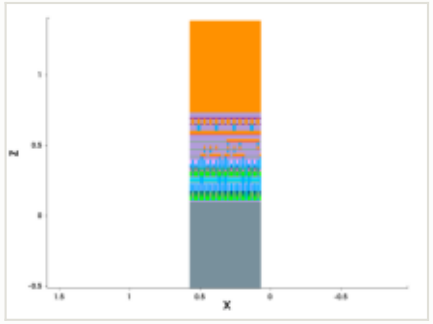

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

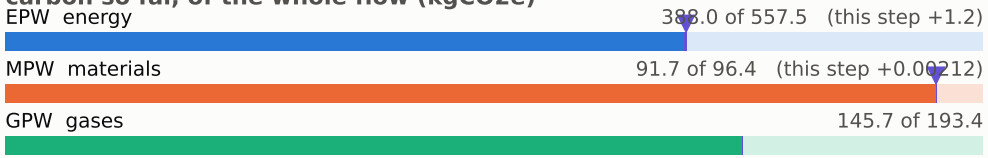

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

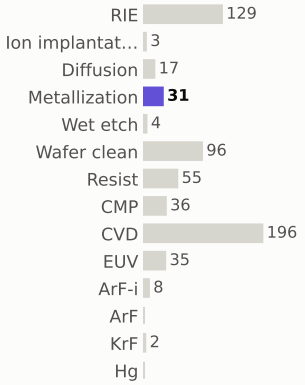

materials deposited (g)

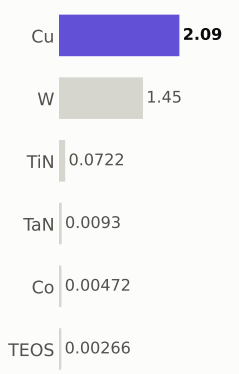

gases emitted (g)

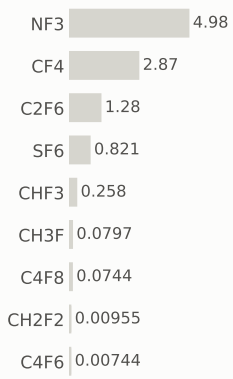

Step #6490: Diffusion

treatment · Diffusion

0.801	626.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

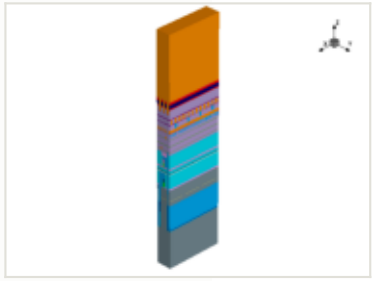



this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

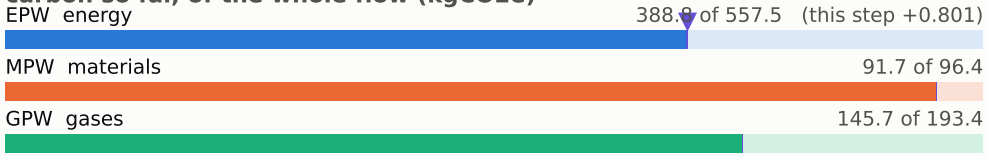

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

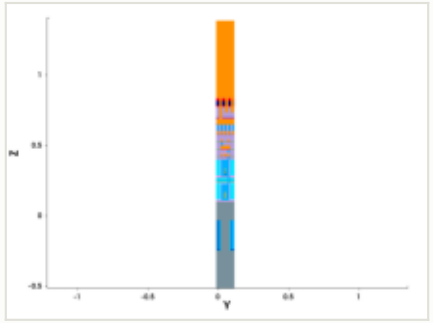

y cut at 0.049 µm

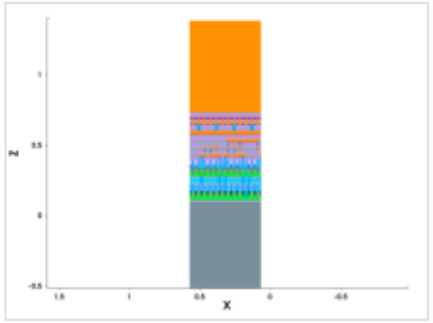

mask for this step

no mask for this step

steps by process area

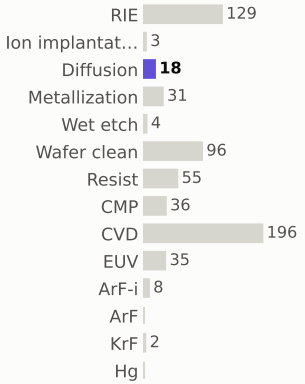

materials deposited (g)

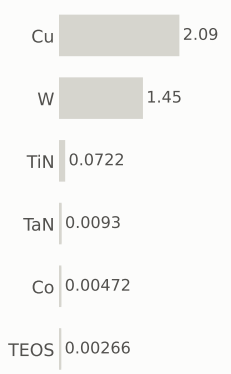

gases emitted (g)

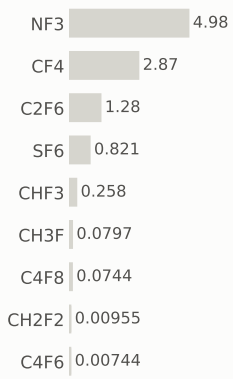

Step #6500: CMP

etch_cmp · CMP

0.169	626.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

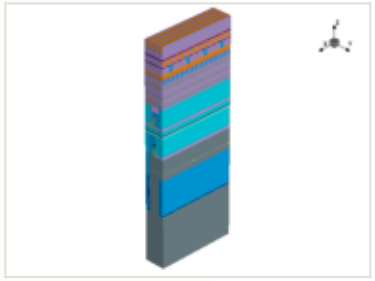

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

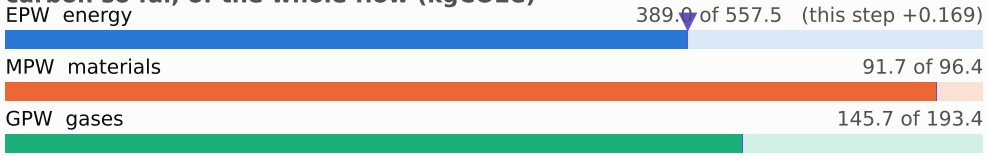

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

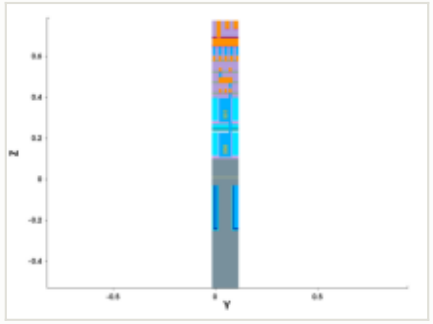

y cut at 0.049 µm

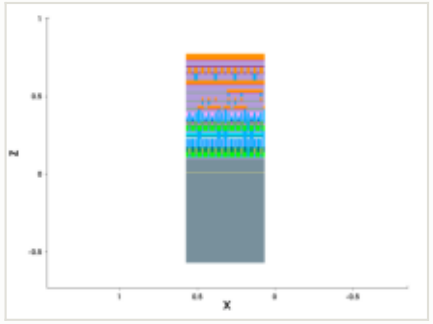

mask for this step

no mask for this step

steps by process area

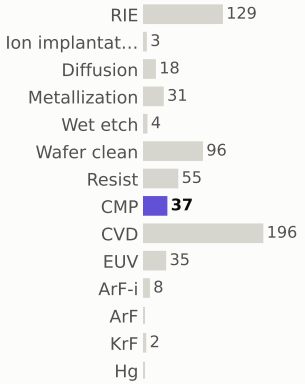

materials deposited (g)

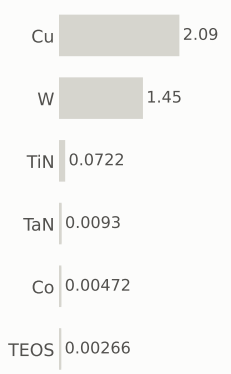

gases emitted (g)

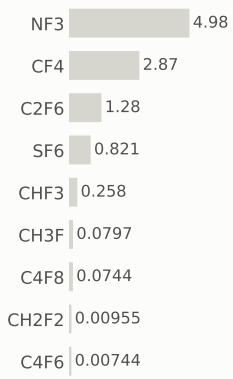

Step #6510: Metallization

depo_isotropic · Metallization

1.2	627.7	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

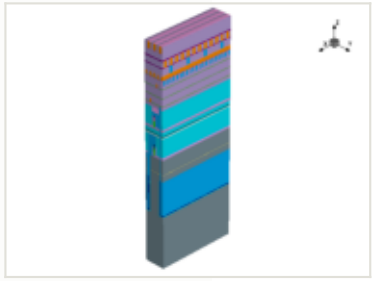

x cut at 0.385 µm

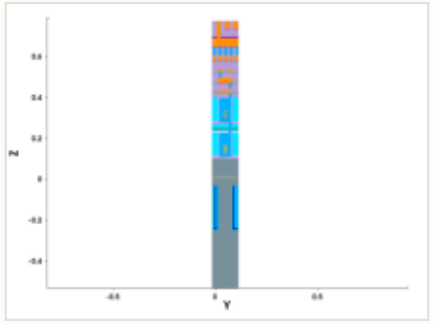

y cut at 0.049 µm

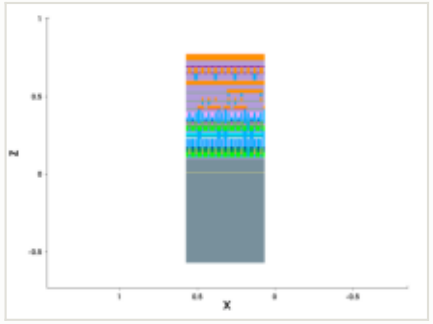

mask for this step

no mask for this step

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

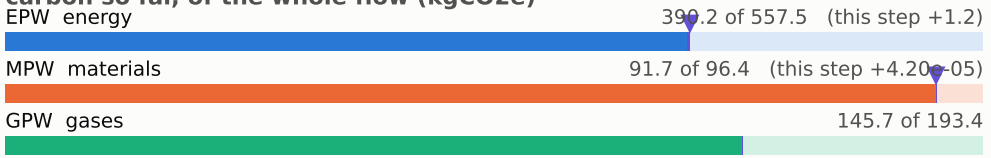

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

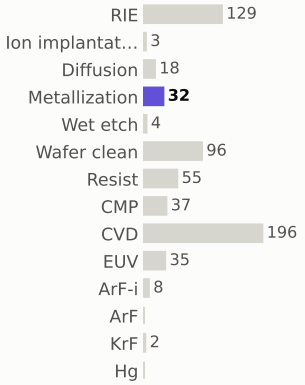

materials deposited (g)

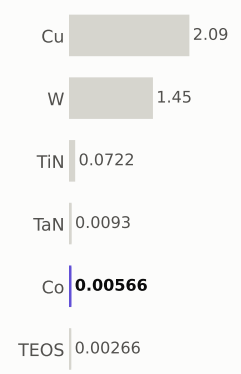

gases emitted (g)

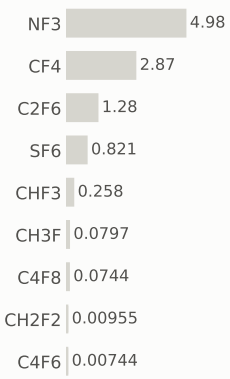

Step #6530: CVD

depo_fill · CVD

1.31	629.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

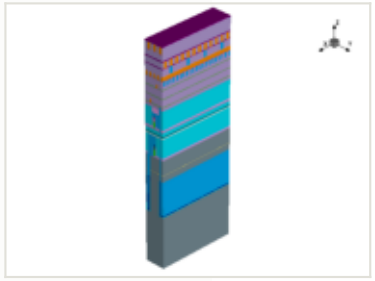

x cut at 0.385 µm

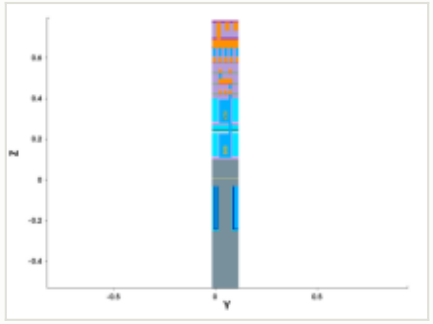

y cut at 0.049 µm

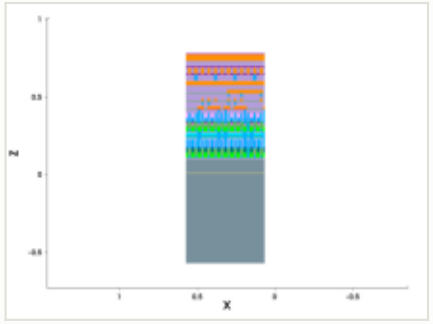

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

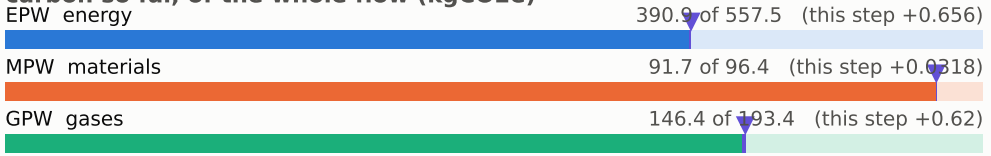

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

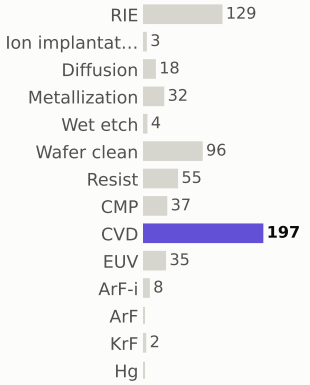

materials deposited (g)

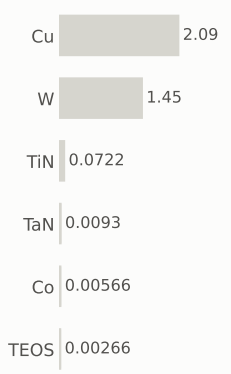

gases emitted (g)



Step #6540: CVD

depo_fill · CVD

1.31	630.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

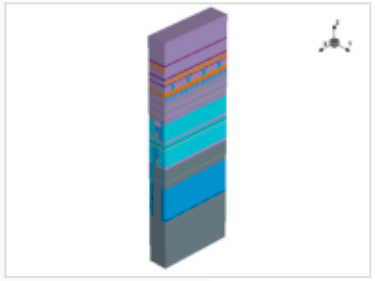

x cut at 0.385 µm

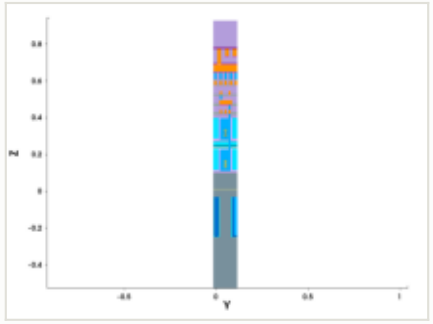

y cut at 0.049 µm

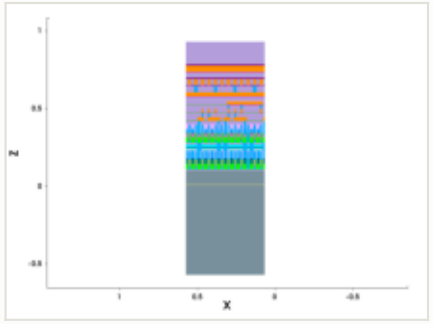

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.146 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

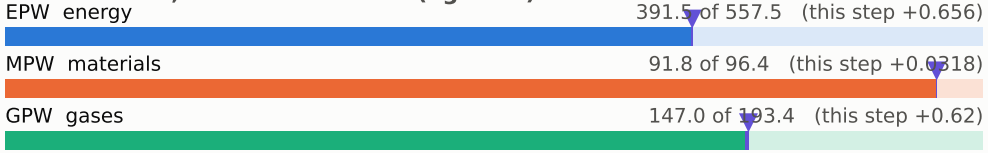

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

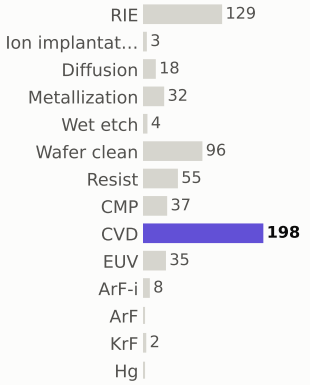

materials deposited (g)

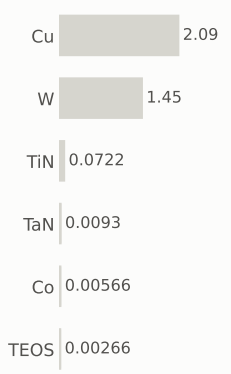

gases emitted (g)

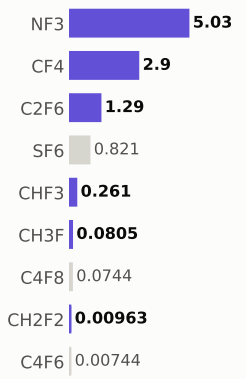

Step #6550: Diffusion

treatment · Diffusion

0.801	631.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

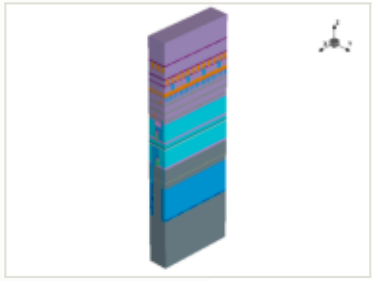

x cut at 0.385 µm

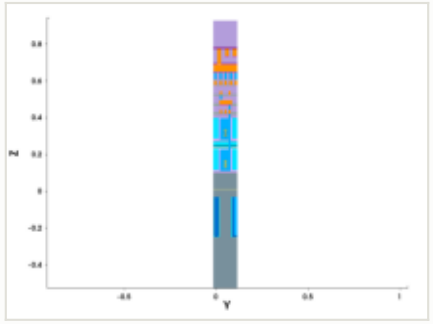

y cut at 0.049 µm

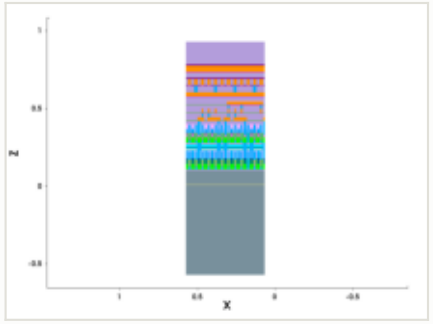

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

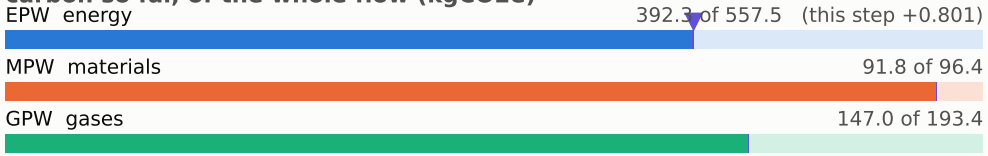

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

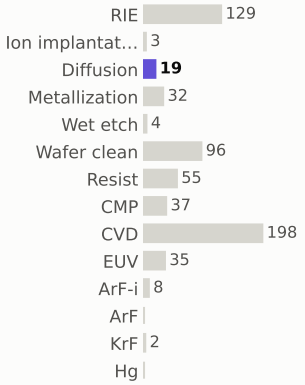

materials deposited (g)



gases emitted (g)

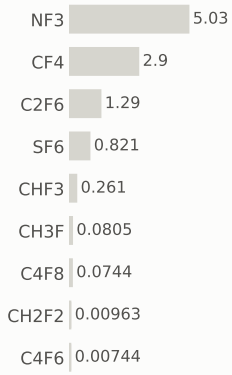

Step #6560: Wafer_clean

clean · Wafer_clean

0.169	631.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

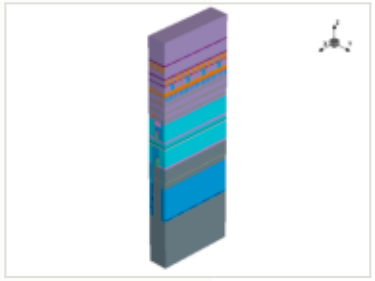

x cut at 0.385 µm

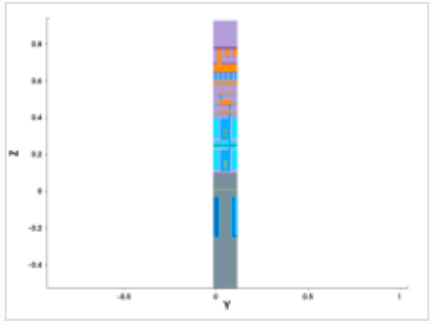

y cut at 0.049 µm

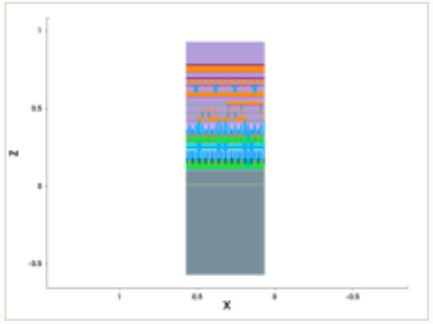

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

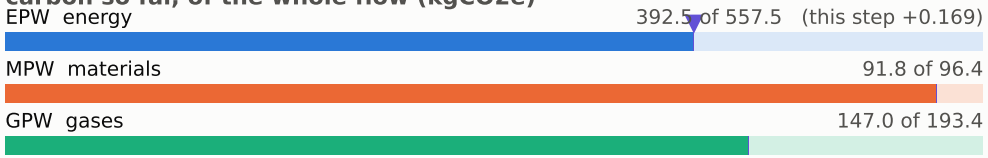

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

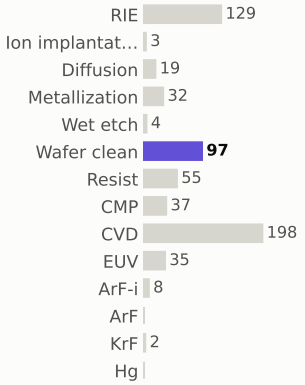

materials deposited (g)



gases emitted (g)

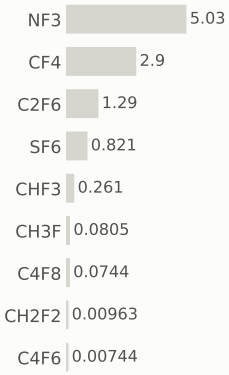

Step #6570: CVD

depo_fill · CVD

1.31	632.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

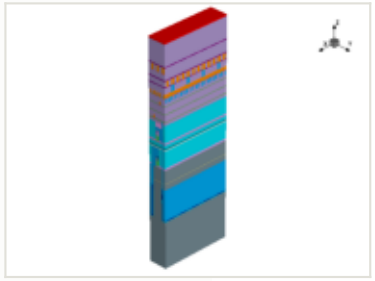

x cut at 0.385 µm

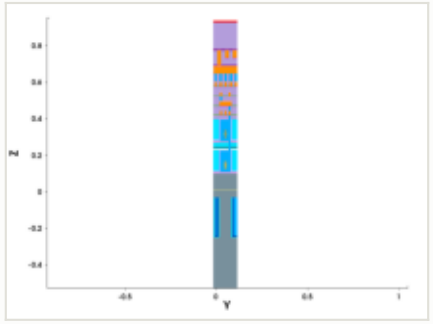

y cut at 0.049 µm

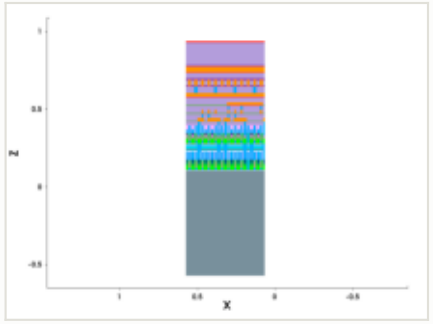

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

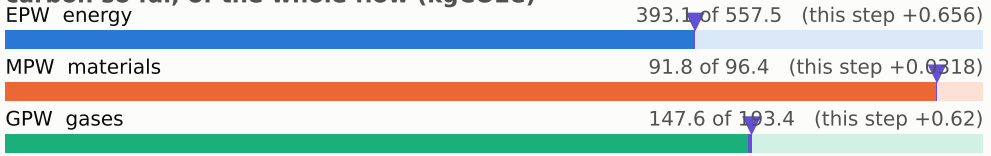

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

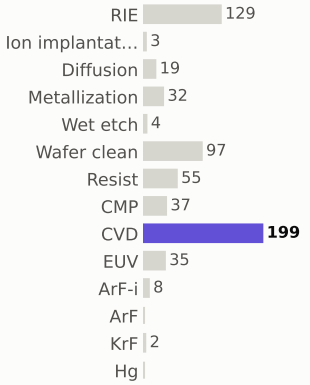

materials deposited (g)

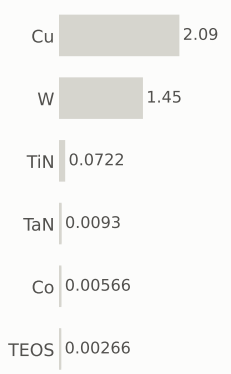

gases emitted (g)



Step #6580: CVD

depo_fill · CVD

1.31	633.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

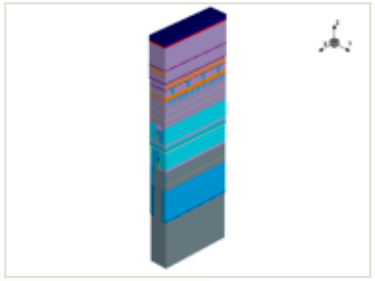

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

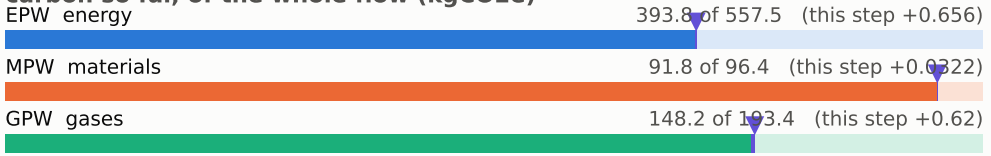

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

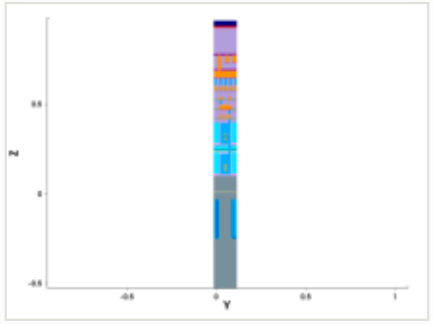

y cut at 0.049 µm

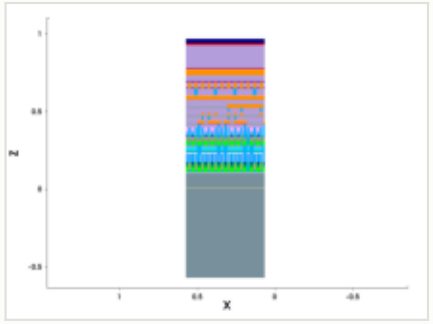

mask for this step

no mask for this step

steps by process area

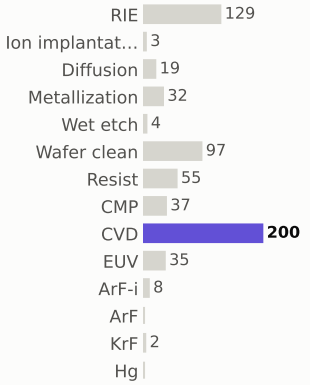

materials deposited (g)

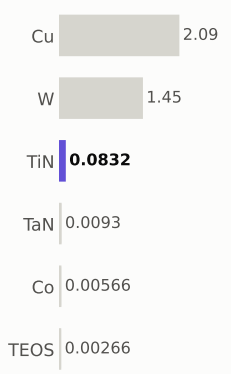

gases emitted (g)



Step #6590: Wafer_clean

clean · Wafer_clean

0.169	634.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

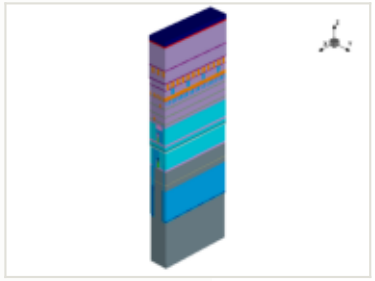

x cut at 0.385 µm

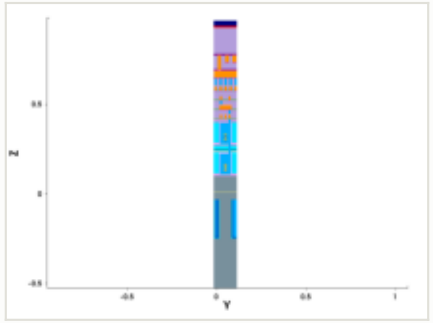

y cut at 0.049 µm

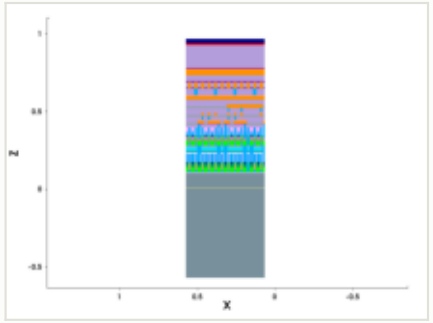

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

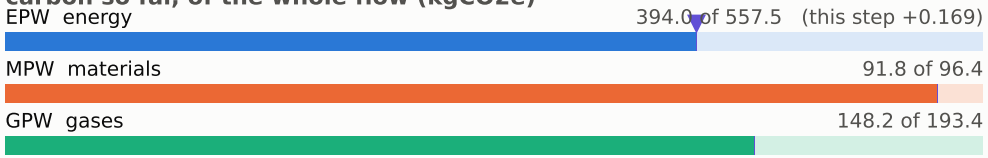

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

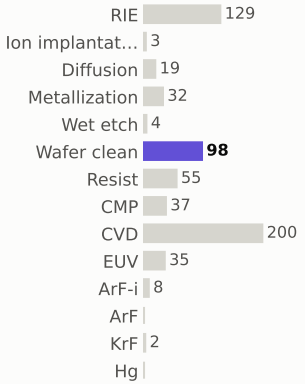

materials deposited (g)

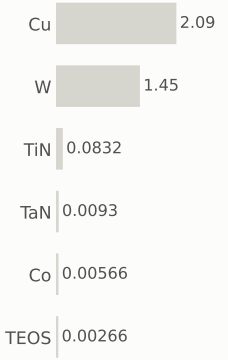

gases emitted (g)

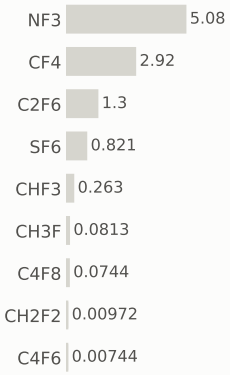

Step #6600: CVD

depo_fill · CVD

1.31	635.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

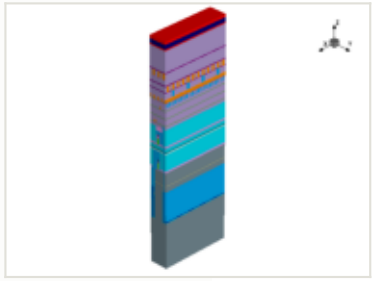

x cut at 0.385 µm

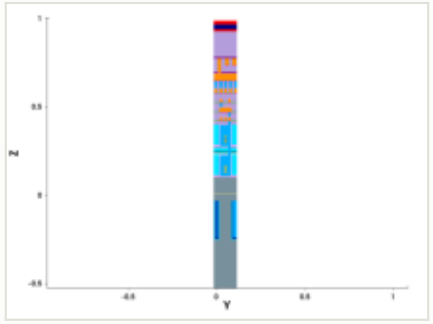

y cut at 0.049 µm

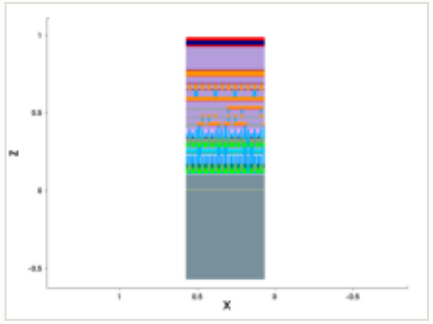

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

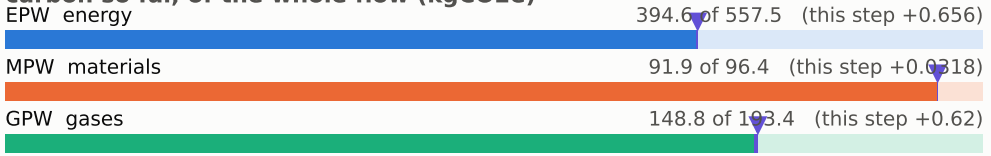

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

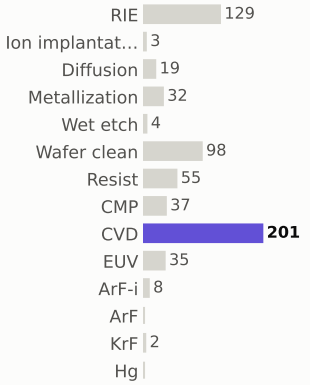

materials deposited (g)

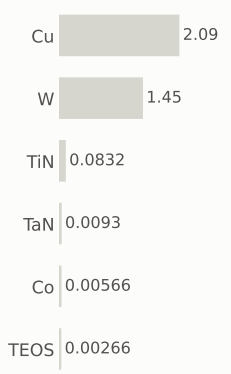

gases emitted (g)

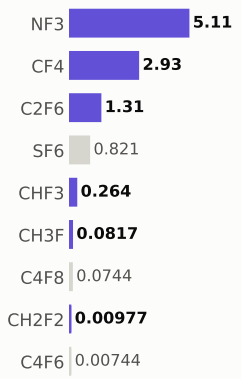

Step #6610: CVD

depo_fill · CVD

1.31	636.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

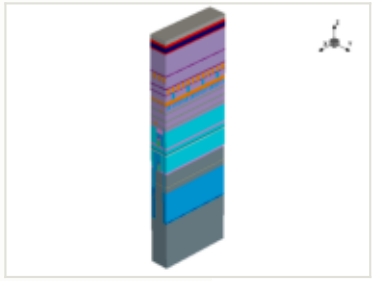

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

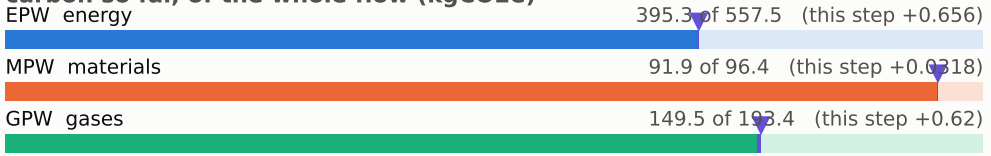

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

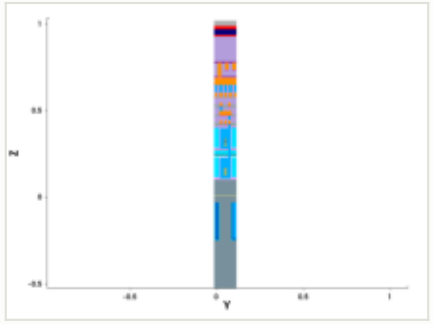

y cut at 0.049 µm

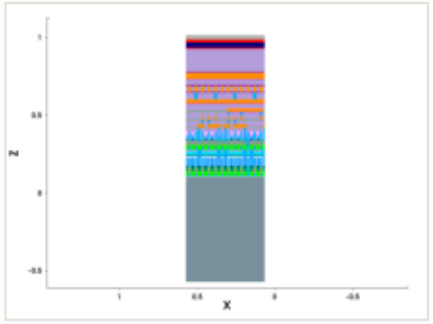

mask for this step

no mask for this step

steps by process area

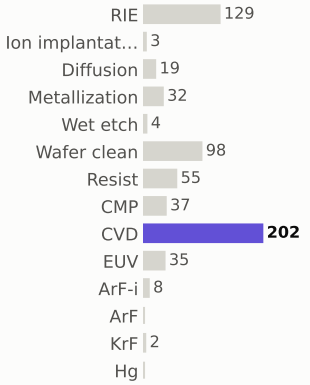

materials deposited (g)

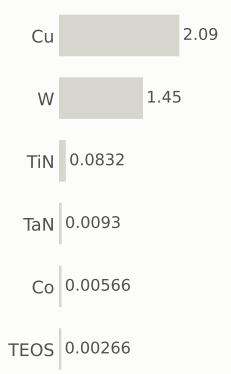

gases emitted (g)

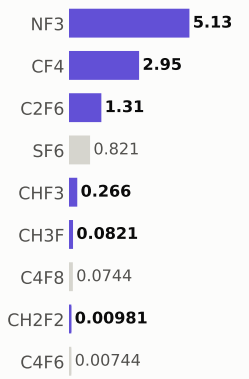

Step #6620: Resist

depo_fill · Resist

0.169	636.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

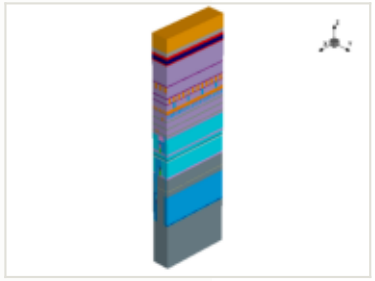

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

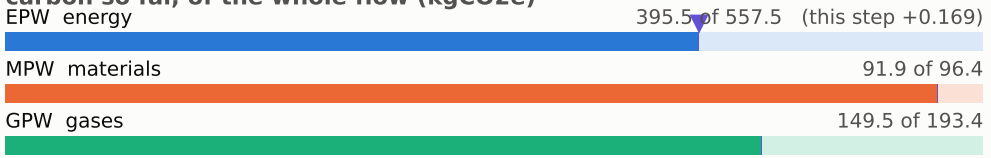

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

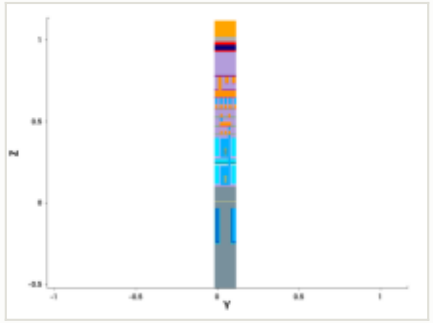

y cut at 0.049 µm

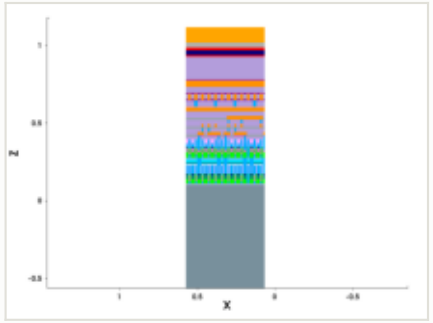

mask for this step

no mask for this step

steps by process area

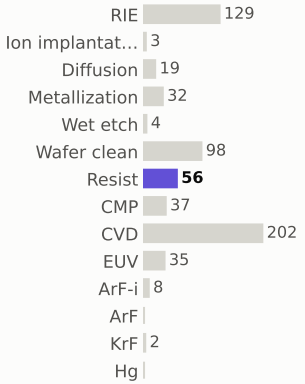

materials deposited (g)

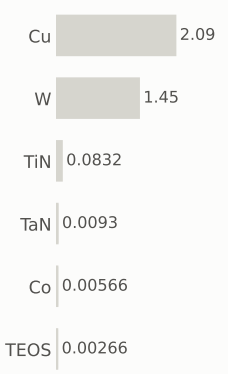

gases emitted (g)

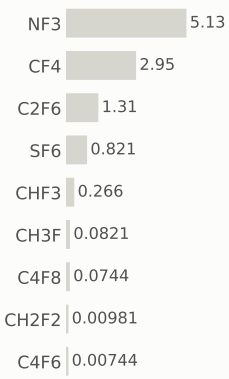

Step #6630: CVD

depo_fill · CVD

1.31	638.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

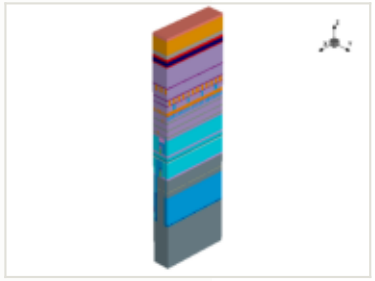

x cut at 0.385 µm

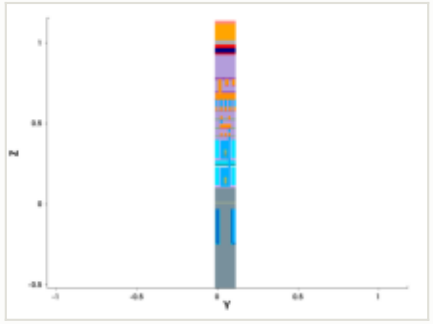

y cut at 0.049 µm

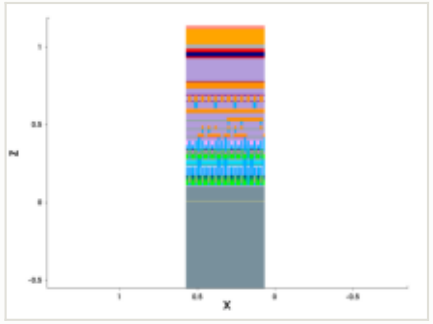

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

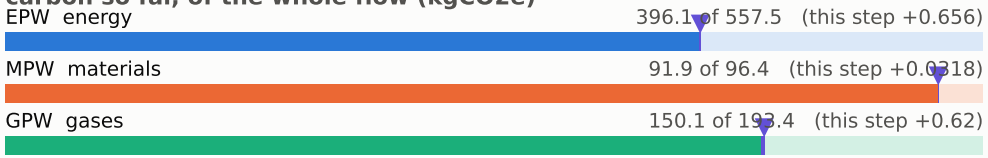

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

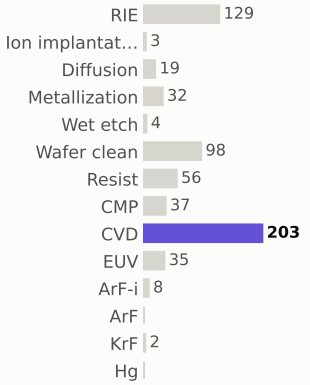

materials deposited (g)



gases emitted (g)



Step #6640: Wafer_clean

clean · Wafer_clean

0.169	638.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

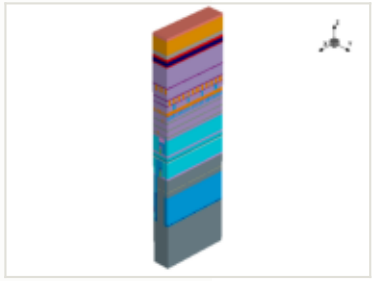

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

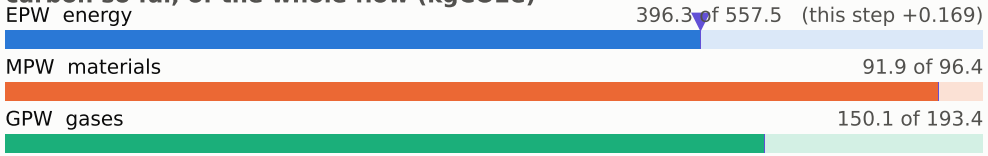

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

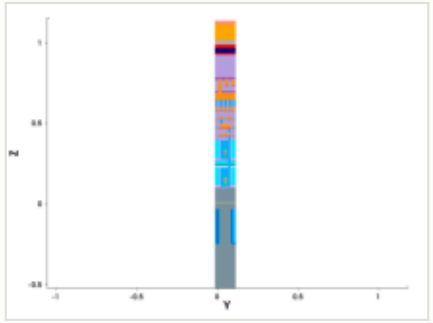

y cut at 0.049 µm

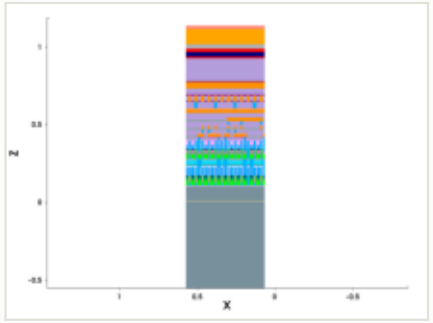

mask for this step

no mask for this step

steps by process area

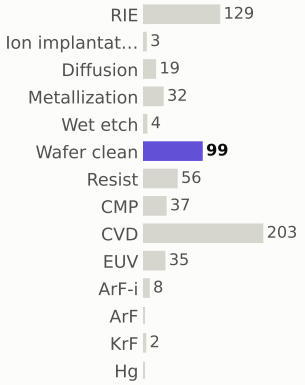

materials deposited (g)

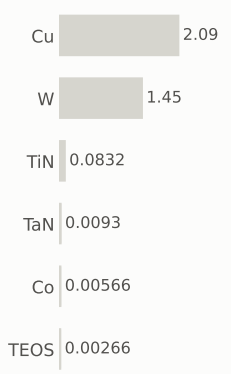

gases emitted (g)

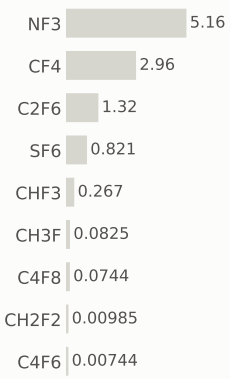

Step #6650: ArF-i

litho_patterning · ArF-i

0.217	638.5	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

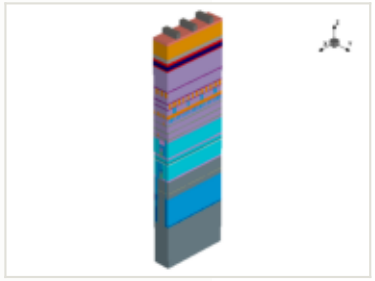

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

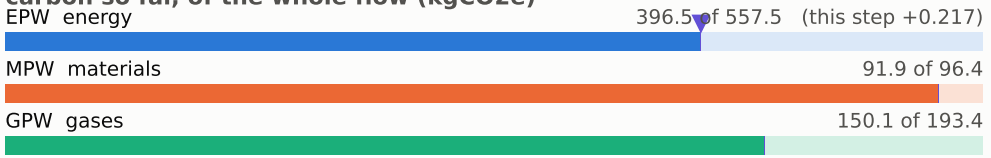

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

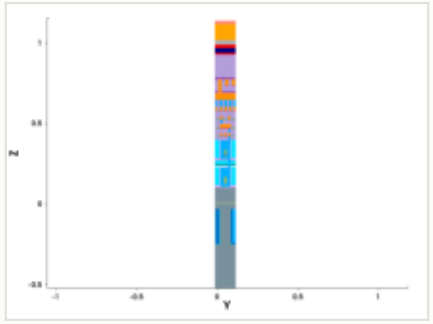

y cut at 0.049 µm

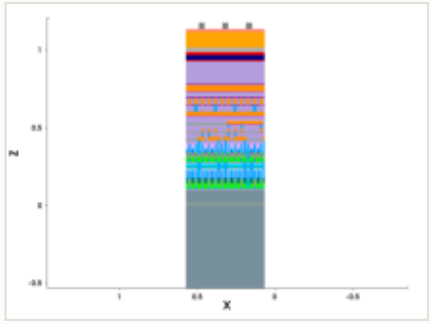

mask: layer 10501:0, positive (GDSII)

steps by process area

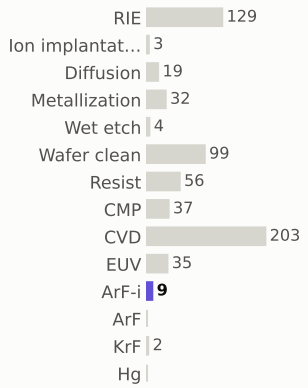

materials deposited (g)

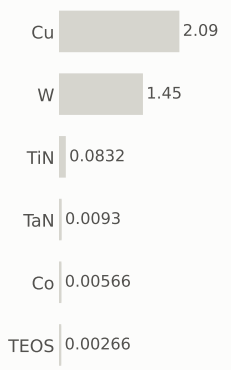

gases emitted (g)

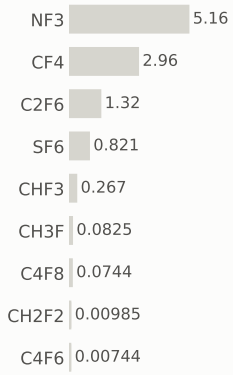

Step #6660: Ion_implantation

treatment · Ion_implantation

0.801	639.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

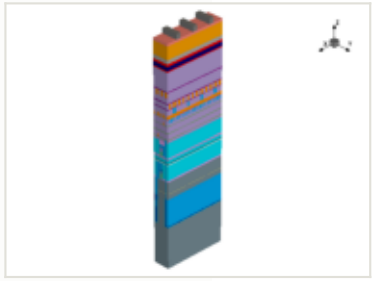

x cut at 0.385 µm

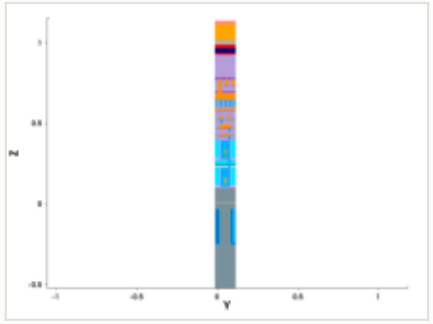

y cut at 0.049 µm

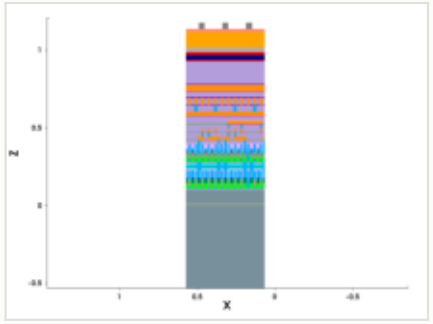

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

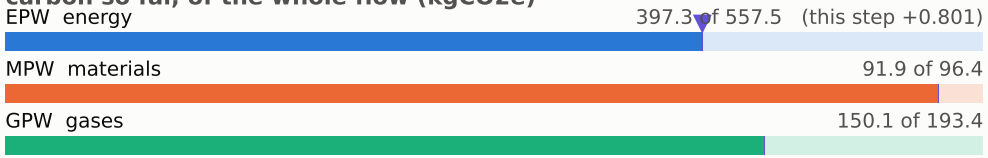

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

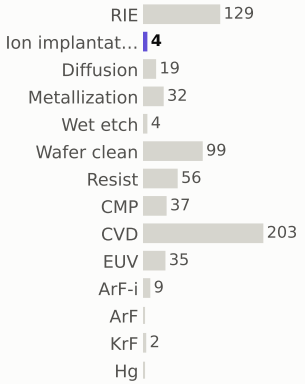

materials deposited (g)

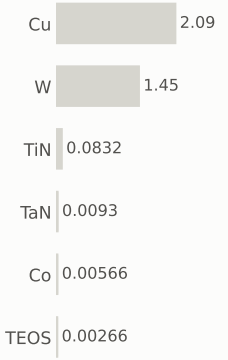

gases emitted (g)

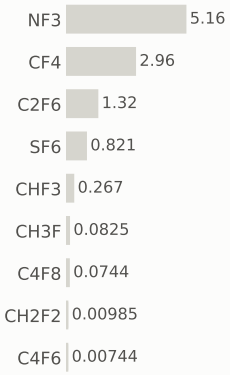

Step #6670: RIE

etch_anisotropic · RIE

1.04	640.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

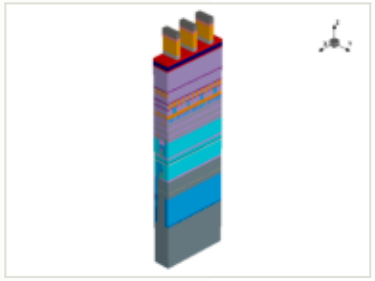

x cut at 0.385 µm

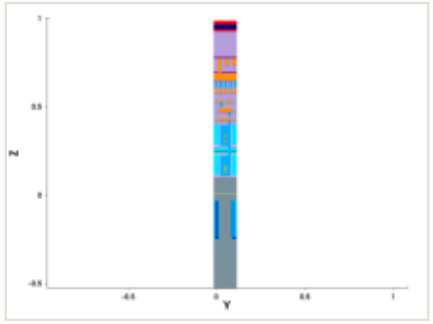

y cut at 0.049 µm

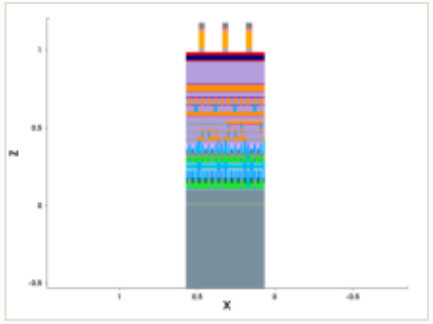

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

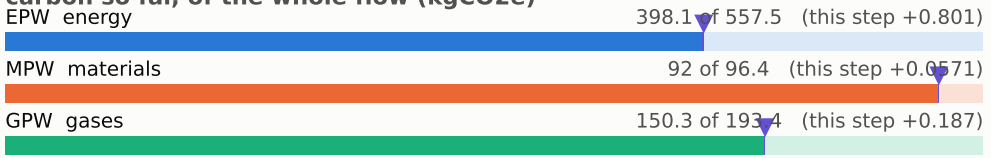

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

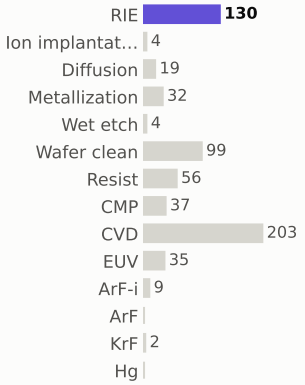

materials deposited (g)

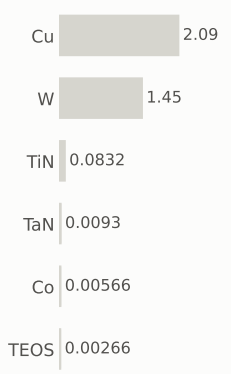

gases emitted (g)



Step #6680: Wafer_clean

etch_strip · Wafer_clean

0.169	640.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

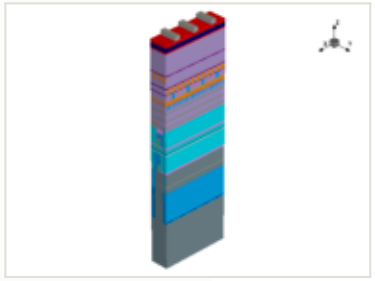

x cut at 0.385 µm

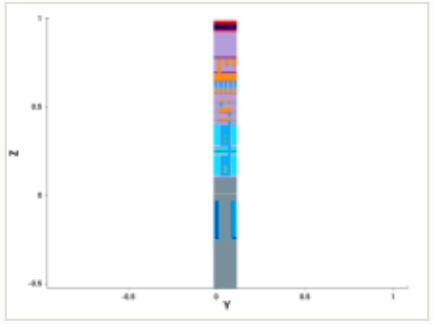

y cut at 0.049 µm

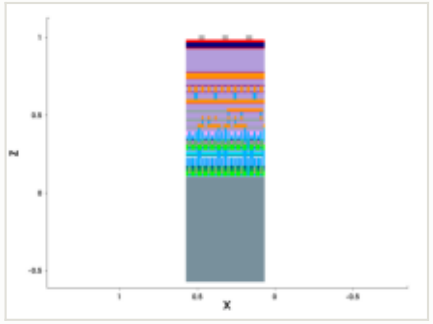

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

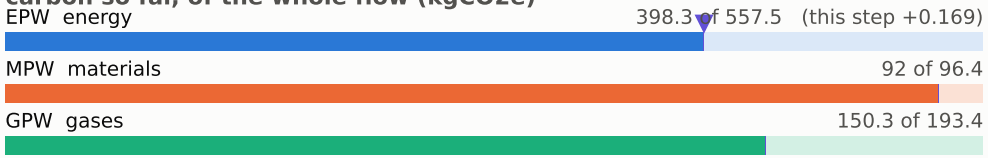

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

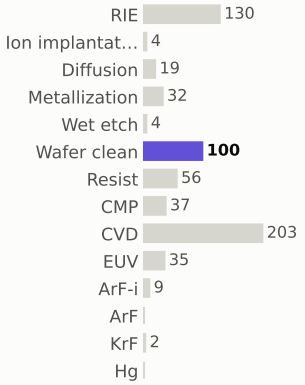

materials deposited (g)

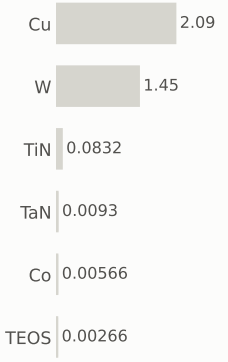

gases emitted (g)

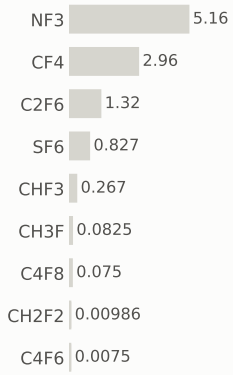

Step #6690: CVD

depo_isotropic · CVD

1.31	641.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

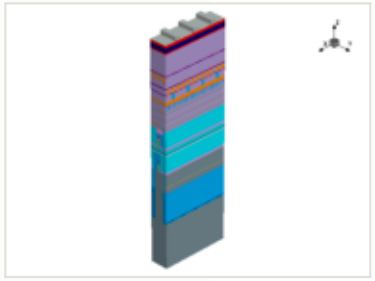

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

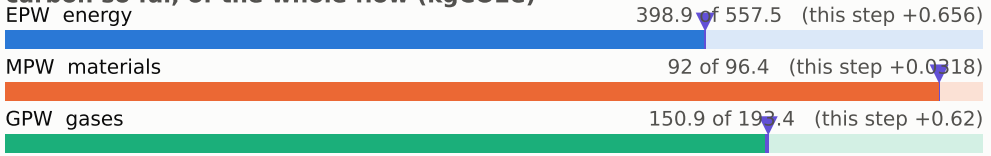

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

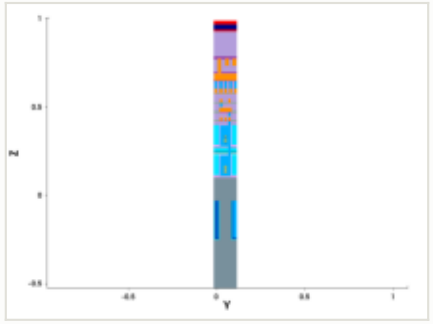

y cut at 0.049 µm

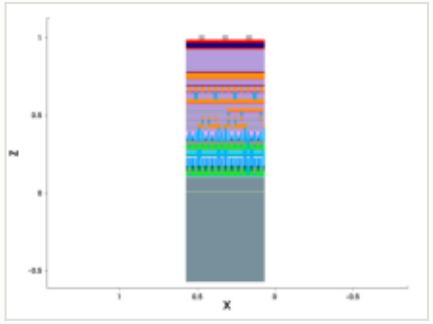

mask for this step

no mask for this step

steps by process area

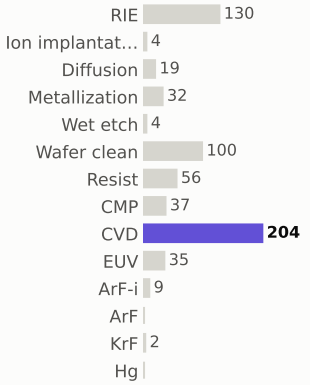

materials deposited (g)

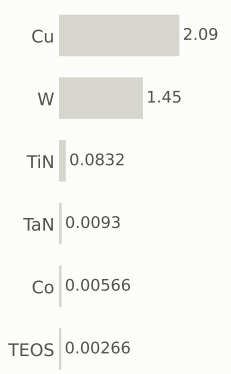

gases emitted (g)

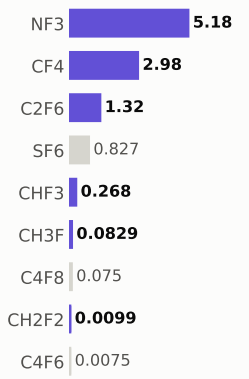

Step #6700: RIE

etch_anisotropic · RIE

1.04	642.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

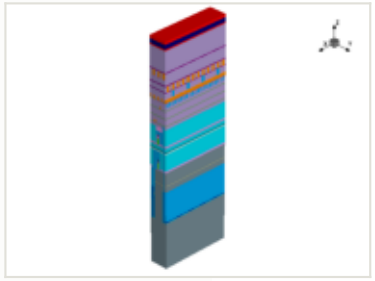

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

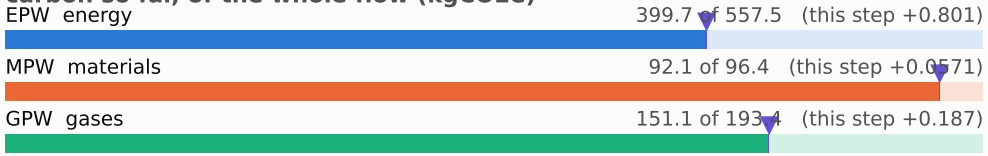

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

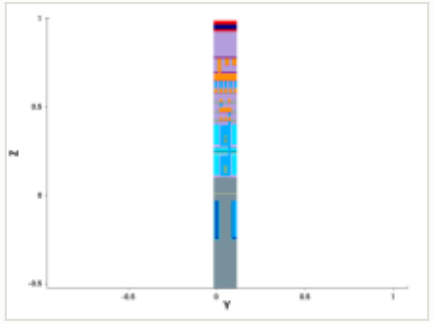

y cut at 0.049 µm

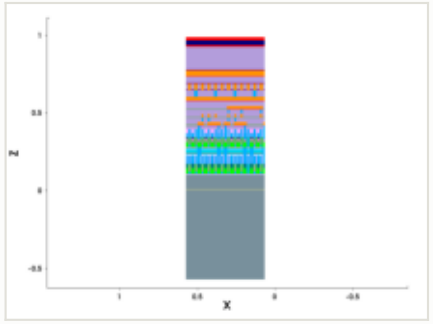

mask for this step

no mask for this step

steps by process area

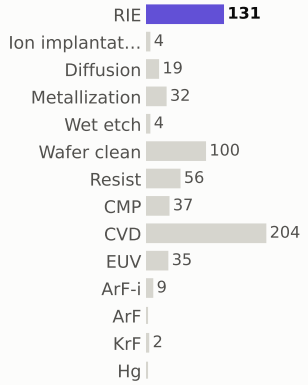

materials deposited (g)

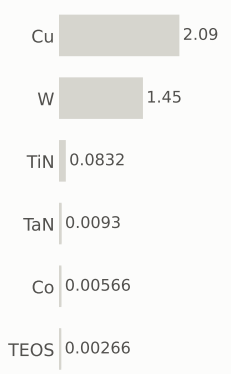

gases emitted (g)

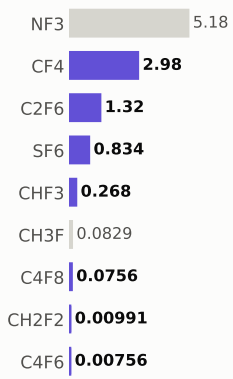

Step #6710: Wafer_clean

etch_strip · Wafer_clean

0.169	643.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

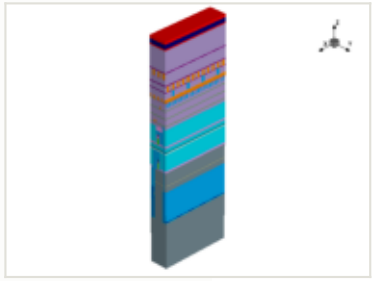

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

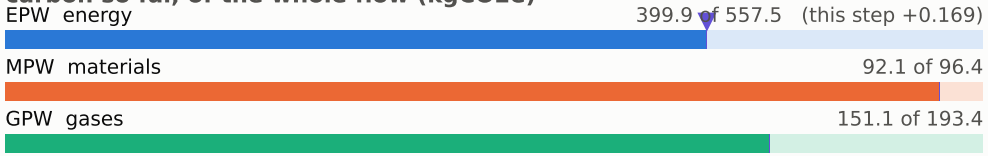

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

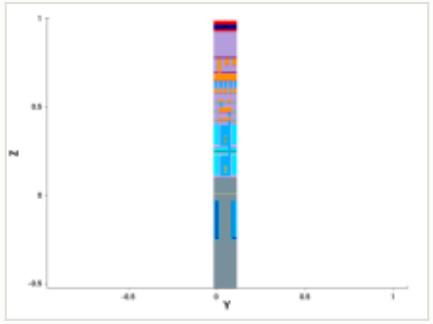

y cut at 0.049 µm

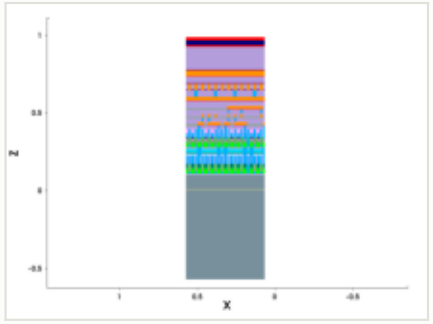

mask for this step

no mask for this step

steps by process area

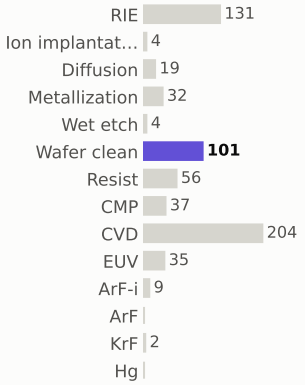

materials deposited (g)

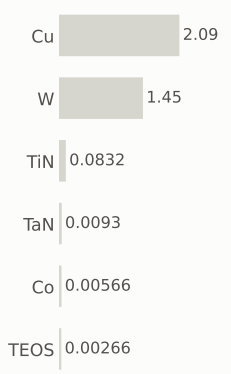

gases emitted (g)

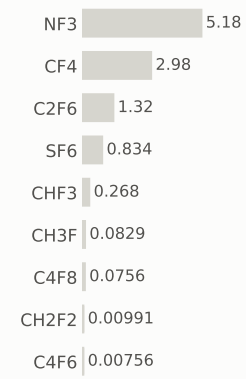

Step #6720: Resist

depo_fill · Resist

0.169	643.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

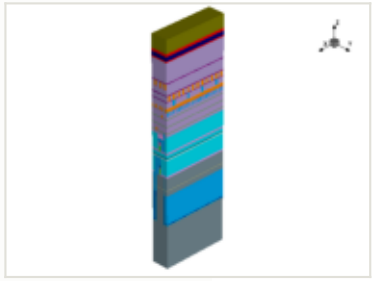

x cut at 0.385 µm

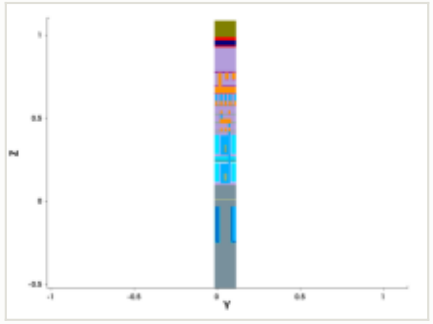

y cut at 0.049 µm

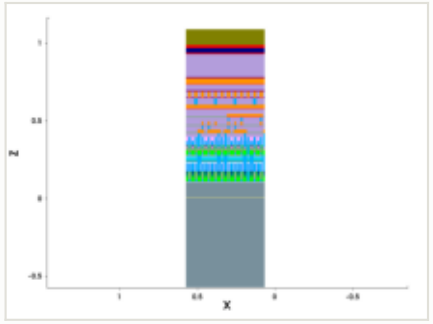

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

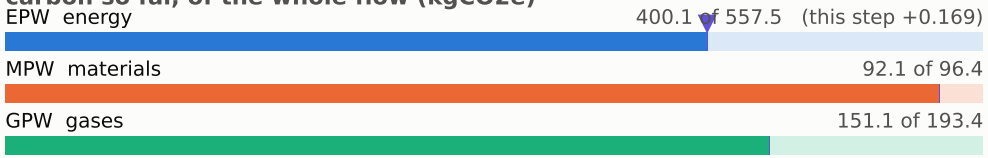

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

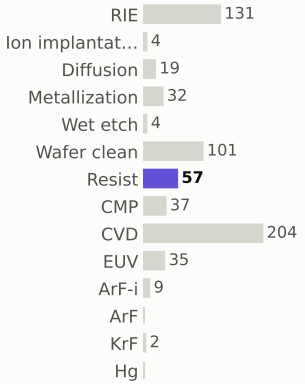

materials deposited (g)

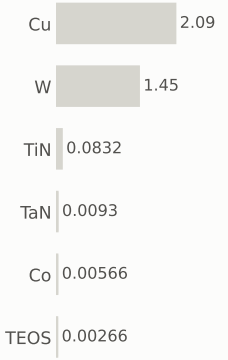

gases emitted (g)



Step #6730: Wafer_clean

clean · Wafer_clean

0.169	643.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

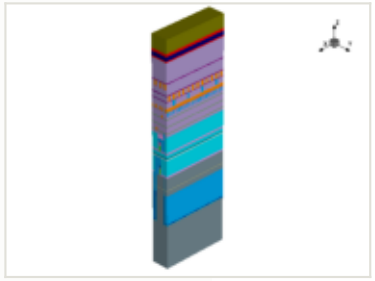

x cut at 0.385 µm

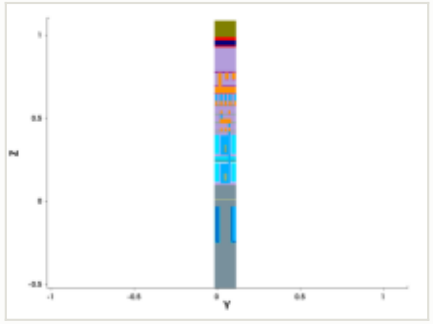

y cut at 0.049 µm

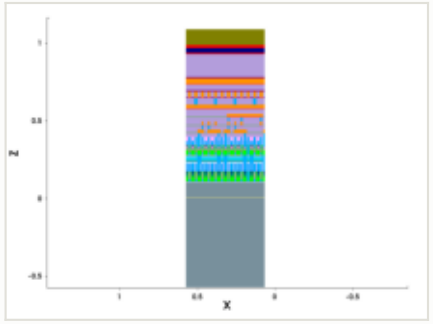

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

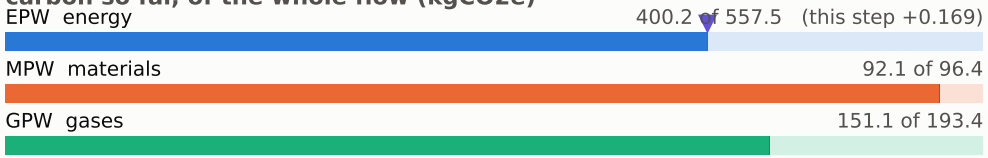

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

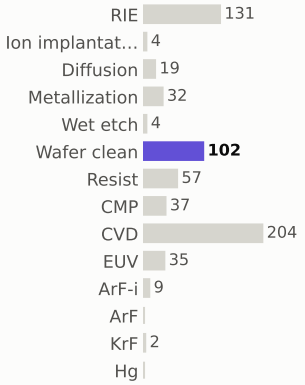

materials deposited (g)

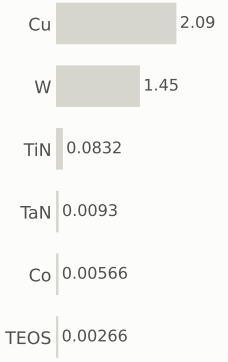

gases emitted (g)

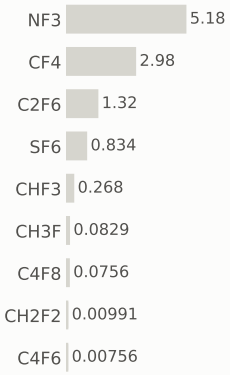

Step #6740: ArF-i

litho_patterning · ArF-i

0.217	643.6	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

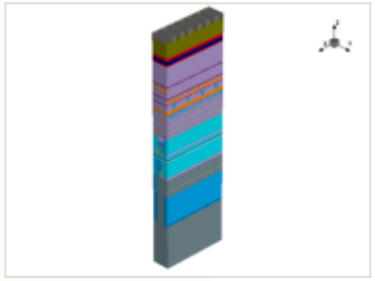

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

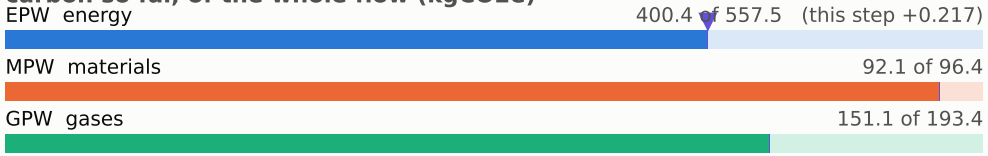

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

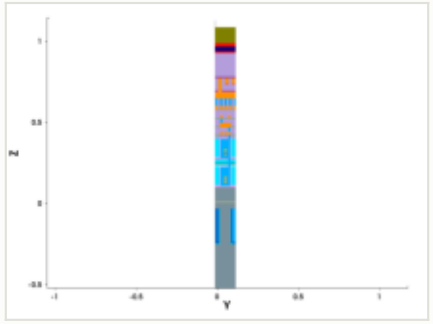

y cut at 0.049 µm

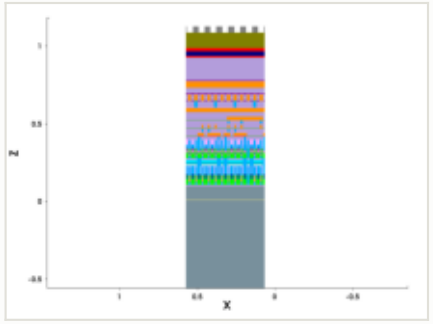

mask: layer 50:0 (GDSII)

steps by process area

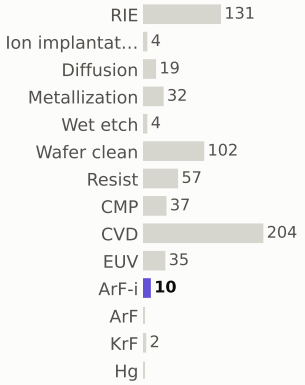

materials deposited (g)

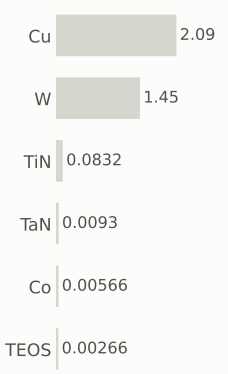

gases emitted (g)

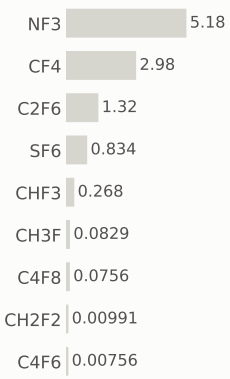

Step #6750: RIE

etch_anisotropic · RIE

1.04	644.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

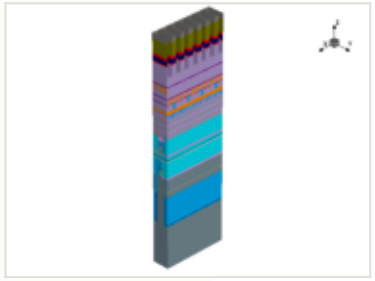

x cut at 0.385 µm

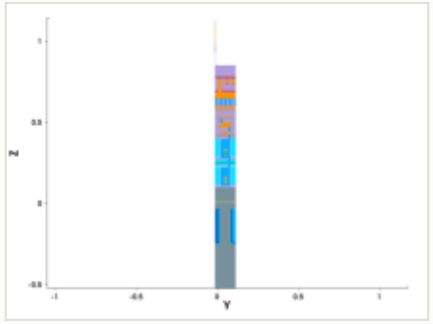

y cut at 0.049 µm

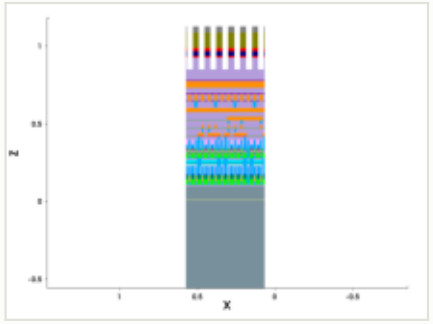

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

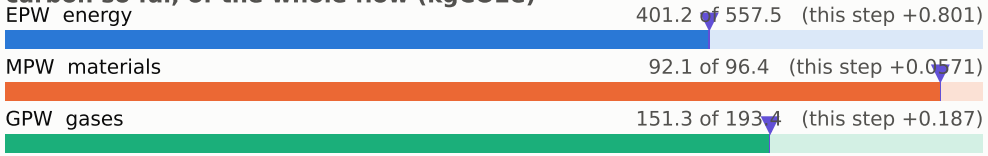

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

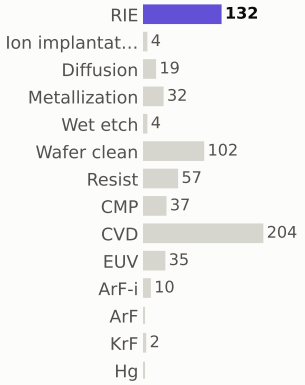

materials deposited (g)

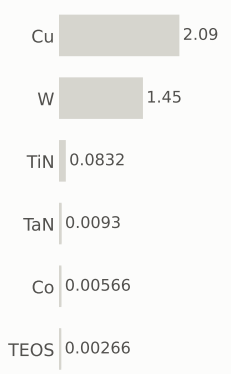

gases emitted (g)

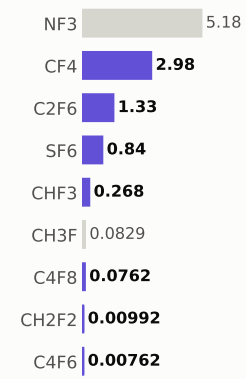

Step #6760: Wafer_clean

etch_strip · Wafer_clean

0.169	644.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

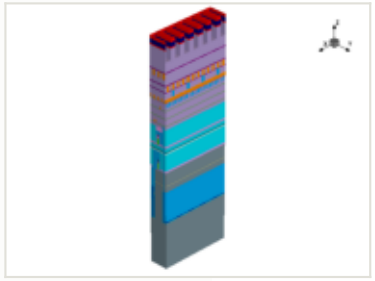

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

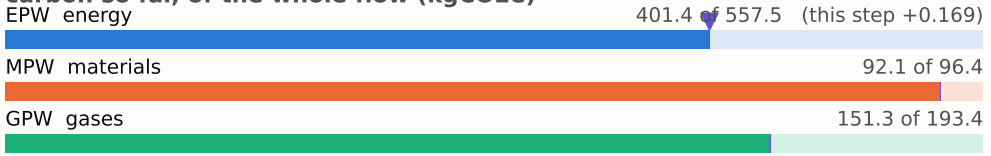

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

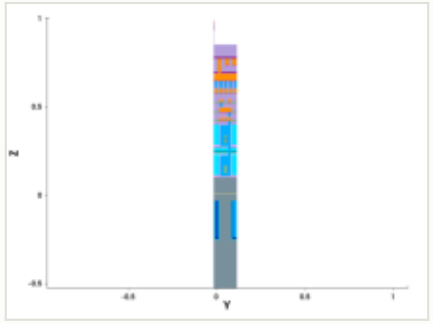

y cut at 0.049 µm

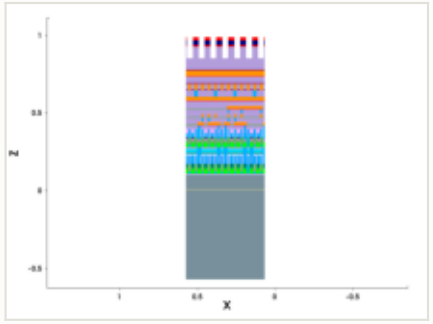

mask for this step

no mask for this step

steps by process area

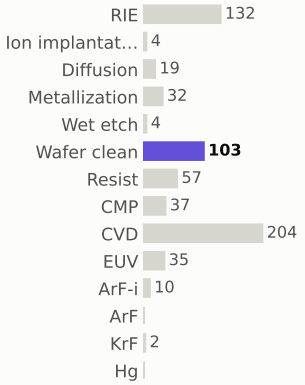

materials deposited (g)

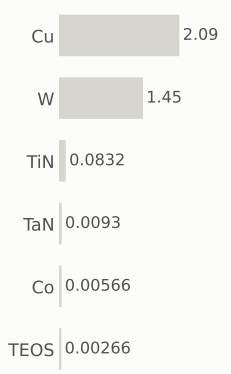

gases emitted (g)

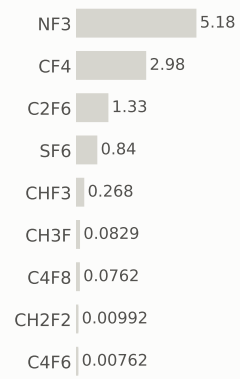

Step #6770: Resist

depo_fill · Resist

0.169	645.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

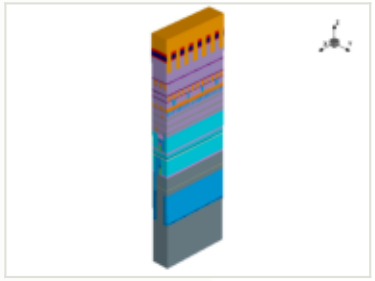

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

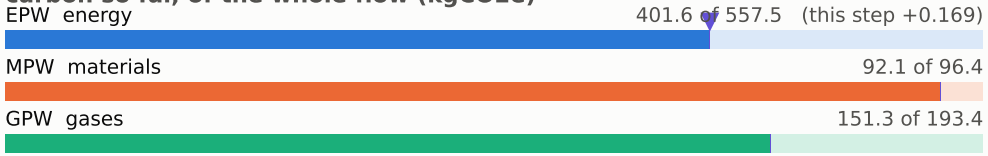

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

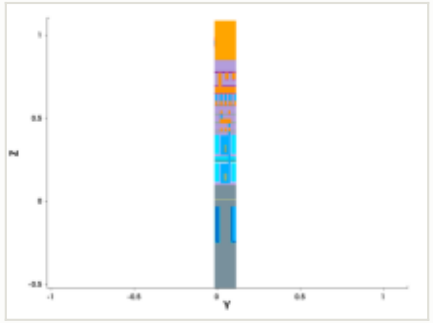

y cut at 0.049 µm

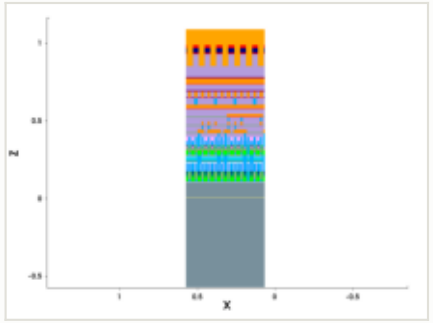

mask for this step

no mask for this step

steps by process area

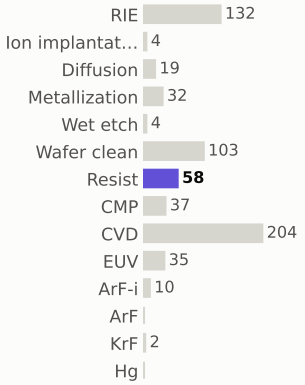

materials deposited (g)

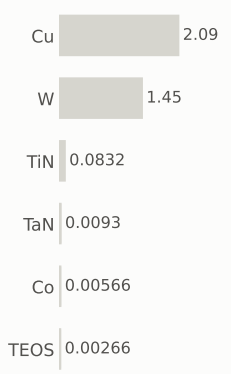

gases emitted (g)

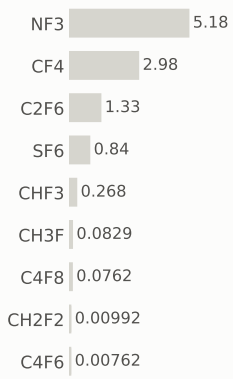

Step #6780: CVD

depo_fill · CVD

1.31	646.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

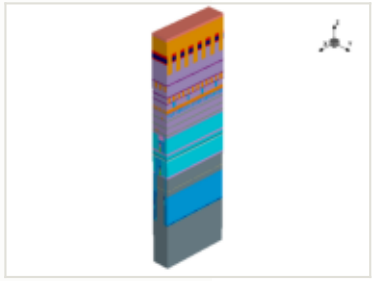

x cut at 0.385 µm

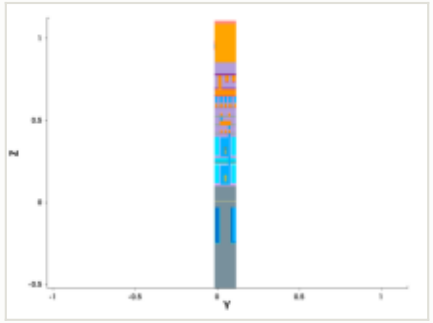

y cut at 0.049 µm

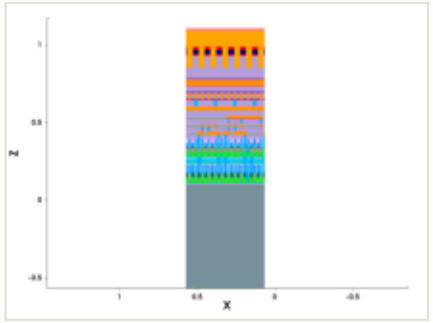

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

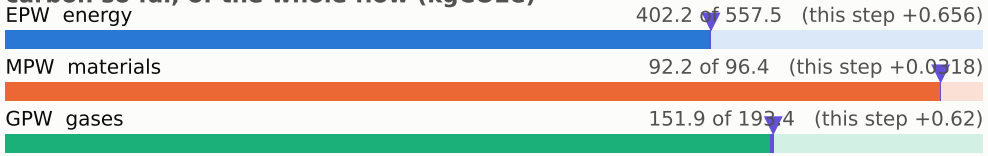

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

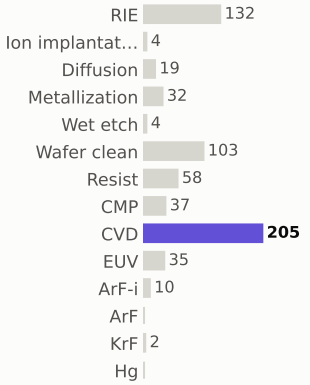

materials deposited (g)

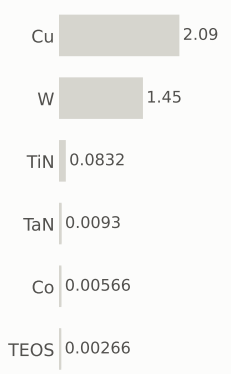

gases emitted (g)



Step #6790: Wafer_clean

clean · Wafer_clean

0.169	646.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

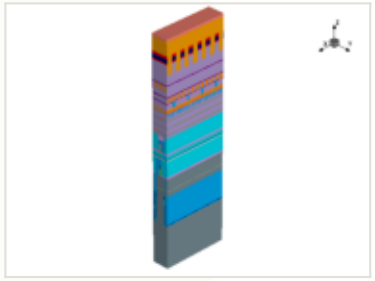

x cut at 0.385 µm

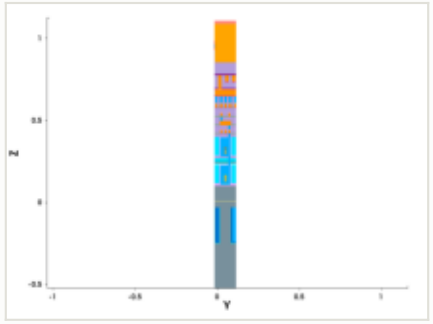

y cut at 0.049 µm

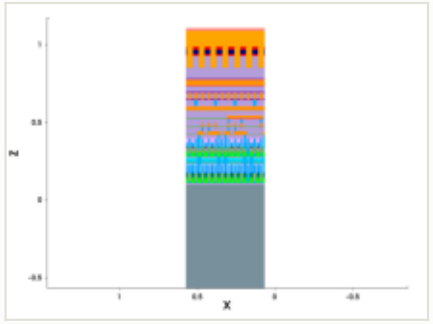

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

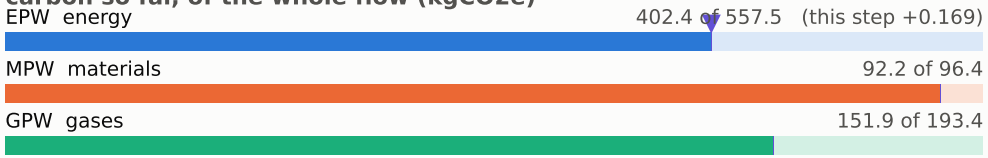

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

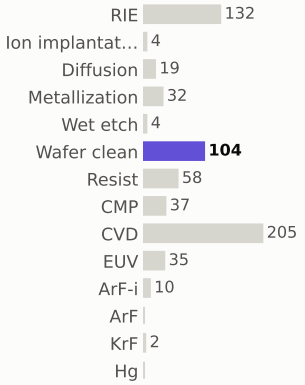

materials deposited (g)

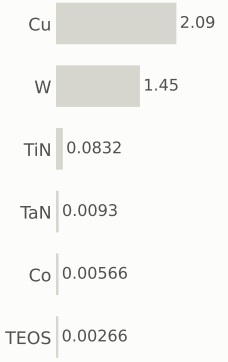

gases emitted (g)

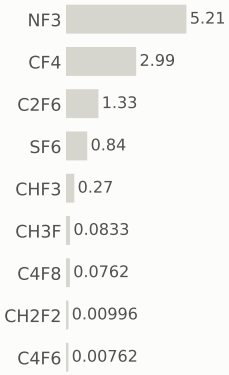

Step #6800: ArF-i

litho_patterning · ArF-i

0.217	646.7	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

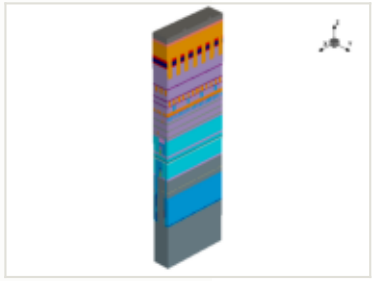

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

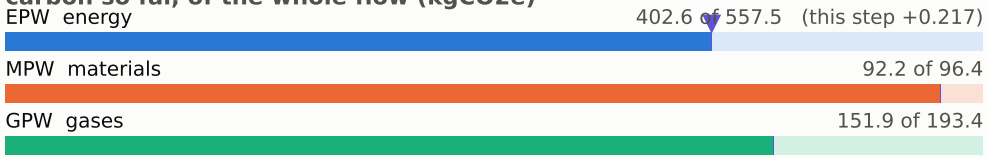

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

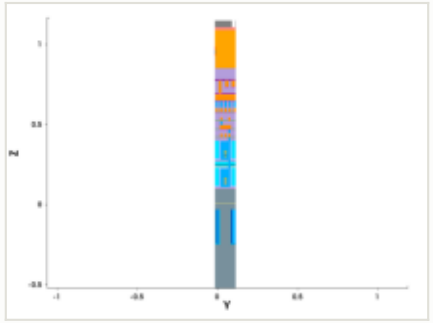

y cut at 0.049 µm

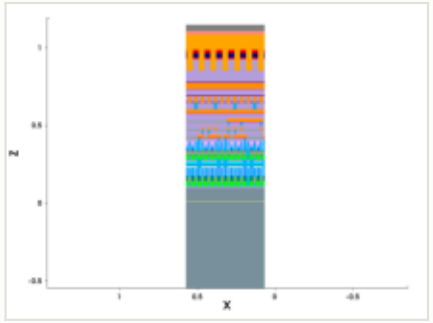

mask: layer 10471:0 (GDSII)

steps by process area

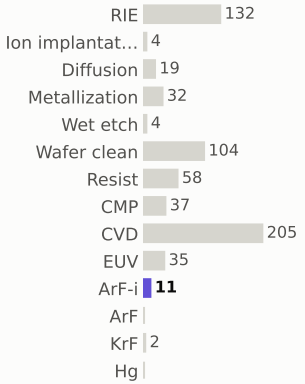

materials deposited (g)

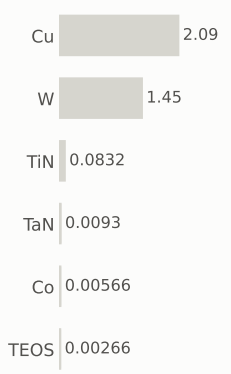

gases emitted (g)

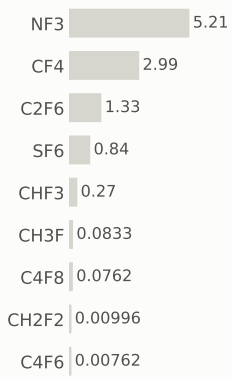

Step #6810: RIE

etch_anisotropic · RIE

1.04	647.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

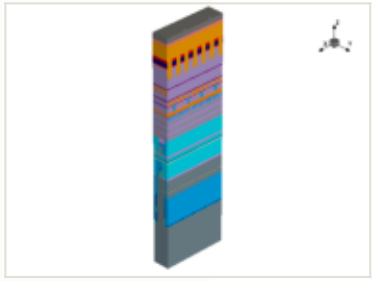

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

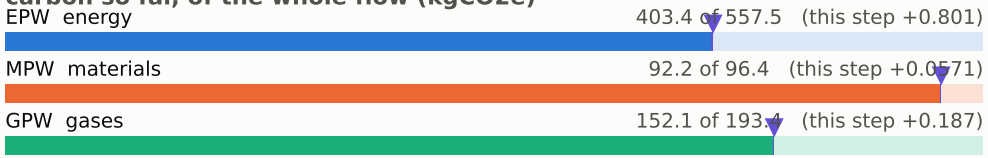

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

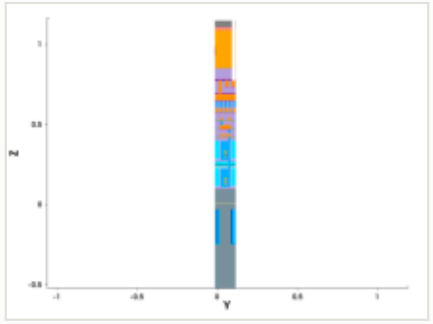

y cut at 0.049 µm

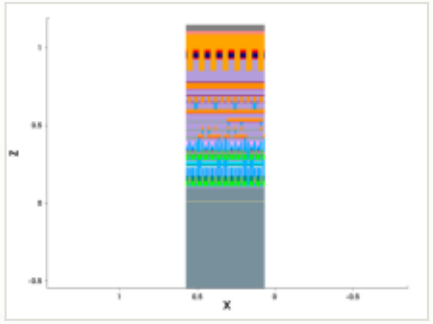

mask for this step

no mask for this step

steps by process area

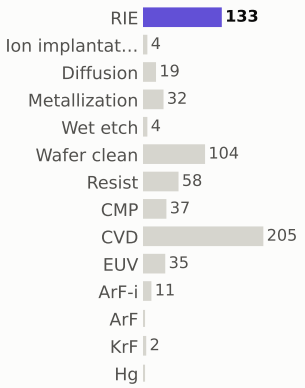

materials deposited (g)

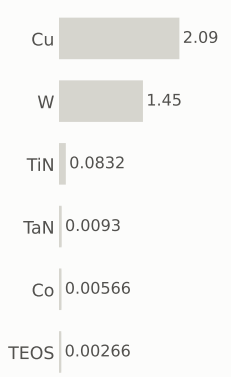

gases emitted (g)

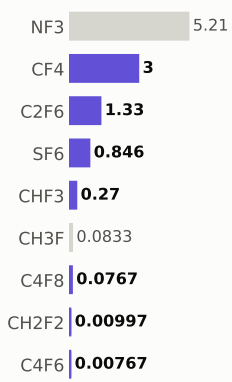

Step #6820: Wafer_clean

etch_strip · Wafer_clean

0.169	647.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

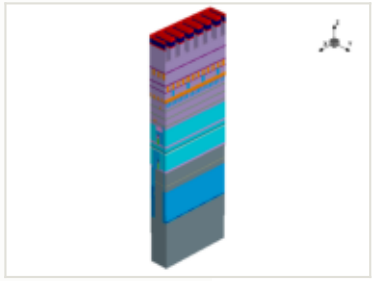

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

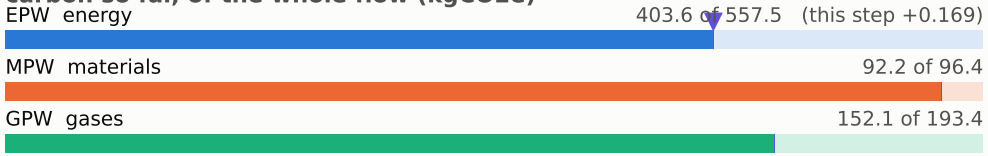

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

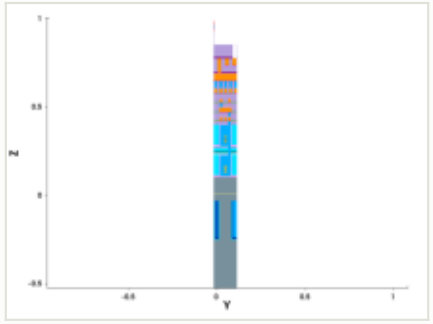

y cut at 0.049 µm

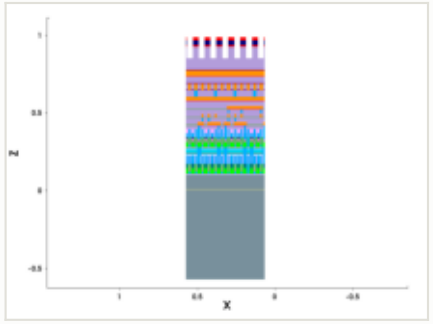

mask for this step

no mask for this step

steps by process area

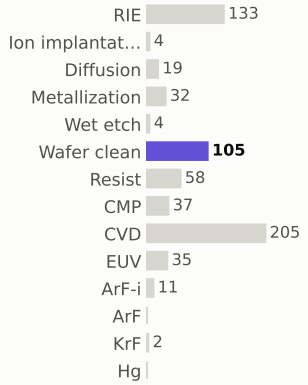

materials deposited (g)

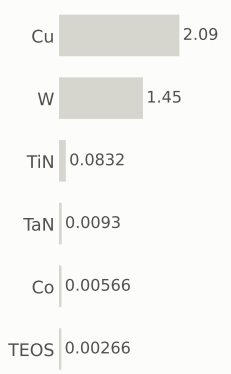

gases emitted (g)

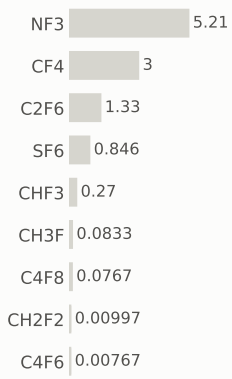

Step #6830: Resist

depo_fill · Resist

0.169	648.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

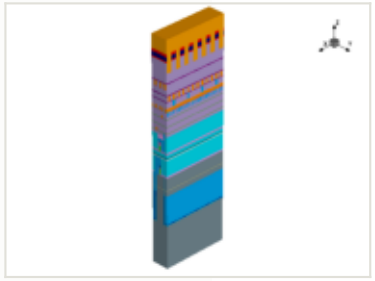

x cut at 0.385 µm

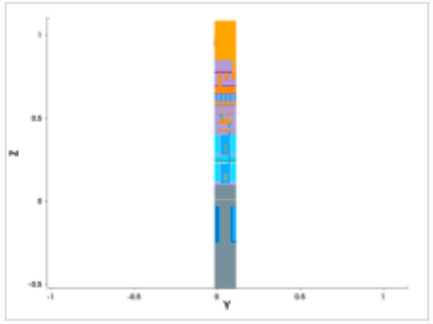

y cut at 0.049 µm

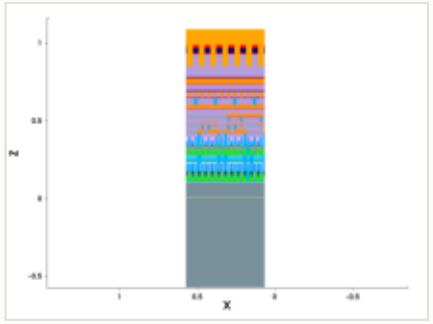

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

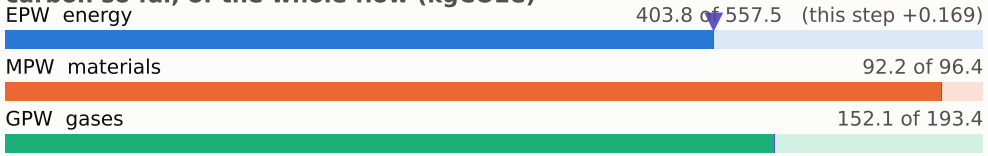

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

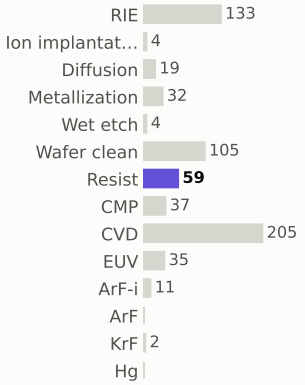

materials deposited (g)



gases emitted (g)



Step #6840: CVD

depo_fill · CVD

1.31	649.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

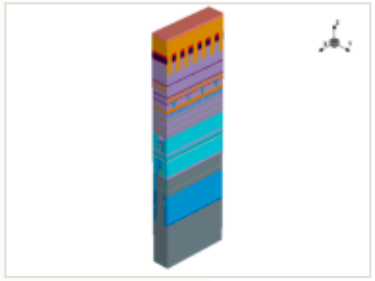

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

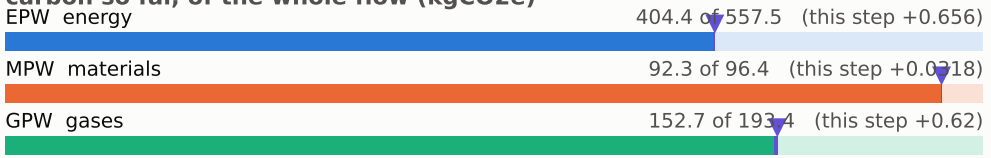

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

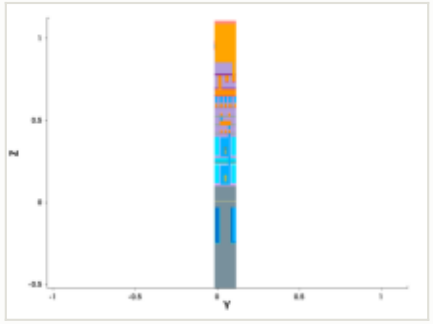

y cut at 0.049 µm

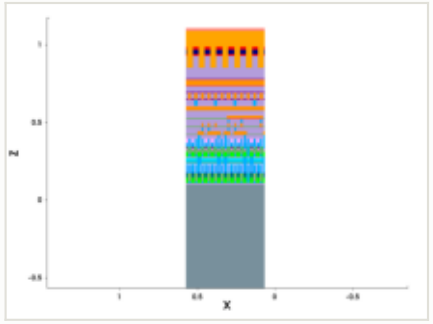

mask for this step

no mask for this step

steps by process area

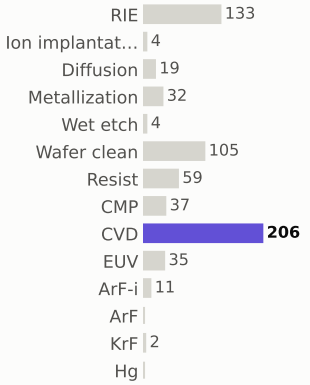

materials deposited (g)

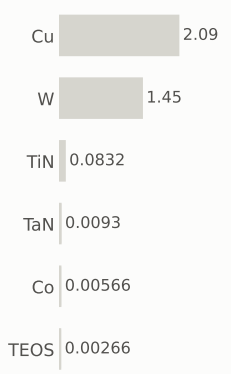

gases emitted (g)

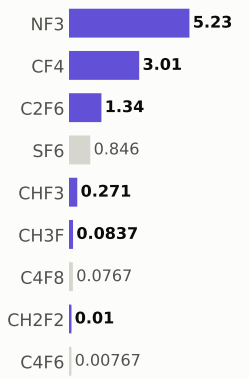

Step #6850: Wafer_clean

clean · Wafer_clean

0.169	649.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

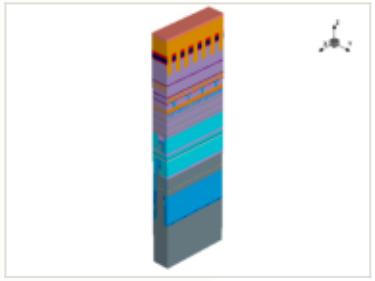

x cut at 0.385 µm

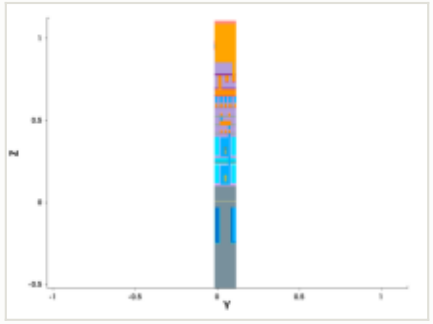

y cut at 0.049 µm

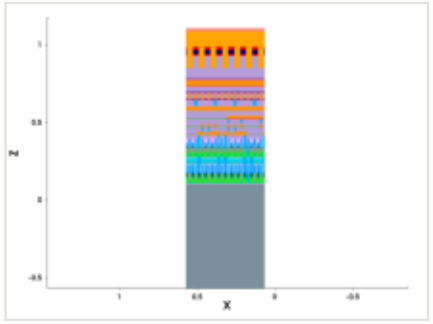

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

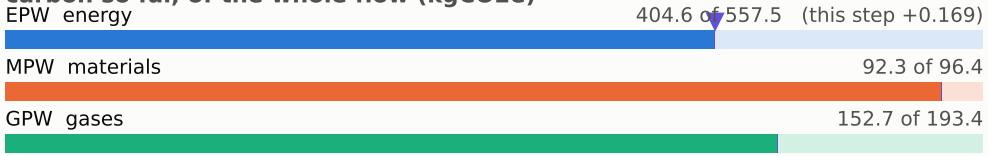

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

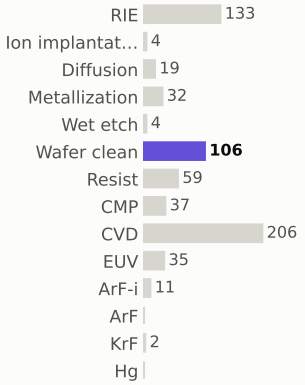

materials deposited (g)

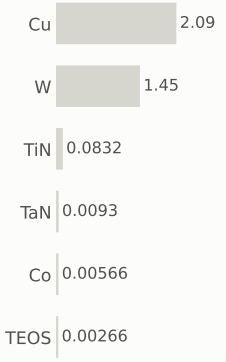

gases emitted (g)

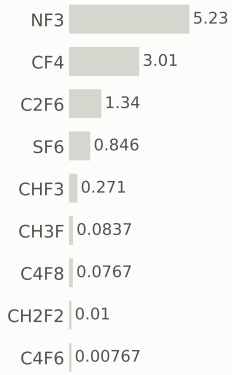

Step #6860: ArF-i

litho_patterning · ArF-i

0.217	649.8	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

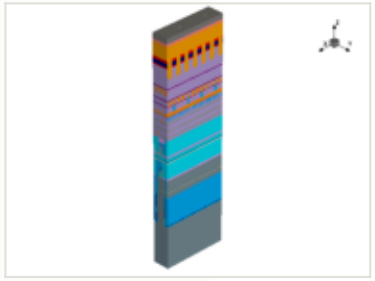

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

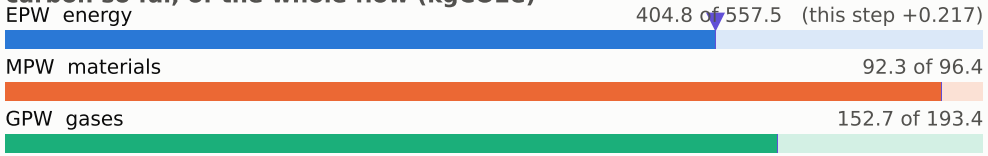

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

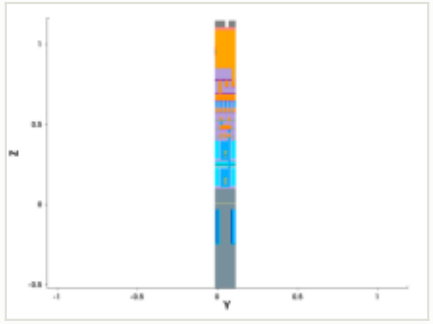

y cut at 0.049 µm

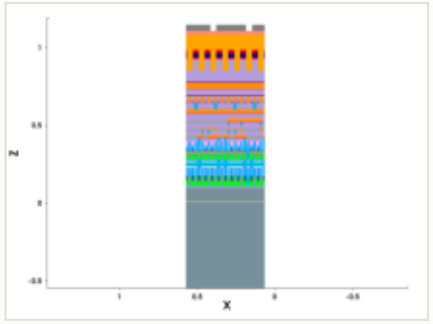

mask: layer 10472:0 (GDSII)

steps by process area

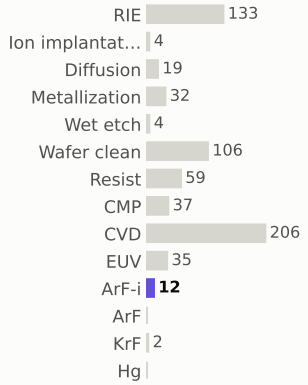

materials deposited (g)

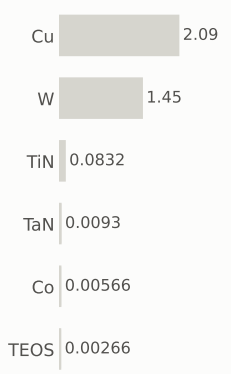

gases emitted (g)

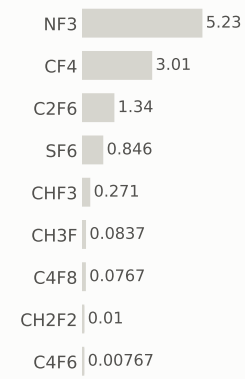

Step #6870: RIE

etch_anisotropic · RIE

1.04	650.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

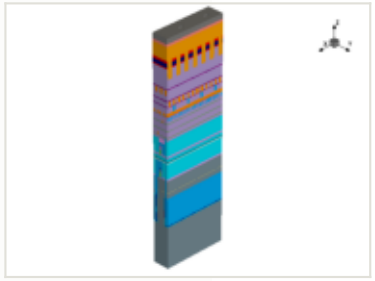

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

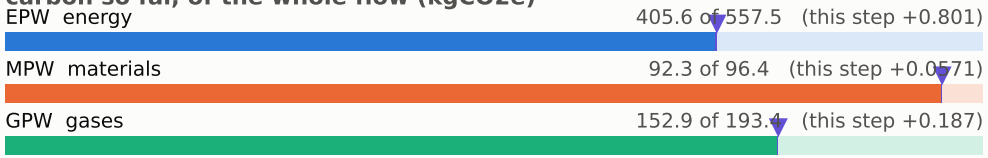

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

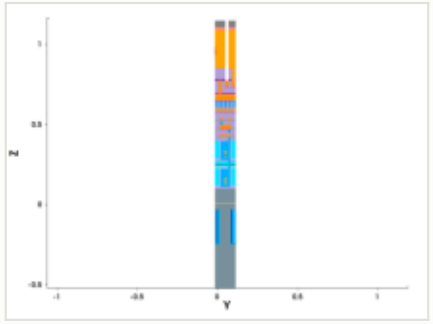

y cut at 0.049 µm

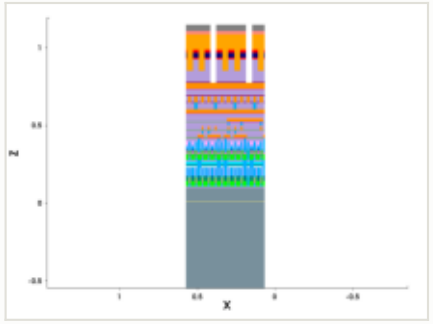

mask for this step

no mask for this step

steps by process area

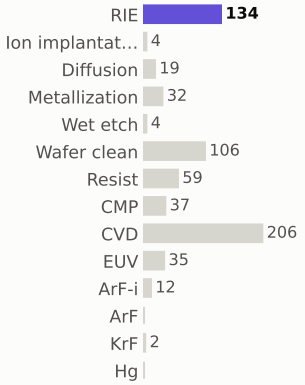

materials deposited (g)

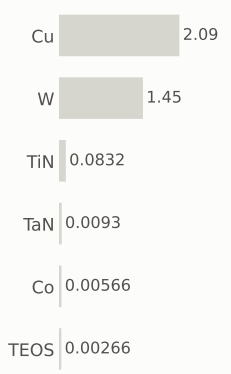

gases emitted (g)

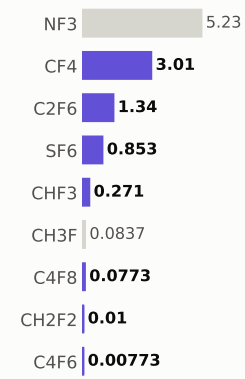

Step #6880: Wafer_clean

etch_strip · Wafer_clean

0.169	651.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

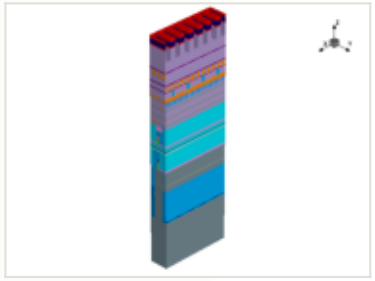

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

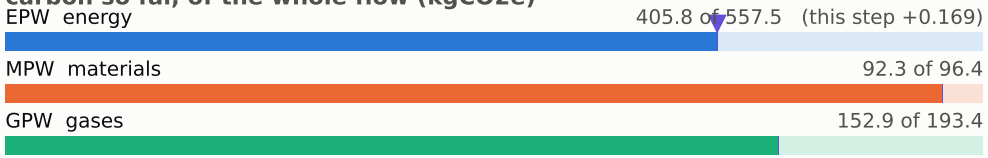

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

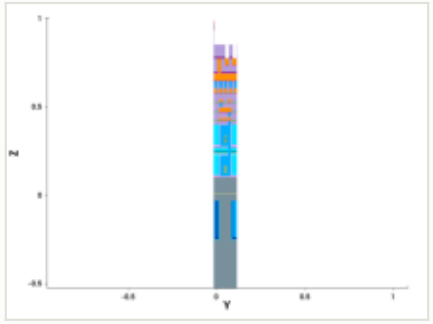

y cut at 0.049 µm

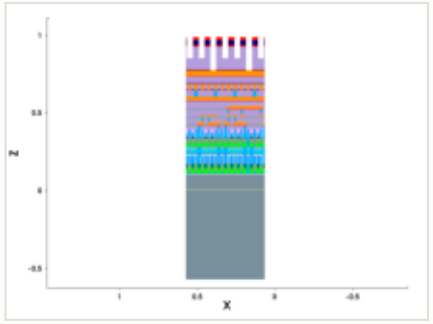

mask for this step

no mask for this step

steps by process area

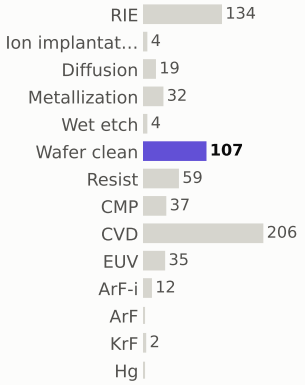

materials deposited (g)

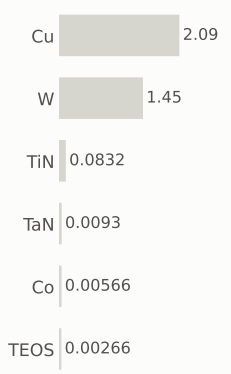

gases emitted (g)



Step #6890: Resist

depo_fill · Resist

0.169	651.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

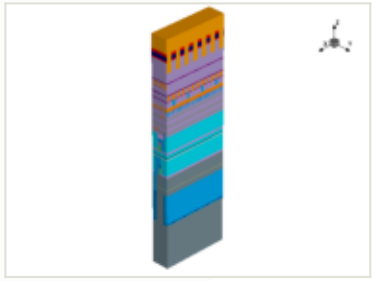

x cut at 0.385 µm

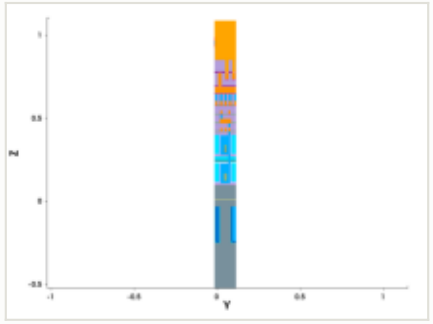

y cut at 0.049 µm

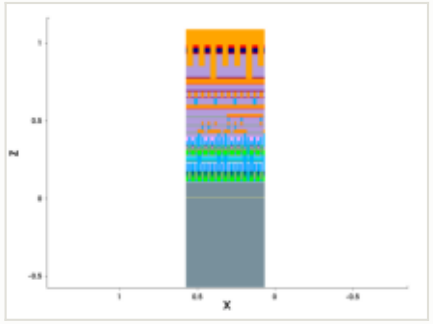

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

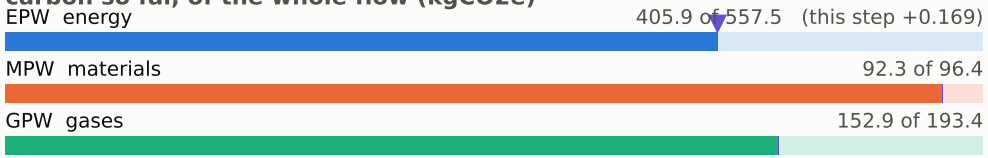

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

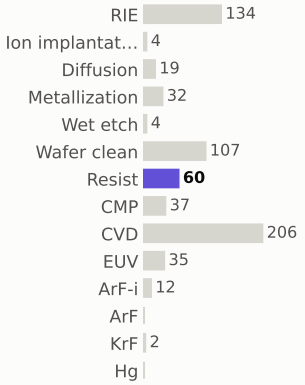

materials deposited (g)

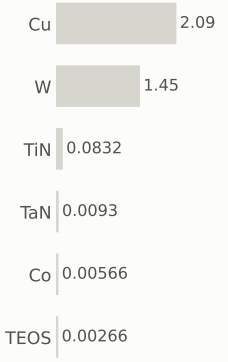

gases emitted (g)

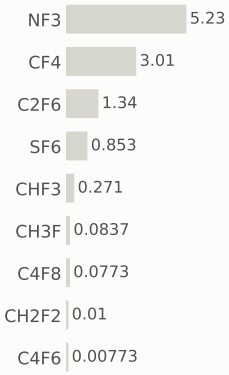

Step #6900: CVD

depo_fill · CVD

1.31	652.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

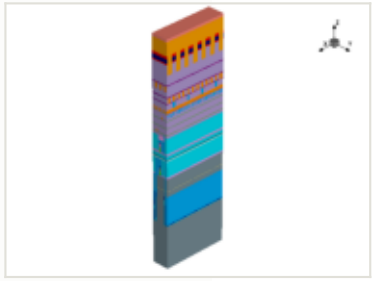

x cut at 0.385 µm

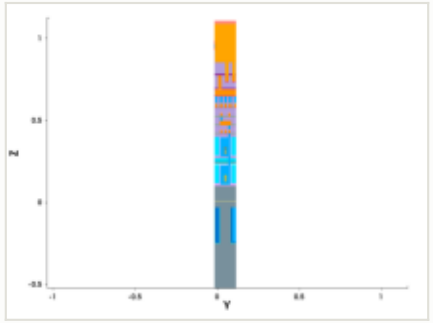

y cut at 0.049 µm

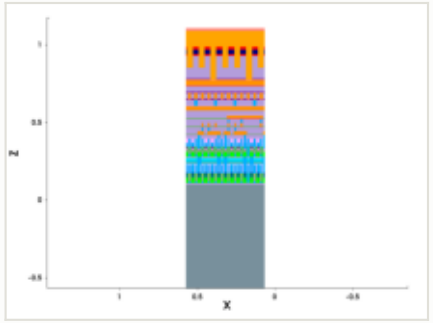

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

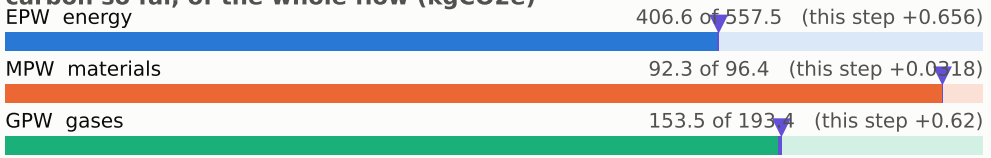

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

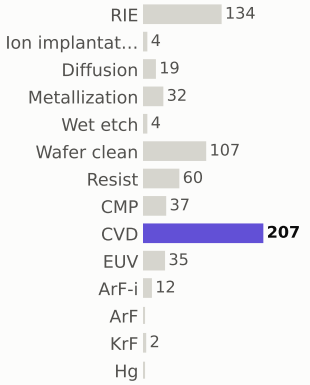

materials deposited (g)

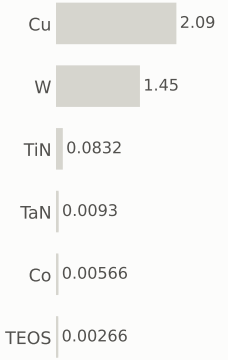

gases emitted (g)

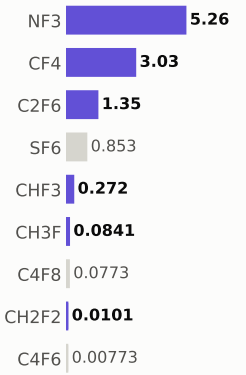

Step #6910: Wafer_clean

clean · Wafer_clean

0.169	652.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

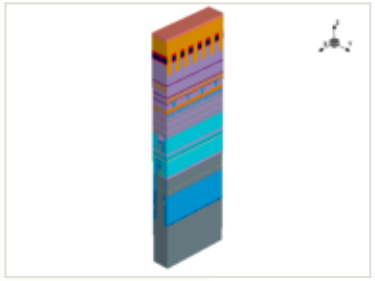

x cut at 0.385 µm

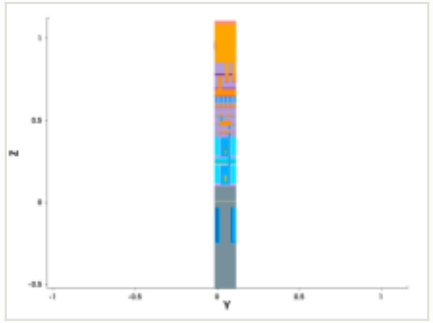

y cut at 0.049 µm

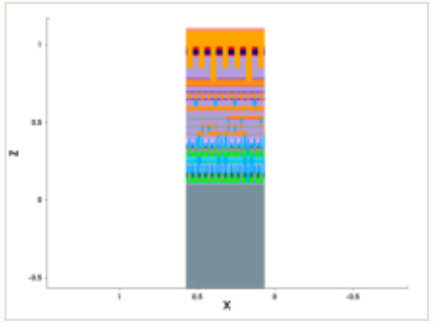

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

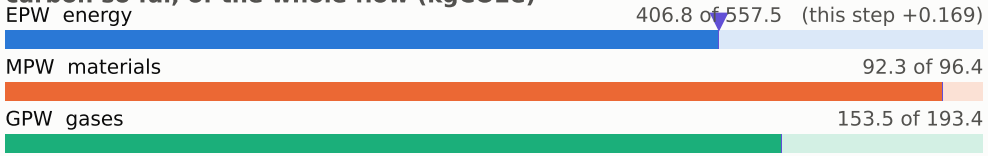

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

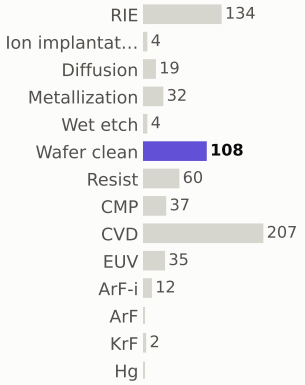

materials deposited (g)

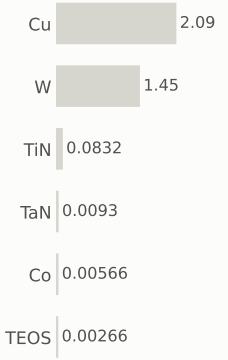

gases emitted (g)

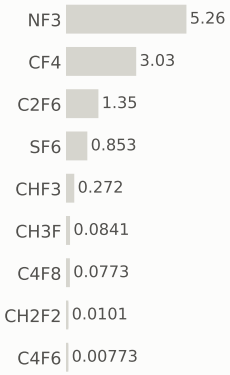

Step #6920: ArF-i

litho_patterning · ArF-i

0.217	652.8	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

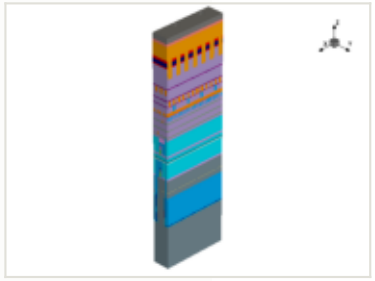

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

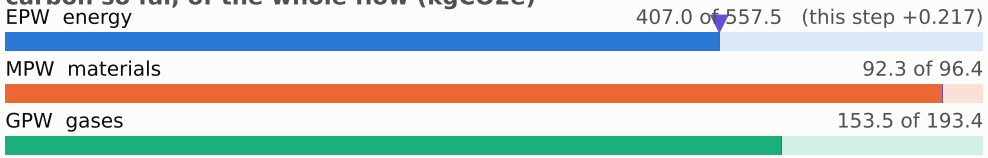

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

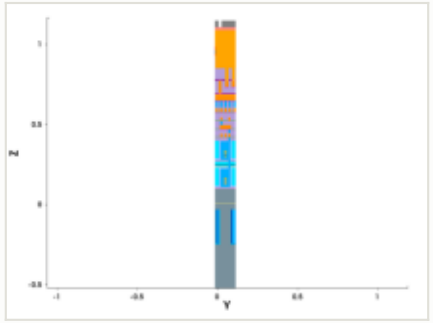

y cut at 0.049 µm

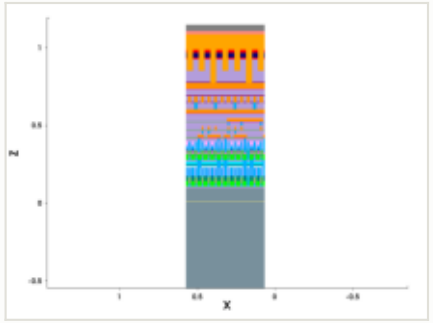

mask: layer 10473:0 (GDSII)

steps by process area

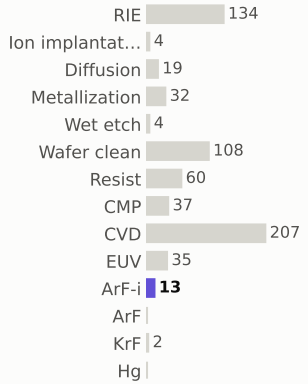

materials deposited (g)

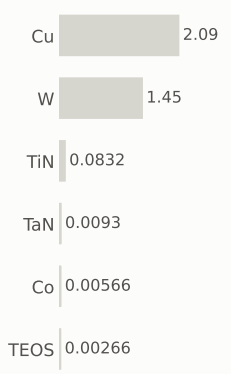

gases emitted (g)

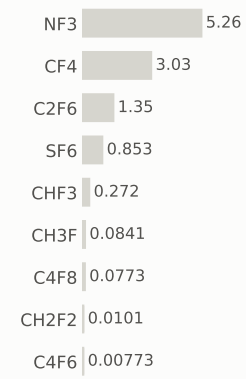

Step #6930: RIE

etch_anisotropic · RIE

1.04	653.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

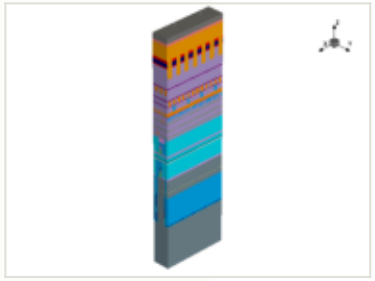

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

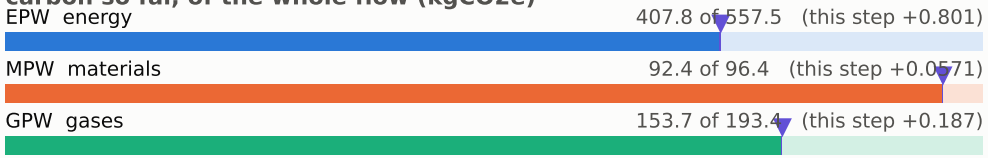

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

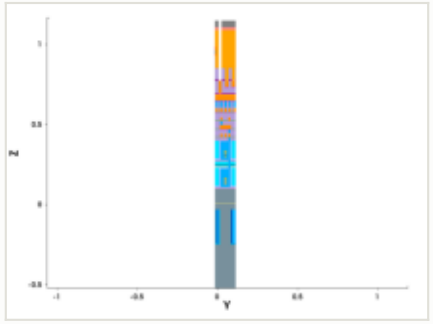

y cut at 0.049 µm

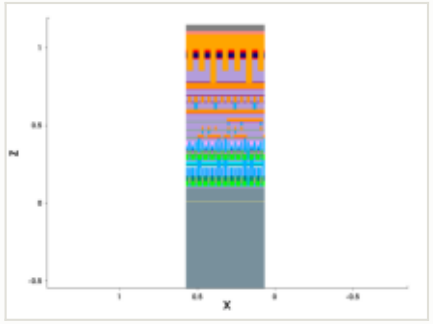

mask for this step

no mask for this step

steps by process area

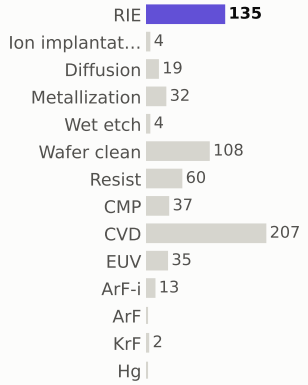

materials deposited (g)

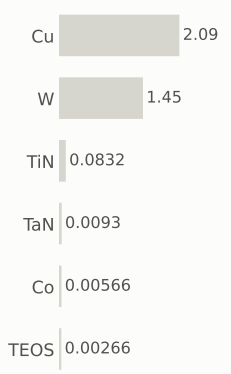

gases emitted (g)

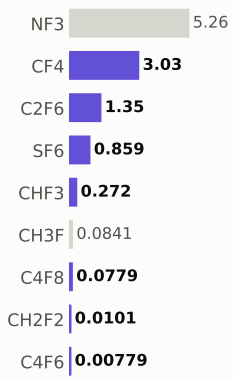

Step #6940: Wafer_clean

etch_strip · Wafer_clean

0.169	654.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

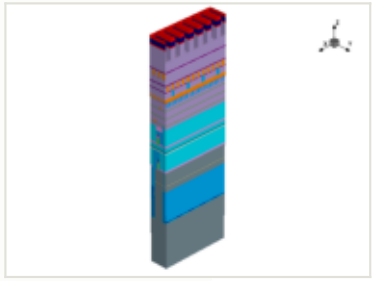

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

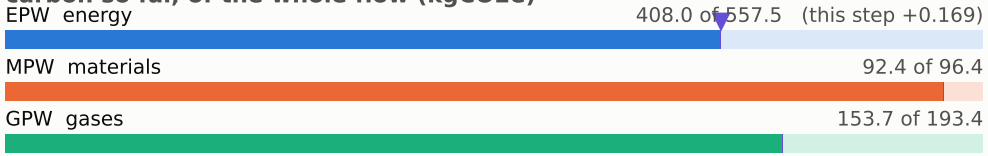

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

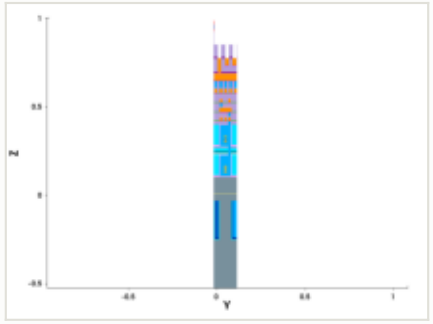

y cut at 0.049 µm

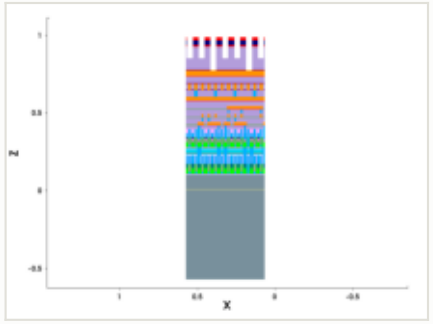

mask for this step

no mask for this step

steps by process area

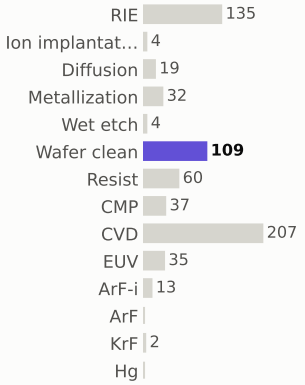

materials deposited (g)

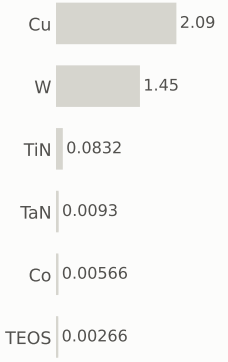

gases emitted (g)

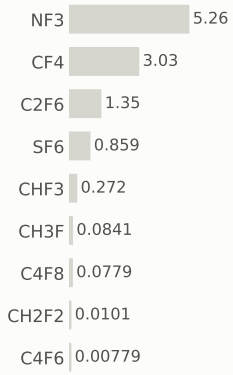

Step #6950: Resist

depo_fill · Resist

0.169	654.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

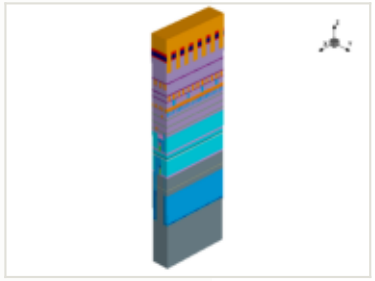

x cut at 0.385 µm

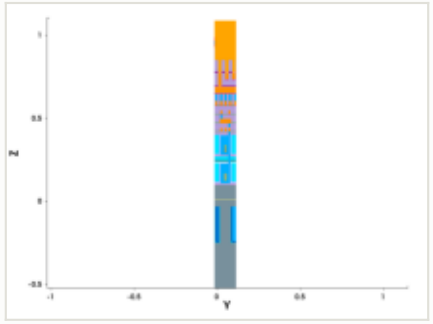

y cut at 0.049 µm

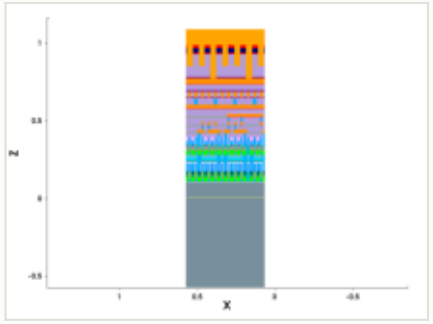

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

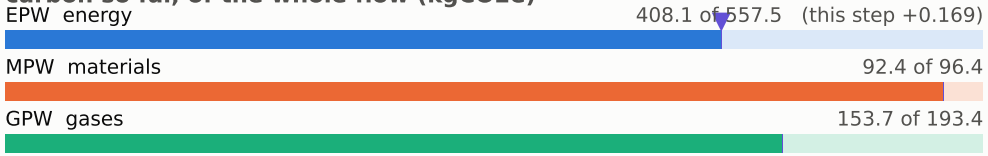

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

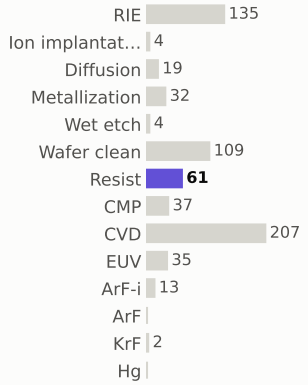

materials deposited (g)

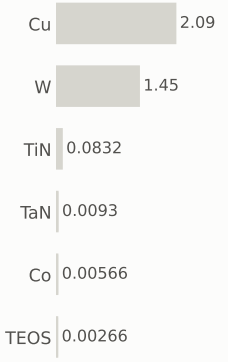

gases emitted (g)

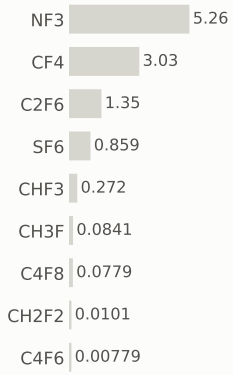

Step #6960: CVD

depo_fill · CVD

1.31	655.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

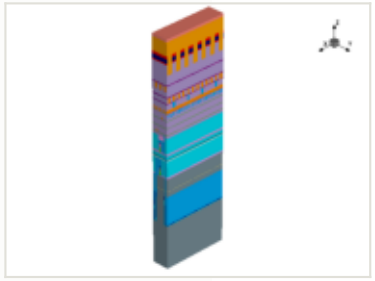

x cut at 0.385 µm

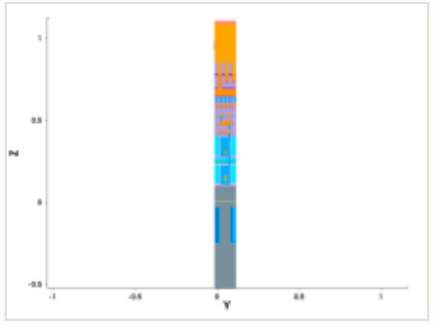

y cut at 0.049 µm

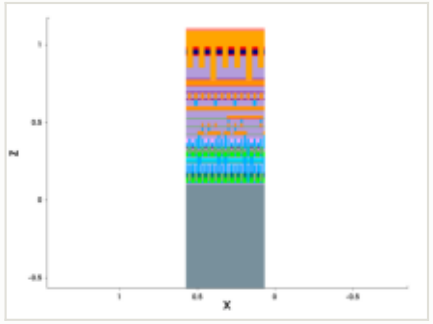

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

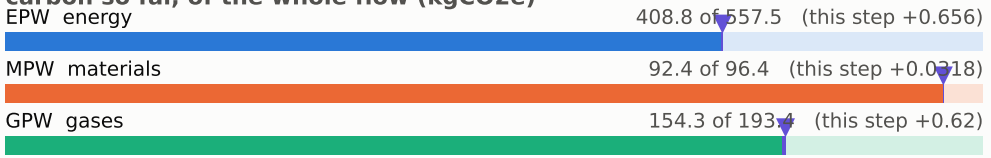

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

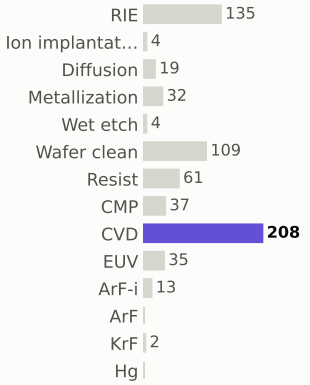

materials deposited (g)

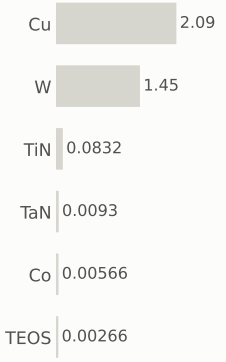

gases emitted (g)



Step #6970: Wafer_clean

clean · Wafer_clean

0.169	655.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

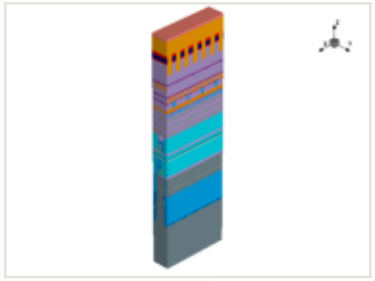

x cut at 0.385 µm

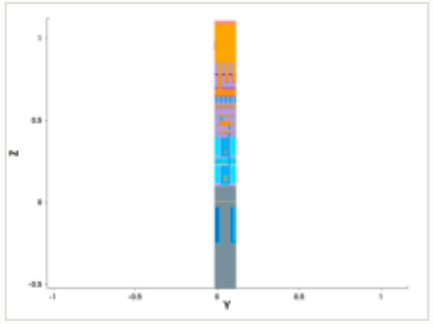

y cut at 0.049 µm

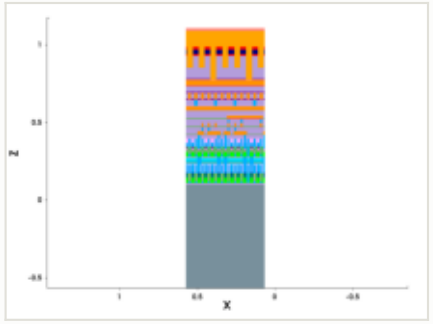

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

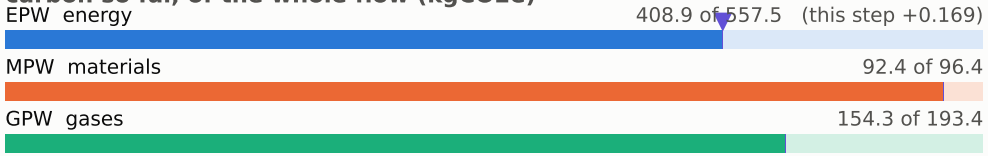

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

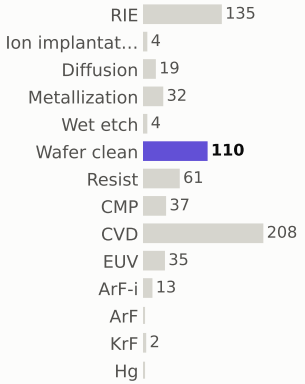

materials deposited (g)



gases emitted (g)



Step #6980: ArF-i

litho_patterning · ArF-i

0.217	655.9	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

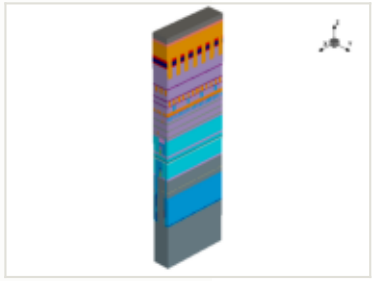

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

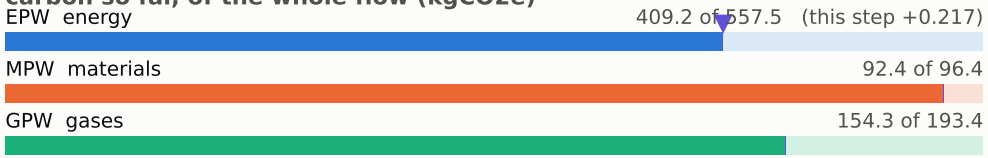

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

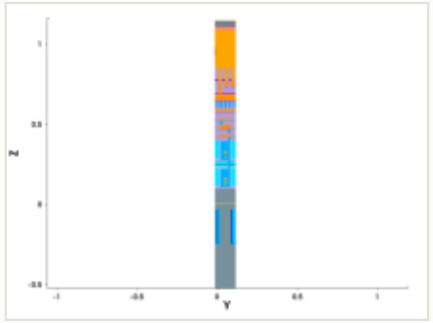

y cut at 0.049 µm

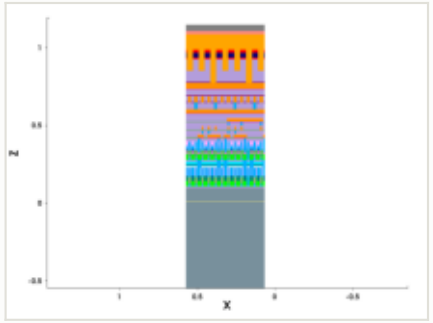

mask: layer 10474:0 (GDSII)

nothing in the clip window

steps by process area

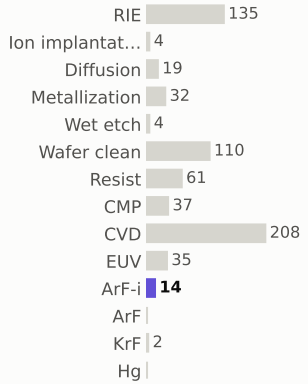

materials deposited (g)

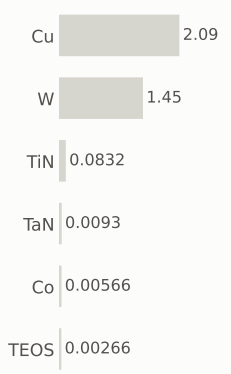

gases emitted (g)

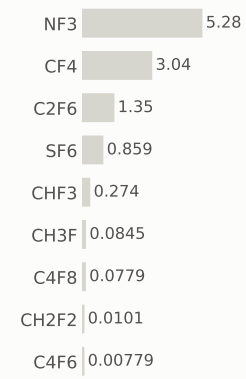

Step #6990: RIE

etch_anisotropic · RIE

1.04	656.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

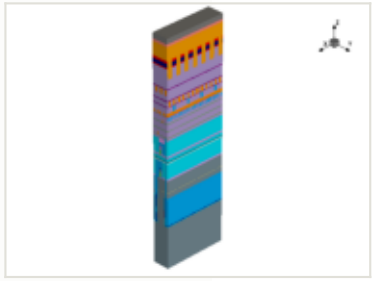

x cut at 0.385 µm

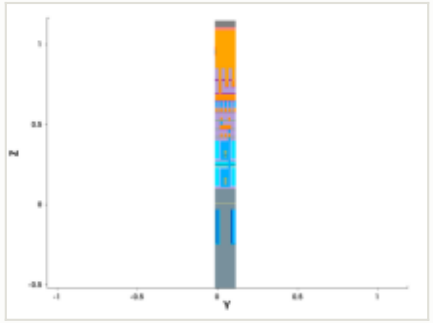

y cut at 0.049 µm

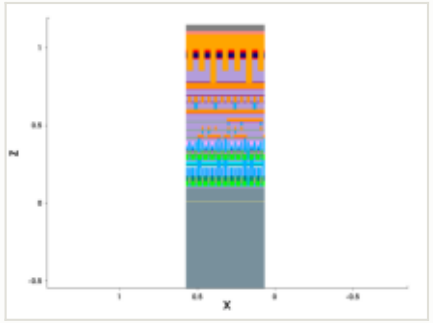

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

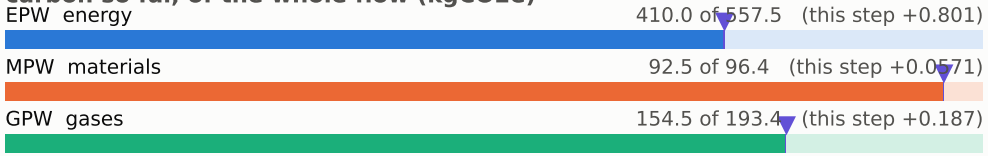

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

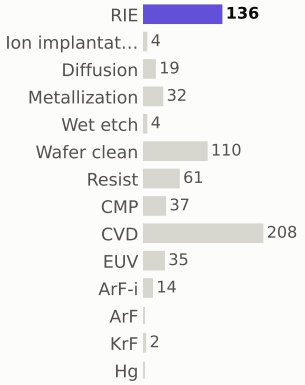

materials deposited (g)



gases emitted (g)

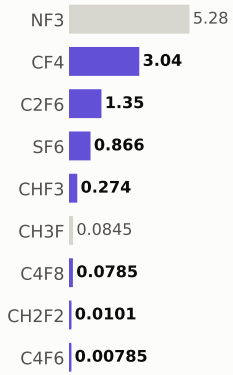

Step #7000: Wafer_clean

etch_strip · Wafer_clean

0.169	657.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

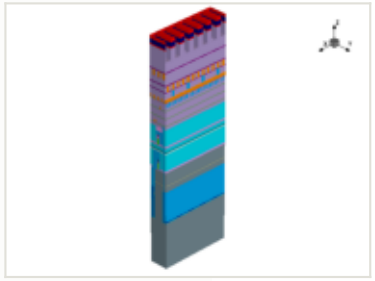

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

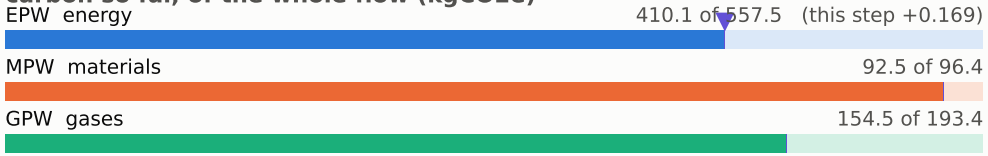

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

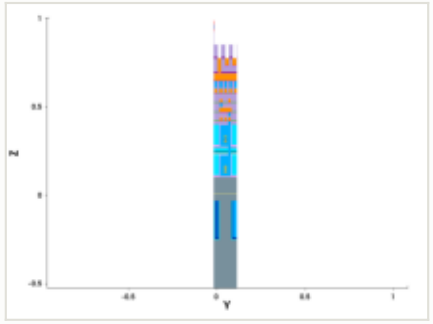

y cut at 0.049 µm

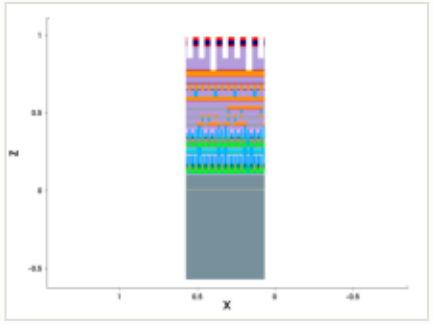

mask for this step

no mask for this step

steps by process area

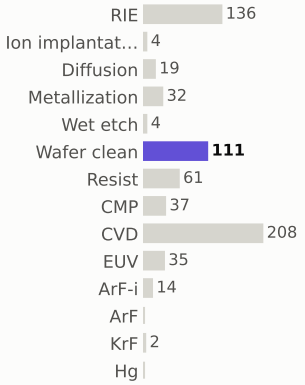

materials deposited (g)

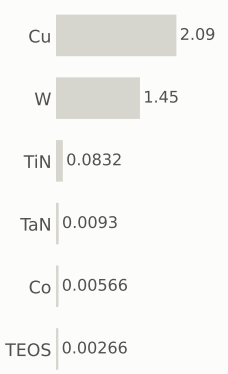

gases emitted (g)

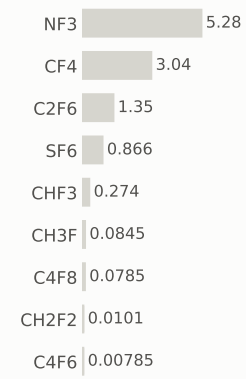

Step #7010: Metallization

depo_ellipsoidal · Metallization

1.2	658.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

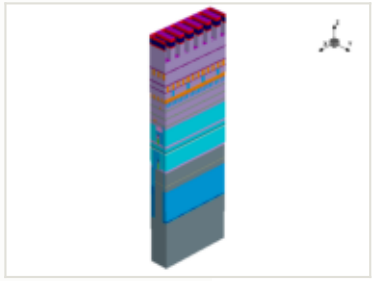

x cut at 0.385 µm

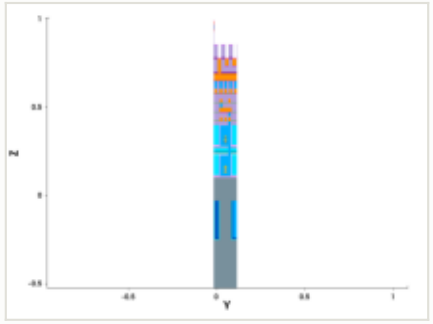

y cut at 0.049 µm

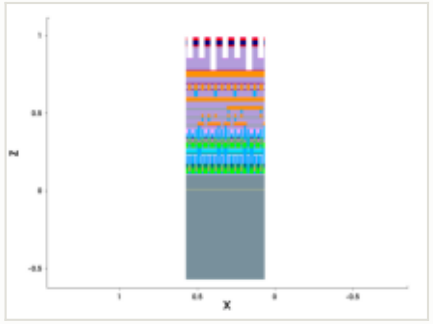

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

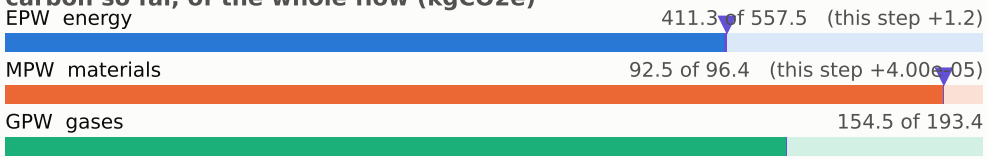

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

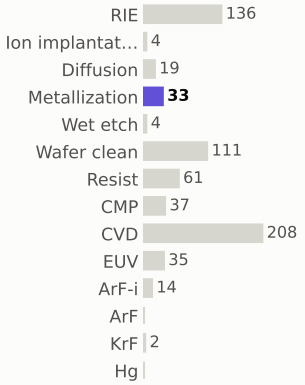

materials deposited (g)

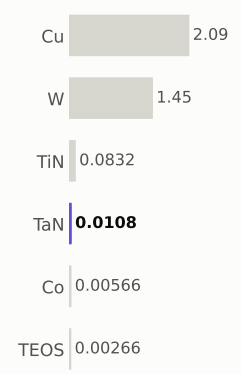

gases emitted (g)

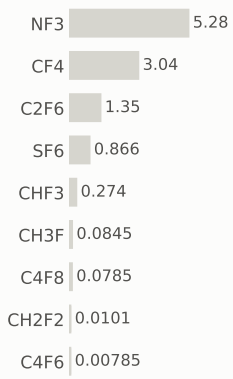

Step #7020: Metallization

depo_fill · Metallization

1.21	659.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

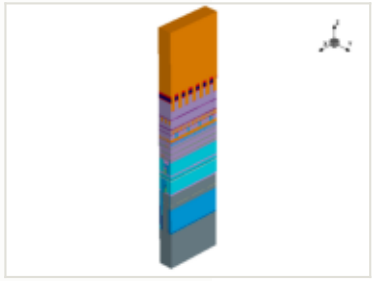

x cut at 0.385 µm

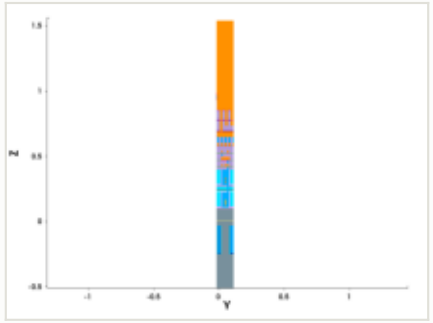

y cut at 0.049 µm

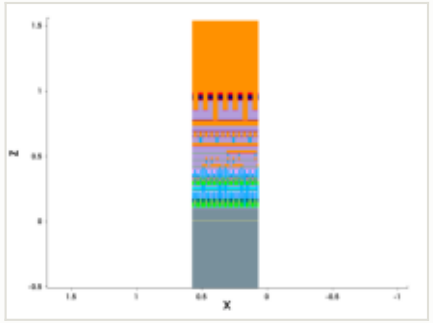

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

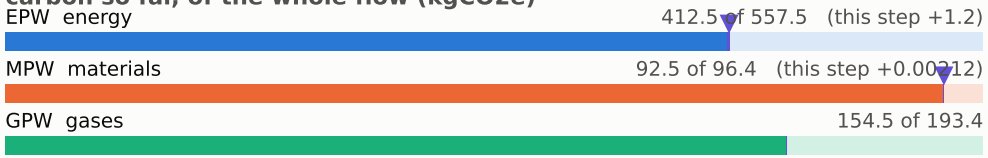

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

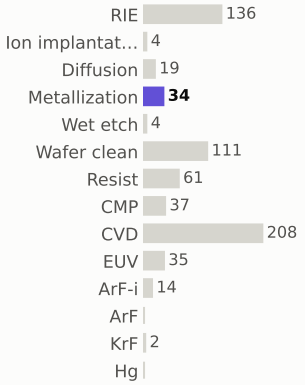

materials deposited (g)

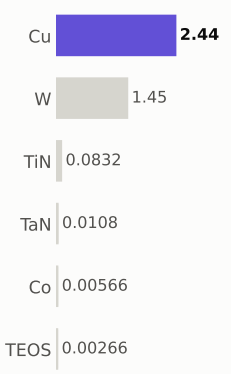

gases emitted (g)

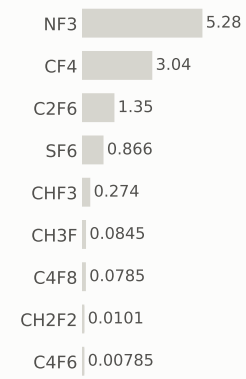

Step #7030: Diffusion

treatment · Diffusion

0.801	660.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

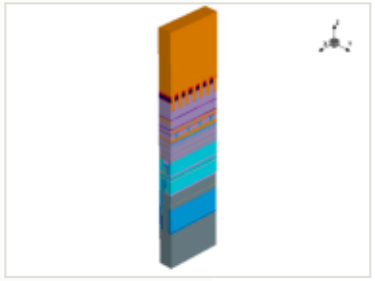

x cut at 0.385 µm

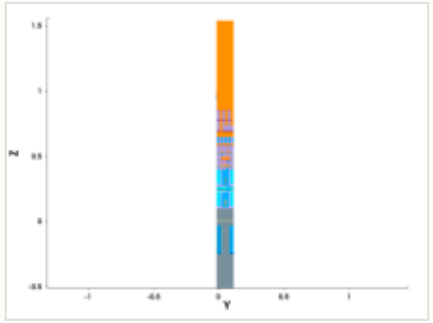

y cut at 0.049 µm

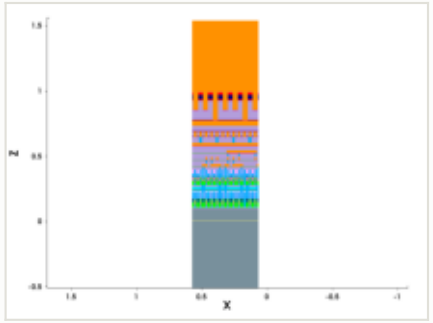

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

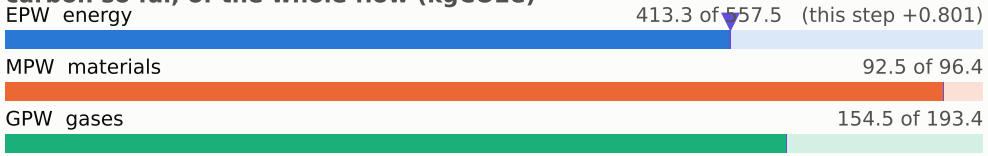

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

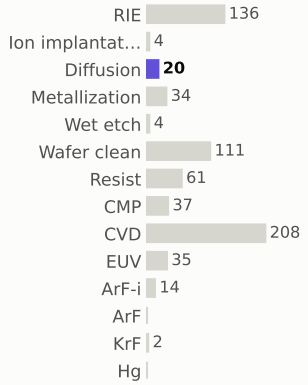

materials deposited (g)

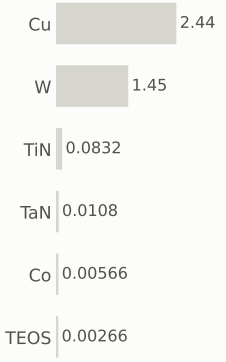

gases emitted (g)



Step #7040: CMP

etch_cmp · CMP

0.169	660.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

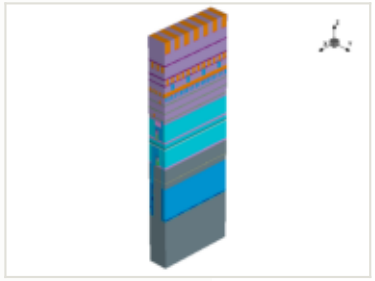

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

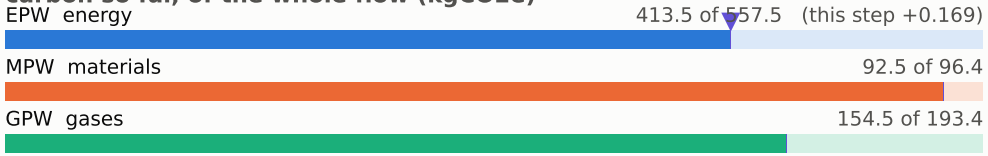

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

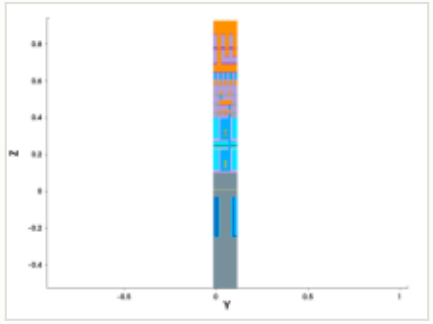

y cut at 0.049 µm

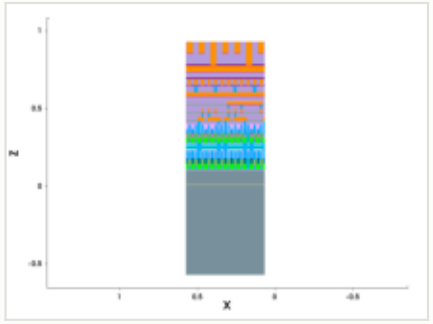

mask for this step

no mask for this step

steps by process area

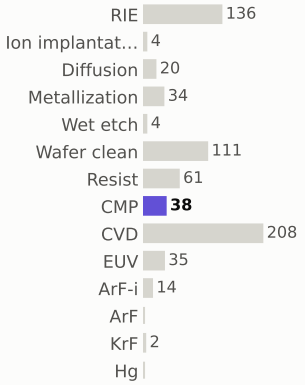

materials deposited (g)

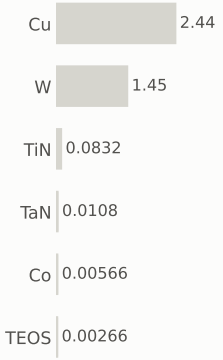

gases emitted (g)

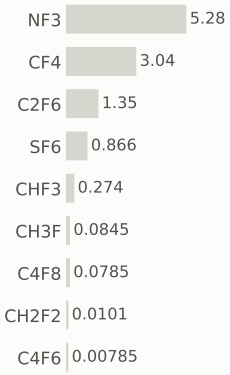

Step #7050: Metallization

depo_isotropic · Metallization

1.2	661.7	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

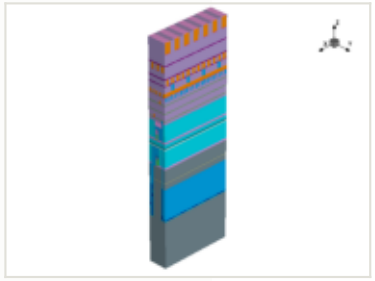

x cut at 0.385 µm

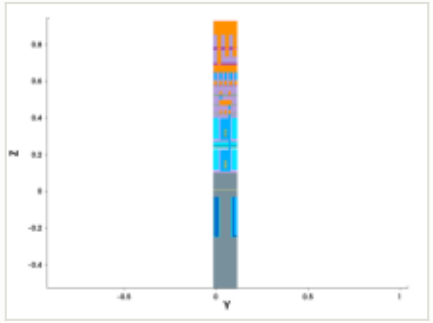

y cut at 0.049 µm

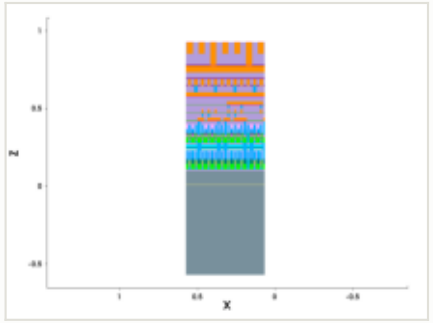

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Co	EPW tool	0.86 kgCO2e
thickness	0.0015 µm	EPW overhead	0.344 kgCO2e
material GWP	44.5 gCO2e/g	MPW	4.20e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

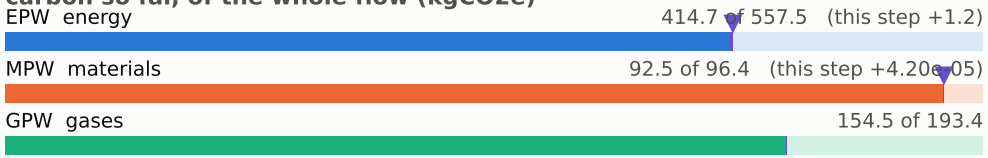

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

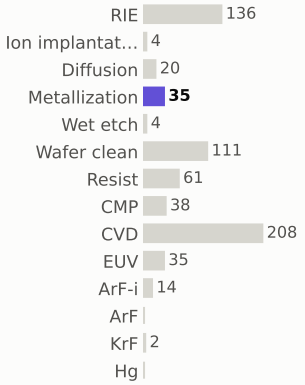

materials deposited (g)

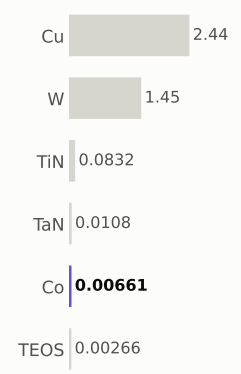

gases emitted (g)

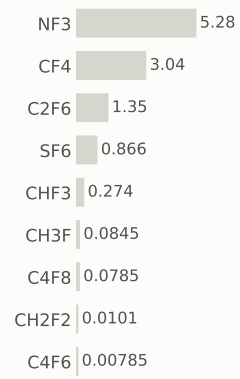

Step #7070: CVD

depo_fill · CVD

1.31	663.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

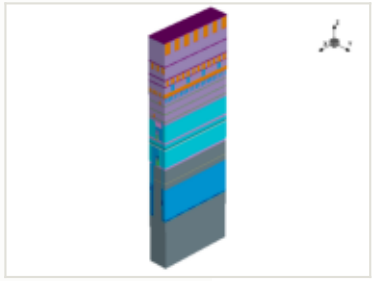

x cut at 0.385 µm

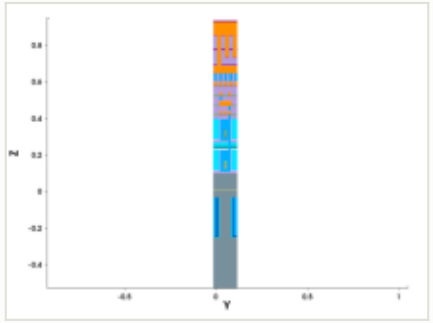

y cut at 0.049 µm

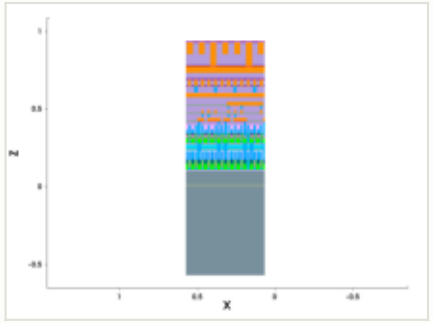

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

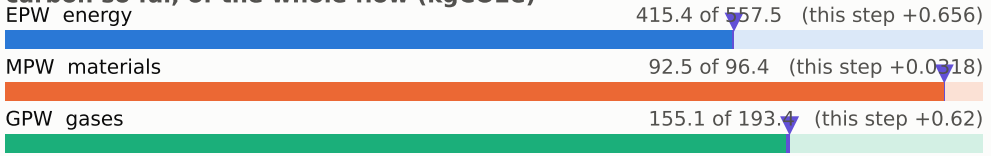

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

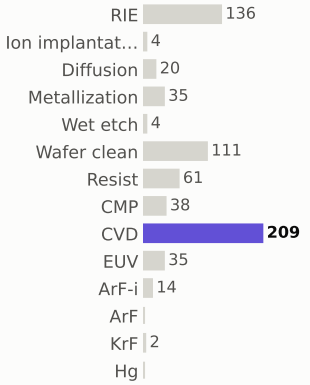

materials deposited (g)

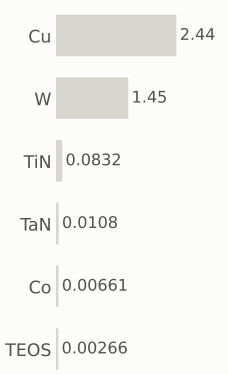

gases emitted (g)

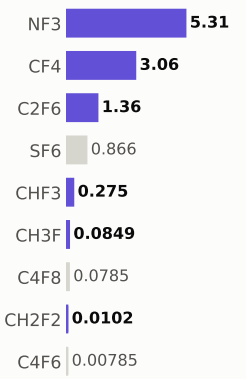

Step #7080: CVD

depo_fill · CVD

1.31	664.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

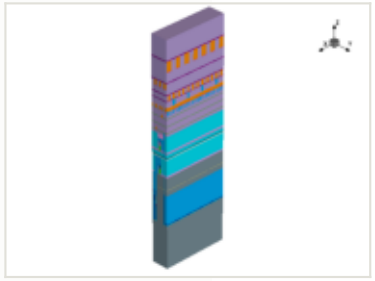

this step

process area	CVD
material	—
thickness	0.146 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

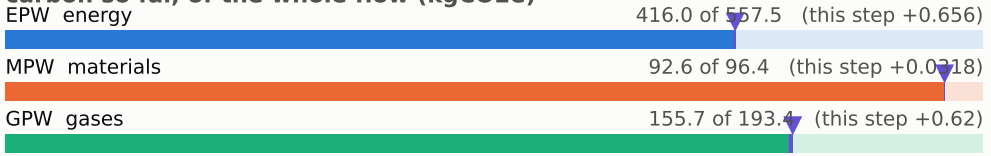

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

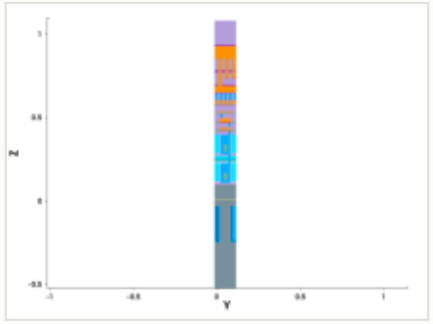

y cut at 0.049 µm

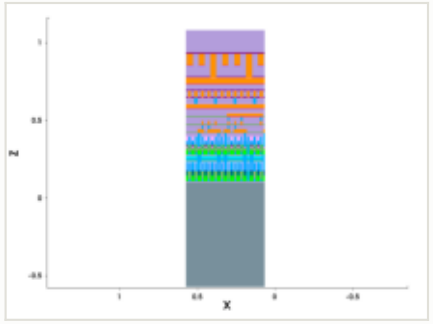

mask for this step

no mask for this step

steps by process area

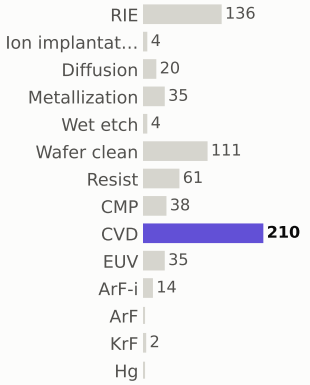

materials deposited (g)

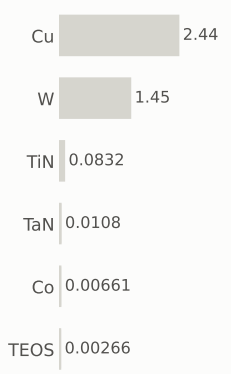

gases emitted (g)

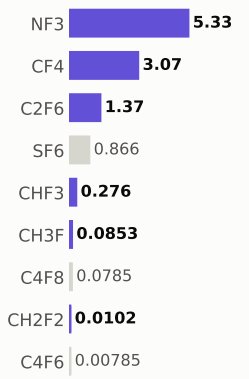

Step #7090: Diffusion

treatment · Diffusion

0.801	665.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

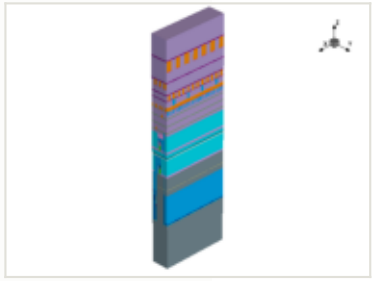

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

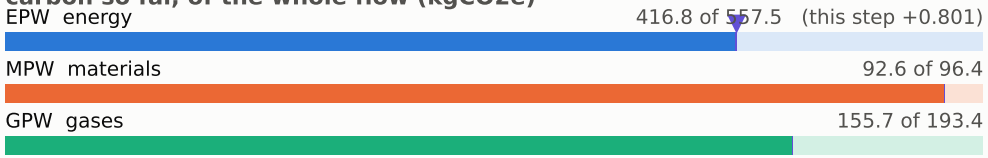

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

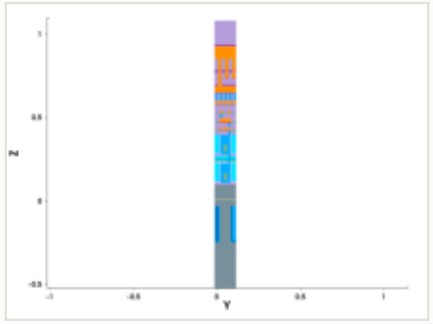

y cut at 0.049 µm

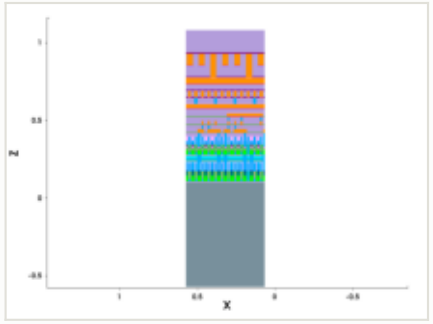

mask for this step

no mask for this step

steps by process area

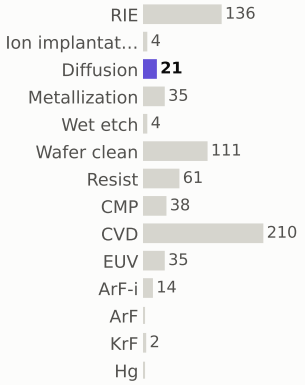

materials deposited (g)

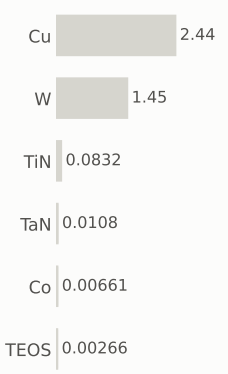

gases emitted (g)

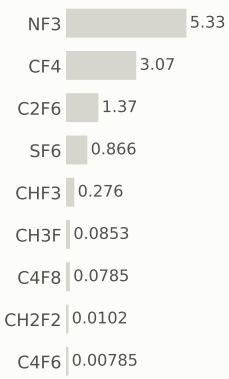

Step #7100: Wafer_clean

clean · Wafer_clean

0.169	665.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

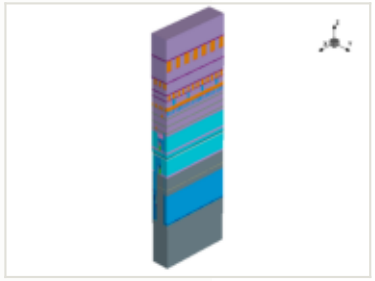

x cut at 0.385 µm

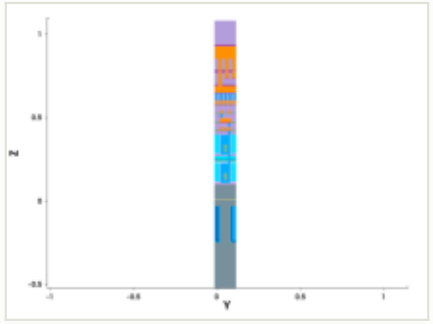

y cut at 0.049 µm

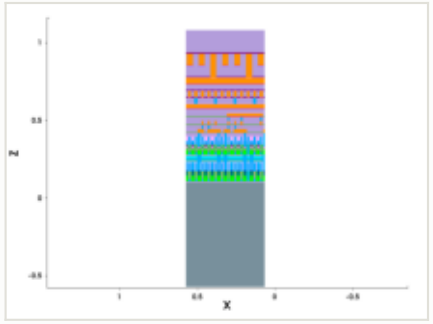

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

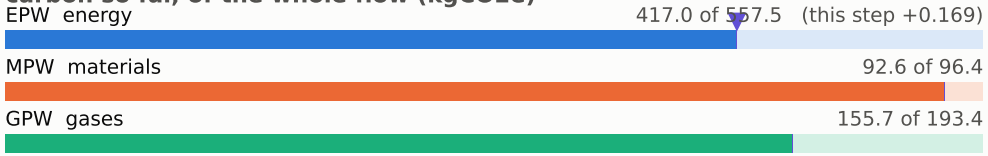

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

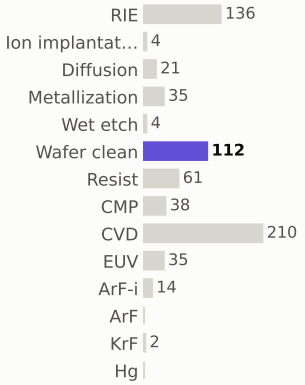

materials deposited (g)

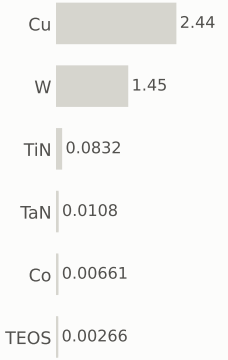

gases emitted (g)

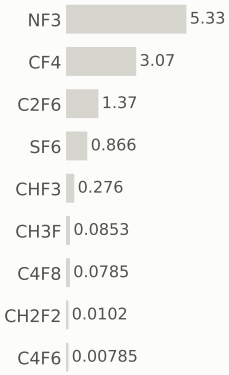

Step #7110: CVD

depo_fill · CVD

1.31	666.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

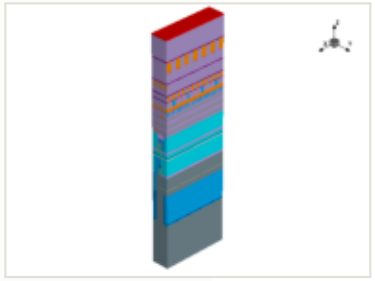

x cut at 0.385 µm

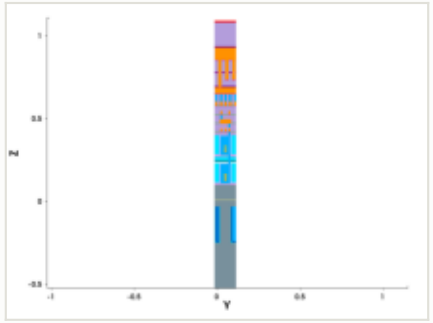

y cut at 0.049 µm

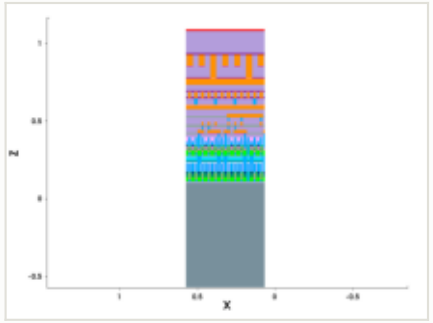

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

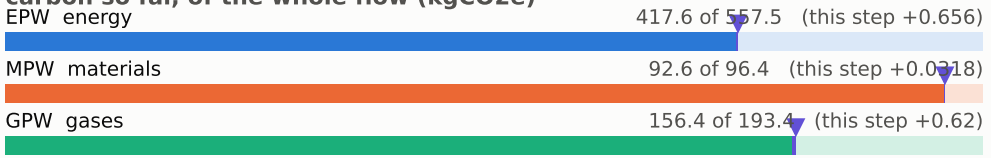

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

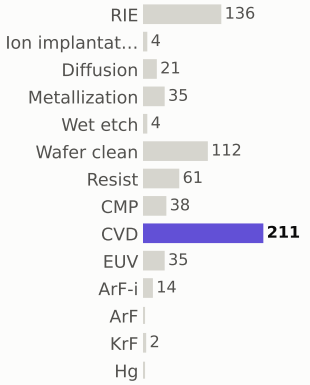

materials deposited (g)



gases emitted (g)

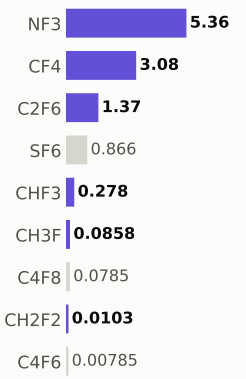

Step #7120: Resist

depo_fill · Resist

0.169	666.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

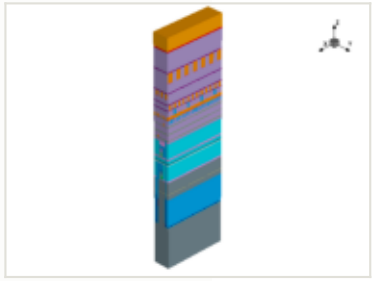

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

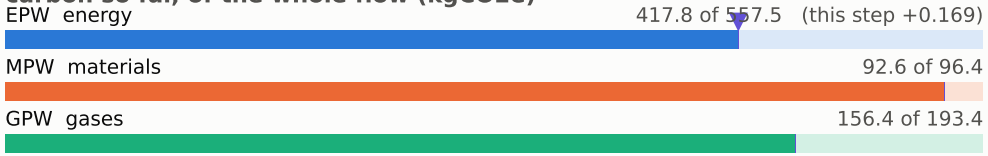

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

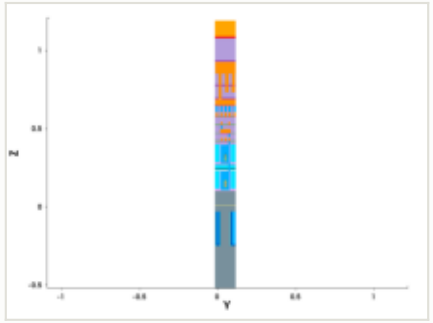

y cut at 0.049 µm

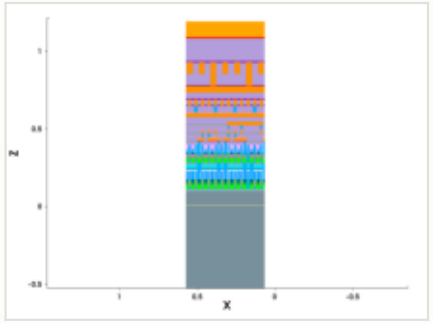

mask for this step

no mask for this step

steps by process area

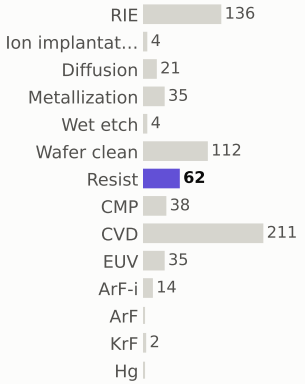

materials deposited (g)

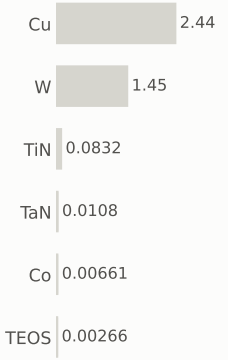

gases emitted (g)

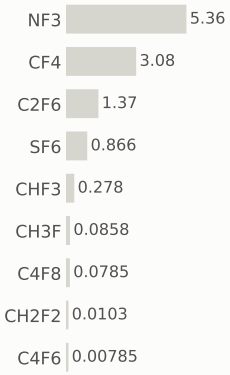

Step #7130: CVD

depo_fill · CVD

1.31	668.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

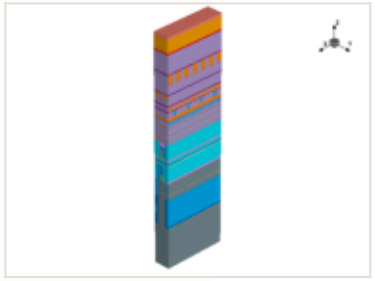

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

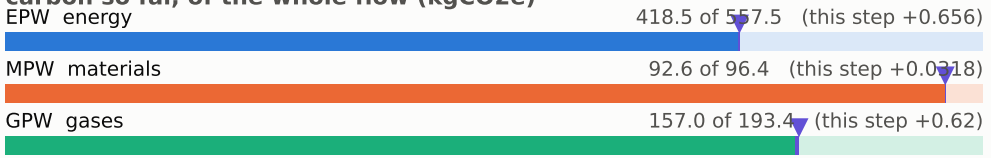

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

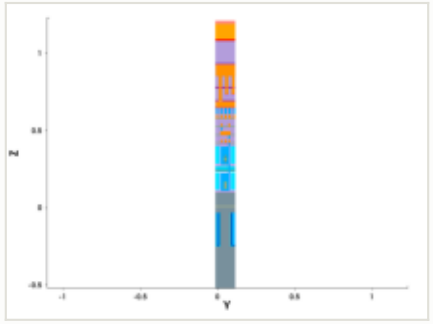

y cut at 0.049 µm

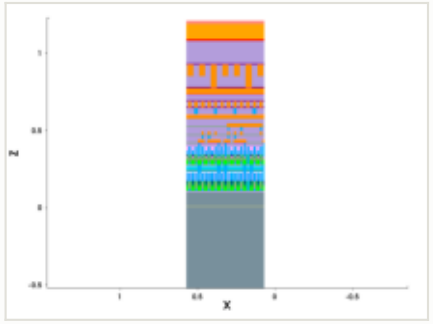

mask for this step

no mask for this step

steps by process area

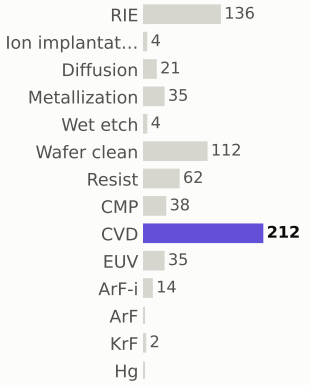

materials deposited (g)

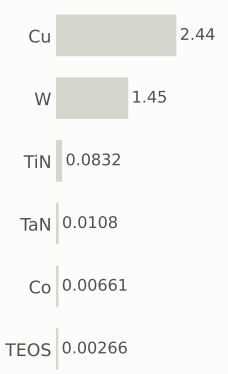

gases emitted (g)

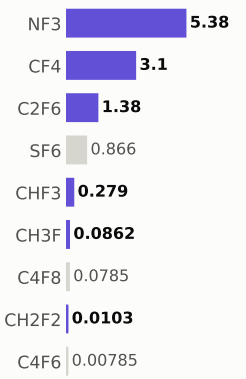

Step #7140: Wafer_clean

clean · Wafer_clean

0.169	668.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

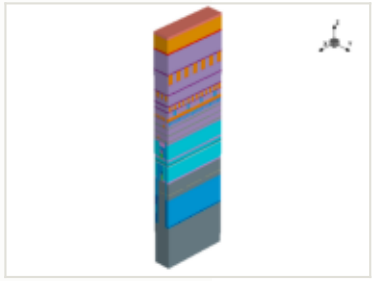

x cut at 0.385 µm

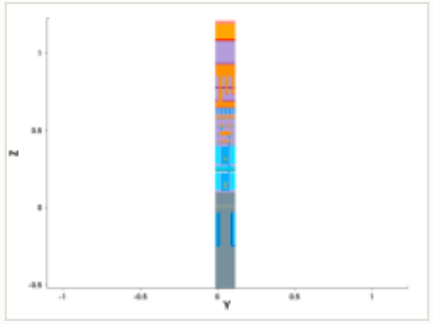

y cut at 0.049 µm

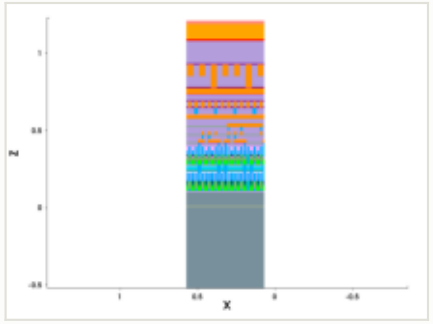

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

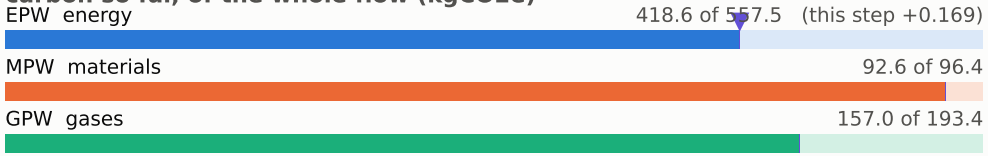

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

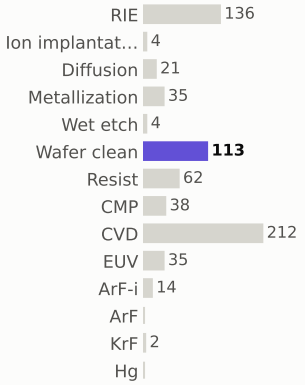

materials deposited (g)

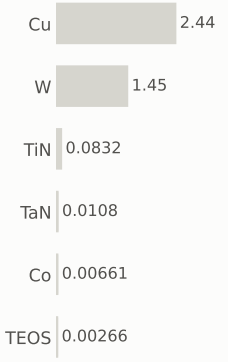

gases emitted (g)

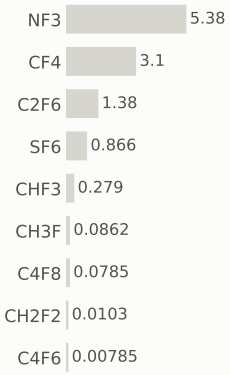

Step #7150: ArF-i

litho_patterning · ArF-i

0.217	668.5	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

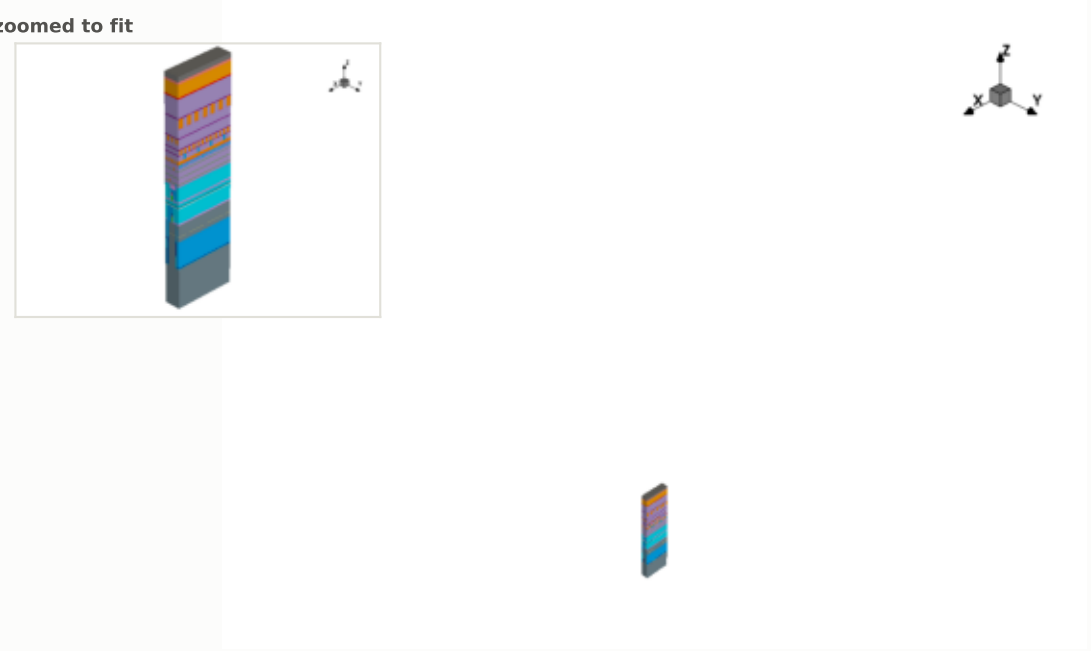

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

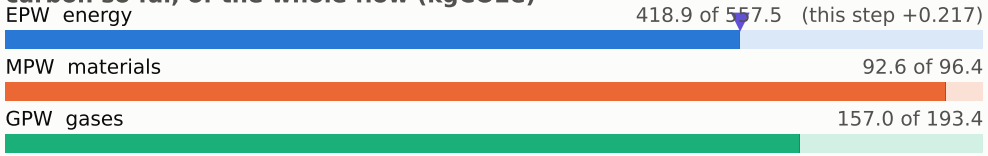

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

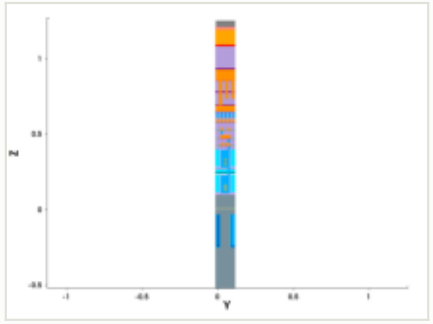

y cut at 0.049 µm

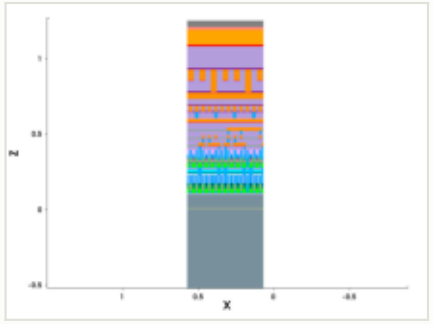

mask: layer 10521:0 (GDSII)

steps by process area

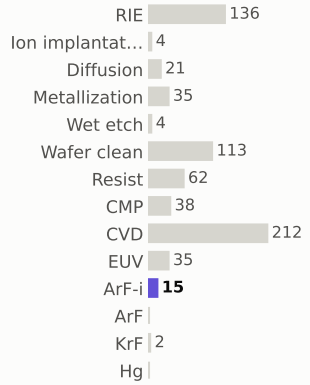

materials deposited (g)

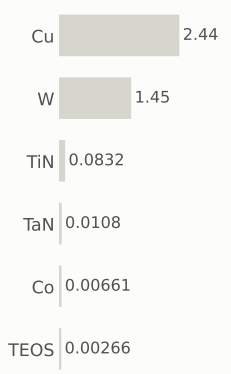

gases emitted (g)

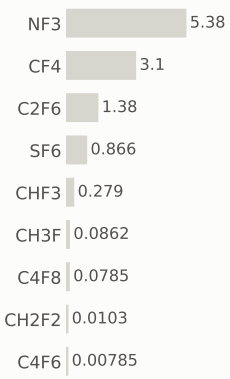

Step #7160: RIE

etch_anisotropic · RIE

1.04	669.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

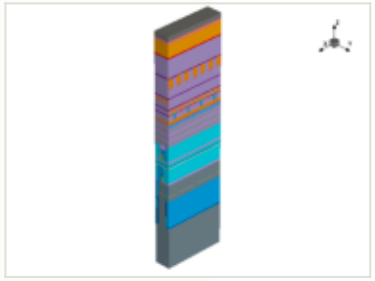

x cut at 0.385 µm

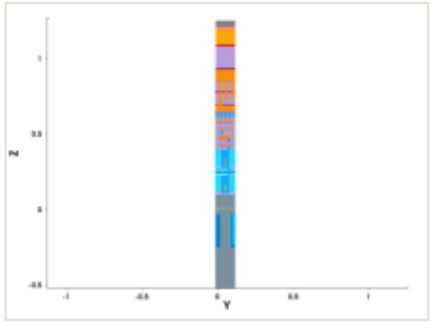

y cut at 0.049 µm

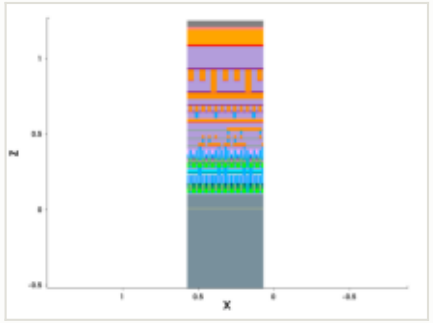

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

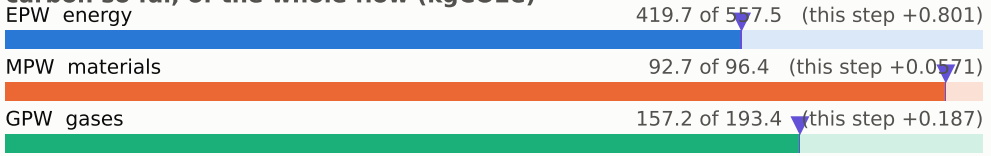

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

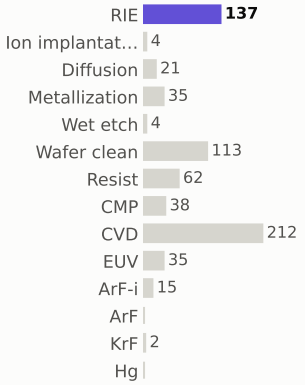

materials deposited (g)

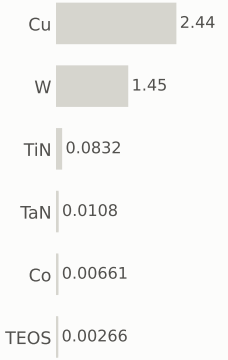

gases emitted (g)

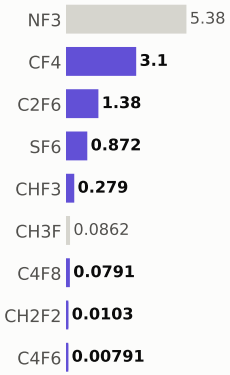

Step #7170: Wafer_clean

etch_strip · Wafer_clean

0.169	669.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

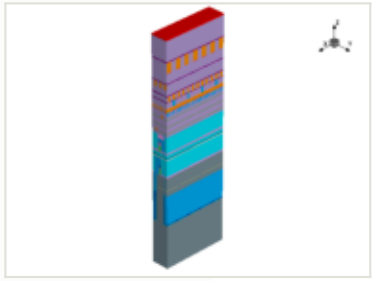

x cut at 0.385 µm

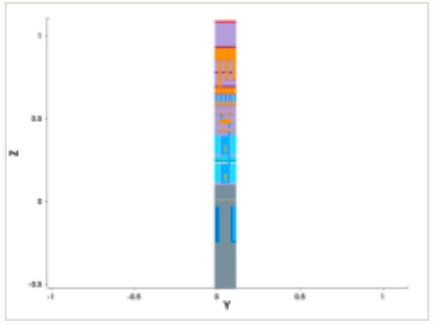

y cut at 0.049 µm

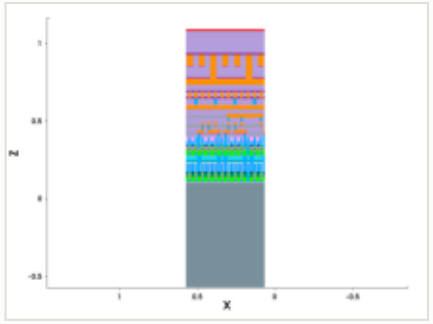

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

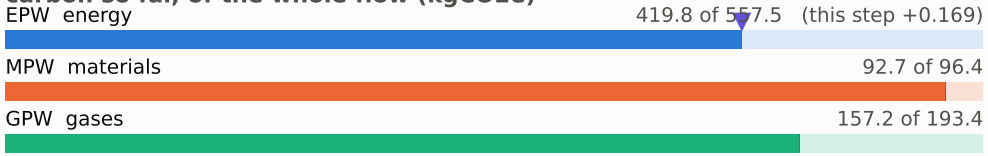

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

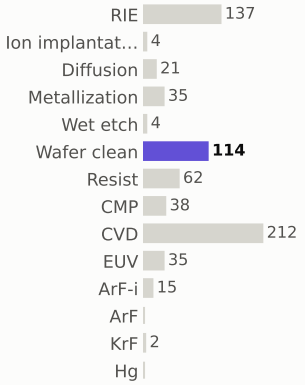

materials deposited (g)

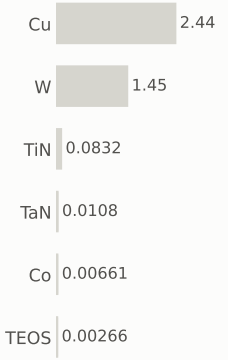

gases emitted (g)

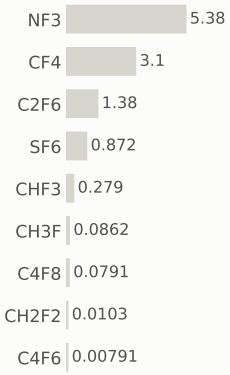

Step #7180: Resist

depo_fill · Resist

0.169	669.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

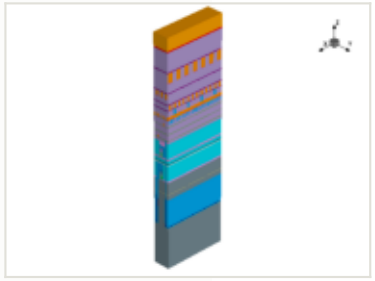

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

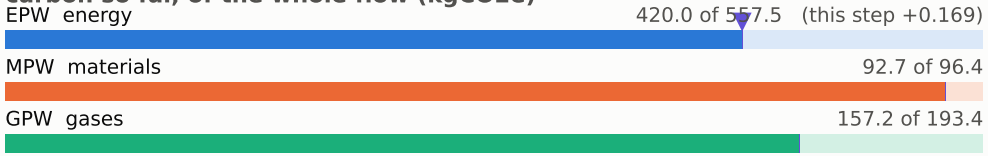

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

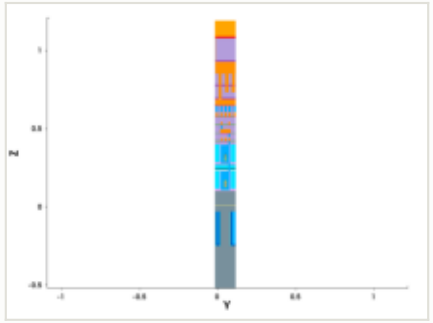

y cut at 0.049 µm

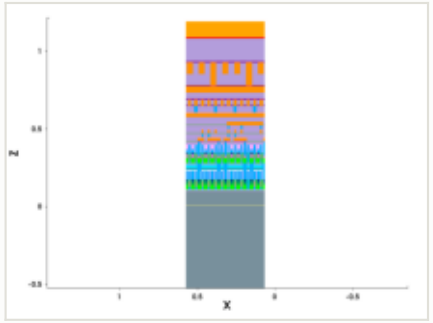

mask for this step

no mask for this step

steps by process area

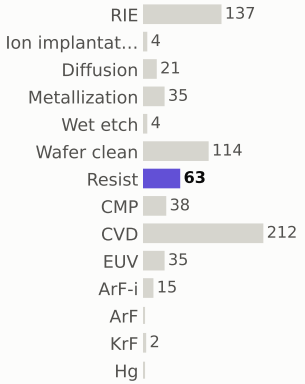

materials deposited (g)

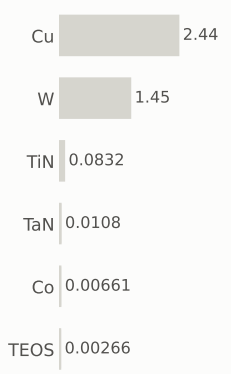

gases emitted (g)

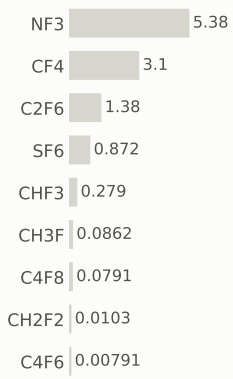

Step #7190: CVD

depo_fill · CVD

1.31	671.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

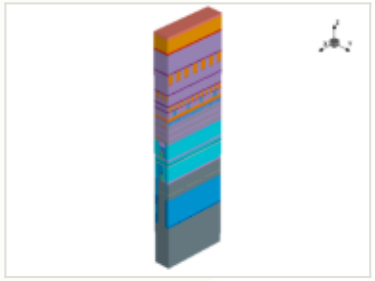

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

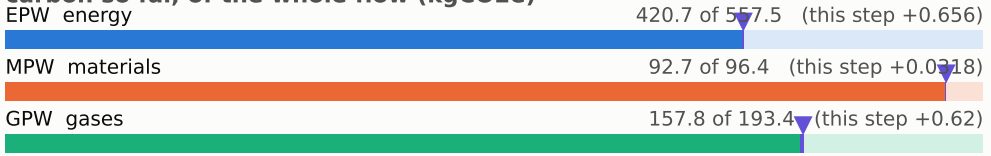

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

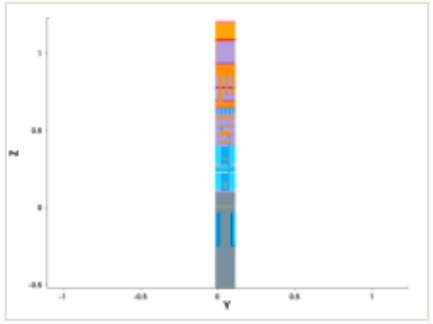

y cut at 0.049 µm

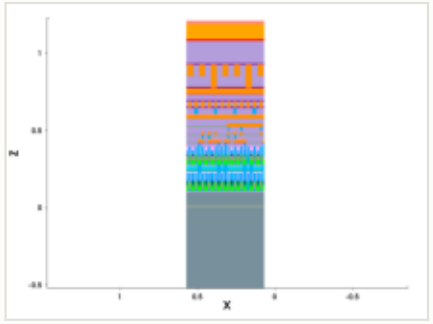

mask for this step

no mask for this step

steps by process area

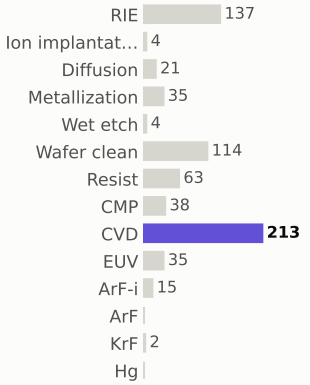

materials deposited (g)

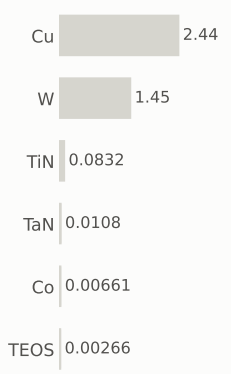

gases emitted (g)

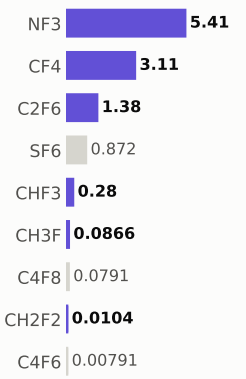

Step #7200: Wafer_clean

clean · Wafer_clean

0.169	671.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

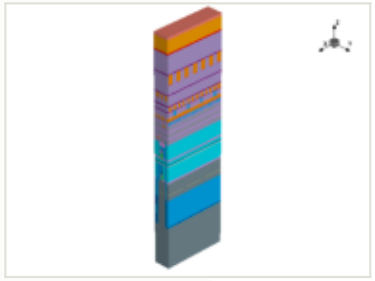

x cut at 0.385 µm

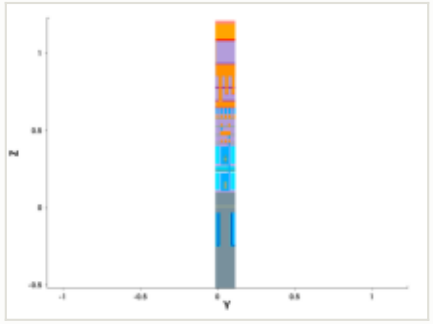

y cut at 0.049 µm

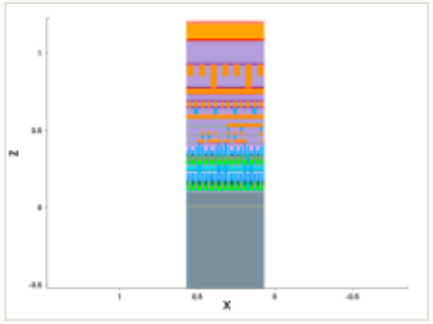

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

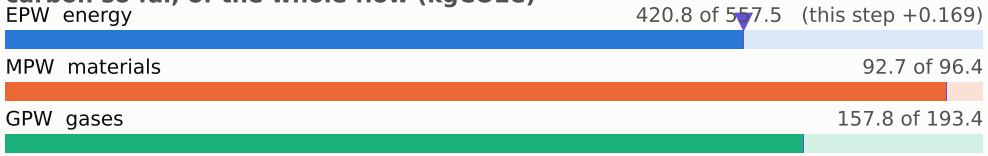

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

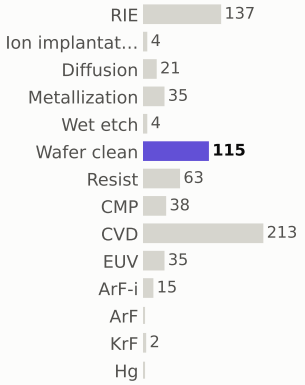

materials deposited (g)

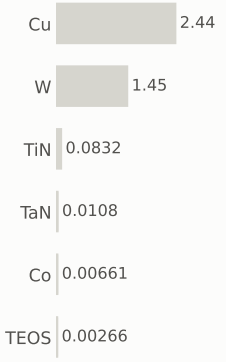

gases emitted (g)

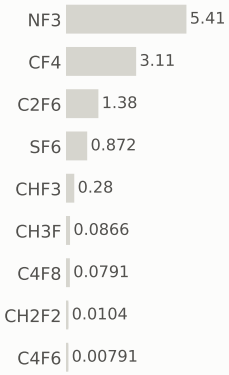

Step #7210: ArF-i

litho_patterning · ArF-i

0.217	671.5	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

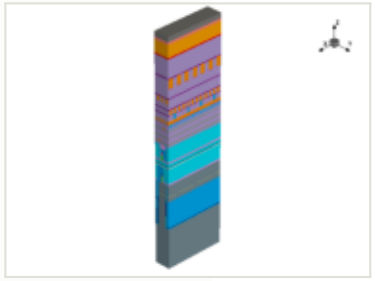

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

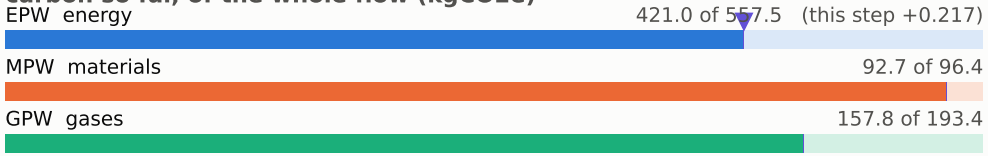

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

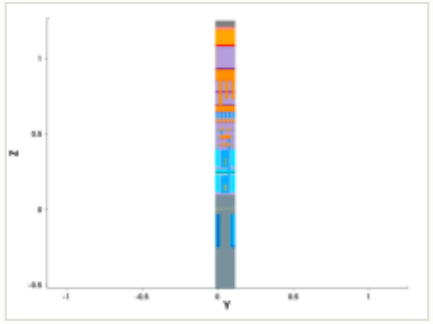

y cut at 0.049 µm

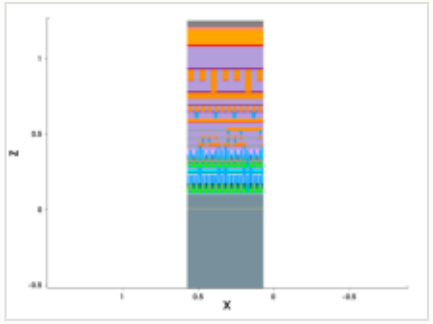

mask: layer 10522:0 (GDSII)

nothing in the clip window

steps by process area

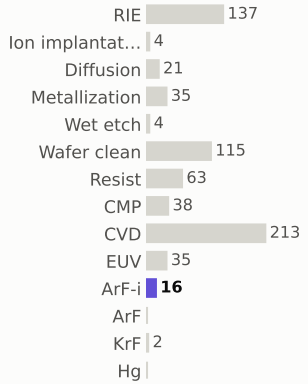

materials deposited (g)

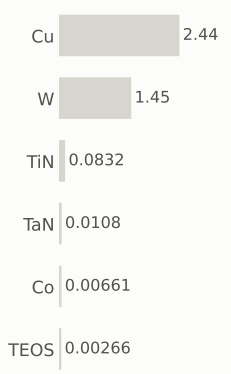

gases emitted (g)

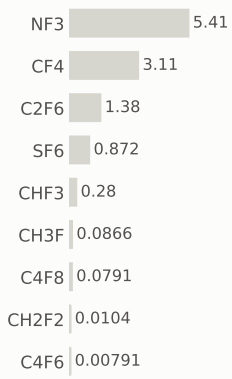

Step #7220: RIE

etch_anisotropic · RIE

1.04	672.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

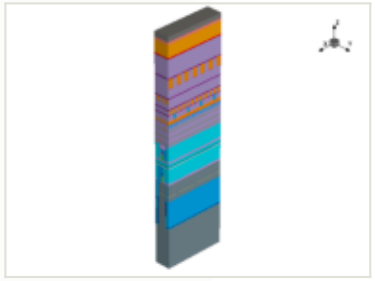

x cut at 0.385 µm

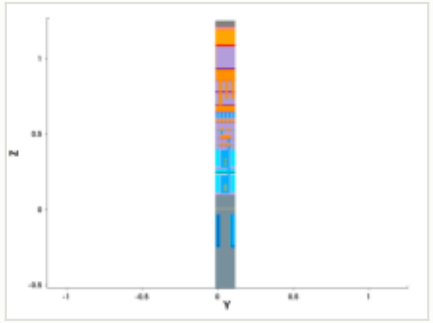

y cut at 0.049 µm

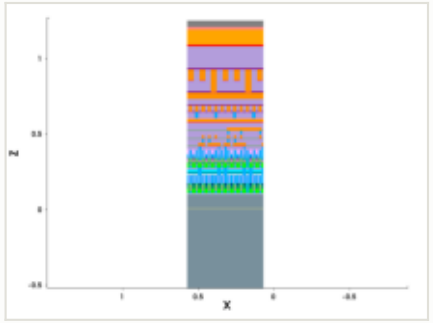

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

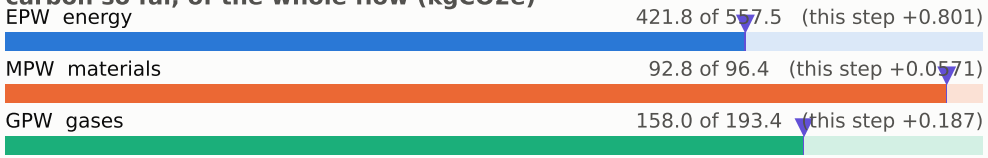

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

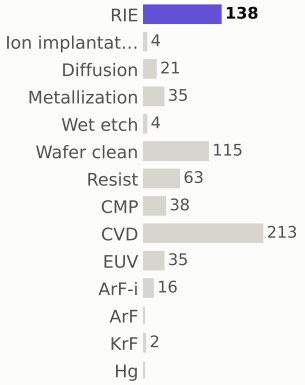

materials deposited (g)

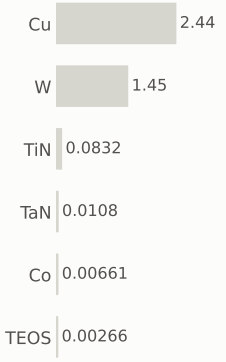

gases emitted (g)

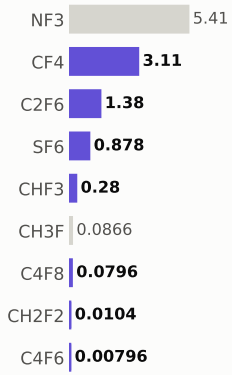

Step #7230: Wafer_clean

etch_strip · Wafer_clean

0.169	672.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

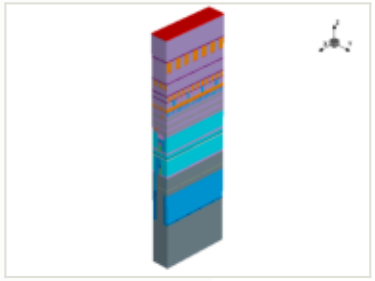

x cut at 0.385 µm

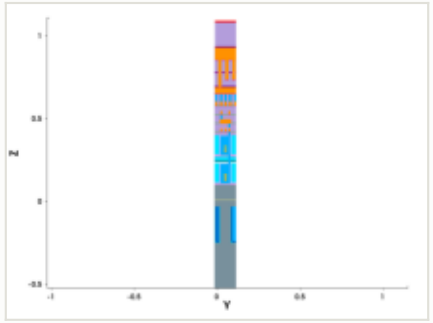

y cut at 0.049 µm

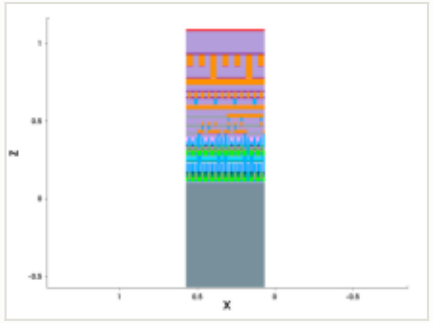

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

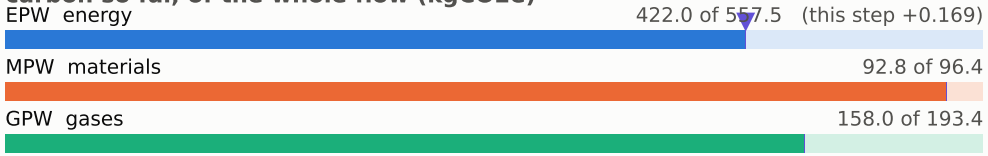

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

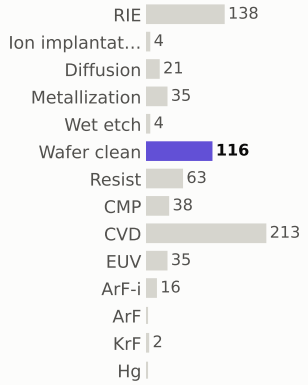

materials deposited (g)

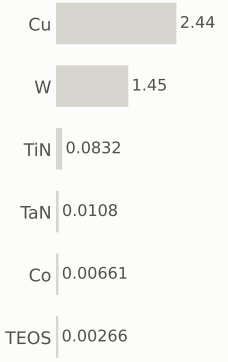

gases emitted (g)

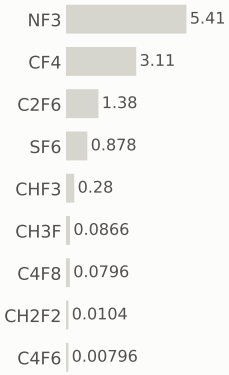

Step #7240: Metallization

depo_ellipsoidal · Metallization

1.2	673.9	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

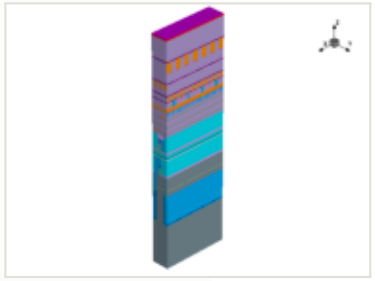

x cut at 0.385 µm

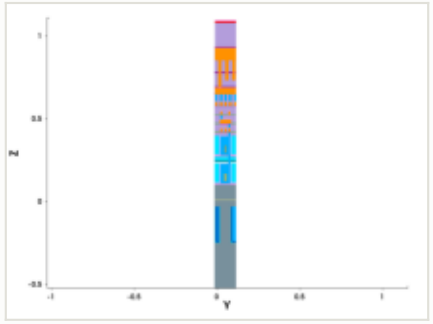

y cut at 0.049 µm

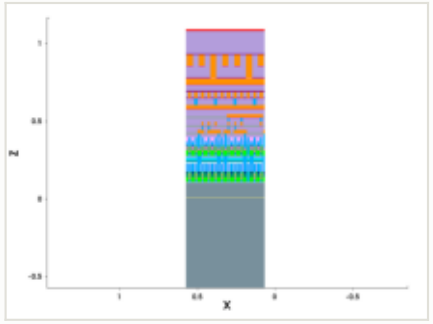

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

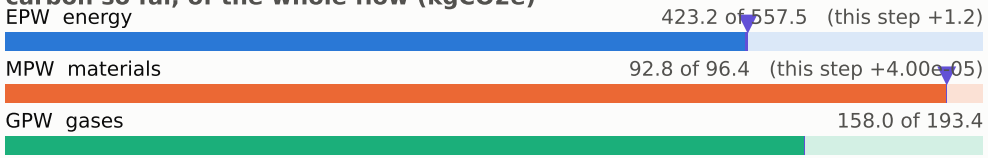

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

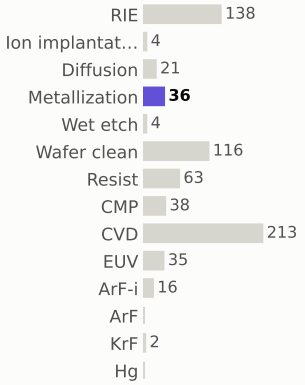

materials deposited (g)

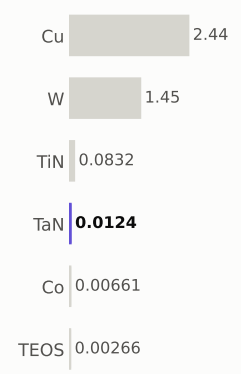

gases emitted (g)

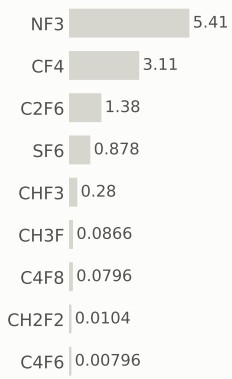

Step #7250: Metallization

depo_fill · Metallization

1.21	675.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

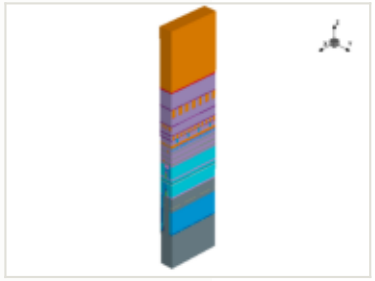

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

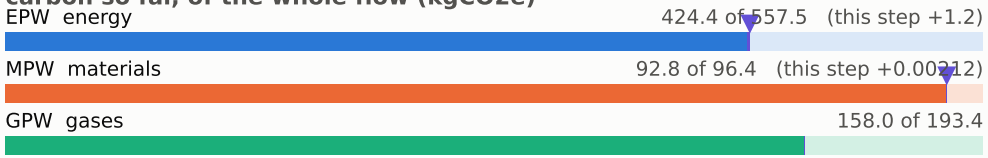

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

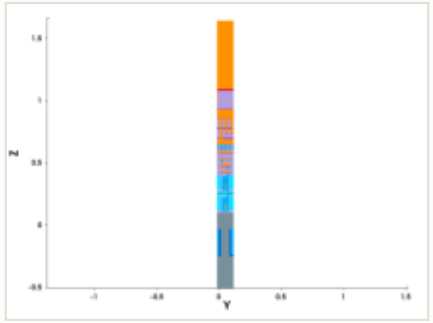

y cut at 0.049 µm

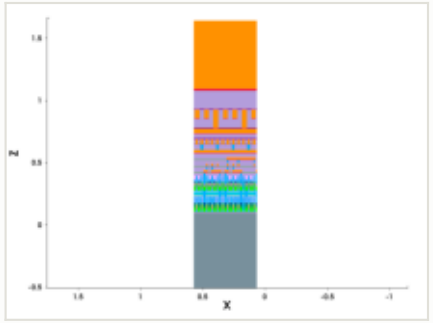

mask for this step

no mask for this step

steps by process area

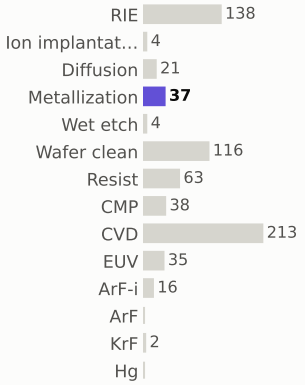

materials deposited (g)

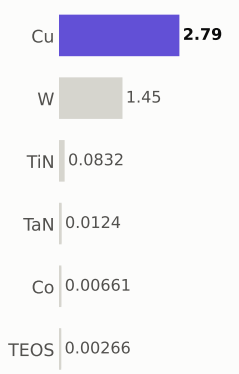

gases emitted (g)

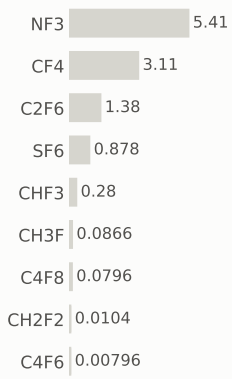

Step #7260: Diffusion

treatment · Diffusion

0.801	676.0	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

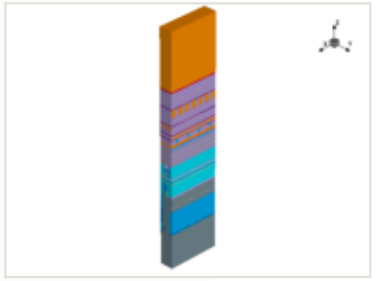

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

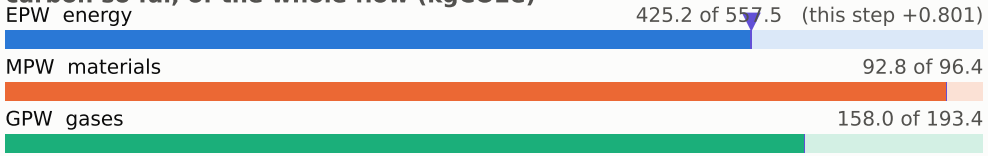

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

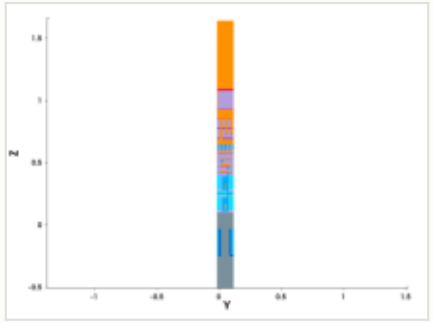

y cut at 0.049 µm

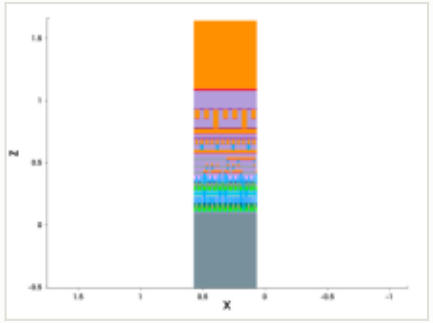

mask for this step

no mask for this step

steps by process area

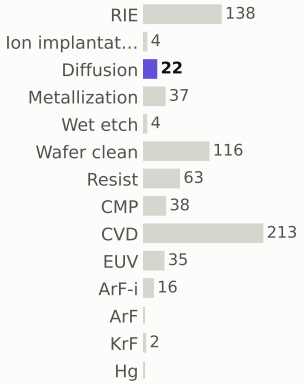

materials deposited (g)

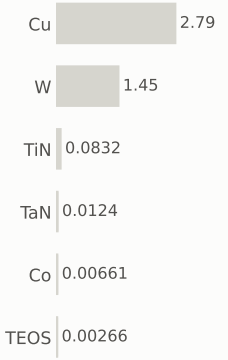

gases emitted (g)

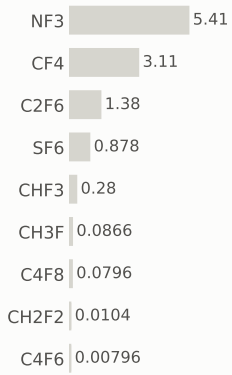

Step #7270: CMP

etch_cmp · CMP

0.169	676.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

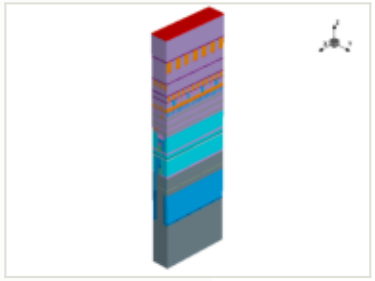

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

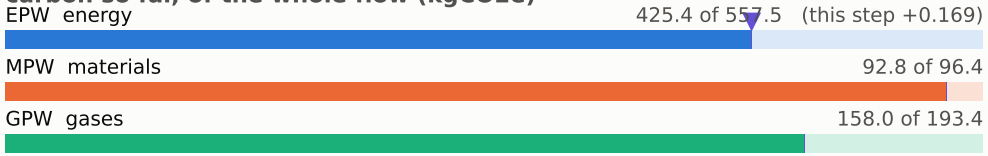

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

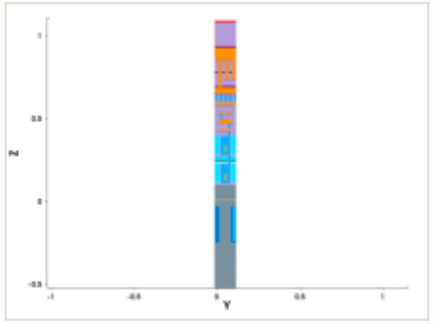

y cut at 0.049 µm

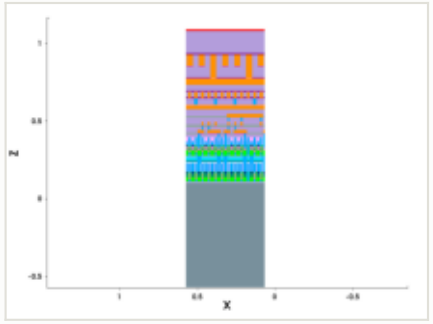

mask for this step

no mask for this step

steps by process area

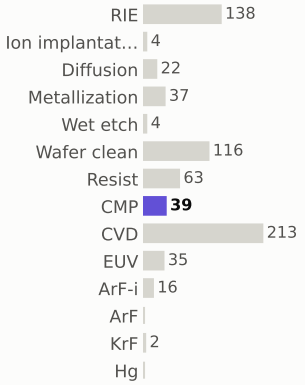

materials deposited (g)

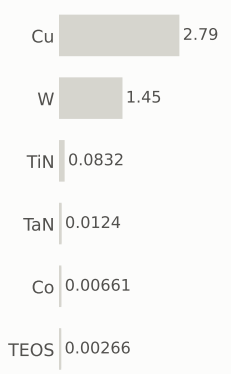

gases emitted (g)

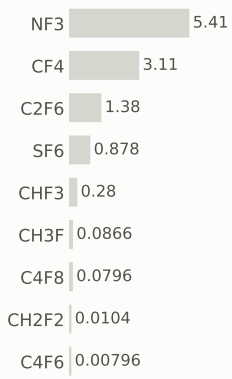

Step #7280: CVD

depo_fill · CVD

1.31	677.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

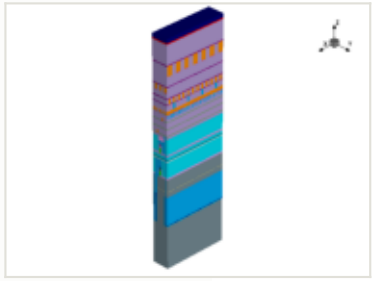

x cut at 0.385 µm

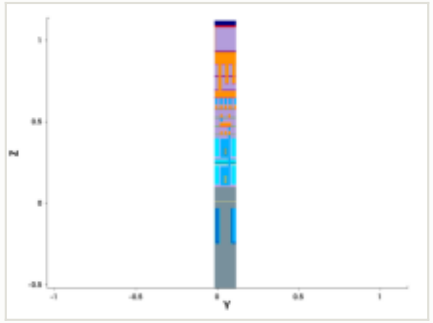

y cut at 0.049 µm

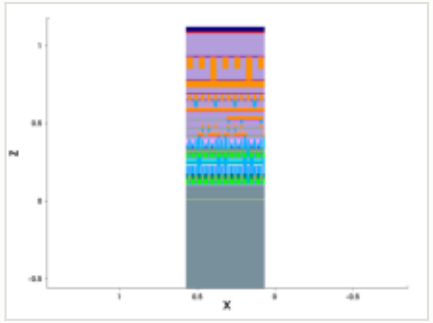

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.0322 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

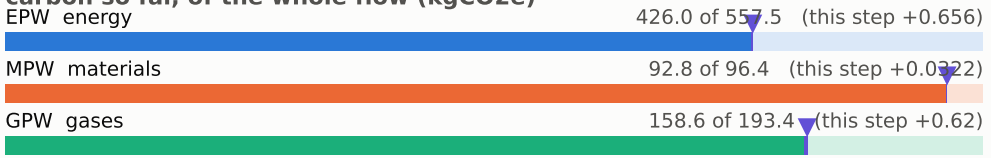

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

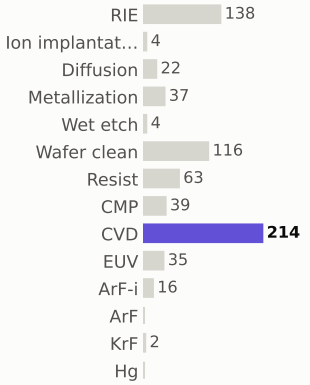

materials deposited (g)

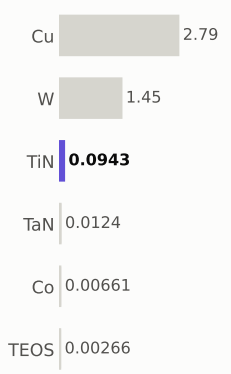

gases emitted (g)

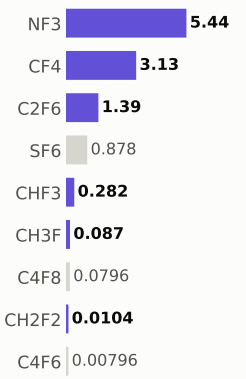

Step #7290: Wafer_clean

clean · Wafer_clean

0.169	677.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

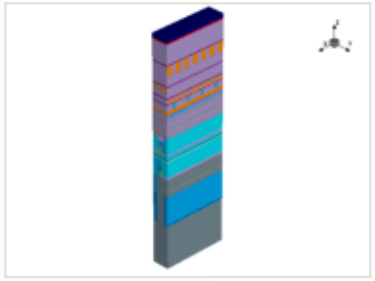

x cut at 0.385 µm

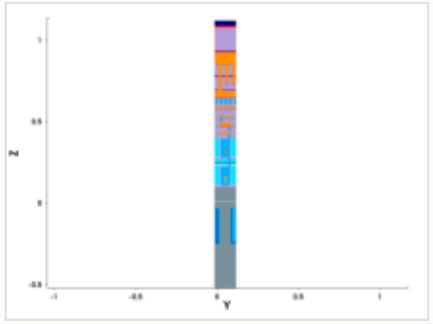

y cut at 0.049 µm

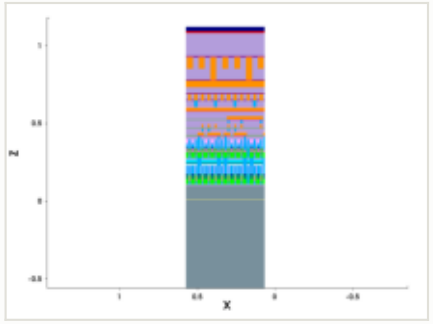

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

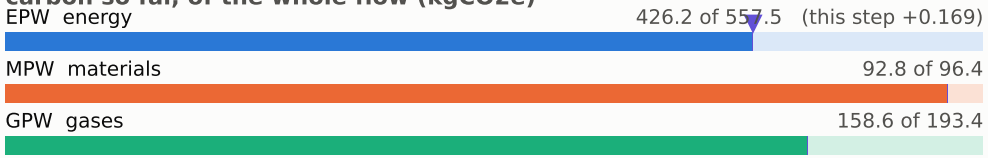

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

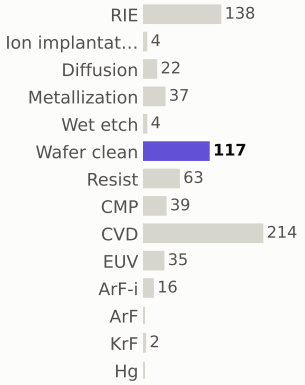

materials deposited (g)

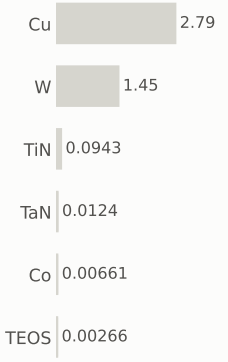

gases emitted (g)

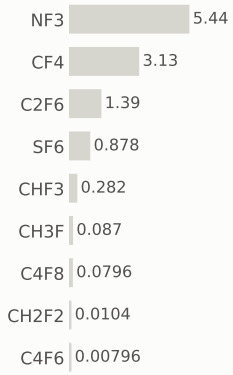

Step #7300: CVD

depo_fill · CVD

1.31	678.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

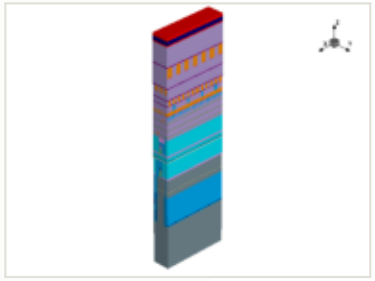

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

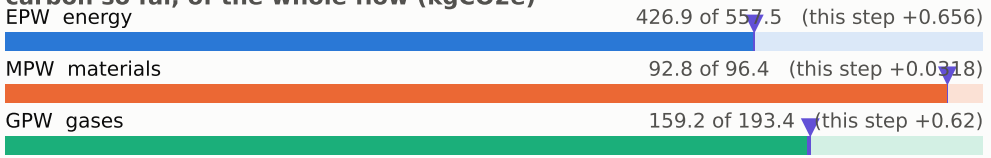

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

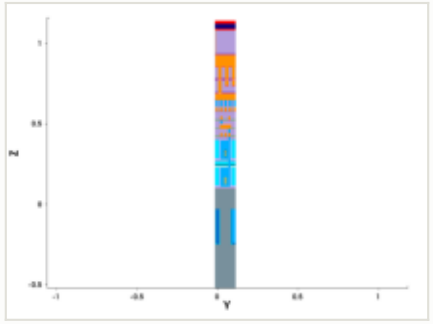

y cut at 0.049 µm

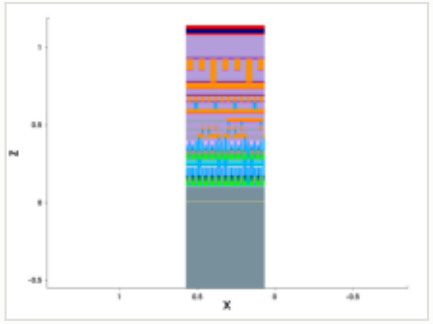

mask for this step

no mask for this step

steps by process area

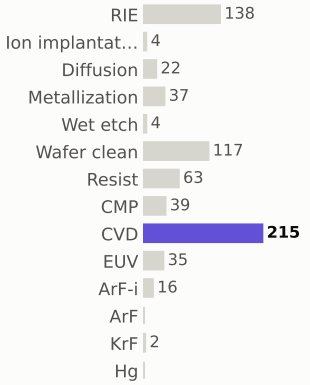

materials deposited (g)

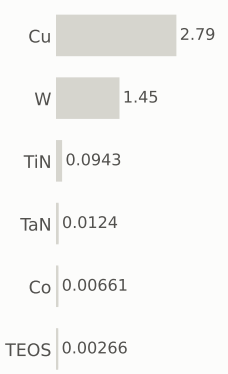

gases emitted (g)

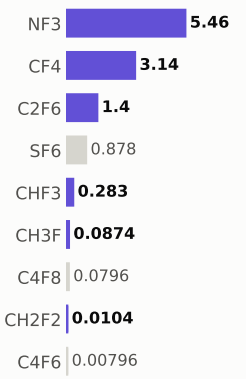

Step #7310: CVD

depo_fill · CVD

1.31	680.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

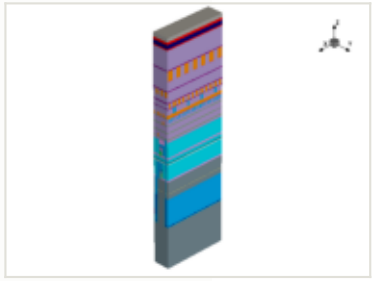

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

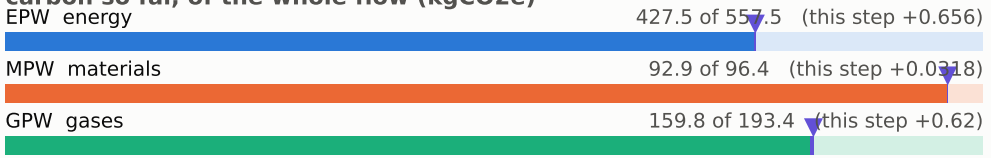

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

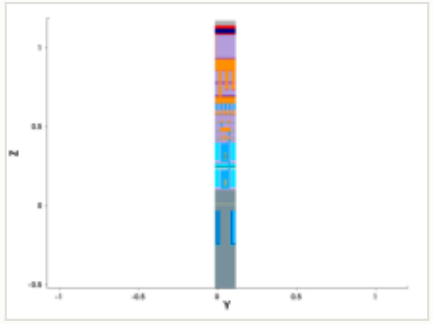

y cut at 0.049 µm

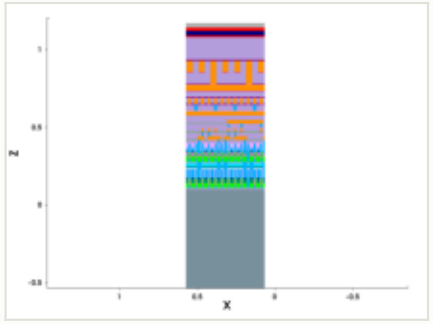

mask for this step

no mask for this step

steps by process area

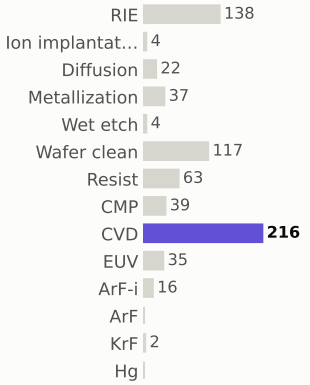

materials deposited (g)

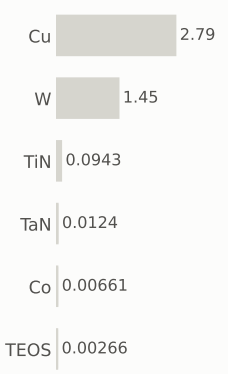

gases emitted (g)

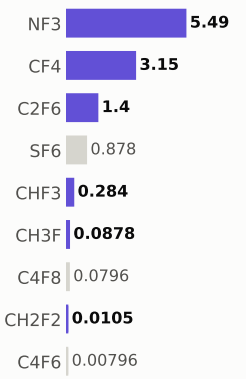

Step #7320: Resist

depo_fill · Resist

0.169	680.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

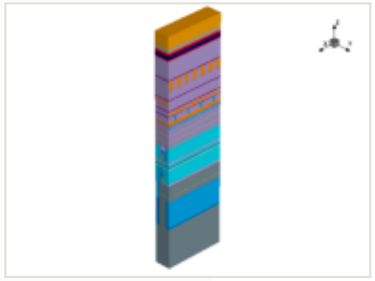

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

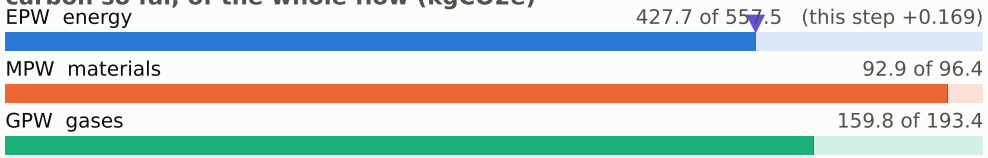

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

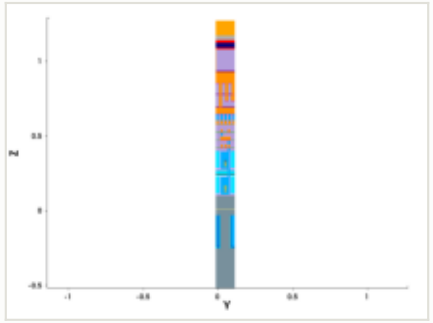

y cut at 0.049 µm

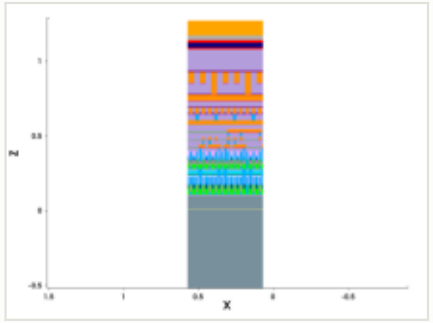

mask for this step

no mask for this step

steps by process area

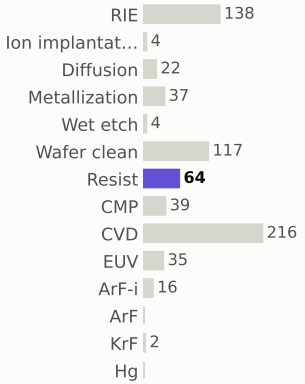

materials deposited (g)

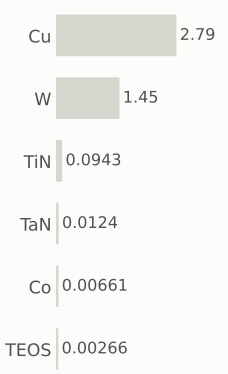

gases emitted (g)

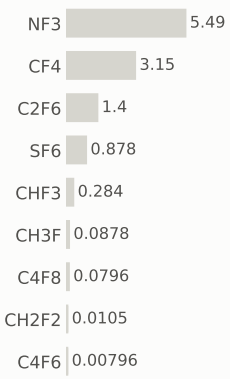

Step #7330: CVD

depo_fill · CVD

1.31	681.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

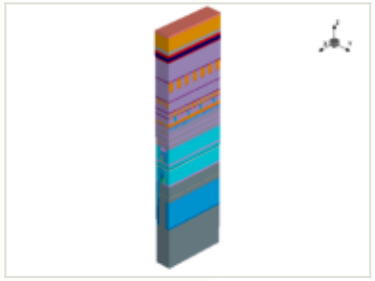

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

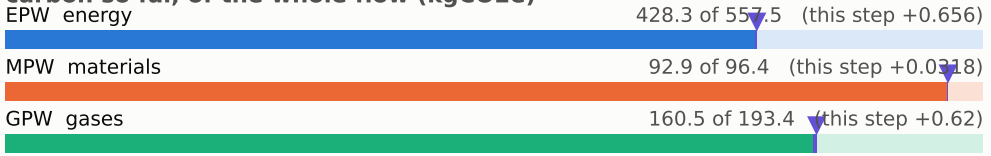

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

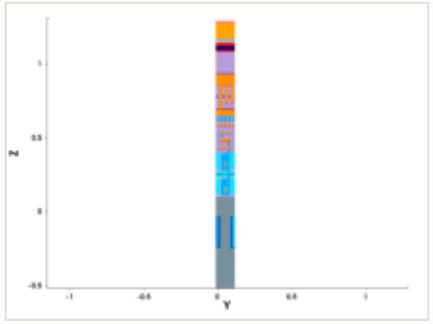

y cut at 0.049 µm

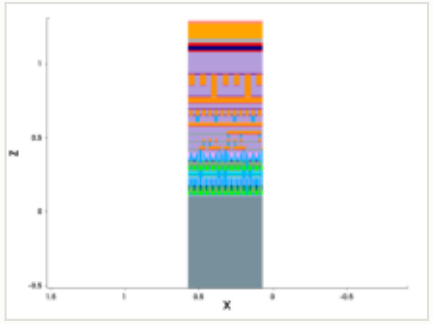

mask for this step

no mask for this step

steps by process area

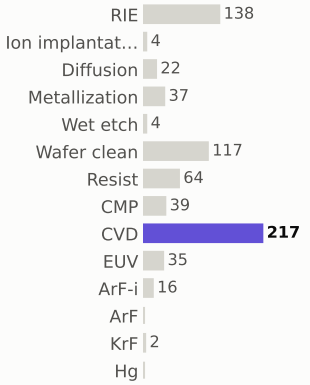

materials deposited (g)

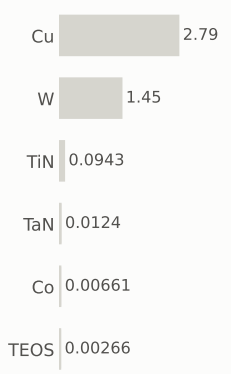

gases emitted (g)

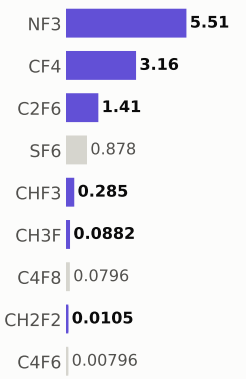

Step #7340: Wafer_clean

clean · Wafer_clean

0.169	681.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

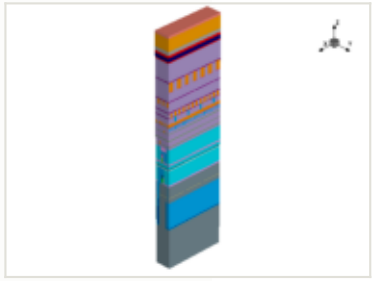

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

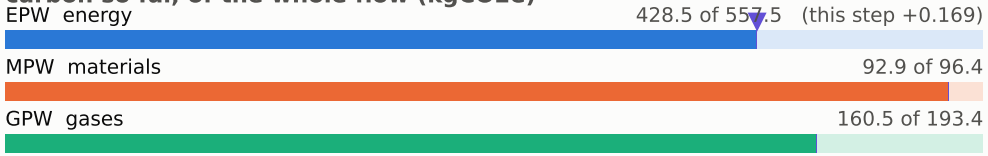

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

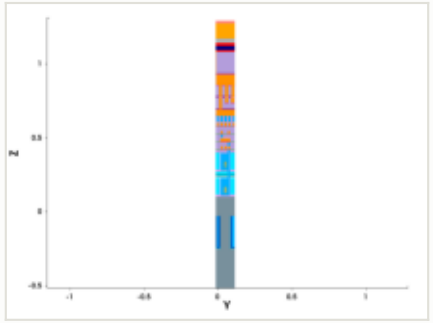

y cut at 0.049 µm

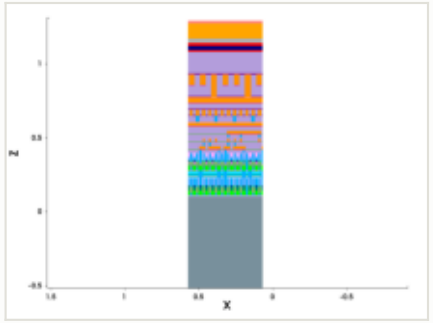

mask for this step

no mask for this step

steps by process area

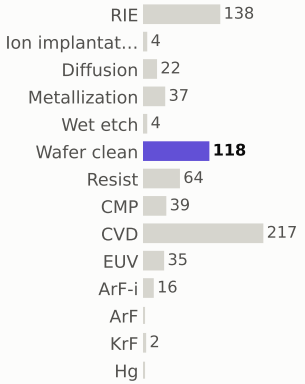

materials deposited (g)

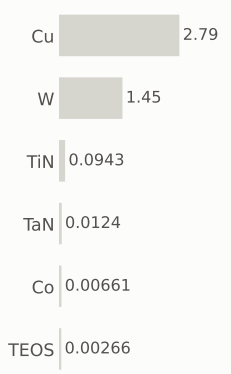

gases emitted (g)

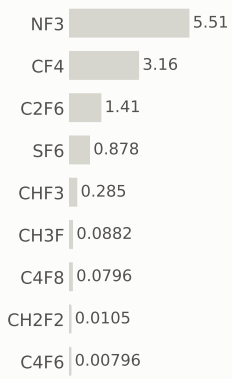

Step #7350: ArF-i

litho_patterning · ArF-i

0.217	682.1	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

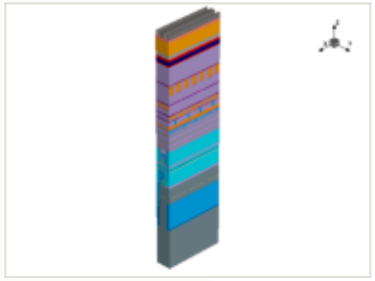

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

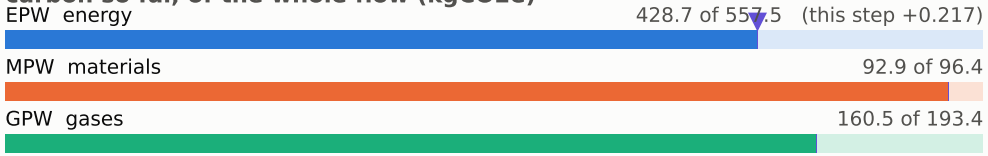

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

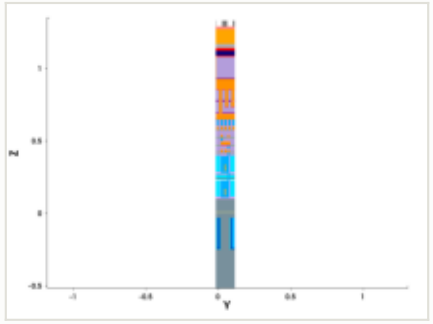

y cut at 0.049 µm

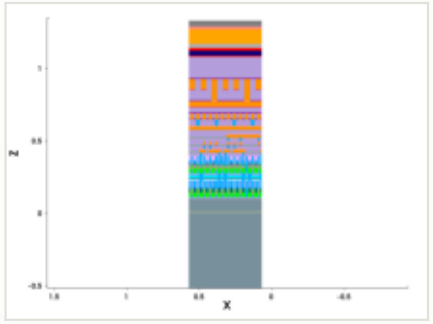

mask: layer 10551:0, positive (GDSII)

steps by process area

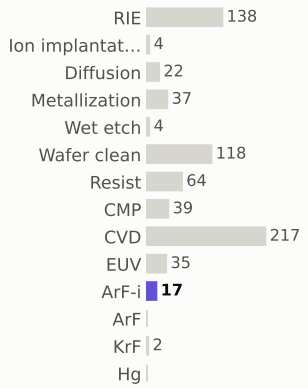

materials deposited (g)

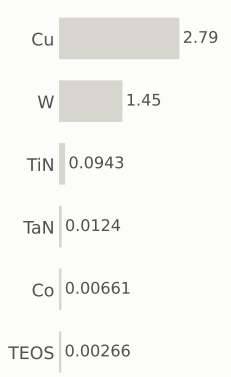

gases emitted (g)



Step #7360: Ion_implantation

treatment · Ion_implantation

0.801	682.9	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

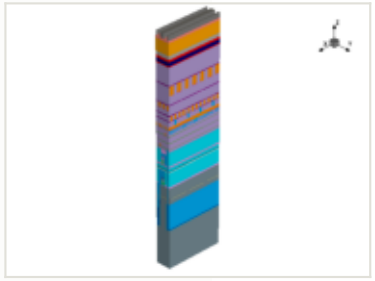

x cut at 0.385 µm

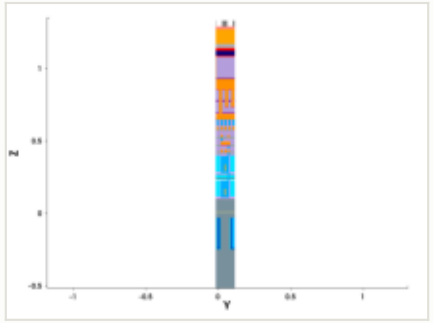

y cut at 0.049 µm

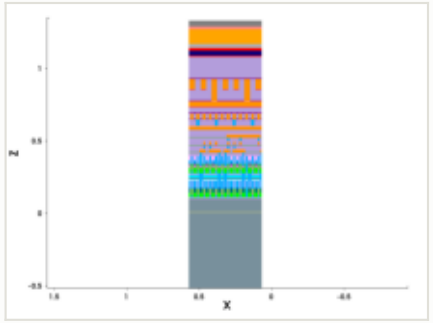

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

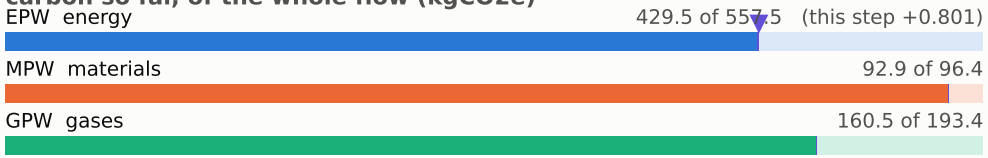

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

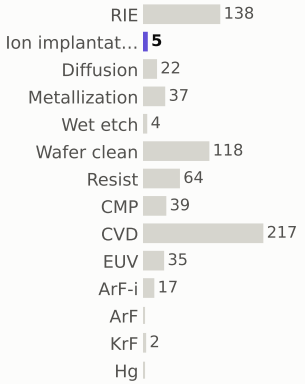

materials deposited (g)

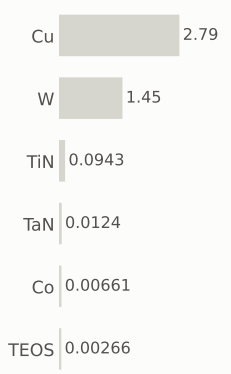

gases emitted (g)

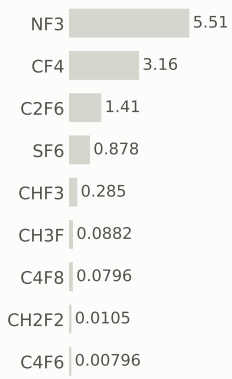

Step #7370: RIE

etch_anisotropic · RIE

1.04	683.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

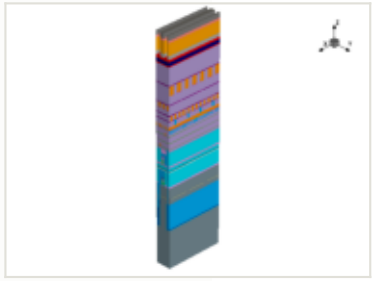

x cut at 0.385 µm

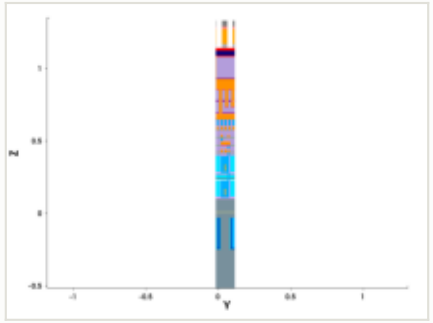

y cut at 0.049 µm

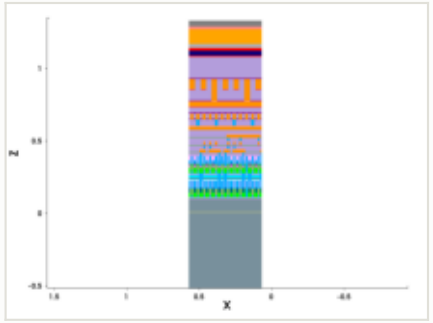

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

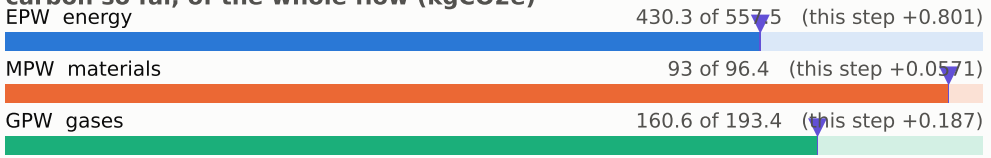

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

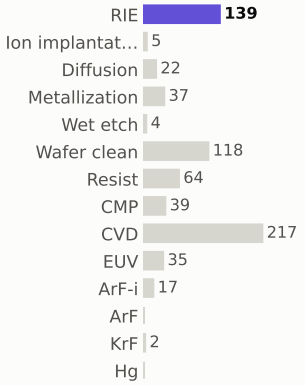

materials deposited (g)

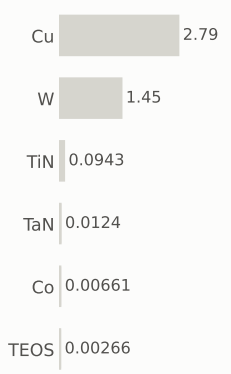

gases emitted (g)

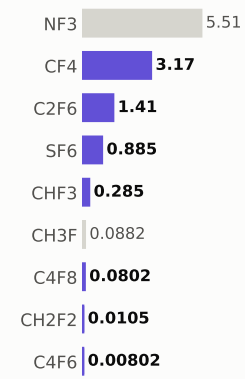

Step #7380: Wafer_clean

etch_strip · Wafer_clean

0.169	684.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

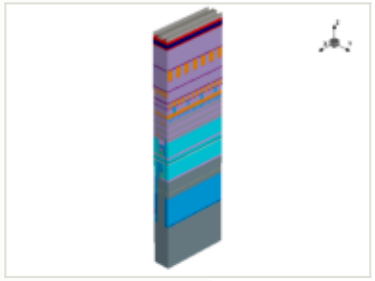

x cut at 0.385 µm

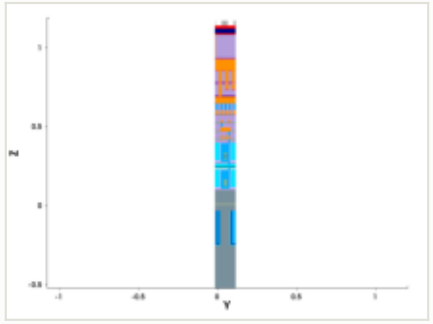

y cut at 0.049 µm

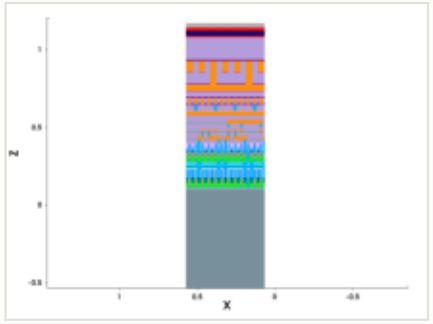

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

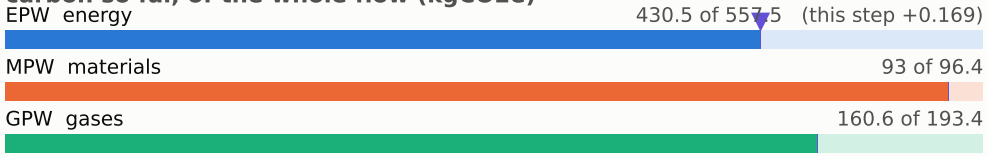

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

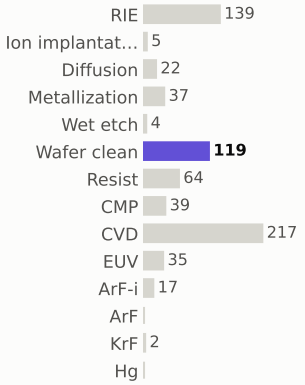

materials deposited (g)

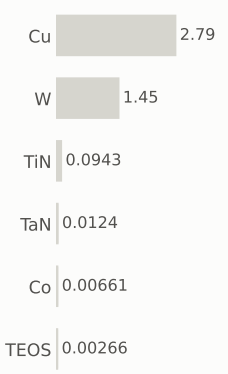

gases emitted (g)

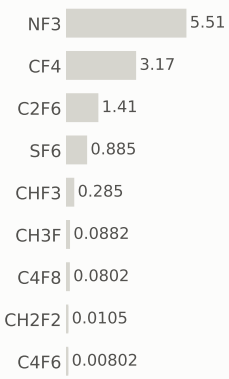

Step #7390: CVD

depo_isotropic · CVD

1.31	685.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

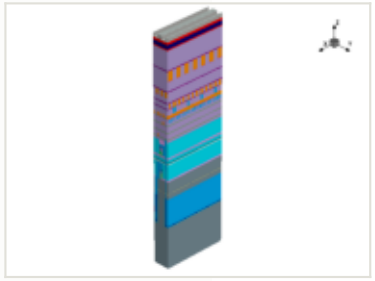

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

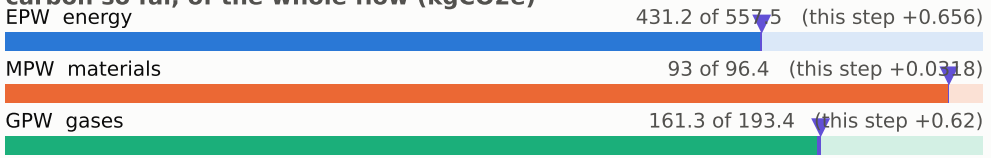

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

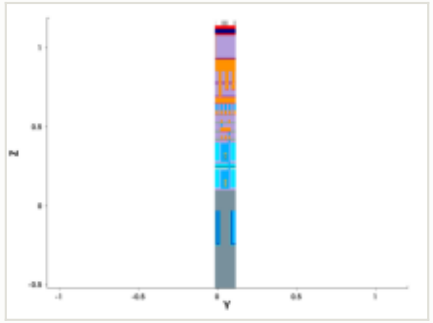

y cut at 0.049 µm

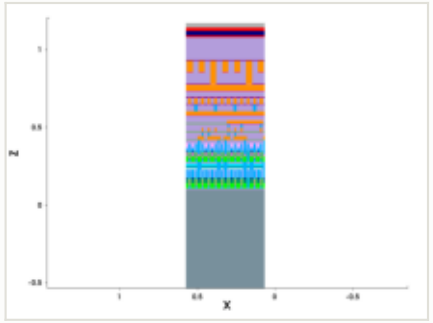

mask for this step

no mask for this step

steps by process area

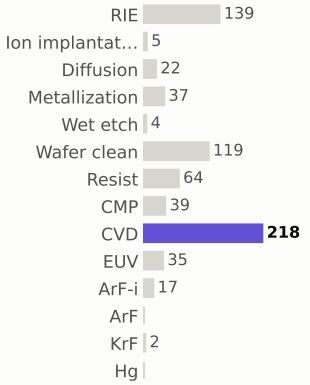

materials deposited (g)

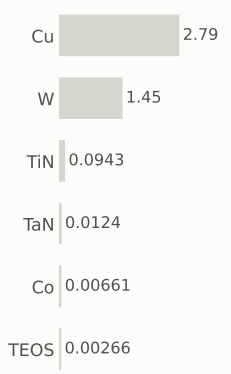

gases emitted (g)

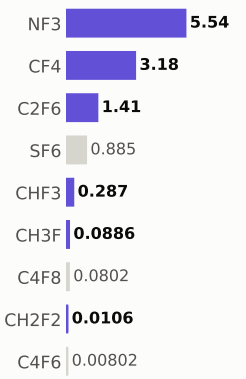

Step #7400: RIE

etch_anisotropic · RIE

1.04	686.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

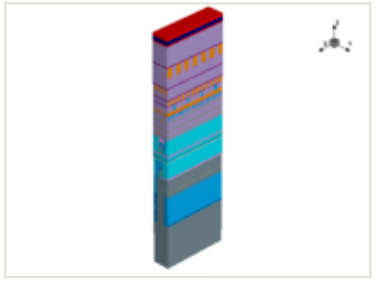

x cut at 0.385 µm

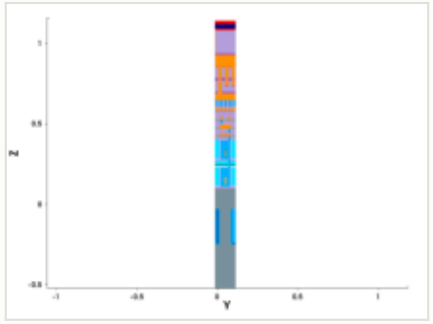

y cut at 0.049 µm

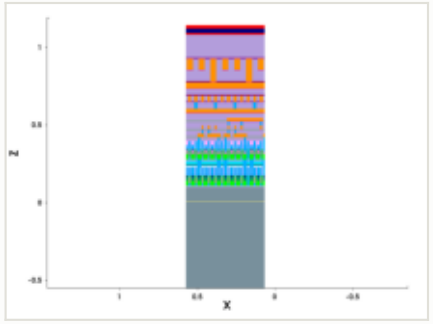

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

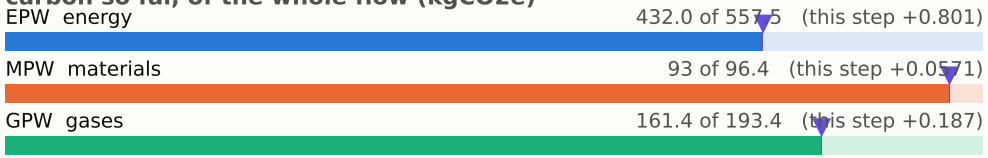

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

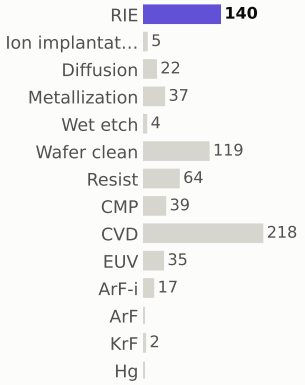

materials deposited (g)

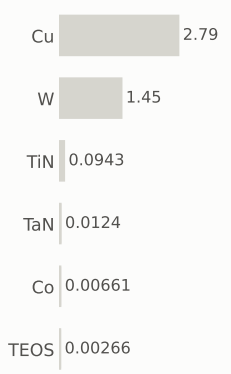

gases emitted (g)

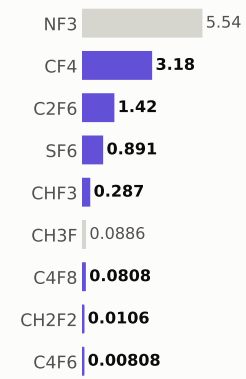

Step #7410: Wafer_clean

etch_strip · Wafer_clean

0.169	686.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

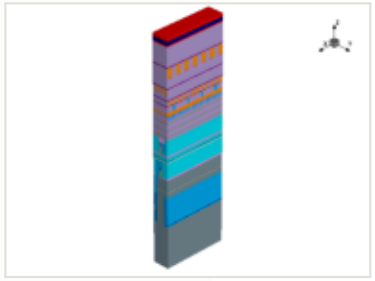

x cut at 0.385 µm

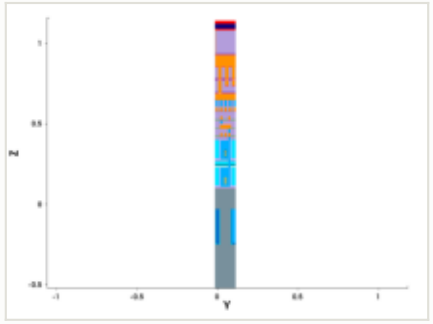

y cut at 0.049 µm

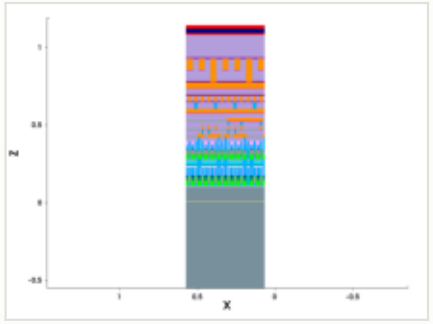

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

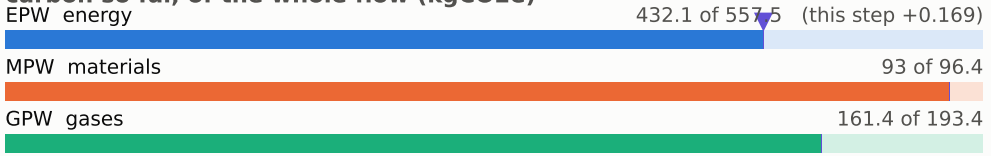

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

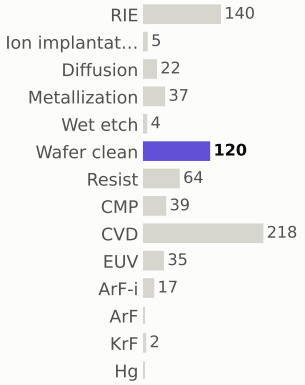

materials deposited (g)

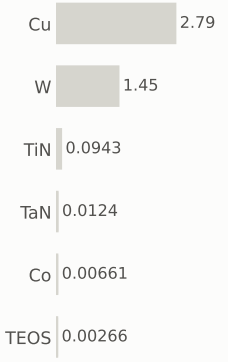

gases emitted (g)

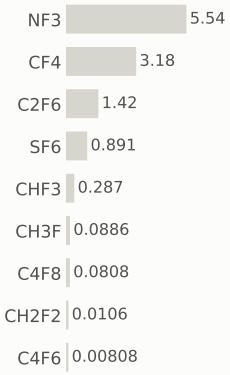

Step #7420: Resist

depo_fill · Resist

0.169	686.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

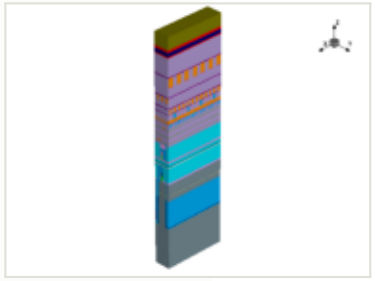

x cut at 0.385 µm

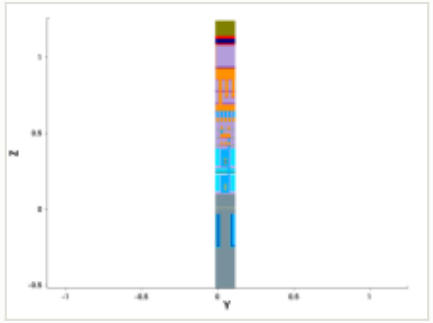

y cut at 0.049 µm

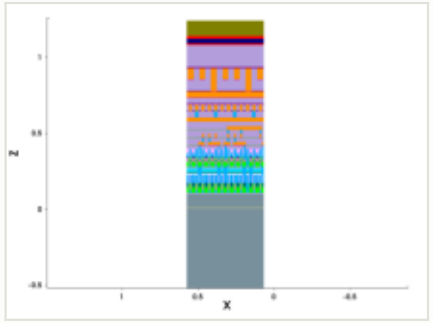

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

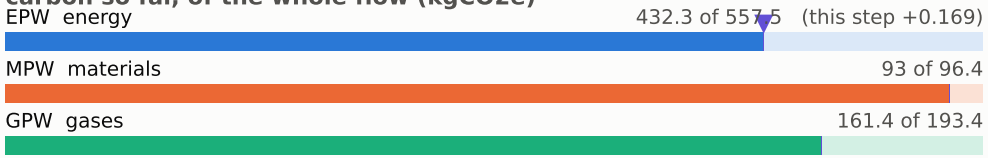

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

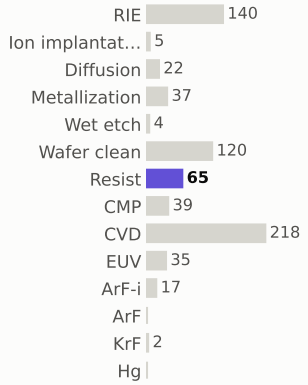

materials deposited (g)

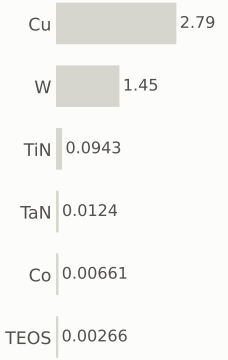

gases emitted (g)

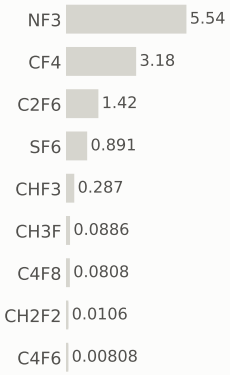

Step #7430: Wafer_clean

clean · Wafer_clean

0.169	687.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

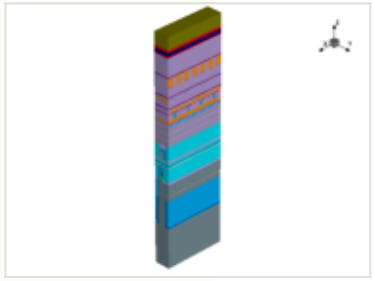

x cut at 0.385 µm

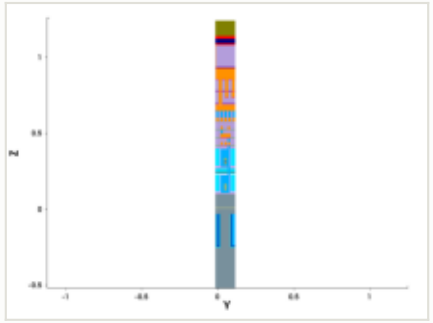

y cut at 0.049 µm

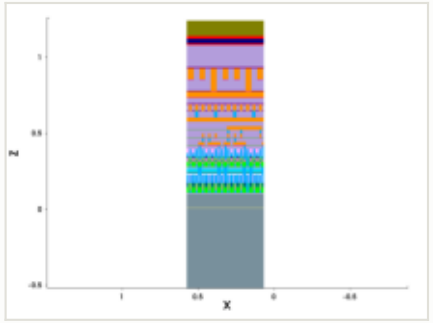

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

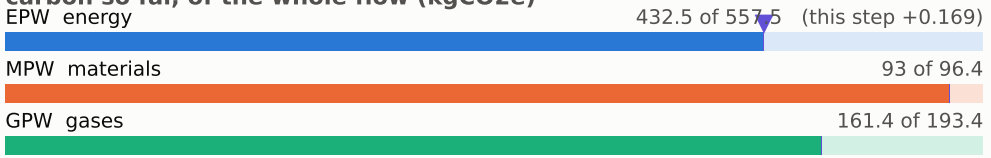

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

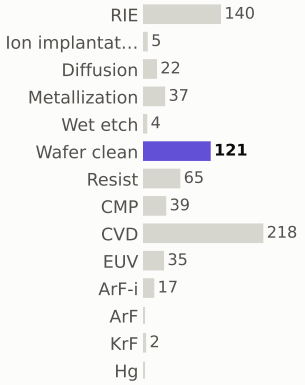

materials deposited (g)

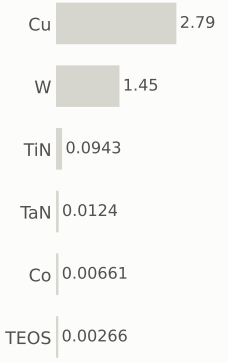

gases emitted (g)

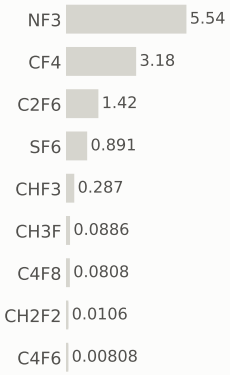

Step #7440: ArF-i

litho_patterning · ArF-i

0.217	687.2	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

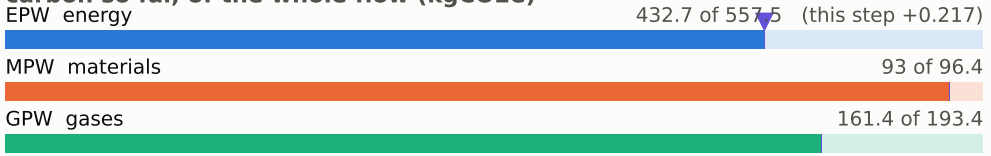

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

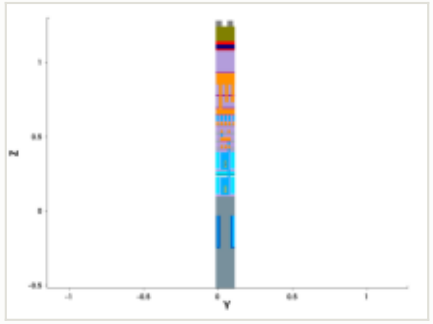

y cut at 0.049 µm

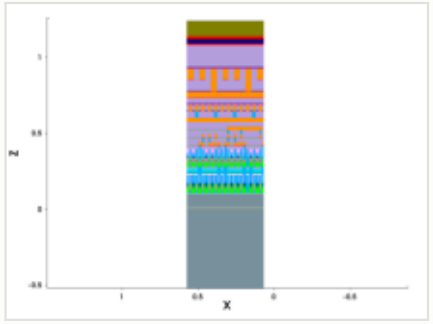

mask: layer 55:0 (GDSII)

steps by process area

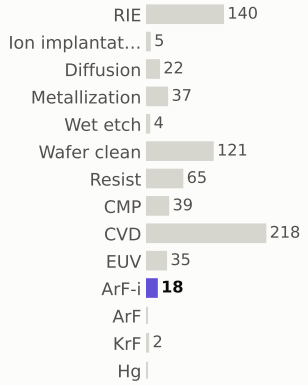

materials deposited (g)

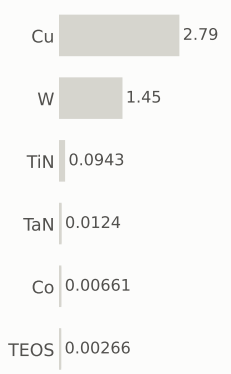

gases emitted (g)

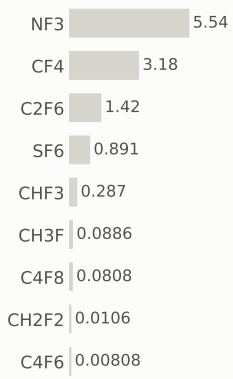

Step #7450: RIE

etch_anisotropic · RIE

1.04	688.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

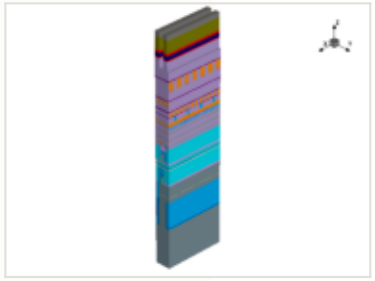

x cut at 0.385 µm

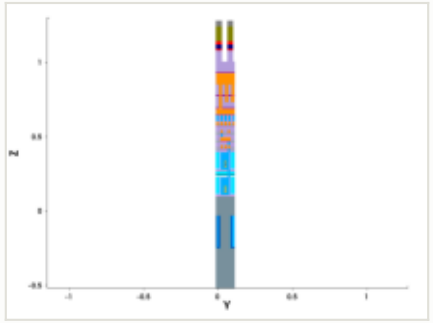

y cut at 0.049 µm

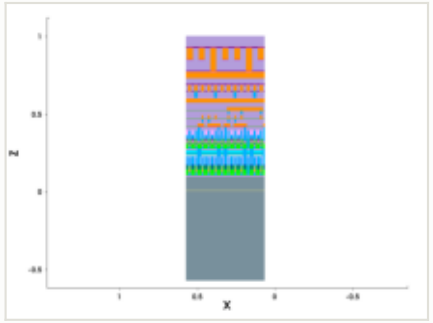

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

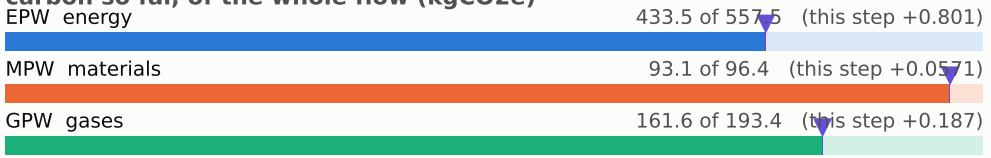

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

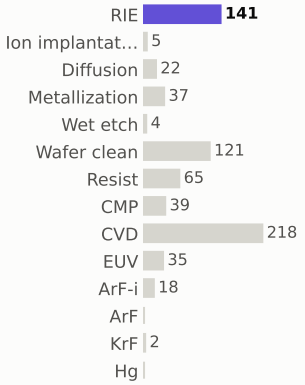

materials deposited (g)

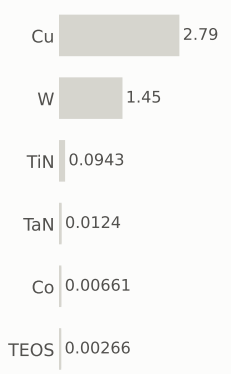

gases emitted (g)

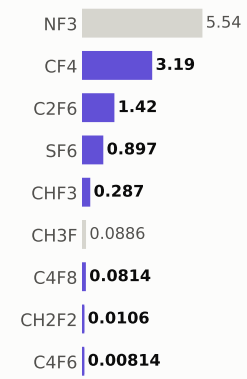

Step #7460: Wafer_clean

etch_strip · Wafer_clean

0.169	688.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

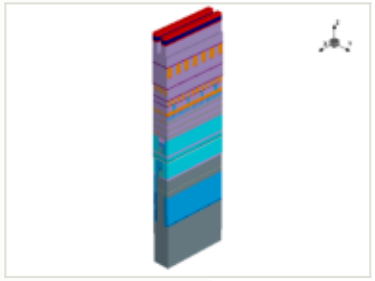

x cut at 0.385 µm

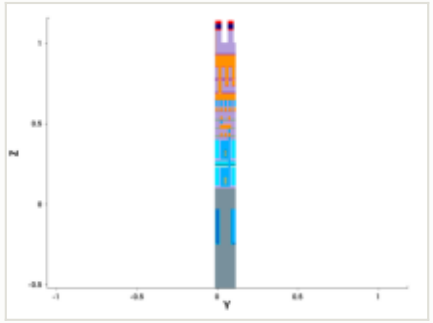

y cut at 0.049 µm

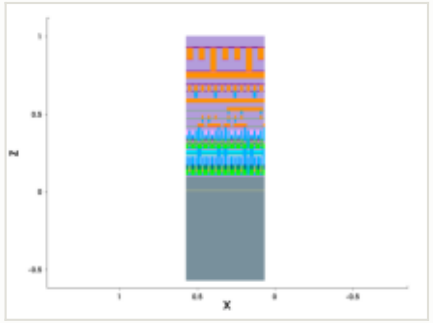

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

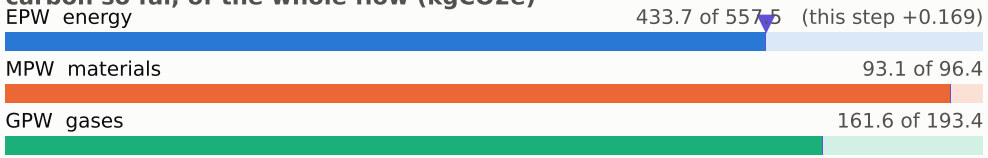

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

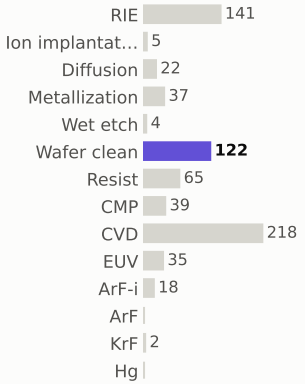

materials deposited (g)

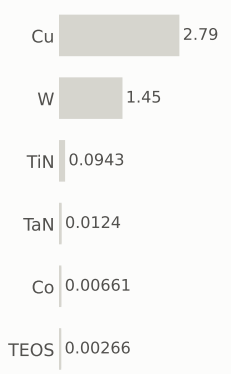

gases emitted (g)

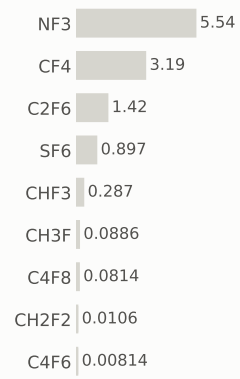

Step #7470: Metallization

depo_ellipsoidal · Metallization

1.2	689.6	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

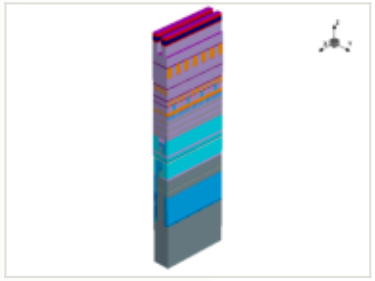

x cut at 0.385 µm

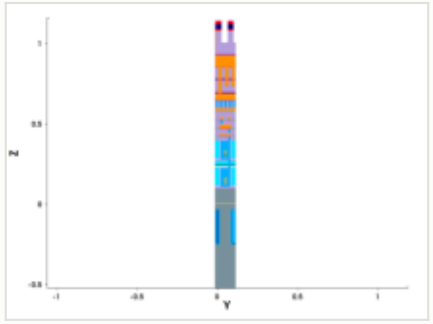

y cut at 0.049 µm

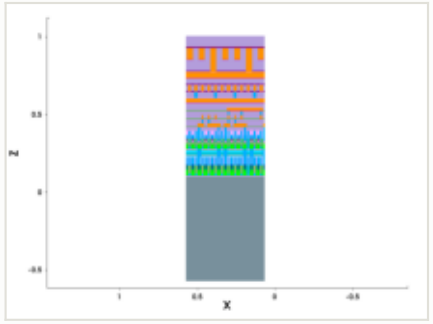

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

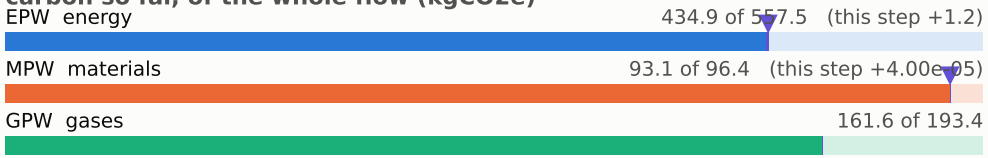

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

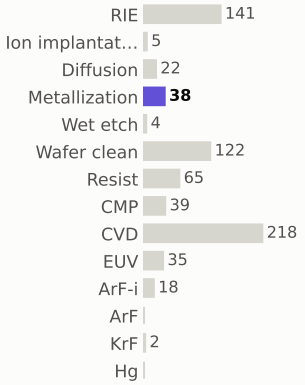

materials deposited (g)

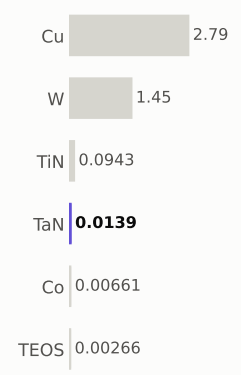

gases emitted (g)

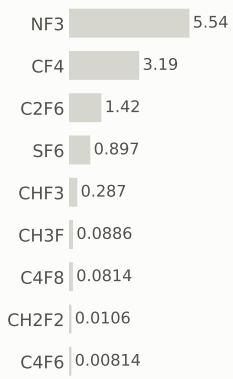

Step #7480: Metallization

depo_fill · Metallization

1.21	690.8	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

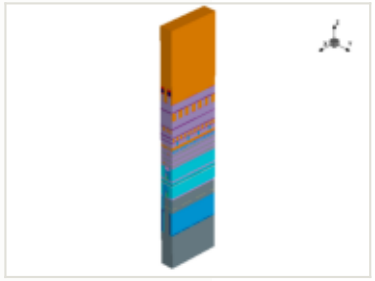



x cut at 0.385 µm

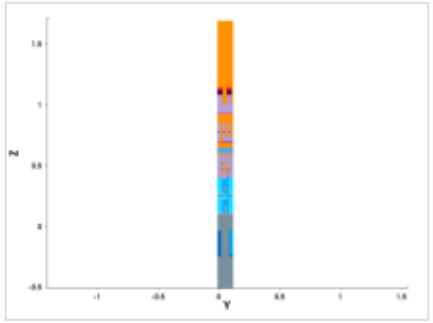

y cut at 0.049 µm

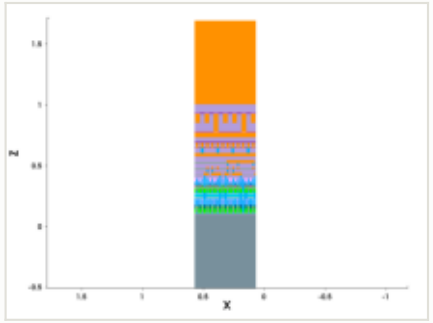

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

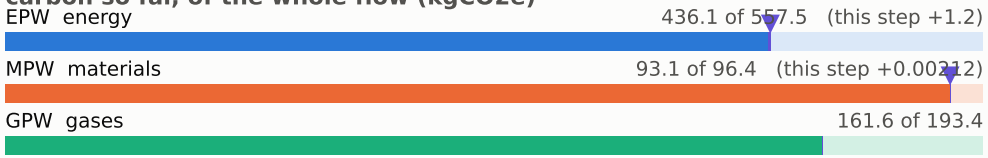

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

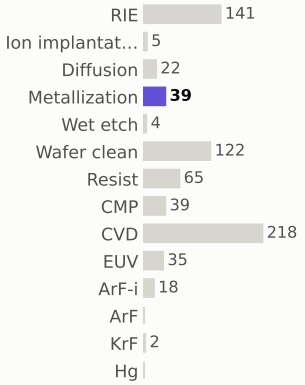

materials deposited (g)

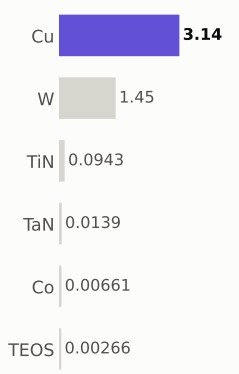

gases emitted (g)

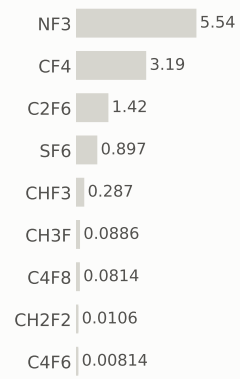

Step #7490: Diffusion

treatment · Diffusion

0.801	691.6	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

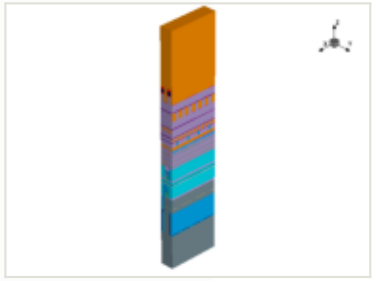



this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

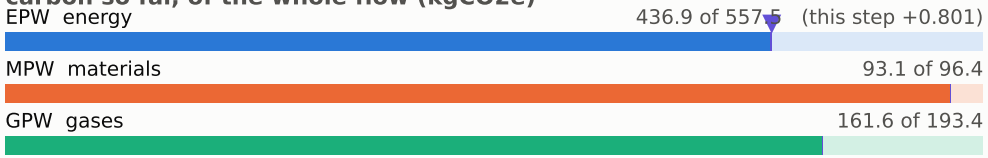

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

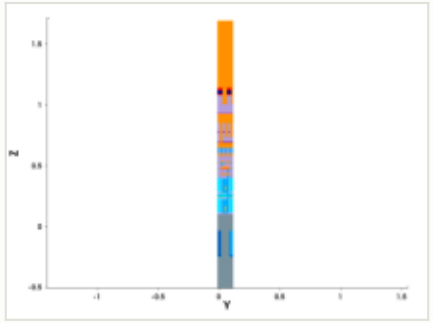

y cut at 0.049 µm

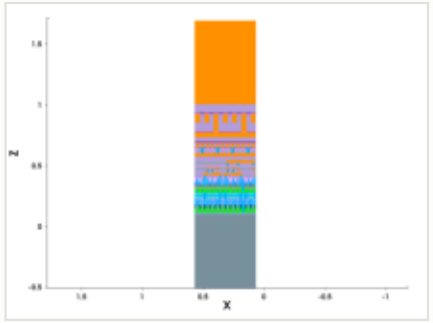

mask for this step

no mask for this step

steps by process area

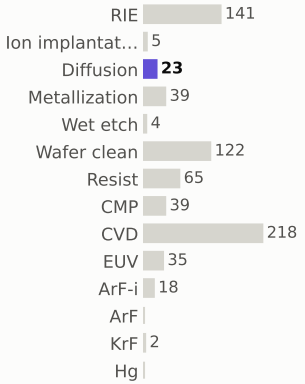

materials deposited (g)

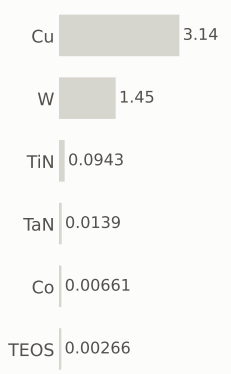

gases emitted (g)

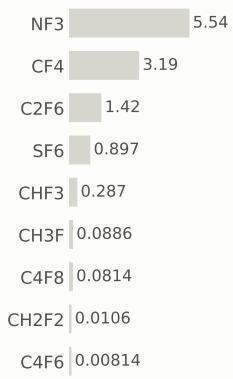

Step #7500: CMP

etch_cmp · CMP

0.169	691.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

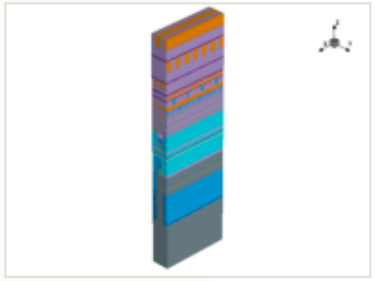

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

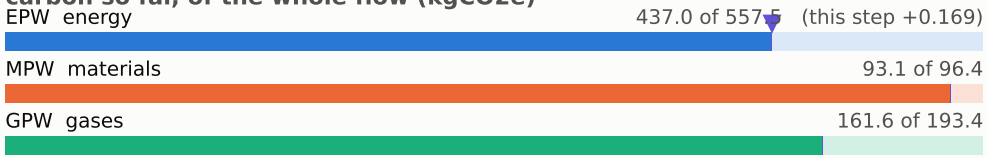

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

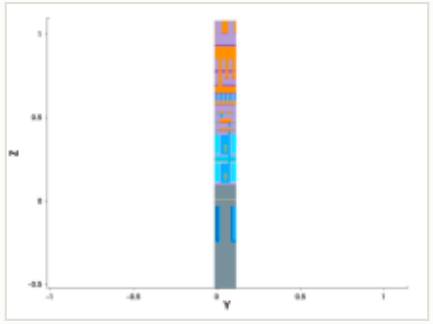

y cut at 0.049 µm

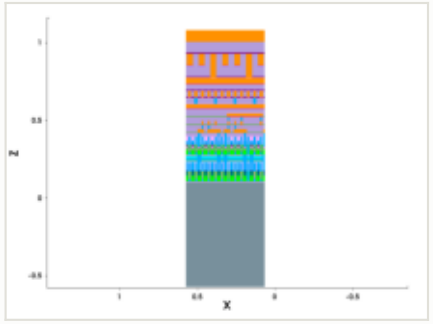

mask for this step

no mask for this step

steps by process area

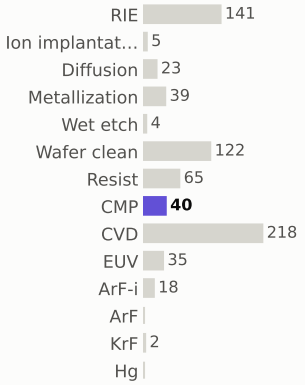

materials deposited (g)

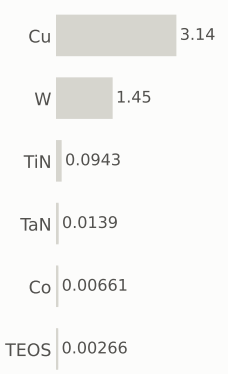

gases emitted (g)

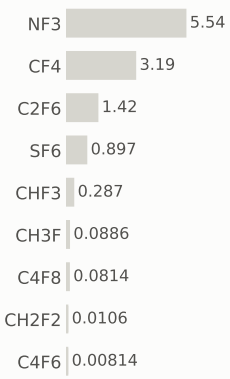

Step #7510: Metallization

depo_isotropic · Metallization

1.2	693.0	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

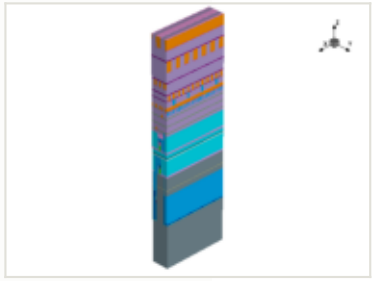

x cut at 0.385 µm

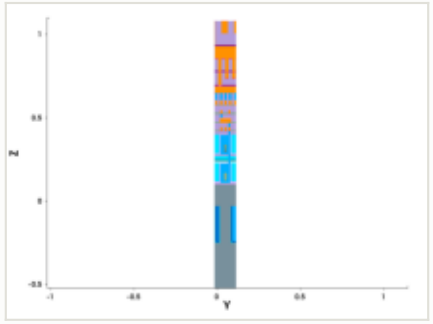

y cut at 0.049 µm

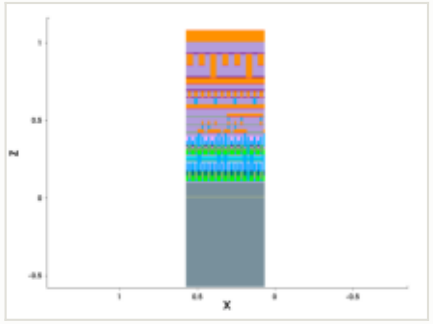

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Co	EPW tool	0.86 kgCO2e
thickness	0.0015 µm	EPW overhead	0.344 kgCO2e
material GWP	44.5 gCO2e/g	MPW	4.20e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

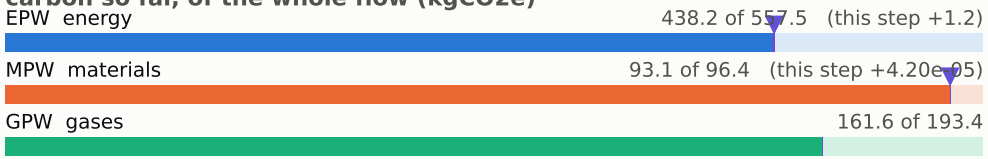

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

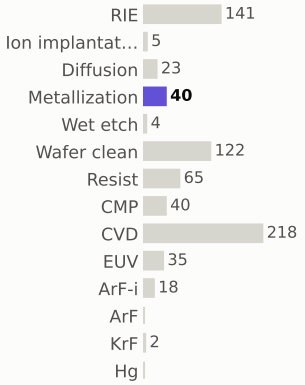

materials deposited (g)

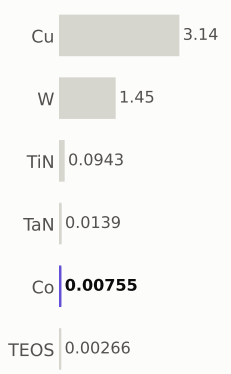

gases emitted (g)

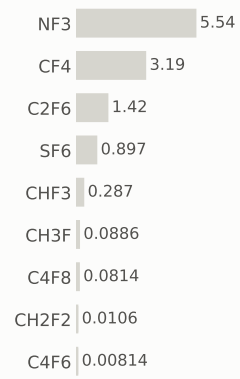

Step #7530: CVD

depo_fill · CVD

1.31	694.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

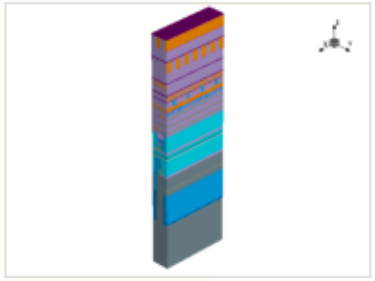

x cut at 0.385 µm

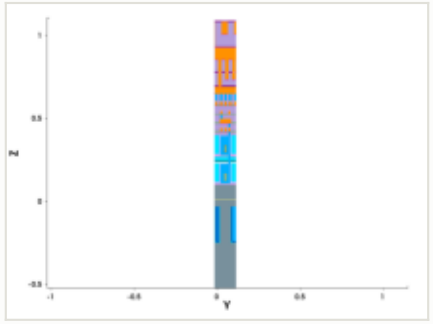

y cut at 0.049 µm

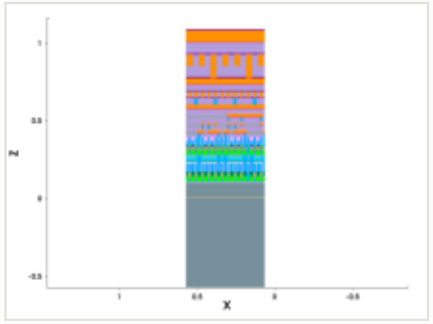

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

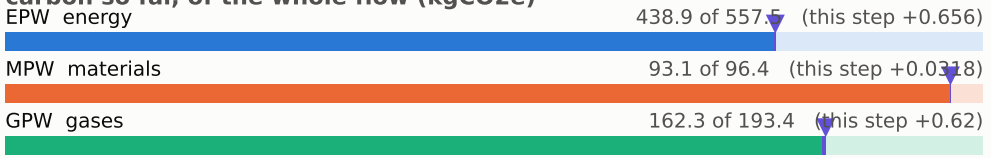

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

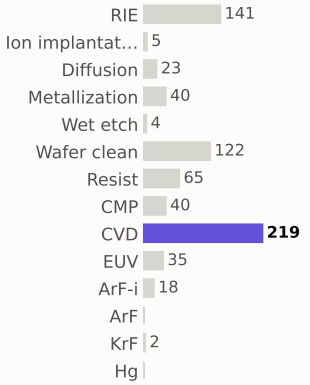

materials deposited (g)

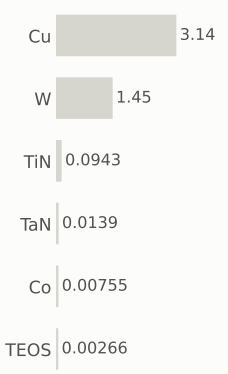

gases emitted (g)

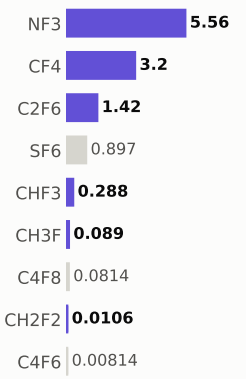

Step #7540: CVD

depo_fill · CVD

1.31	695.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

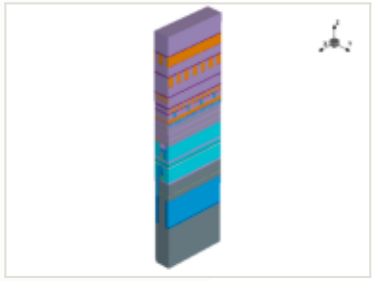

this step

process area	CVD
material	—
thickness	0.146 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

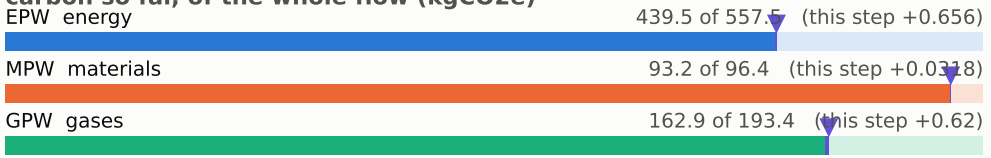

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

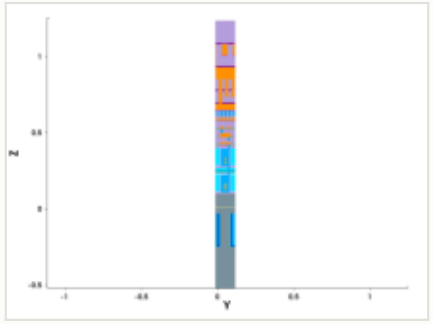

y cut at 0.049 µm

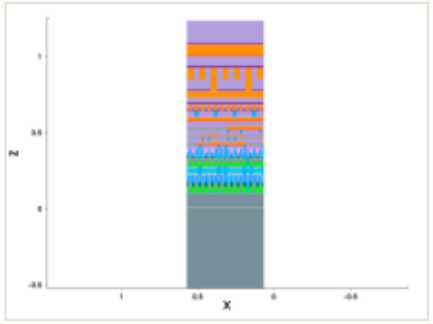

mask for this step

no mask for this step

steps by process area

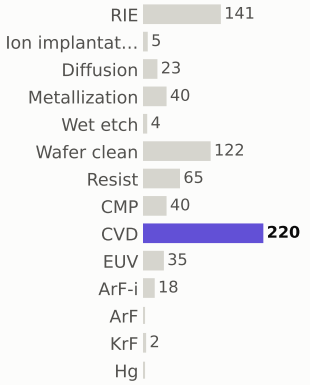

materials deposited (g)

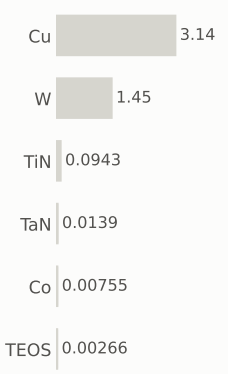

gases emitted (g)

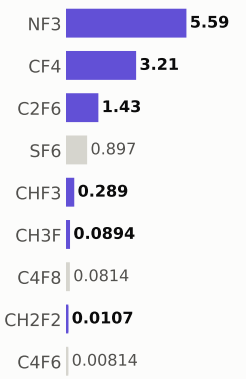

Step #7550: Diffusion

treatment · Diffusion

0.801	696.4	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

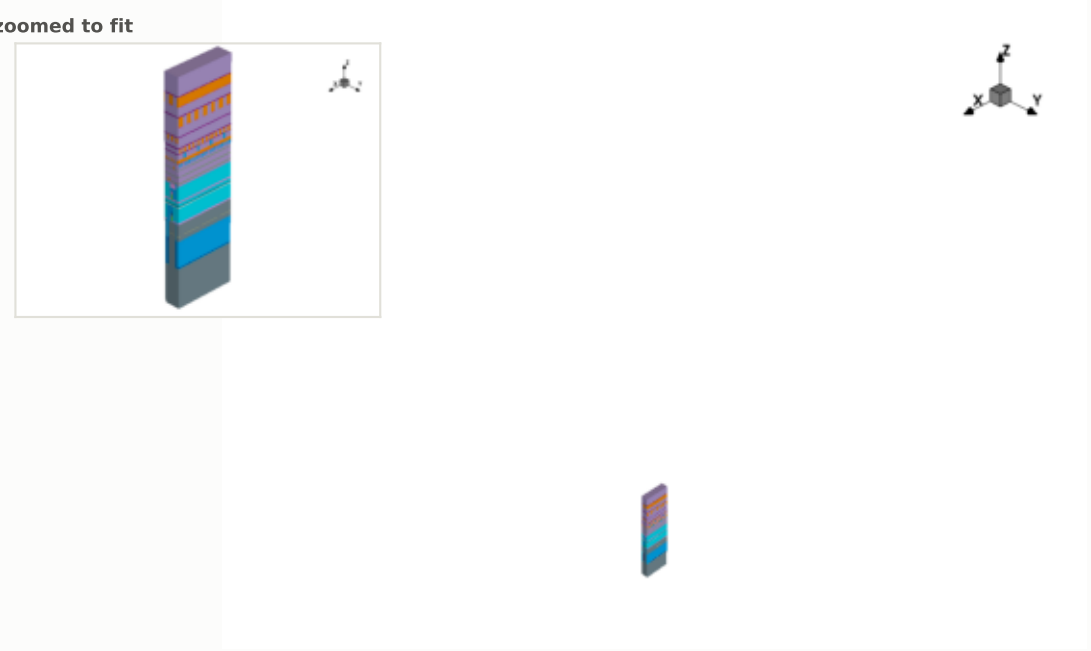

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

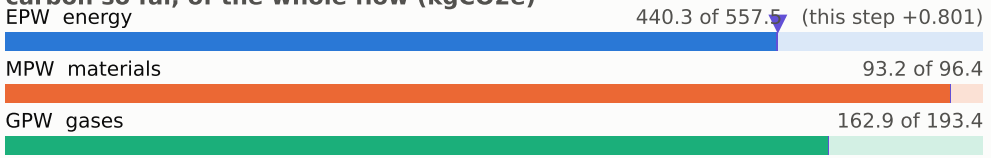

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

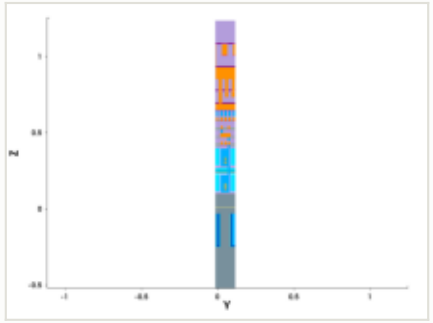

y cut at 0.049 µm

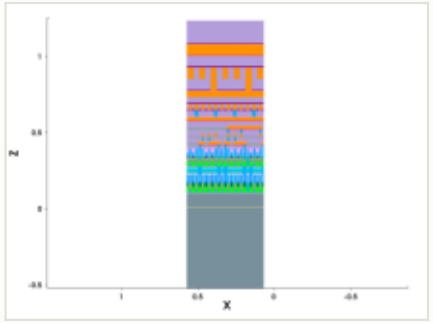

mask for this step

no mask for this step

steps by process area

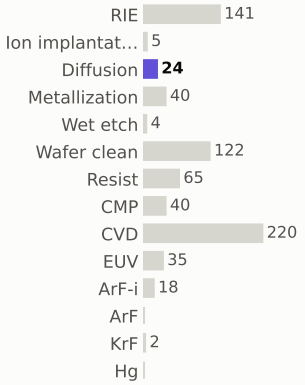

materials deposited (g)

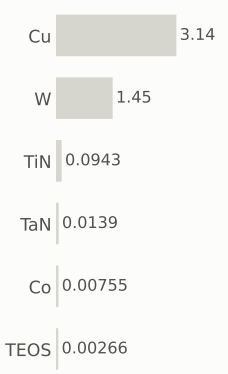

gases emitted (g)

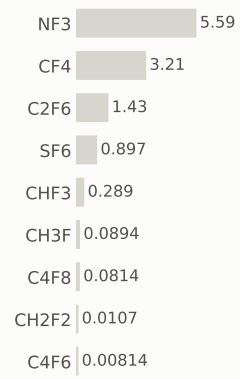

Step #7560: Wafer_clean

clean · Wafer_clean

0.169	696.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

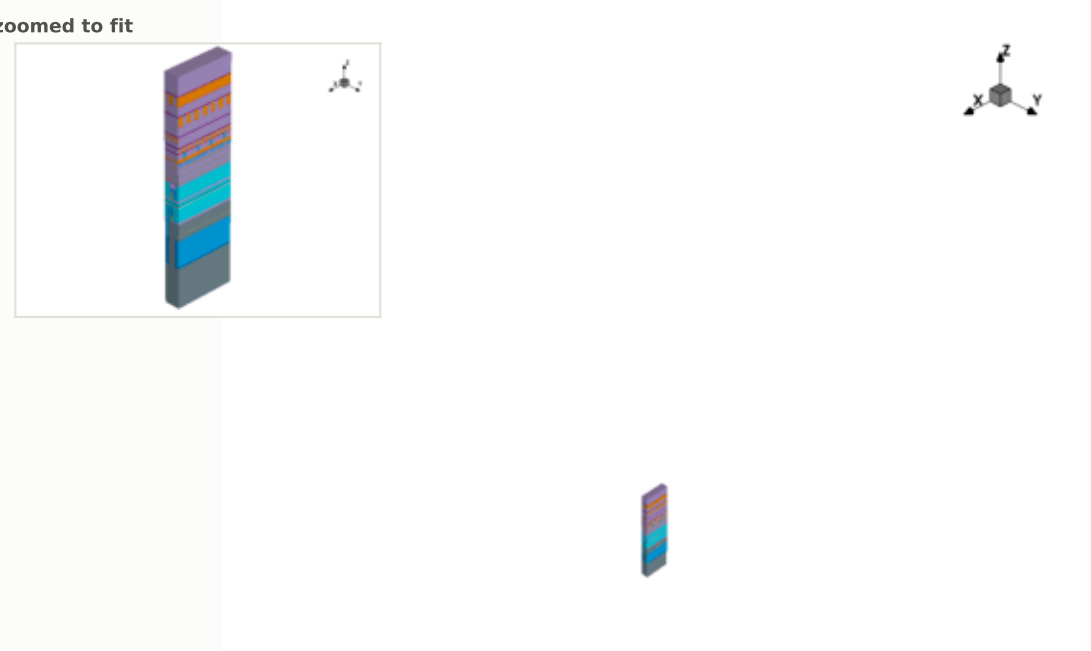

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

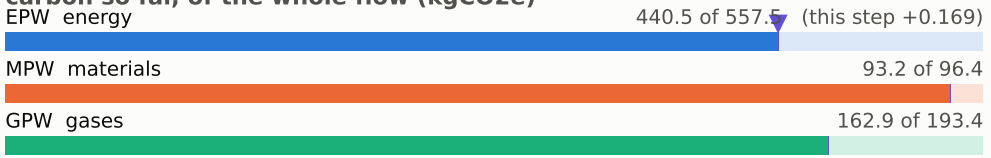

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

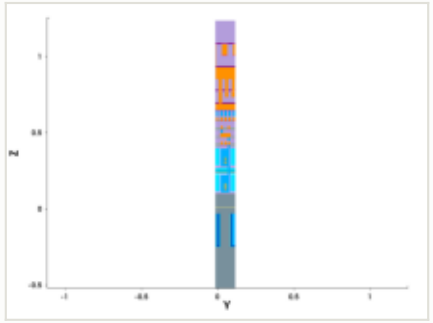

y cut at 0.049 µm

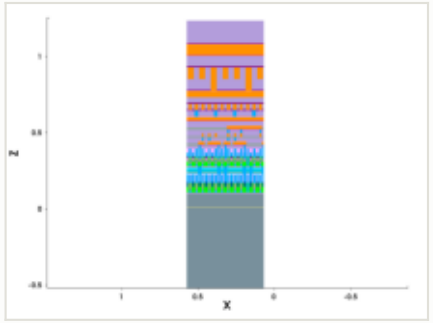

mask for this step

no mask for this step

steps by process area

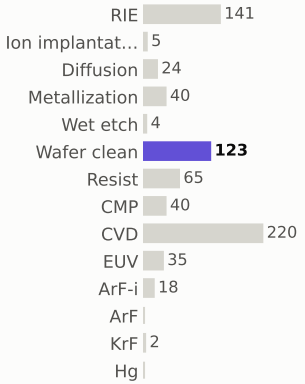

materials deposited (g)

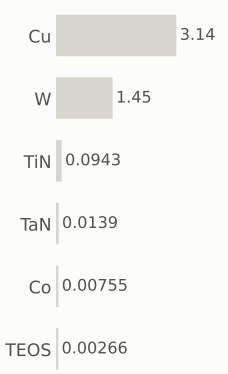

gases emitted (g)

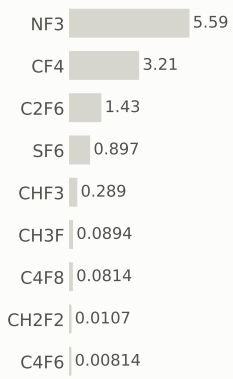

Step #7570: CVD

depo_fill · CVD

1.31	697.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

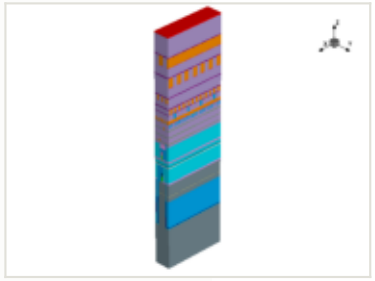

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

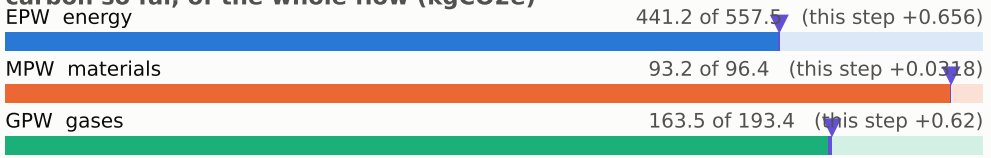

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

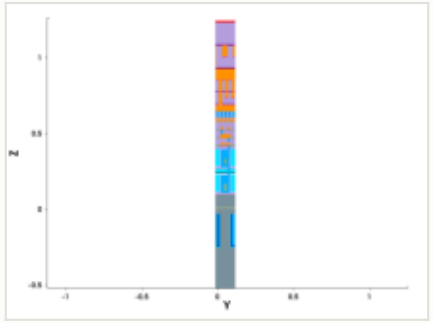

y cut at 0.049 µm

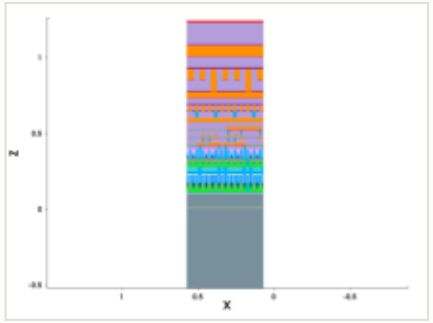

mask for this step

no mask for this step

steps by process area

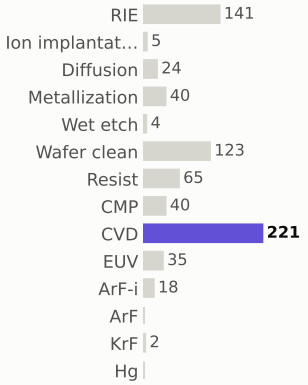

materials deposited (g)

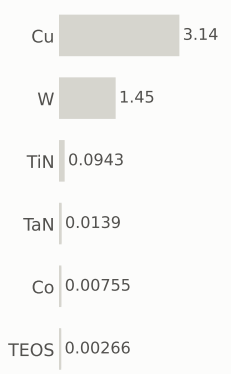

gases emitted (g)

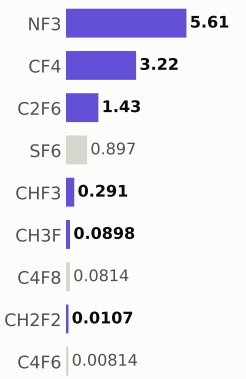

Step #7580: Resist

depo_fill · Resist

0.169	698.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

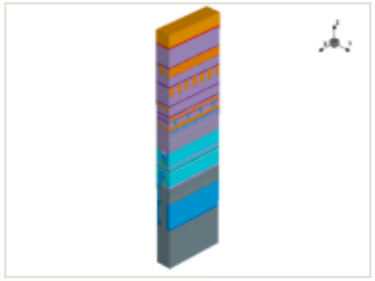

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

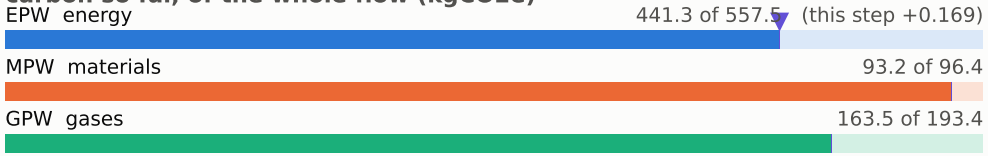

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

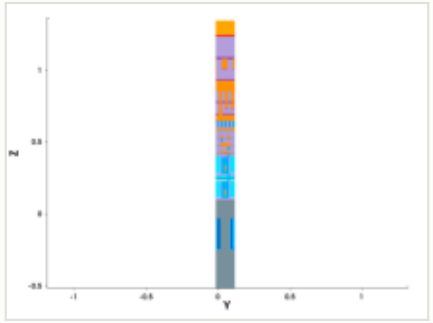

y cut at 0.049 µm

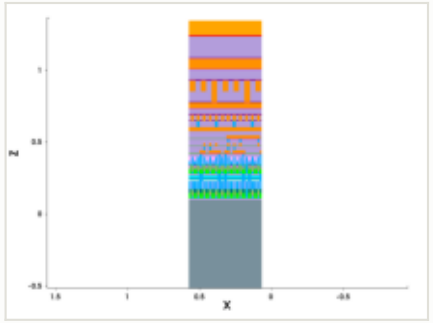

mask for this step

no mask for this step

steps by process area

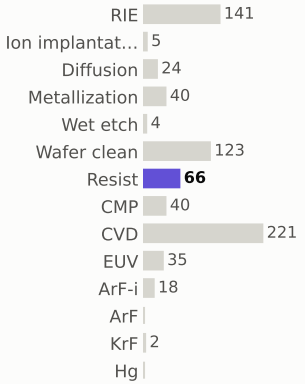

materials deposited (g)

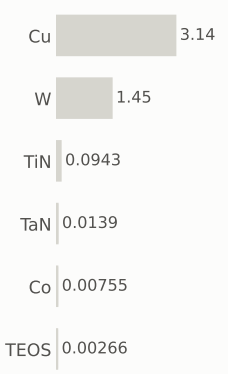

gases emitted (g)

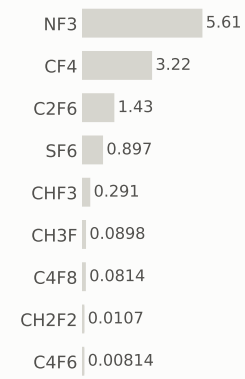

Step #7590: CVD

depo_fill · CVD

1.31	699.3	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

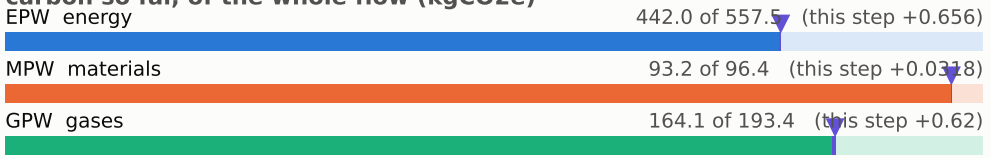

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

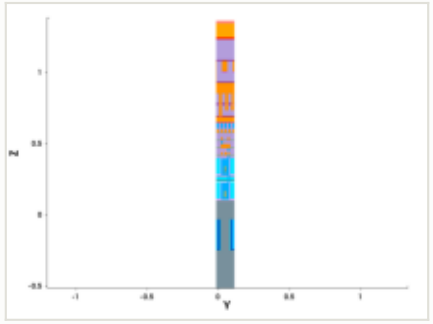

y cut at 0.049 µm

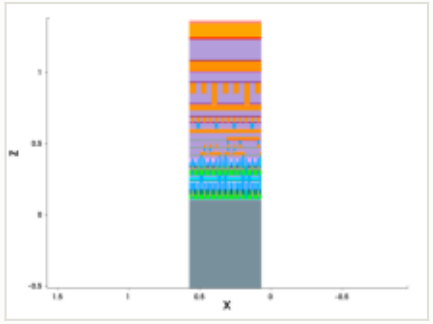

mask for this step

no mask for this step

steps by process area

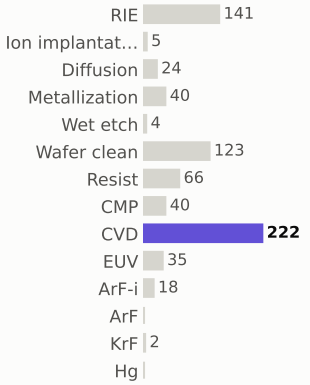

materials deposited (g)

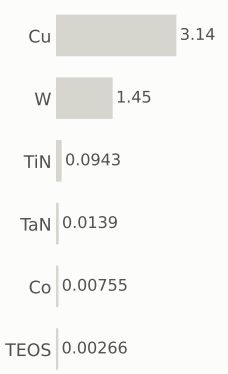

gases emitted (g)

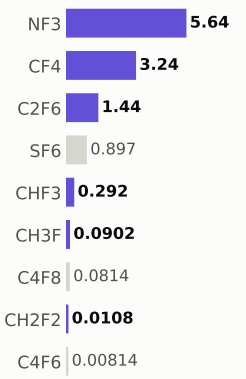

Step #7600: Wafer_clean

clean · Wafer_clean

0.169	699.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

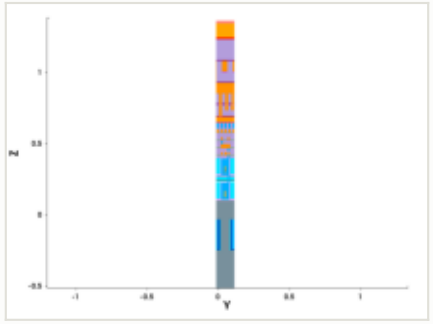

y cut at 0.049 µm

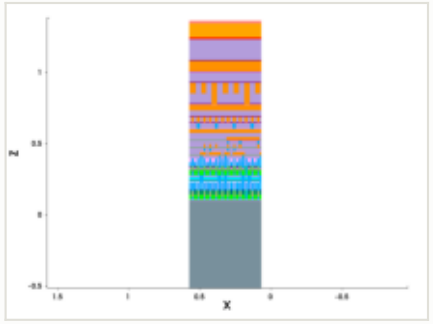

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

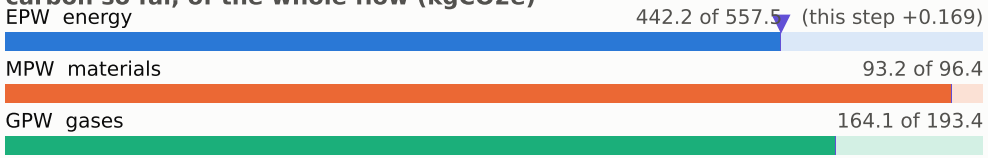

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

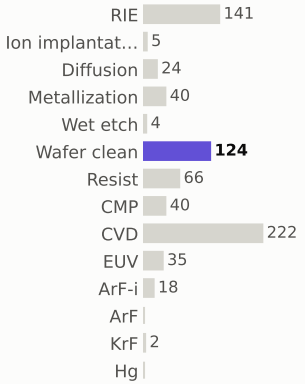

materials deposited (g)



gases emitted (g)



Step #7610: ArF-i

litho_patterning · ArF-i

0.217	699.7	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

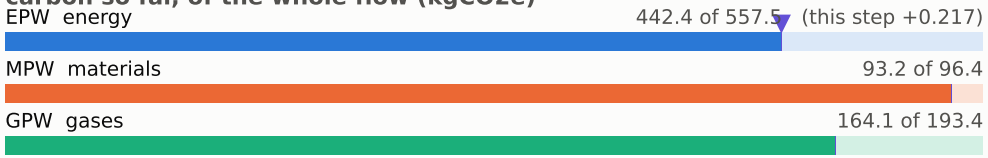

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

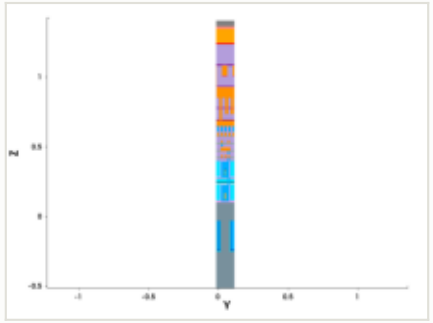

y cut at 0.049 µm

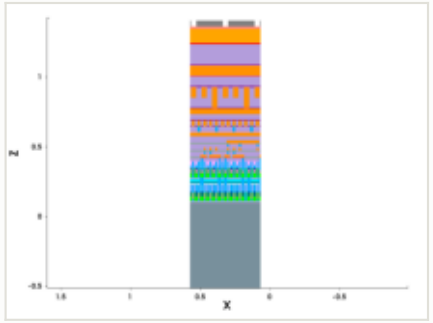

mask: layer 10571:0 (GDSII)

steps by process area

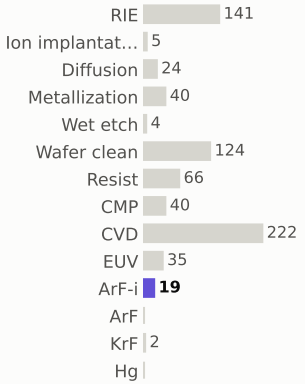

materials deposited (g)

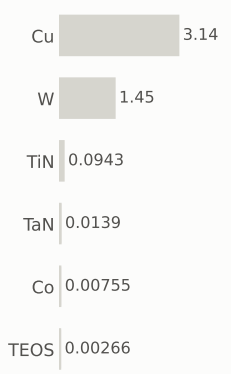

gases emitted (g)

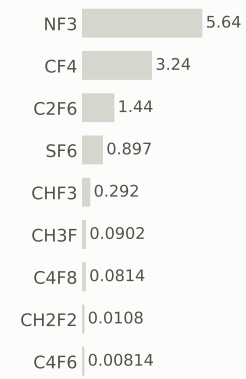

Step #7620: RIE

etch_anisotropic · RIE

1.04	700.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

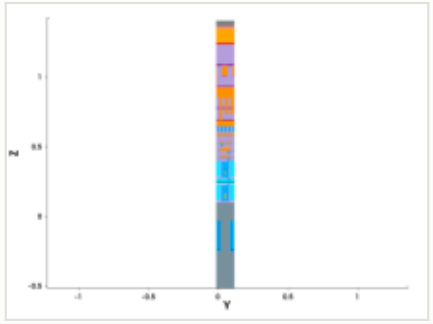

y cut at 0.049 µm

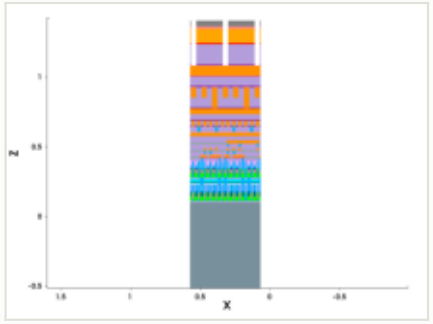

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

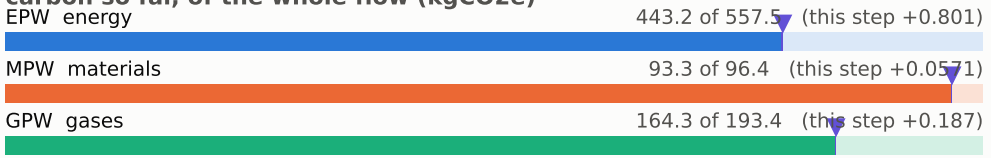

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

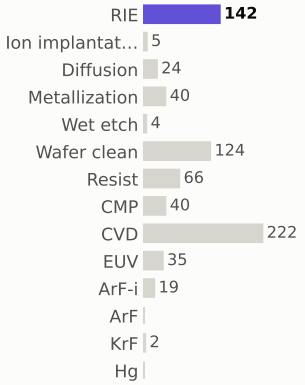

materials deposited (g)

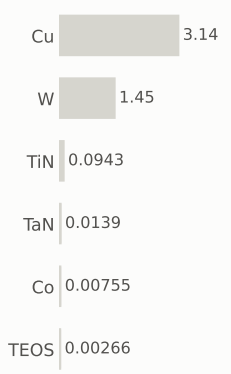

gases emitted (g)

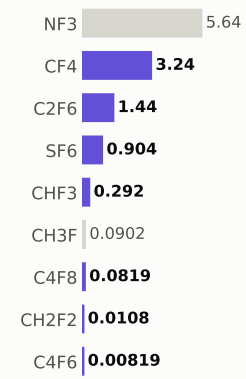

Step #7630: Wafer_clean

etch_strip · Wafer_clean

0.169	700.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

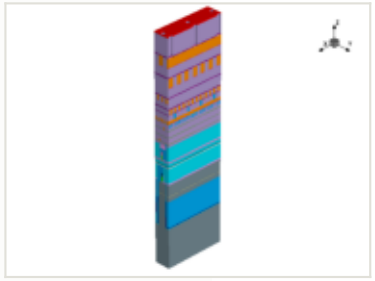

x cut at 0.385 µm

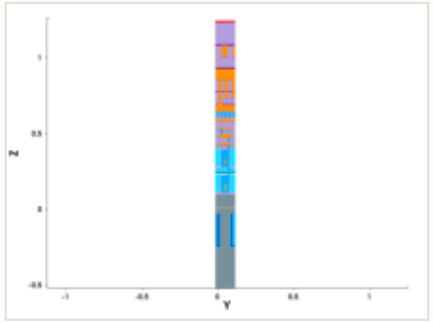

y cut at 0.049 µm

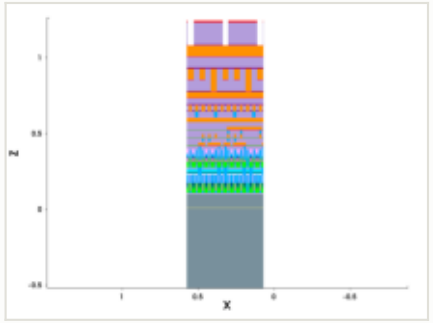

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

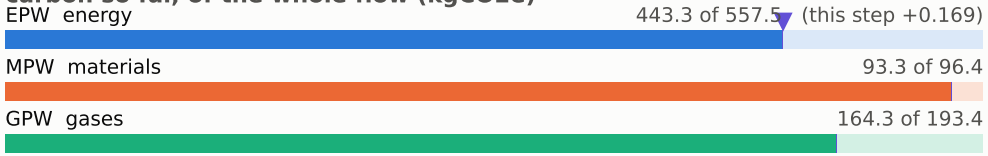

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

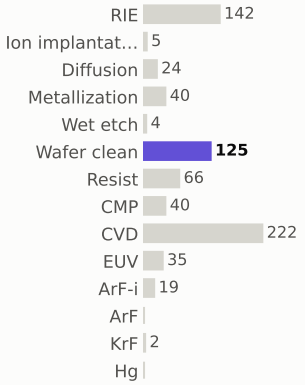

materials deposited (g)

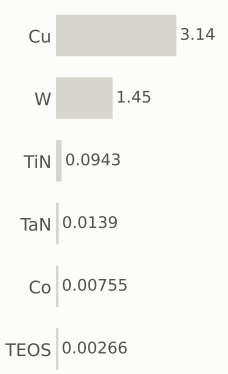

gases emitted (g)

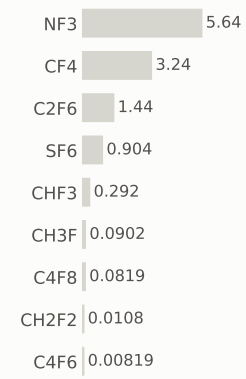

Step #7640: Resist

depo_fill · Resist

0.169	701.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

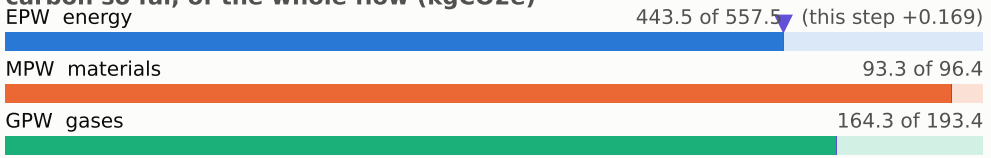

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

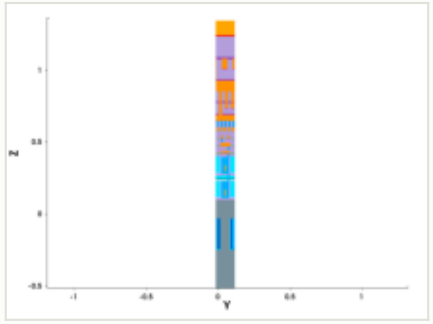

y cut at 0.049 µm

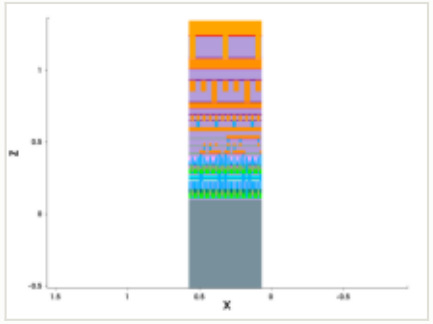

mask for this step

no mask for this step

steps by process area

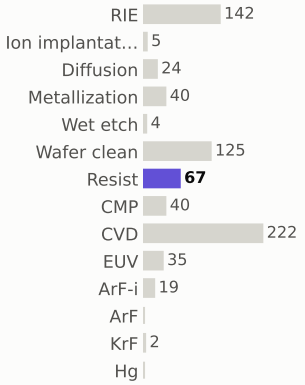

materials deposited (g)

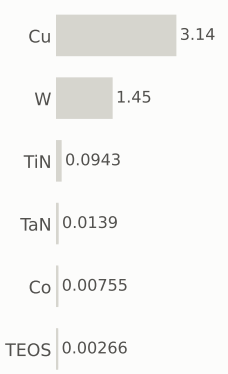

gases emitted (g)

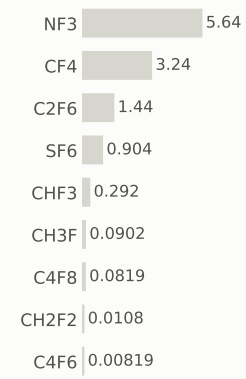

Step #7650: CVD

depo_fill · CVD

1.31	702.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

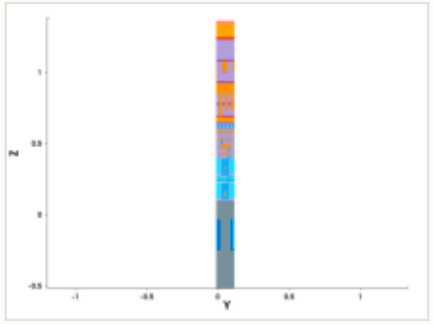

y cut at 0.049 µm

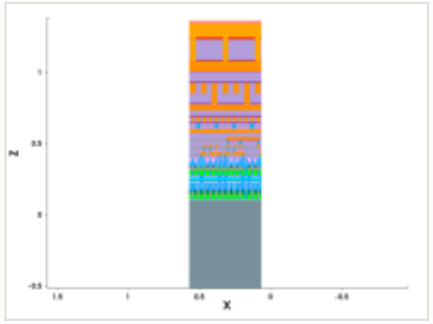

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

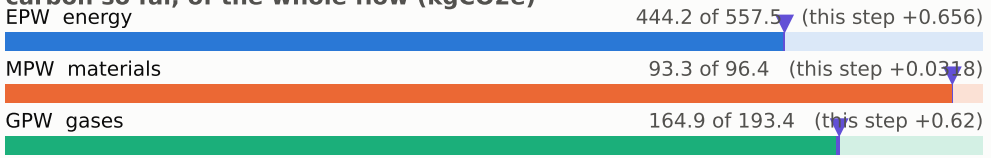

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

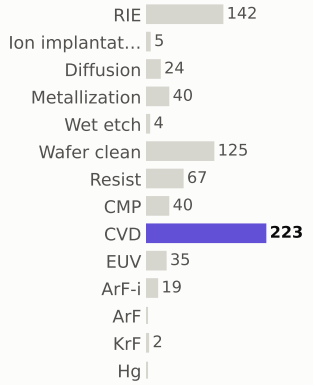

materials deposited (g)

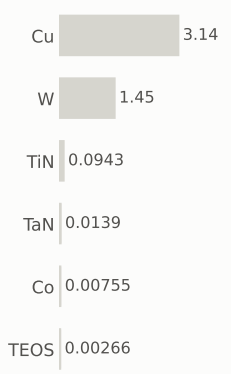

gases emitted (g)

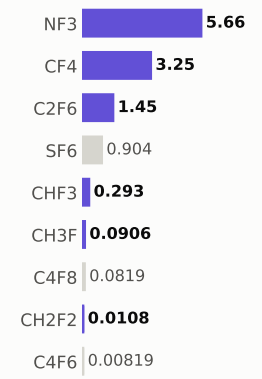

Step #7660: Wafer_clean

clean · Wafer_clean

0.169	702.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

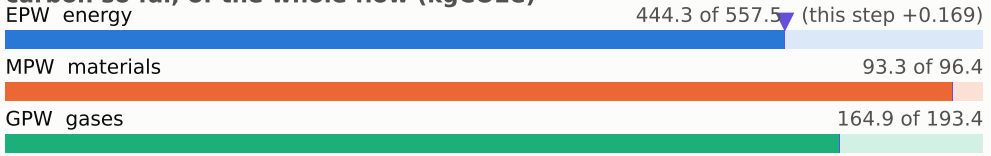

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

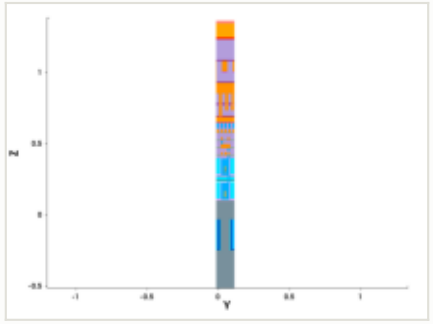

y cut at 0.049 µm

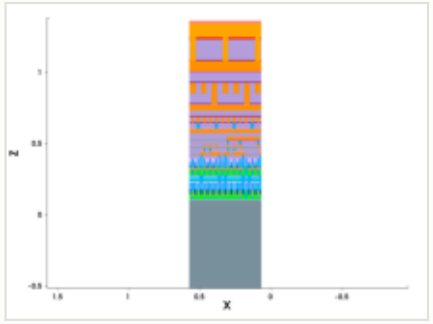

mask for this step

no mask for this step

steps by process area

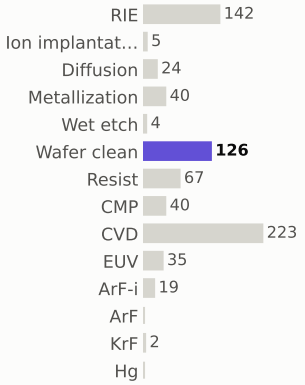

materials deposited (g)

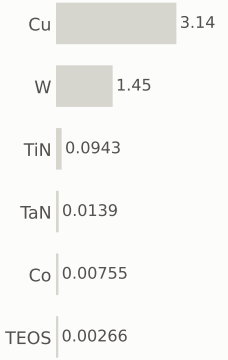

gases emitted (g)



Step #7670: ArF-i

litho_patterning · ArF-i

0.217	702.8	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

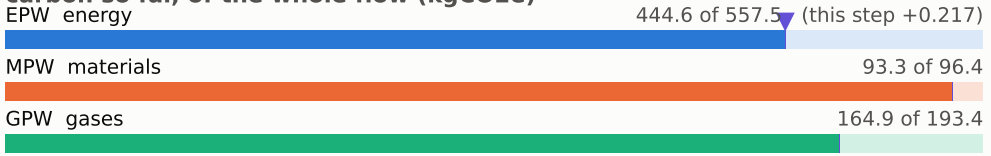

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

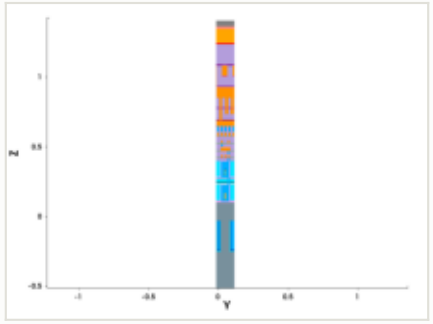

y cut at 0.049 µm

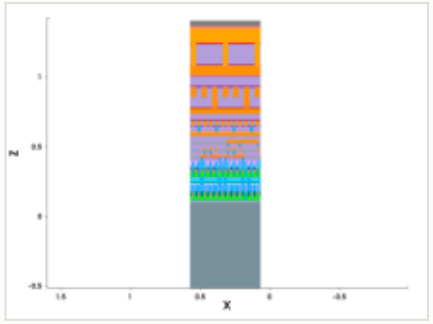

mask: layer 10572:0 (GDSII)

nothing in the clip window

steps by process area

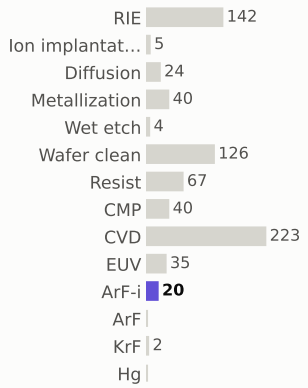

materials deposited (g)

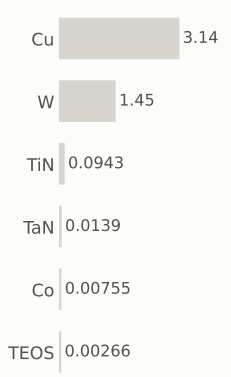

gases emitted (g)

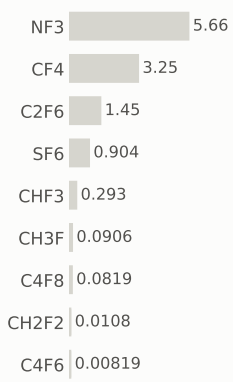

Step #7680: RIE

etch_anisotropic · RIE

1.04	703.8	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

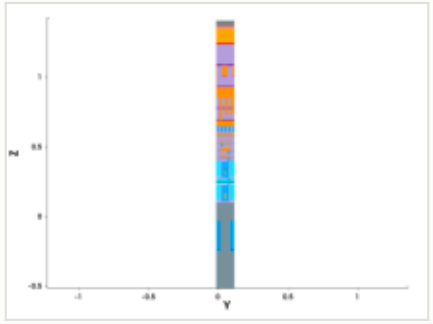

y cut at 0.049 µm

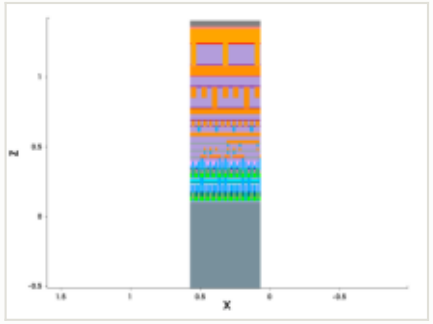

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

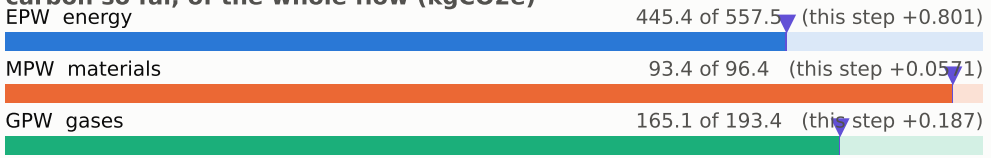

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

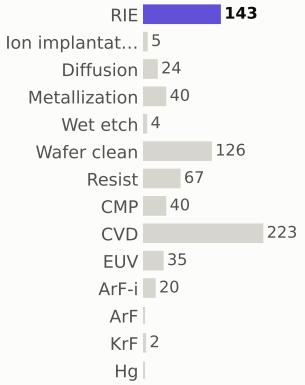

materials deposited (g)

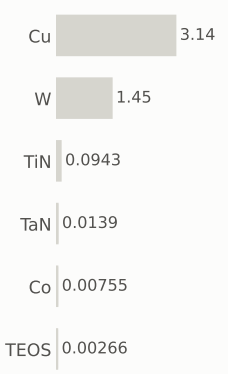

gases emitted (g)

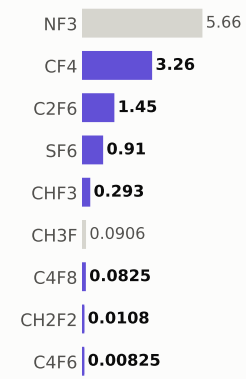

Step #7690: Wafer_clean

etch_strip · Wafer_clean

0.169	704.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

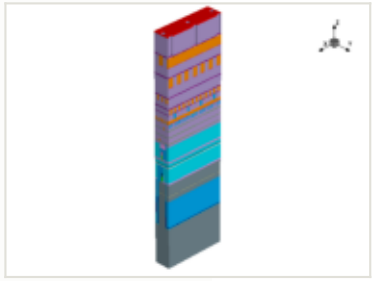

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

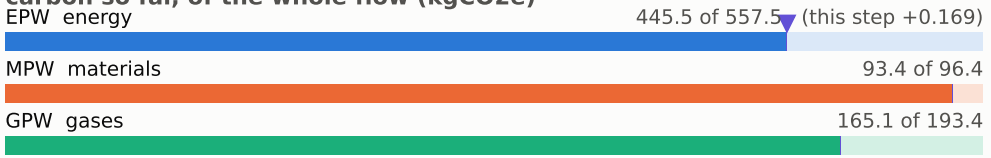

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

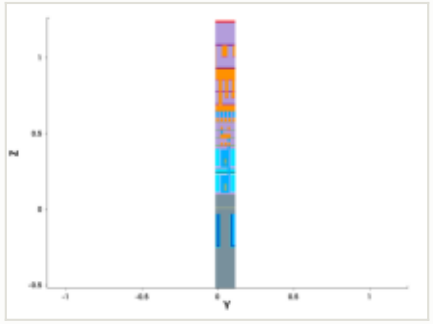

y cut at 0.049 µm

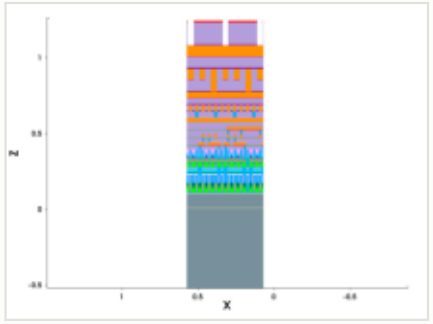

mask for this step

no mask for this step

steps by process area

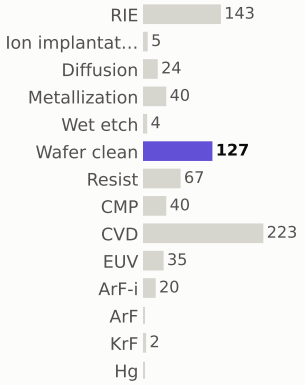

materials deposited (g)

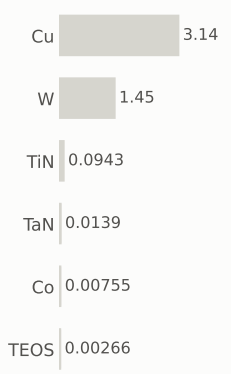

gases emitted (g)

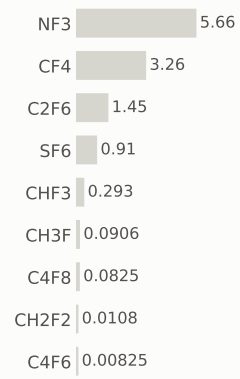

Step #7700: Metallization

depo_ellipsoidal · Metallization

1.2	705.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

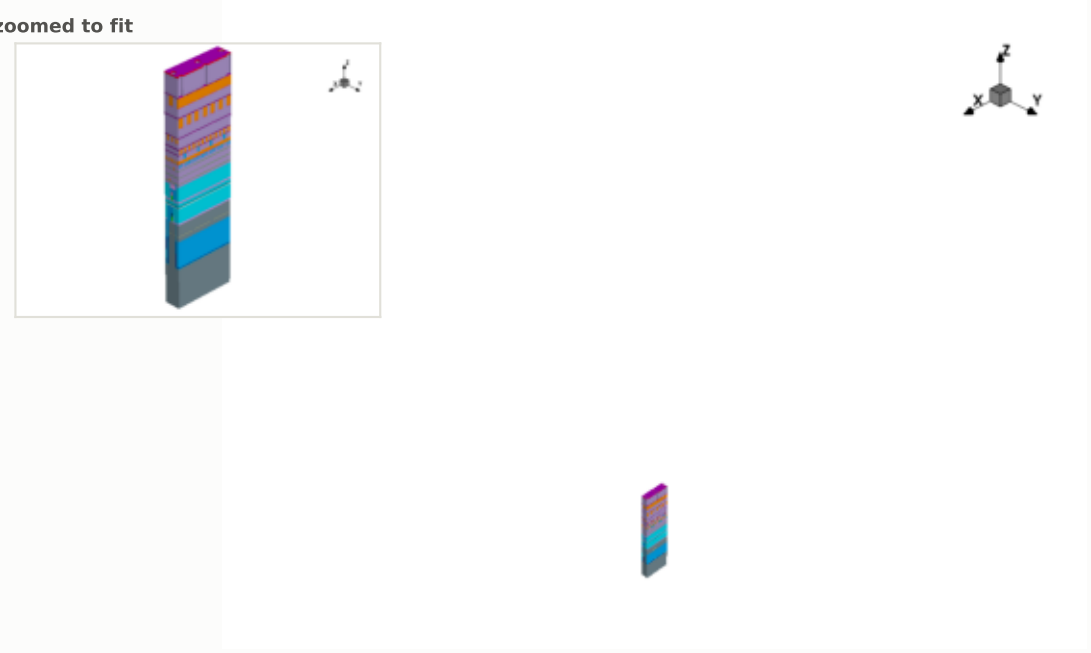

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

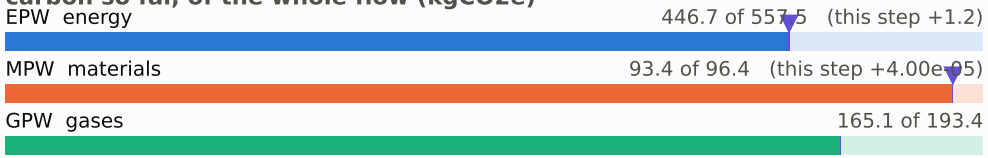

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

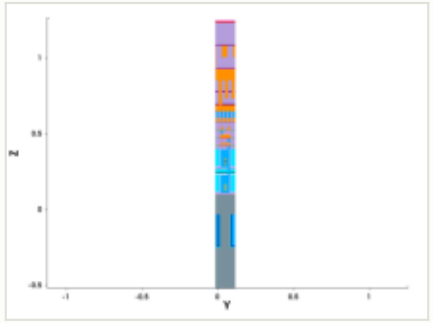

y cut at 0.049 µm

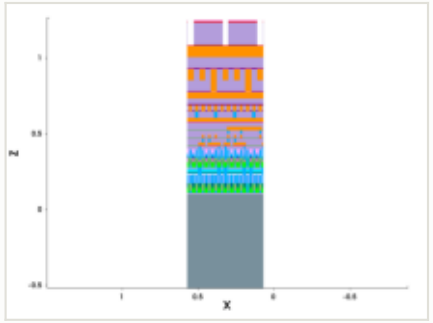

mask for this step

no mask for this step

steps by process area

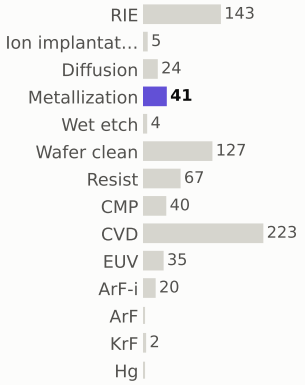

materials deposited (g)

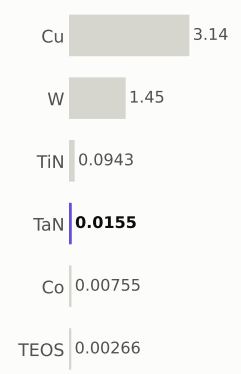

gases emitted (g)

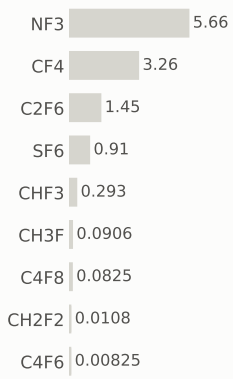

Step #7710: Metallization

depo_fill · Metallization

1.21	706.4	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

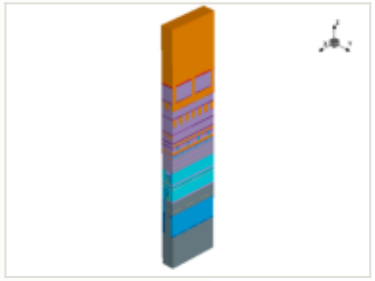

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

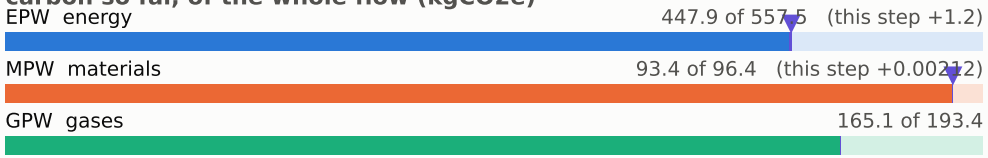

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

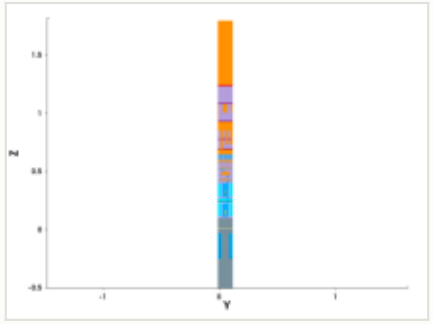

y cut at 0.049 µm

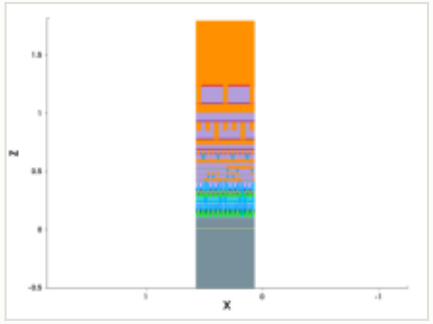

mask for this step

no mask for this step

steps by process area

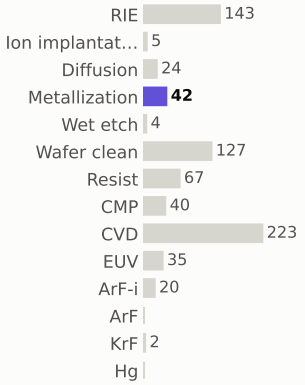

materials deposited (g)

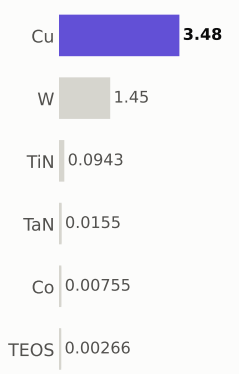

gases emitted (g)

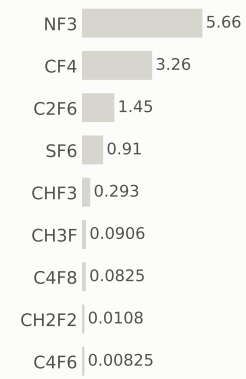

Step #7720: Diffusion

treatment · Diffusion

0.801	707.2	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

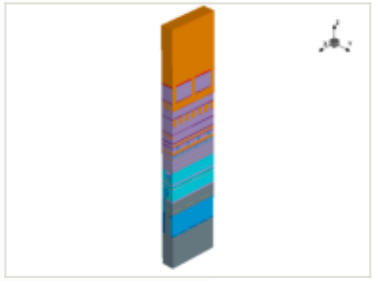

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

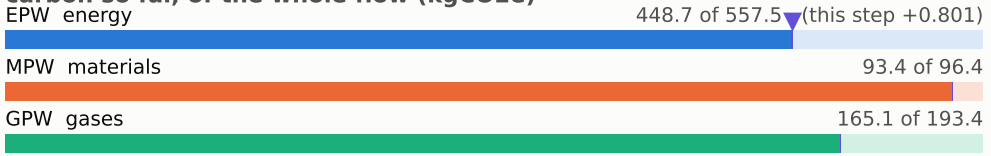

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

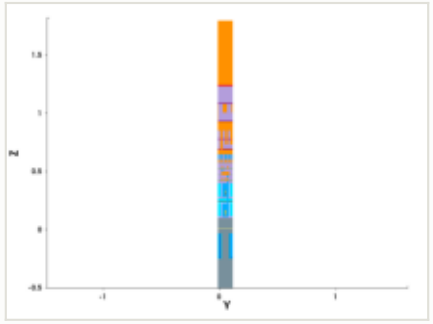

y cut at 0.049 µm

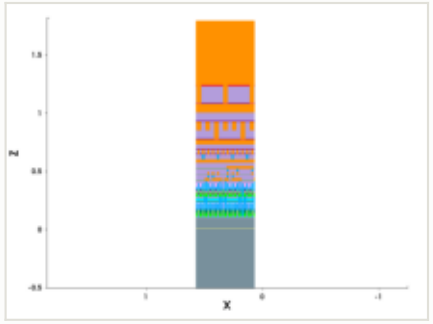

mask for this step

no mask for this step

steps by process area

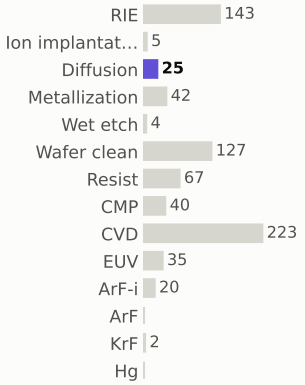

materials deposited (g)

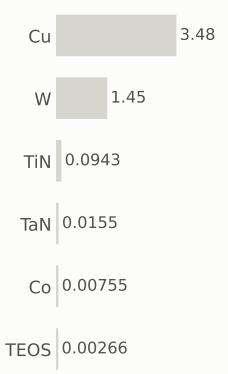

gases emitted (g)

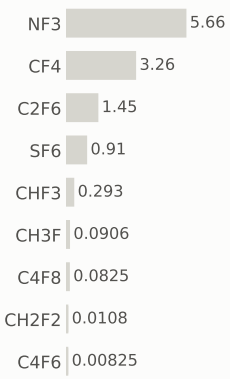

Step #7730: CMP

etch_cmp · CMP

0.169	707.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

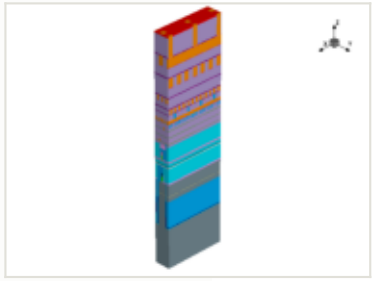

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

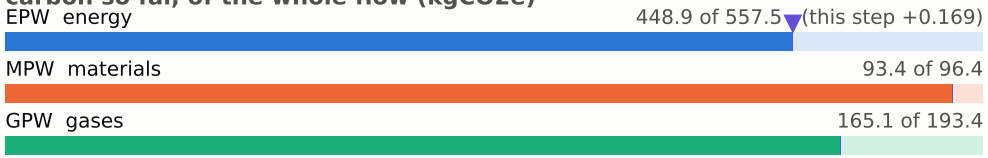

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

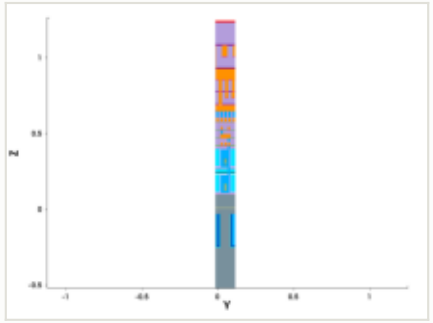

y cut at 0.049 µm

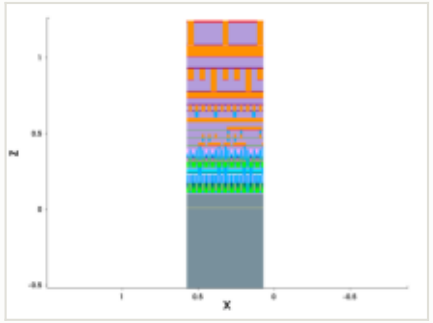

mask for this step

no mask for this step

steps by process area

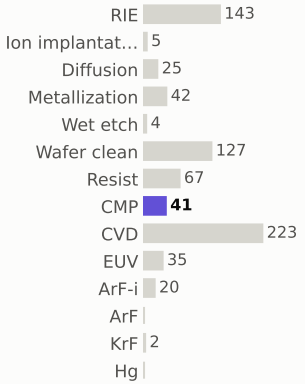

materials deposited (g)

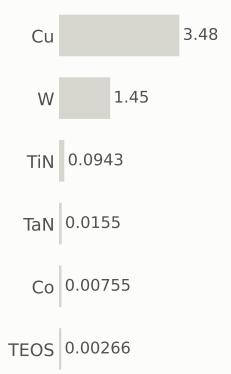

gases emitted (g)

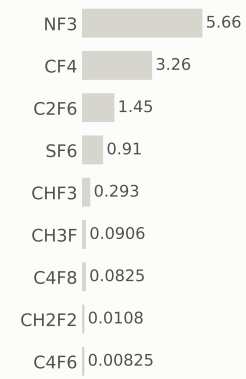

Step #7740: CVD

depo_fill · CVD

1.31	708.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

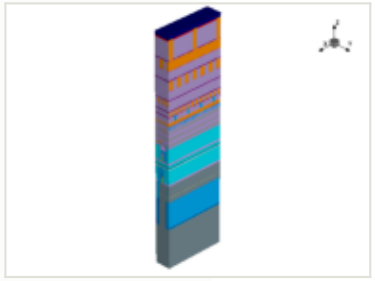

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

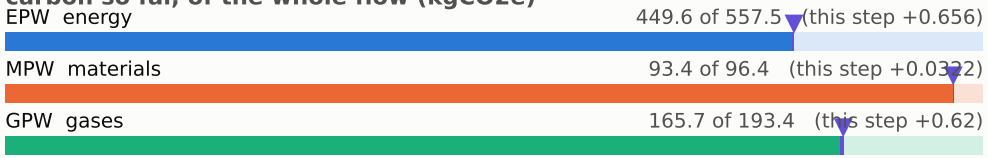

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

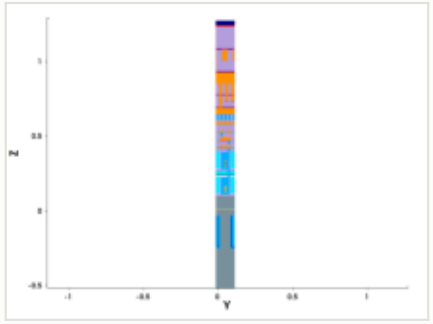

y cut at 0.049 µm

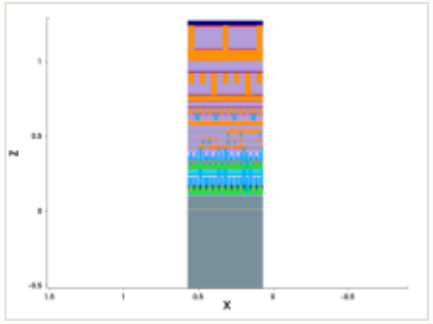

mask for this step

no mask for this step

steps by process area

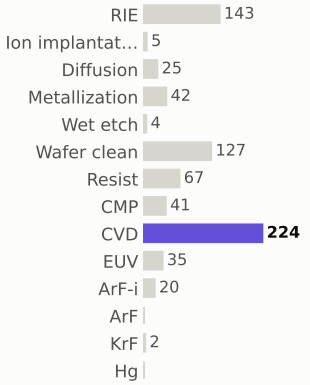

materials deposited (g)

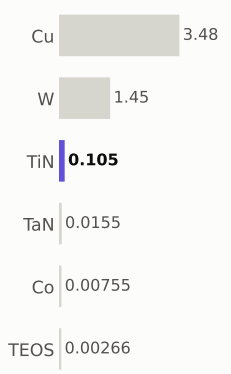

gases emitted (g)

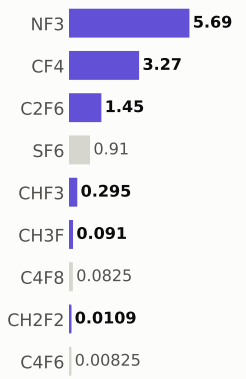

Step #7750: Wafer_clean

clean · Wafer_clean

0.169	708.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

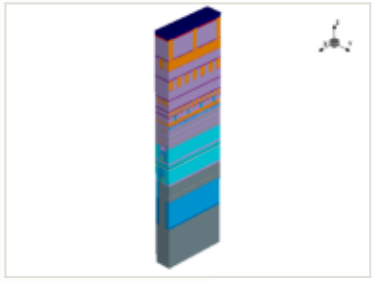

x cut at 0.385 µm

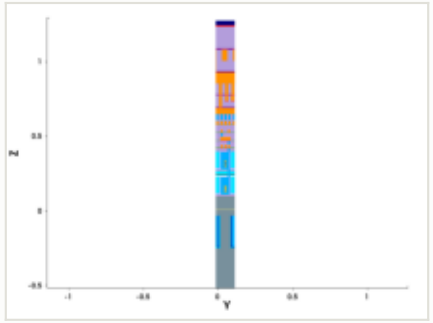

y cut at 0.049 µm

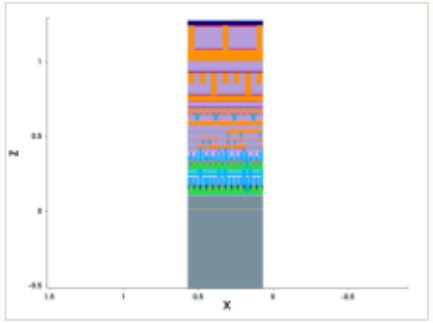

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

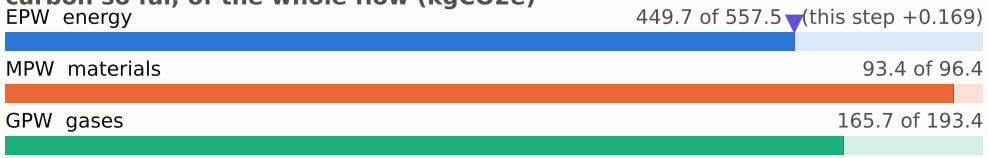

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

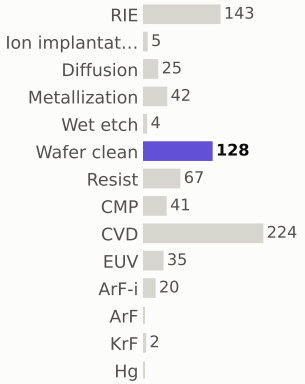

materials deposited (g)

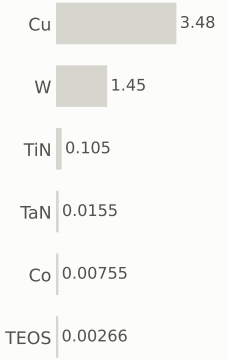

gases emitted (g)



Step #7760: CVD

depo_fill · CVD

1.31	710.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

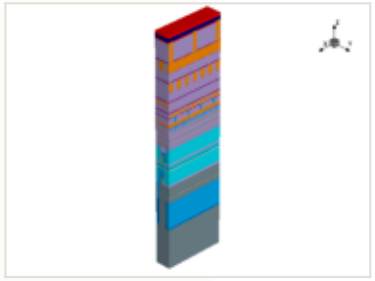

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

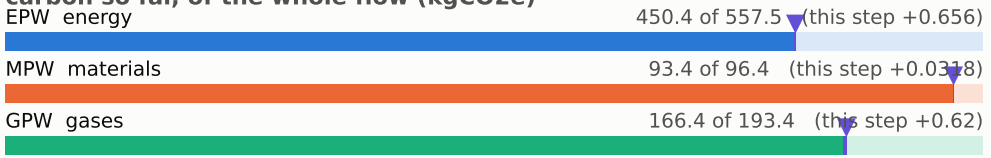

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

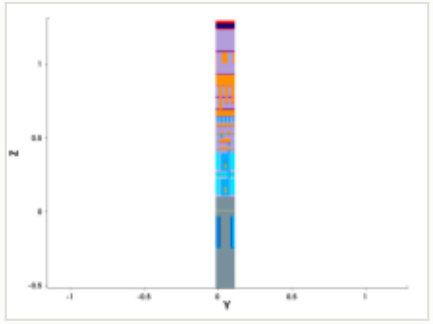

y cut at 0.049 µm

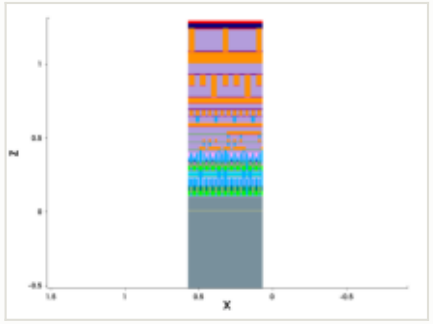

mask for this step

no mask for this step

steps by process area

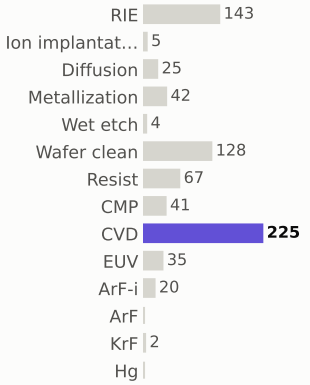

materials deposited (g)

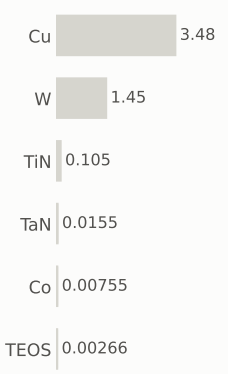

gases emitted (g)

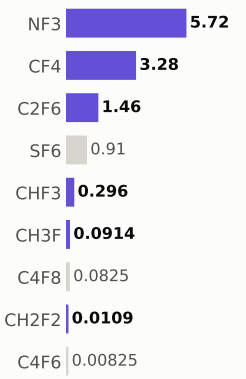

Step #7770: CVD

depo_fill · CVD

1.31	711.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

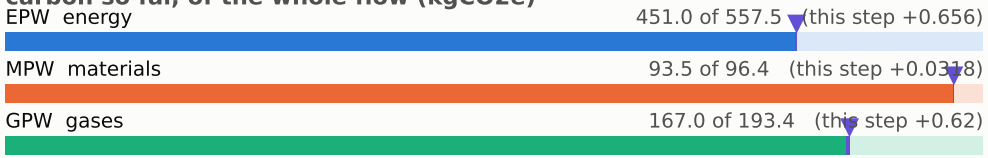

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

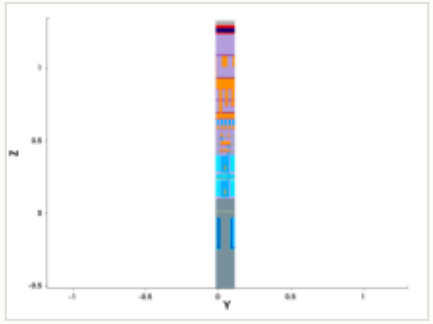

y cut at 0.049 µm

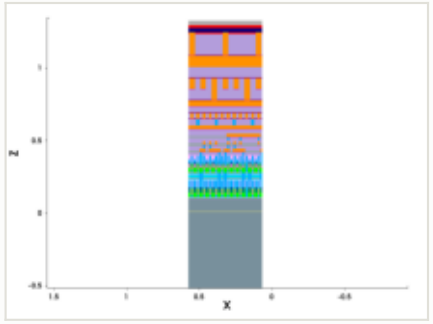

mask for this step

no mask for this step

steps by process area

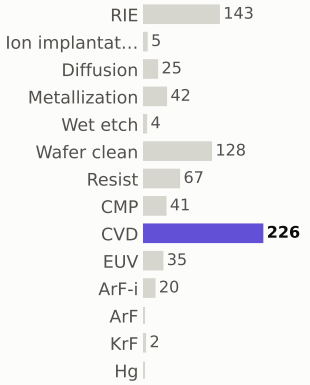

materials deposited (g)

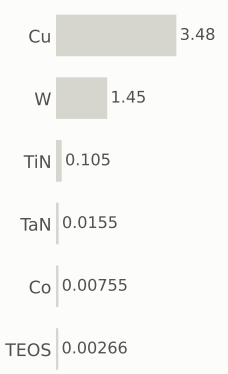

gases emitted (g)

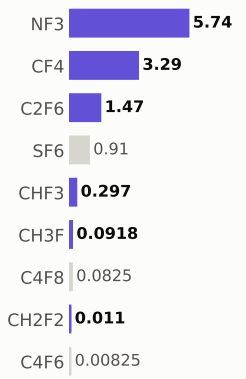

Step #7780: Resist

depo_fill · Resist

0.169	711.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

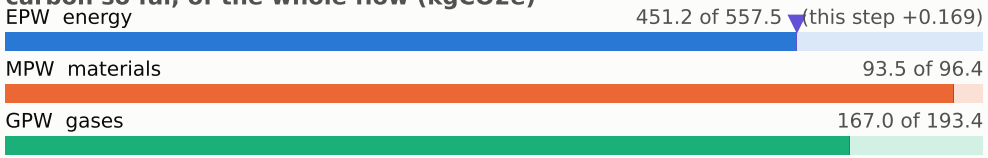

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

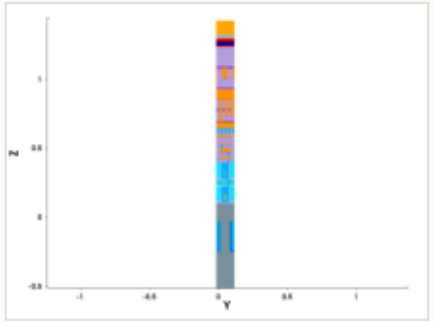

y cut at 0.049 µm

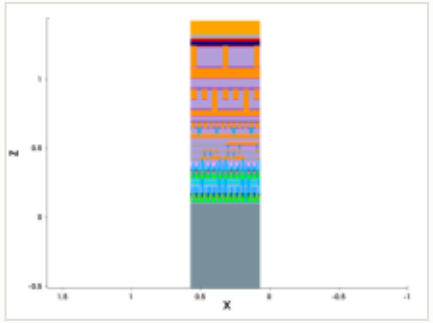

mask for this step

no mask for this step

steps by process area

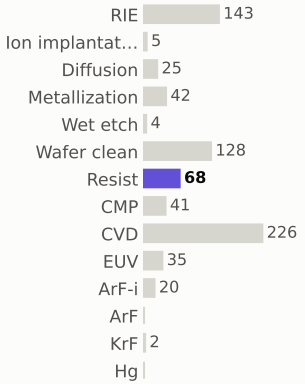

materials deposited (g)

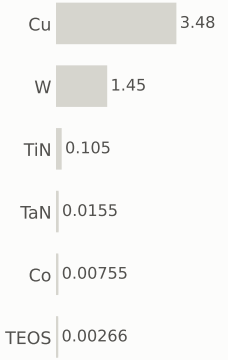

gases emitted (g)



Step #7790: CVD

depo_fill · CVD

1.31	713.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

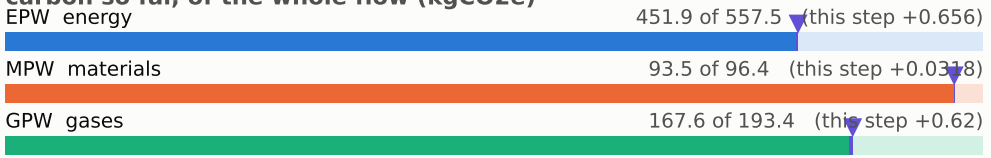

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

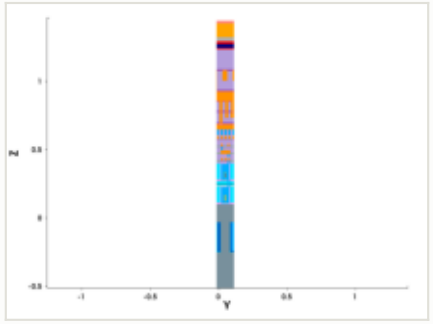

y cut at 0.049 µm

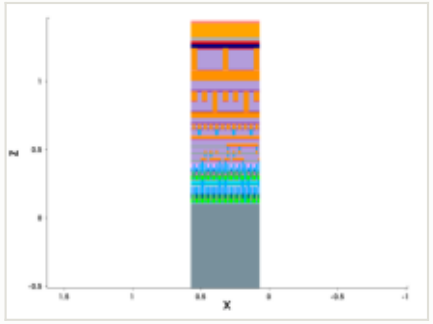

mask for this step

no mask for this step

steps by process area

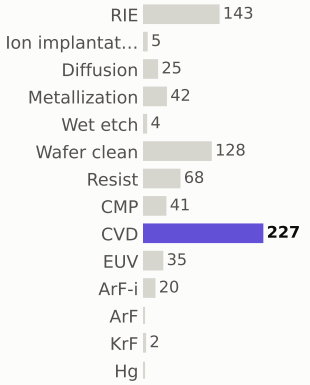

materials deposited (g)

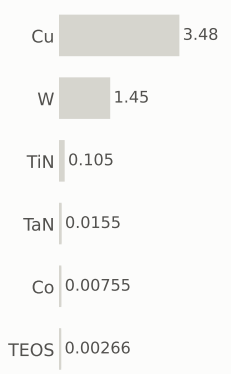

gases emitted (g)

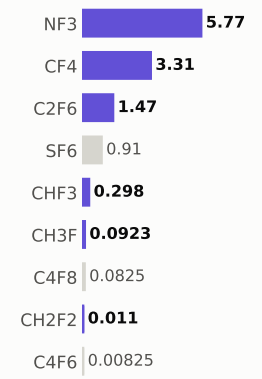

Step #7800: Wafer_clean

clean · Wafer_clean

0.169	713.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

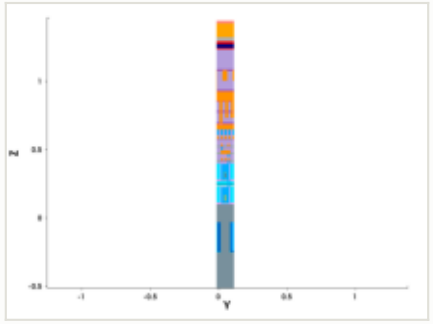

y cut at 0.049 µm

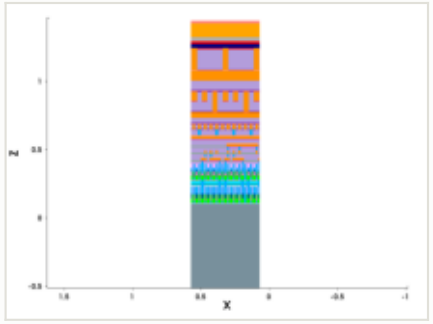

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

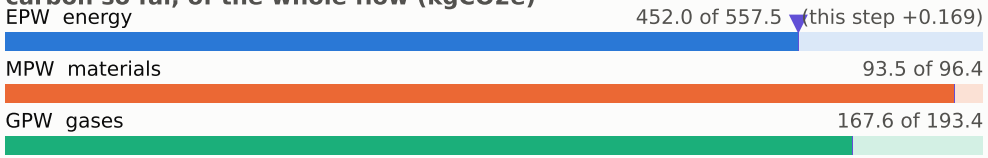

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

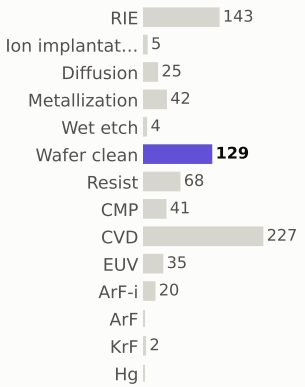

materials deposited (g)

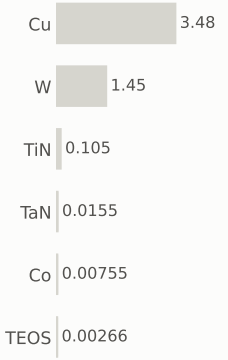

gases emitted (g)

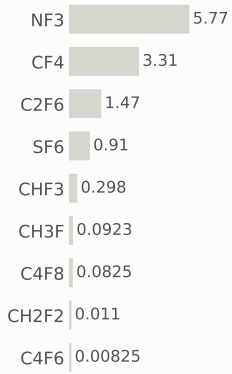

Step #7810: ArF-i

litho_patterning · ArF-i

0.217	713.3	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

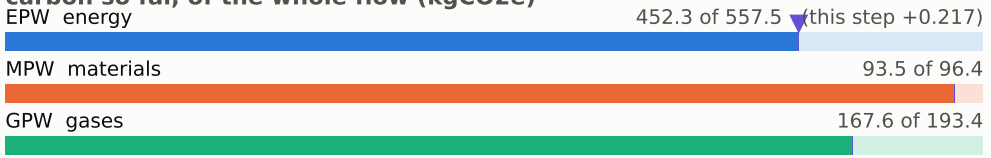

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

no cut image (make spx)

y cut at 0.049 µm

no cut image (make spx)

mask: layer 10601:0, positive (GDSII)

steps by process area

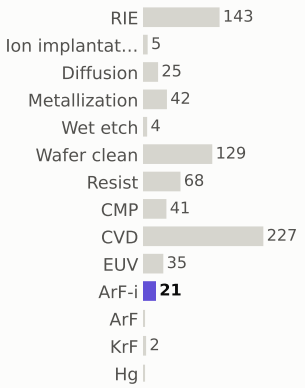

materials deposited (g)

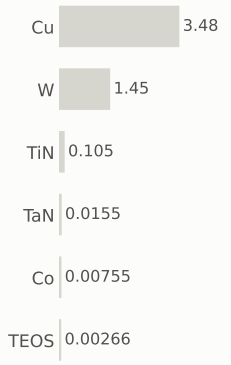

gases emitted (g)



Step #7820: Ion_implantation

treatment · Ion_implantation

0.801	714.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

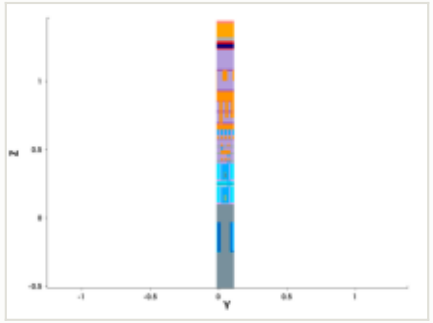

y cut at 0.049 µm

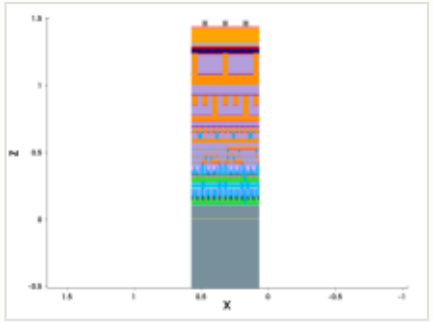

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

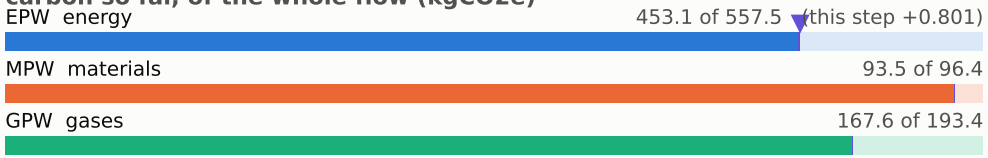

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

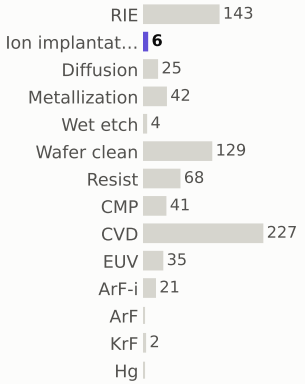

materials deposited (g)

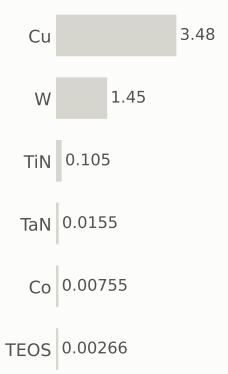

gases emitted (g)

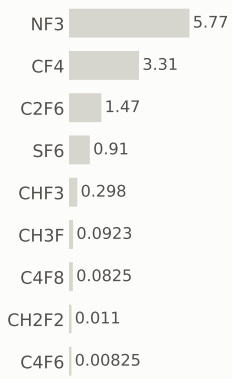

Step #7830: RIE

etch_anisotropic · RIE

1.04	715.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

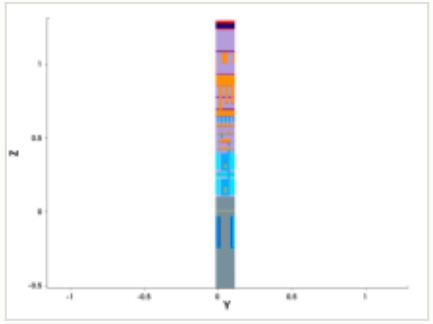

y cut at 0.049 µm

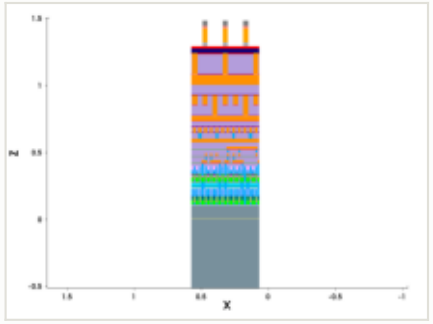

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

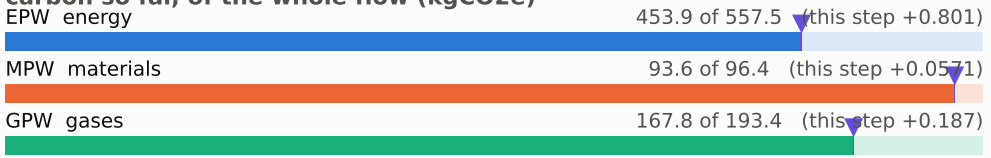

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

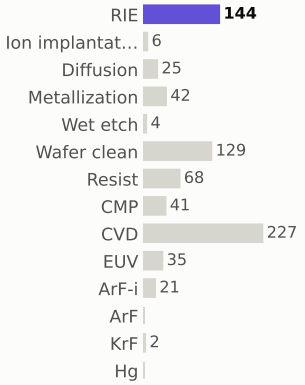

materials deposited (g)

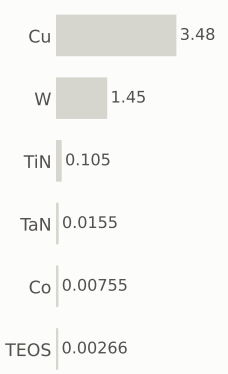

gases emitted (g)

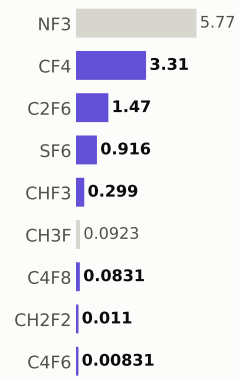

Step #7840: Wafer_clean

etch_strip · Wafer_clean

0.169	715.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

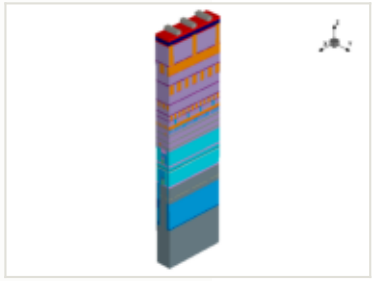

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

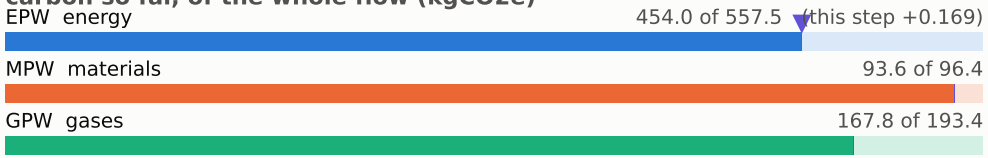

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

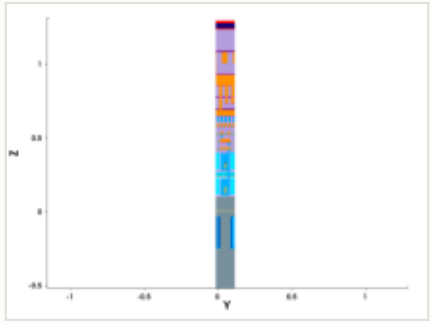

y cut at 0.049 µm

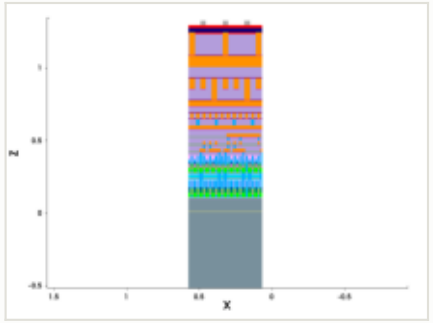

mask for this step

no mask for this step

steps by process area

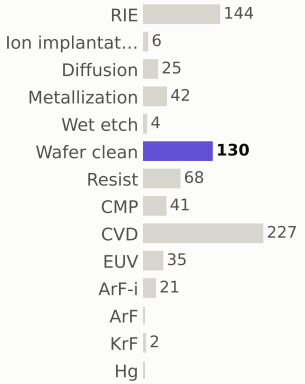

materials deposited (g)

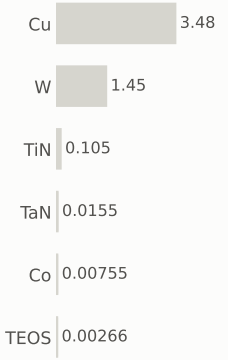

gases emitted (g)

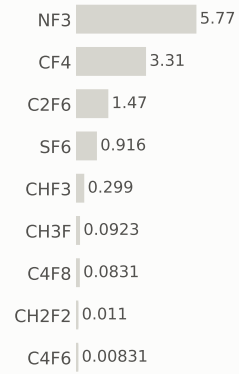

Step #7850: CVD

depo_isotropic · CVD

1.31	716.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

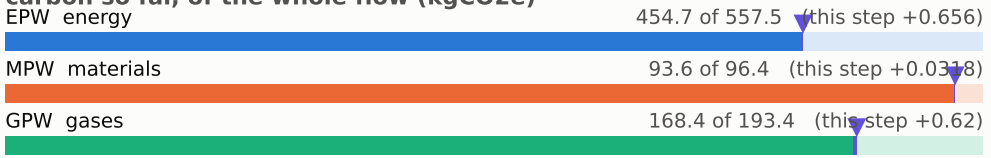

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

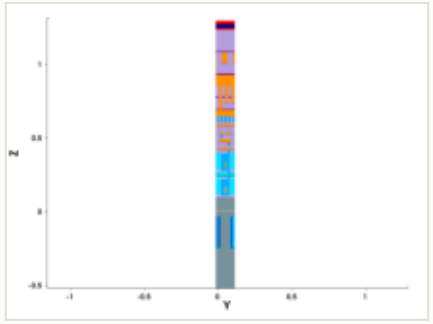

y cut at 0.049 µm

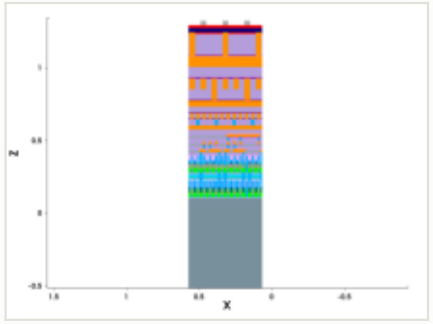

mask for this step

no mask for this step

steps by process area

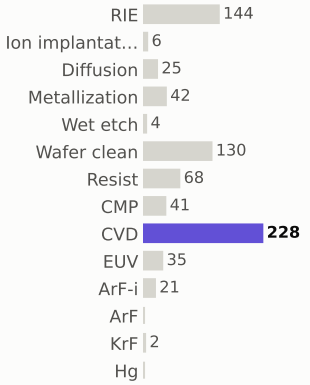

materials deposited (g)

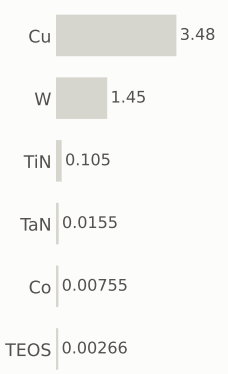

gases emitted (g)

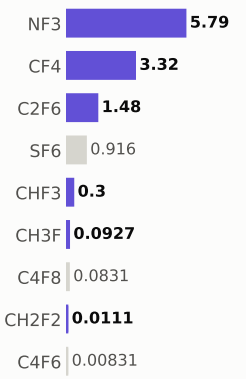

Step #7860: RIE

etch_anisotropic · RIE

1.04	717.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

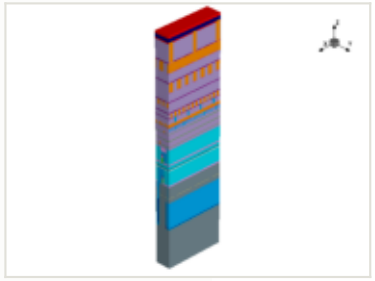

x cut at 0.385 µm

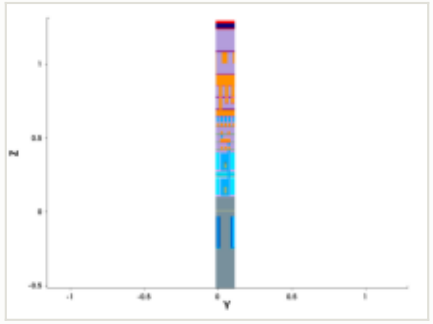

y cut at 0.049 µm

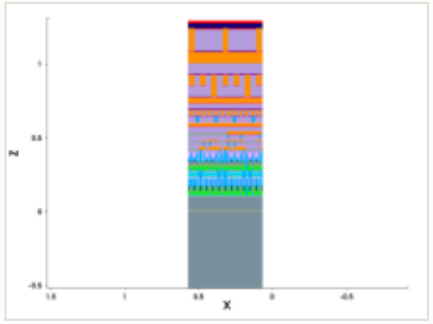

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

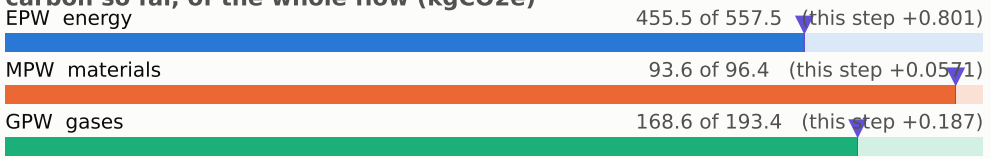

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

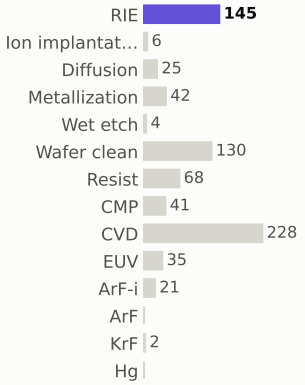

materials deposited (g)

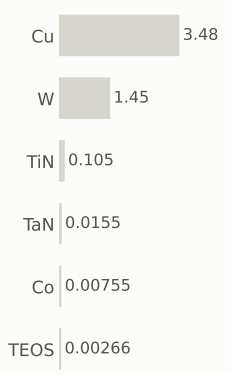

gases emitted (g)

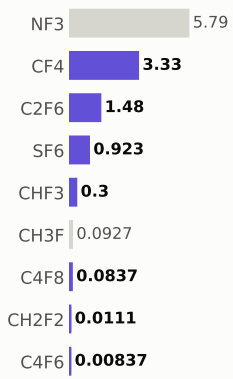

Step #7870: Wafer_clean

etch_strip · Wafer_clean

0.169	717.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

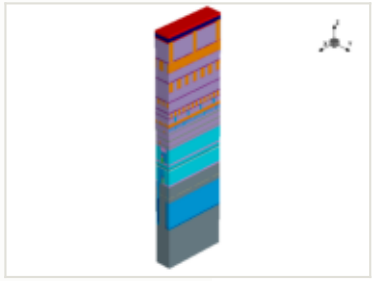

x cut at 0.385 µm

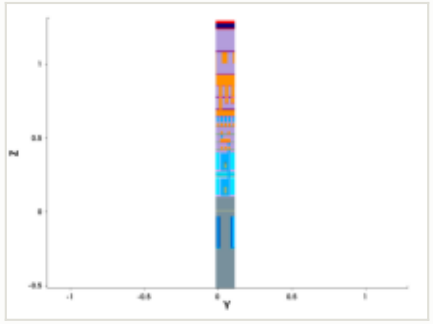

y cut at 0.049 µm

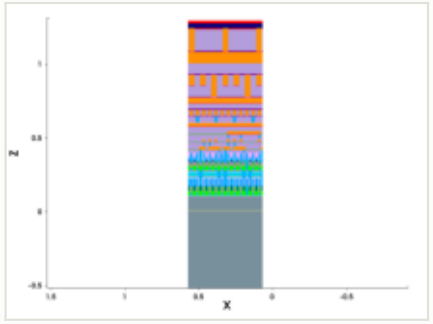

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

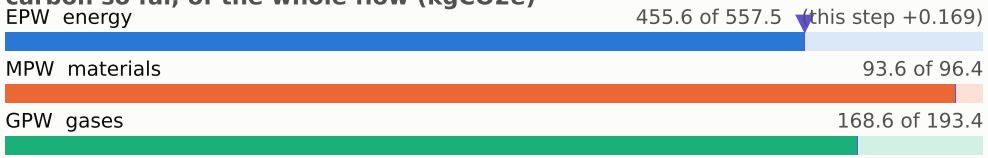

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

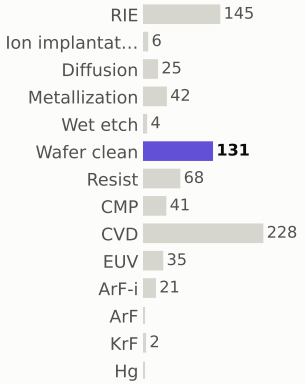

materials deposited (g)

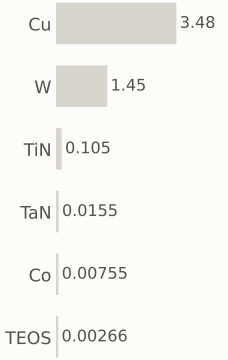

gases emitted (g)



Step #7880: Resist

depo_fill · Resist

0.169	718.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

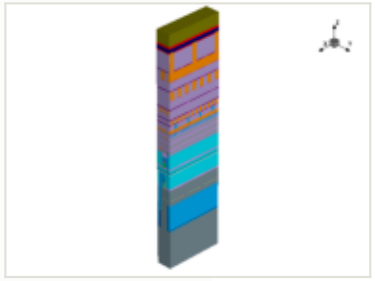

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

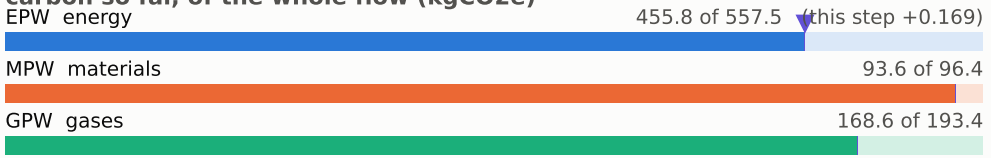

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

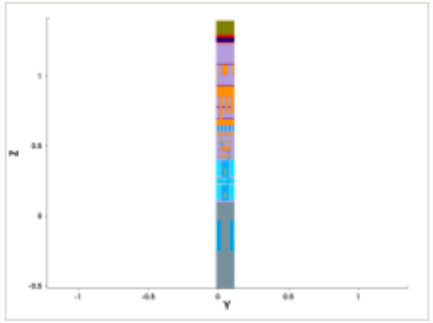

y cut at 0.049 µm

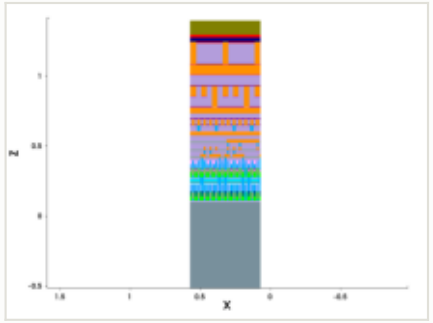

mask for this step

no mask for this step

steps by process area

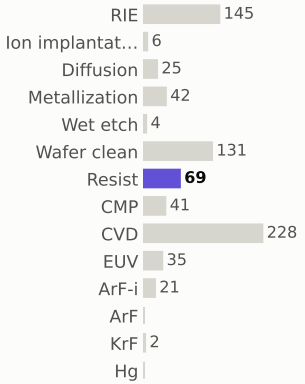

materials deposited (g)

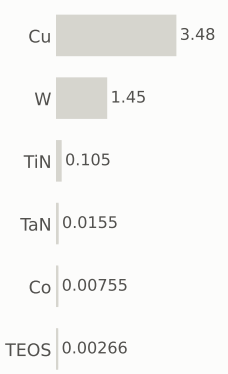

gases emitted (g)

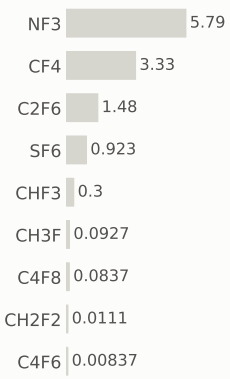

Step #7890: Wafer_clean

clean · Wafer_clean

0.169	718.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

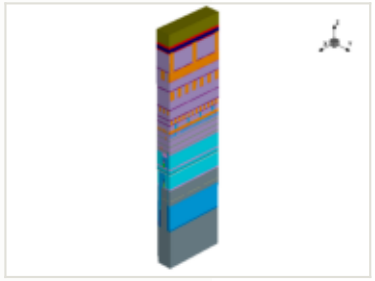

x cut at 0.385 µm

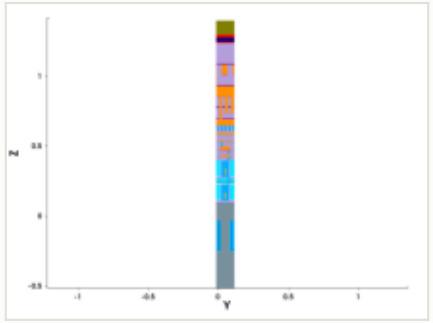

y cut at 0.049 µm

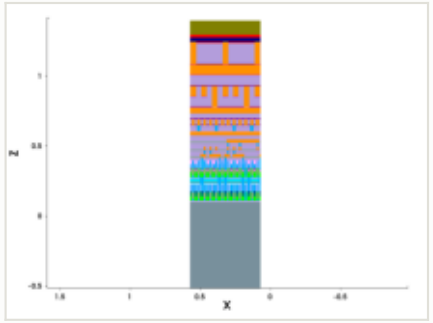

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

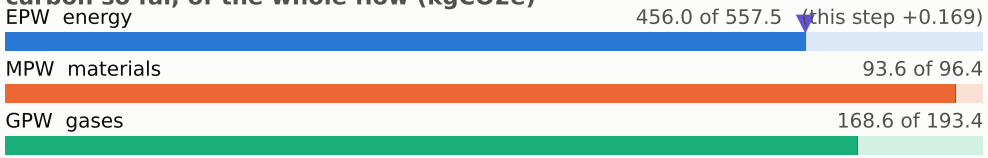

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

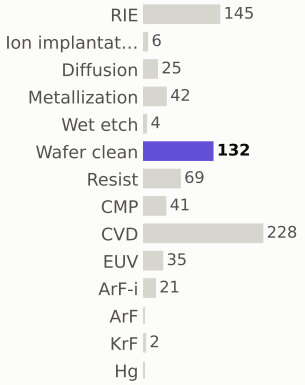

materials deposited (g)



gases emitted (g)

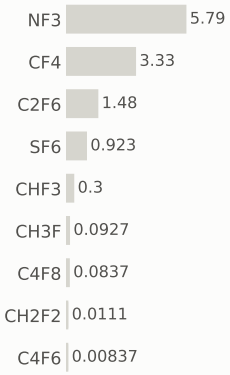

Step #7900: ArF-i

litho_patterning · ArF-i

0.217	718.4	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

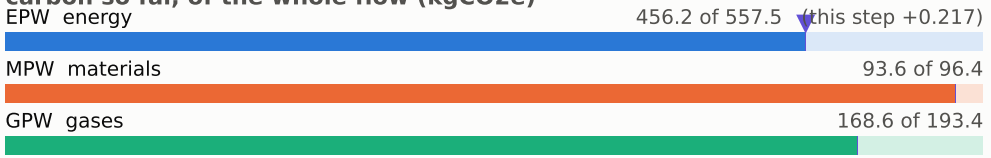

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

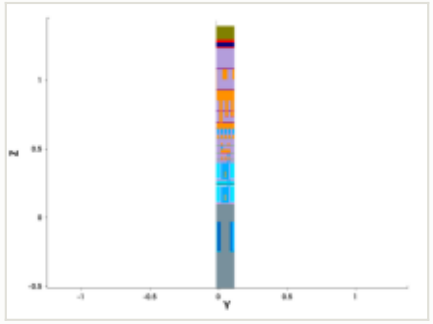

y cut at 0.049 µm

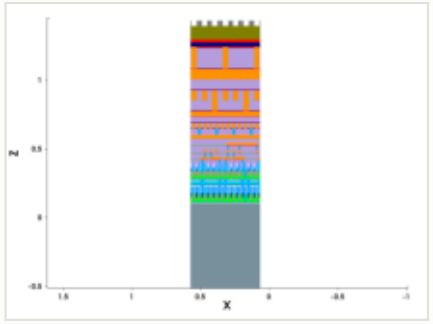

mask: layer 60:0 (GDSII)

steps by process area

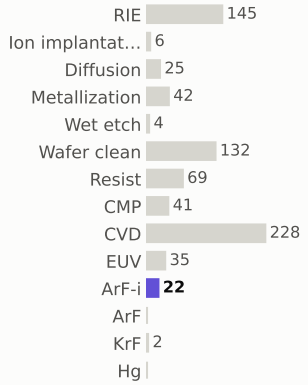

materials deposited (g)

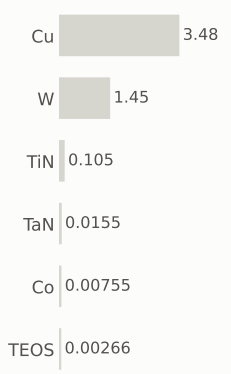

gases emitted (g)

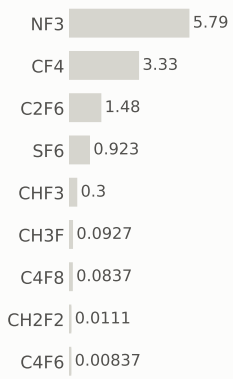

Step #7910: RIE

etch_anisotropic · RIE

1.04	719.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

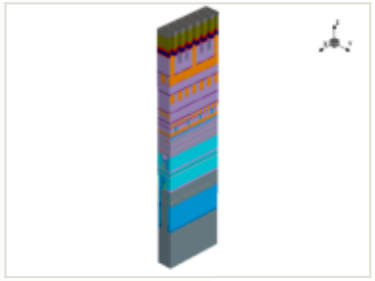

x cut at 0.385 µm

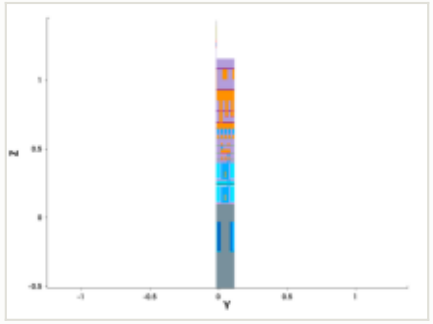

y cut at 0.049 µm

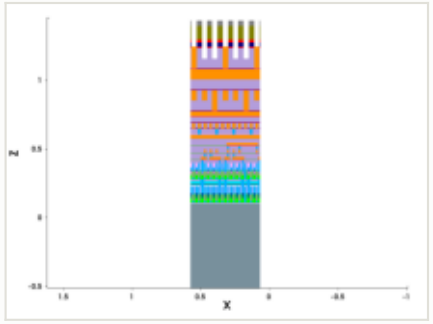

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

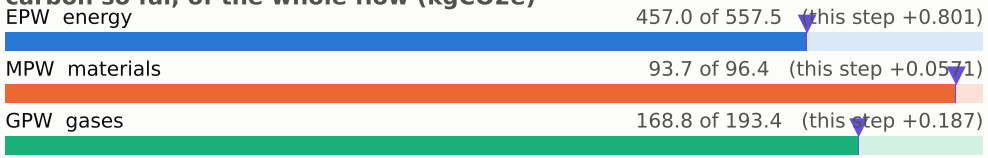

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

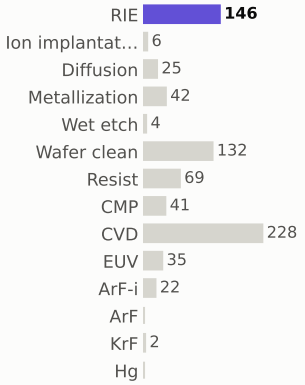

materials deposited (g)

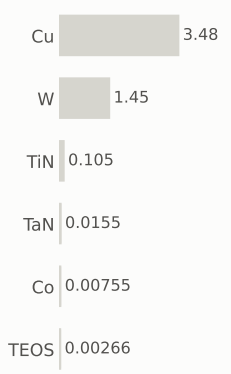

gases emitted (g)

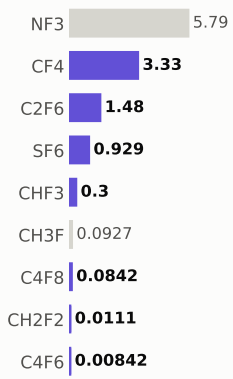

Step #7920: Wafer_clean

etch_strip · Wafer_clean

0.169	719.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

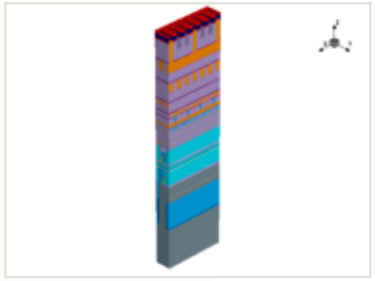

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

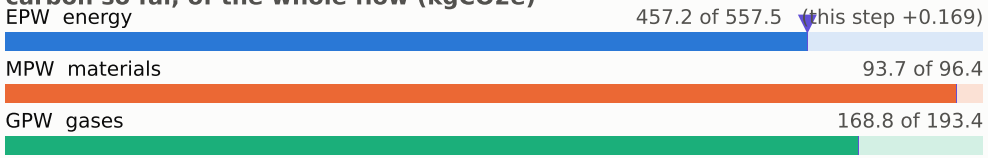

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

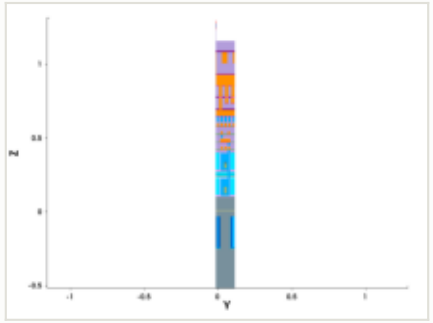

y cut at 0.049 µm

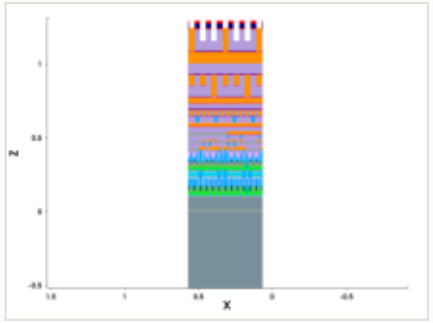

mask for this step

no mask for this step

steps by process area

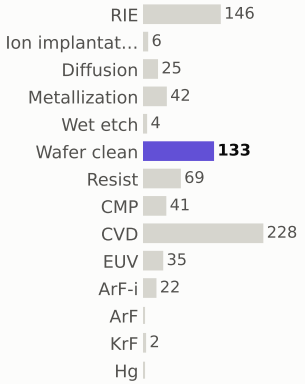

materials deposited (g)

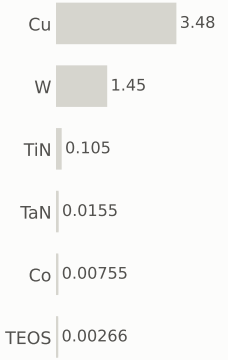

gases emitted (g)



Step #7930: Metallization

depo_ellipsoidal · Metallization

1.2	720.9	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

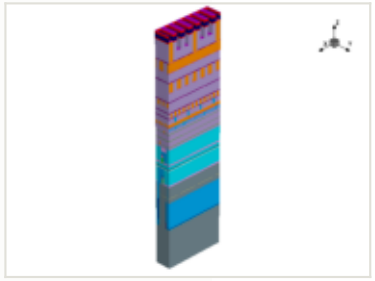

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

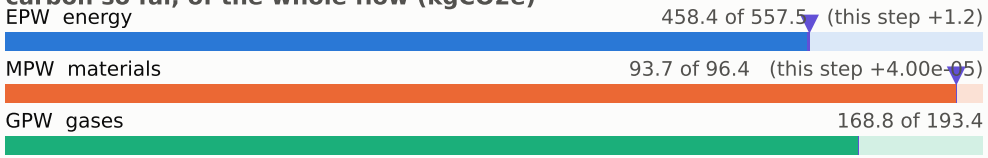

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

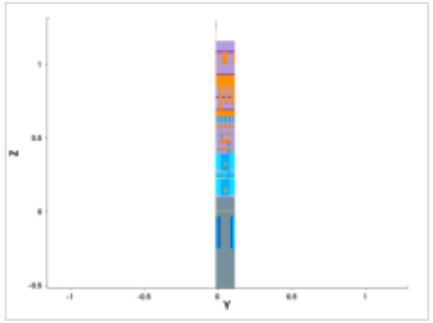

y cut at 0.049 µm

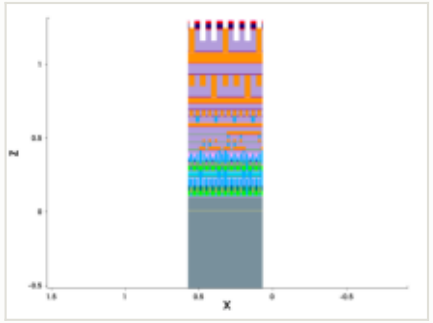

mask for this step

no mask for this step

steps by process area

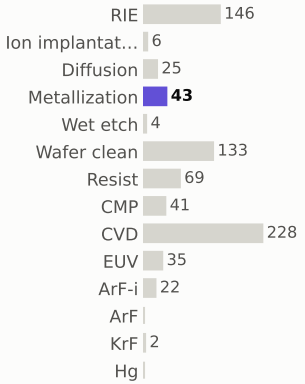

materials deposited (g)

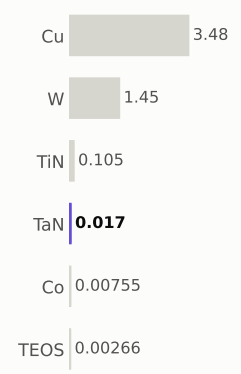

gases emitted (g)

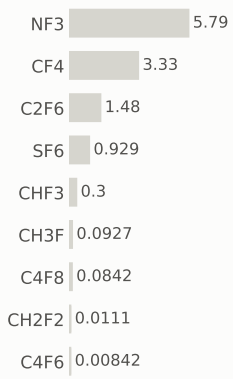

Step #7940: Metallization

depo_fill · Metallization

1.21	722.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

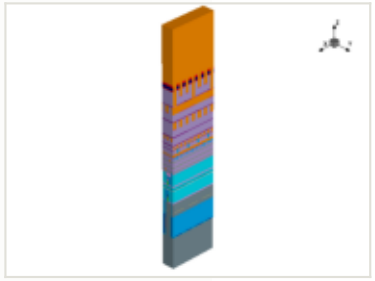

x cut at 0.385 µm

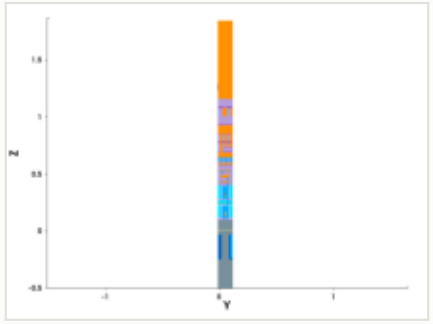

y cut at 0.049 µm

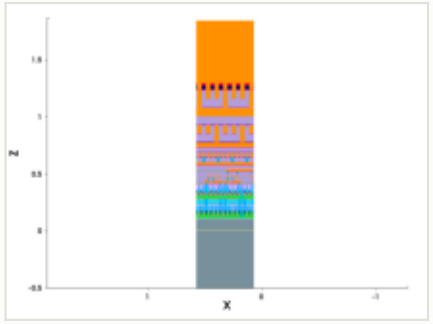

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Cu	EPW tool	0.86 kgCO2e
thickness	0.55 µm	EPW overhead	0.344 kgCO2e
material GWP	6.09011 gCO2e/g	MPW	0.00212 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

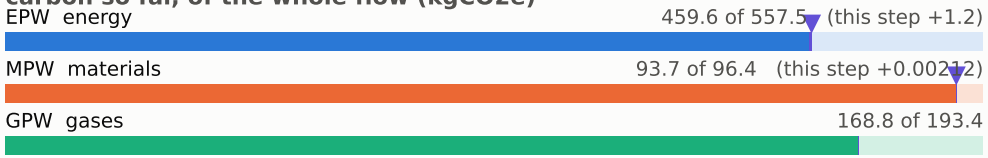

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

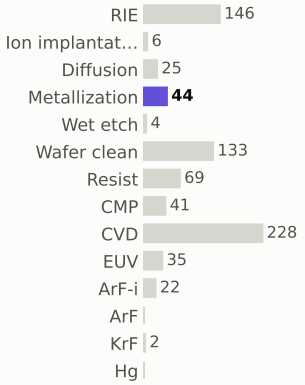

materials deposited (g)

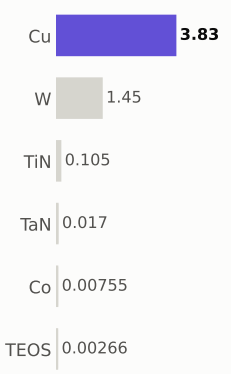

gases emitted (g)

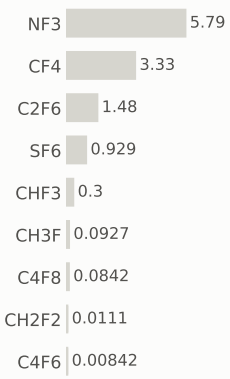

Step #7950: Diffusion

treatment · Diffusion

0.801	722.9	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

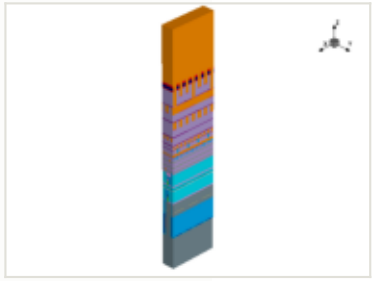

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

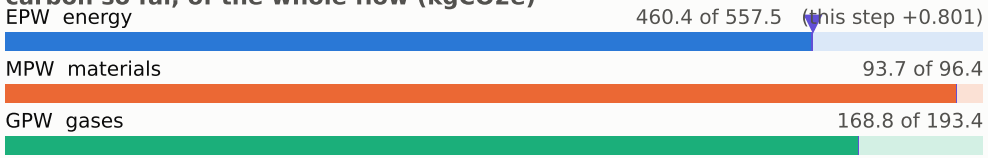

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

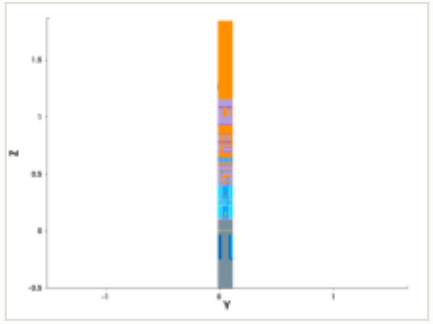

y cut at 0.049 µm

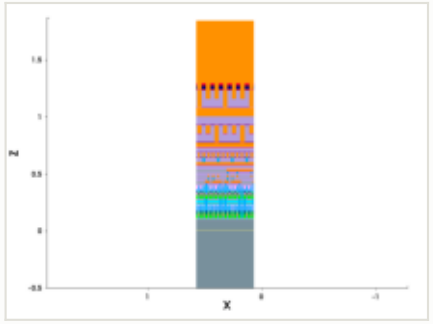

mask for this step

no mask for this step

steps by process area

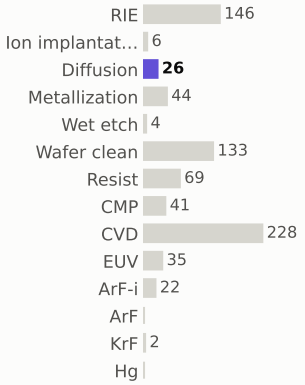

materials deposited (g)

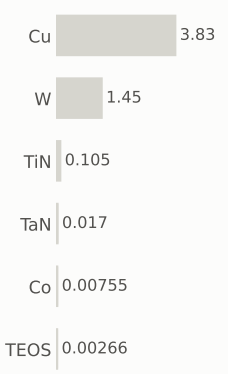

gases emitted (g)

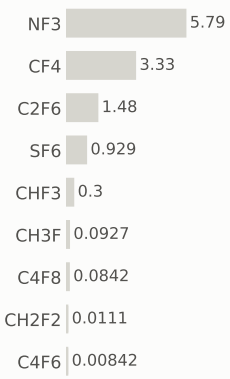

Step #7960: CMP

etch_cmp · CMP

0.169	723.0	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

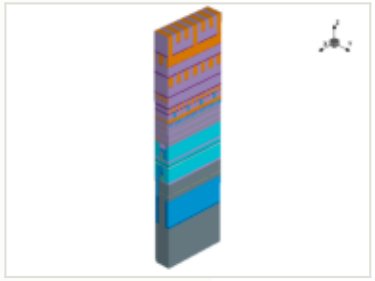

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

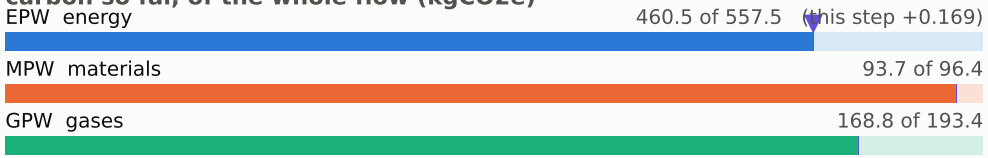

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

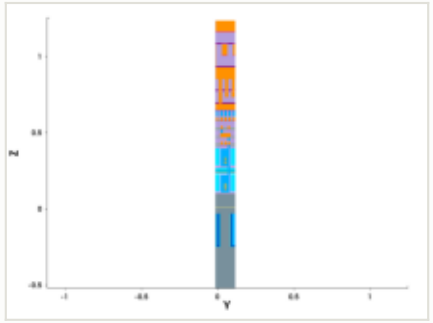

y cut at 0.049 µm

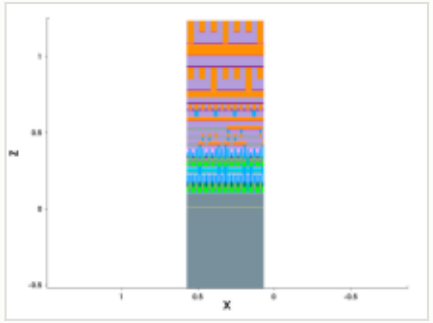

mask for this step

no mask for this step

steps by process area

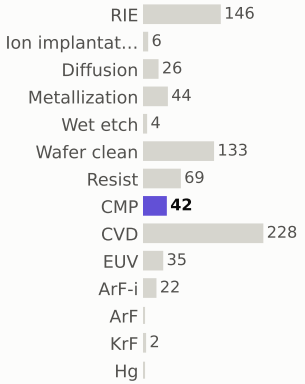

materials deposited (g)

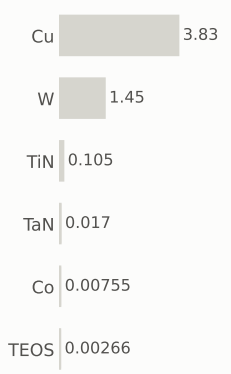

gases emitted (g)

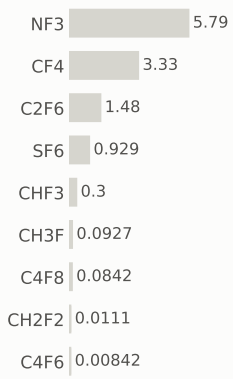

Step #7970: Metallization

depo_isotropic · Metallization

1.2	724.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

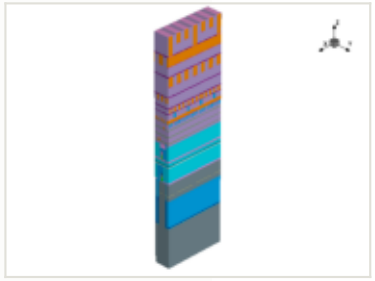

x cut at 0.385 µm

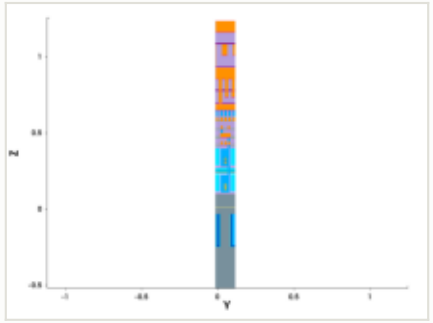

y cut at 0.049 µm

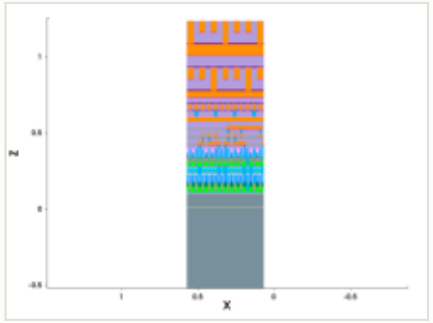

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Co	EPW tool	0.86 kgCO2e
thickness	0.0015 µm	EPW overhead	0.344 kgCO2e
material GWP	44.5 gCO2e/g	MPW	4.20e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

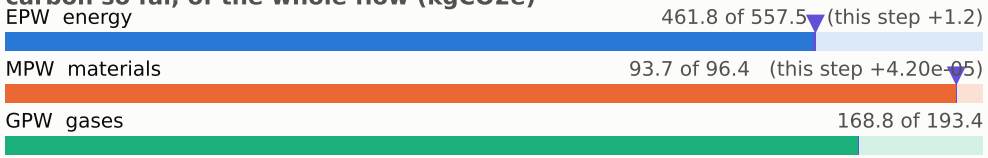

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

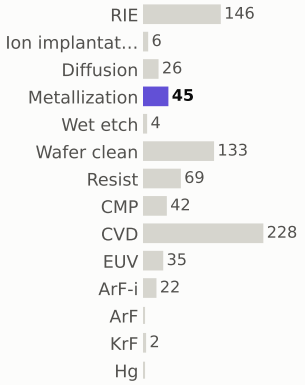

materials deposited (g)

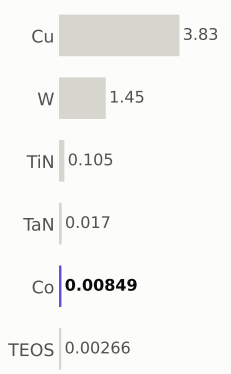

gases emitted (g)

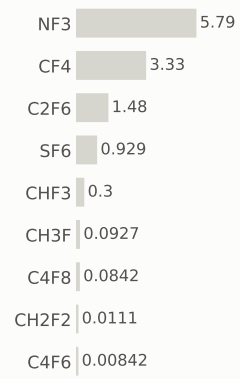

Step #7990: CVD

depo_fill · CVD

1.31	725.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

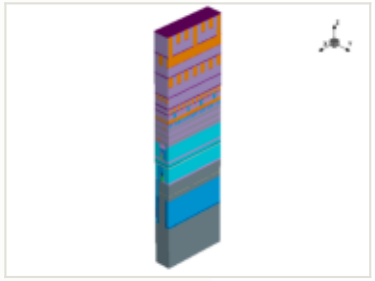

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

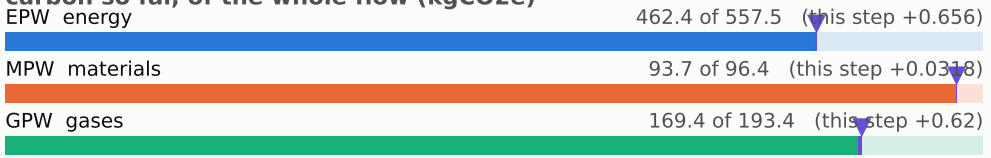

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

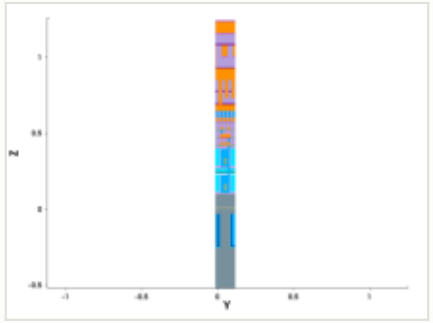

y cut at 0.049 µm

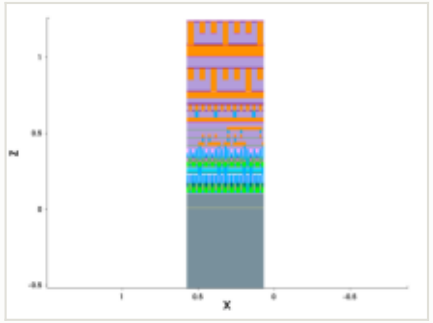

mask for this step

no mask for this step

steps by process area

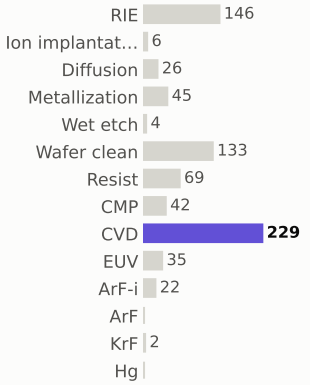

materials deposited (g)

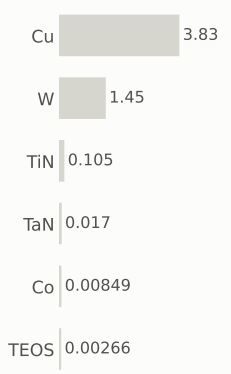

gases emitted (g)

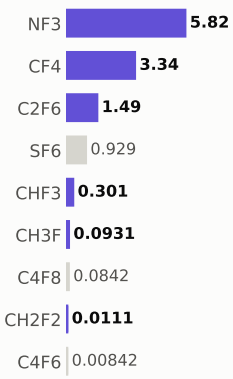

Step #8000: CVD

depo_fill · CVD

1.31	726.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.146 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

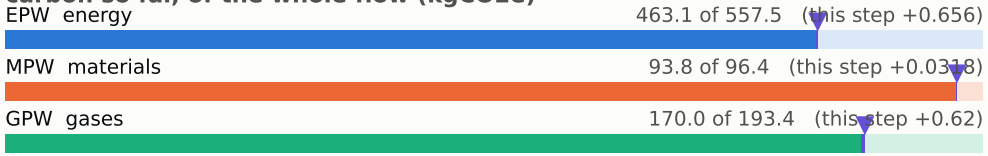

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

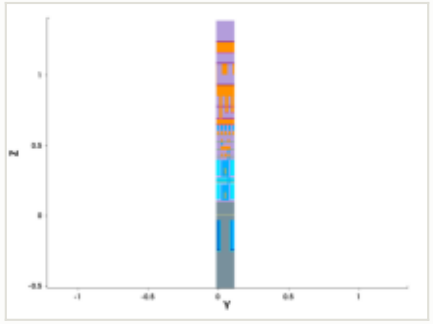

y cut at 0.049 µm

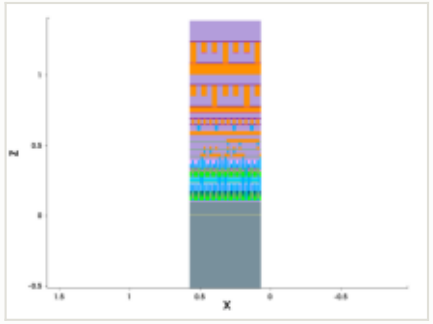

mask for this step

no mask for this step

steps by process area

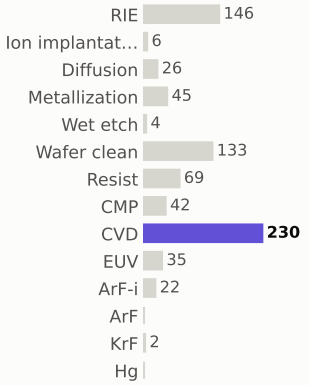

materials deposited (g)

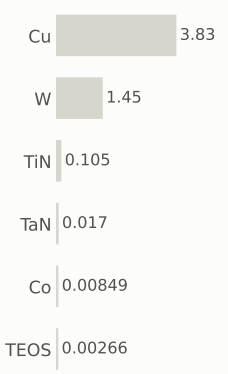

gases emitted (g)

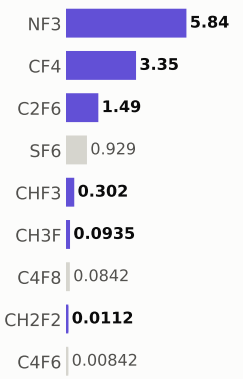

Step #8010: Diffusion

treatment · Diffusion

0.801	727.7	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

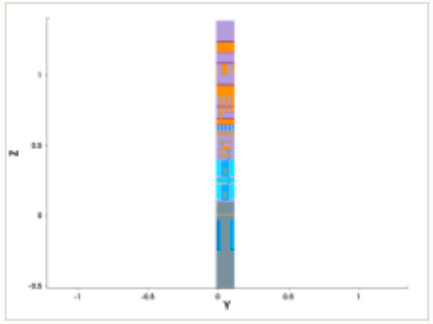

y cut at 0.049 µm

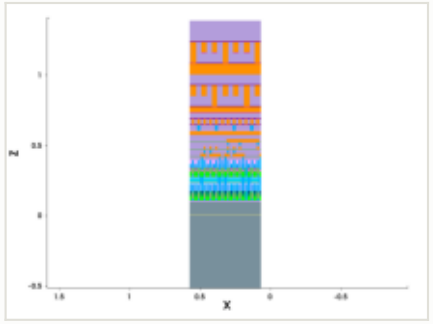

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

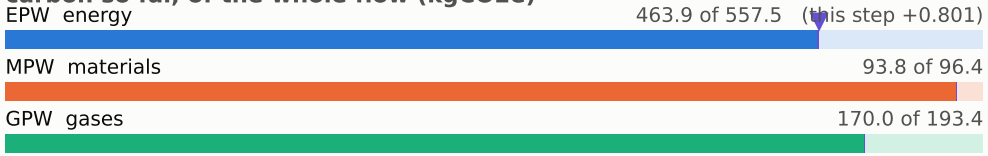

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

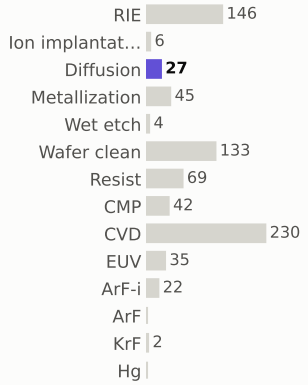

materials deposited (g)

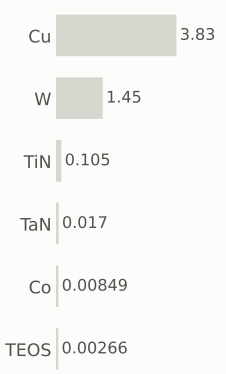

gases emitted (g)

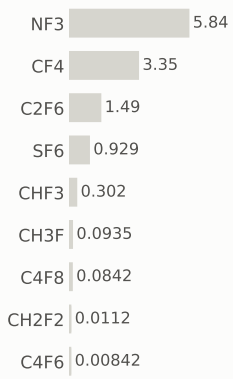

Step #8020: Wafer_clean

clean · Wafer_clean

0.169	727.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

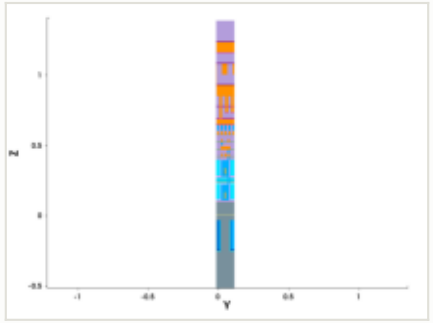

y cut at 0.049 µm

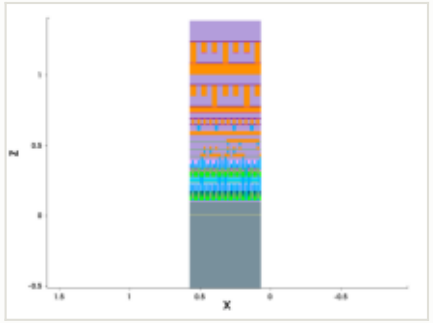

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

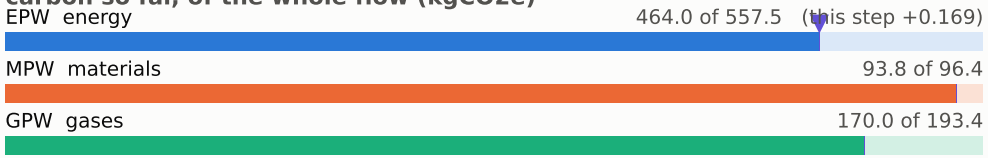

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

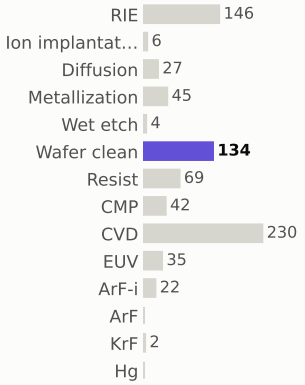

materials deposited (g)

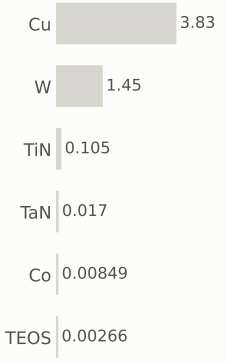

gases emitted (g)

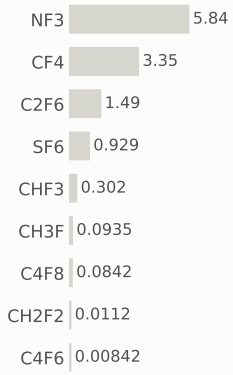

Step #8030: CVD

depo_fill · CVD

1.31	729.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

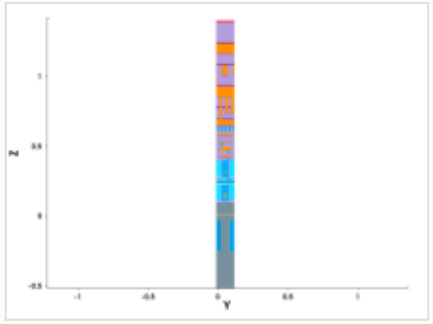

y cut at 0.049 µm

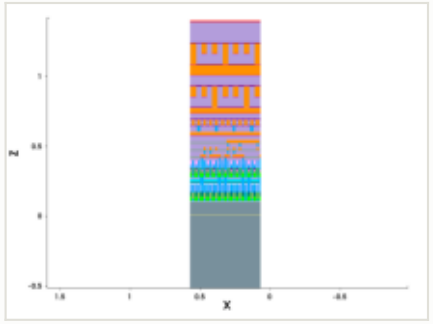

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

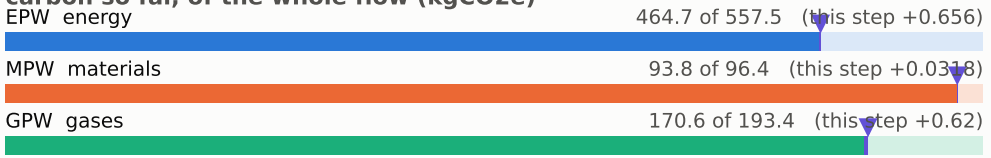

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

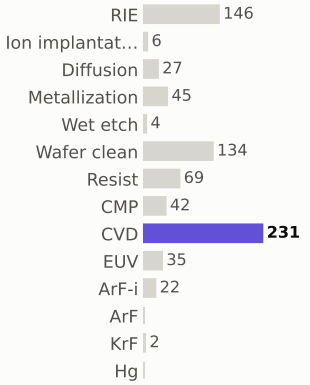

materials deposited (g)

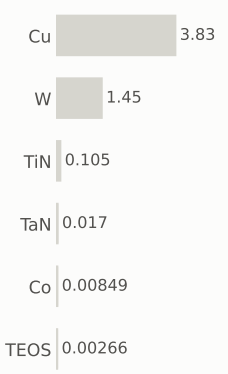

gases emitted (g)

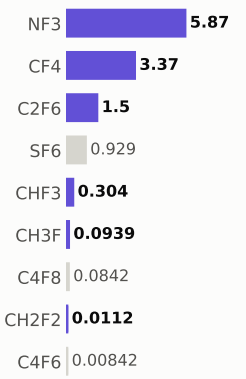

Step #8040: Resist

depo_fill · Resist

0.169	729.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

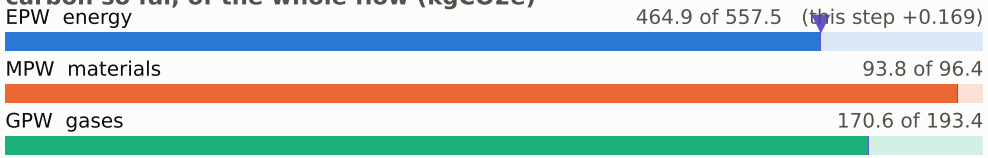

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

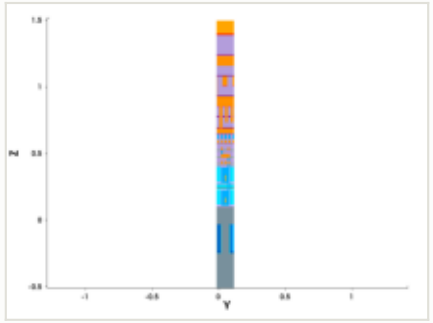

y cut at 0.049 µm

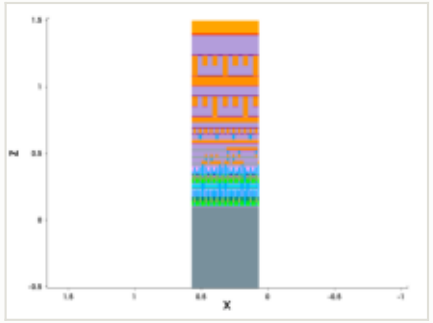

mask for this step

no mask for this step

steps by process area

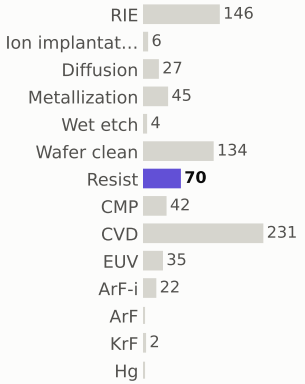

materials deposited (g)

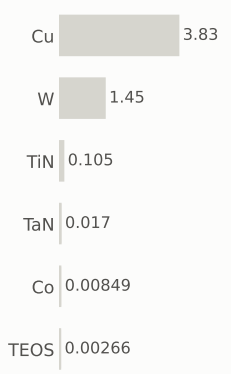

gases emitted (g)

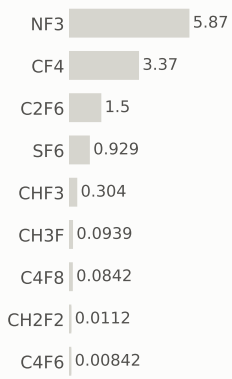

Step #8050: CVD

depo_fill · CVD

1.31	730.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

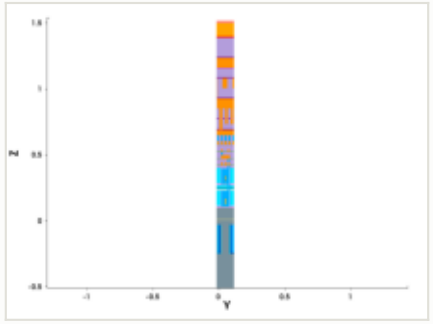

y cut at 0.049 µm

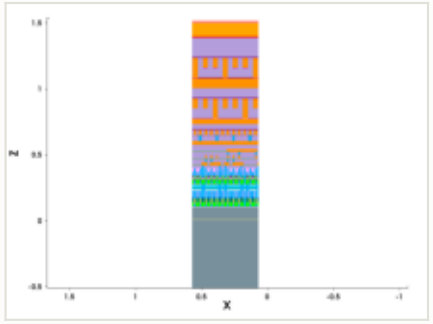

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

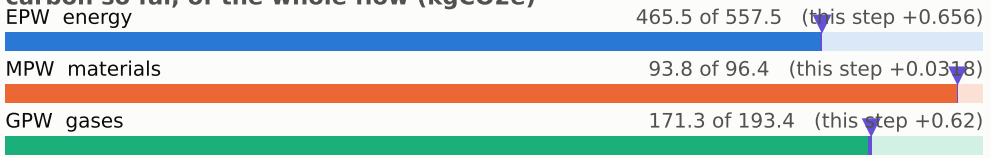

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

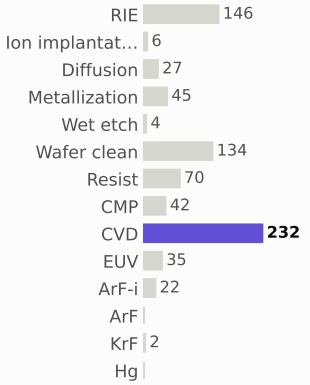

materials deposited (g)

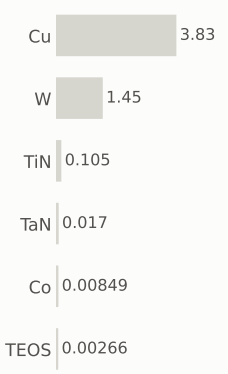

gases emitted (g)

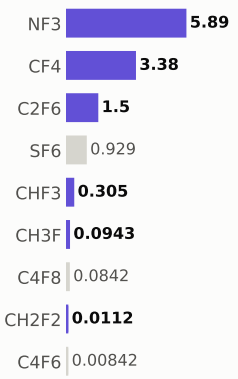

Step #8060: Wafer_clean

clean · Wafer_clean

0.169	730.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

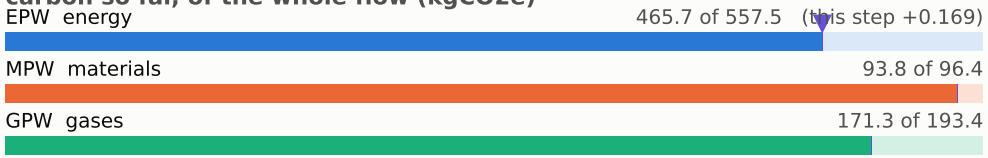

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

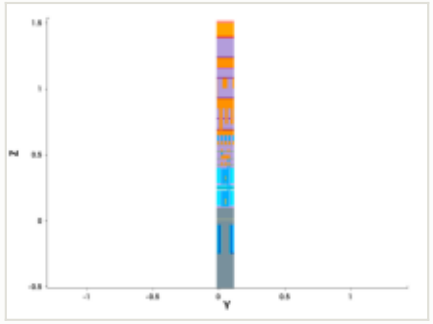

y cut at 0.049 µm

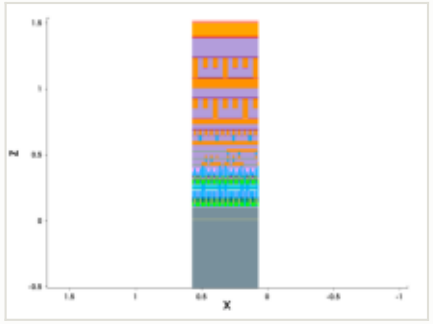

mask for this step

no mask for this step

steps by process area

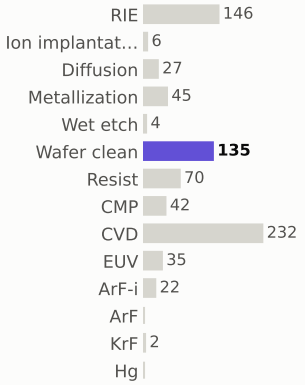

materials deposited (g)

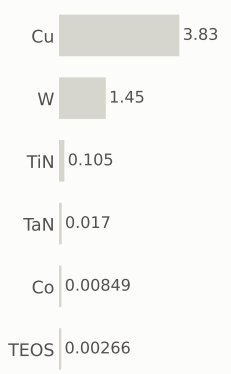

gases emitted (g)

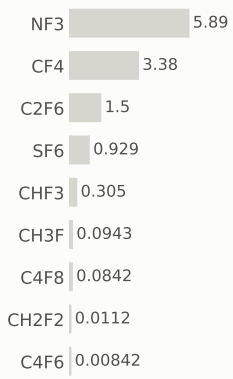

Step #8070: ArF-i

litho_patterning · ArF-i

0.217	731.0	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

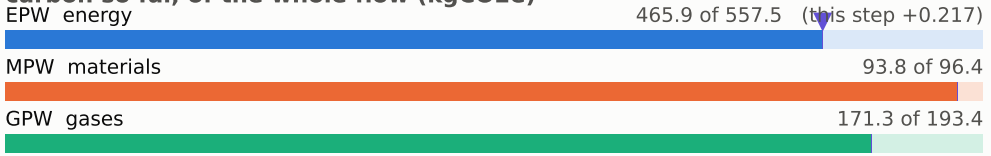

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

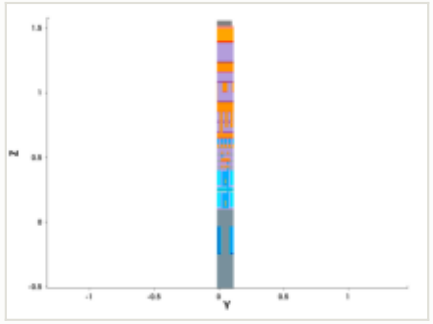

y cut at 0.049 µm

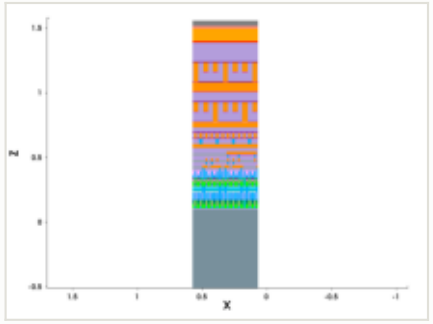

mask: layer 10621:0 (GDSII)

steps by process area

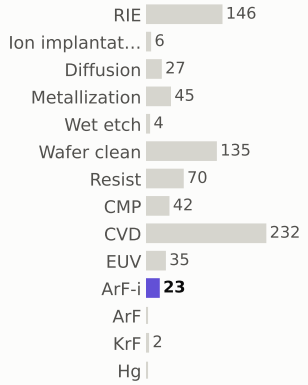

materials deposited (g)

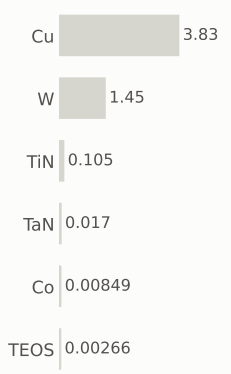

gases emitted (g)

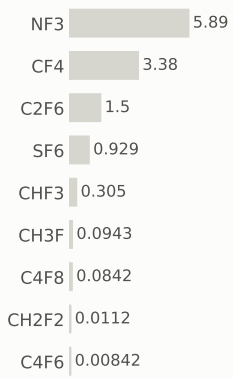

Step #8080: RIE

etch_anisotropic · RIE

1.04	732.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

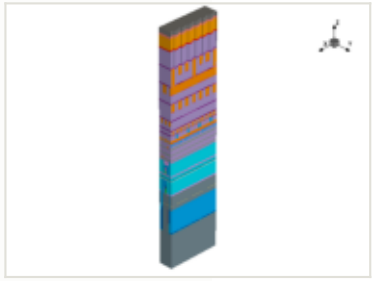

x cut at 0.385 µm

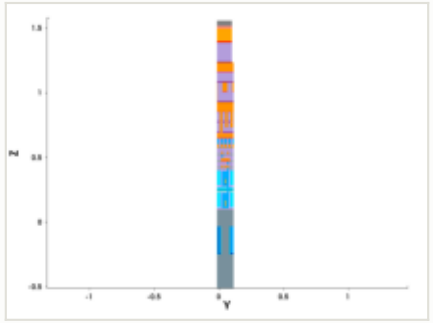

y cut at 0.049 µm

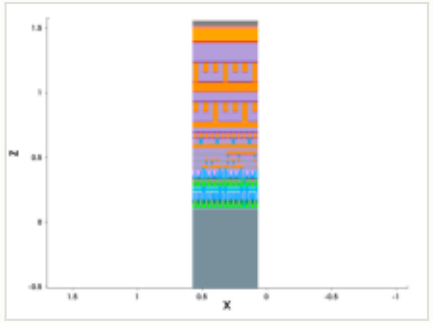

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

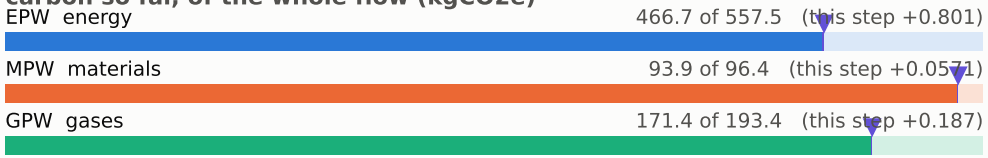

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

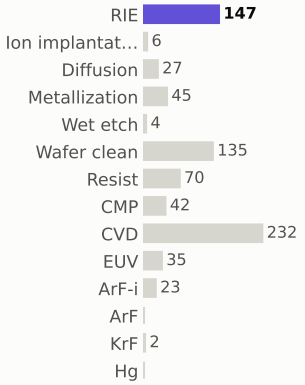

materials deposited (g)

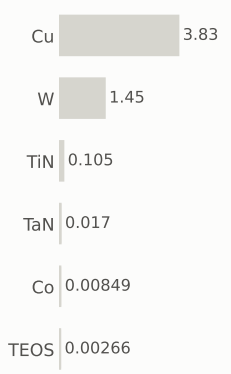

gases emitted (g)

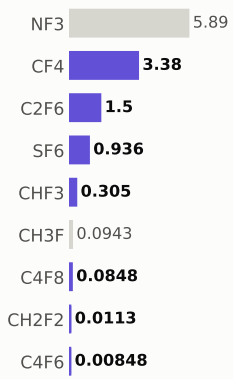

Step #8090: Wafer_clean

etch_strip · Wafer_clean

0.169	732.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

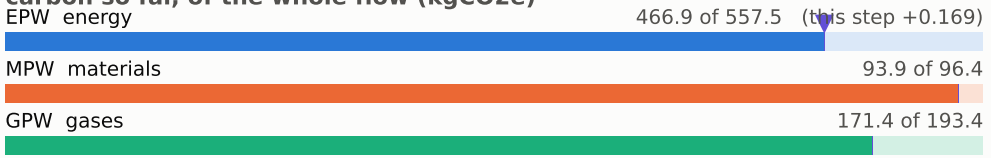

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

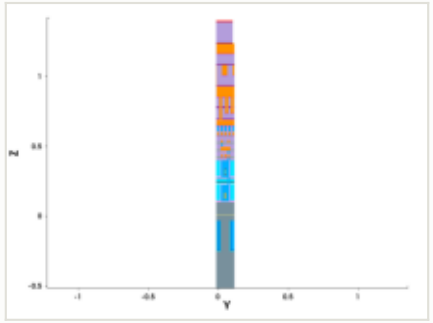

y cut at 0.049 µm

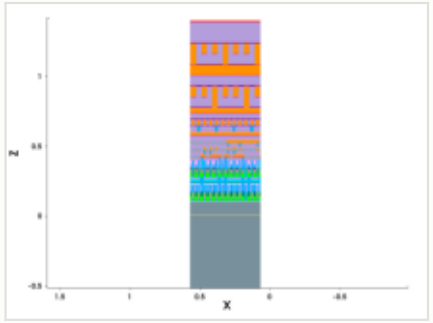

mask for this step

no mask for this step

steps by process area

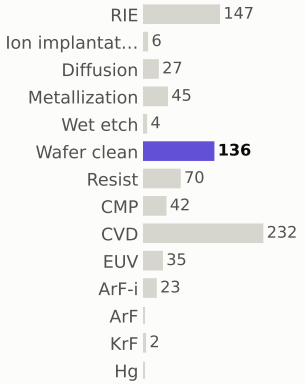

materials deposited (g)

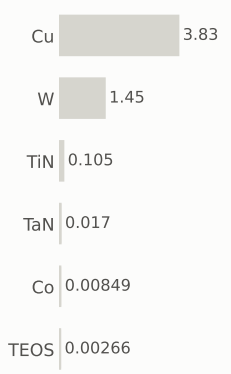

gases emitted (g)

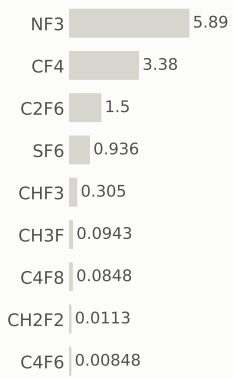

Step #8100: Resist

depo_fill · Resist

0.169	732.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

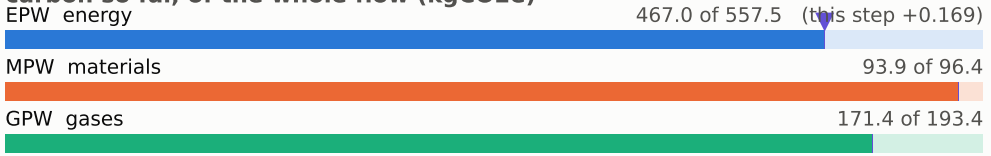

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

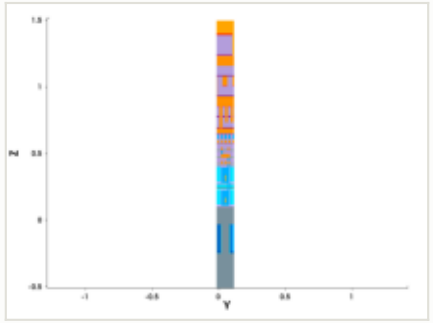

y cut at 0.049 µm

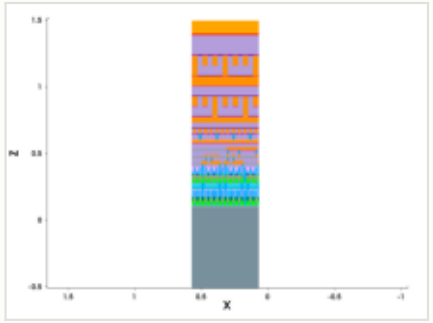

mask for this step

no mask for this step

steps by process area

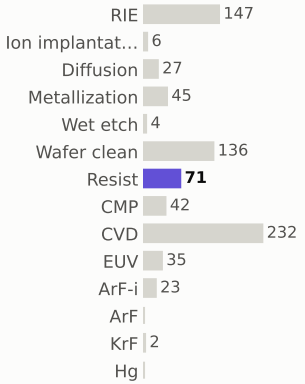

materials deposited (g)

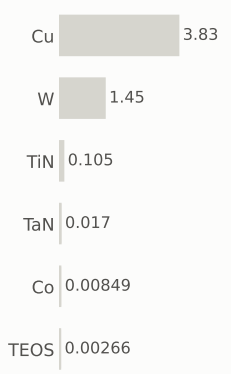

gases emitted (g)

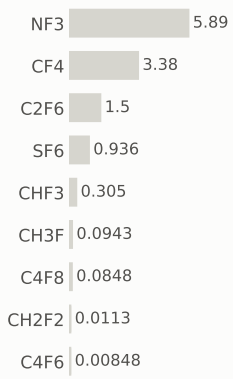

Step #8110: CVD

depo_fill · CVD

1.31	733.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

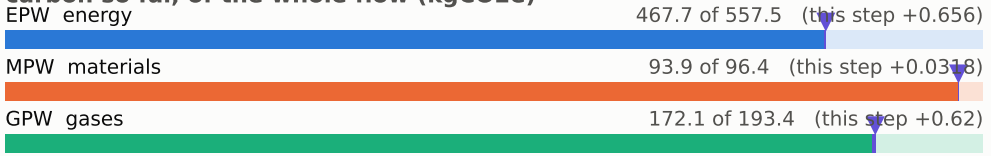

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

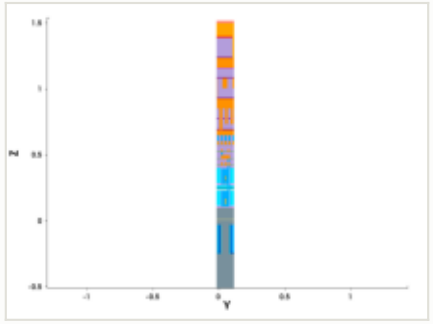

y cut at 0.049 µm

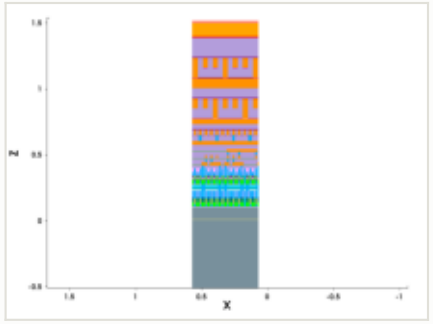

mask for this step

no mask for this step

steps by process area

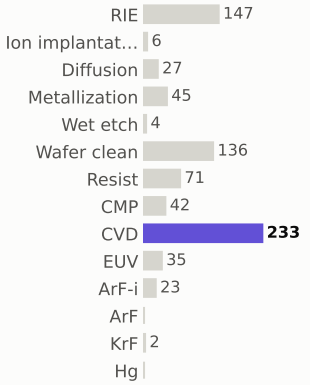

materials deposited (g)

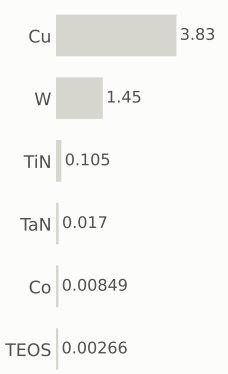

gases emitted (g)

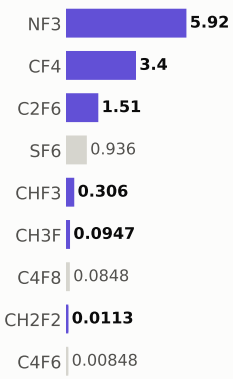

Step #8120: Wafer_clean

clean · Wafer_clean

0.169	733.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

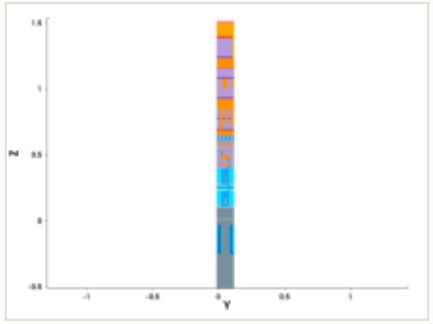

y cut at 0.049 µm

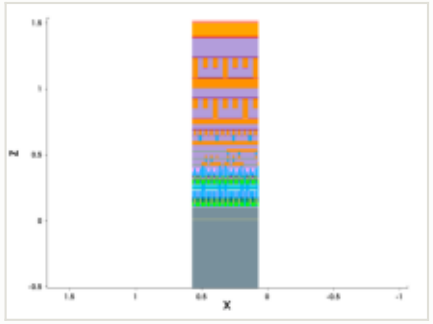

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

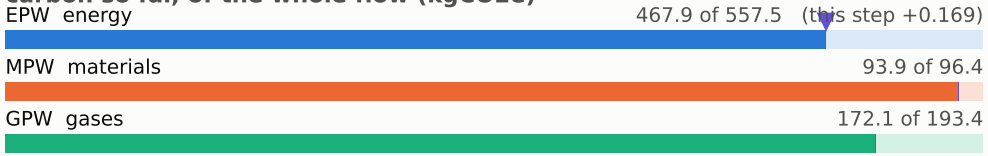

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

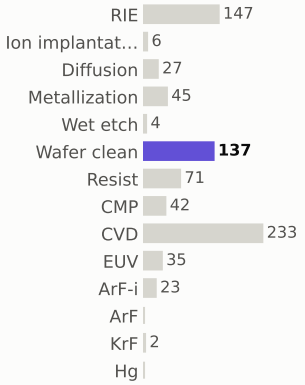

materials deposited (g)

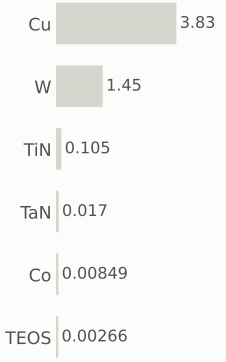

gases emitted (g)

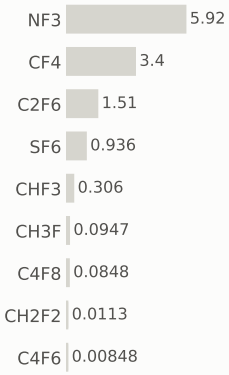

Step #8130: ArF-i

litho_patterning · ArF-i

0.217	734.1	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

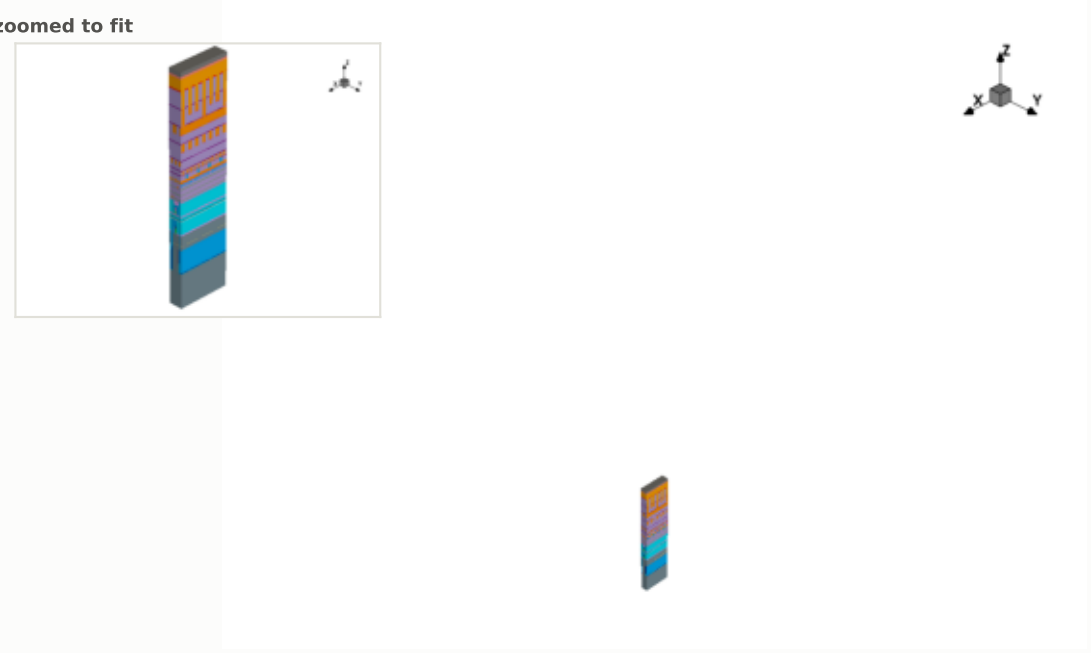

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

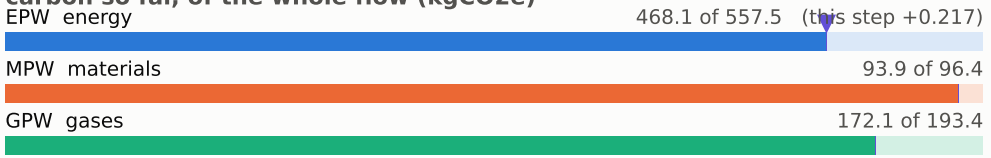

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

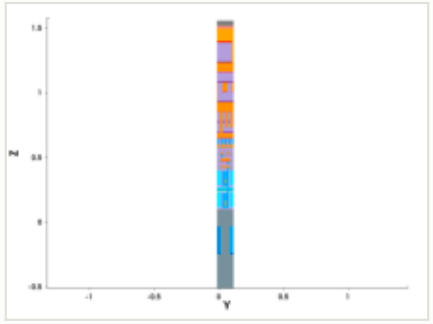

y cut at 0.049 µm

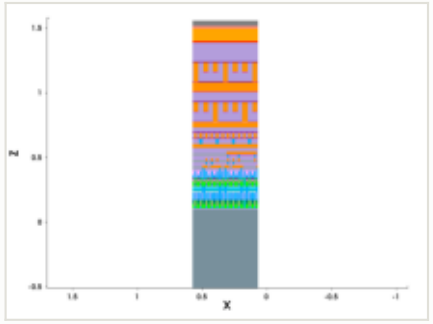

mask: layer 10622:0 (GDSII)

nothing in the clip window

steps by process area

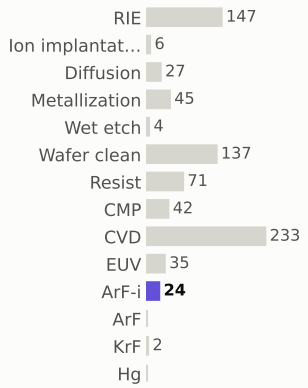

materials deposited (g)

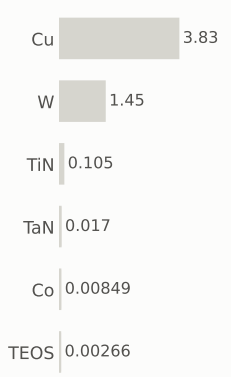

gases emitted (g)

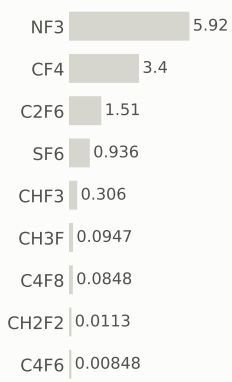

Step #8140: RIE

etch_anisotropic · RIE

1.04	735.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

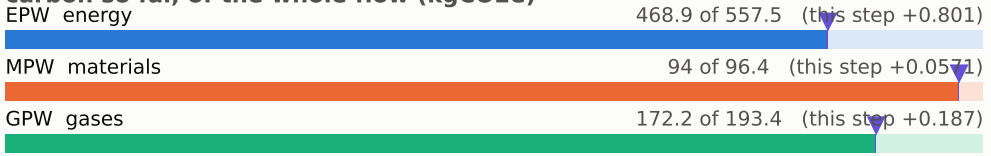

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

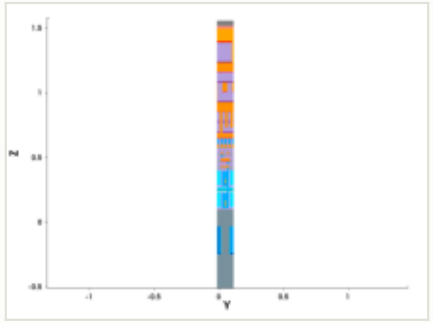

y cut at 0.049 µm

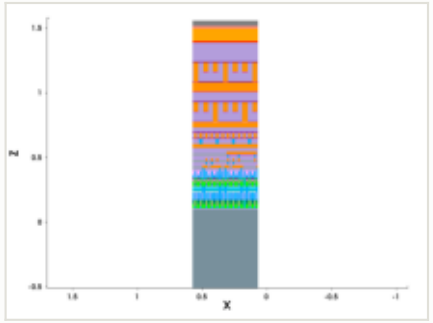

mask for this step

no mask for this step

steps by process area

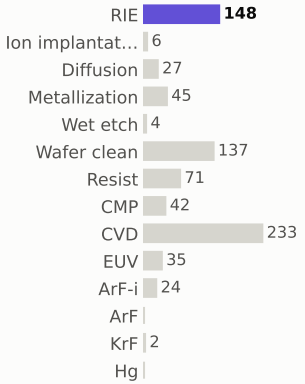

materials deposited (g)

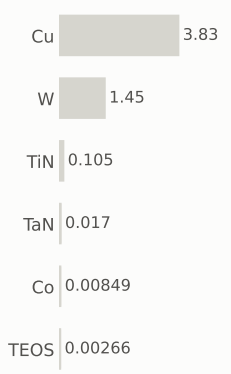

gases emitted (g)

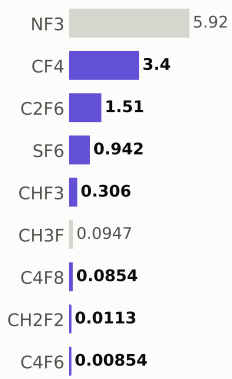

Step #8150: Wafer_clean

etch_strip · Wafer_clean

0.169	735.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

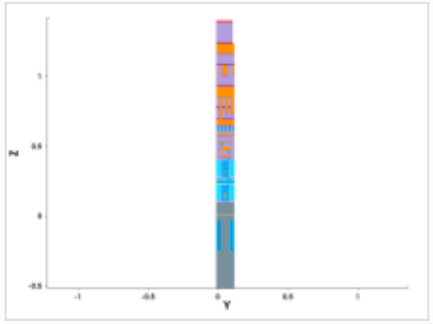

y cut at 0.049 µm

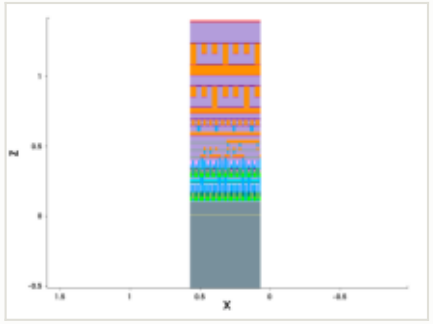

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

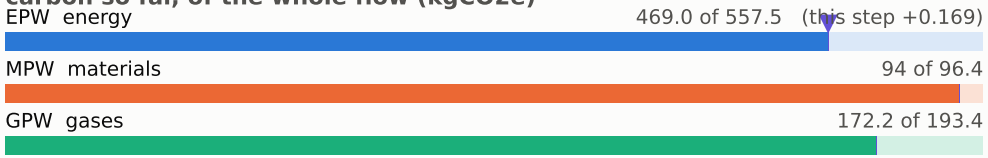

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

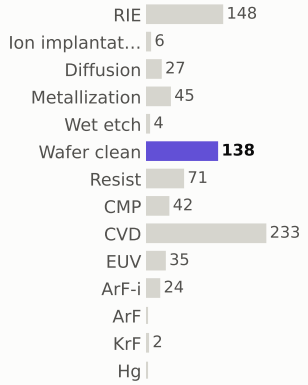

materials deposited (g)

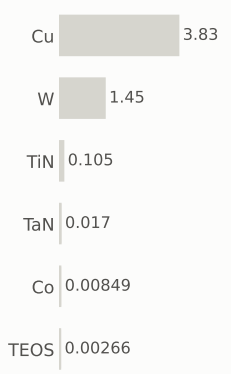

gases emitted (g)

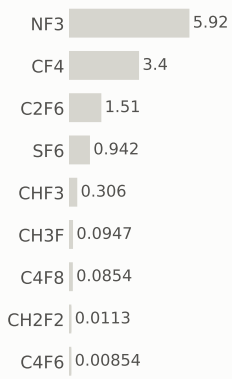

Step #8160: Metallization

depo_ellipsoidal · Metallization

1.2	736.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

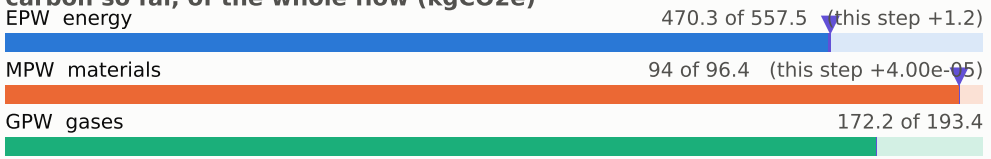

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

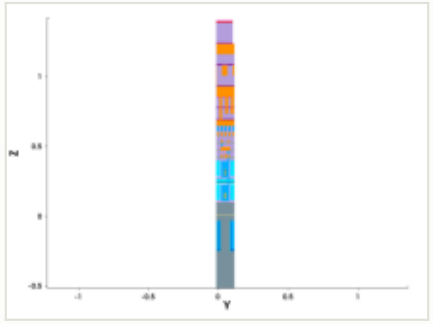

y cut at 0.049 µm

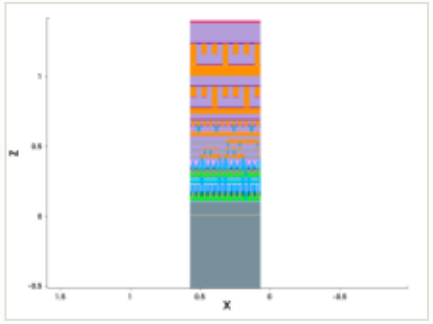

mask for this step

no mask for this step

steps by process area

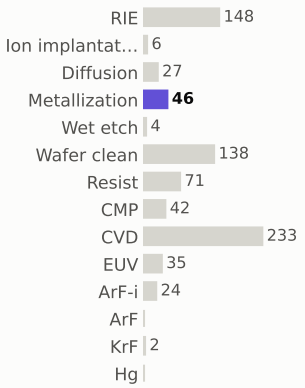

materials deposited (g)

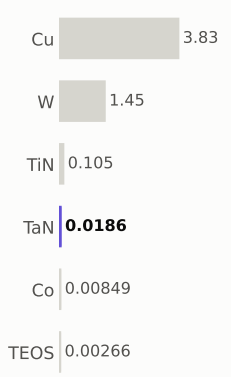

gases emitted (g)



Step #8170: Metallization

depo_fill · Metallization

1.21	737.7	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

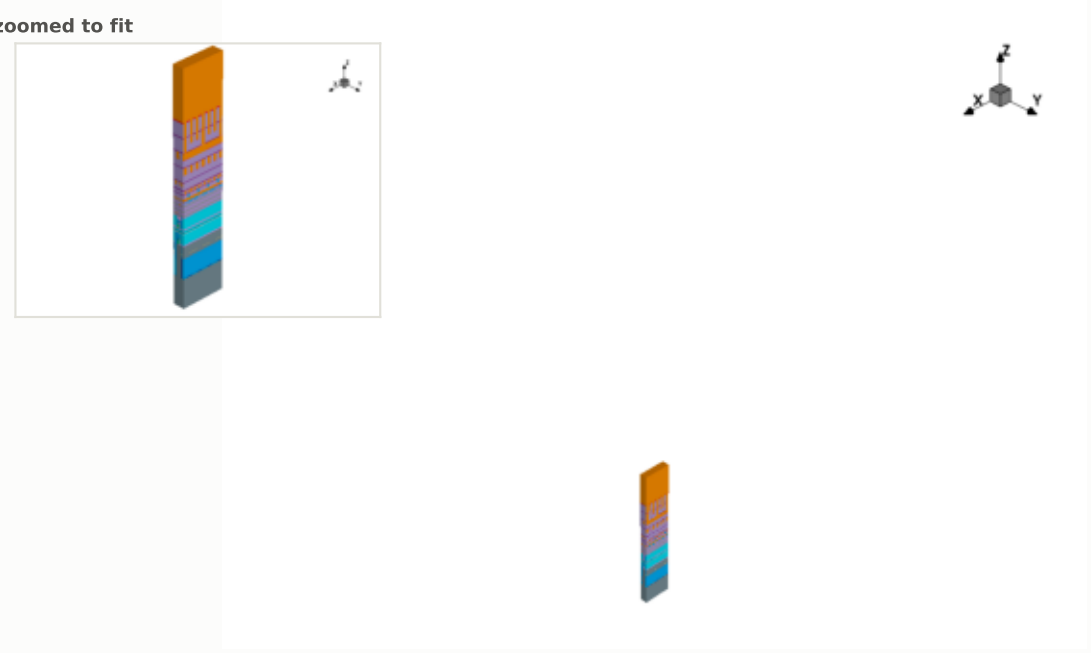

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Cu	EPW tool	0.86 kgCO2e
thickness	0.55 µm	EPW overhead	0.344 kgCO2e
material GWP	6.09011 gCO2e/g	MPW	0.00212 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

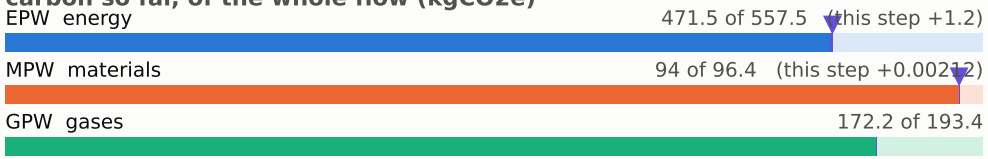

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

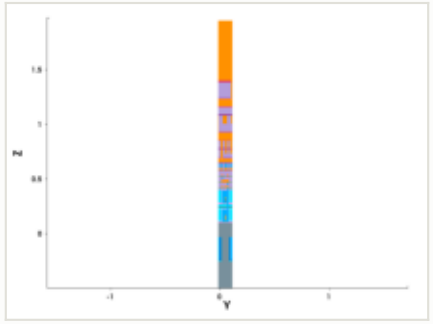

y cut at 0.049 µm

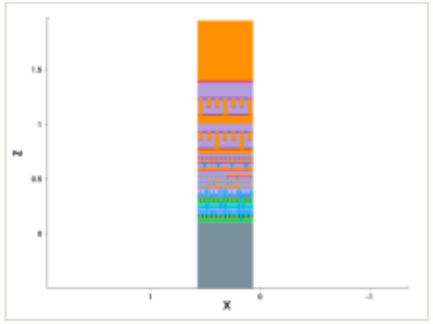

mask for this step

no mask for this step

steps by process area

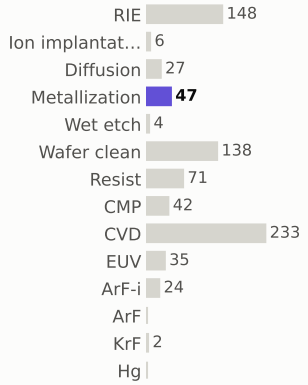

materials deposited (g)

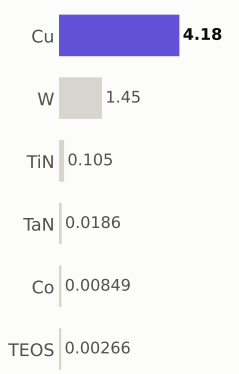

gases emitted (g)

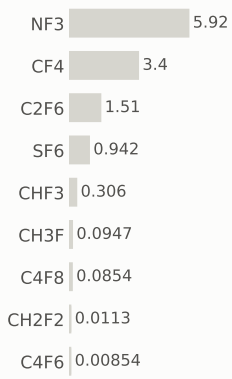

Step #8180: Diffusion

treatment · Diffusion

0.801	738.5	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

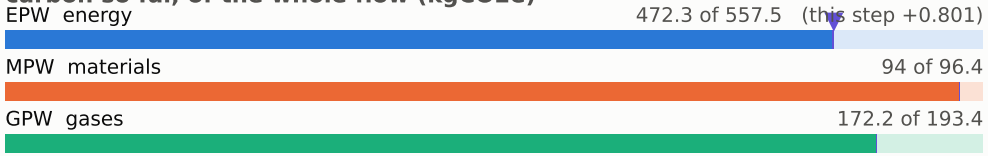

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

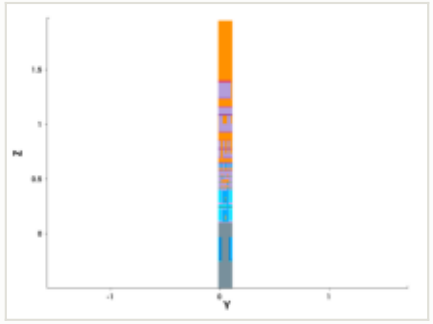

y cut at 0.049 µm

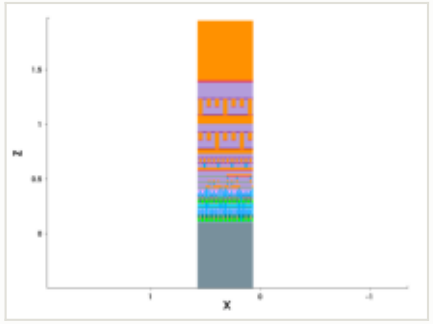

mask for this step

no mask for this step

steps by process area

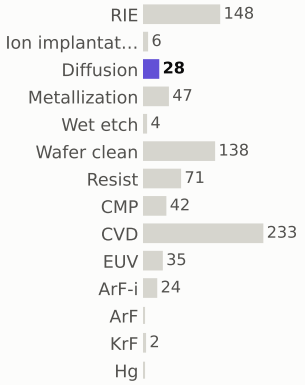

materials deposited (g)

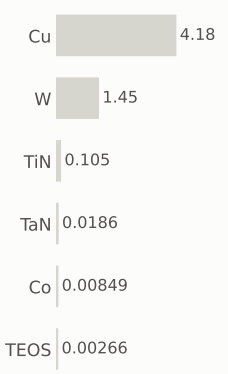

gases emitted (g)

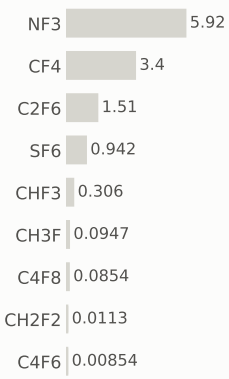

Step #8190: CMP

etch_cmp · CMP

0.169	738.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

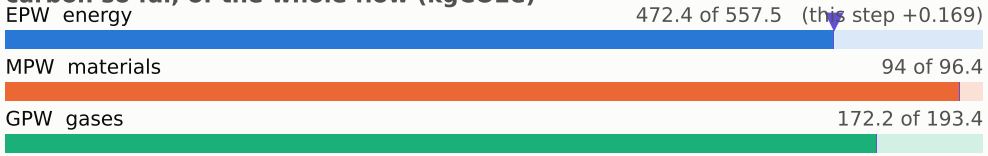

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

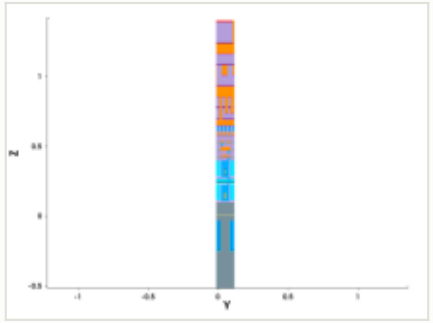

y cut at 0.049 µm

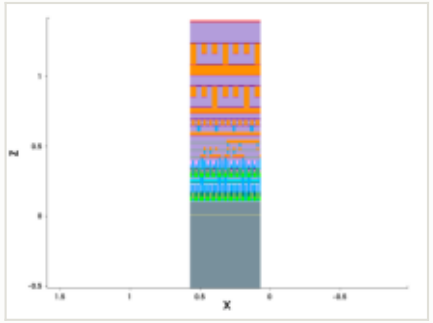

mask for this step

no mask for this step

steps by process area

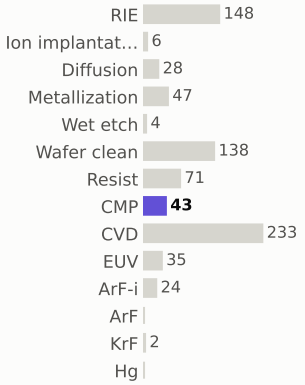

materials deposited (g)

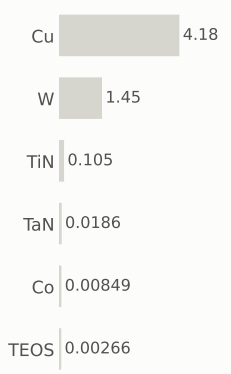

gases emitted (g)

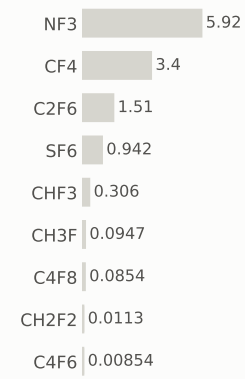

Step #8200: CVD

depo_fill · CVD

1.31	740.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0322 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

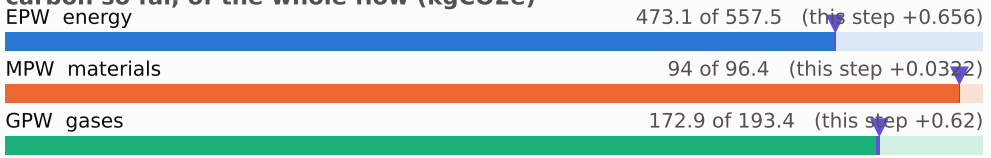

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

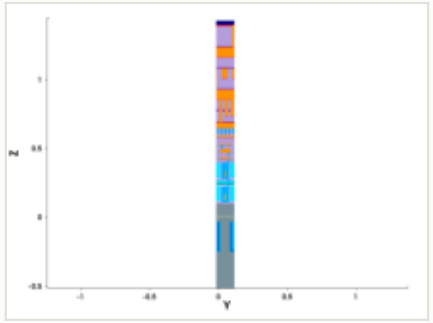

y cut at 0.049 µm

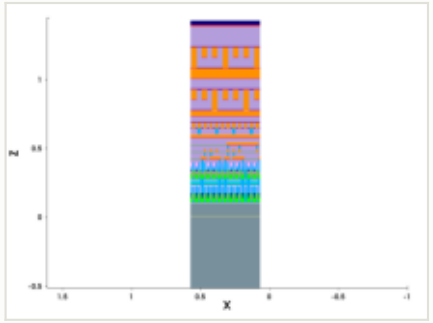

mask for this step

no mask for this step

steps by process area

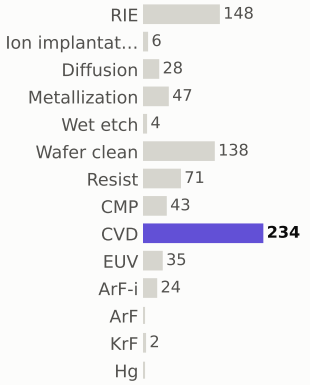

materials deposited (g)

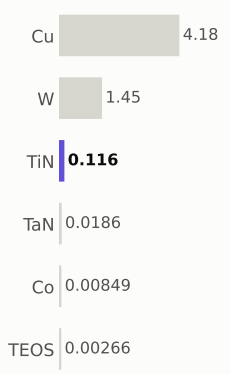

gases emitted (g)

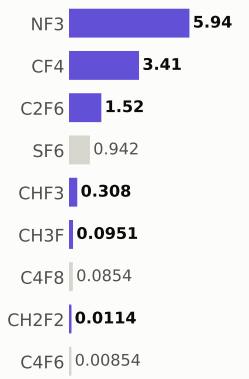

Step #8210: Wafer_clean

clean · Wafer_clean

0.169	740.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

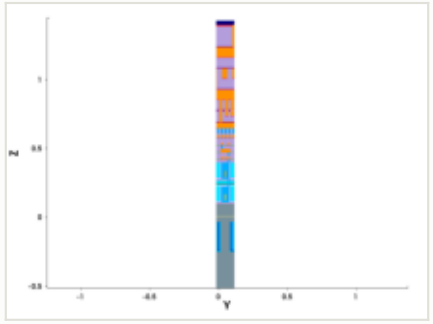

y cut at 0.049 µm

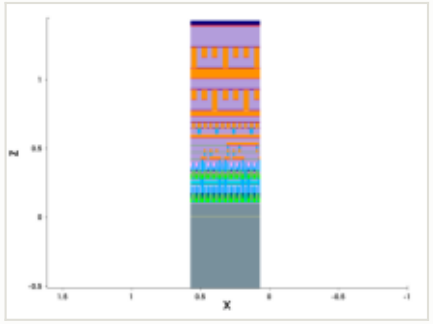

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

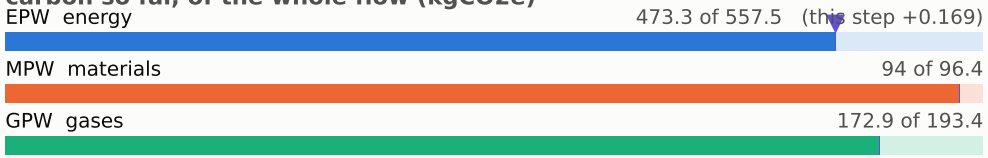

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

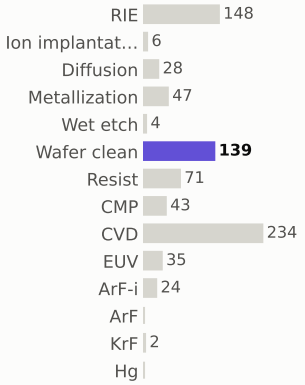

materials deposited (g)

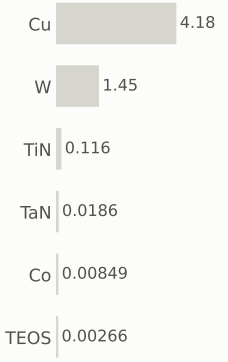

gases emitted (g)

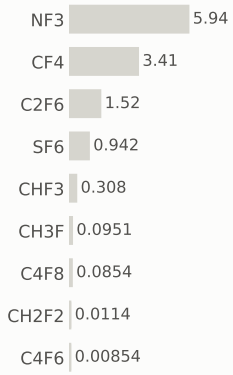

Step #8220: CVD

depo_fill · CVD

1.31	741.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

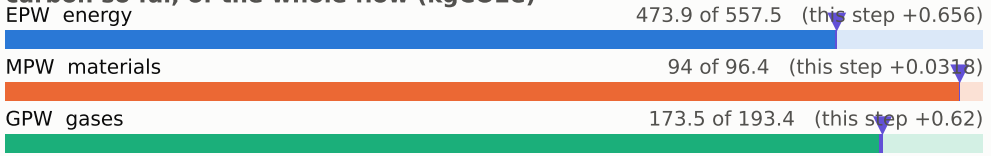

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

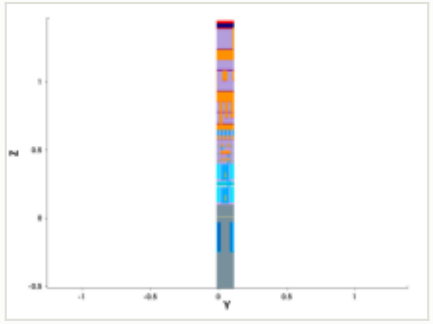

y cut at 0.049 µm

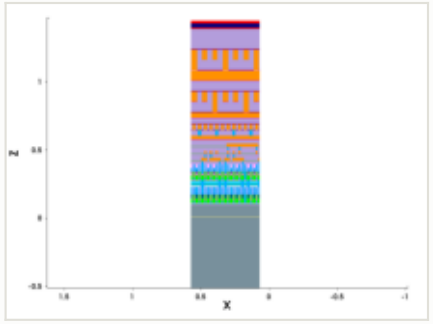

mask for this step

no mask for this step

steps by process area

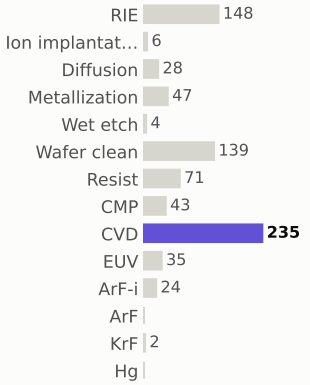

materials deposited (g)

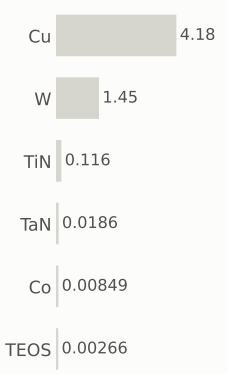

gases emitted (g)

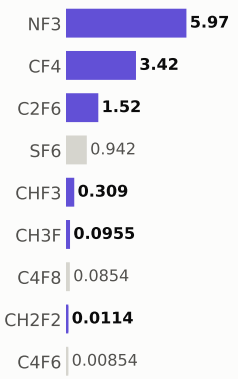

Step #8230: CVD

depo_fill · CVD

1.31	742.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

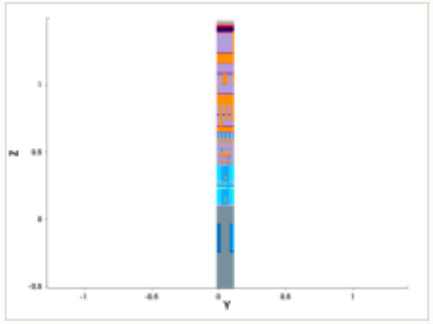

y cut at 0.049 µm

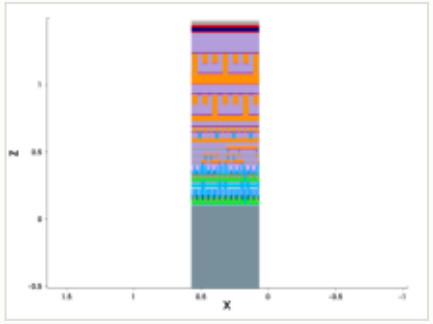

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

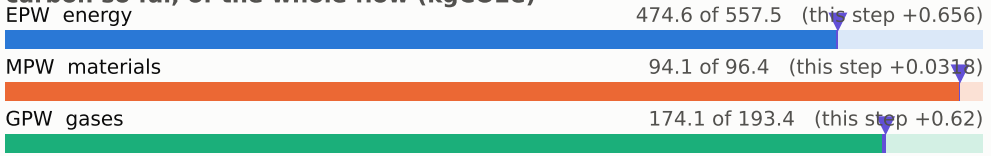

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

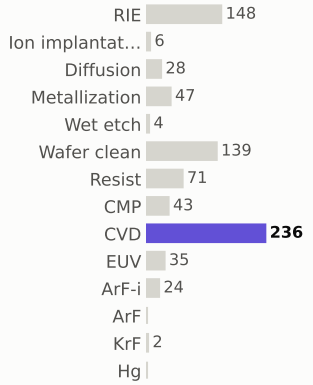

materials deposited (g)

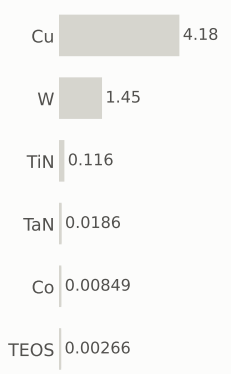

gases emitted (g)

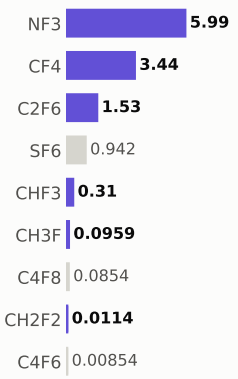

Step #8240: Resist

depo_fill · Resist

0.169	742.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

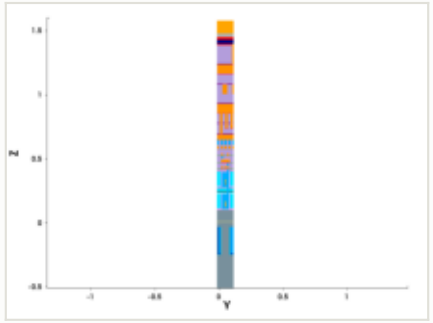

y cut at 0.049 µm

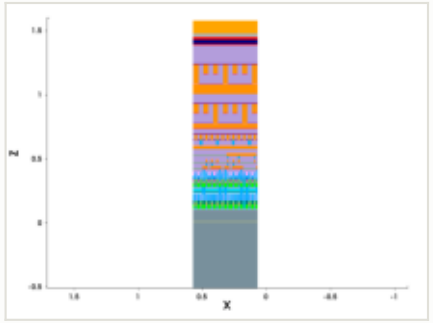

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

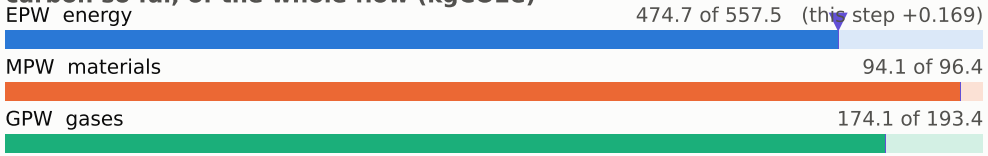

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

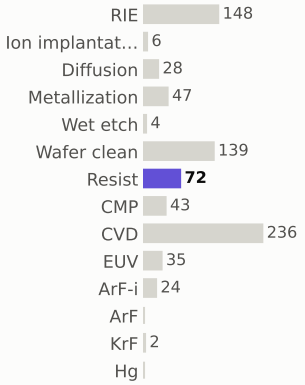

materials deposited (g)

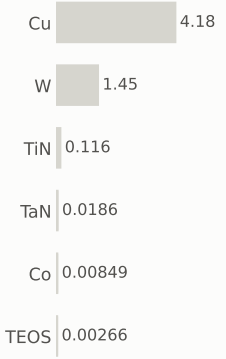

gases emitted (g)

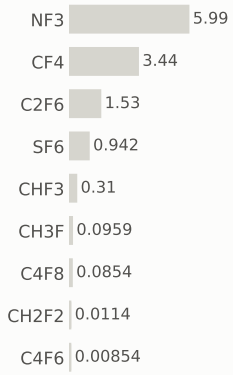

Step #8250: CVD

depo_fill · CVD

1.31	744.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

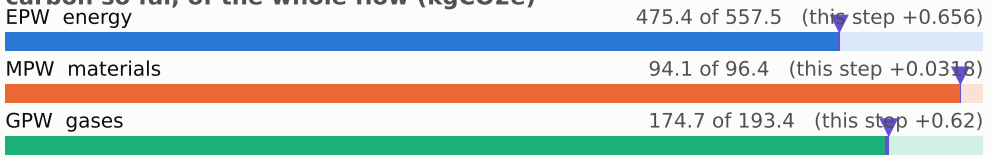

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

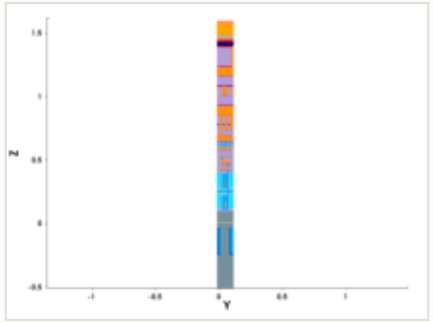

y cut at 0.049 µm

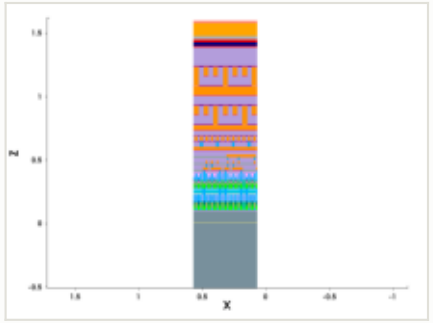

mask for this step

no mask for this step

steps by process area

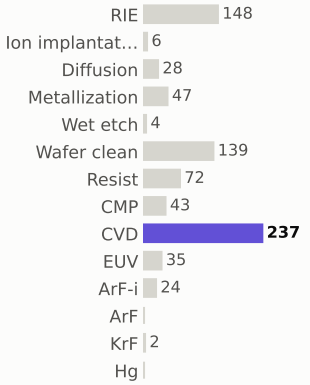

materials deposited (g)

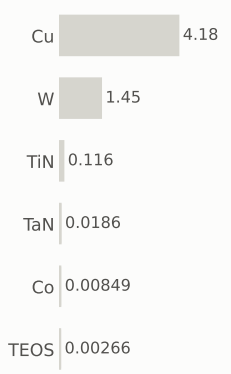

gases emitted (g)

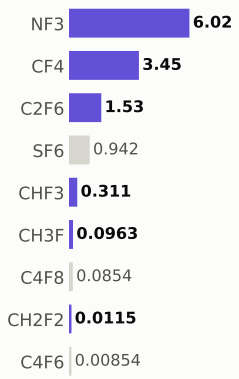

Step #8260: Wafer_clean

clean · Wafer_clean

0.169	744.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

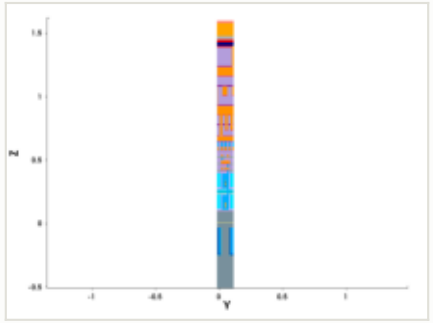

y cut at 0.049 µm

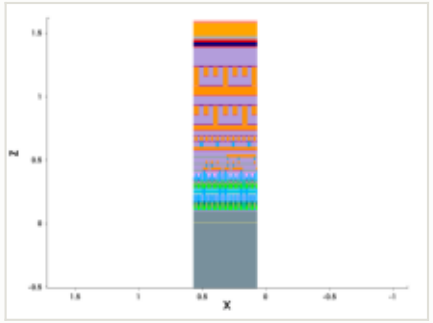

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

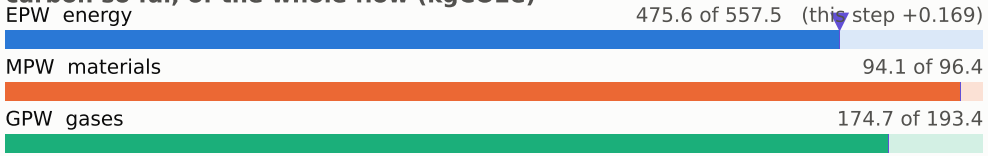

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

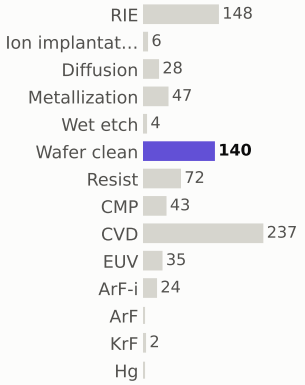

materials deposited (g)

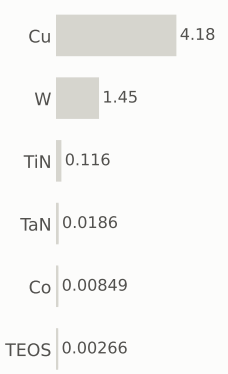

gases emitted (g)

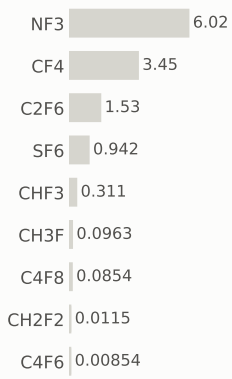

Step #8270: ArF-i

litho_patterning · ArF-i

0.217	744.6	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

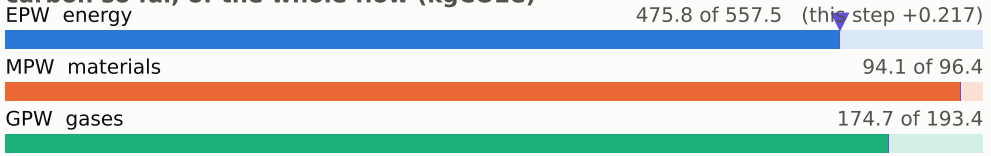

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

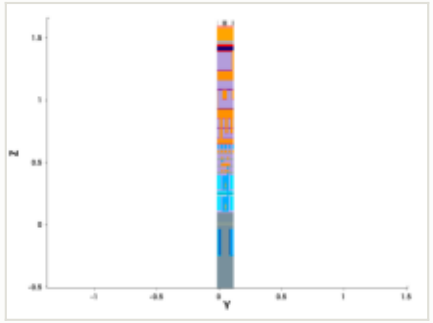

y cut at 0.049 µm

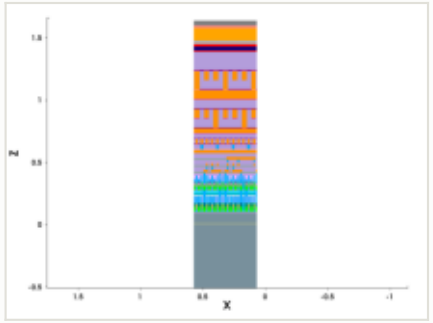

mask: layer 10651:0, positive (GDSII)

steps by process area



materials deposited (g)

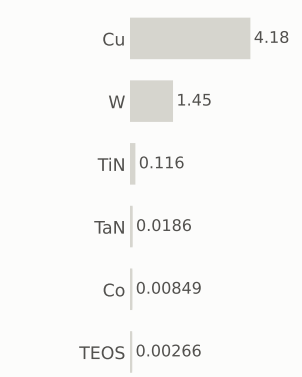

gases emitted (g)

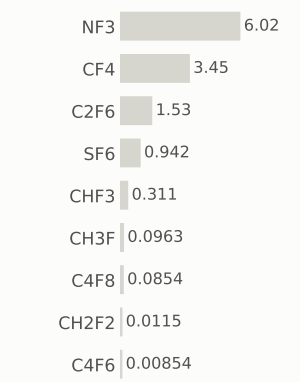

Step #8280: Ion_implantation

treatment · Ion_implantation

0.801	745.4	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

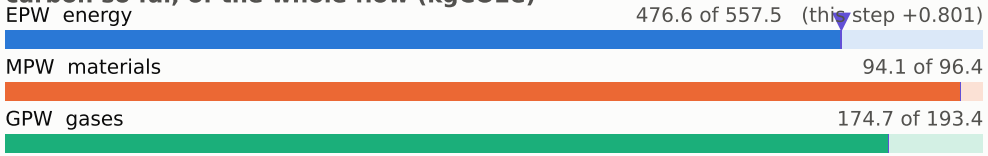

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

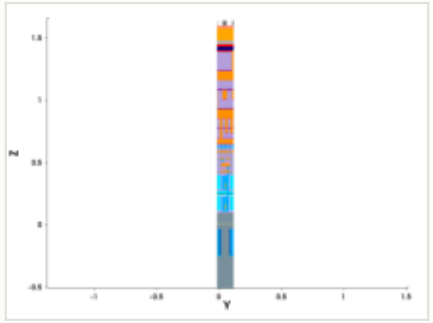

y cut at 0.049 µm

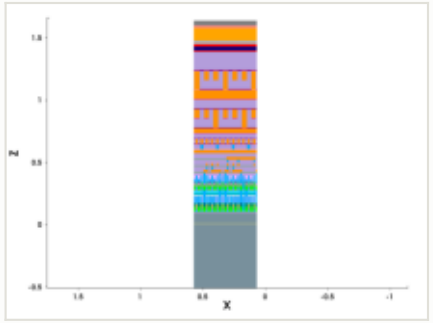

mask for this step

no mask for this step

steps by process area

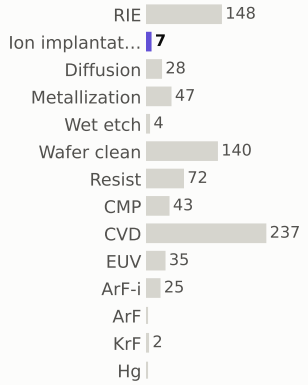

materials deposited (g)

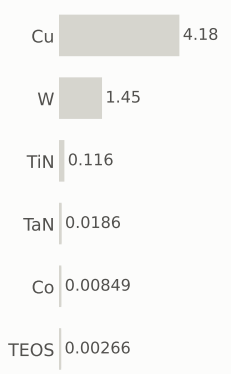

gases emitted (g)

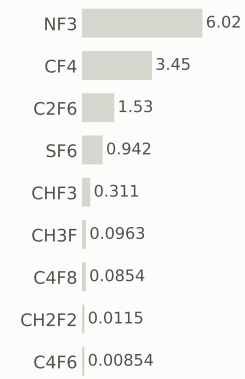

Step #8290: RIE

etch_anisotropic · RIE

1.04	746.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

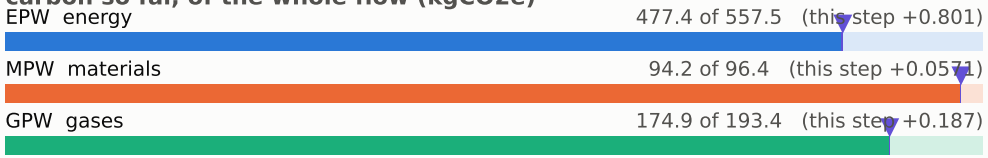

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

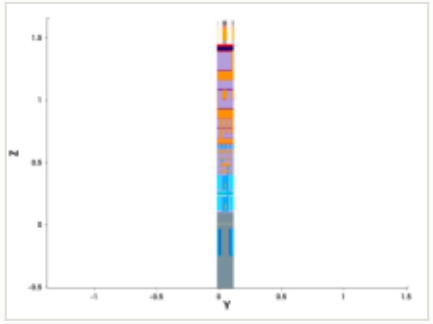

y cut at 0.049 µm

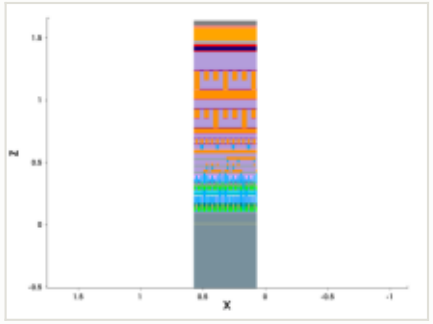

mask for this step

no mask for this step

steps by process area

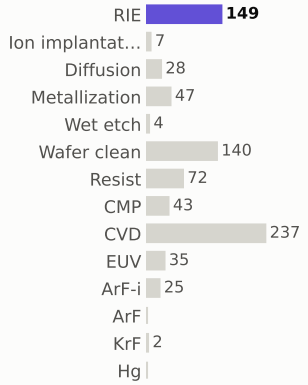

materials deposited (g)

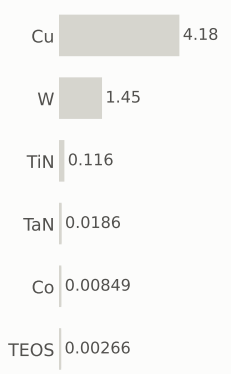

gases emitted (g)

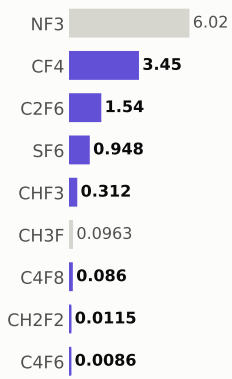

Step #8300: Wafer_clean

etch_strip · Wafer_clean

0.169	746.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

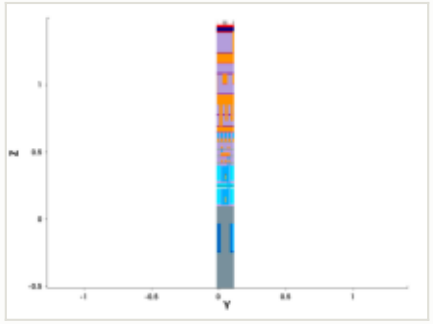

y cut at 0.049 µm

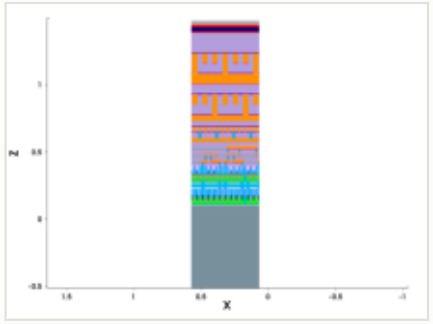

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

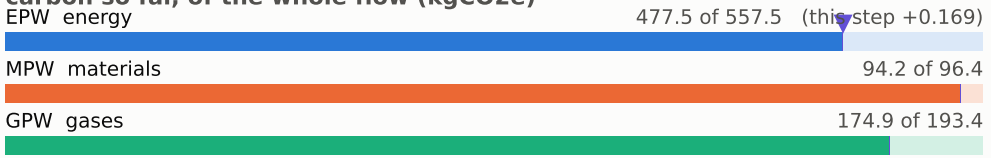

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

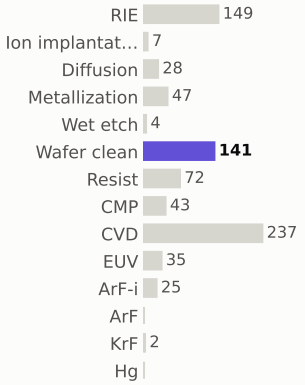

materials deposited (g)

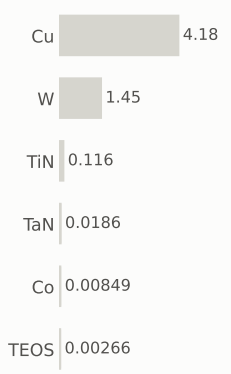

gases emitted (g)

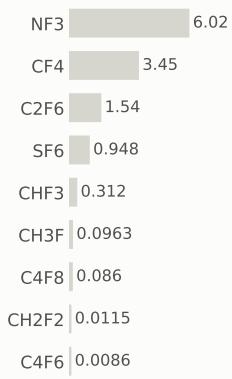

Step #8310: CVD

depo_isotropic · CVD

1.31	747.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.001 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

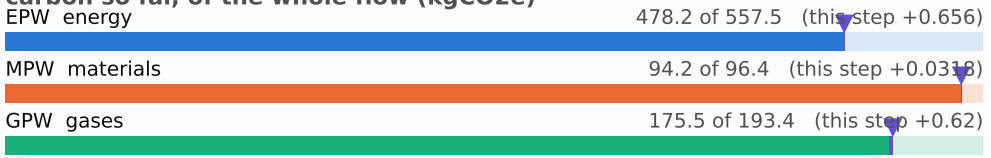

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

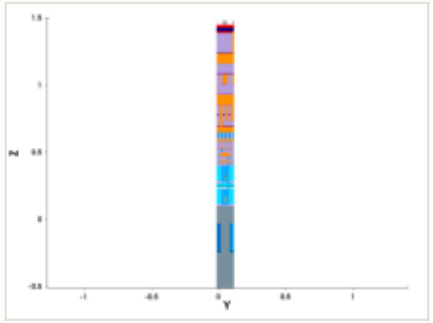

y cut at 0.049 µm

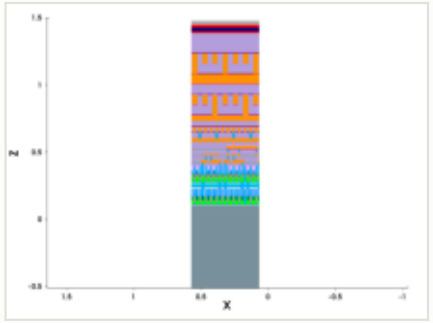

mask for this step

no mask for this step

steps by process area

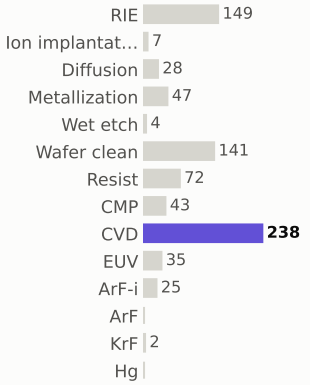

materials deposited (g)

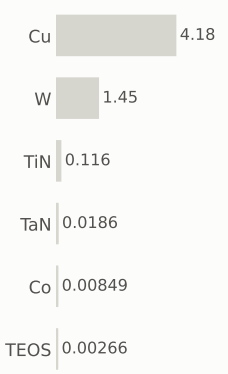

gases emitted (g)

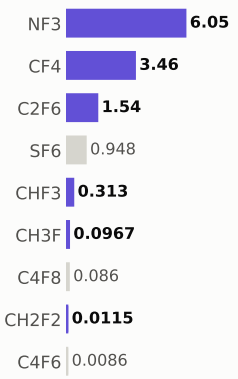

Step #8320: RIE

etch_anisotropic · RIE

1.04	749.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

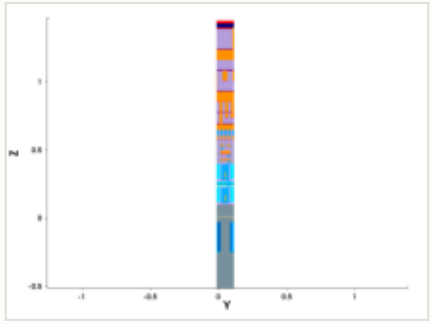

y cut at 0.049 µm

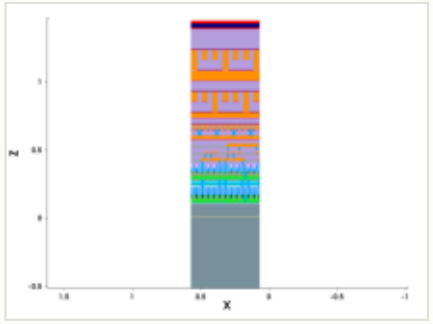

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

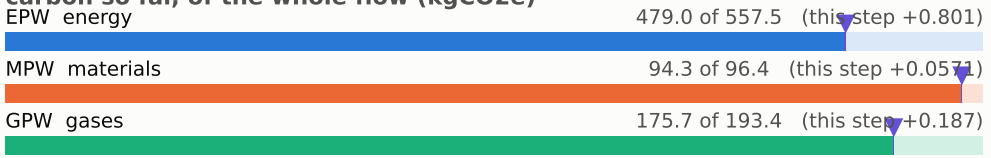

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

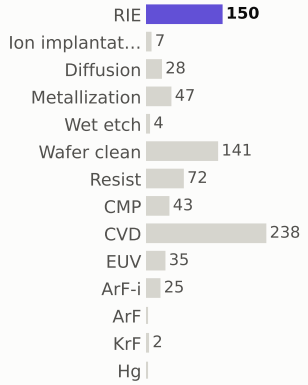

materials deposited (g)

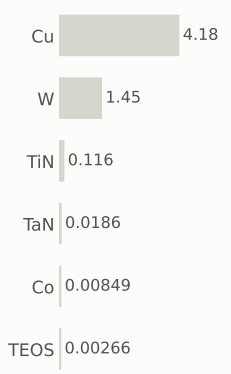

gases emitted (g)

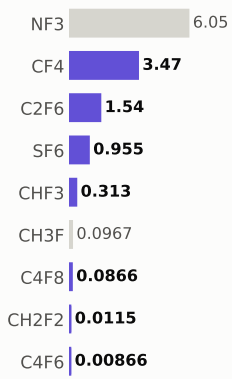

Step #8330: Wafer_clean

etch_strip · Wafer_clean

0.169	749.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

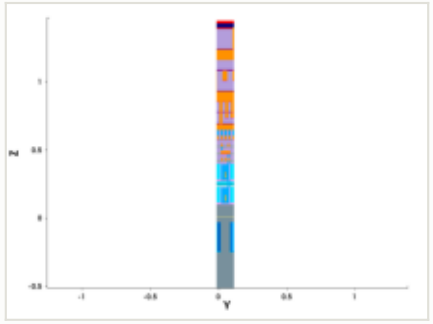

y cut at 0.049 µm

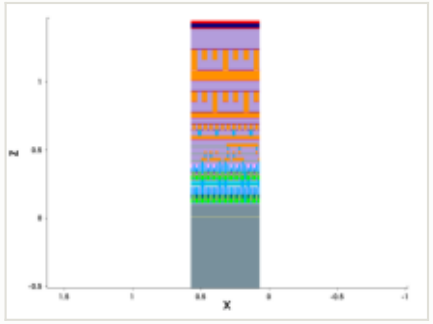

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

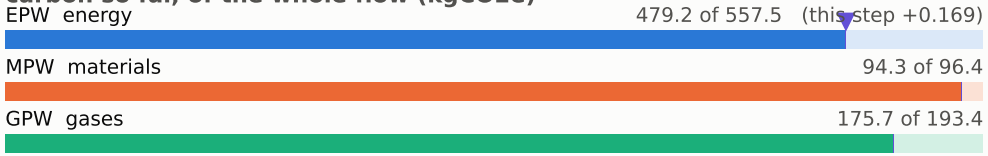

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

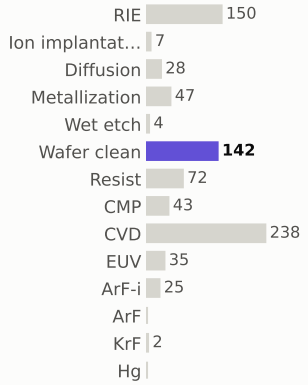

materials deposited (g)

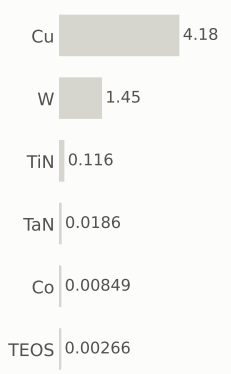

gases emitted (g)

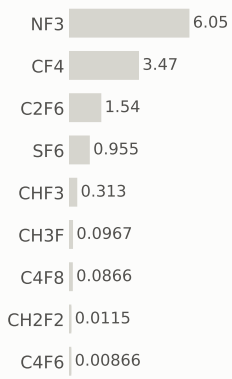

Step #8340: Resist

depo_fill · Resist

0.169	749.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

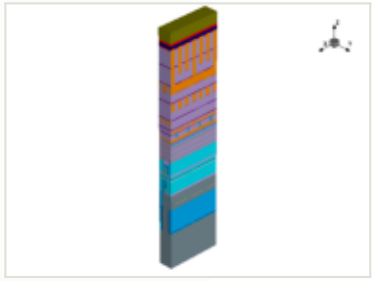

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

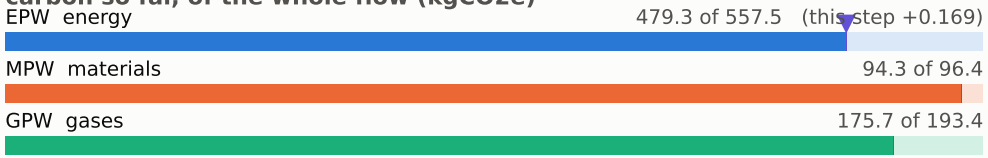

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

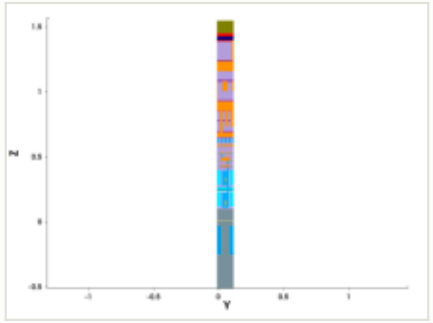

y cut at 0.049 µm

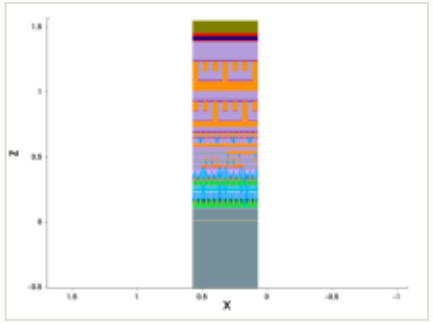

mask for this step

no mask for this step

steps by process area

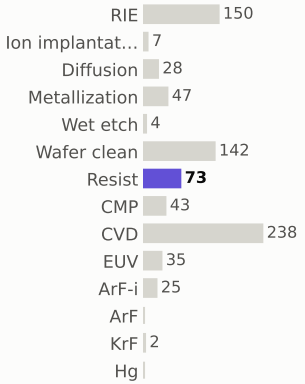

materials deposited (g)

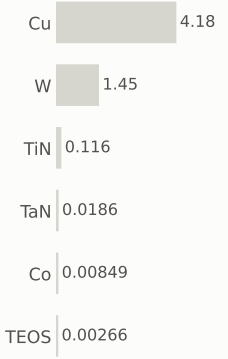

gases emitted (g)

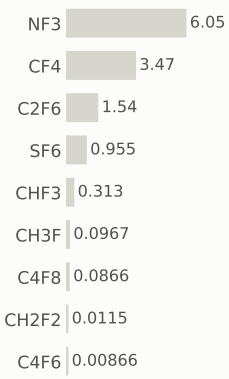

Step #8350: Wafer_clean

clean · Wafer_clean

0.169	749.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

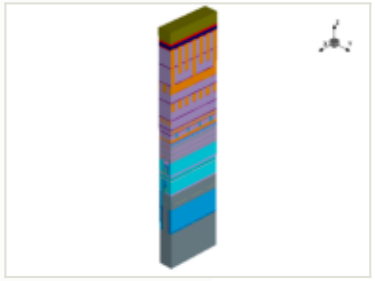

x cut at 0.385 µm

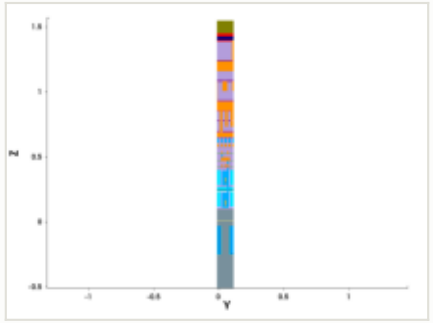

y cut at 0.049 µm

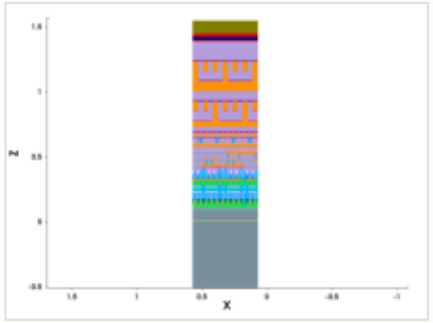

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

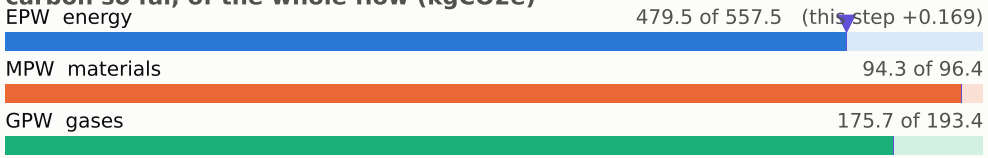

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

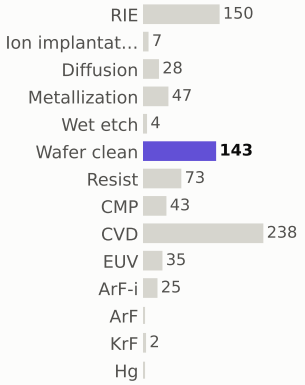

materials deposited (g)

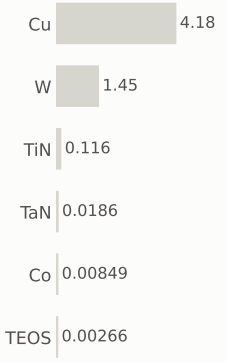

gases emitted (g)

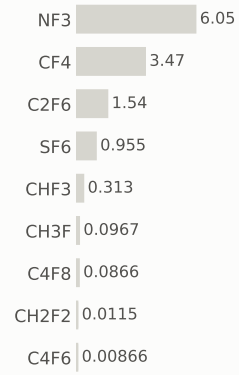

Step #8360: ArF-i

litho_patterning · ArF-i

0.217	749.7	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

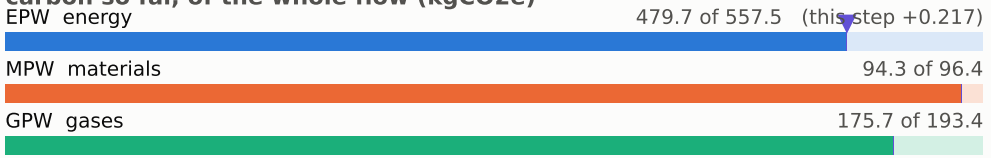

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

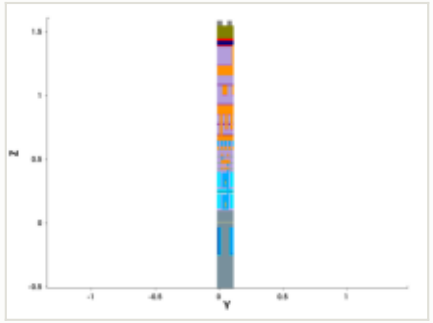

y cut at 0.049 µm

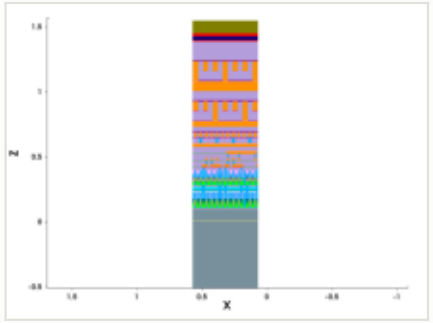

mask: layer 65:0 (GDSII)

steps by process area

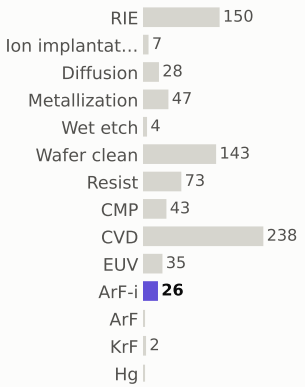

materials deposited (g)

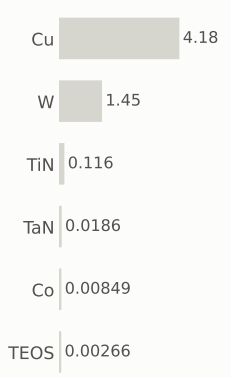

gases emitted (g)



Step #8370: RIE

etch_anisotropic · RIE

1.04	750.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

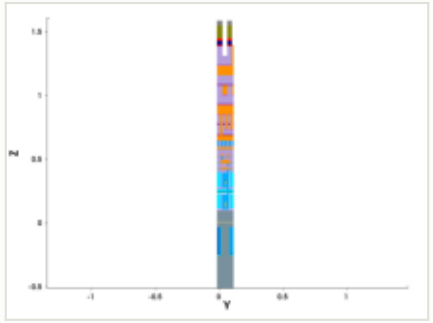

y cut at 0.049 µm

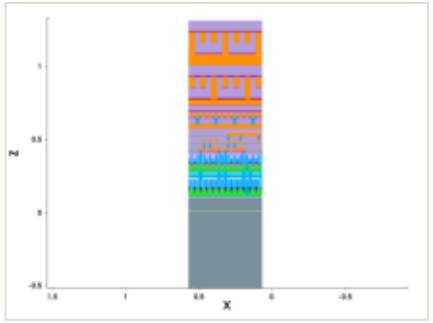

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

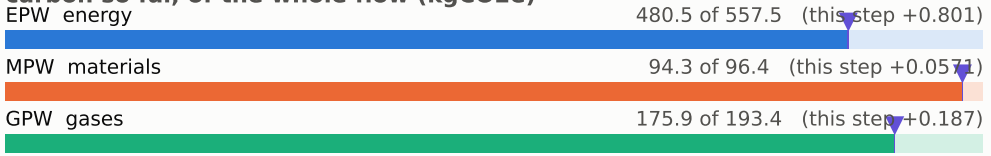

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

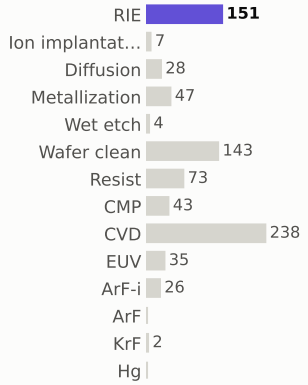

materials deposited (g)

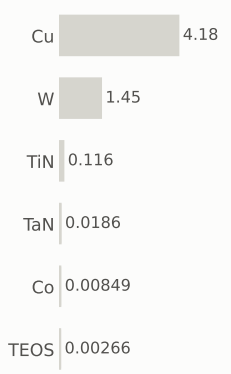

gases emitted (g)

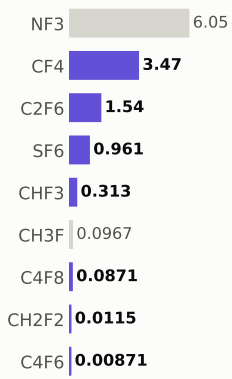

Step #8380: Wafer_clean

etch_strip · Wafer_clean

0.169	750.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

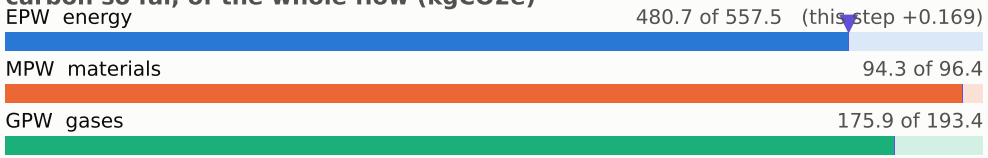

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

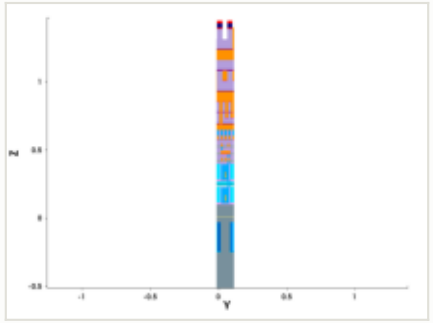

y cut at 0.049 µm

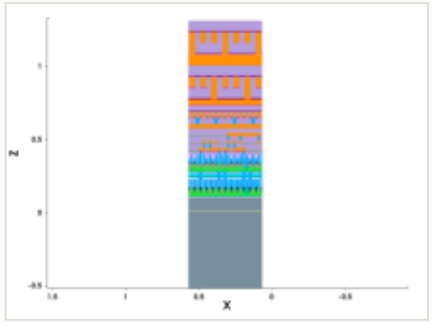

mask for this step

no mask for this step

steps by process area

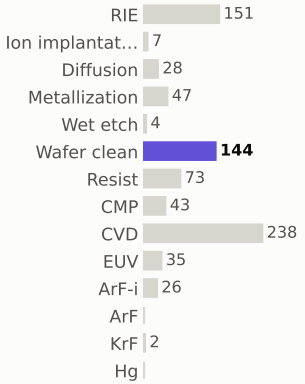

materials deposited (g)

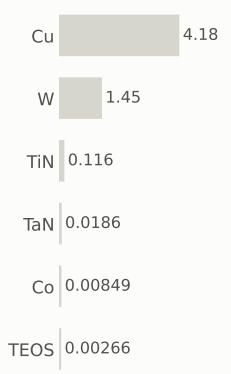

gases emitted (g)

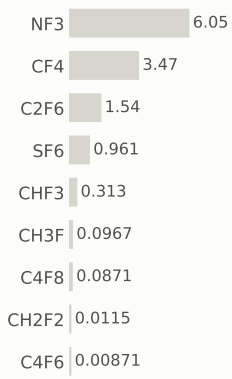

Step #8390: Metallization

depo_ellipsoidal · Metallization

1.2	752.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

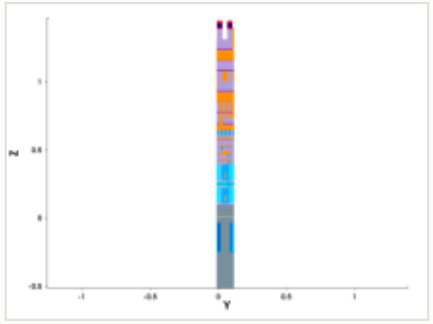

y cut at 0.049 µm

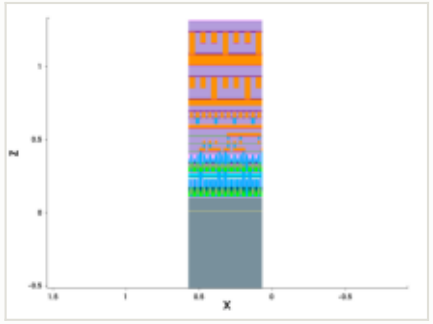

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

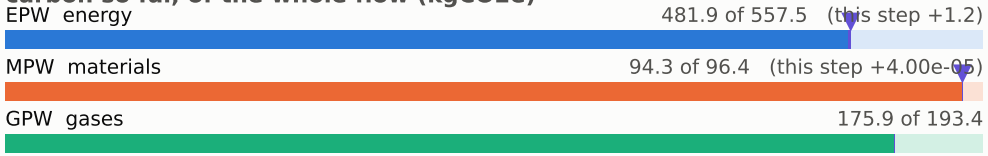

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

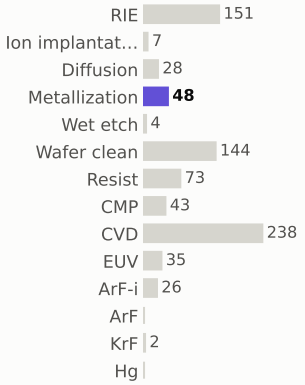

materials deposited (g)

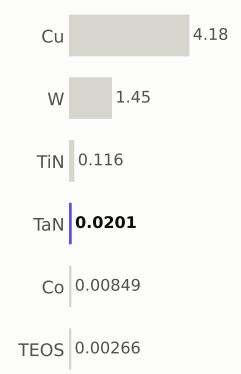

gases emitted (g)

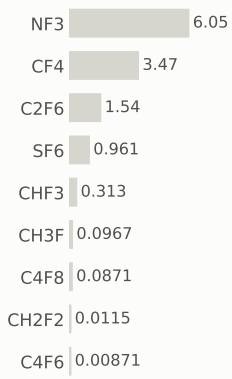

Step #8400: Metallization

depo_fill · Metallization

1.21	753.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

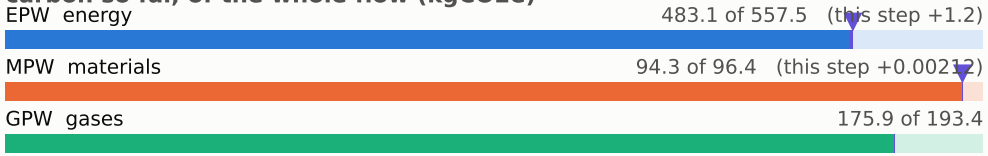

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

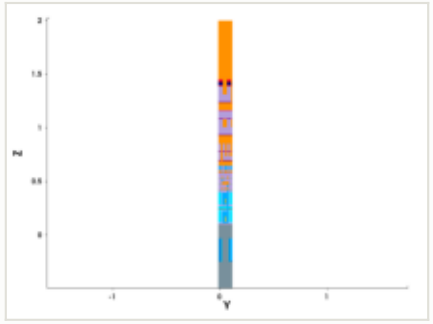

y cut at 0.049 µm

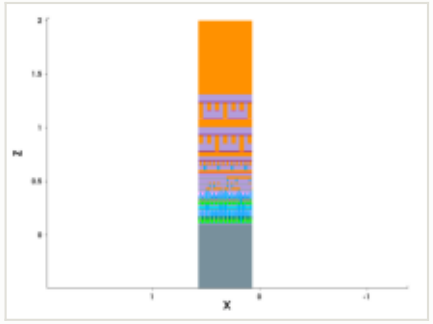

mask for this step

no mask for this step

steps by process area

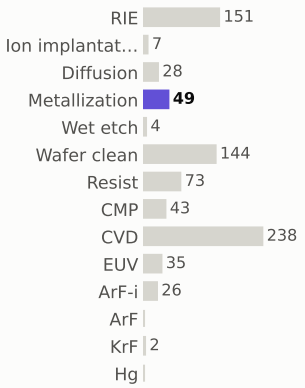

materials deposited (g)

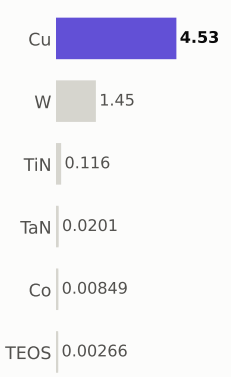

gases emitted (g)

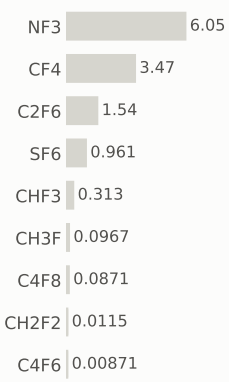

Step #8410: Diffusion

treatment · Diffusion

0.801	754.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

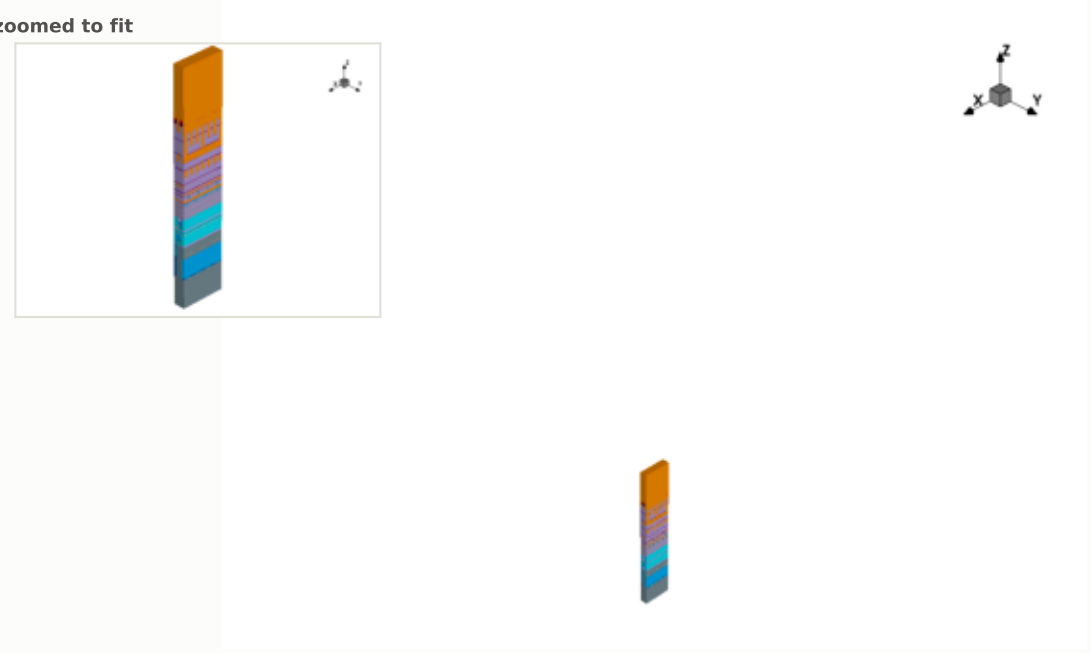

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

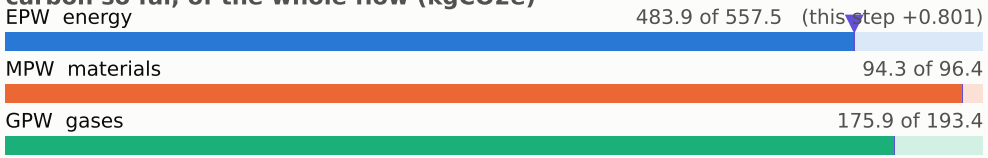

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

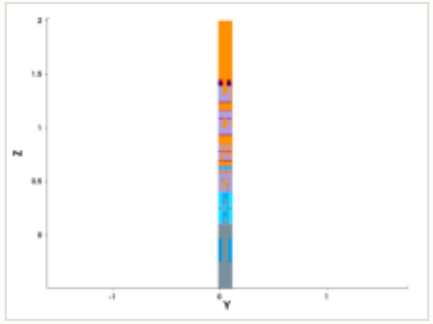

y cut at 0.049 µm

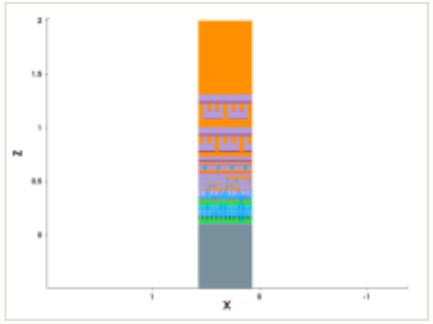

mask for this step

no mask for this step

steps by process area

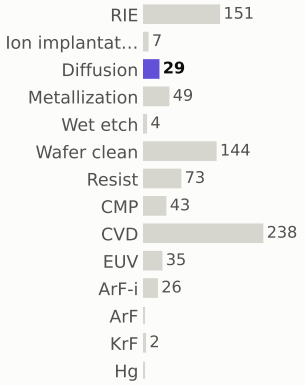

materials deposited (g)

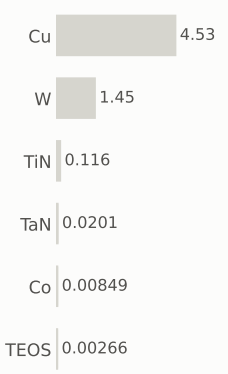

gases emitted (g)

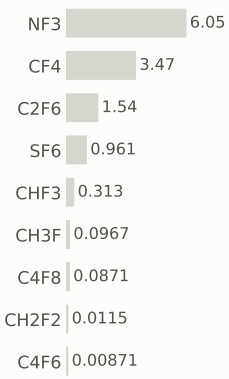

Step #8420: CMP

etch_cmp · CMP

0.169	754.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

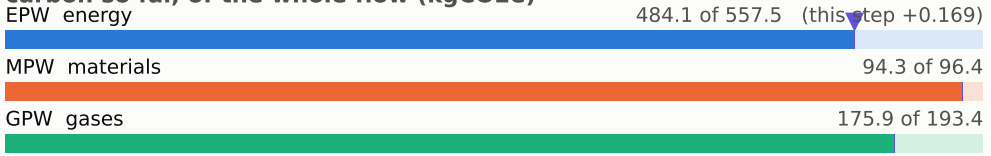

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

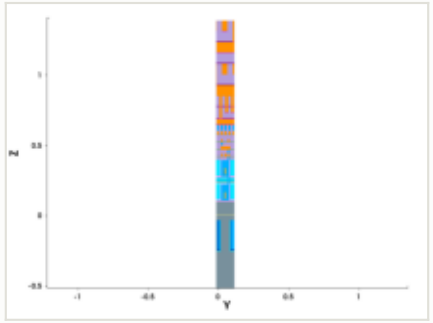

y cut at 0.049 µm

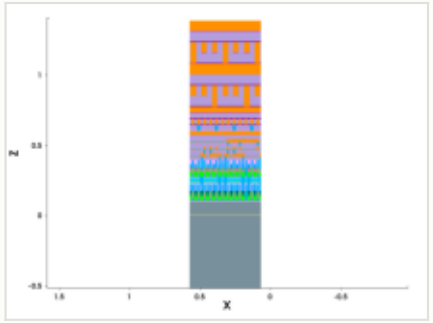

mask for this step

no mask for this step

steps by process area

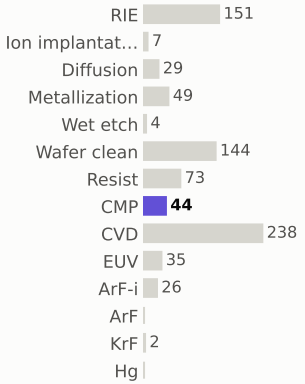

materials deposited (g)

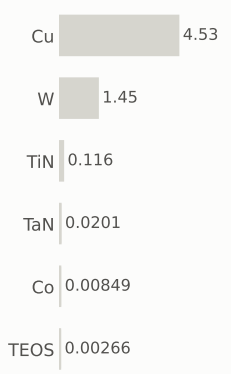

gases emitted (g)

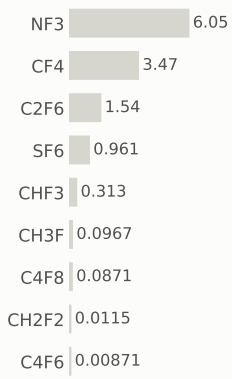

Step #8430: Metallization

depo_isotropic · Metallization

1.2	755.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

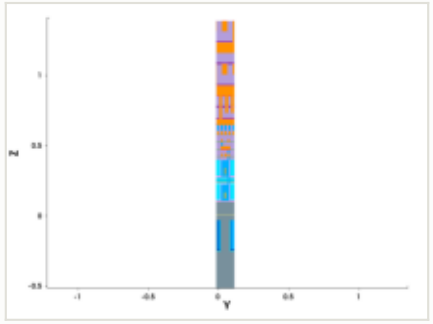

y cut at 0.049 µm

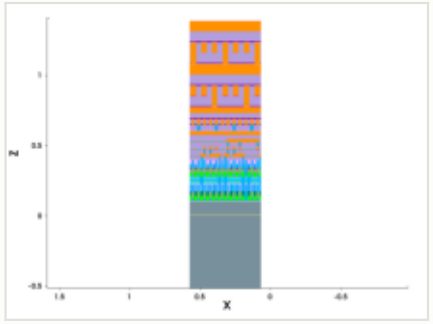

mask for this step

no mask for this step

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

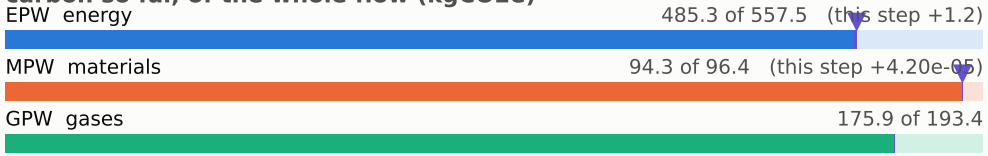

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

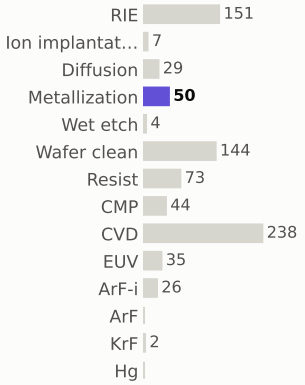

materials deposited (g)

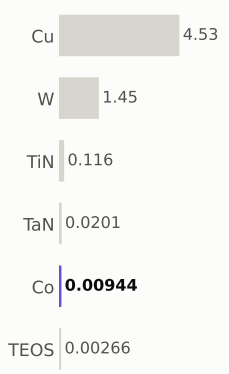

gases emitted (g)



Step #8450: CVD

depo_fill · CVD

1.31	756.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

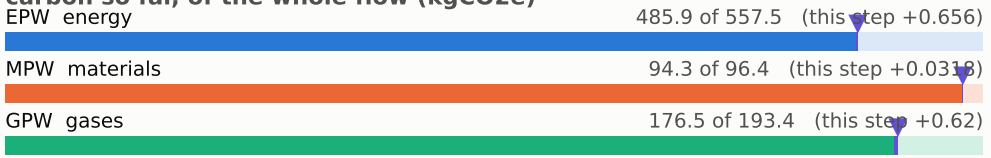

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

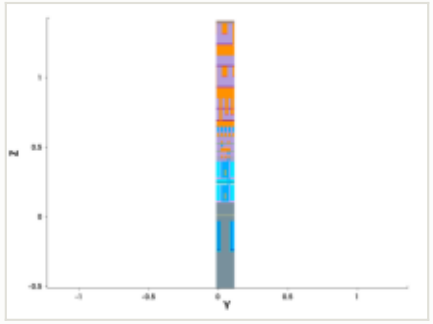

y cut at 0.049 µm

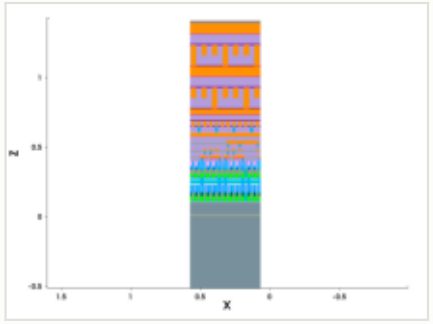

mask for this step

no mask for this step

steps by process area

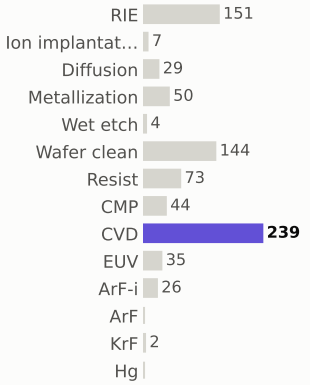

materials deposited (g)

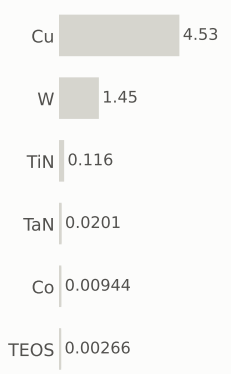

gases emitted (g)

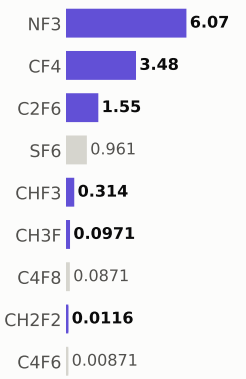

Step #8460: CVD

depo_fill · CVD

1.31	758.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.204 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

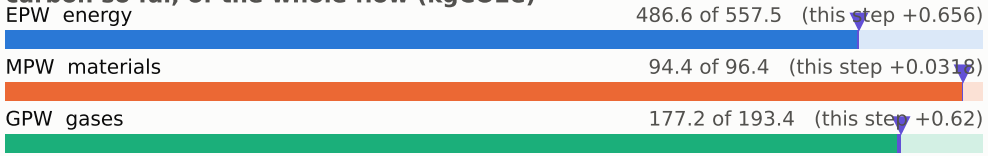

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

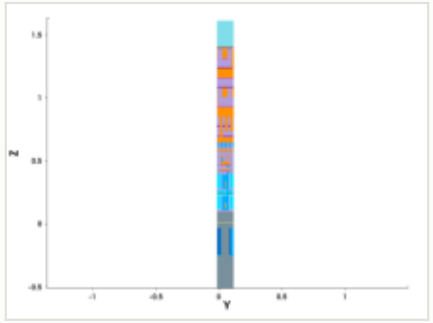

y cut at 0.049 µm

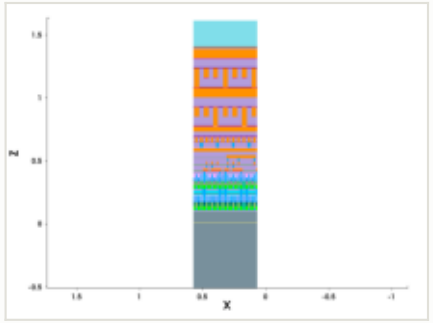

mask for this step

no mask for this step

steps by process area

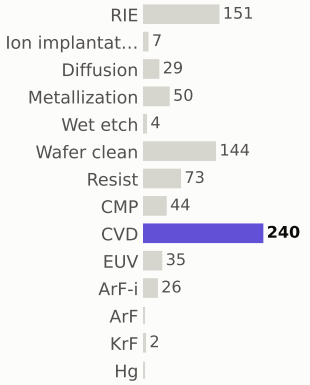

materials deposited (g)

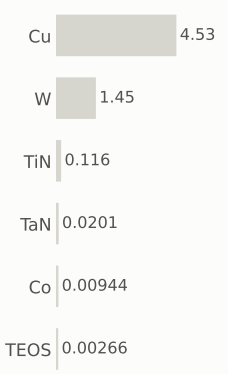

gases emitted (g)

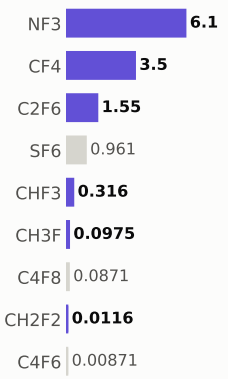

Step #8470: Resist

depo_fill · Resist

0.169	758.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

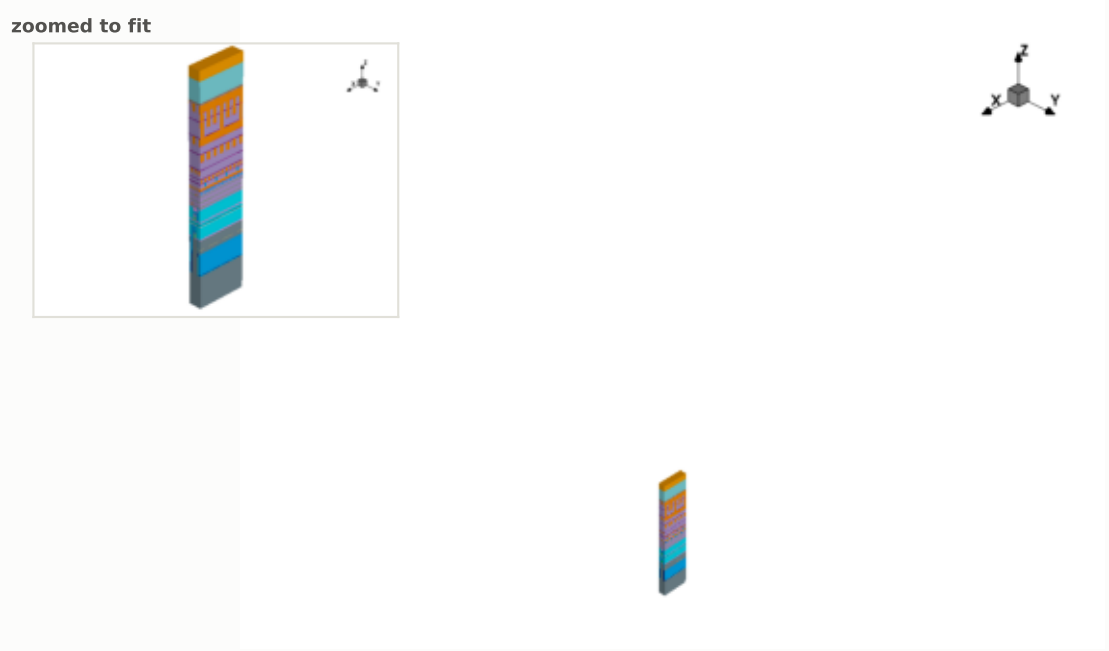

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

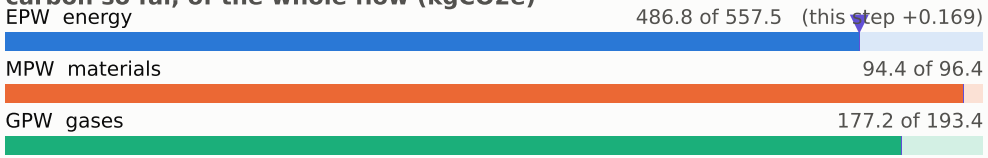

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

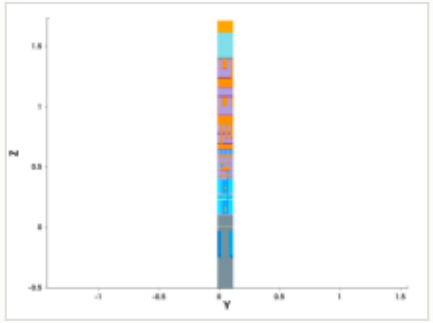

y cut at 0.049 µm

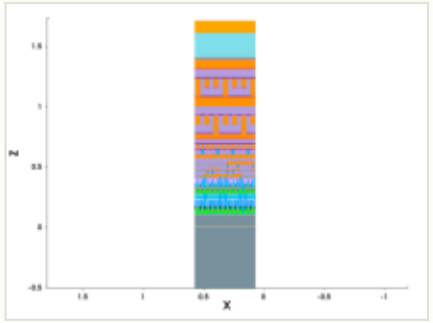

mask for this step

no mask for this step

steps by process area



materials deposited (g)

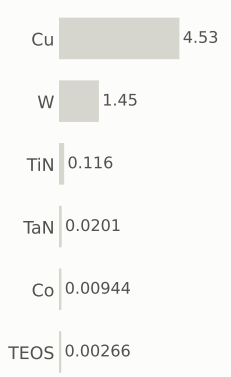

gases emitted (g)



Step #8480: CVD

depo_fill · CVD

1.31	759.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

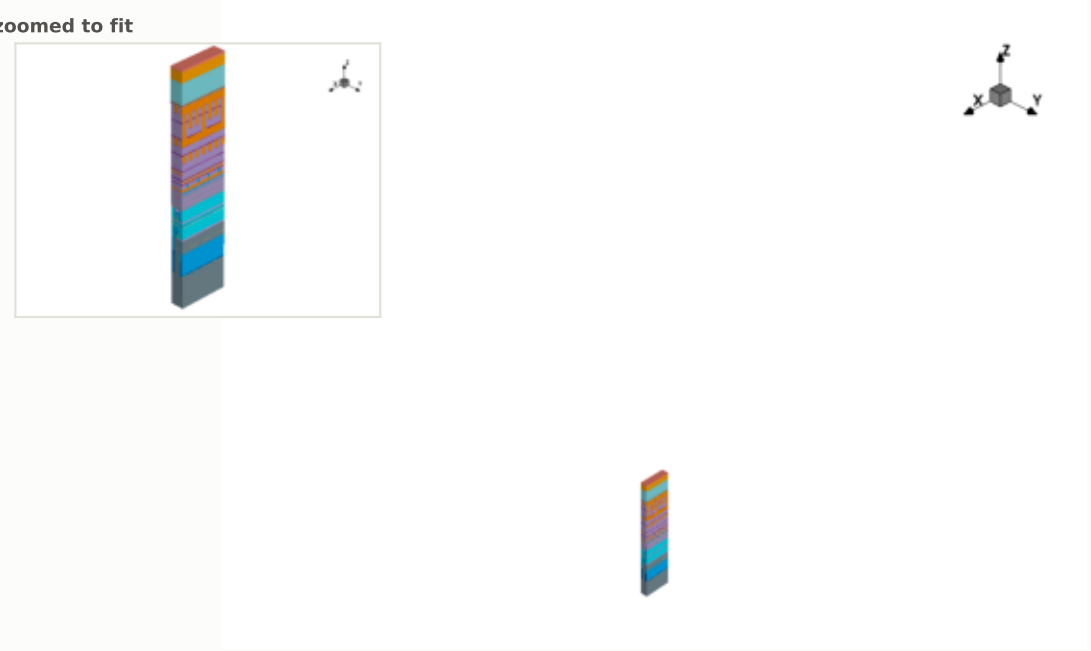

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

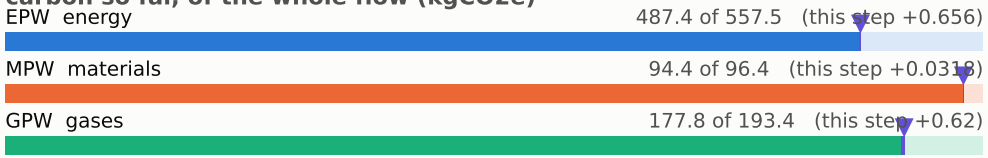

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

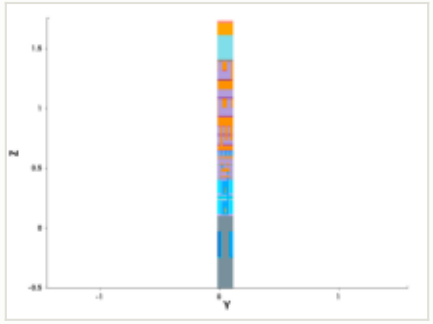

y cut at 0.049 µm

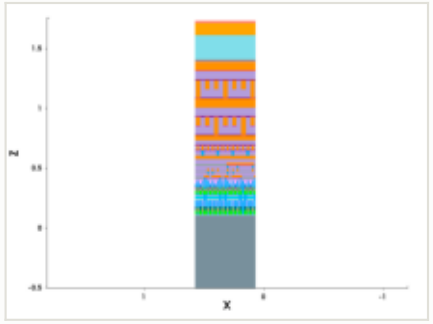

mask for this step

no mask for this step

steps by process area

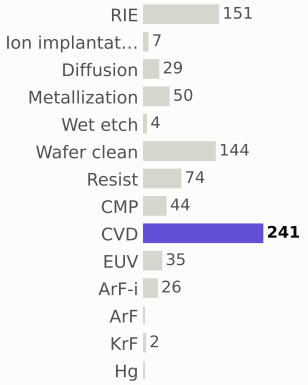

materials deposited (g)

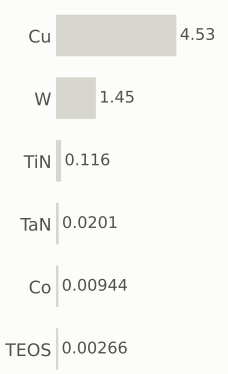

gases emitted (g)

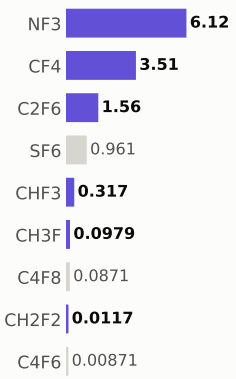

Step #8490: Wafer_clean

clean · Wafer_clean

0.169	759.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

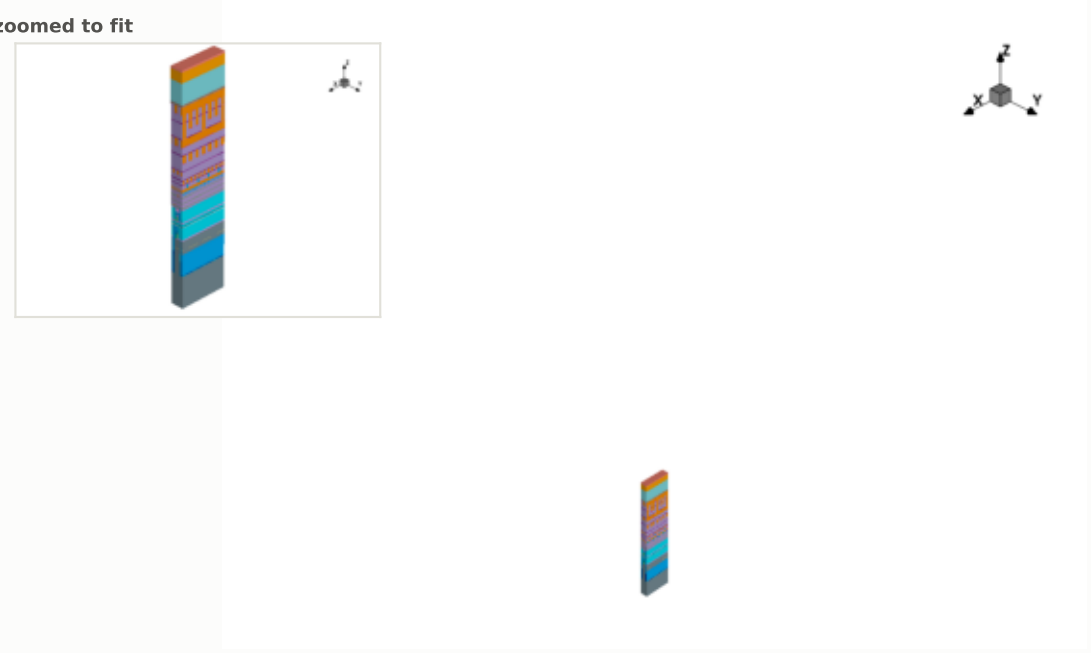

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

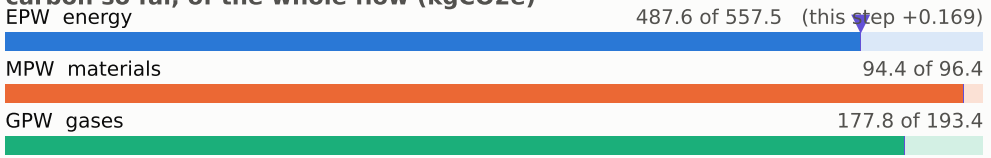

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

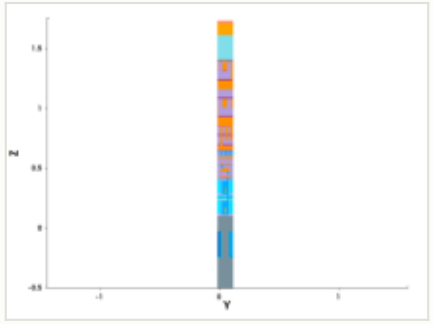

y cut at 0.049 µm

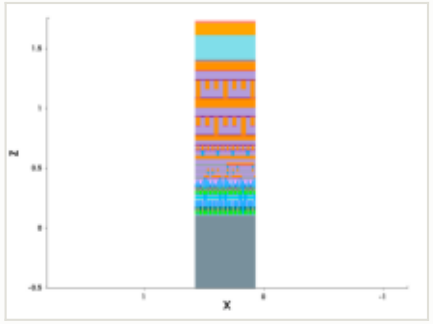

mask for this step

no mask for this step

steps by process area

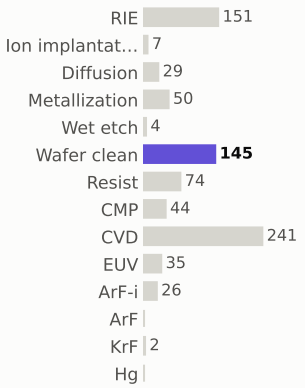

materials deposited (g)

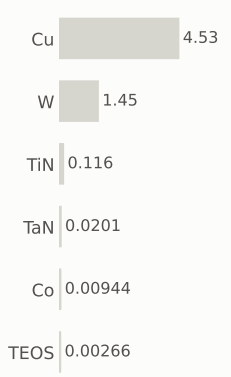

gases emitted (g)

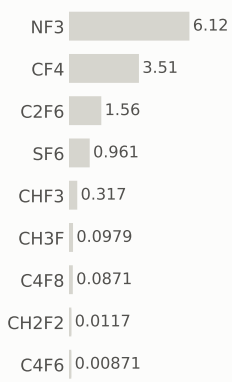

Step #8500: ArF-i

litho_patterning · ArF-i

0.217	760.0	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

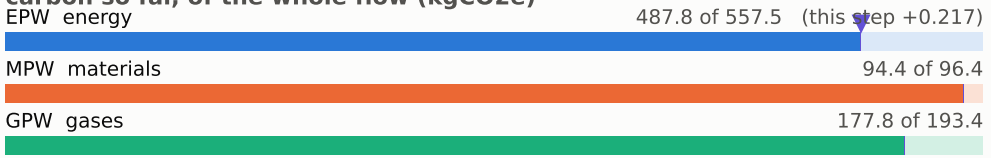

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

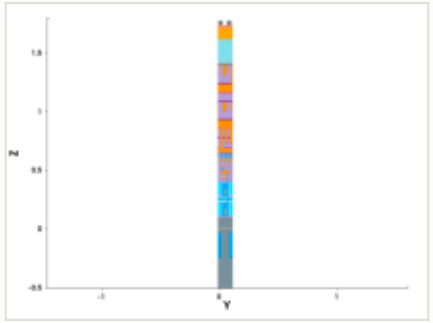

y cut at 0.049 µm

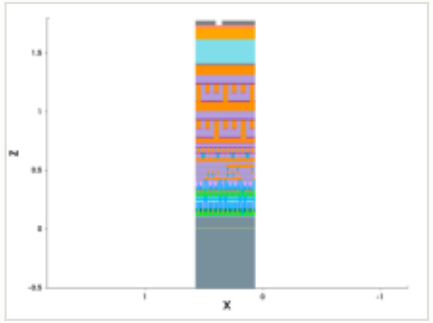

mask: layer 10671:0 (GDSII)

steps by process area

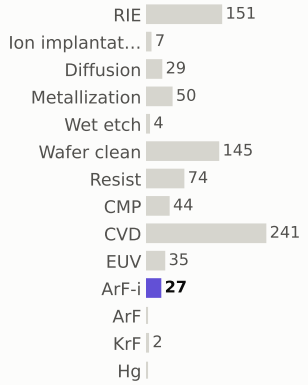

materials deposited (g)

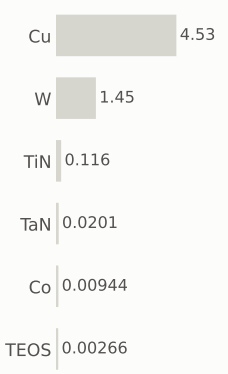

gases emitted (g)

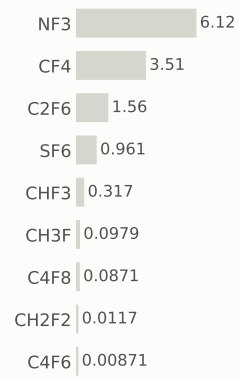

Step #8510: RIE

etch_anisotropic · RIE

1.04	761.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

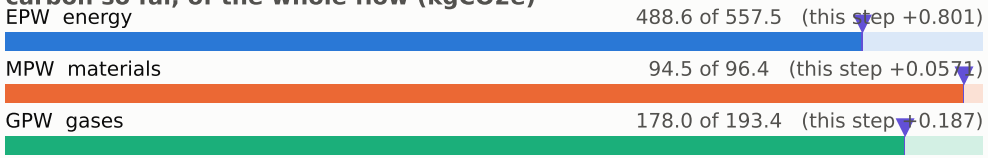

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

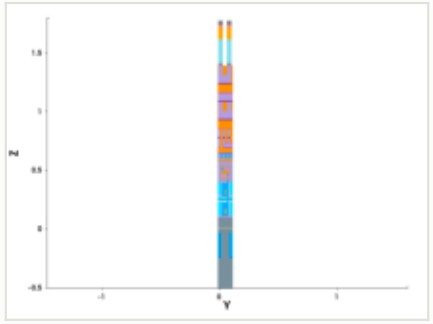

y cut at 0.049 µm

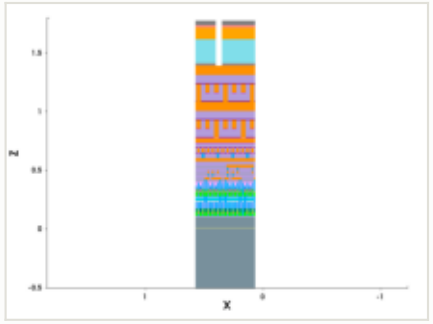

mask for this step

no mask for this step

steps by process area

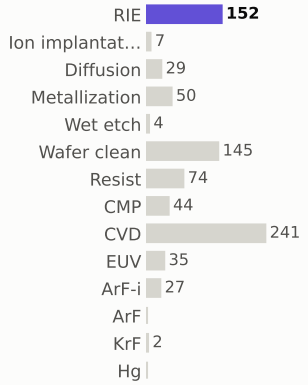

materials deposited (g)

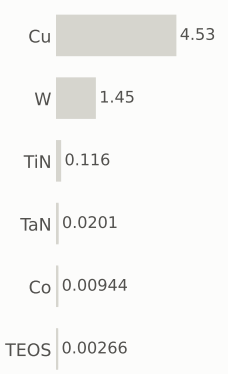

gases emitted (g)

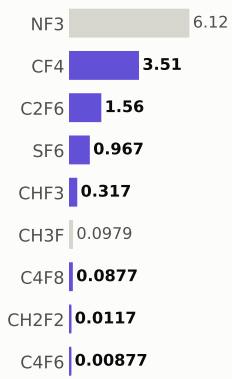

Step #8520: Wafer_clean

etch_strip · Wafer_clean

0.169	761.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

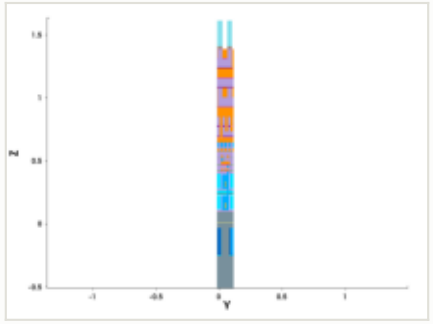

y cut at 0.049 µm

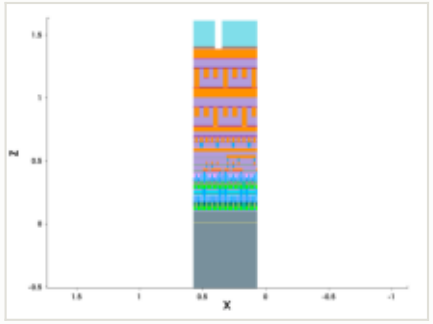

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

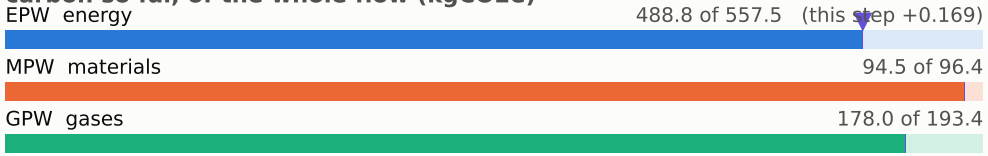

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

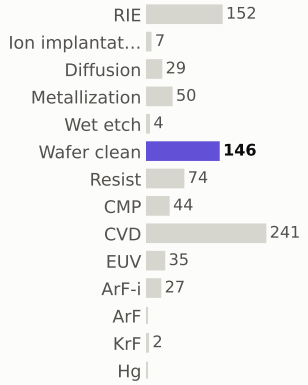

materials deposited (g)

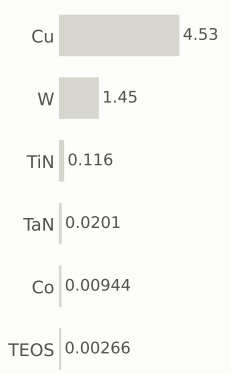

gases emitted (g)

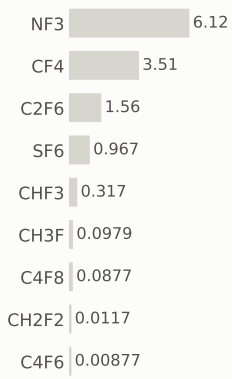

Step #8530: Resist

depo_fill · Resist

0.169	761.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

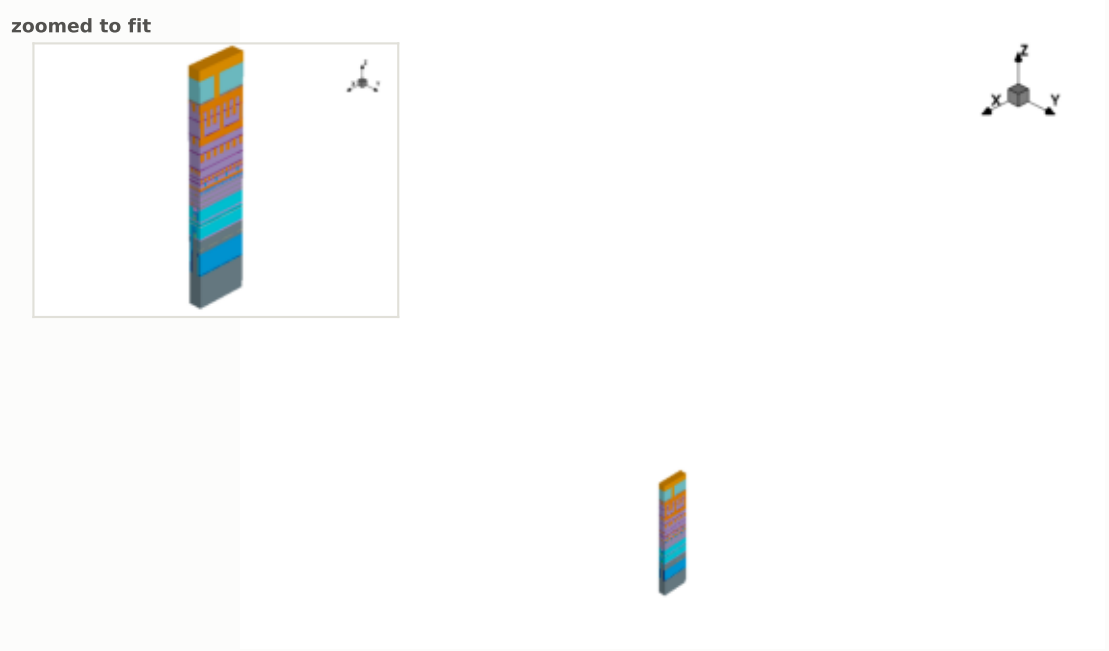

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

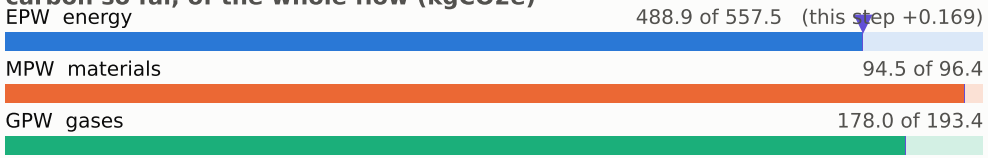

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

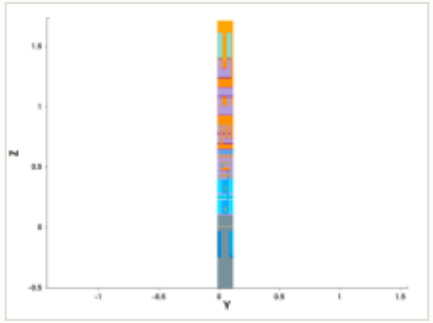

y cut at 0.049 µm

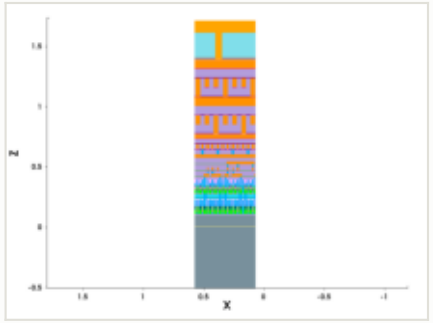

mask for this step

no mask for this step

steps by process area

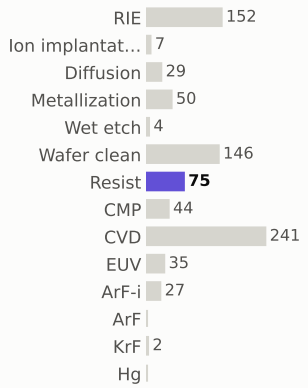

materials deposited (g)

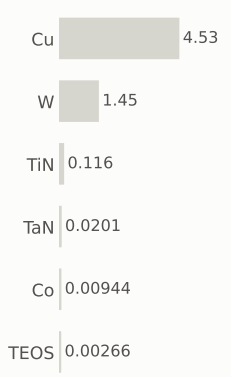

gases emitted (g)

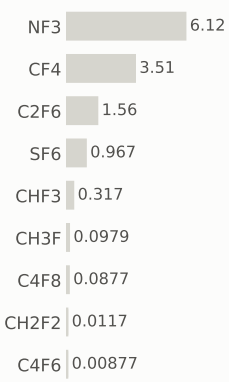

Step #8540: CVD

depo_fill · CVD

1.31	762.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

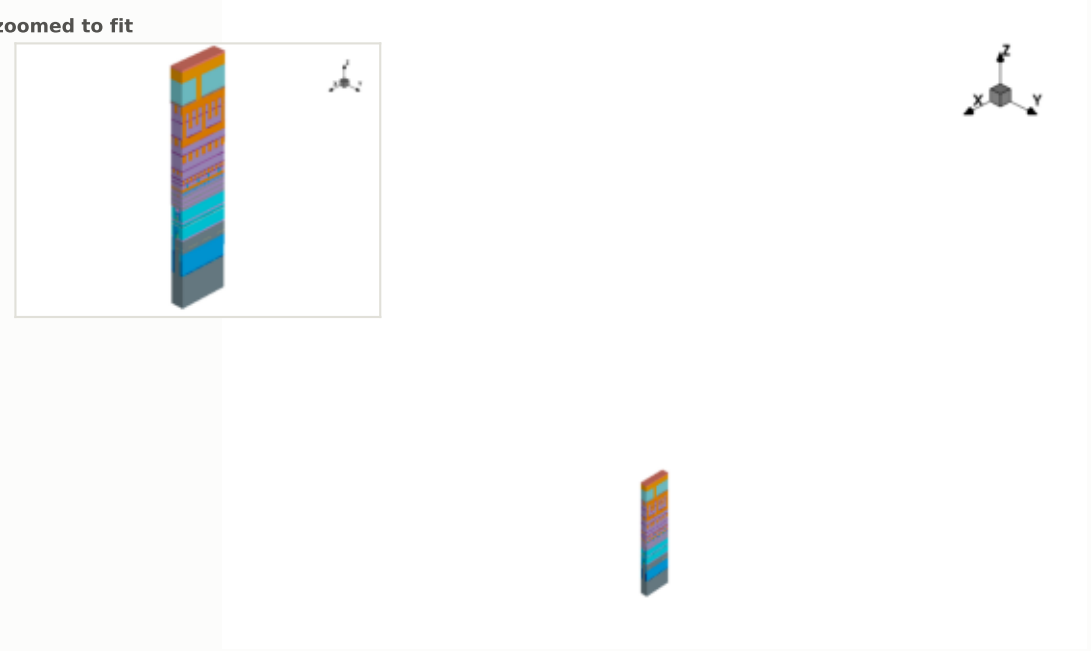

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

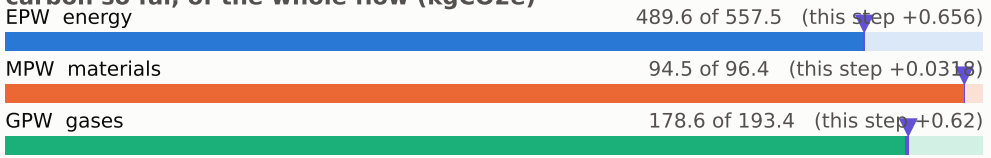

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

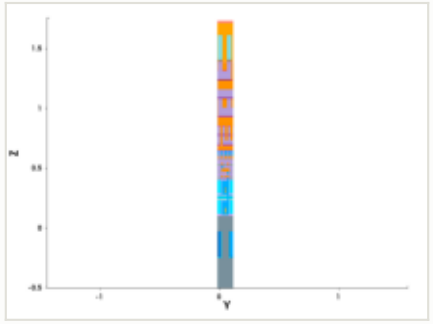

y cut at 0.049 µm

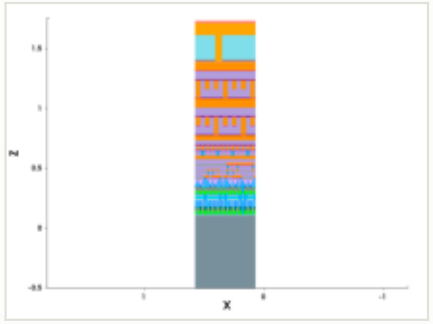

mask for this step

no mask for this step

steps by process area

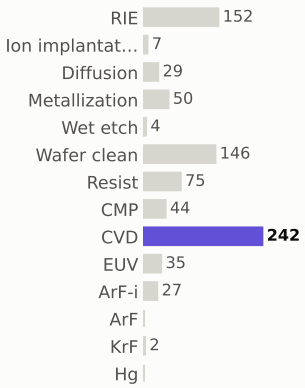

materials deposited (g)

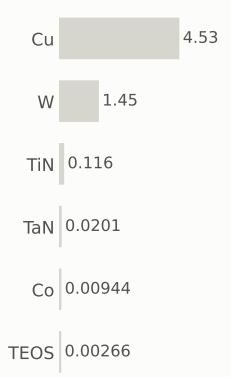

gases emitted (g)

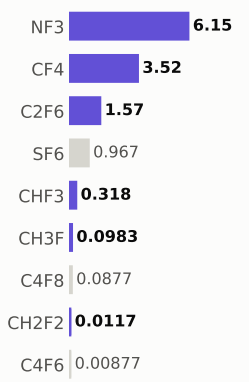

Step #8550: Wafer_clean

clean · Wafer_clean

0.169	762.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

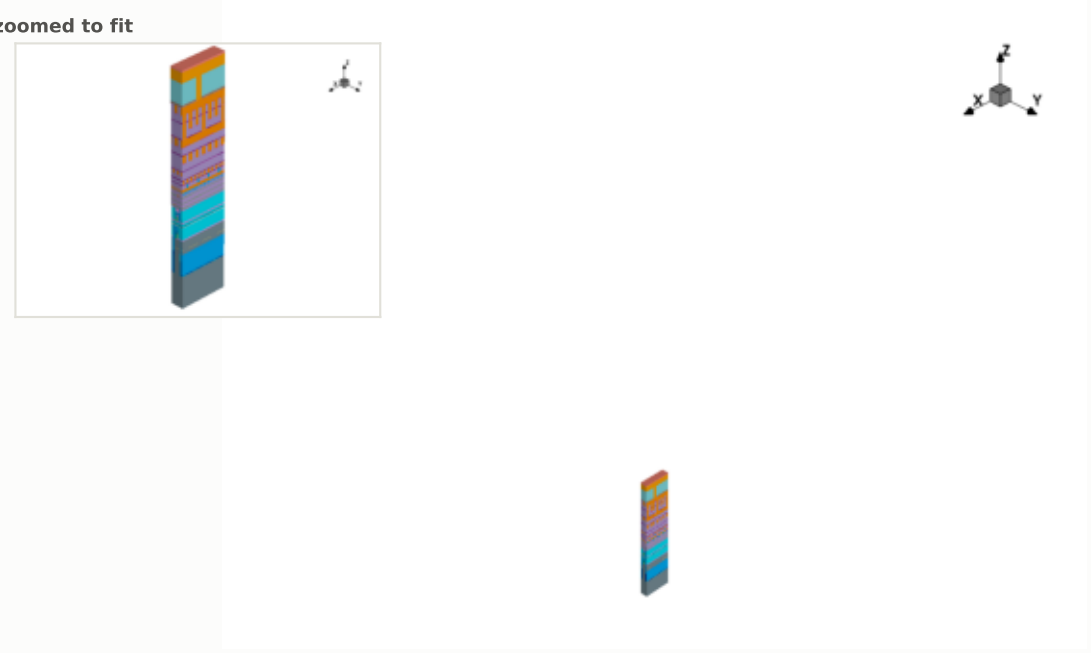

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

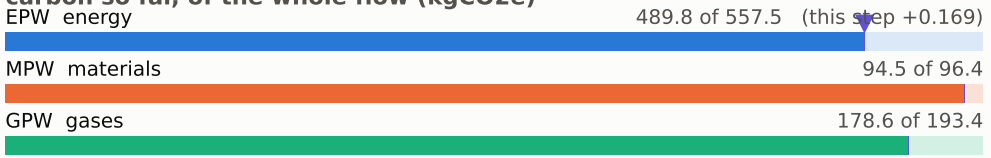

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

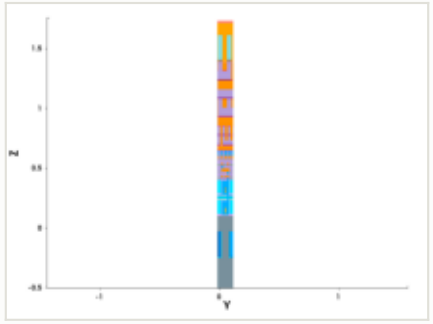

y cut at 0.049 µm

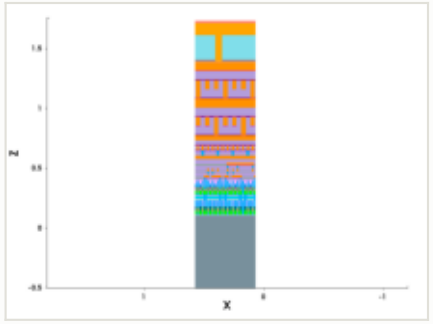

mask for this step

no mask for this step

steps by process area

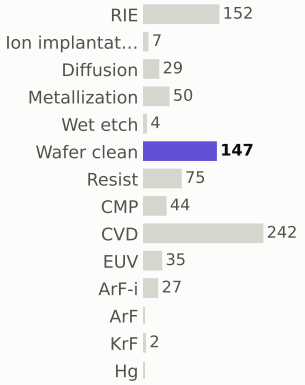

materials deposited (g)

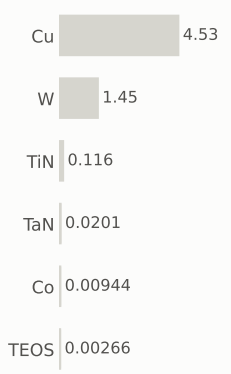

gases emitted (g)

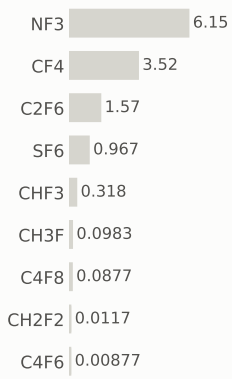

Step #8560: ArF-i

litho_patterning · ArF-i

0.217	763.1	0.026%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

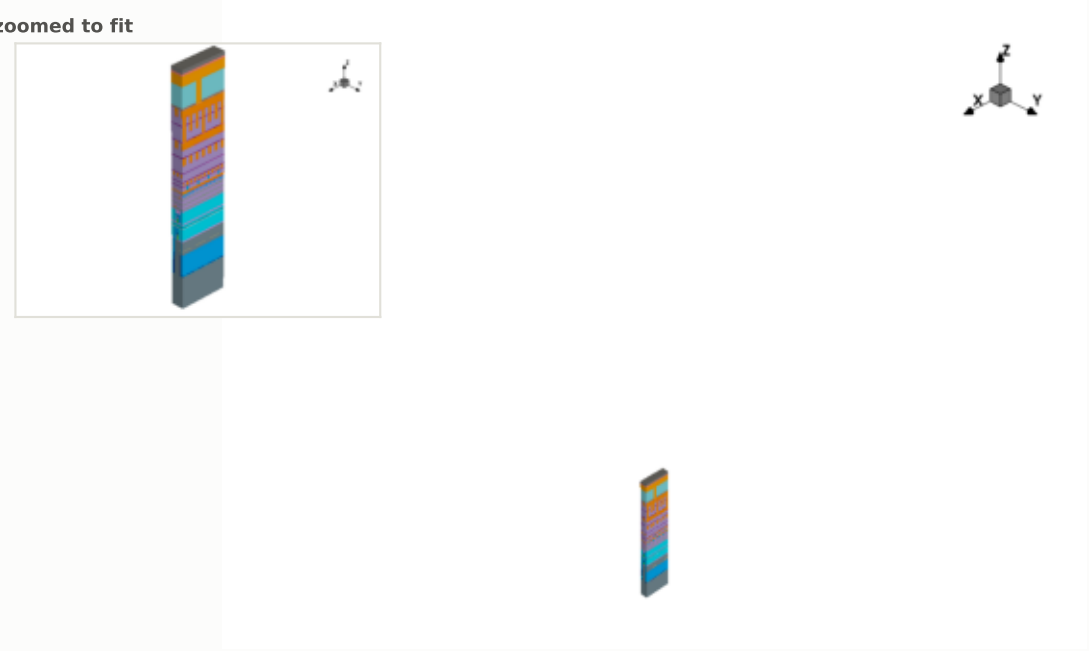

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

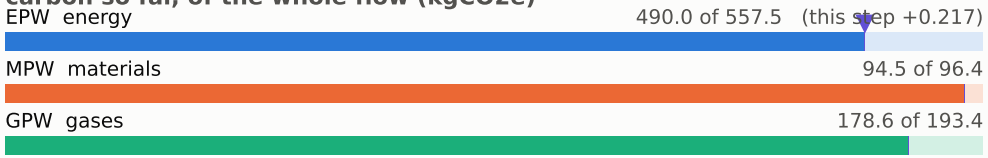

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

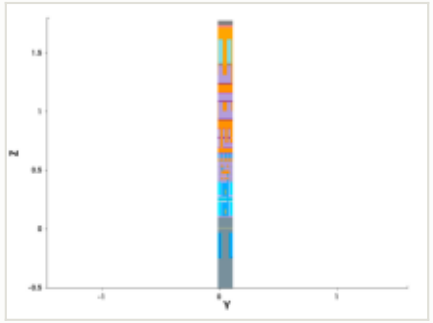

y cut at 0.049 µm

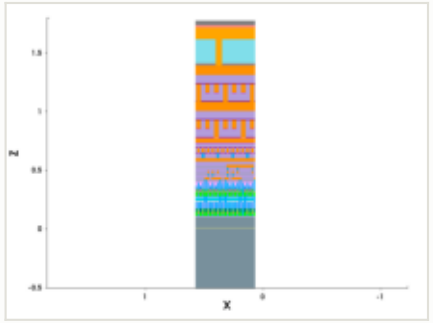

mask: layer 10672:0 (GDSII)

nothing in the clip window

steps by process area

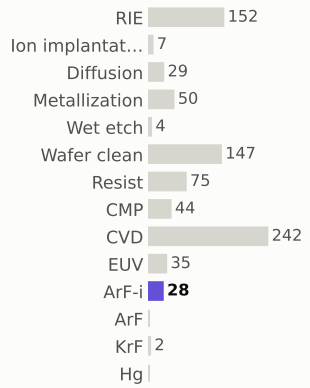

materials deposited (g)

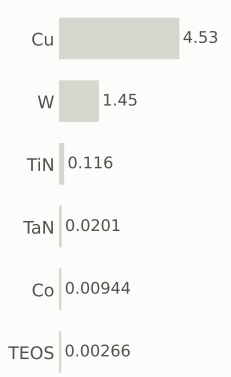

gases emitted (g)

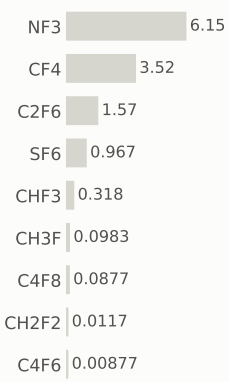

Step #8570: RIE

etch_anisotropic · RIE

1.04	764.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

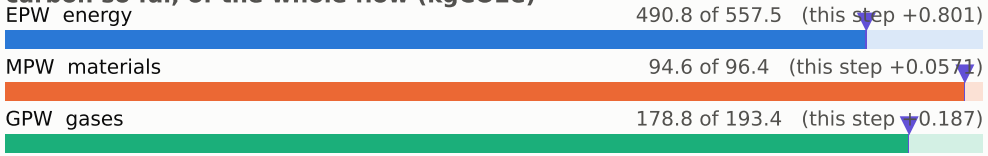

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

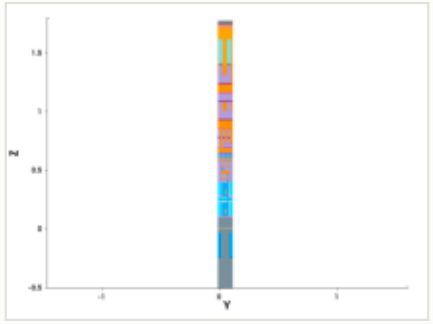

y cut at 0.049 µm

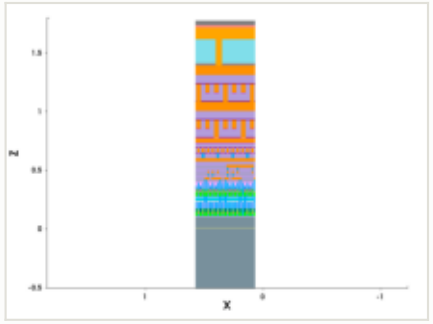

mask for this step

no mask for this step

steps by process area

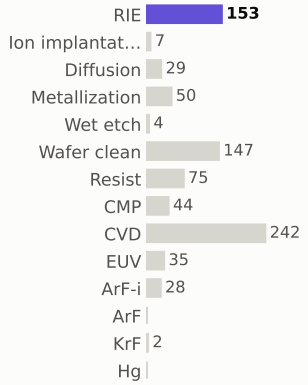

materials deposited (g)

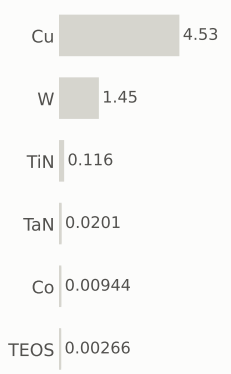

gases emitted (g)

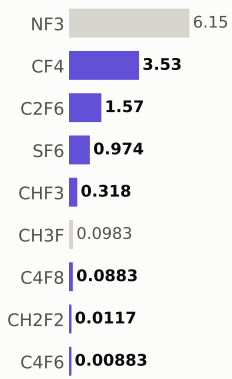

Step #8580: Wafer_clean

etch_strip · Wafer_clean

0.169	764.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

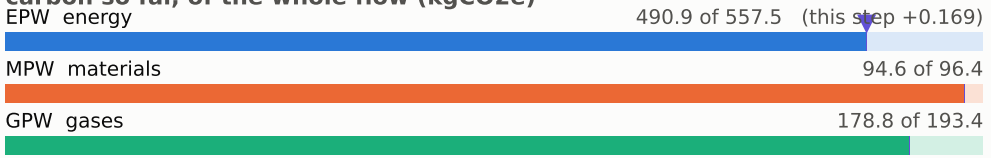

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

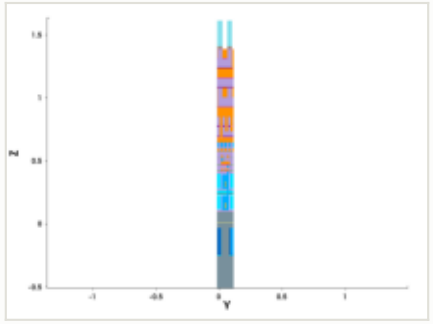

y cut at 0.049 µm

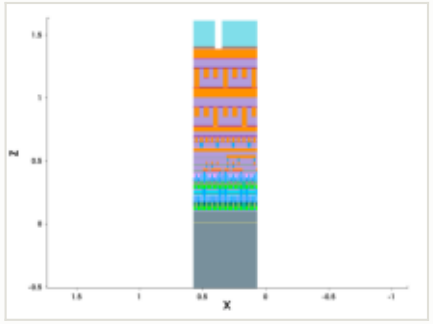

mask for this step

no mask for this step

steps by process area

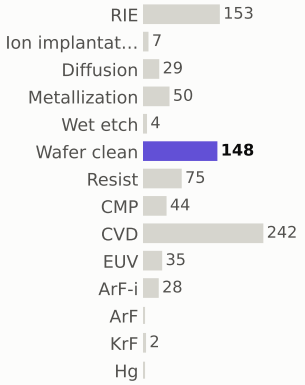

materials deposited (g)

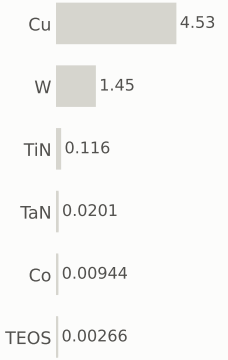

gases emitted (g)

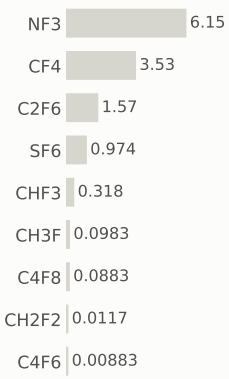

Step #8590: Metallization

depo_ellipsoidal · Metallization

1.2	765.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

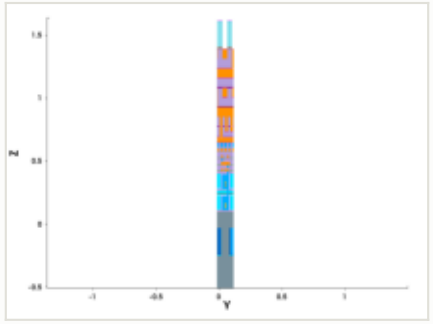

y cut at 0.049 µm

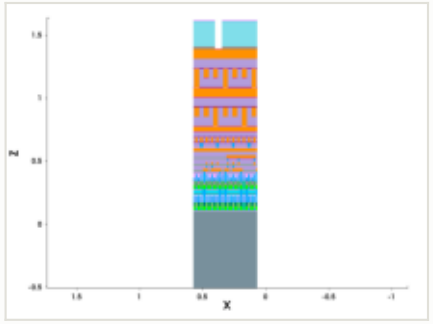

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

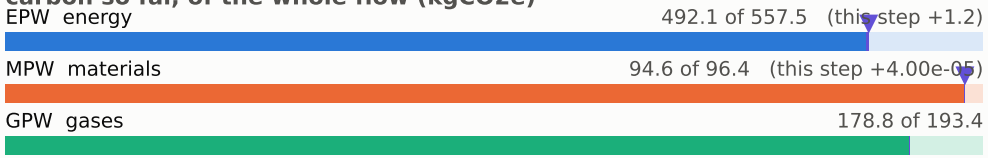

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

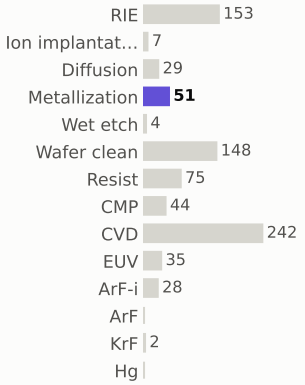

materials deposited (g)

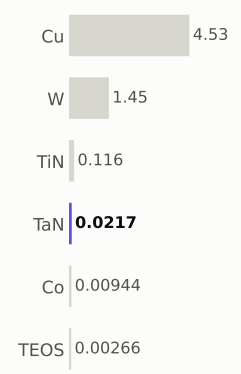

gases emitted (g)

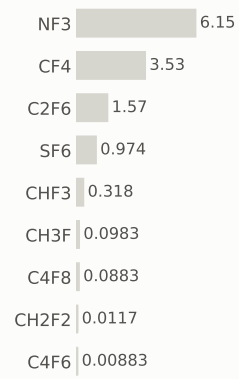

Step #8600: Metallization

depo_fill · Metallization

1.21	766.7	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

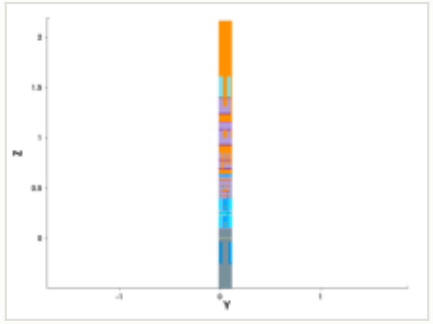

y cut at 0.049 µm

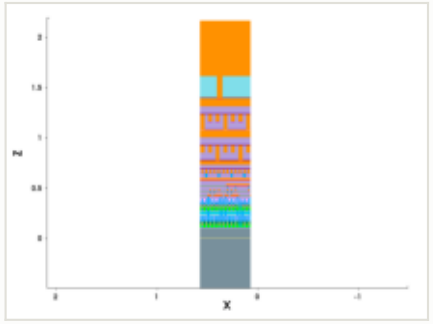

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Cu	EPW tool	0.86 kgCO2e
thickness	0.55 µm	EPW overhead	0.344 kgCO2e
material GWP	6.09011 gCO2e/g	MPW	0.00212 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

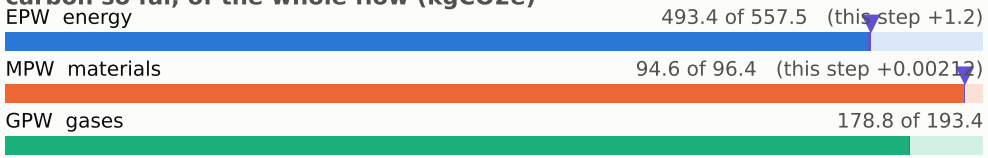

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

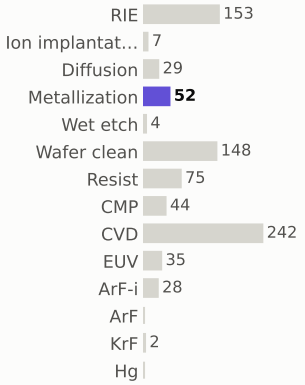

materials deposited (g)

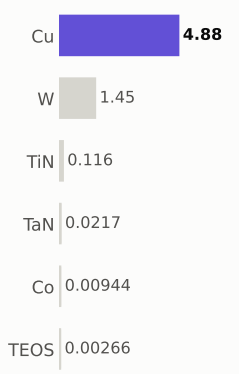

gases emitted (g)



Step #8610: Diffusion

treatment · Diffusion

0.801	767.5	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

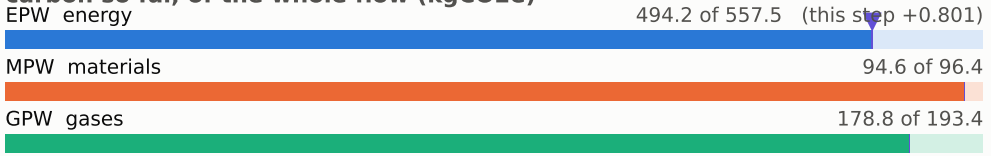

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

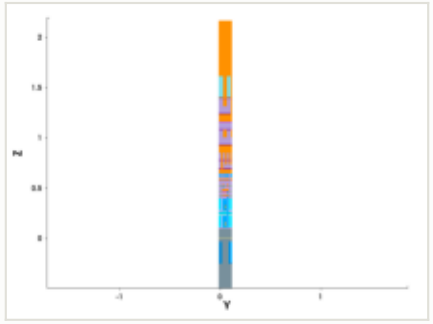

y cut at 0.049 µm

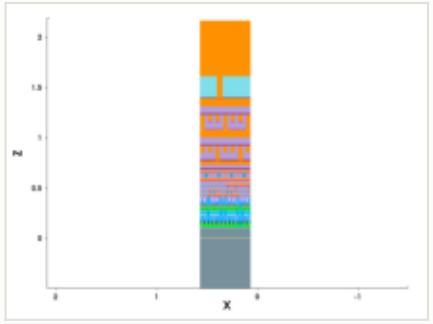

mask for this step

no mask for this step

steps by process area

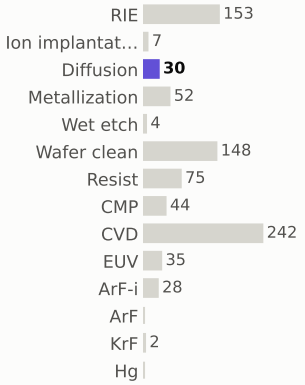

materials deposited (g)

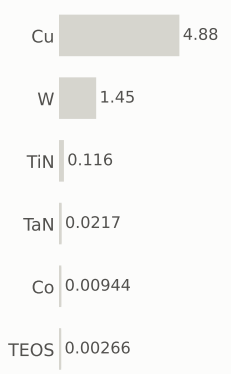

gases emitted (g)

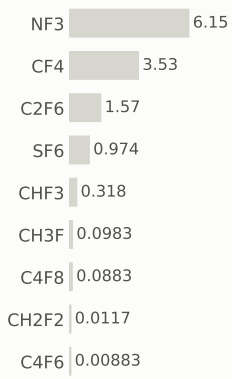

Step #8620: CMP

etch_cmp · CMP

0.169	767.6	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

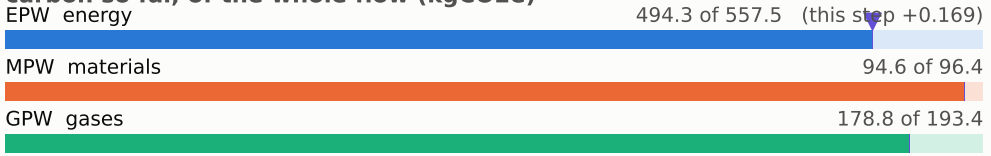

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

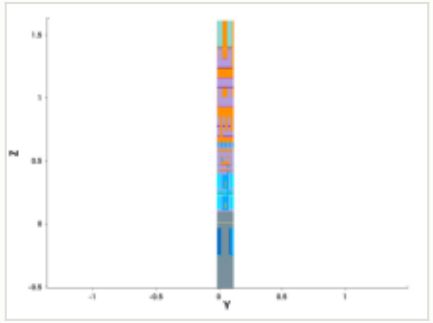

y cut at 0.049 µm

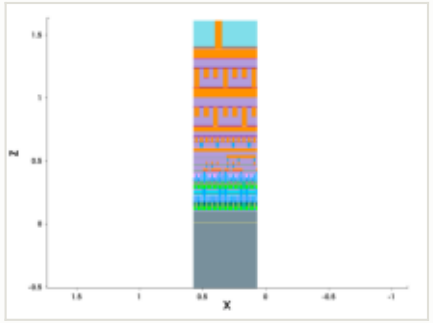

mask for this step

no mask for this step

steps by process area

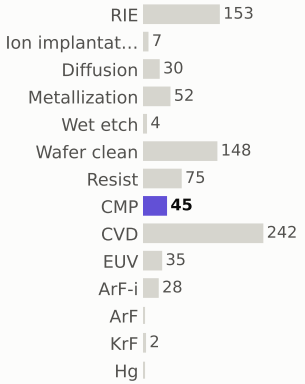

materials deposited (g)

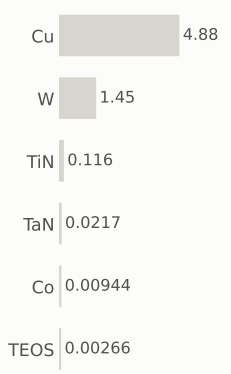

gases emitted (g)

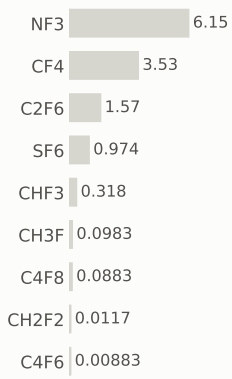

Step #8630: ArF

litho_patterning · ArF

0.199	767.8	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

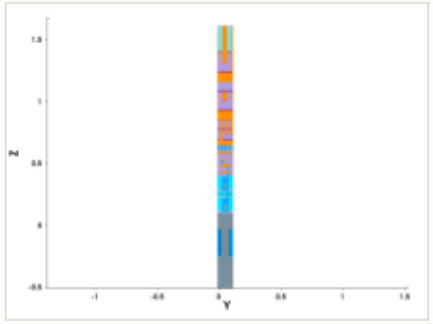

y cut at 0.049 µm

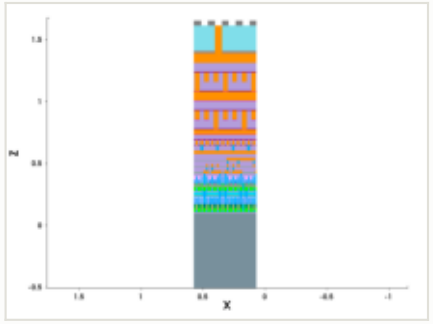

mask: layer 70:0 (GDSII)

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

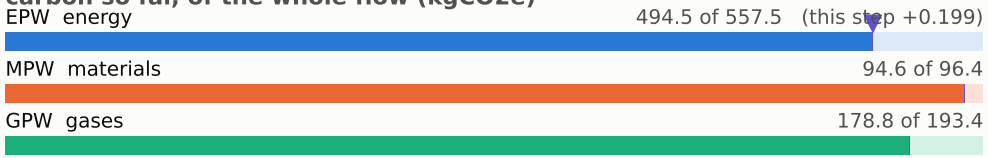

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

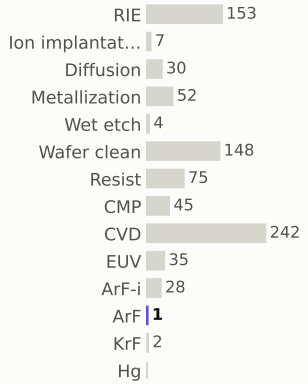

materials deposited (g)



gases emitted (g)

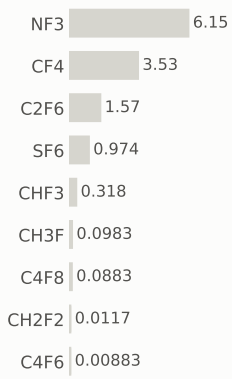

Step #8640: RIE

etch_anisotropic · RIE

1.04	768.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

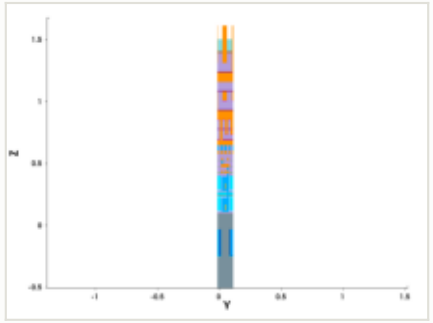

y cut at 0.049 µm

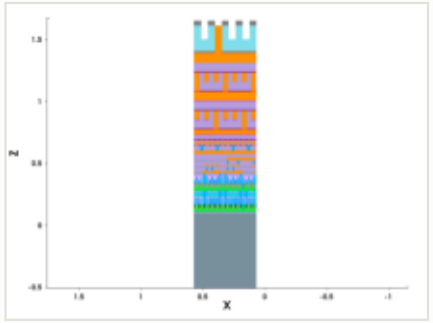

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

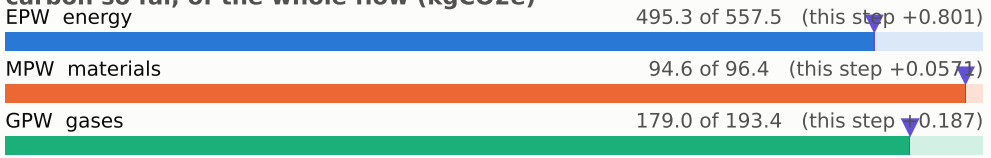

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

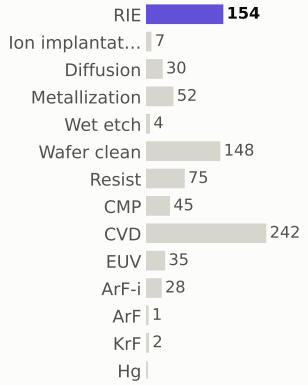

materials deposited (g)

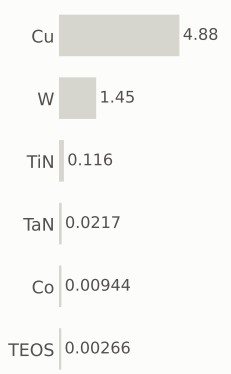

gases emitted (g)

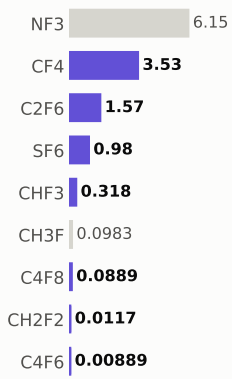

Step #8650: Wafer_clean

etch_strip · Wafer_clean

0.169	769.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

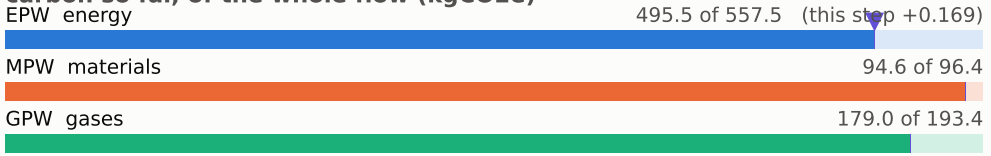

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

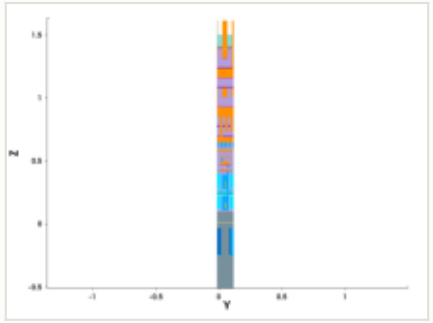

y cut at 0.049 µm

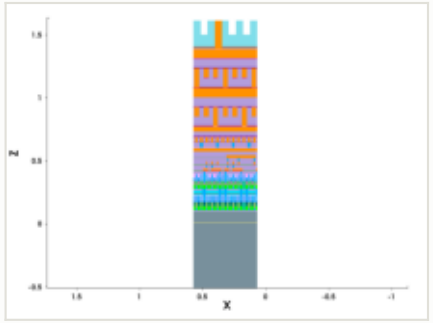

mask for this step

no mask for this step

steps by process area

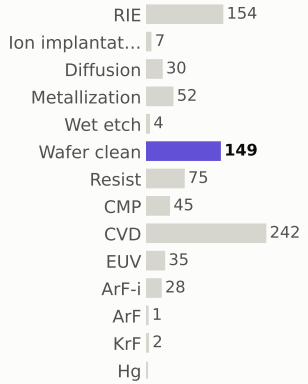

materials deposited (g)

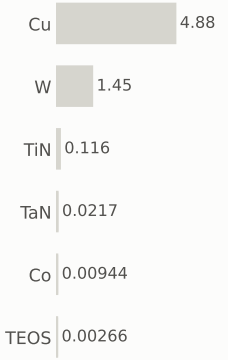

gases emitted (g)

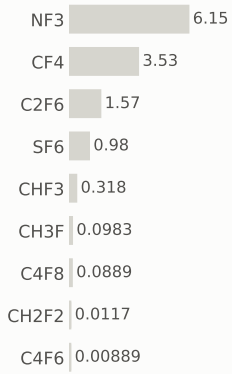

Step #8660: Metallization

depo_ellipsoidal · Metallization

1.2	770.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

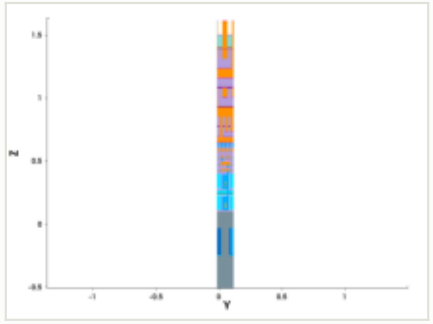

y cut at 0.049 µm

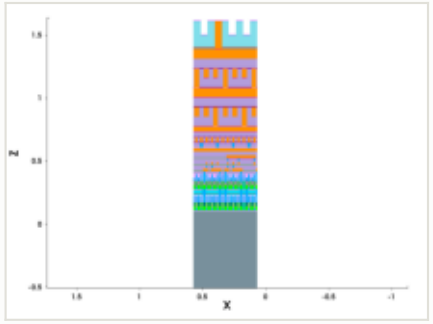

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

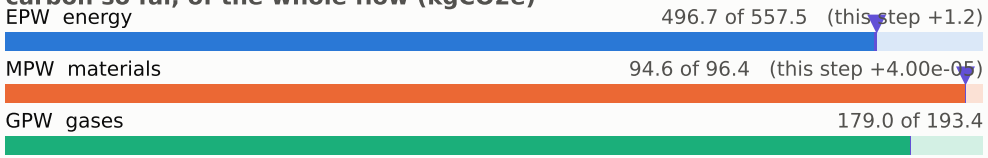

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

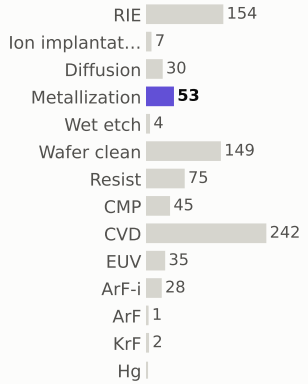

materials deposited (g)

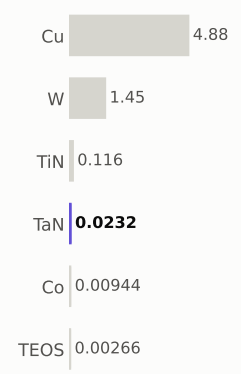

gases emitted (g)

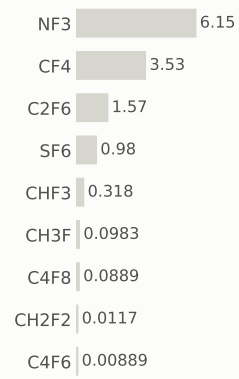

Step #8670: Metallization

depo_fill · Metallization

1.21	771.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Cu	EPW tool	0.86 kgCO2e
thickness	0.55 µm	EPW overhead	0.344 kgCO2e
material GWP	6.09011 gCO2e/g	MPW	0.00212 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

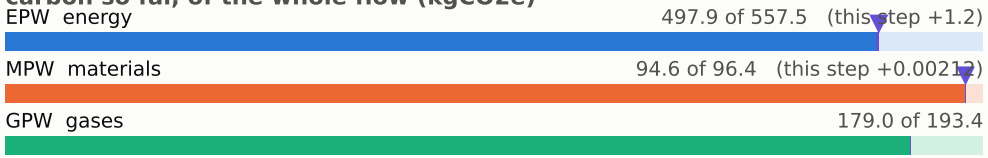

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

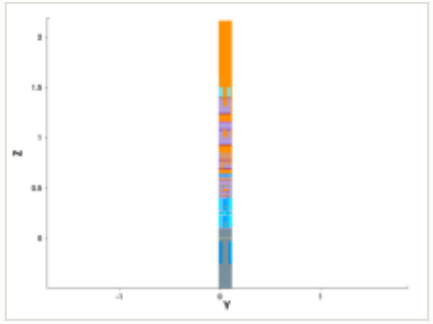

y cut at 0.049 µm

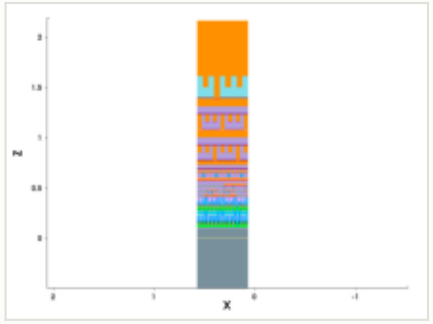

mask for this step

no mask for this step

steps by process area

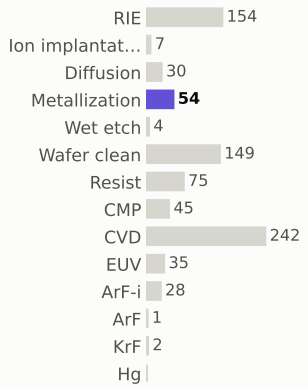

materials deposited (g)

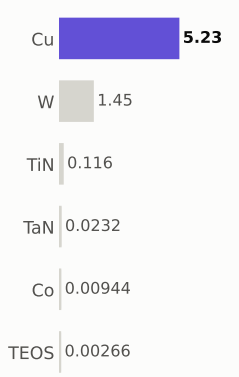

gases emitted (g)

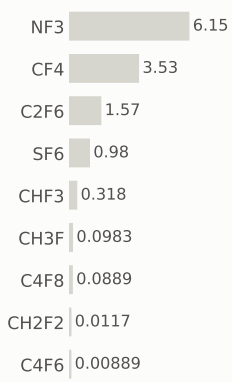

Step #8680: Diffusion

treatment · Diffusion

0.801	772.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

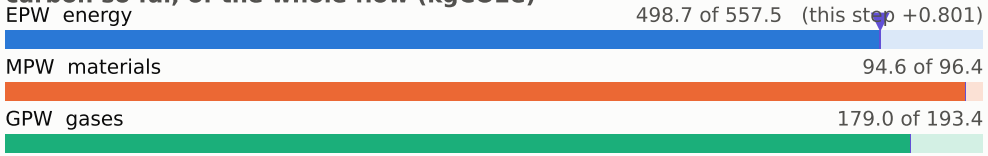

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

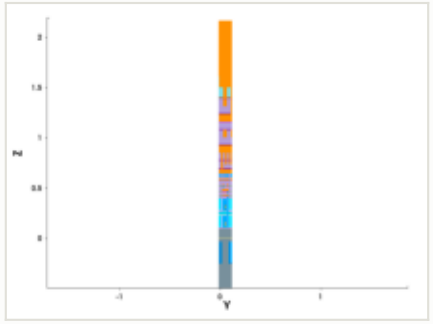

y cut at 0.049 µm

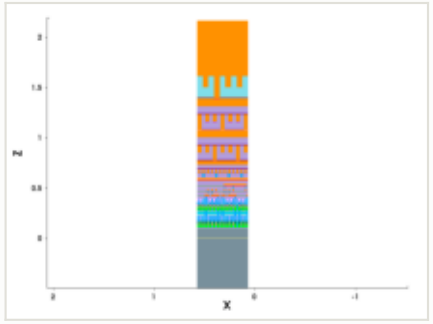

mask for this step

no mask for this step

steps by process area

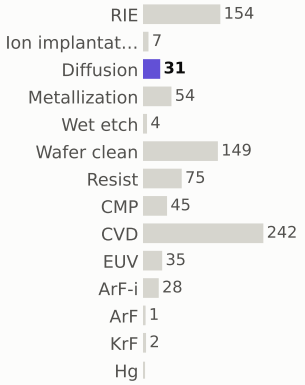

materials deposited (g)

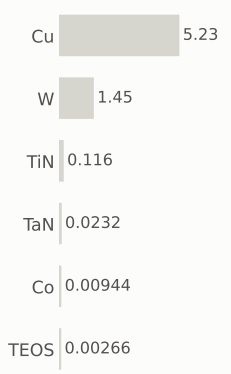

gases emitted (g)

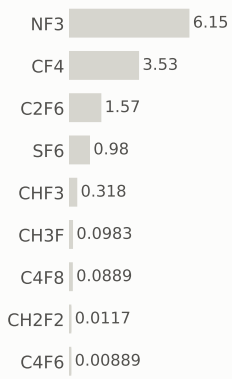

Step #8690: CMP

etch_cmp · CMP

0.169	772.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

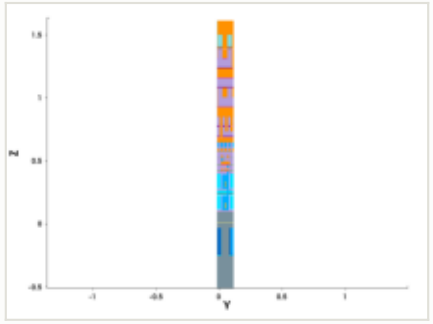

y cut at 0.049 µm

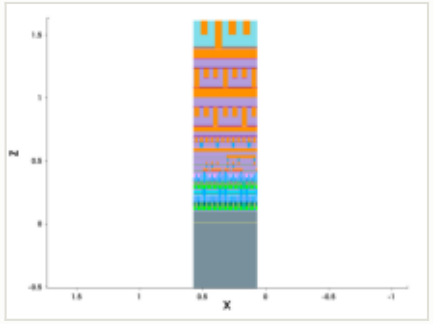

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

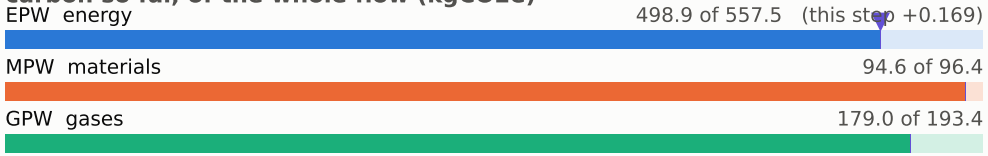

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

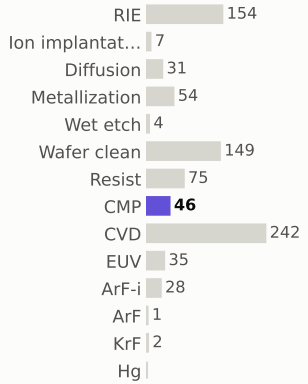

materials deposited (g)



gases emitted (g)

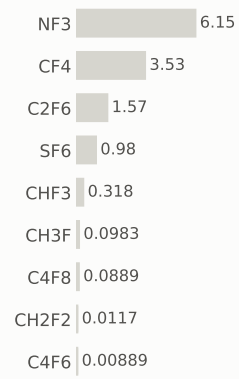

Step #8710: CVD

depo_fill · CVD

1.31	773.7	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

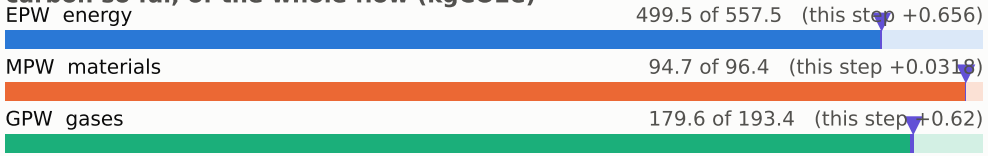

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

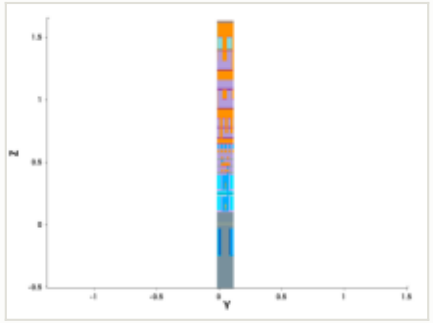

y cut at 0.049 µm

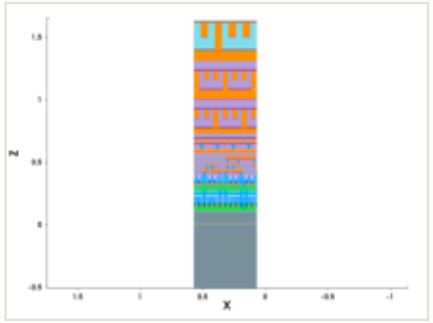

mask for this step

no mask for this step

steps by process area

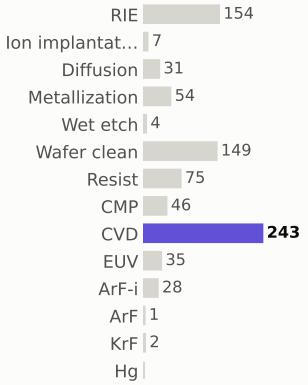

materials deposited (g)

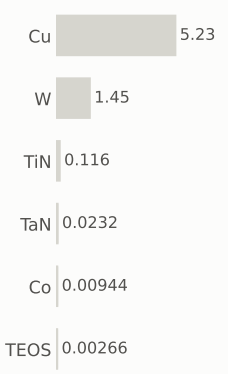

gases emitted (g)



Step #8720: CVD

depo_fill · CVD

1.31	775.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.204 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

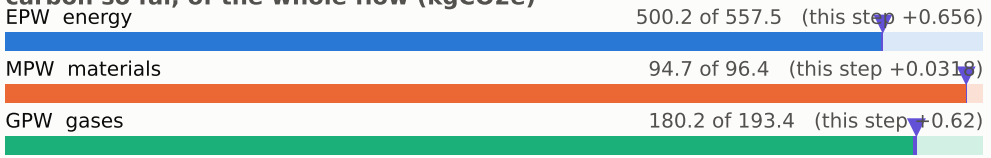

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

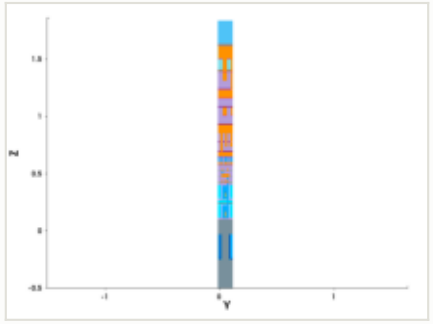

y cut at 0.049 µm

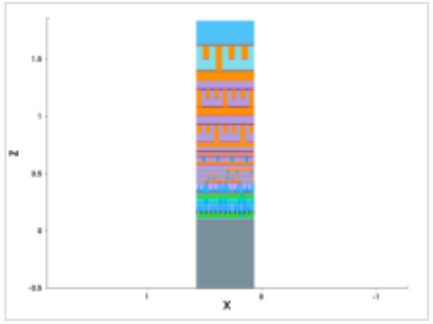

mask for this step

no mask for this step

steps by process area

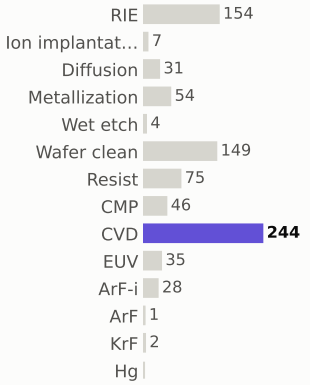

materials deposited (g)

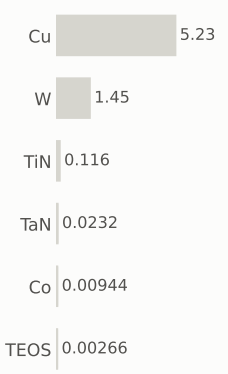

gases emitted (g)

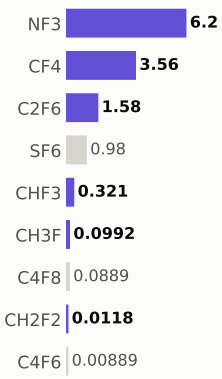

Step #8730: ArF

litho_patterning · ArF

0.199	775.3	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

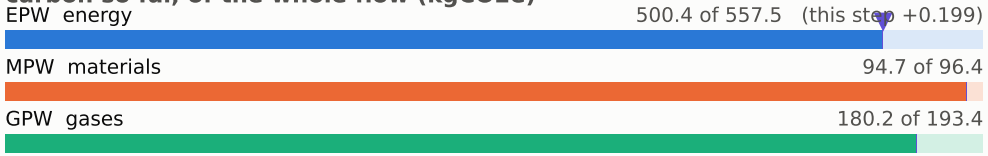

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

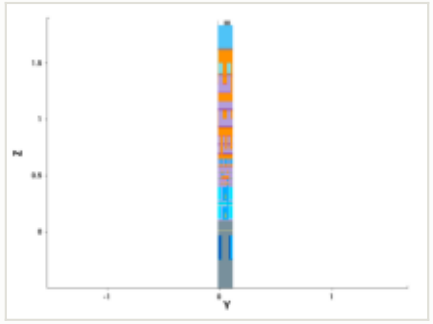

y cut at 0.049 µm

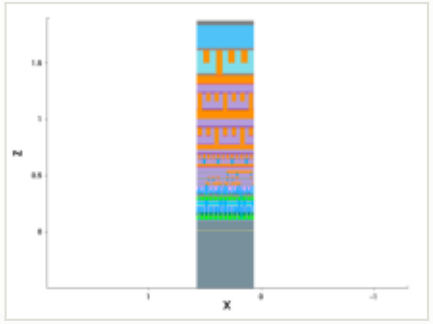

mask: layer 75:0 (GDSII)

steps by process area

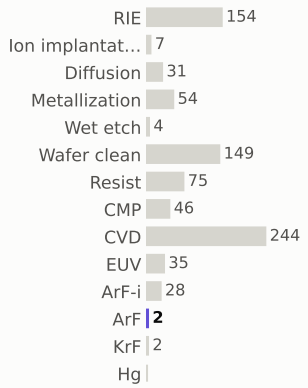

materials deposited (g)

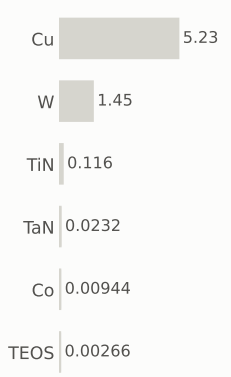

gases emitted (g)



Step #8740: RIE

etch_anisotropic · RIE

1.04	776.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

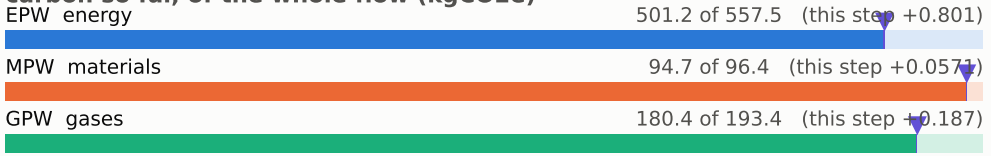

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

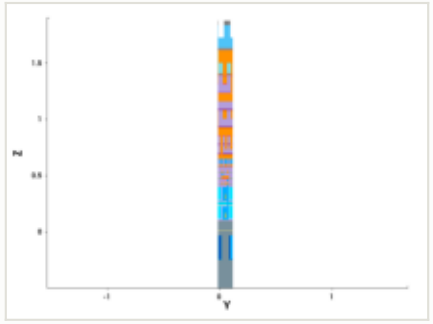

y cut at 0.049 µm

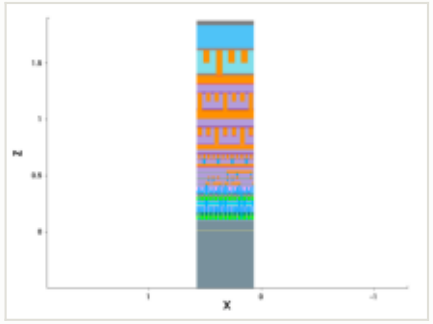

mask for this step

no mask for this step

steps by process area

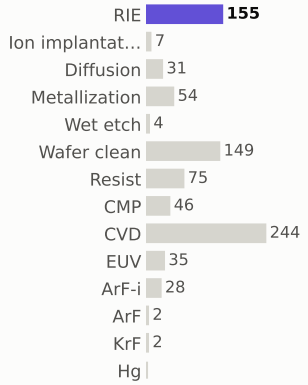

materials deposited (g)

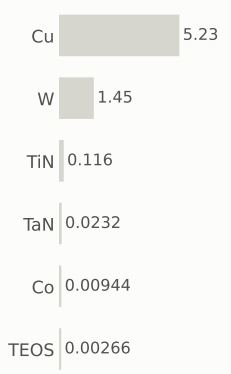

gases emitted (g)

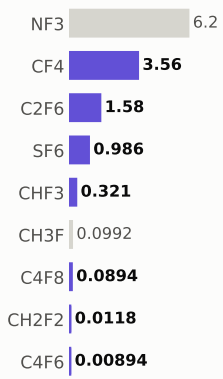

Step #8750: Wafer_clean

etch_strip · Wafer_clean

0.169	776.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

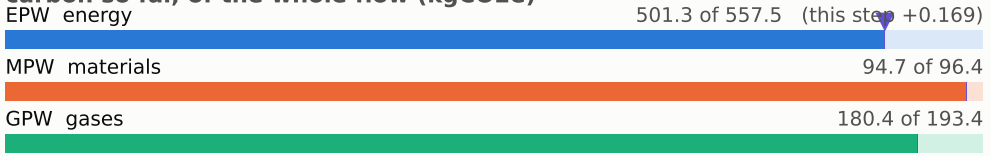

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

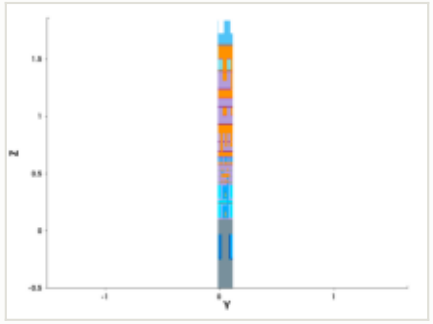

y cut at 0.049 µm

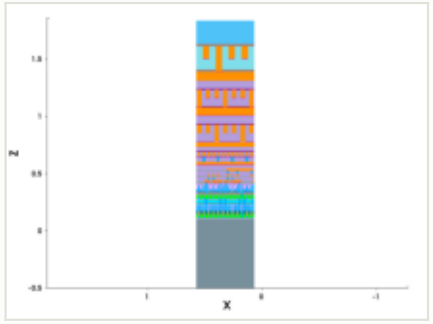

mask for this step

no mask for this step

steps by process area

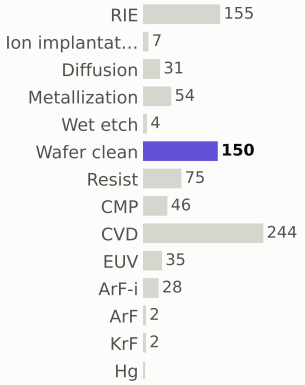

materials deposited (g)

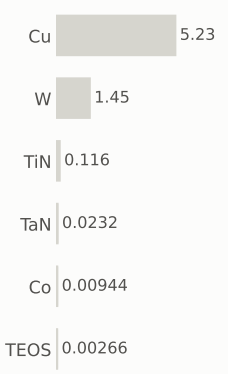

gases emitted (g)

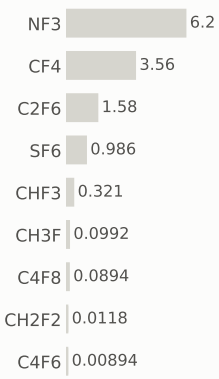

Step #8760: RIE

clean · RIE

1.04	777.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

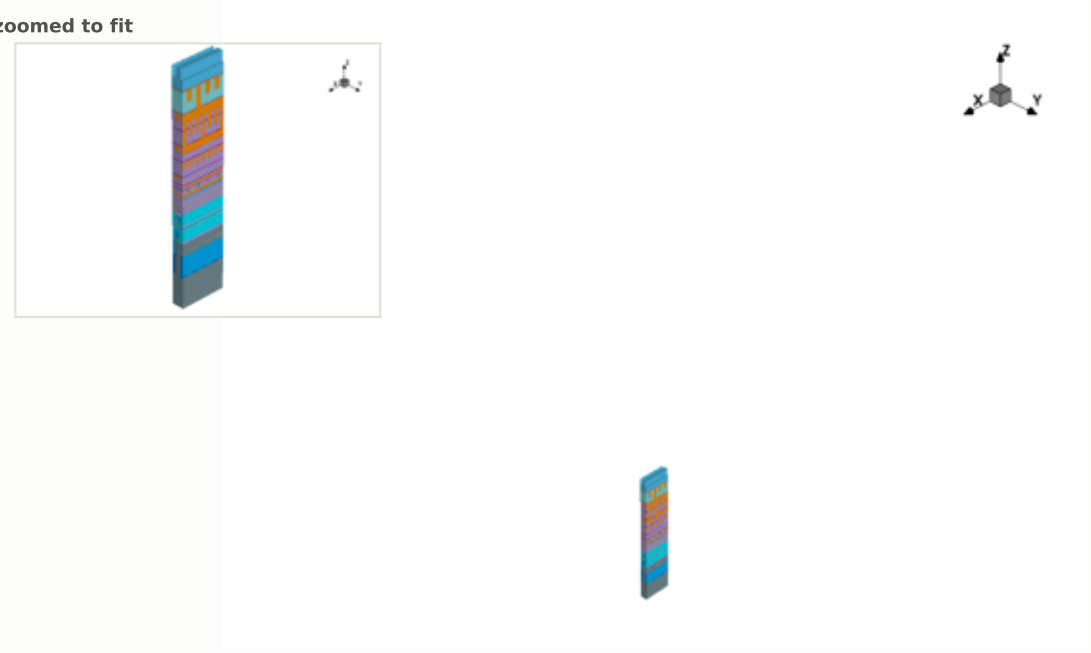

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

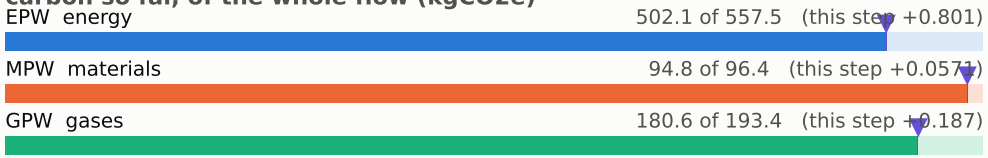

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

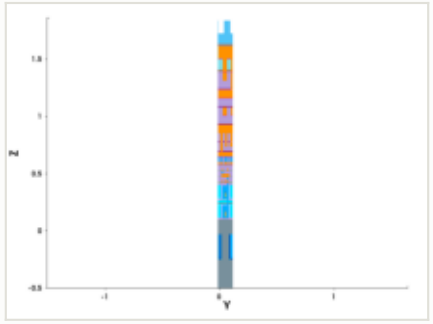

y cut at 0.049 µm

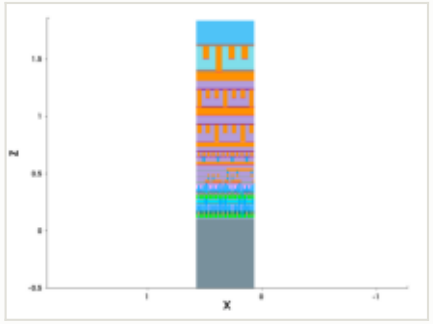

mask for this step

no mask for this step

steps by process area

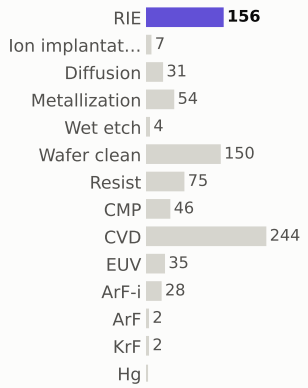

materials deposited (g)

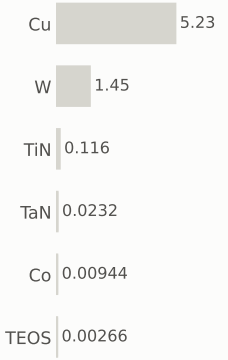

gases emitted (g)

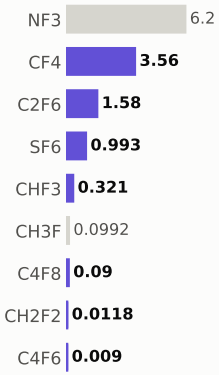

Step #8770: Wafer_clean

clean · Wafer_clean

0.169	777.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

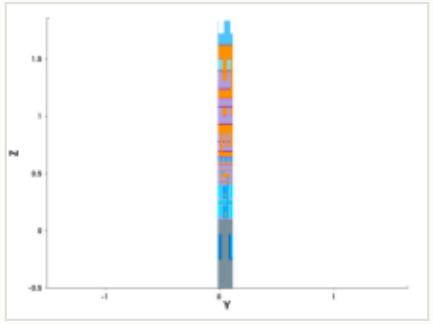

y cut at 0.049 µm

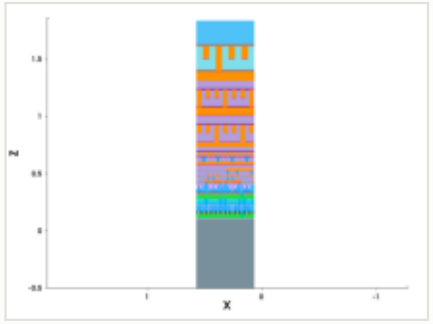

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

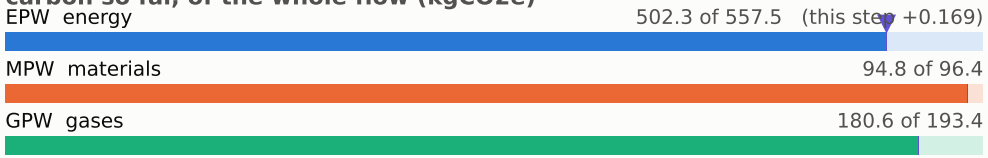

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

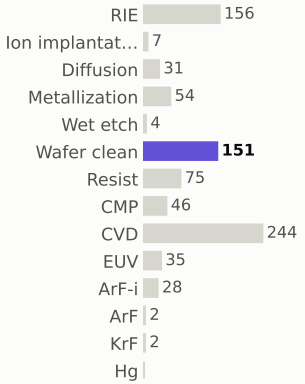

materials deposited (g)



gases emitted (g)

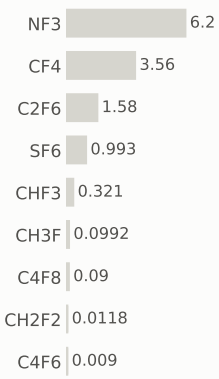

Step #8780: ArF

litho_patterning · ArF

0.199	777.9	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

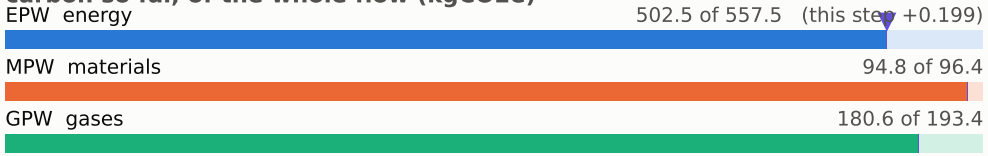

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

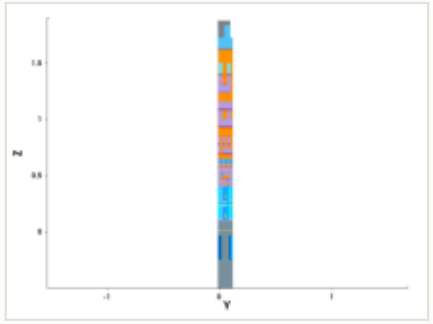

y cut at 0.049 µm

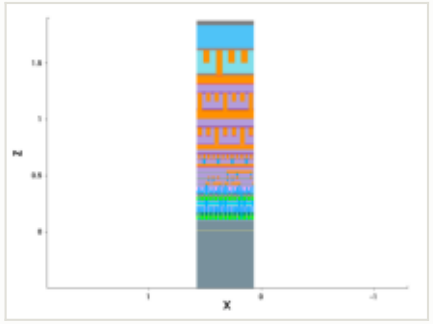

mask: layer 72:0 (GDSII)

steps by process area

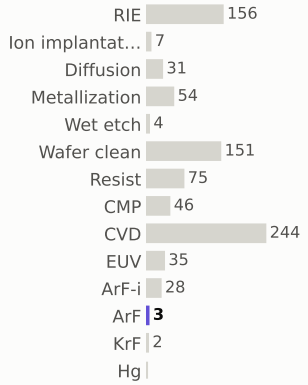

materials deposited (g)

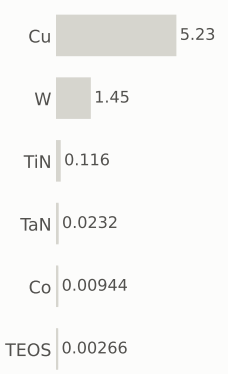

gases emitted (g)

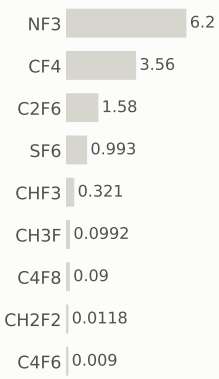

Step #8790: RIE

etch_anisotropic · RIE

1.04	778.9	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

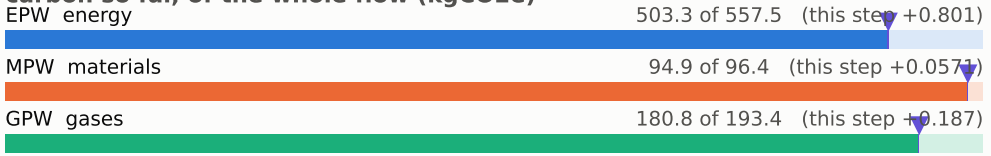

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

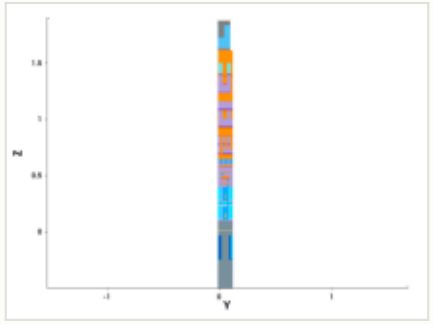

y cut at 0.049 µm

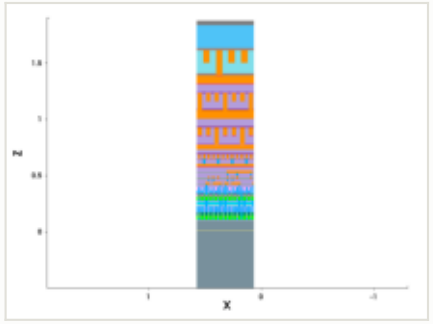

mask for this step

no mask for this step

steps by process area

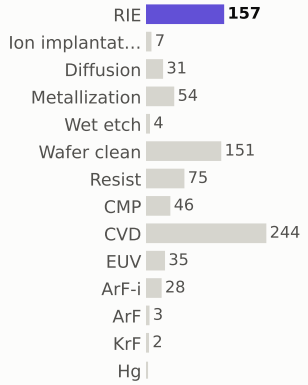

materials deposited (g)

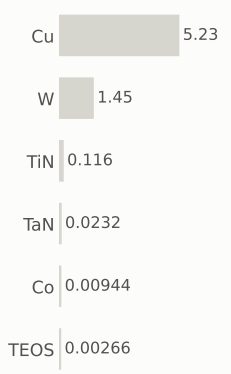

gases emitted (g)

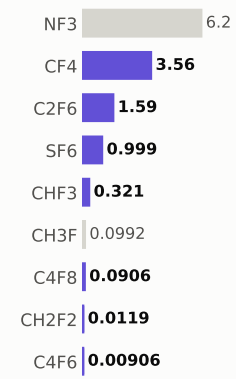

Step #8800: Wafer_clean

etch_strip · Wafer_clean

0.169	779.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

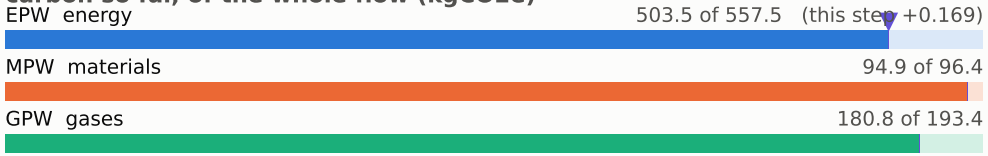

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

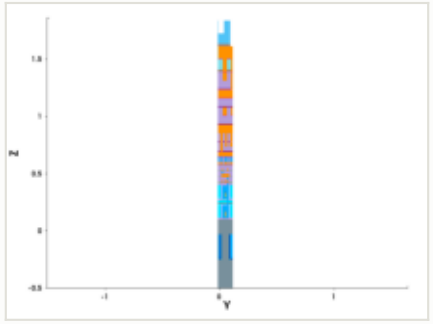

y cut at 0.049 µm

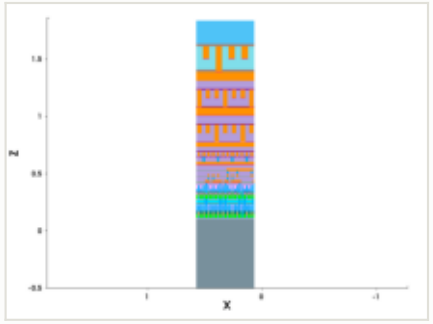

mask for this step

no mask for this step

steps by process area

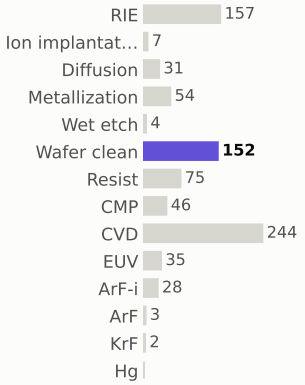

materials deposited (g)

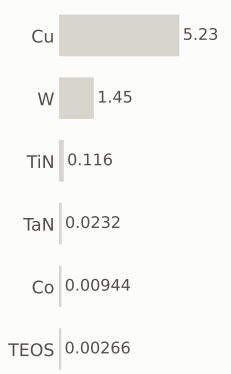

gases emitted (g)

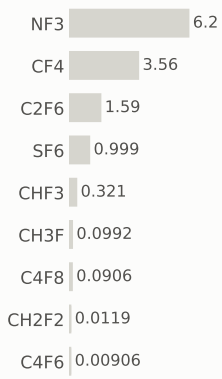

Step #8810: Metallization

depo_ellipsoidal · Metallization

1.2	780.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

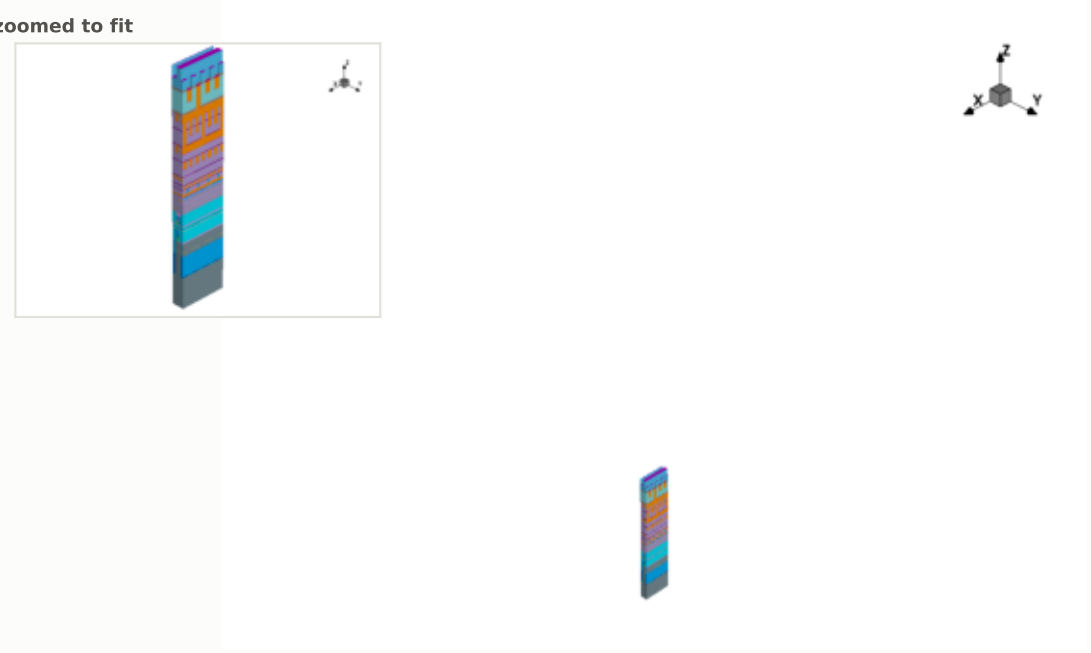

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

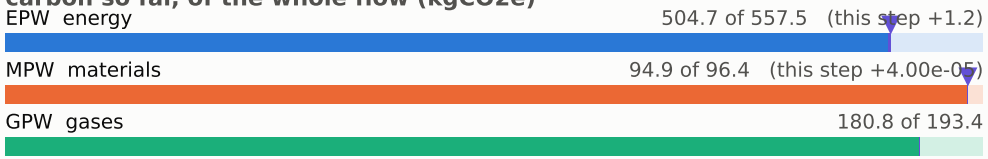

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

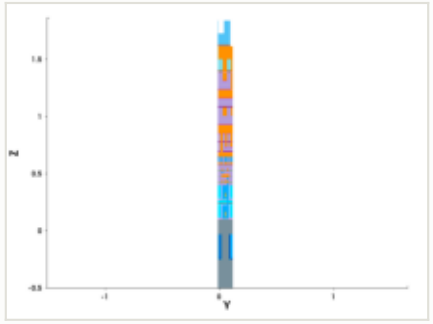

y cut at 0.049 µm

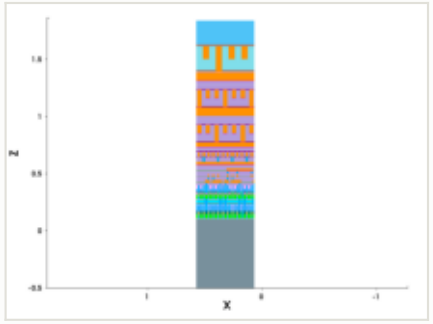

mask for this step

no mask for this step

steps by process area

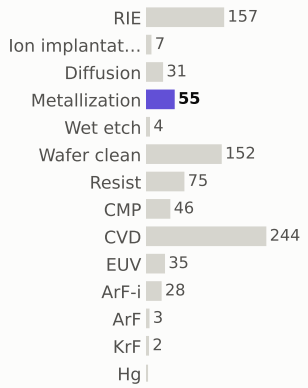

materials deposited (g)

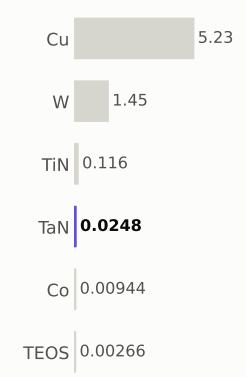

gases emitted (g)



Step #8820: Metallization

depo_fill · Metallization

1.21	781.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

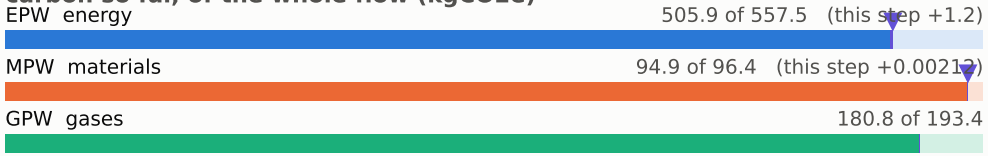

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

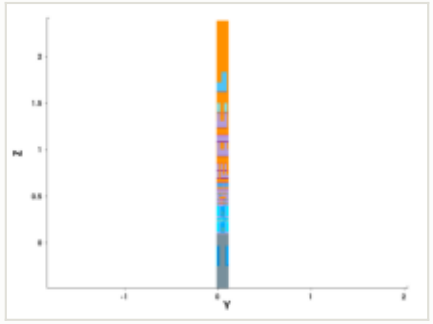

y cut at 0.049 µm

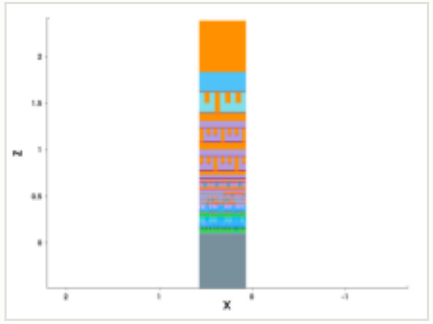

mask for this step

no mask for this step

steps by process area

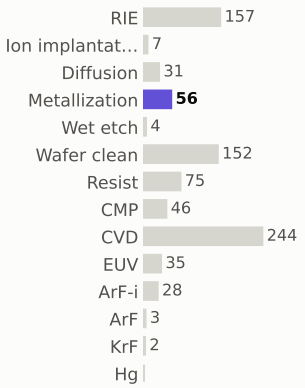

materials deposited (g)

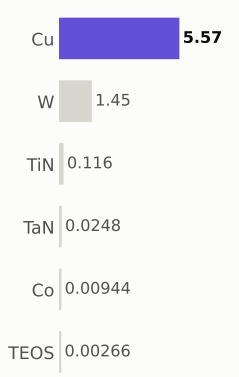

gases emitted (g)



Step #8830: Diffusion

treatment · Diffusion

0.801	782.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

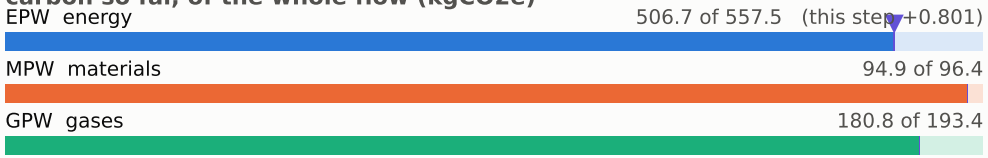

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

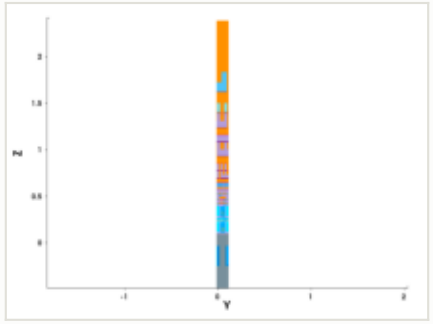

y cut at 0.049 µm

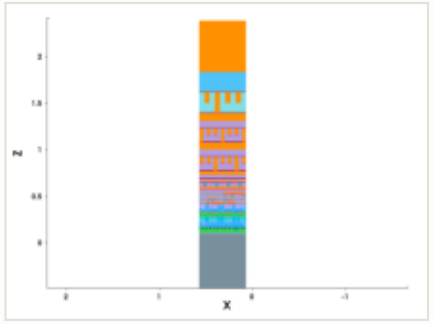

mask for this step

no mask for this step

steps by process area

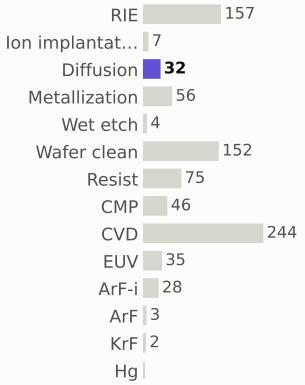

materials deposited (g)

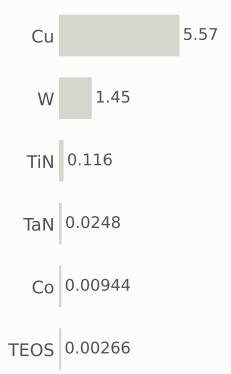

gases emitted (g)

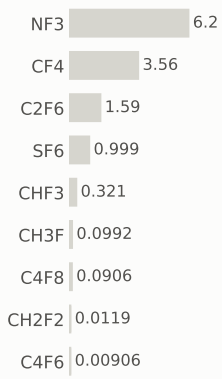

Step #8840: CMP

etch_cmp · CMP

0.169	782.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

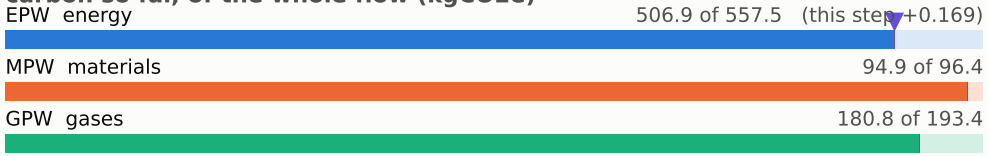

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

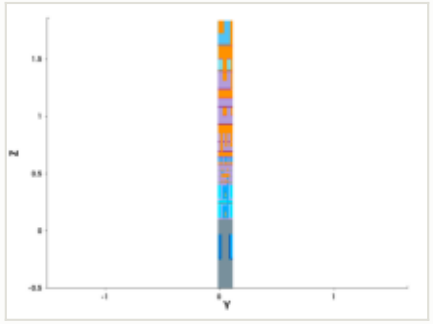

y cut at 0.049 µm

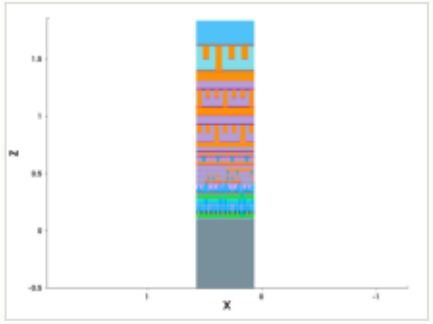

mask for this step

no mask for this step

steps by process area

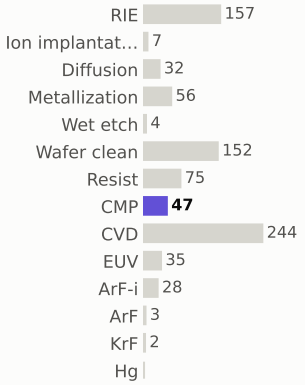

materials deposited (g)

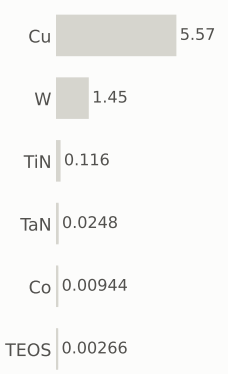

gases emitted (g)

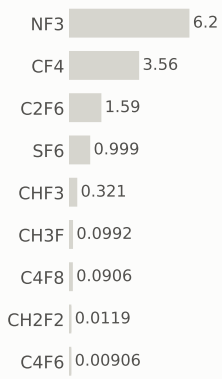

Step #8860: CVD

depo_fill · CVD

1.31	783.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

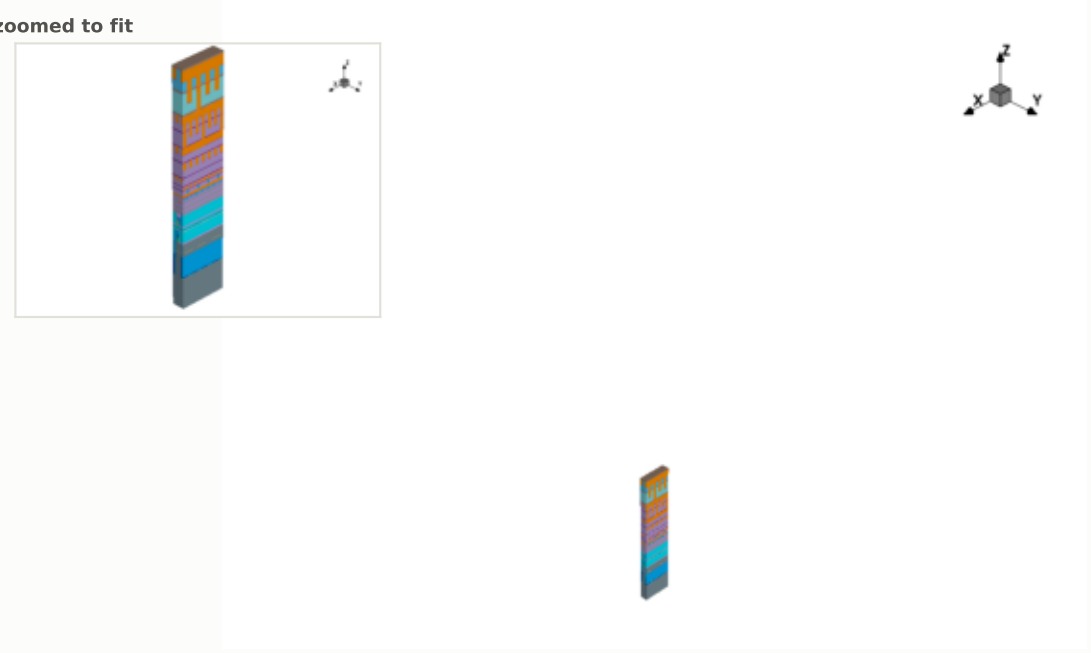

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

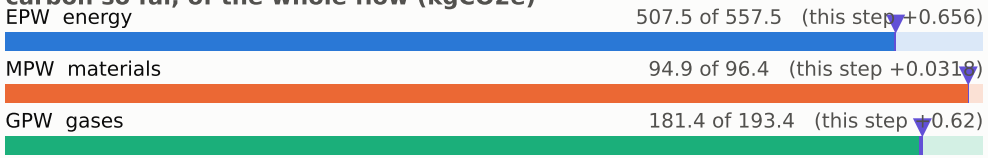

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

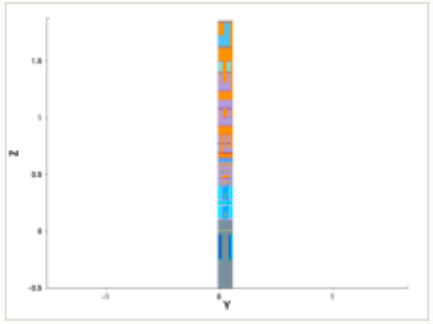

y cut at 0.049 µm

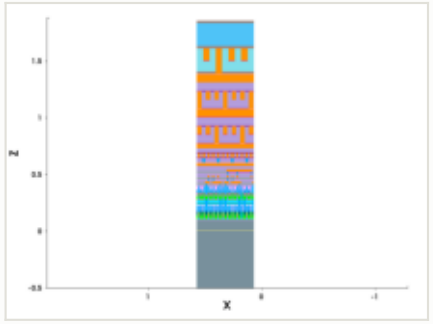

mask for this step

no mask for this step

steps by process area



materials deposited (g)

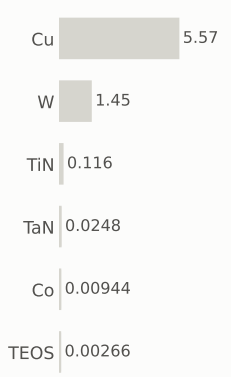

gases emitted (g)

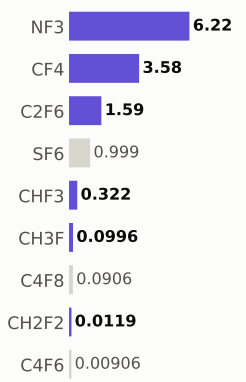

Step #8870: CVD

depo_fill · CVD

1.31	785.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	1.42 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

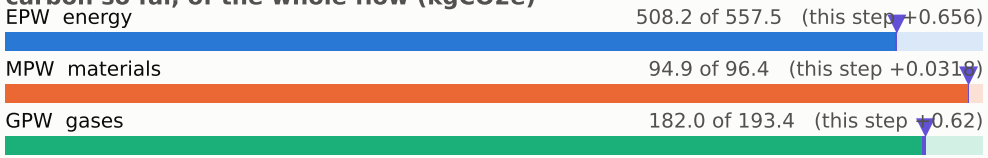

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

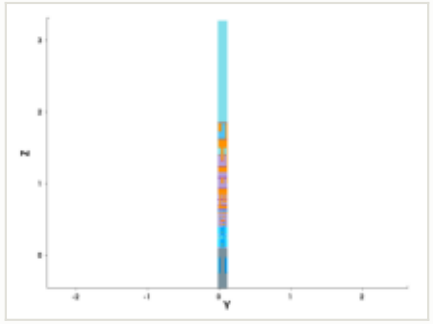

y cut at 0.049 µm

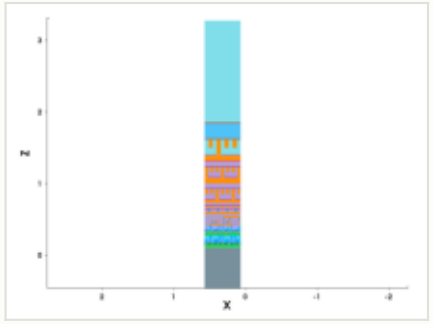

mask for this step

no mask for this step

steps by process area

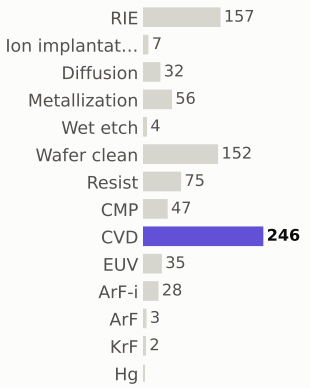

materials deposited (g)

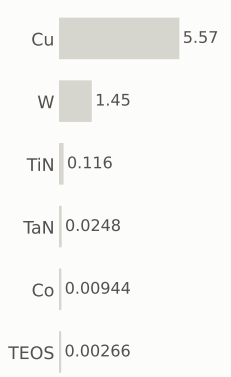

gases emitted (g)

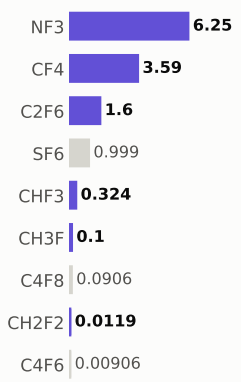

Step #8880: Hg

litho_patterning · Hg

0.199	785.3	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Hg	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

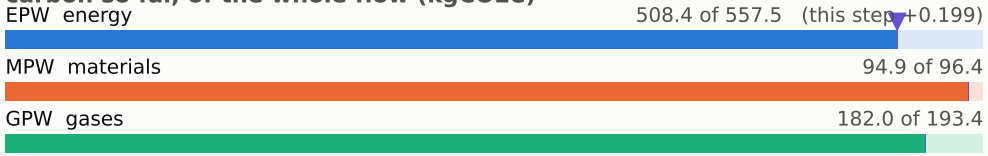

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

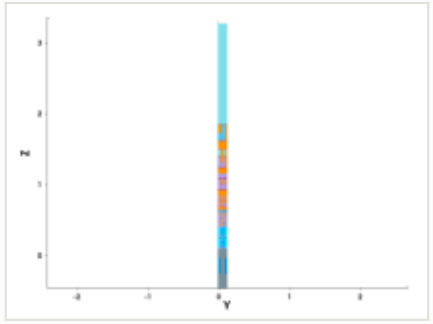

y cut at 0.049 µm

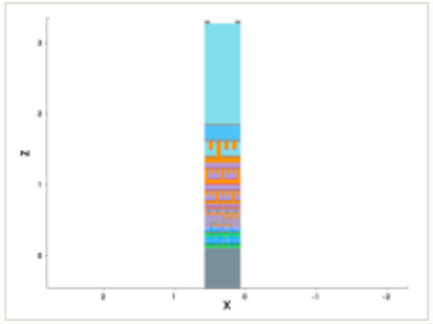

mask: layer 80:0 (GDSII)

steps by process area

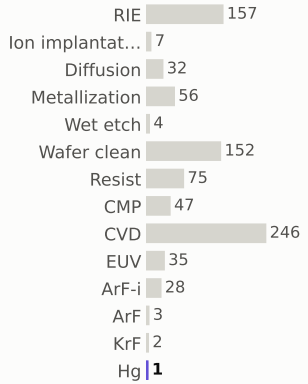

materials deposited (g)

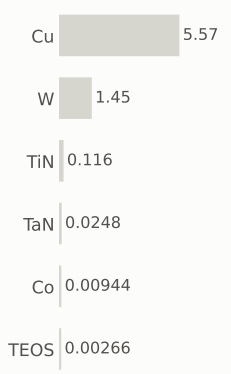

gases emitted (g)

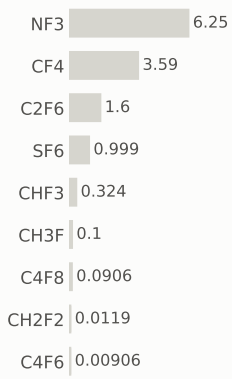

Step #8890: RIE

etch_anisotropic · RIE

1.04	786.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

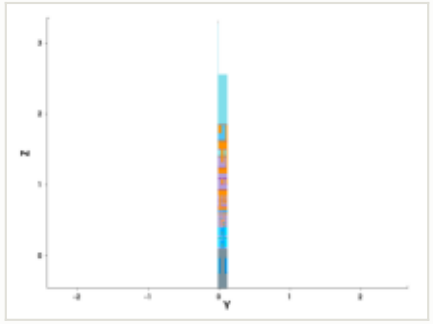

y cut at 0.049 µm

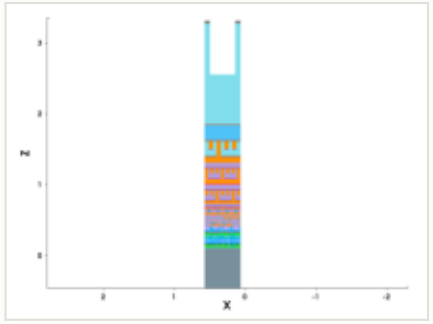

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

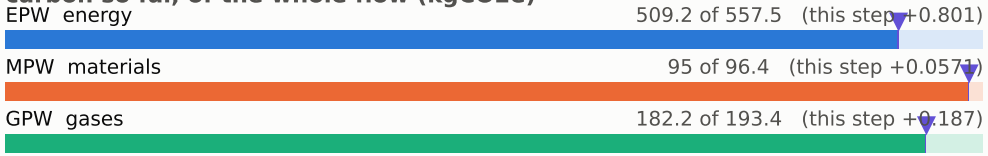

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

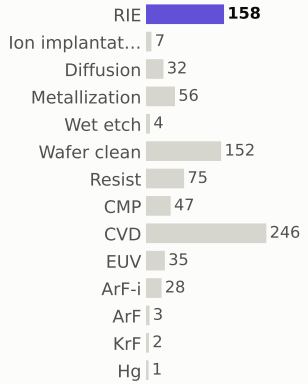

materials deposited (g)

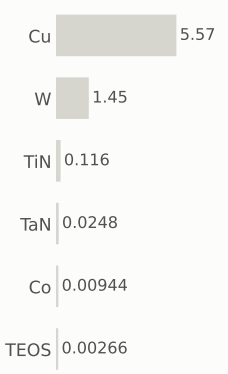

gases emitted (g)

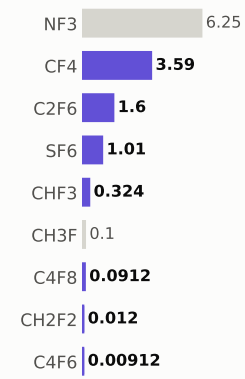

Step #8900: Wafer_clean

etch_strip · Wafer_clean

0.169	786.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

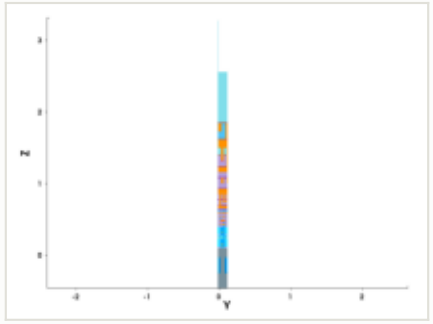

y cut at 0.049 µm

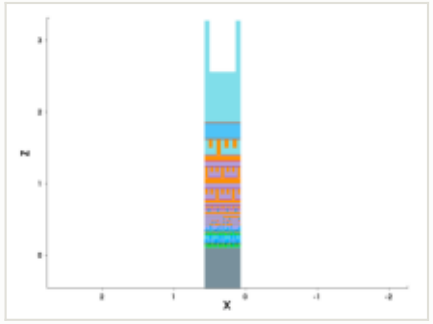

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

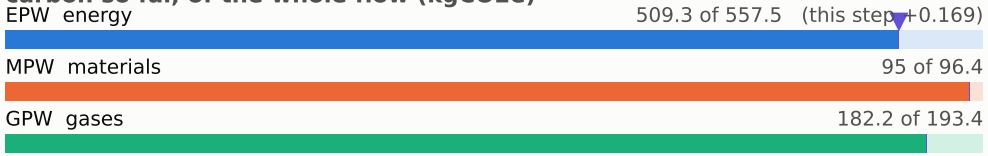

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

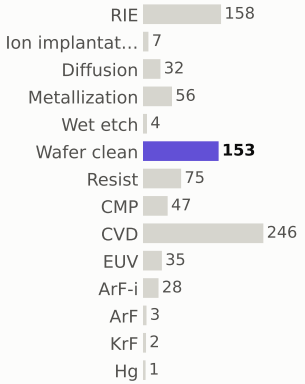

materials deposited (g)

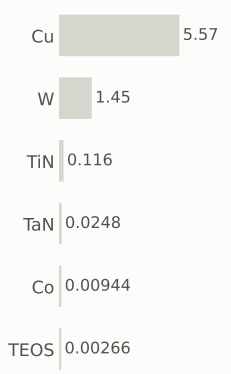

gases emitted (g)

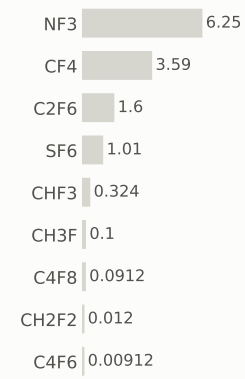

Step #8910: RIE

clean · RIE

1.04	787.5	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

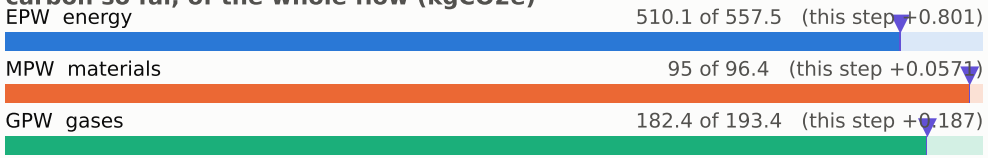

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

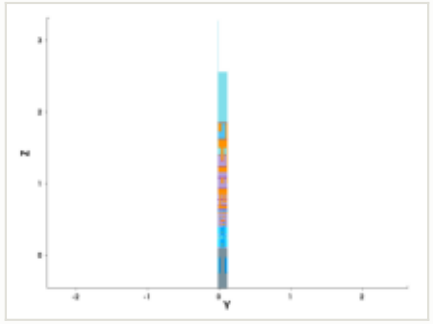

y cut at 0.049 µm

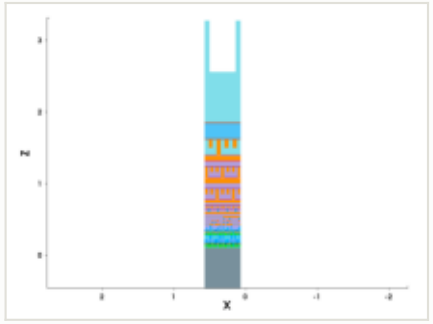

mask for this step

no mask for this step

steps by process area

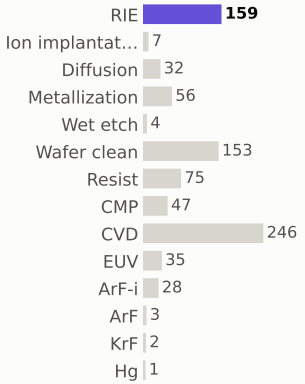

materials deposited (g)

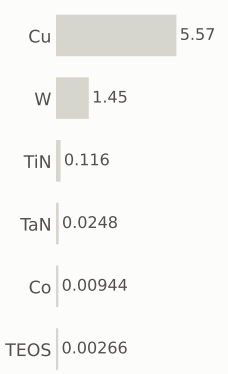

gases emitted (g)

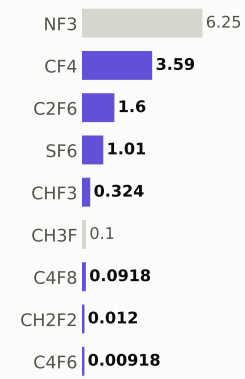

Step #8920: Wafer_clean

clean · Wafer_clean

0.169	787.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

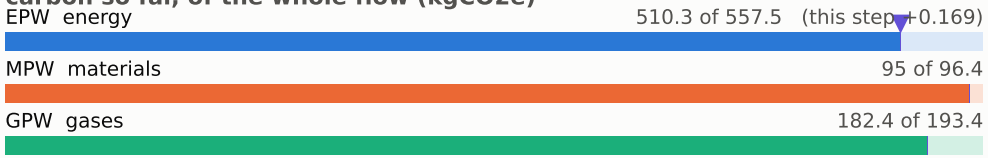

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

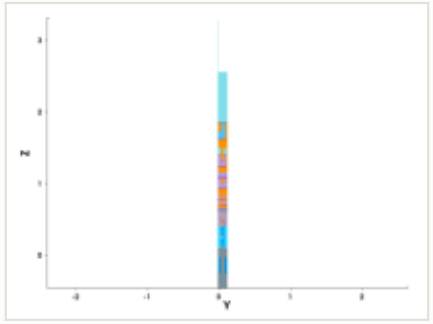

y cut at 0.049 µm

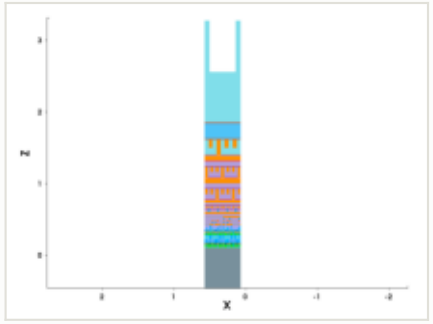

mask for this step

no mask for this step

steps by process area

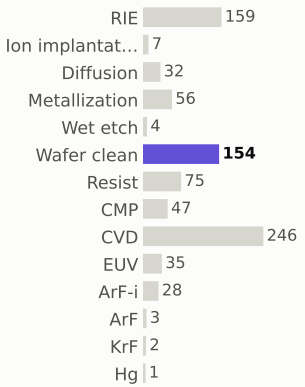

materials deposited (g)



gases emitted (g)

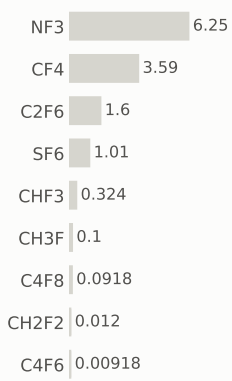

Step #8930: ArF

litho_patterning · ArF

0.199	787.9	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

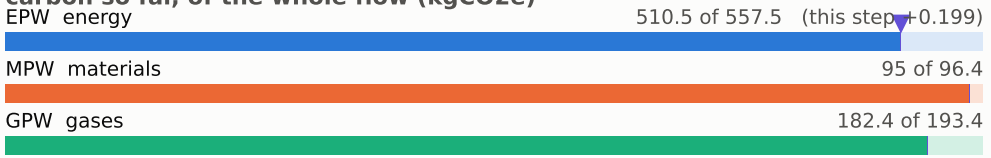

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

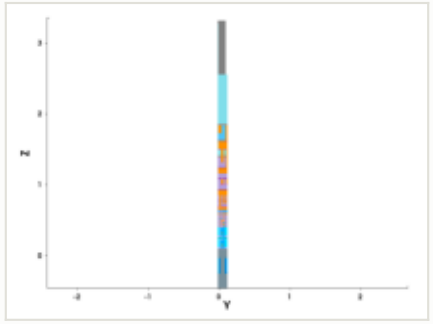

y cut at 0.049 µm

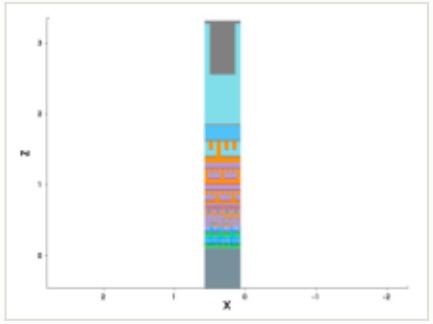

mask: layer 77:0 (GDSII)



steps by process area

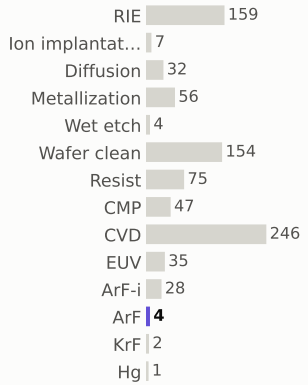

materials deposited (g)



gases emitted (g)



Step #8940: RIE

etch_anisotropic · RIE

1.04	789.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

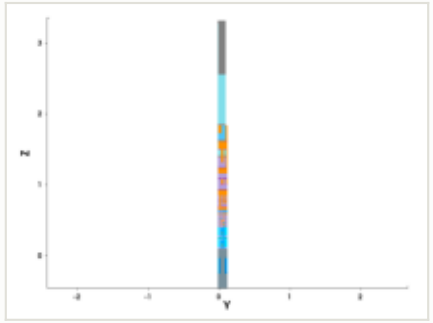

y cut at 0.049 µm

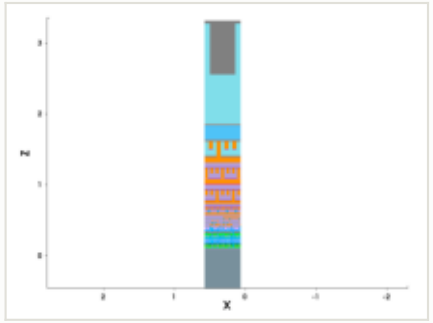

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

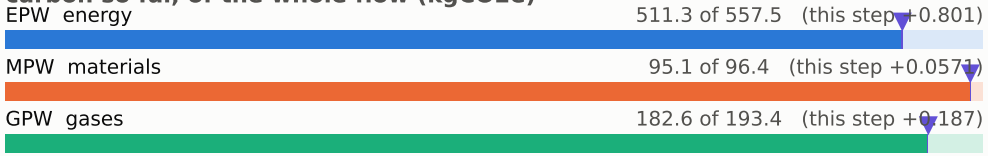

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

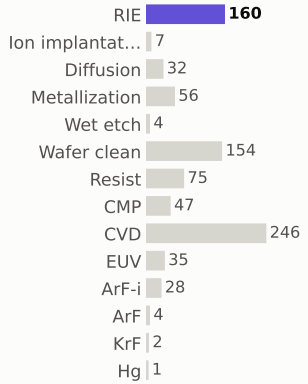

materials deposited (g)

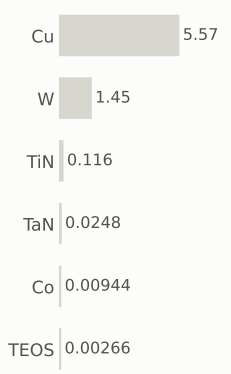

gases emitted (g)

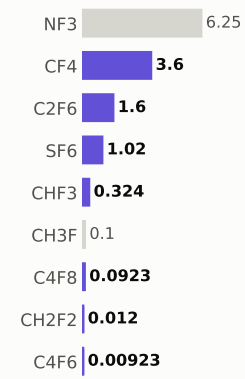

Step #8950: Wafer_clean

etch_strip · Wafer_clean

0.169	789.1	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

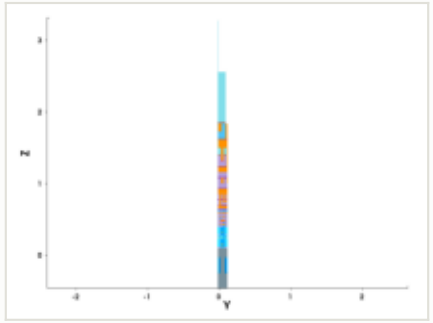

y cut at 0.049 µm

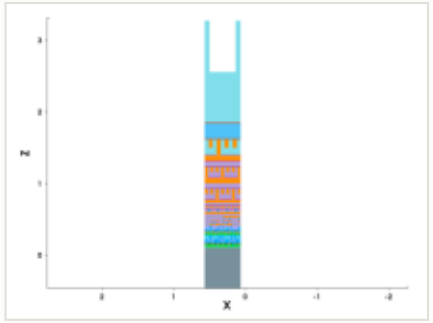

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

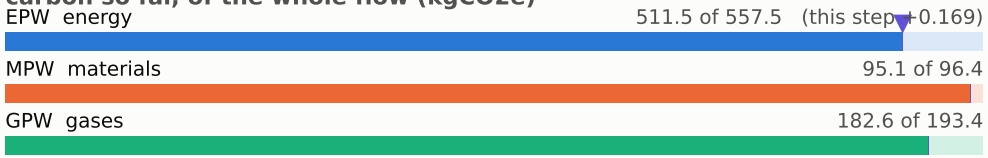

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

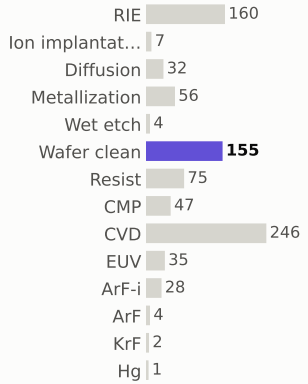

materials deposited (g)

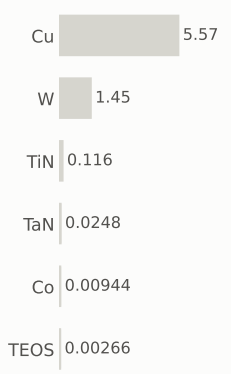

gases emitted (g)

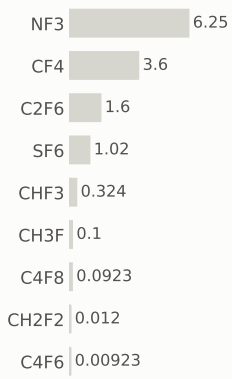

Step #8960: Metallization

depo_ellipsoidal · Metallization

1.2	790.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

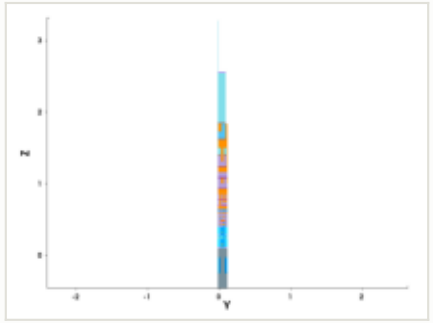

y cut at 0.049 µm

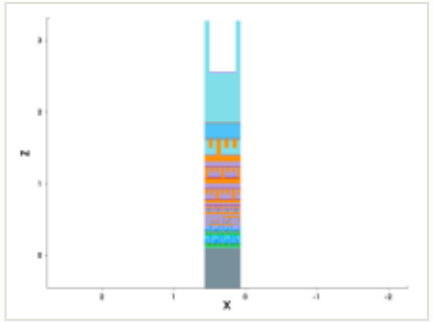

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

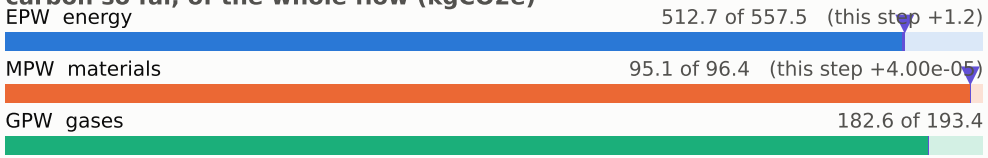

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

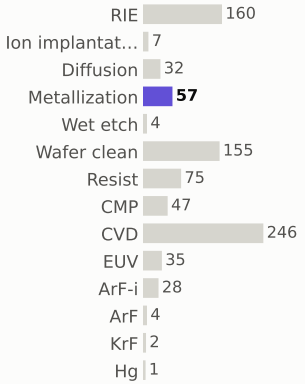

materials deposited (g)

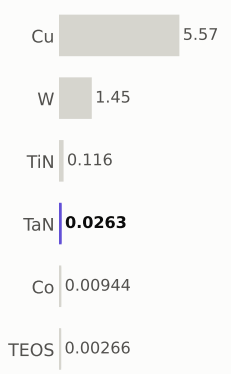

gases emitted (g)

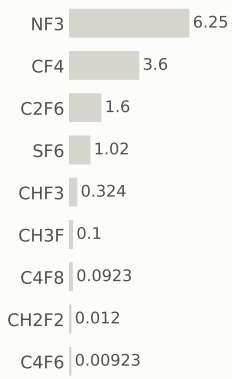

Step #8970: Metallization

depo_fill · Metallization

1.21	791.5	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization	EPW	1.2 kgCO2e
material	Cu	EPW tool	0.86 kgCO2e
thickness	0.55 µm	EPW overhead	0.344 kgCO2e
material GWP	6.09011 gCO2e/g	MPW	0.00212 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

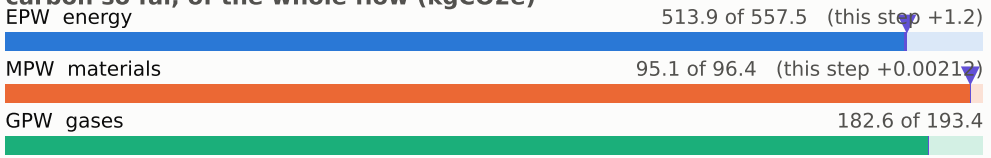

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

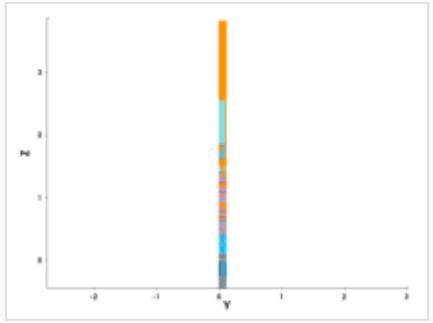

y cut at 0.049 µm

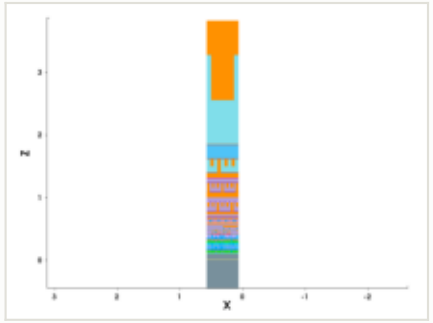

mask for this step

no mask for this step

steps by process area

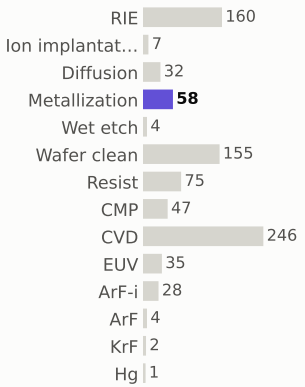

materials deposited (g)

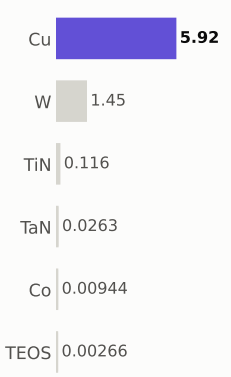

gases emitted (g)



Step #8980: Diffusion

treatment · Diffusion

0.801	792.3	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

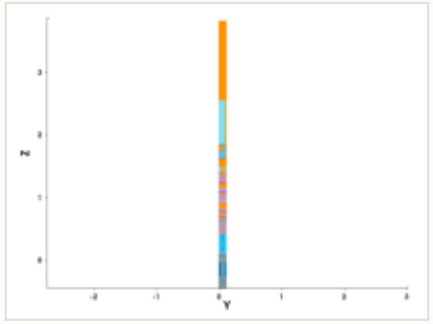

y cut at 0.049 µm

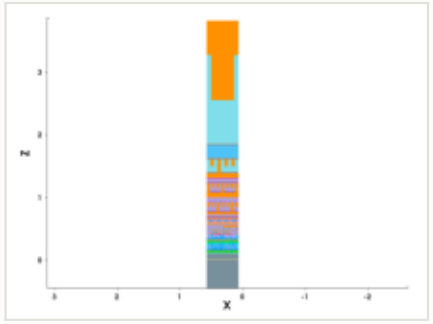

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

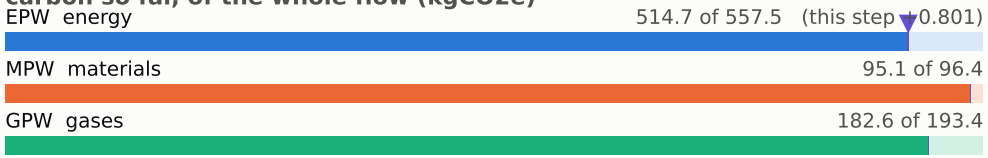

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

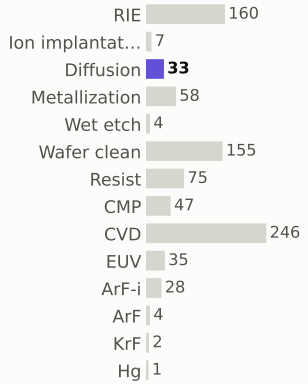

materials deposited (g)

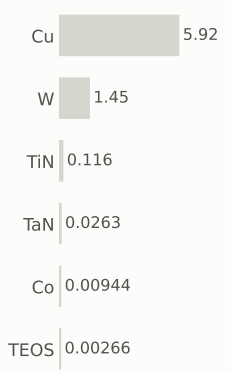

gases emitted (g)

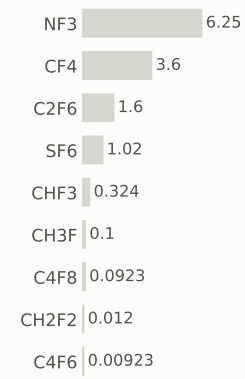

Step #8990: CMP

etch_cmp · CMP

0.169	792.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

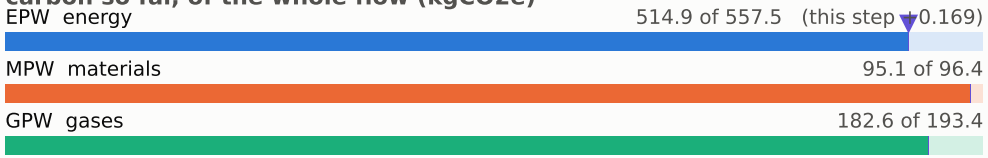

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

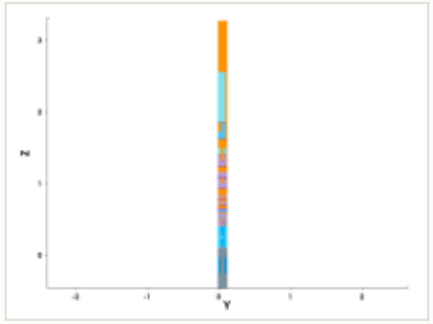

y cut at 0.049 µm

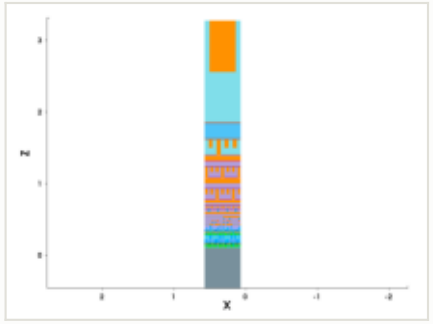

mask for this step

no mask for this step

steps by process area

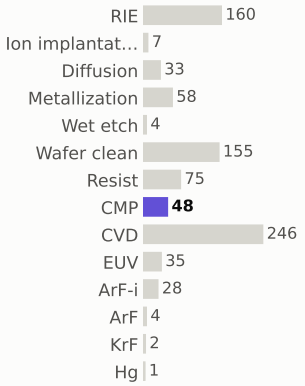

materials deposited (g)



gases emitted (g)



Step #9010: CVD

depo_fill · CVD

1.31	793.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

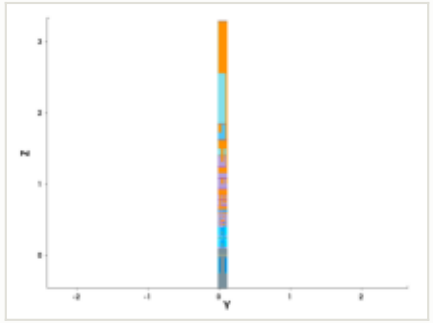

y cut at 0.049 µm

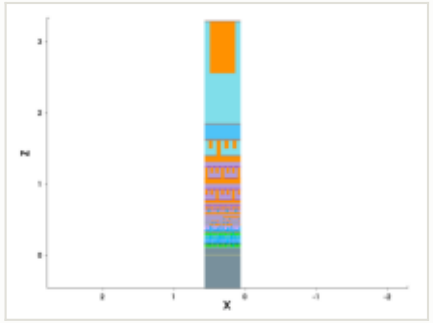

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

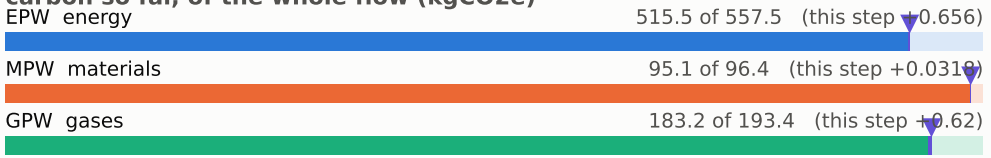

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

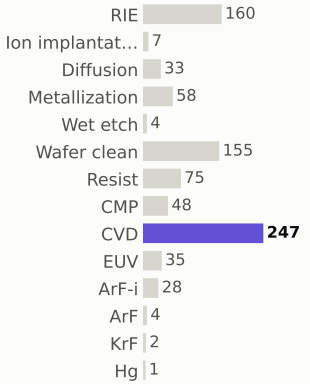

materials deposited (g)

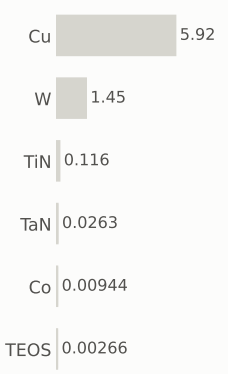

gases emitted (g)

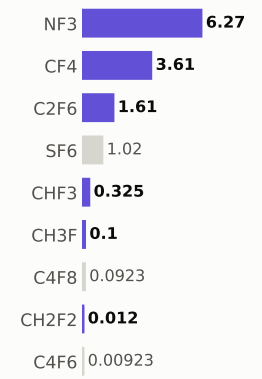

Step #9020: CVD

depo_fill · CVD

1.31	795.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

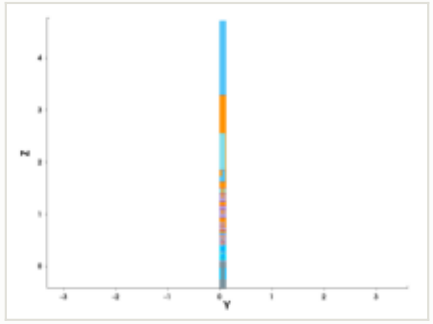

y cut at 0.049 µm

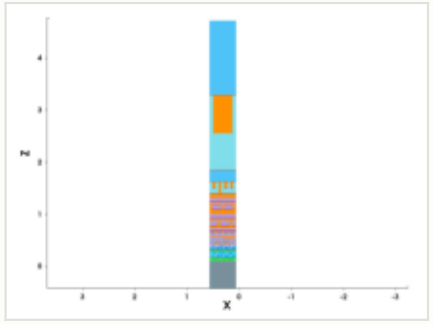

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	1.42 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

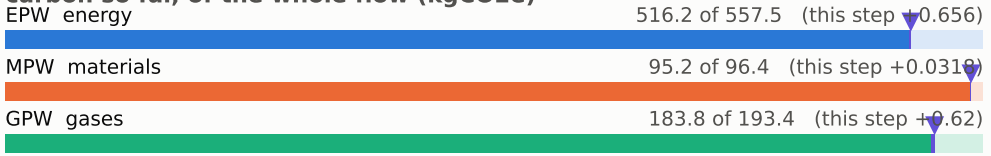

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

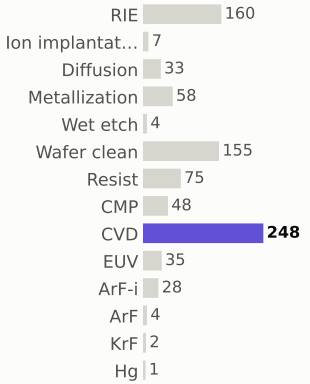

materials deposited (g)

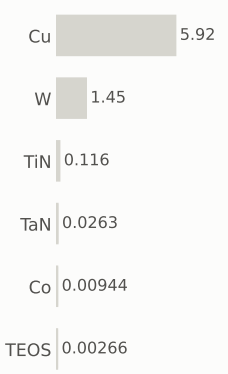

gases emitted (g)

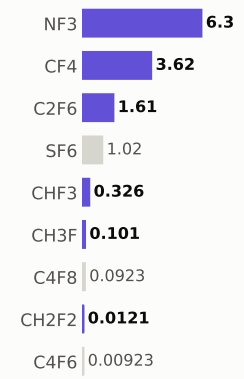

Step #9030: Hg

litho_patterning · Hg

0.199	795.3	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

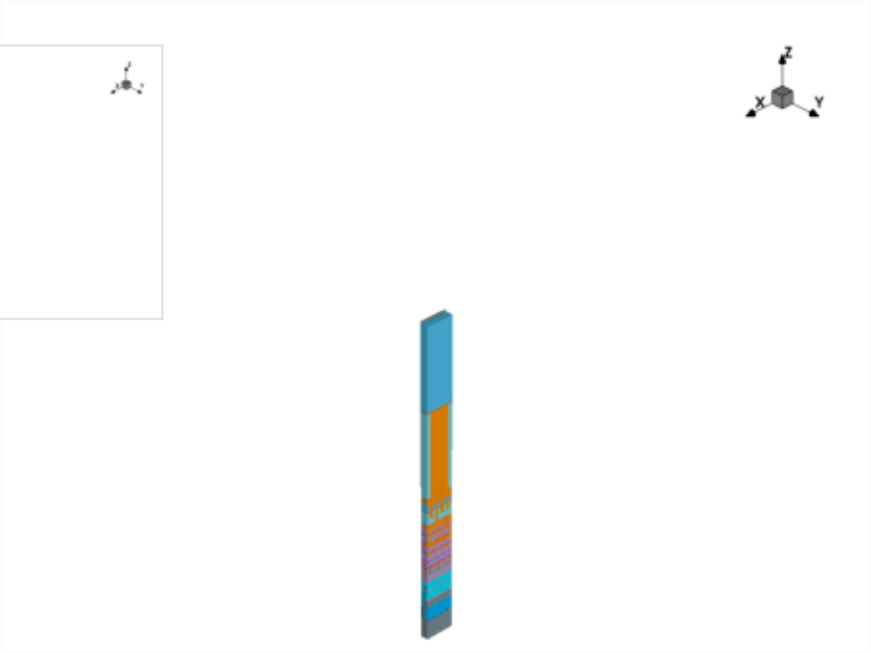

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

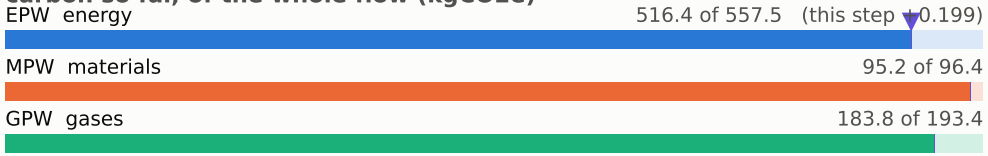

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

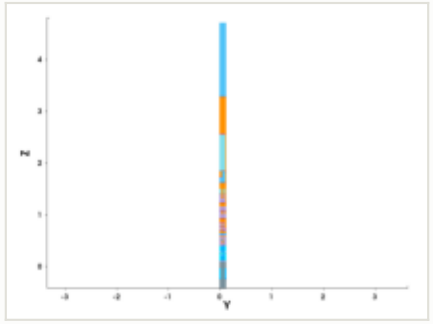

y cut at 0.049 µm

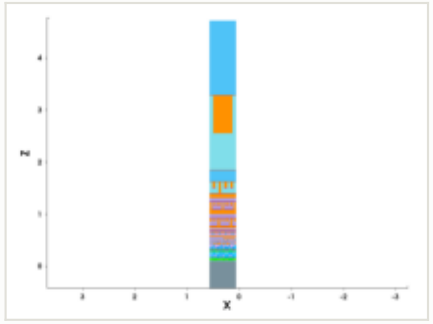

mask: layer 85:0 (GDSII)

steps by process area

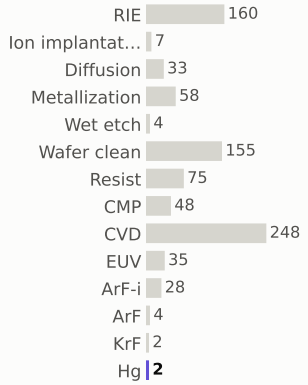

materials deposited (g)

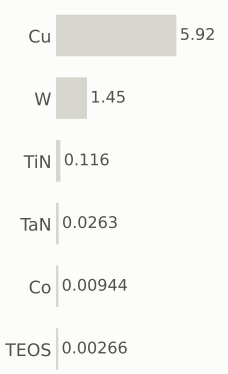

gases emitted (g)

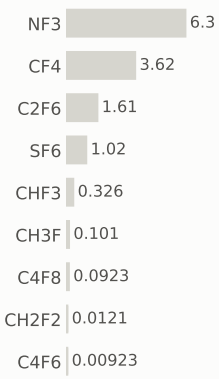

Step #9040: RIE

etch_anisotropic · RIE

1.04	796.4	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

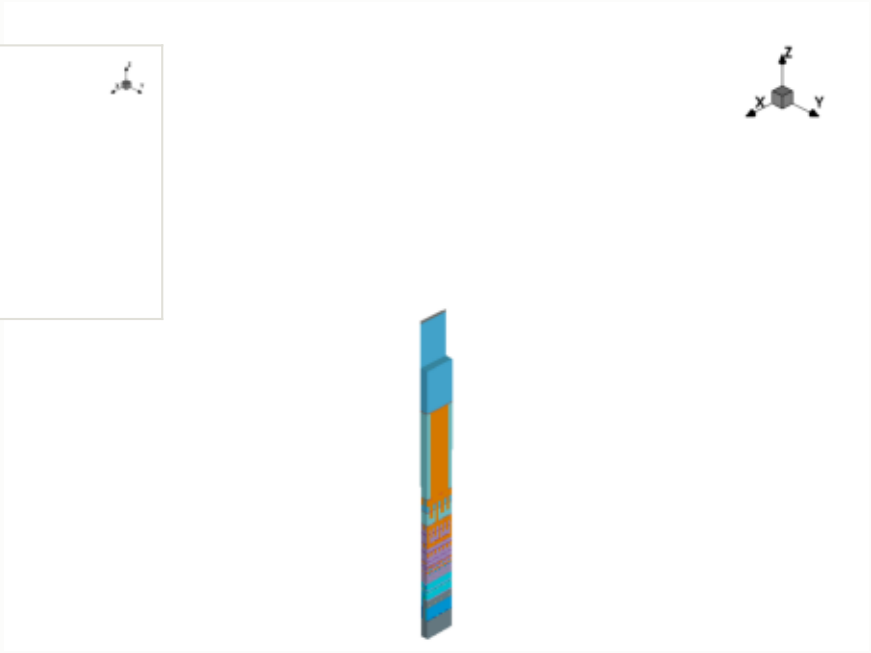

x cut at 0.385 µm

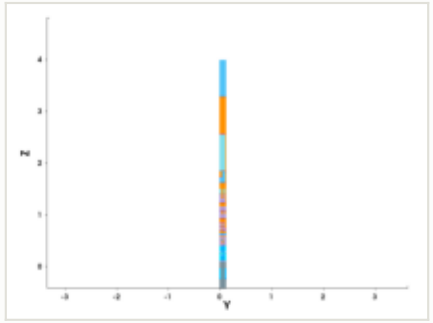

y cut at 0.049 µm

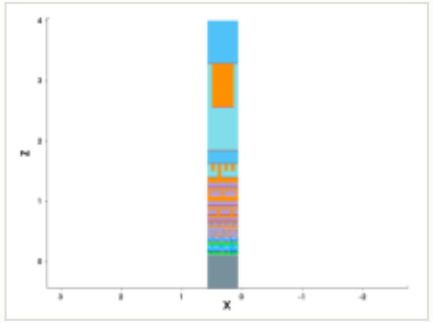

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

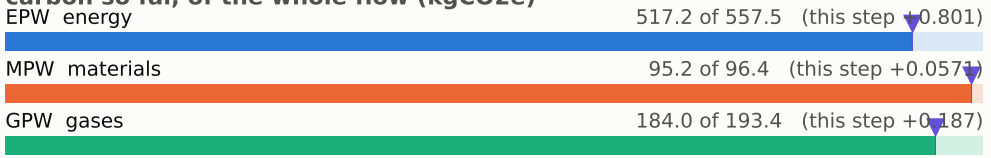

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

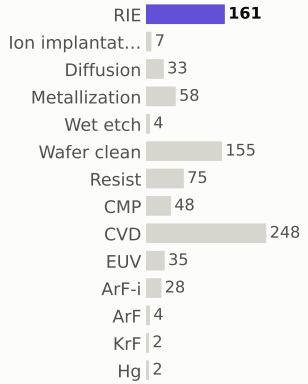

materials deposited (g)

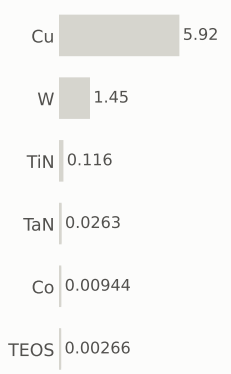

gases emitted (g)

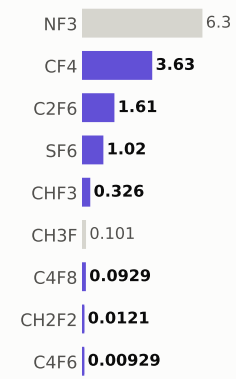

Step #9050: Wafer_clean

etch_strip · Wafer_clean

0.169	796.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

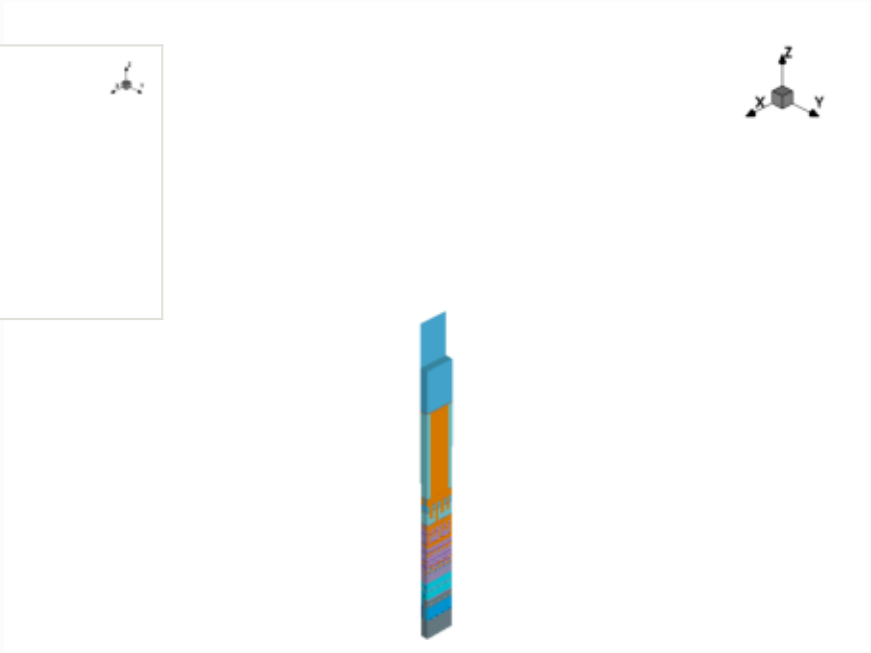

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

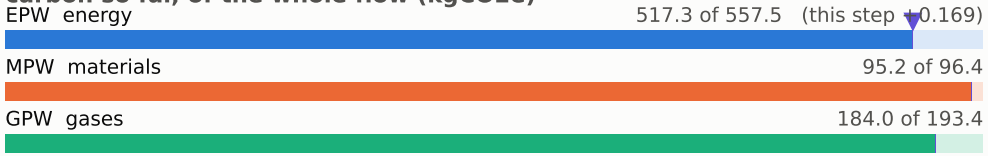

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

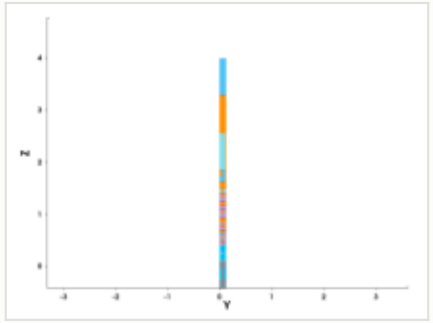

y cut at 0.049 µm

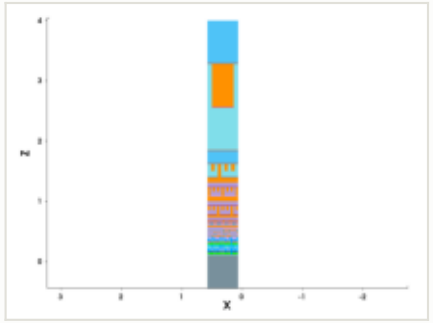

mask for this step

no mask for this step

steps by process area

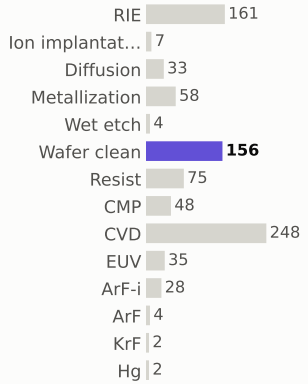

materials deposited (g)

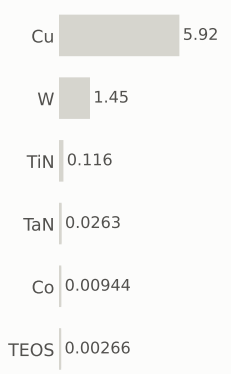

gases emitted (g)

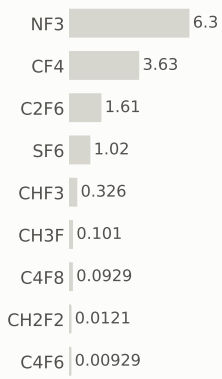

Step #9060: RIE

clean · RIE

1.04	797.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

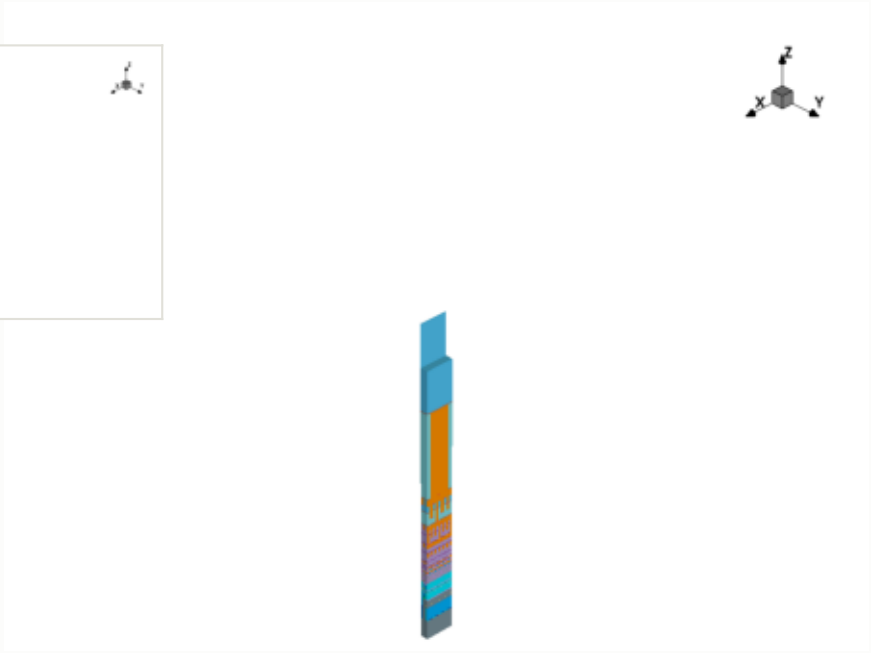

x cut at 0.385 µm

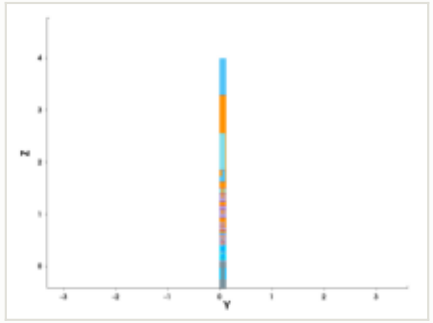

y cut at 0.049 µm

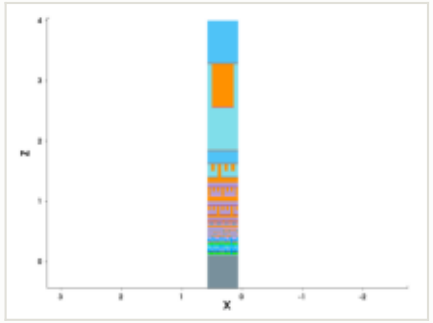

mask for this step

no mask for this step

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

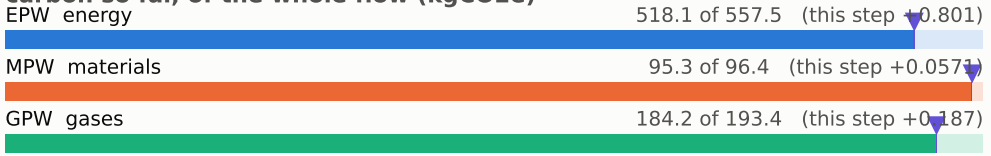

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

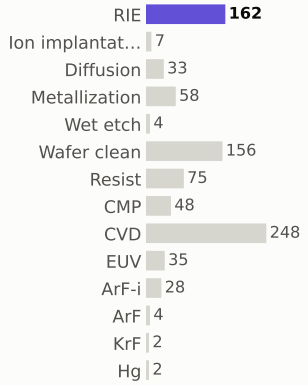

materials deposited (g)

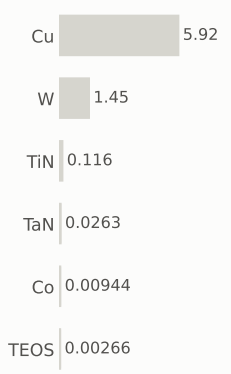

gases emitted (g)

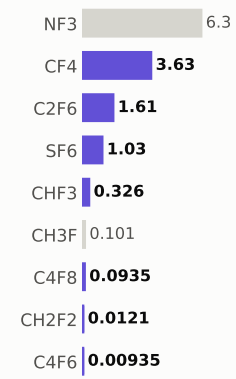

Step #9070: Wafer_clean

clean · Wafer_clean

0.169	797.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

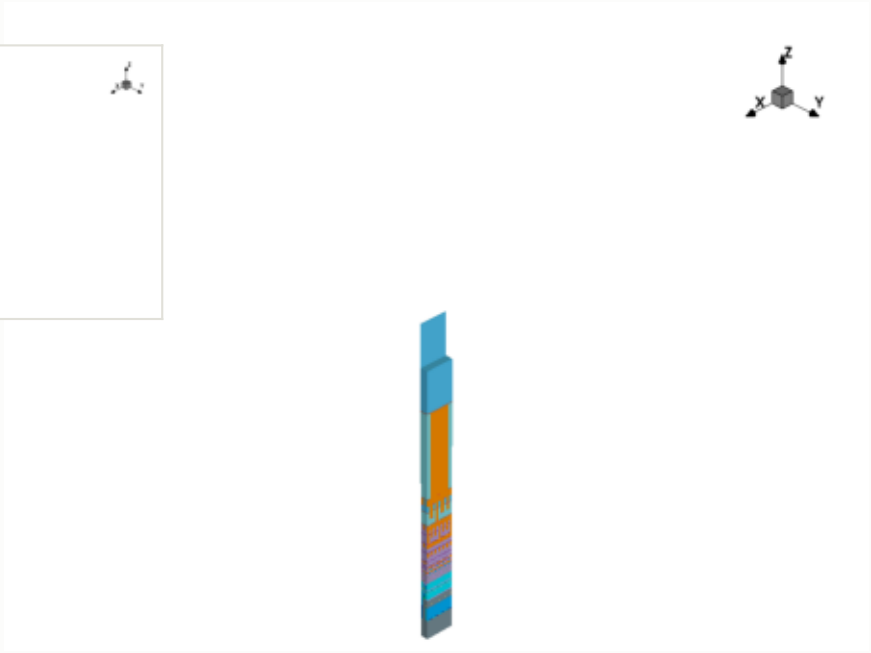

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

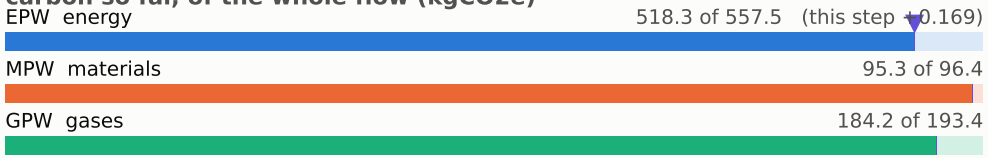

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

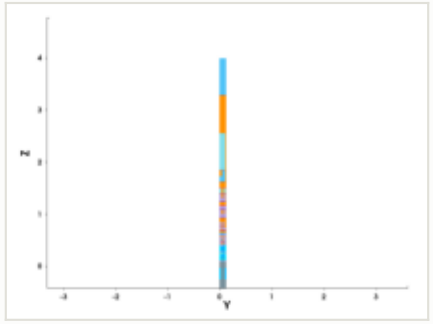

y cut at 0.049 µm

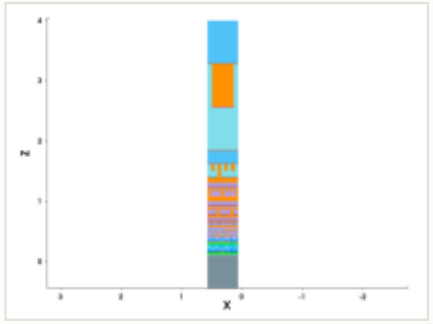

mask for this step

no mask for this step

steps by process area

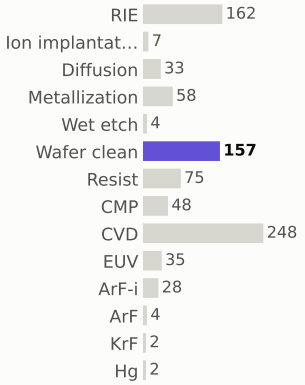

materials deposited (g)

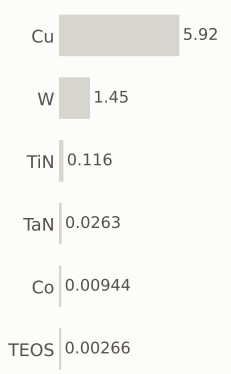

gases emitted (g)

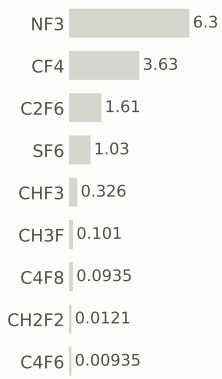

Step #9080: Hg

litho_patterning · Hg

0.199	797.9	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

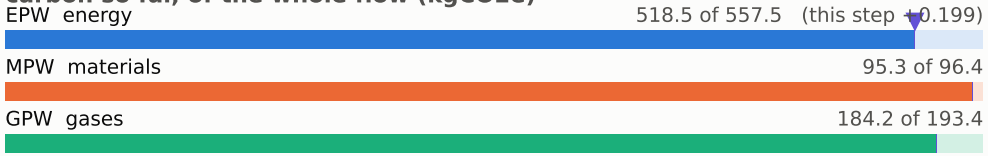

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

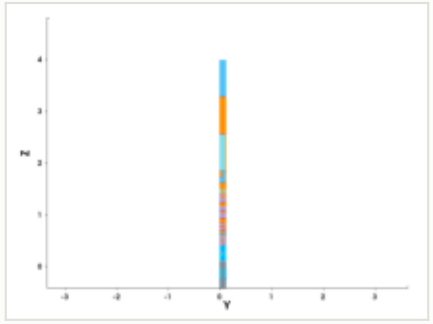

y cut at 0.049 µm

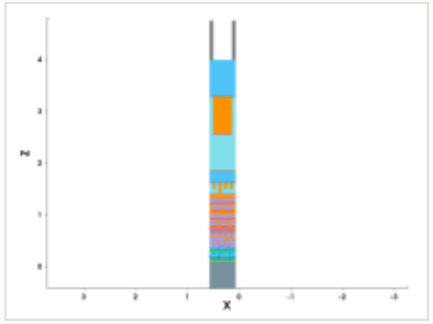

mask: layer 82:0 (GDSII)

steps by process area



materials deposited (g)

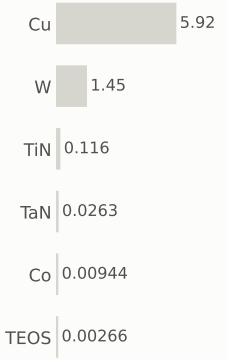

gases emitted (g)

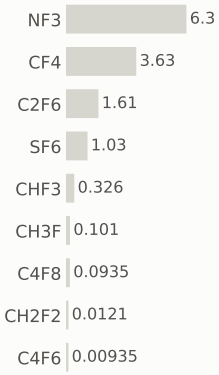

Step #9090: RIE

etch_anisotropic · RIE

1.04	799.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

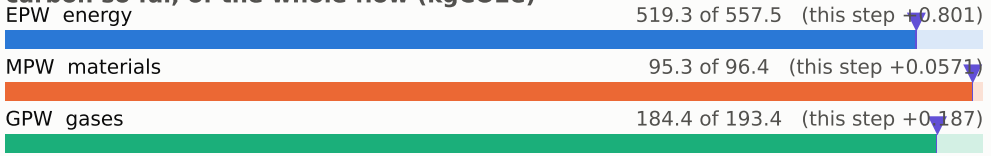

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

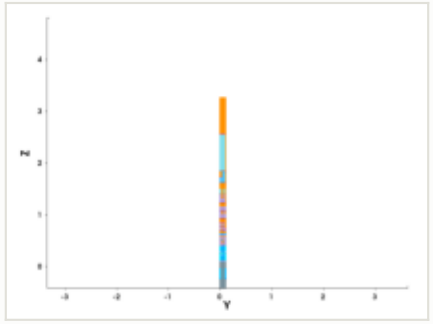

y cut at 0.049 µm

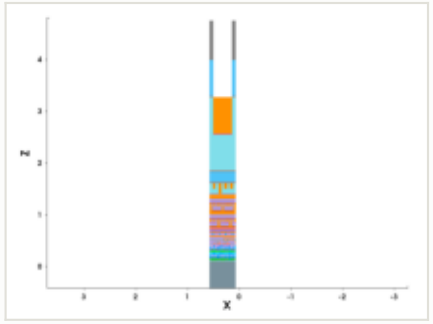

mask for this step

no mask for this step

steps by process area

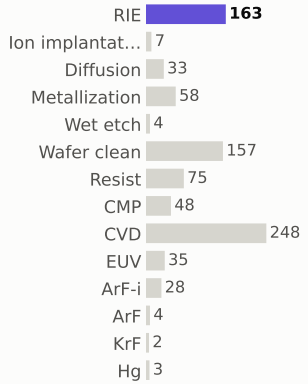

materials deposited (g)

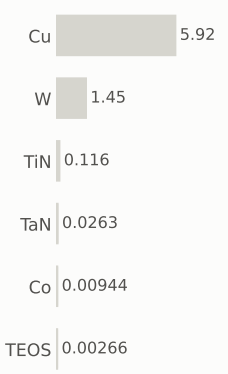

gases emitted (g)

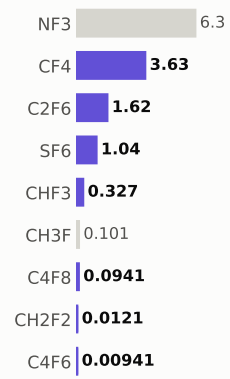

Step #9100: Wafer_clean

etch_strip · Wafer_clean

0.169	799.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

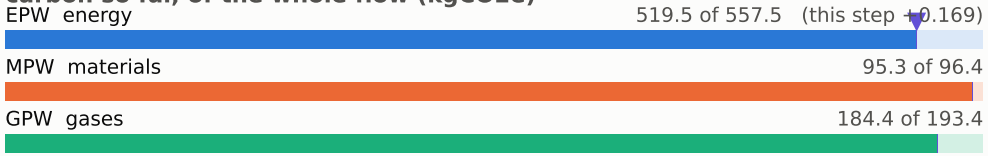

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

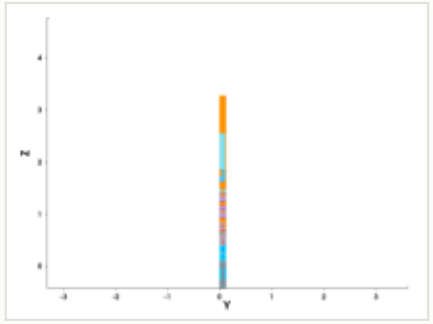

y cut at 0.049 µm

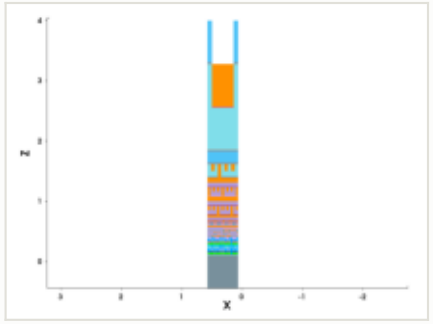

mask for this step

no mask for this step

steps by process area

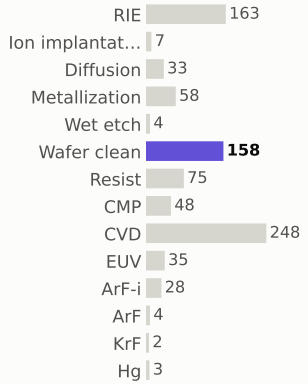

materials deposited (g)

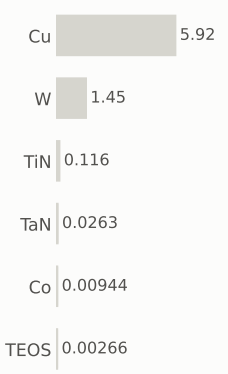

gases emitted (g)

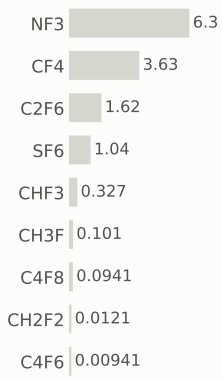

Step #9110: Metallization

depo_ellipsoidal · Metallization

1.2	800.4	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

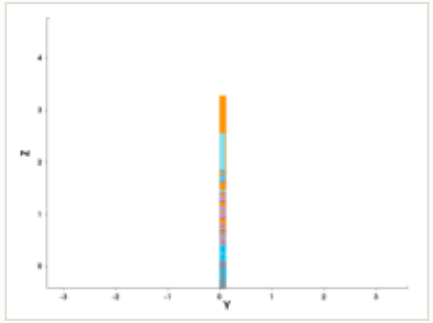

y cut at 0.049 µm

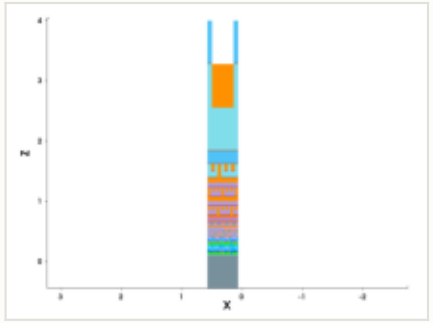

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

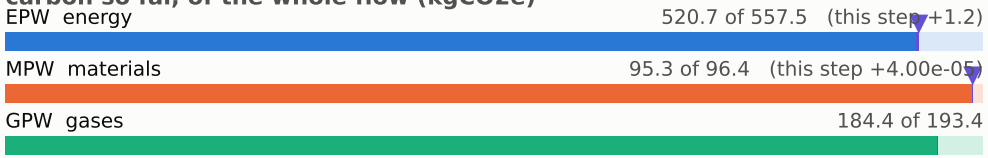

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

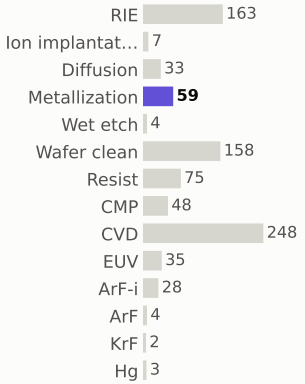

materials deposited (g)

gases emitted (g)

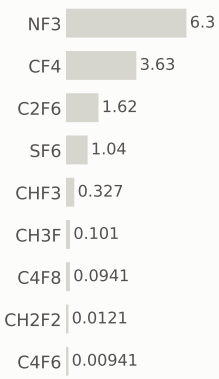

Step #9120: Metallization

depo_fill · Metallization

1.21	801.6	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

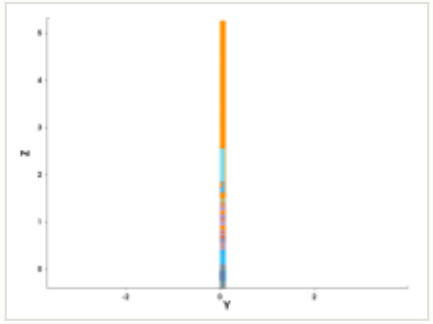

y cut at 0.049 µm

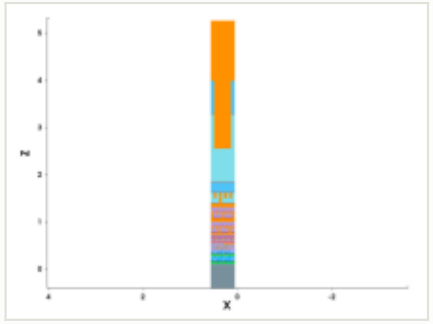

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

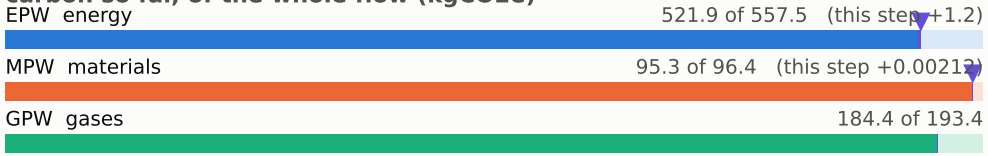

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

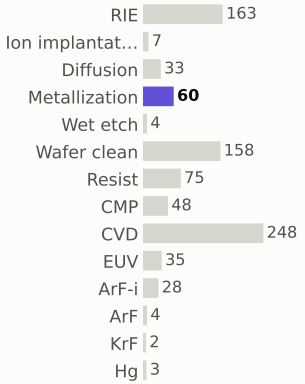

materials deposited (g)

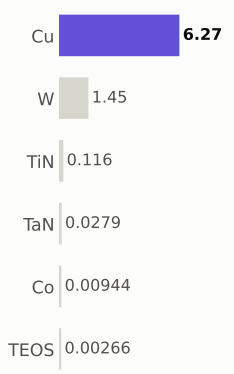

gases emitted (g)

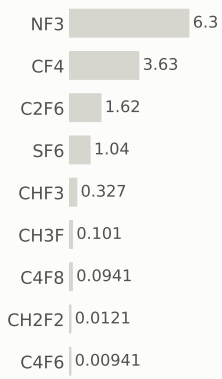

Step #9130: Diffusion

treatment · Diffusion

0.801	802.4	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

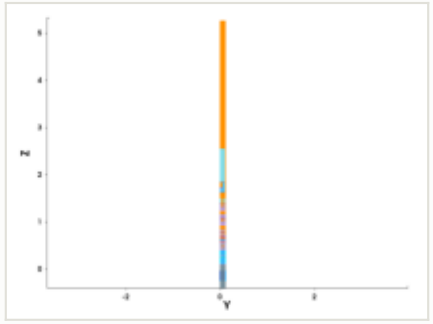

y cut at 0.049 µm

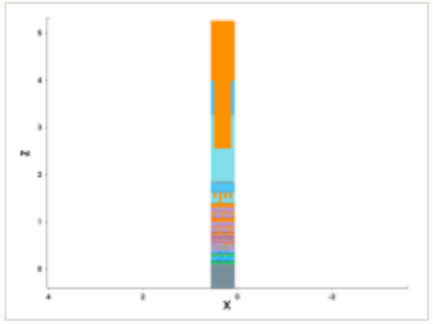

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

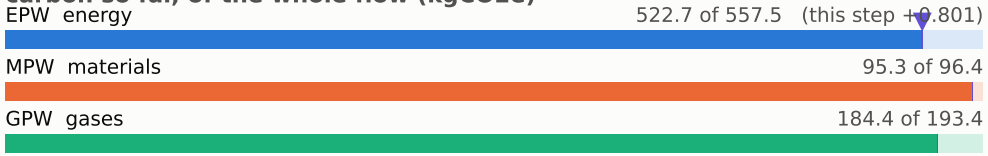

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

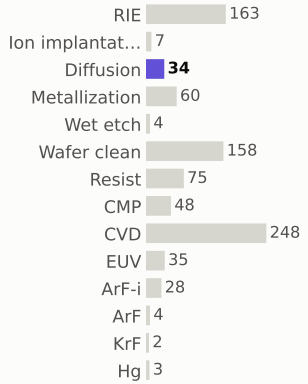

materials deposited (g)

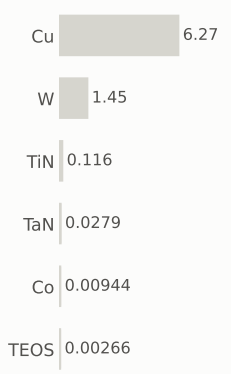

gases emitted (g)

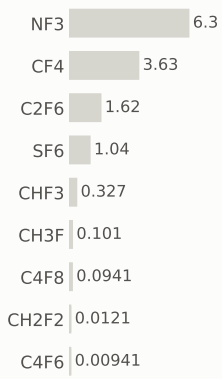

Step #9140: CMP

etch_cmp · CMP

0.169	802.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

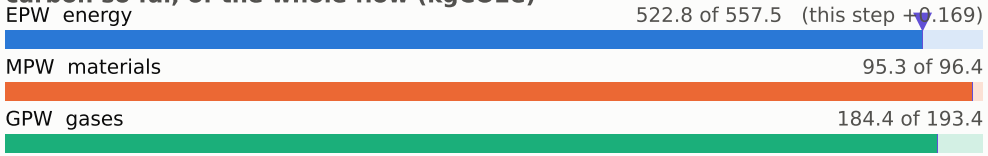

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

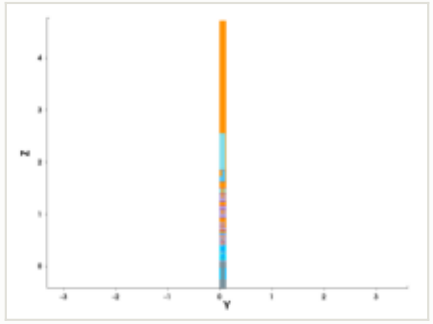

y cut at 0.049 µm

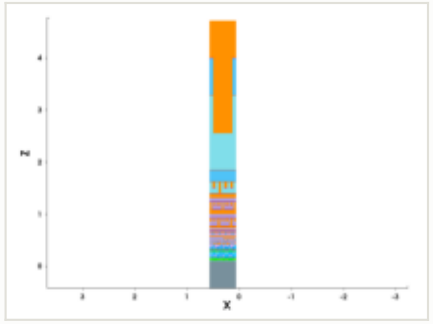

mask for this step

no mask for this step

steps by process area

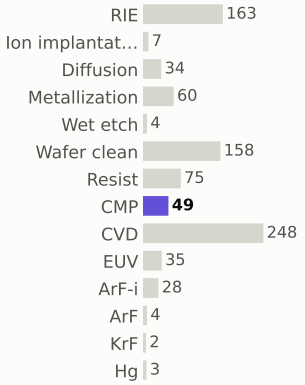

materials deposited (g)

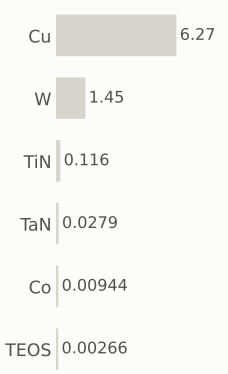

gases emitted (g)

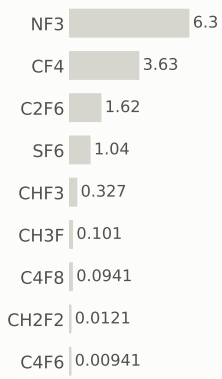

Step #9160: CVD

depo_anisotropic · CVD

1.31	803.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

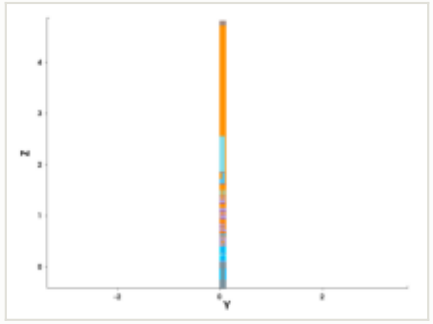

y cut at 0.049 µm

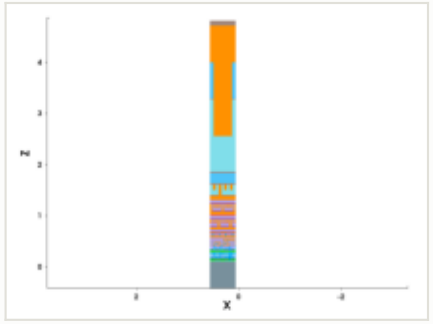

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

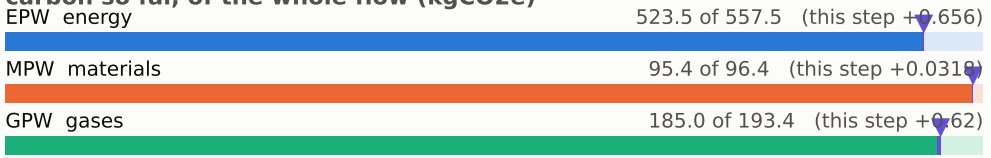

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

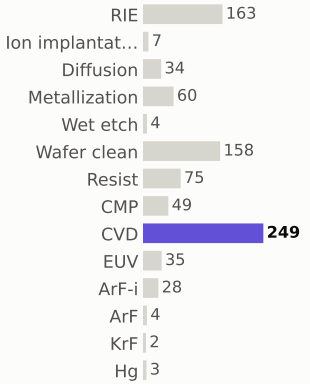

materials deposited (g)

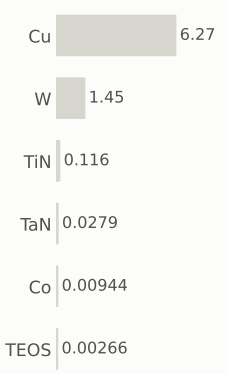

gases emitted (g)

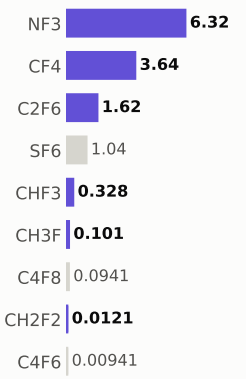

Step #9170: CVD

depo_anisotropic · CVD

1.31	805.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

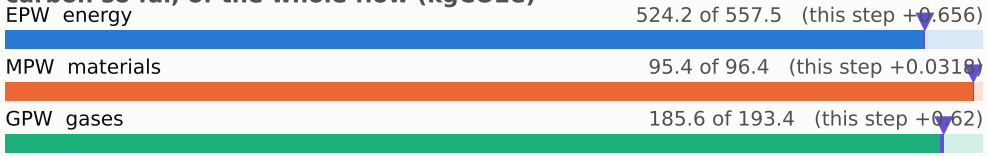

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

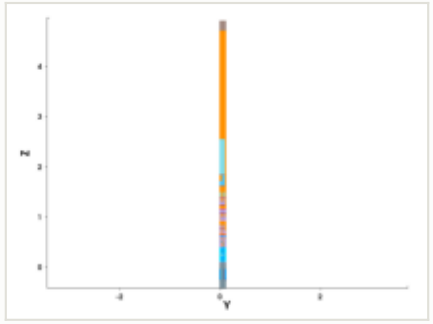

y cut at 0.049 µm

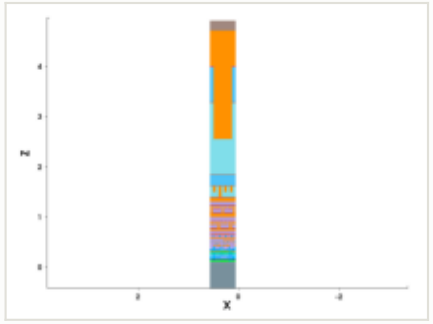

mask for this step

no mask for this step

steps by process area

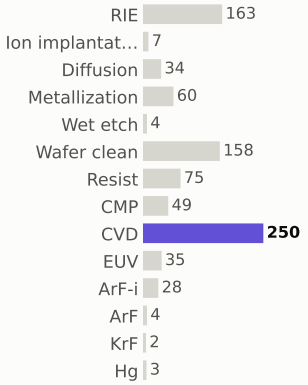

materials deposited (g)

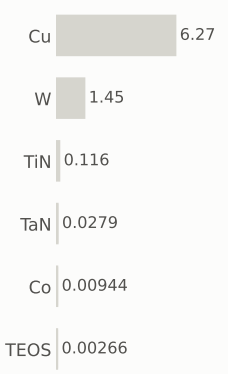

gases emitted (g)

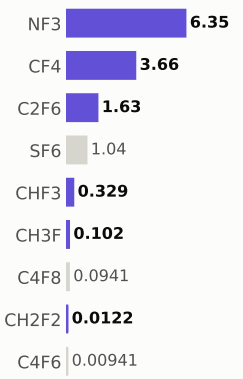

Step #9180: CMP

etch_cmp · CMP

0.169	805.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

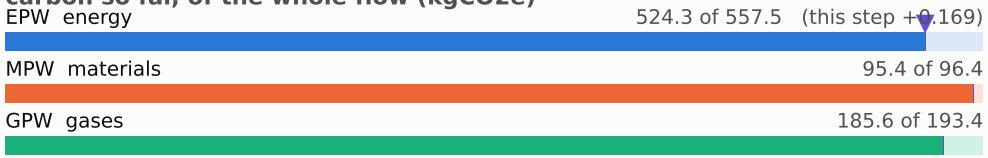

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

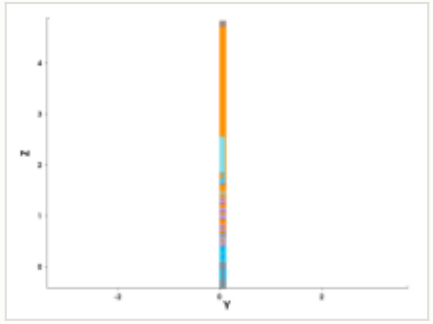

y cut at 0.049 µm

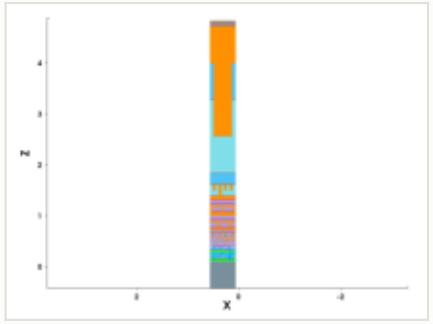

mask for this step

no mask for this step

steps by process area

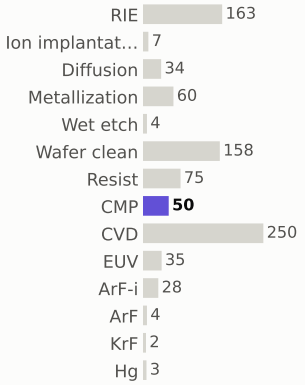

materials deposited (g)

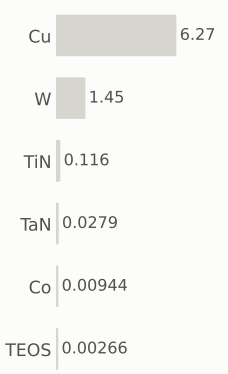

gases emitted (g)

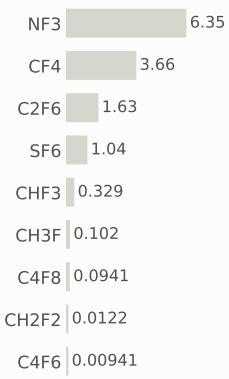

Step #9190: CMP

etch_cmp · CMP

0.169	805.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

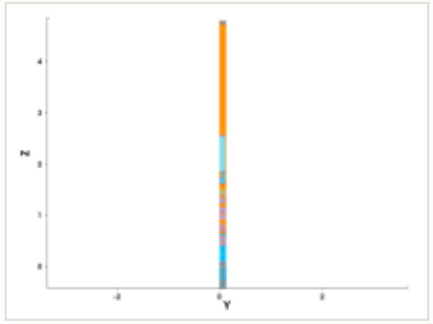

y cut at 0.049 µm

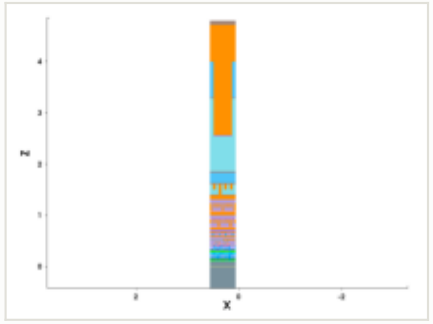

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

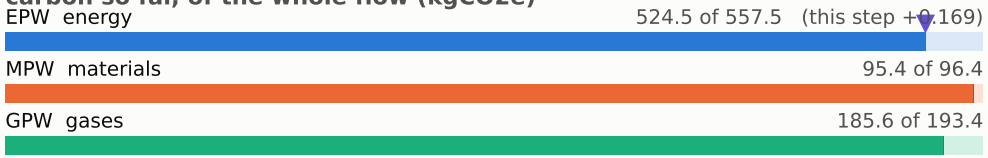

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

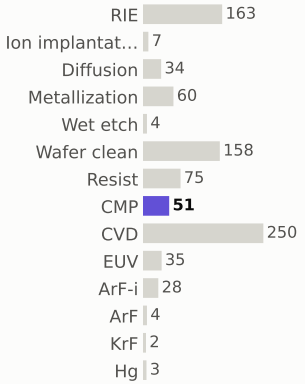

materials deposited (g)

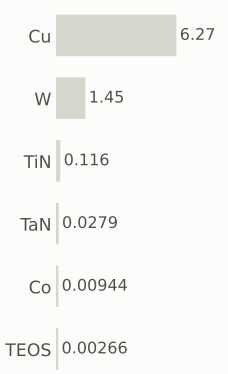

gases emitted (g)

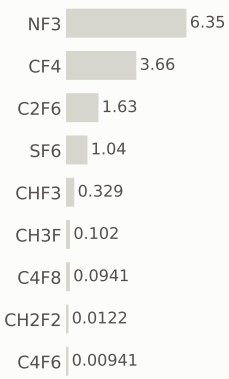

Step #9200: Wafer

bond_structure · Wafer

0	805.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

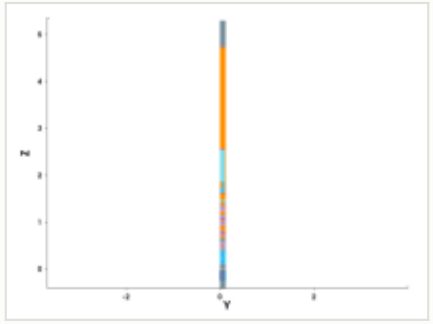

y cut at 0.049 µm

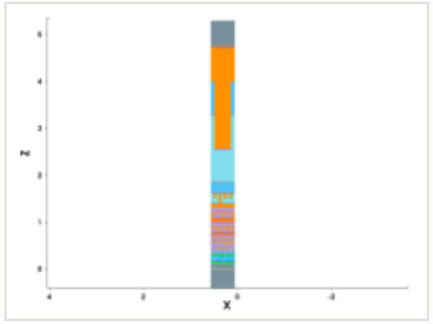

mask for this step

no mask for this step

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

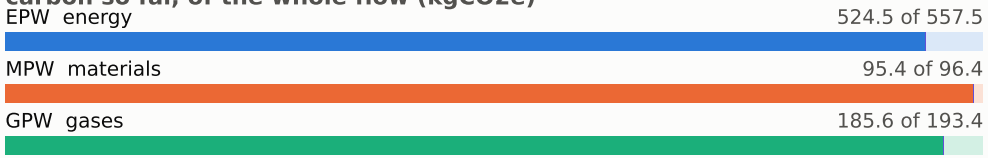

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

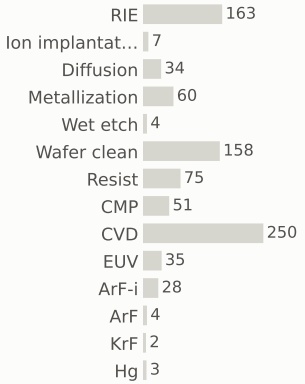

materials deposited (g)

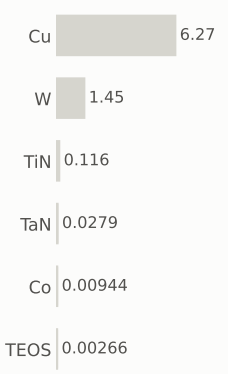

gases emitted (g)

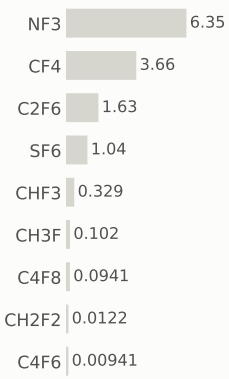

Step #9220: Wafer

flip_structure · Wafer

0	805.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

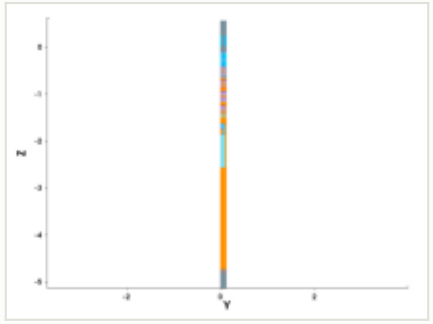

y cut at 0.049 µm

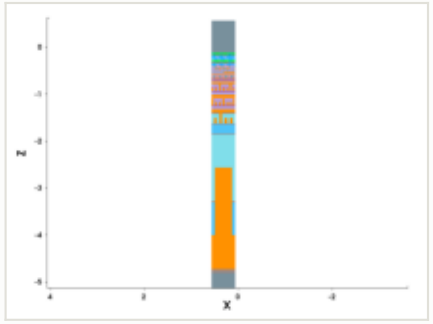

mask for this step

no mask for this step

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

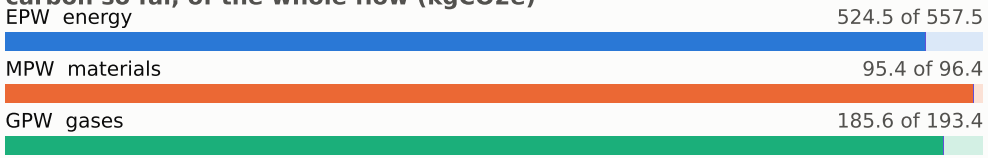

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

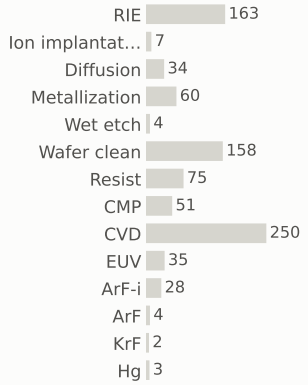

materials deposited (g)

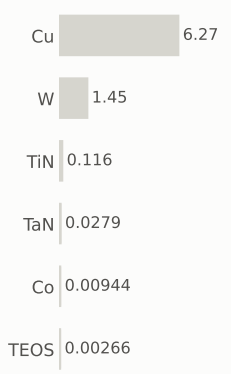

gases emitted (g)

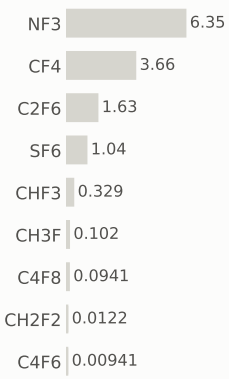

Step #9230: CMP

etch_cmp · CMP

0.169	805.7	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

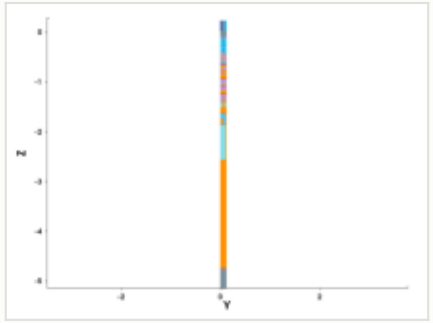

y cut at 0.049 µm

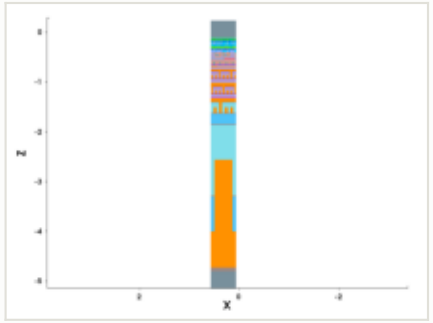

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

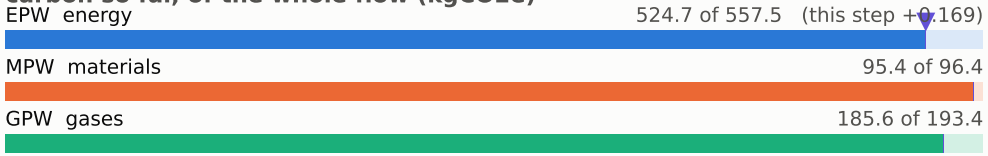

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

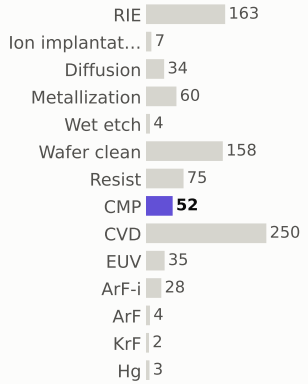

materials deposited (g)

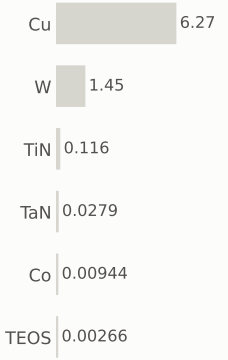

gases emitted (g)



Step #9240: CMP

etch_cmp · CMP

0.169	805.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

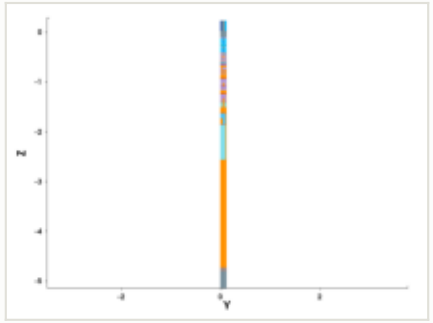

y cut at 0.049 µm

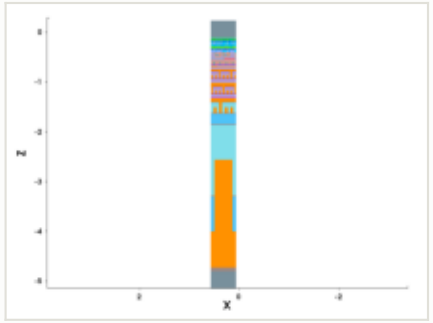

mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

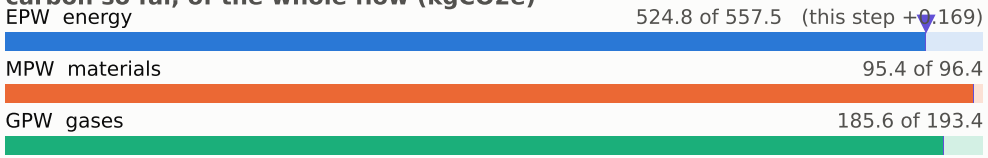

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

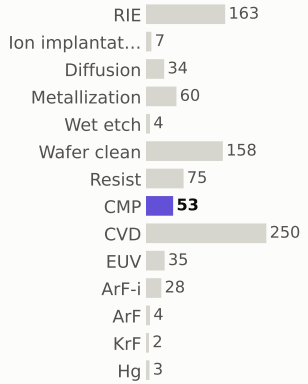

materials deposited (g)

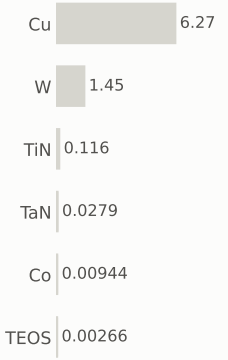

gases emitted (g)

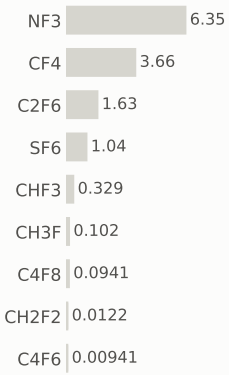

Step #9250: CVD

depo_anisotropic · CVD

1.31	807.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

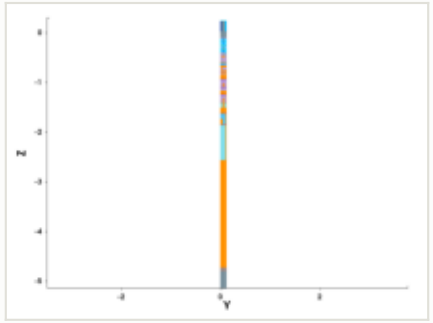

y cut at 0.049 µm

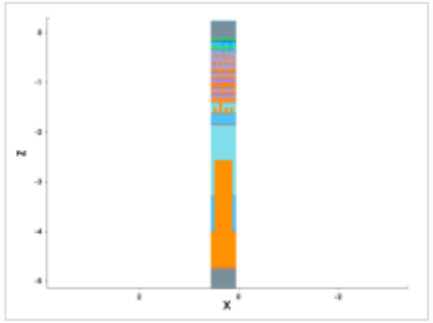

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

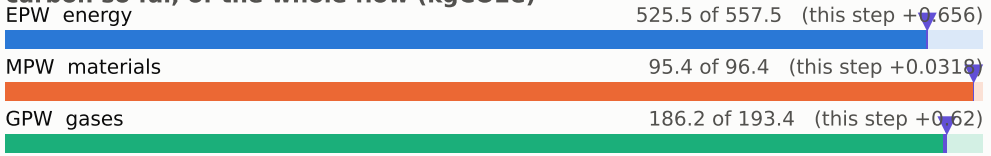

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

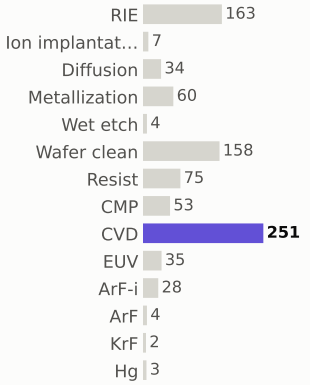

materials deposited (g)



gases emitted (g)

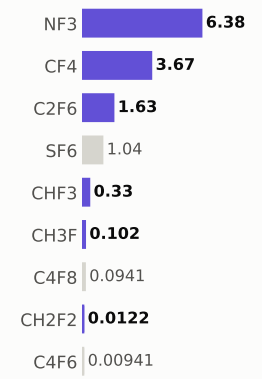

Step #9270: RIE

clean · RIE

1.04	808.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

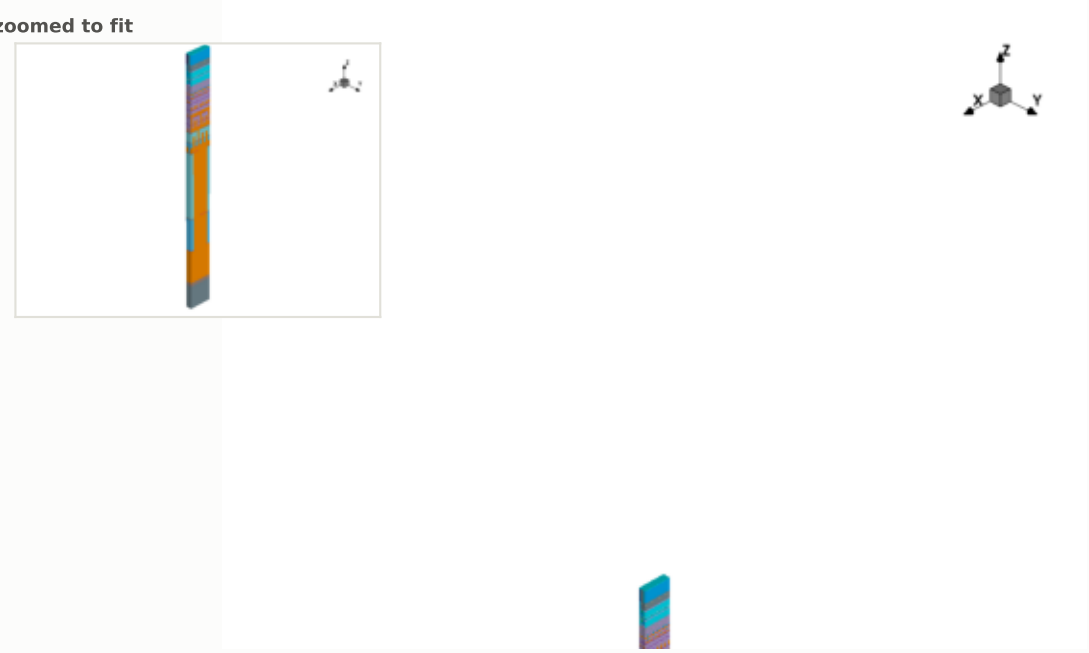

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

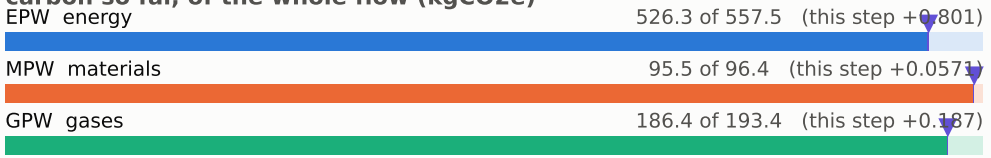

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

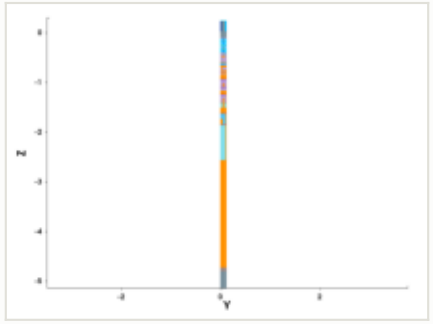

y cut at 0.049 µm

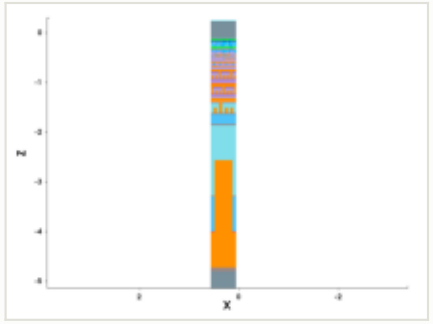

mask for this step

no mask for this step

steps by process area

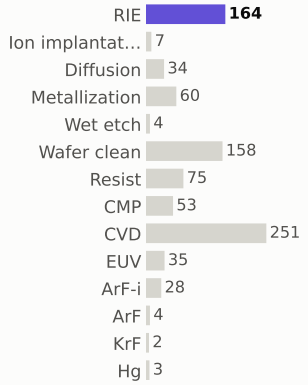

materials deposited (g)

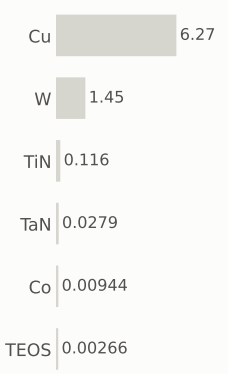

gases emitted (g)

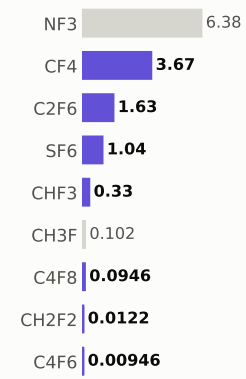

Step #9280: Wafer_clean

clean · Wafer_clean

0.169	808.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

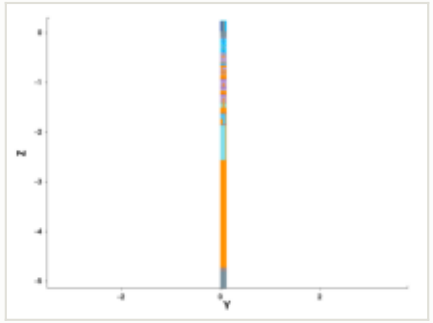

y cut at 0.049 µm

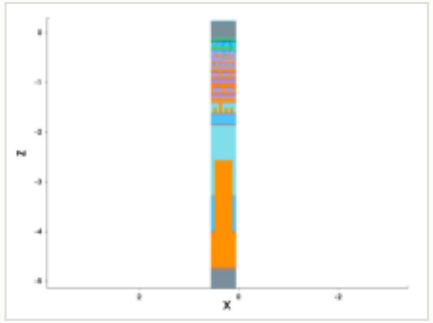

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

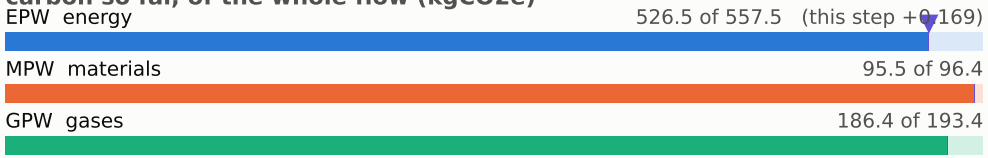

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

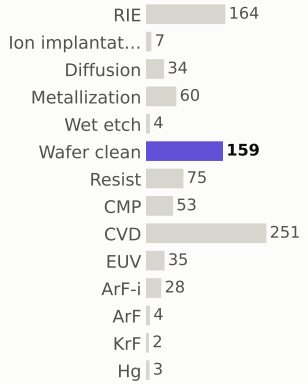

materials deposited (g)

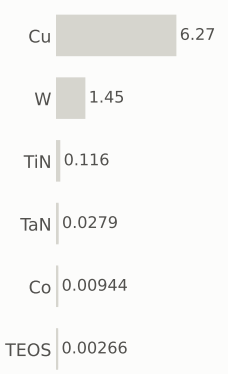

gases emitted (g)

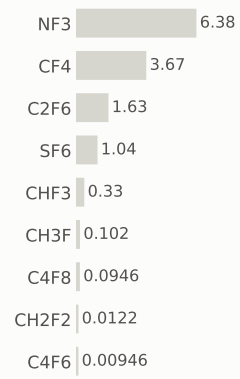

Step #9290: KrF

litho_patterning · KrF

0.199	808.6	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

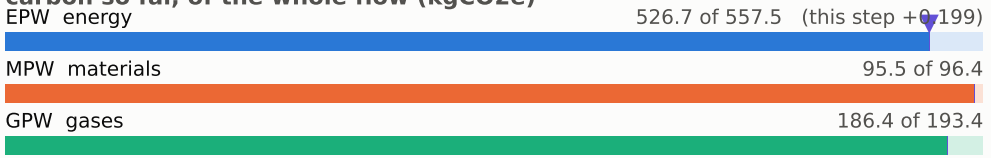

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

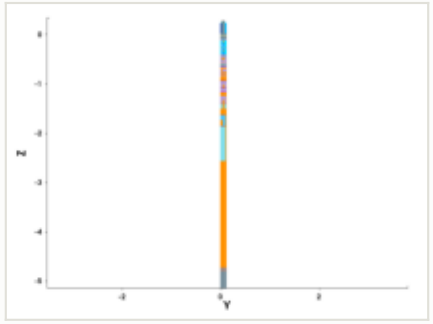

y cut at 0.049 µm

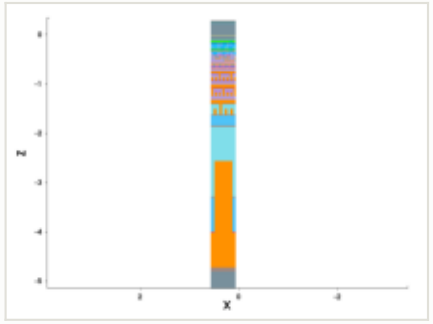

mask: layer 8:0 (GDSII)

steps by process area

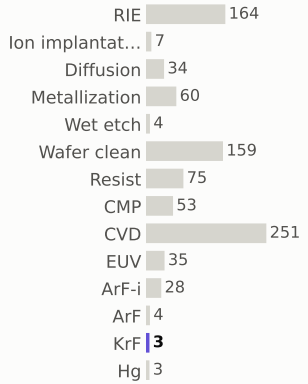

materials deposited (g)

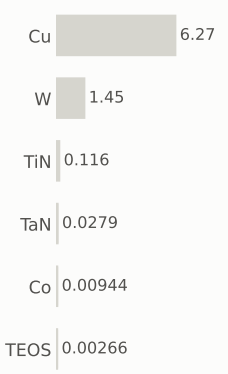

gases emitted (g)

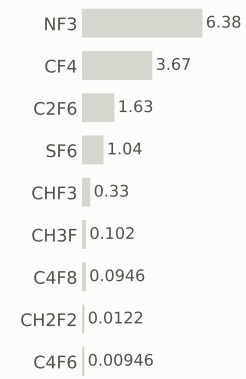

Step #9300: RIE

etch_anisotropic · RIE

1.04	809.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

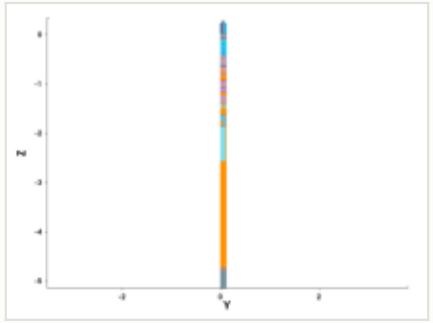

y cut at 0.049 µm

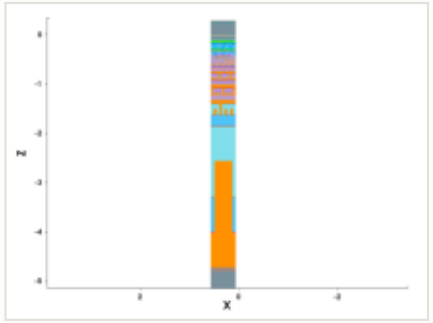

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

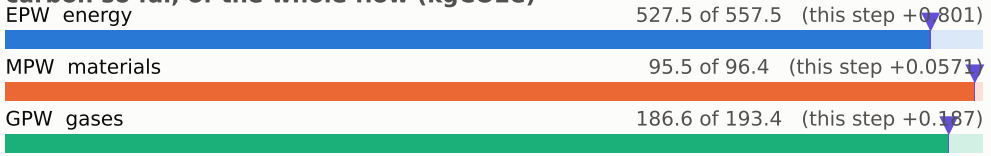

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

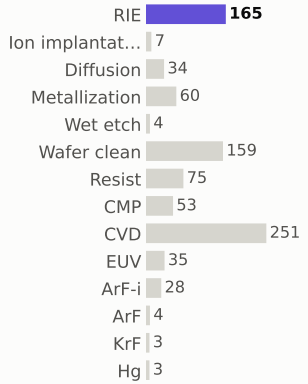

materials deposited (g)

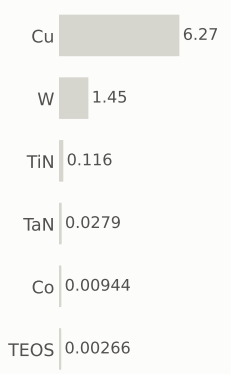

gases emitted (g)

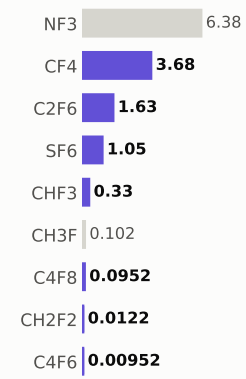

Step #9310: Wafer_clean

etch_strip · Wafer_clean

0.169	809.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

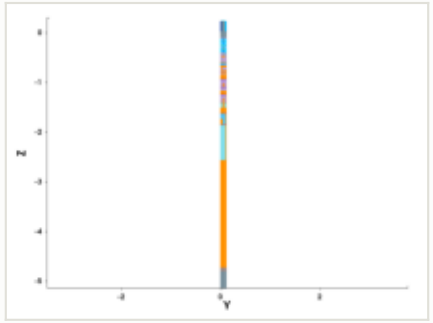

y cut at 0.049 µm

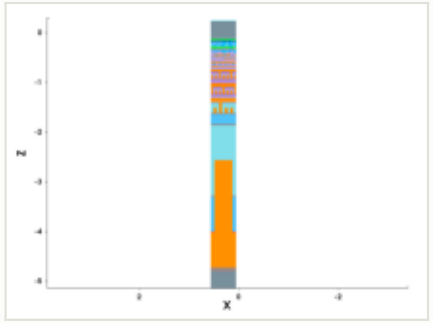

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

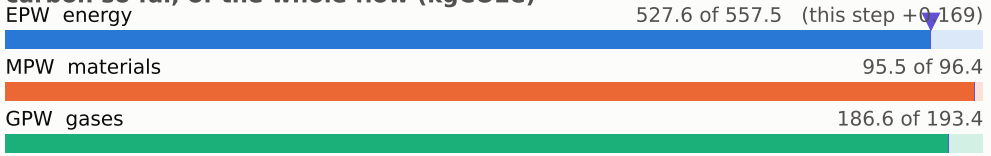

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

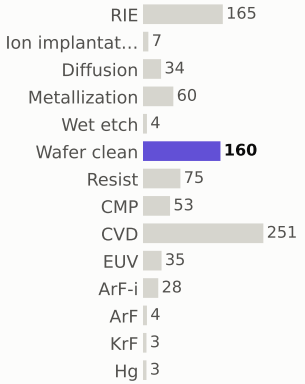

materials deposited (g)

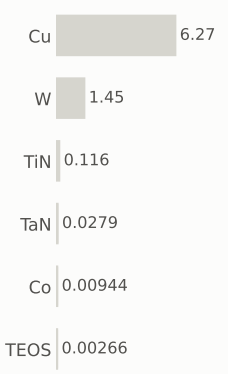

gases emitted (g)

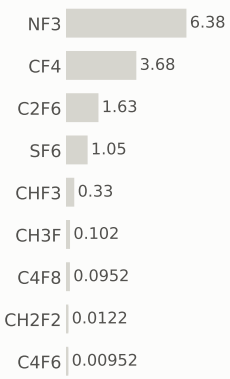

Step #9330: CVD

depo_fill · CVD

1.31	811.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

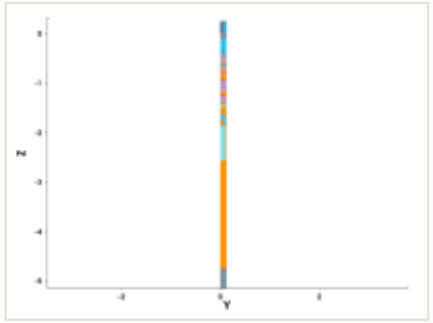

y cut at 0.049 µm

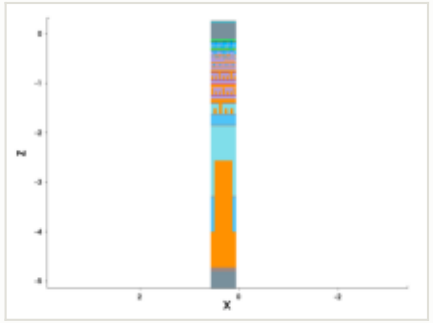

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

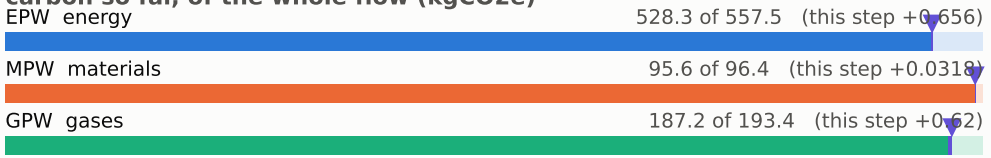

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

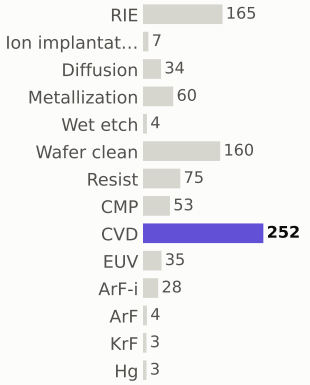

materials deposited (g)

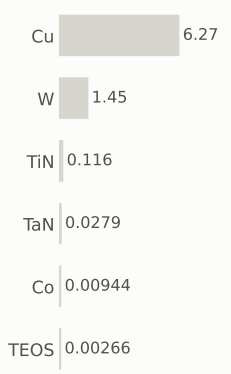

gases emitted (g)

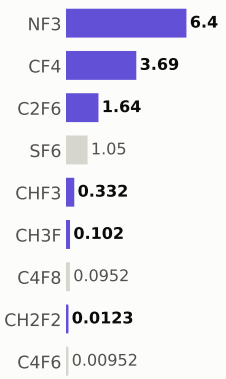

Step #9340: CVD

depo_fill · CVD

1.31	812.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

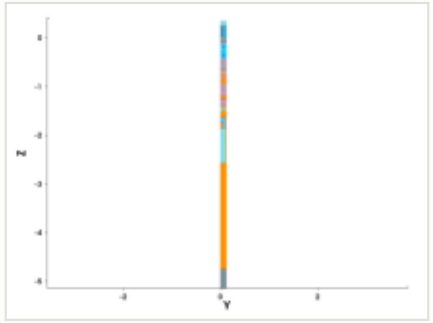

y cut at 0.049 µm

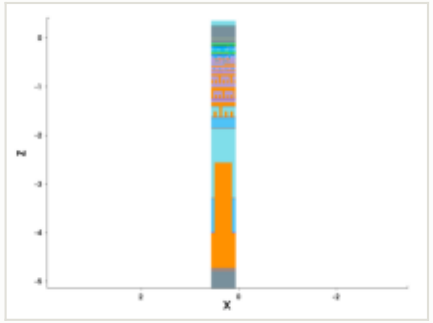

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.092 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

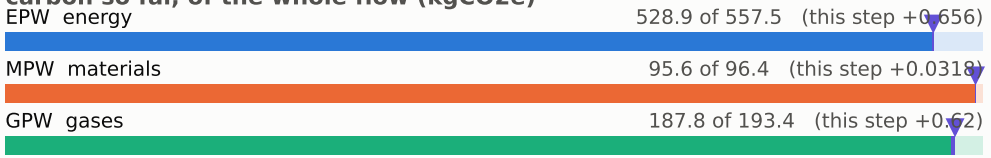

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

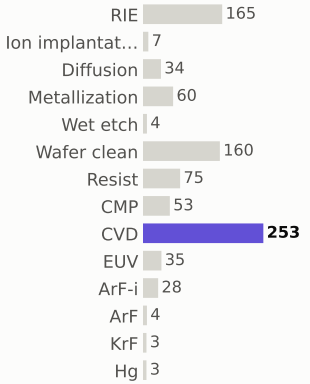

materials deposited (g)

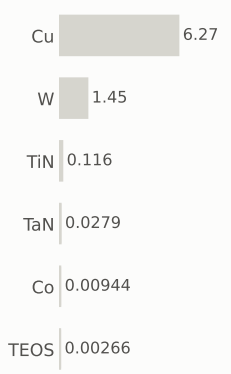

gases emitted (g)

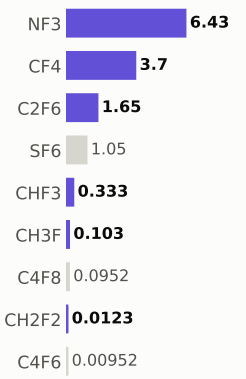

Step #9350: ArF

litho_patterning · ArF

0.199	812.6	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

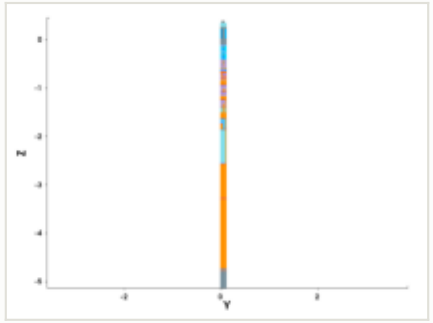

y cut at 0.049 µm

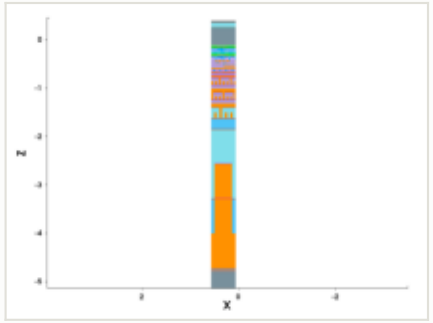

mask: layer 920:0 (GDSII)

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

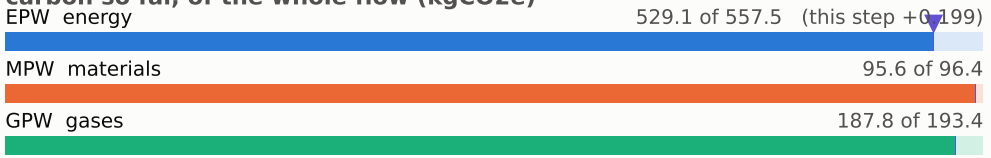

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

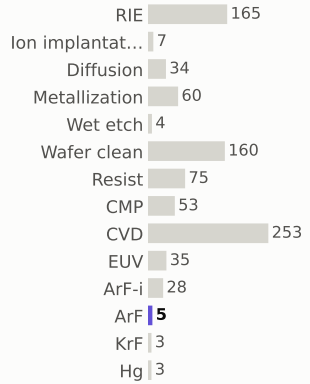

materials deposited (g)

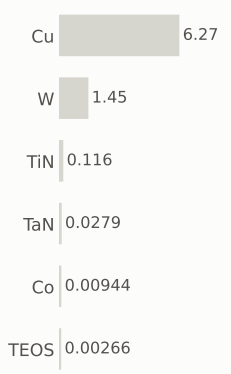

gases emitted (g)

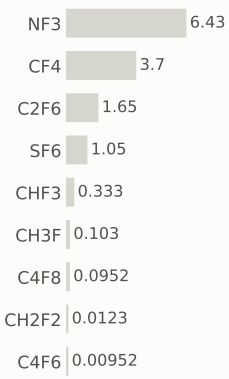

Step #9360: RIE

etch_anisotropic · RIE

1.04	813.6	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

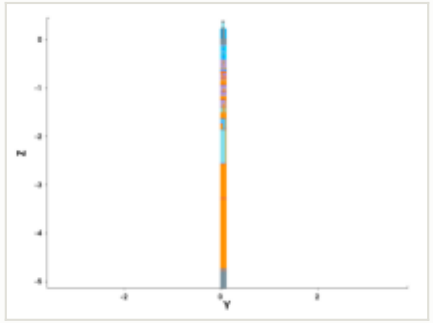

y cut at 0.049 µm

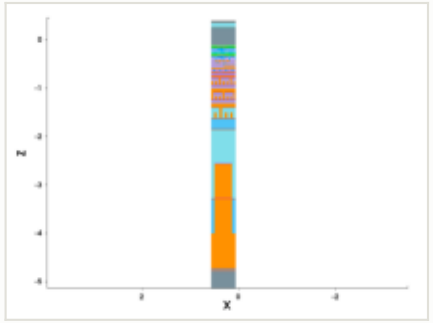

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

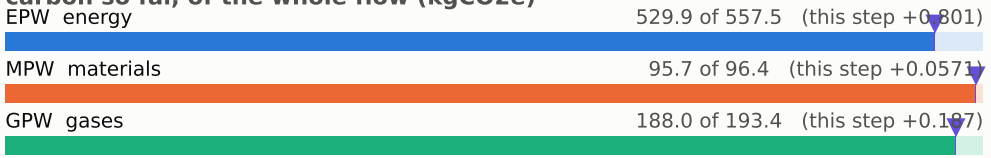

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

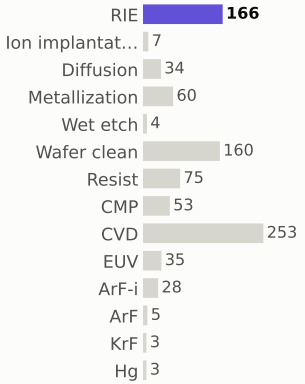

materials deposited (g)

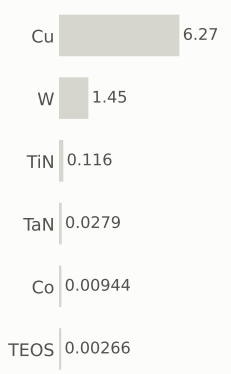

gases emitted (g)

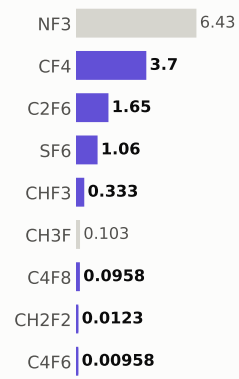

Step #9370: Wafer_clean

etch_strip · Wafer_clean

0.169	813.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

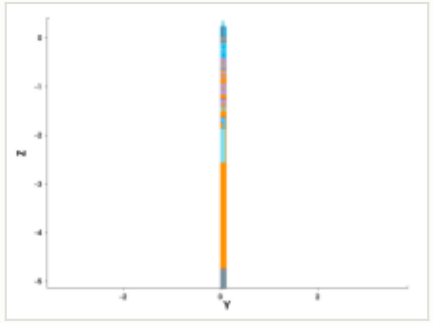

y cut at 0.049 µm

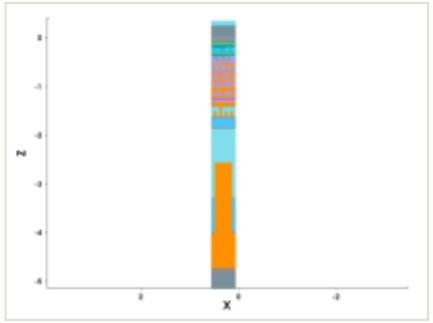

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

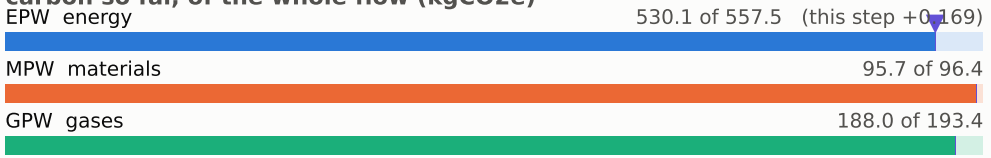

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

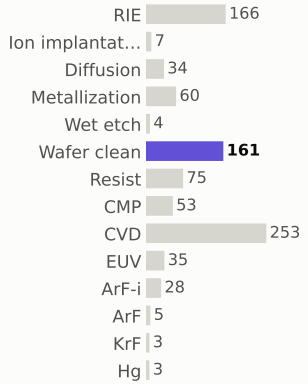

materials deposited (g)

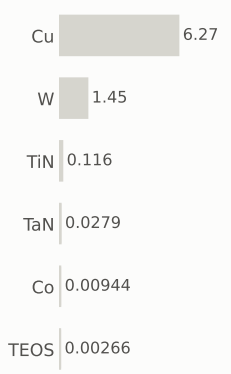

gases emitted (g)

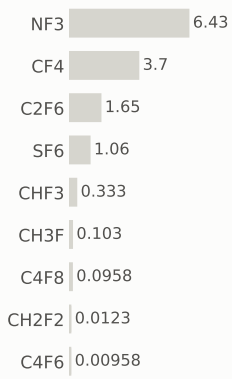

Step #9380: Metallization

depo_ellipsoidal · Metallization

1.2	815.0	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

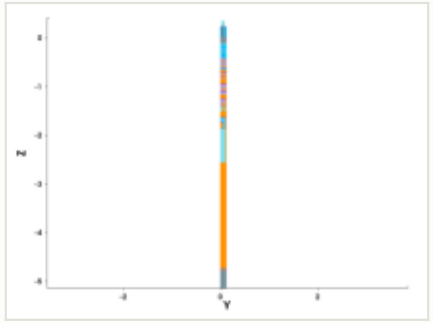

y cut at 0.049 µm

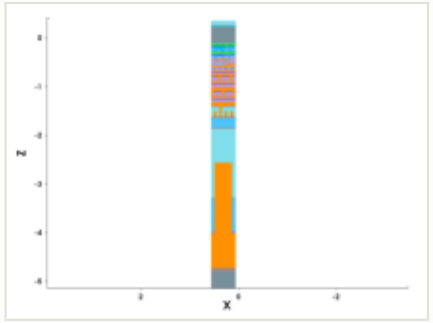

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

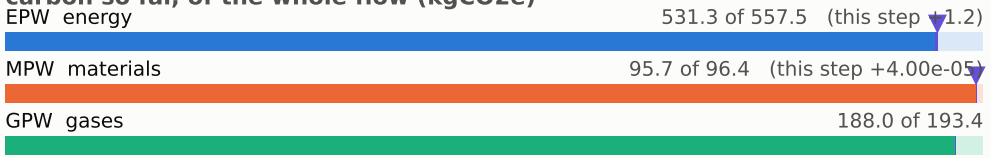

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

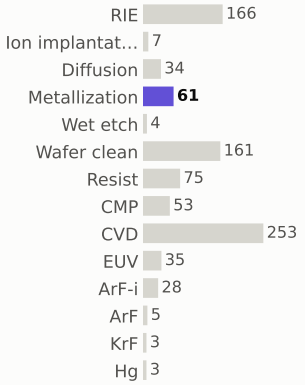

materials deposited (g)

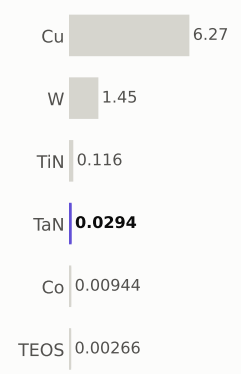

gases emitted (g)

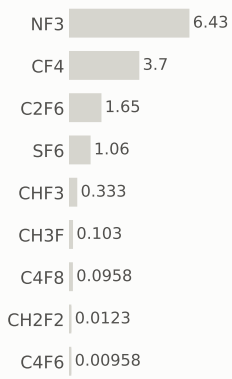

Step #9390: Metallization

depo_fill · Metallization

1.21	816.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

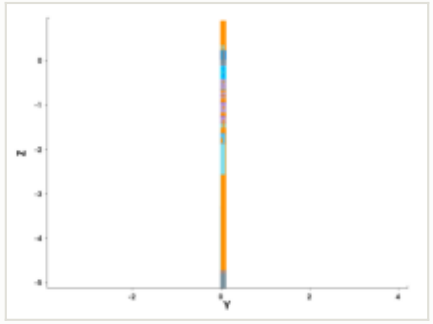

y cut at 0.049 µm

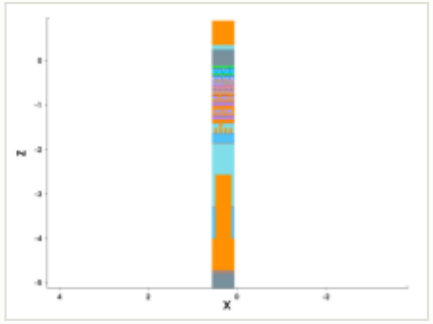

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

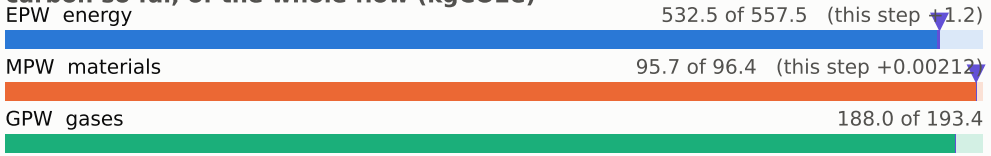

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

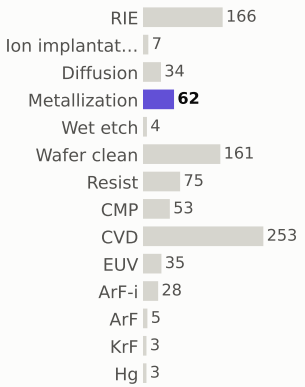

materials deposited (g)

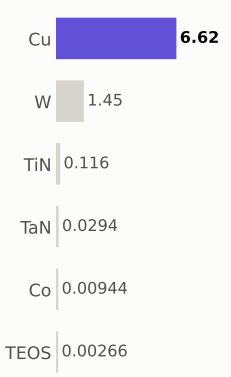

gases emitted (g)

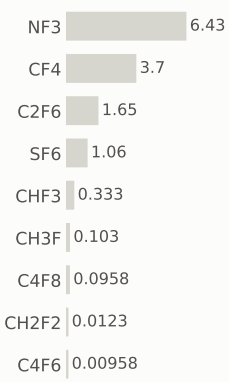

Step #9400: Diffusion

treatment · Diffusion

0.801	817.0	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

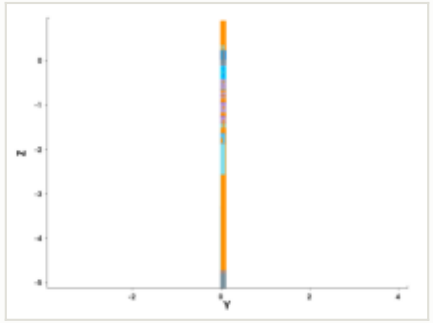

y cut at 0.049 µm

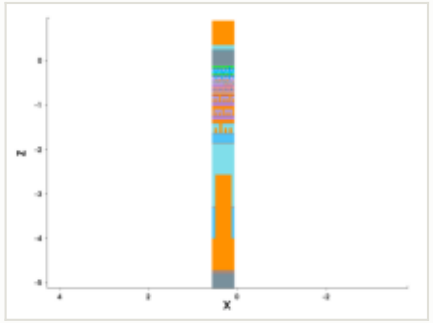

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

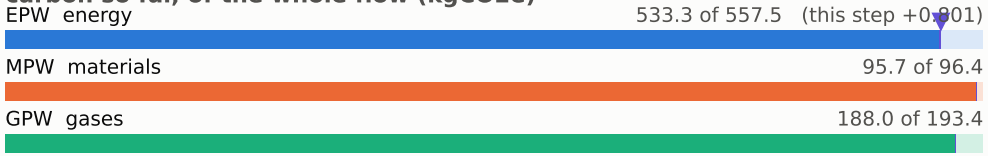

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

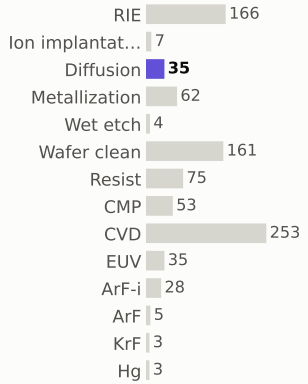

materials deposited (g)

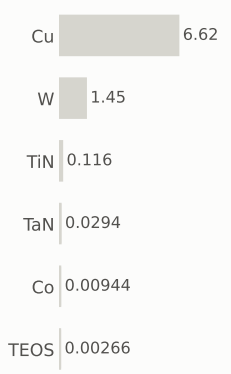

gases emitted (g)

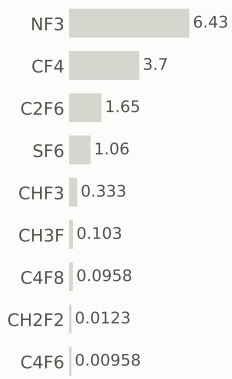

Step #9410: CMP

etch_cmp · CMP

0.169	817.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

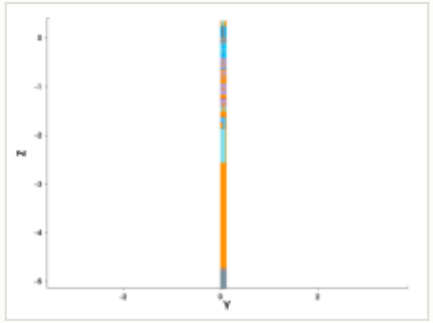

y cut at 0.049 µm

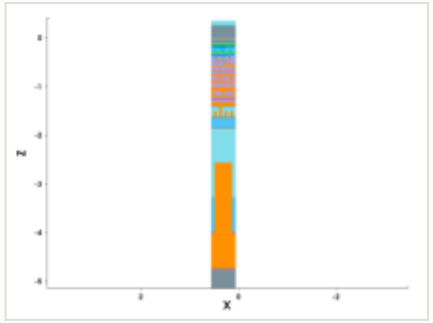

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

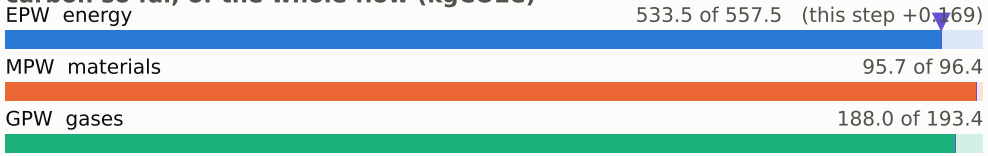

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

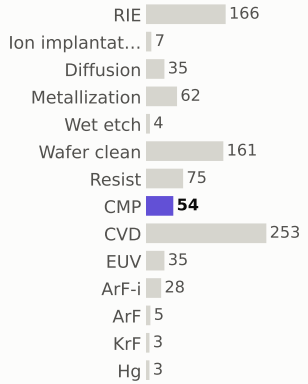

materials deposited (g)

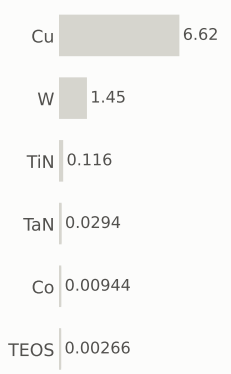

gases emitted (g)

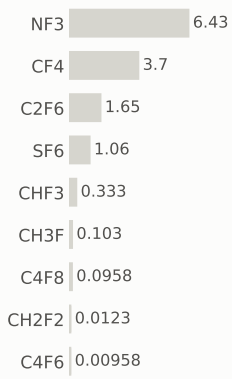

Step #9430: CVD

depo_fill · CVD

1.31	818.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

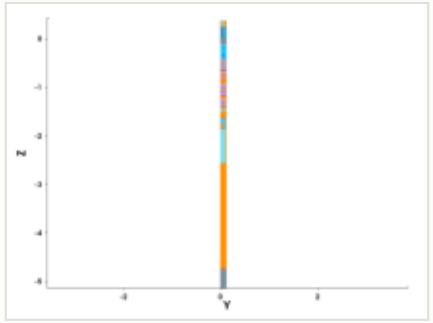

y cut at 0.049 µm

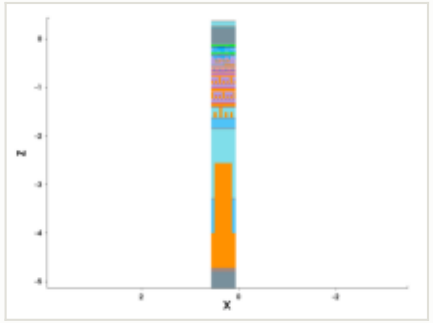

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

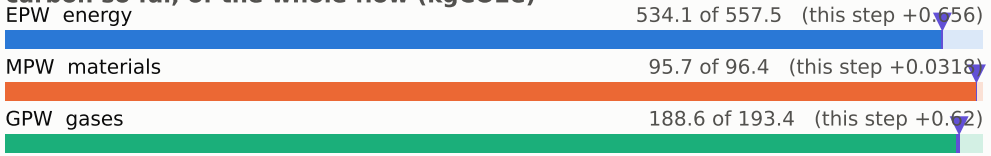

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

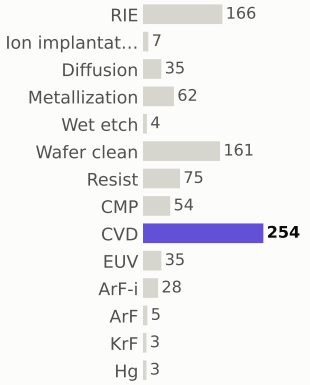

materials deposited (g)

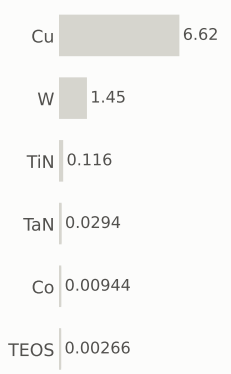

gases emitted (g)

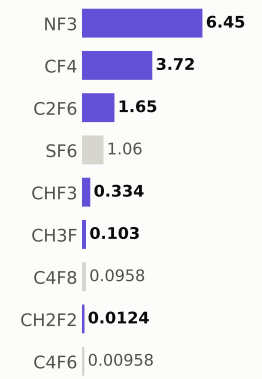

Step #9440: CVD

depo_fill · CVD

1.31	819.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.204 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

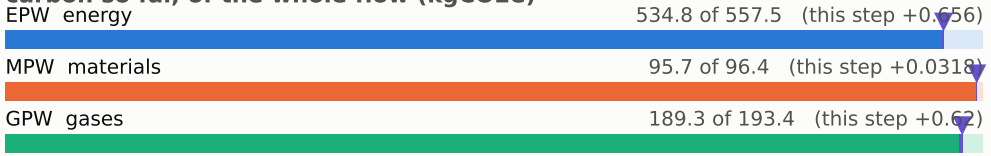

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

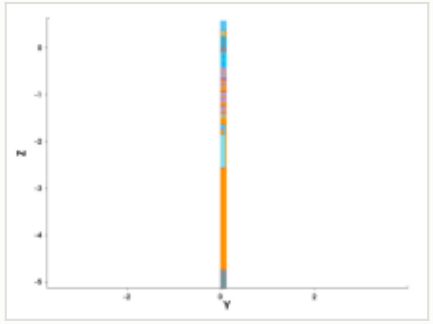

y cut at 0.049 µm

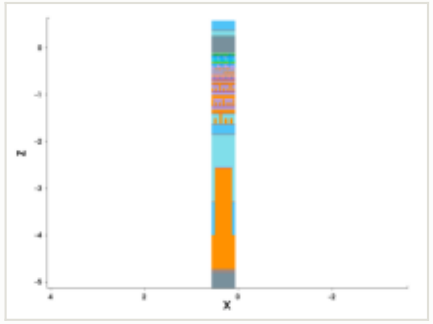

mask for this step

no mask for this step

steps by process area

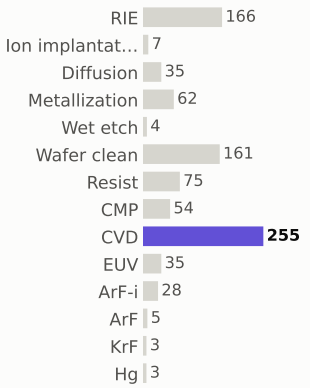

materials deposited (g)

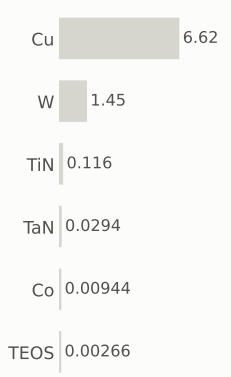

gases emitted (g)

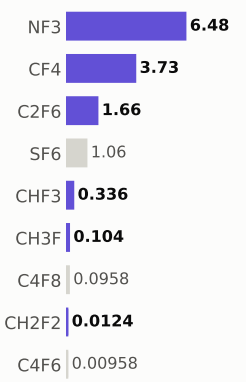

Step #9450: ArF

litho_patterning · ArF

0.199	820.0	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

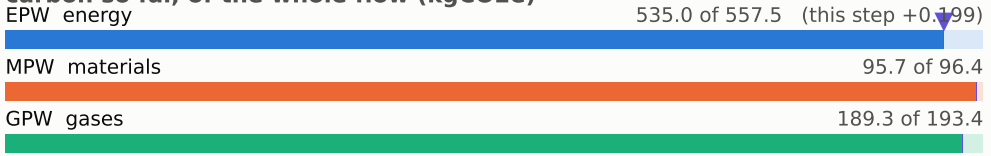

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

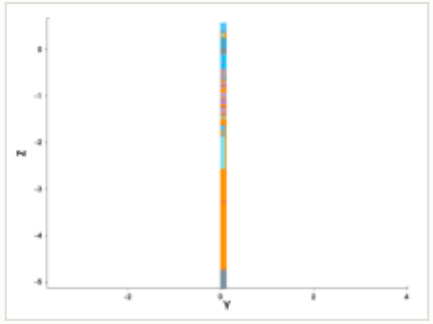

y cut at 0.049 µm

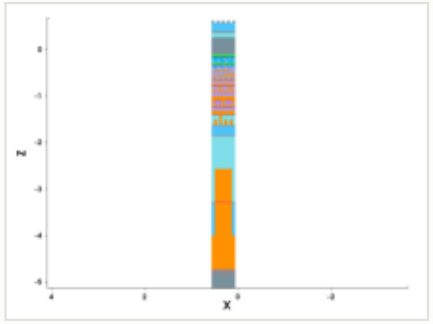

mask: layer 940:0 (GDSII)

steps by process area

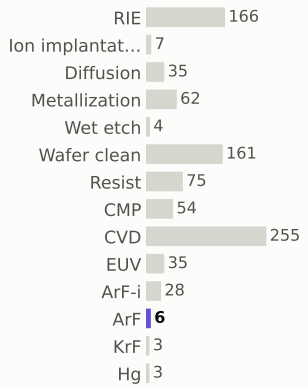

materials deposited (g)

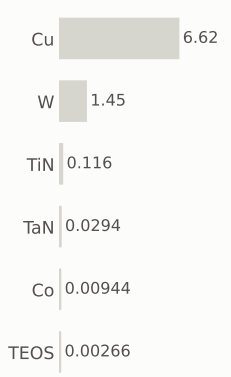

gases emitted (g)

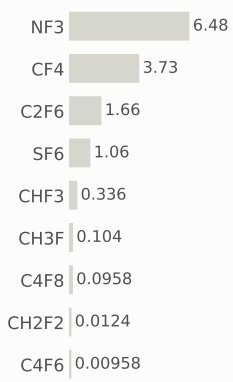

Step #9460: RIE

etch_anisotropic · RIE

1.04	821.0	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

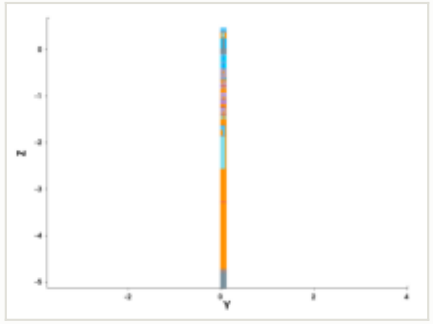

y cut at 0.049 µm

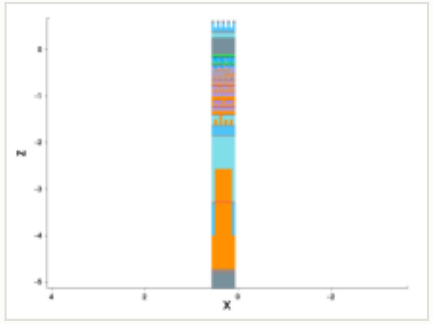

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

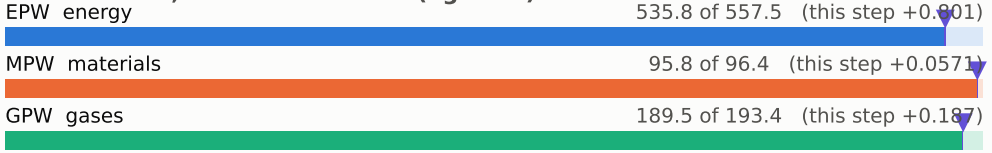

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

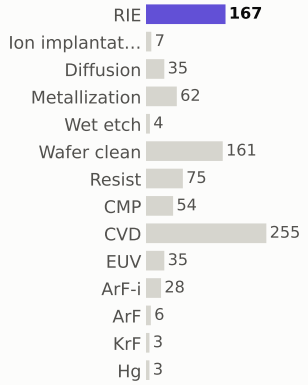

materials deposited (g)

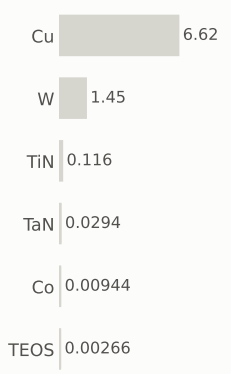

gases emitted (g)

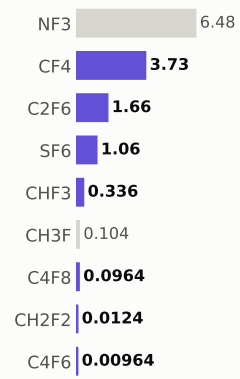

Step #9470: Wafer_clean

etch_strip · Wafer_clean

0.169	821.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

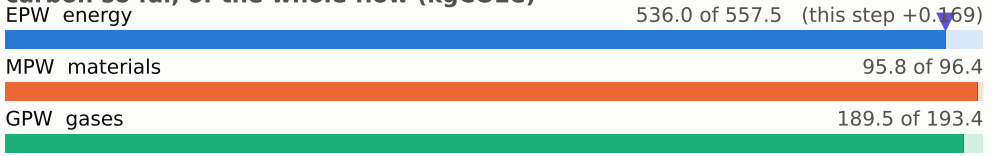

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

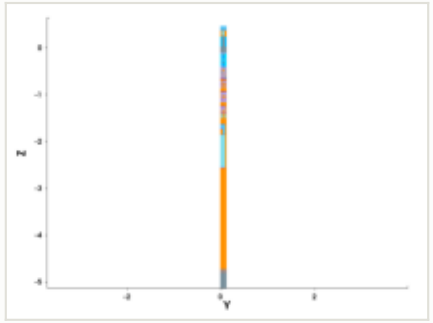

y cut at 0.049 µm

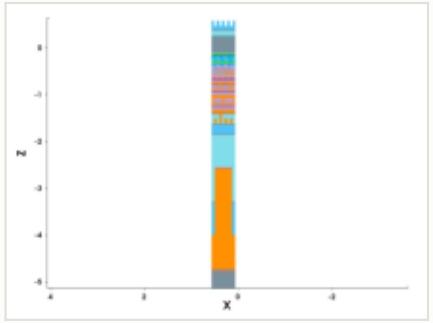

mask for this step

no mask for this step

steps by process area

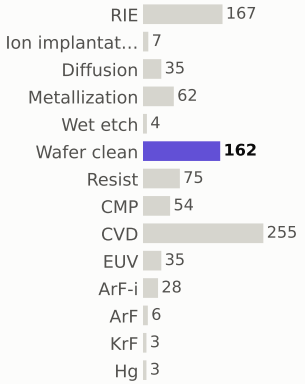

materials deposited (g)

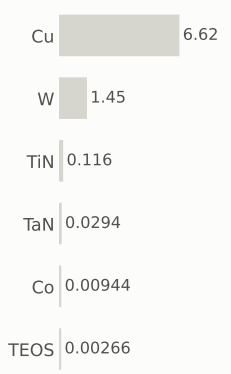

gases emitted (g)

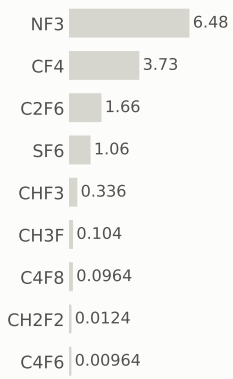

Step #9480: RIE

clean · RIE

1.04	822.2	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

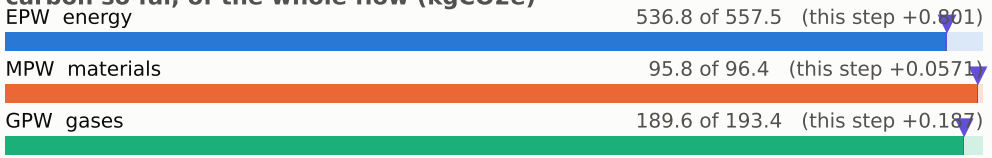

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

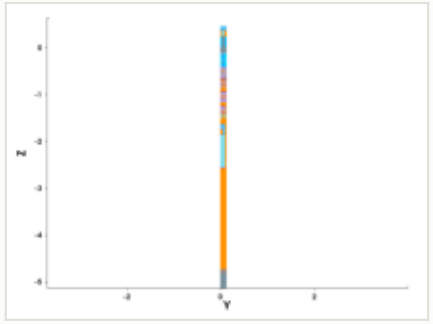

y cut at 0.049 µm

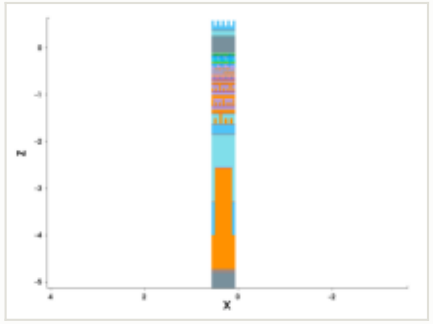

mask for this step

no mask for this step

steps by process area

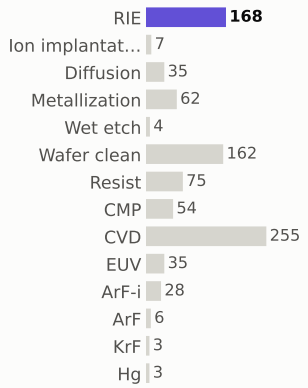

materials deposited (g)

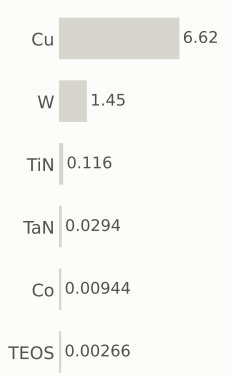

gases emitted (g)

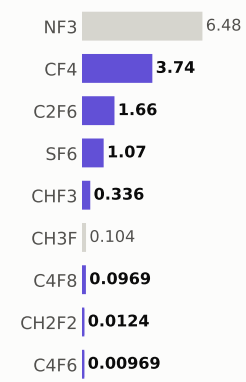

Step #9490: Wafer_clean

clean · Wafer_clean

0.169	822.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

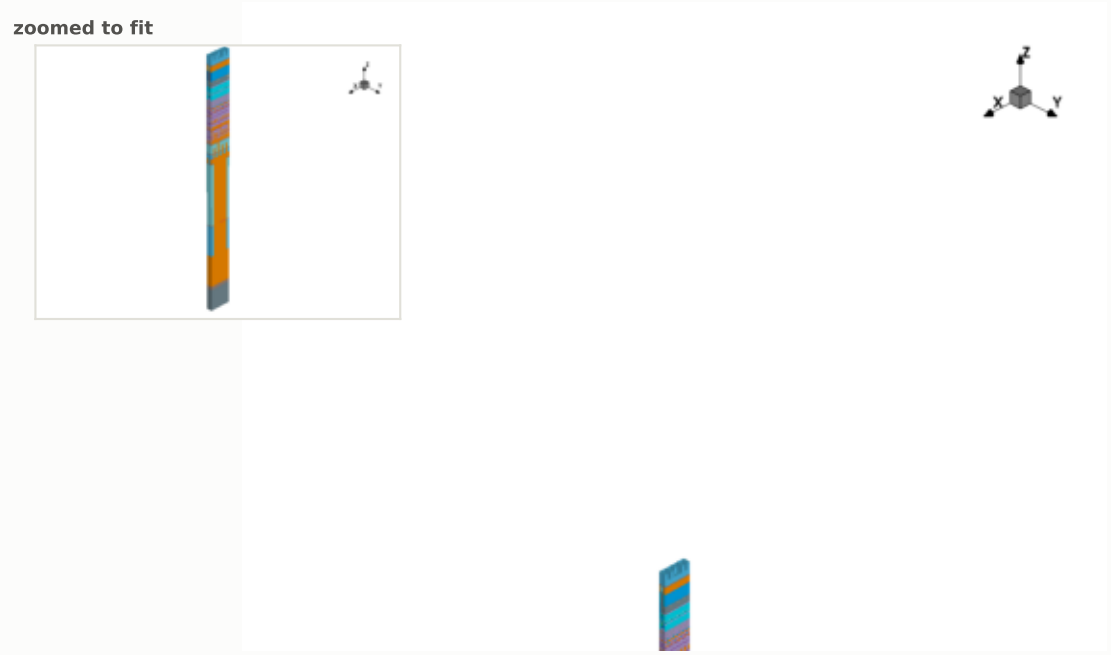

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

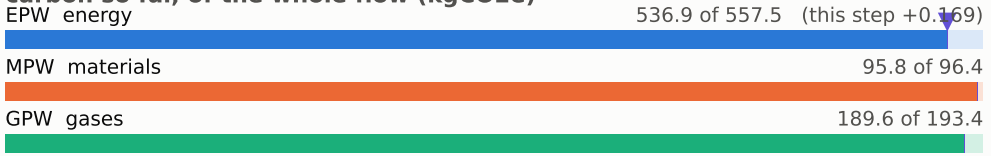

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

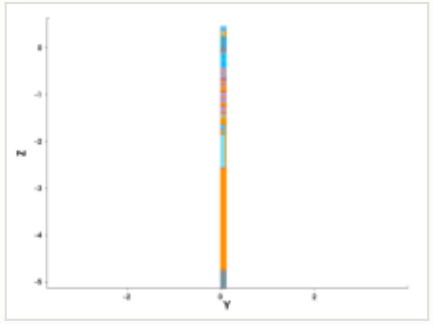

y cut at 0.049 µm

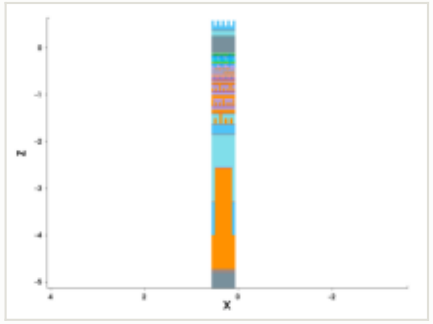

mask for this step

no mask for this step

steps by process area

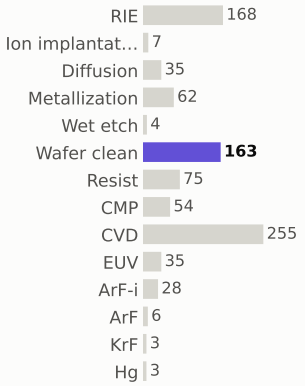

materials deposited (g)



gases emitted (g)

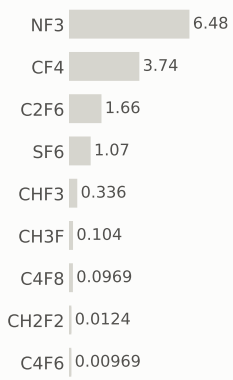

Step #9500: ArF

litho_patterning · ArF

0.199	822.6	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

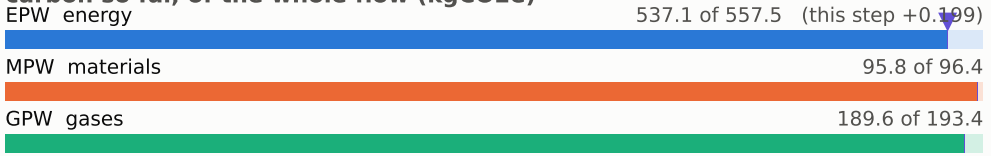

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

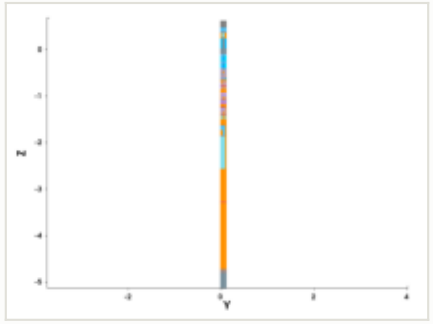

y cut at 0.049 µm

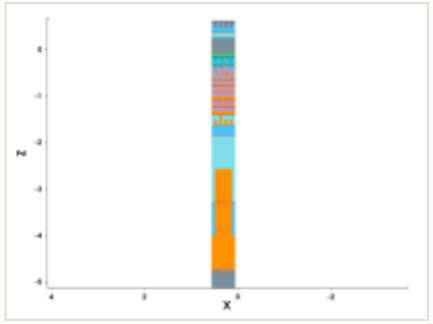

mask: layer 930:0 (GDSII)

steps by process area

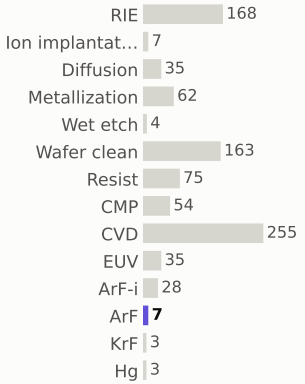

materials deposited (g)

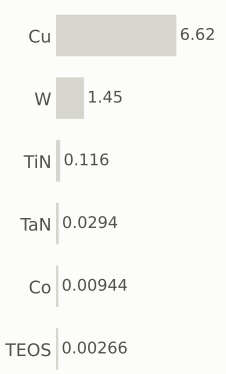

gases emitted (g)

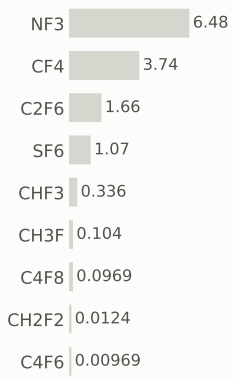

Step #9510: RIE

etch_anisotropic · RIE

1.04	823.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

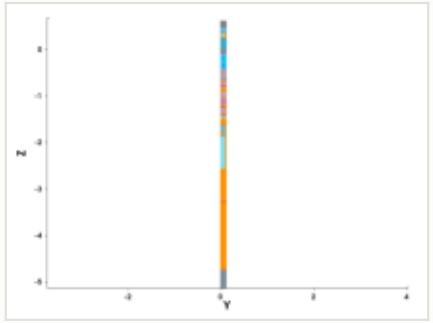

y cut at 0.049 µm

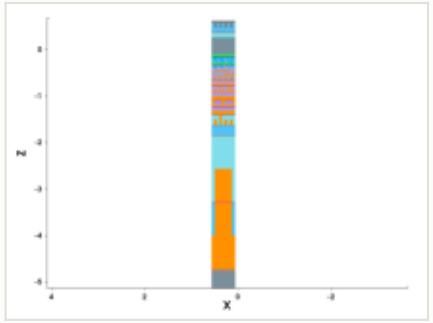

mask for this step

no mask for this step

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

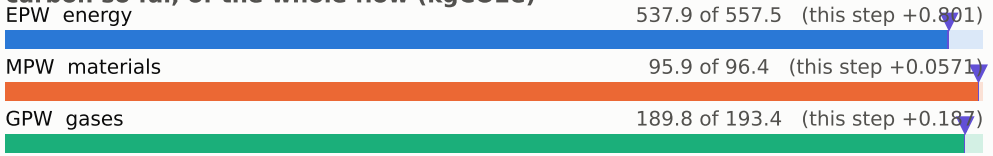

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

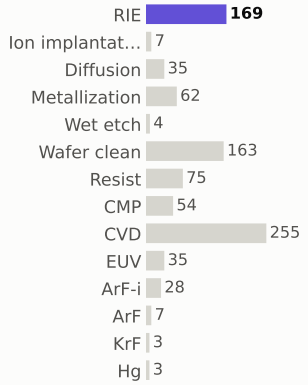

materials deposited (g)

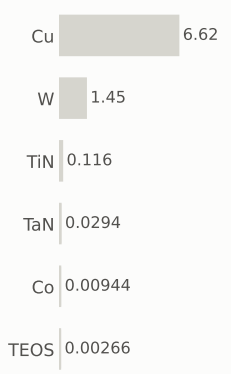

gases emitted (g)

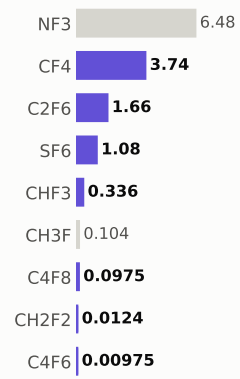

Step #9520: Wafer_clean

etch_strip · Wafer_clean

0.169	823.8	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

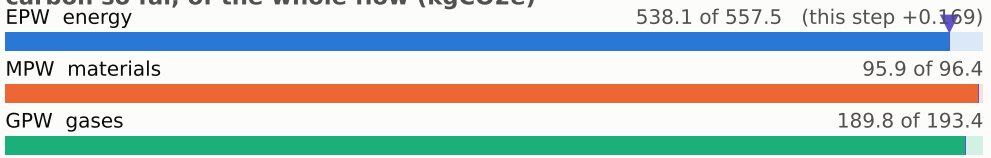

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

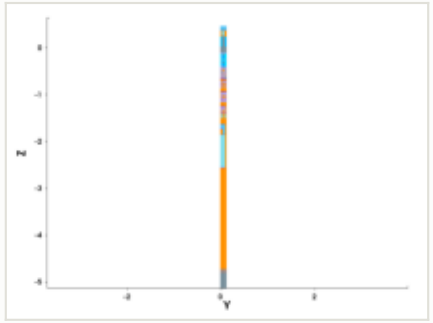

y cut at 0.049 µm

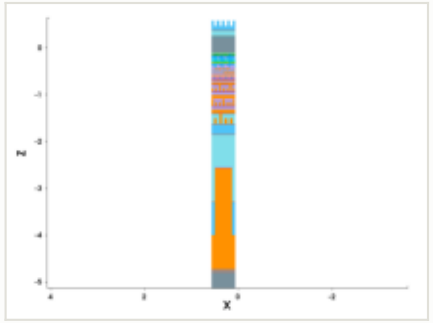

mask for this step

no mask for this step

steps by process area

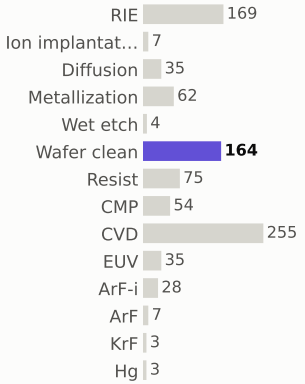

materials deposited (g)

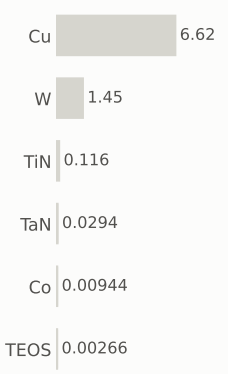

gases emitted (g)

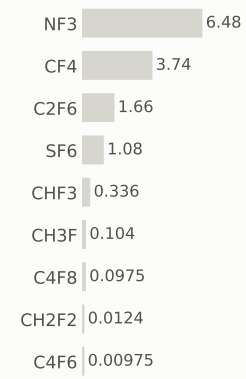

Step #9530: Metallization

depo_ellipsoidal · Metallization

1.2	825.0	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

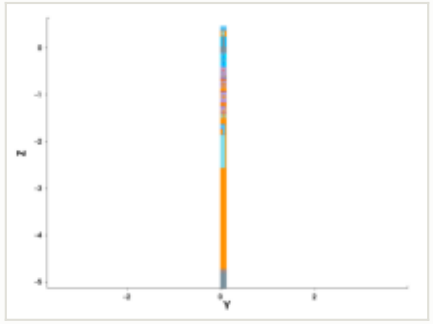

y cut at 0.049 µm

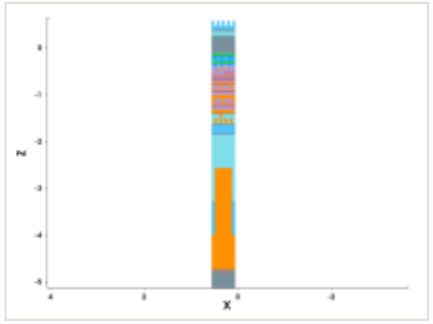

mask for this step

no mask for this step

this step

process area	Metallization	EPW	1.2 kgCO2e
material	TaN	EPW tool	0.86 kgCO2e
thickness	0.0016 µm	EPW overhead	0.344 kgCO2e
material GWP	25.8159 gCO2e/g	MPW	4.00e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	2 kWh + 0.8 overhead	embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

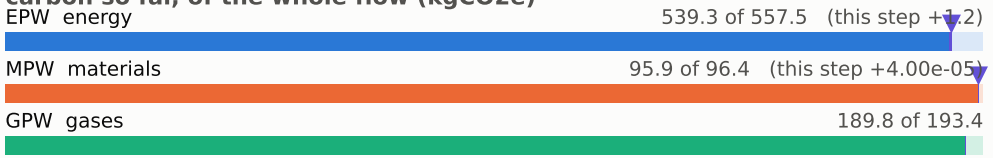

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

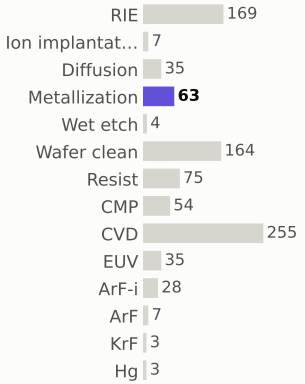

materials deposited (g)

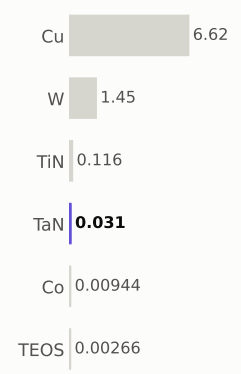

gases emitted (g)

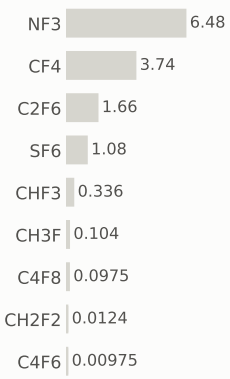

Step #9540: Metallization

depo_fill · Metallization

1.21	826.2	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

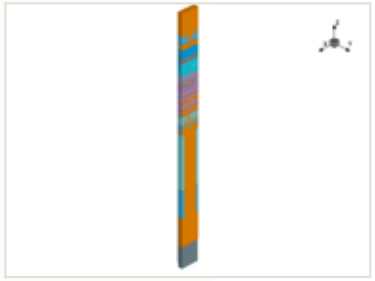

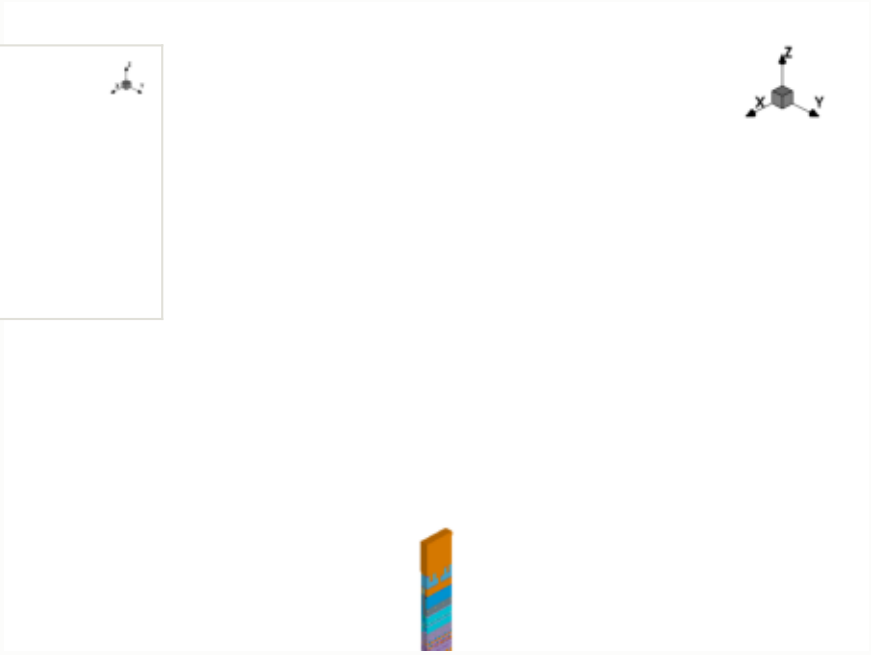

x cut at 0.385 µm

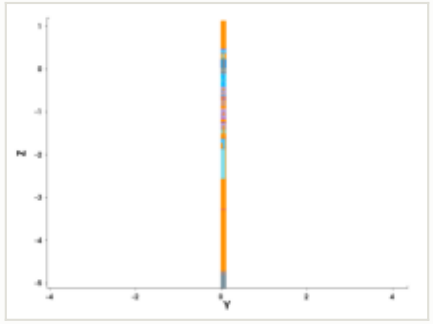

y cut at 0.049 µm

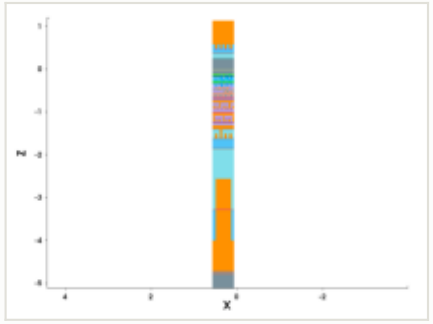

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

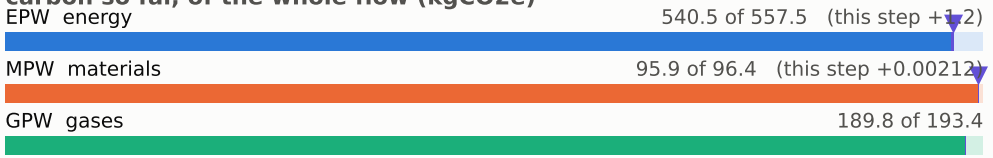

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

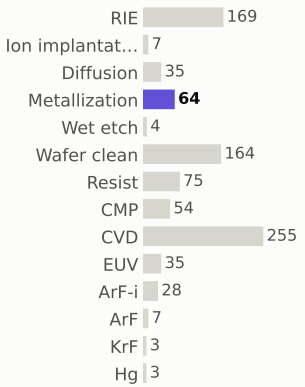

materials deposited (g)

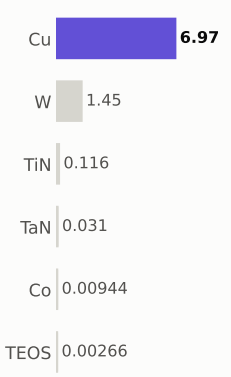

gases emitted (g)

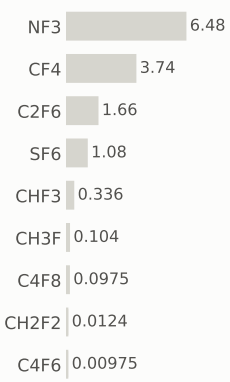

Step #9550: Diffusion

treatment · Diffusion

0.801	827.0	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

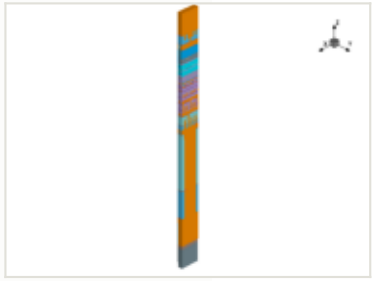

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

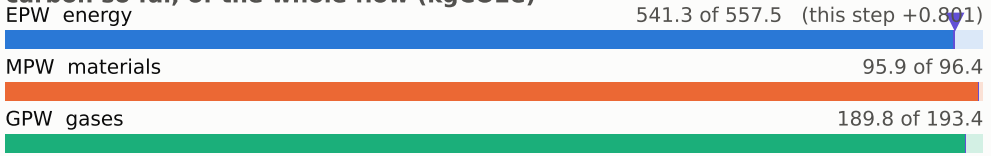

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

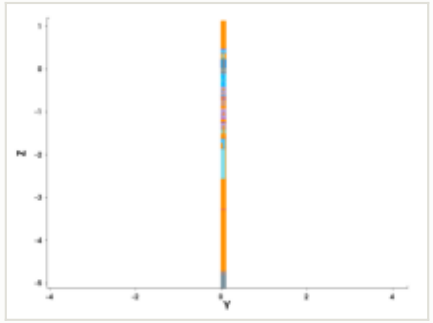

y cut at 0.049 µm

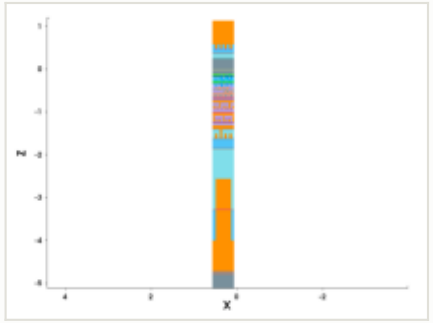

mask for this step

no mask for this step

steps by process area

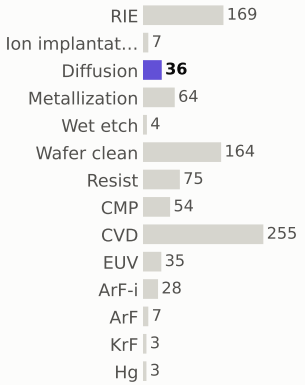

materials deposited (g)



gases emitted (g)

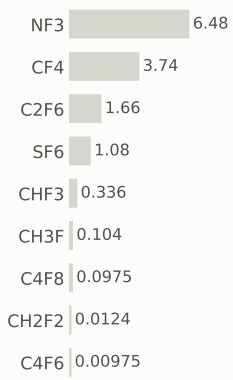

Step #9560: CMP

etch_cmp · CMP

0.169	827.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

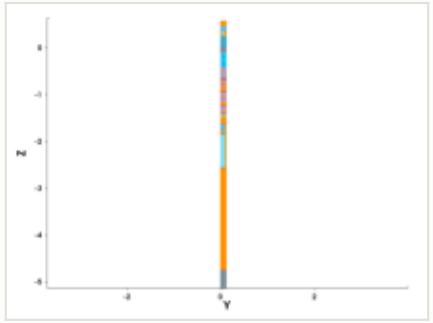

y cut at 0.049 µm

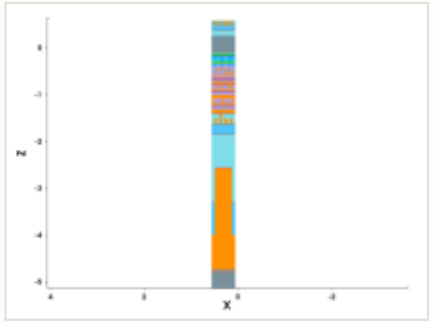

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

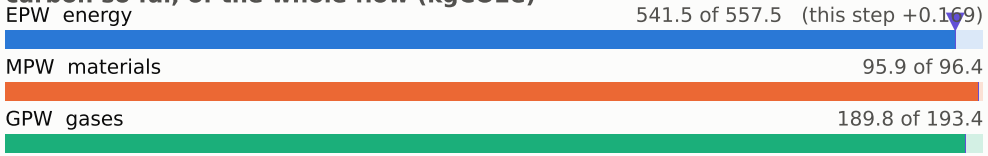

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

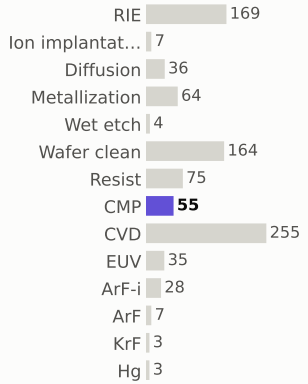

materials deposited (g)

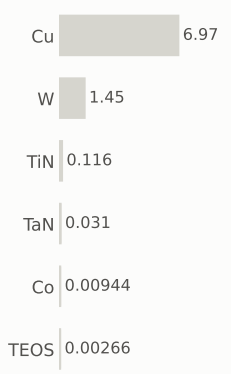

gases emitted (g)

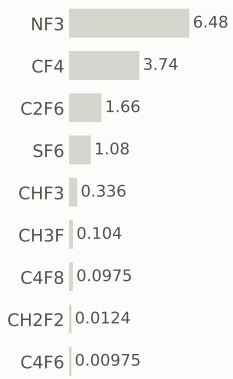

Step #9580: CVD

depo_fill · CVD

1.31	828.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

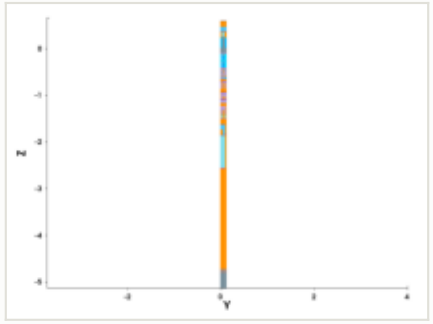

y cut at 0.049 µm

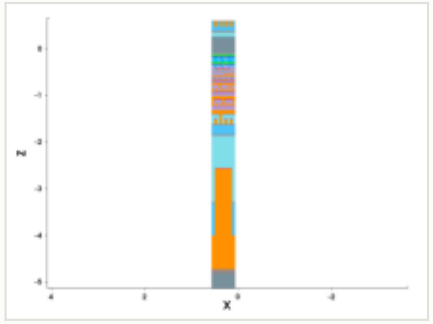

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

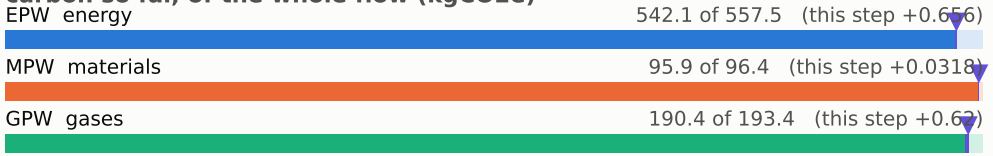

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

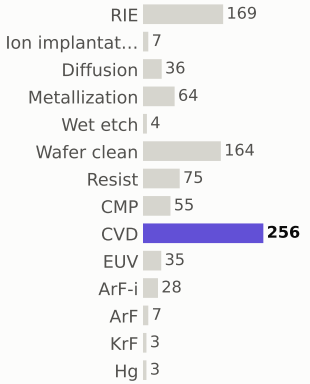

materials deposited (g)

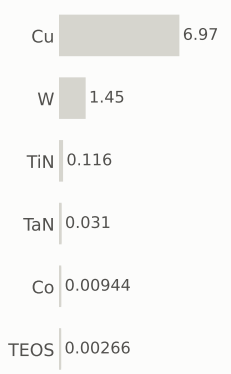

gases emitted (g)

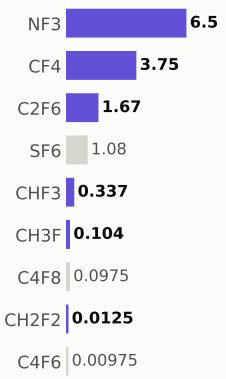

Step #9590: CVD

depo_fill · CVD

1.31	829.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	1.42 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

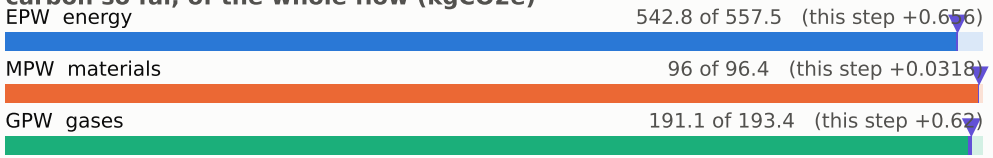

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

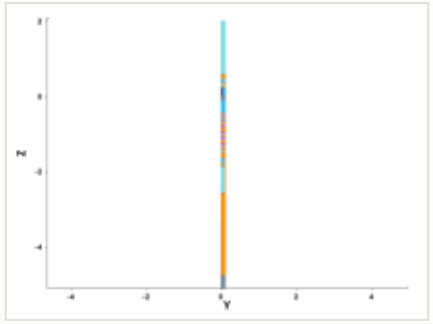

y cut at 0.049 µm

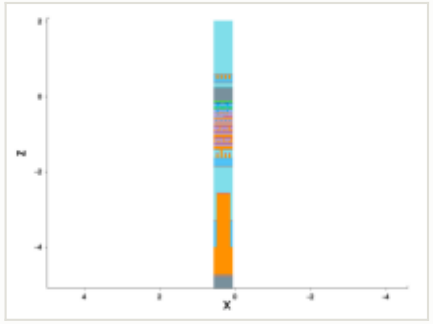

mask for this step

no mask for this step

steps by process area



materials deposited (g)

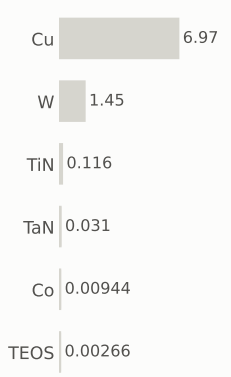

gases emitted (g)

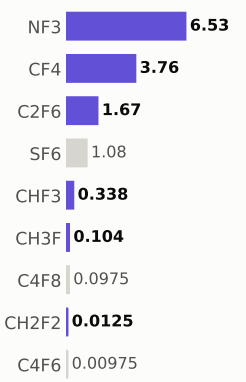

Step #9600: Hg

litho_patterning · Hg

0.199	830.0	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

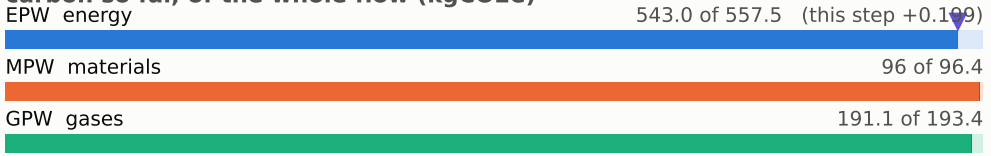

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

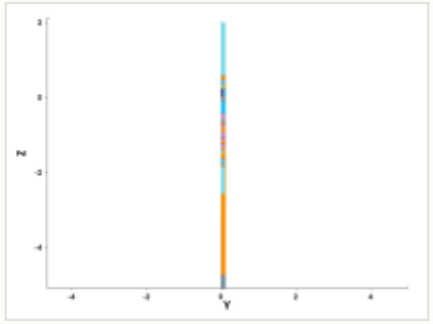

y cut at 0.049 µm

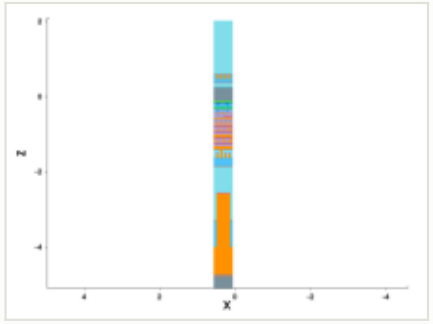

mask: layer 960:0 (GDSII)

steps by process area

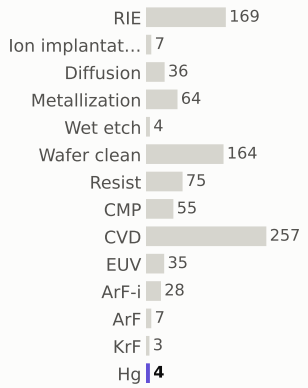

materials deposited (g)

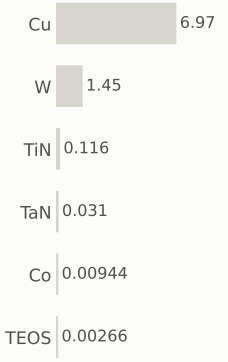

gases emitted (g)

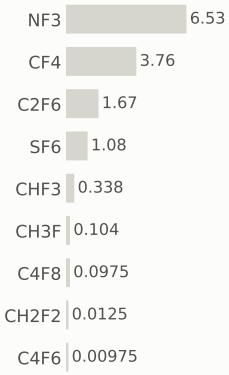

Step #9610: RIE

etch_anisotropic · RIE

1.04	831.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

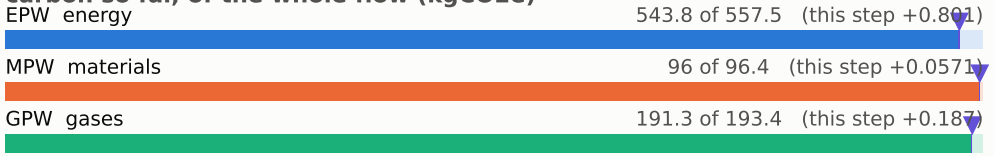

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

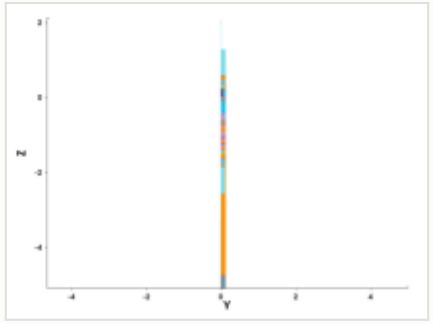

y cut at 0.049 µm

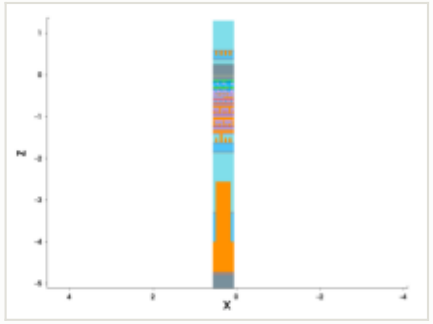

mask for this step

no mask for this step

steps by process area

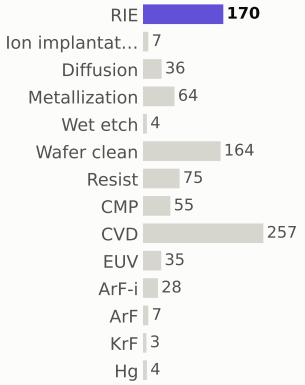

materials deposited (g)

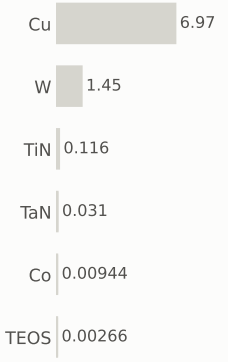

gases emitted (g)

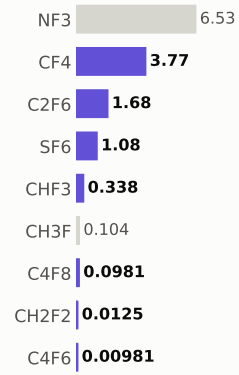

Step #9620: Wafer_clean

etch_strip · Wafer_clean

0.169	831.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

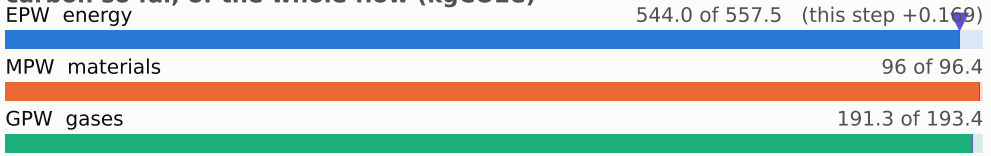

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

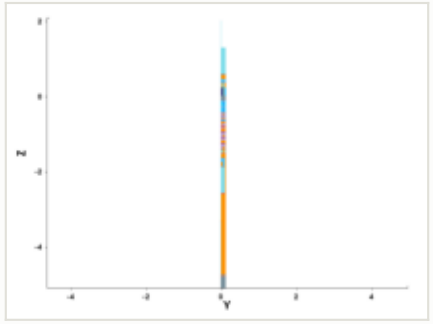

y cut at 0.049 µm

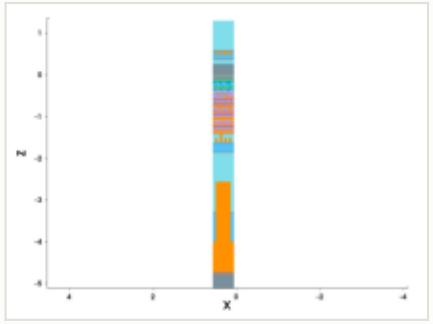

mask for this step

no mask for this step

steps by process area

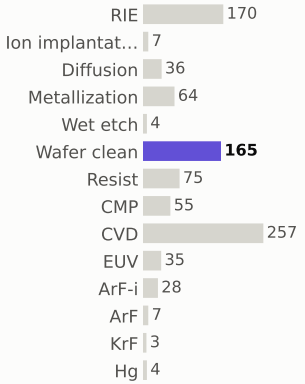

materials deposited (g)

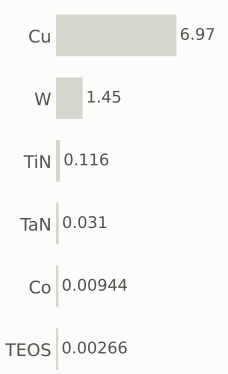

gases emitted (g)

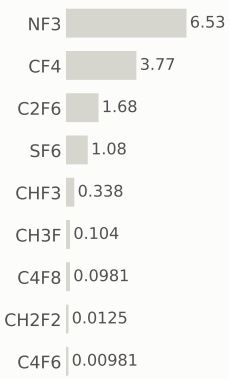

Step #9630: RIE

clean · RIE

1.04	832.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

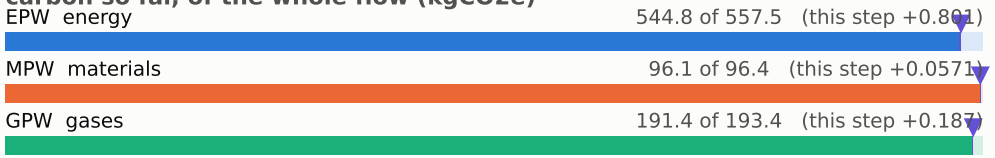

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

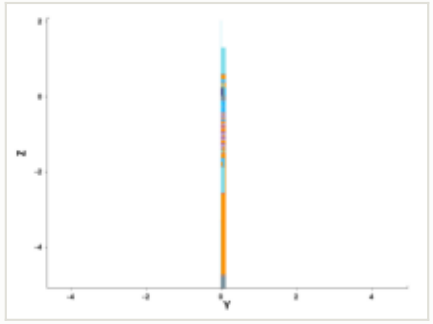

y cut at 0.049 µm

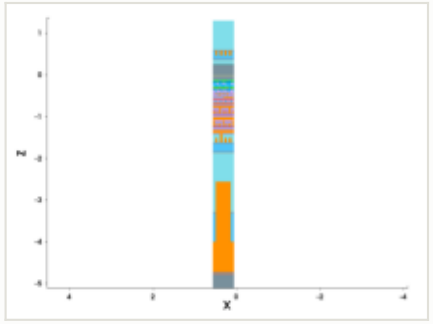

mask for this step

no mask for this step

steps by process area

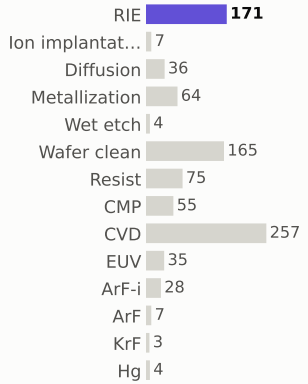

materials deposited (g)

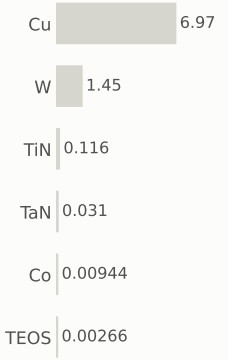

gases emitted (g)



Step #9640: Wafer_clean

clean · Wafer_clean

0.169	832.4	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

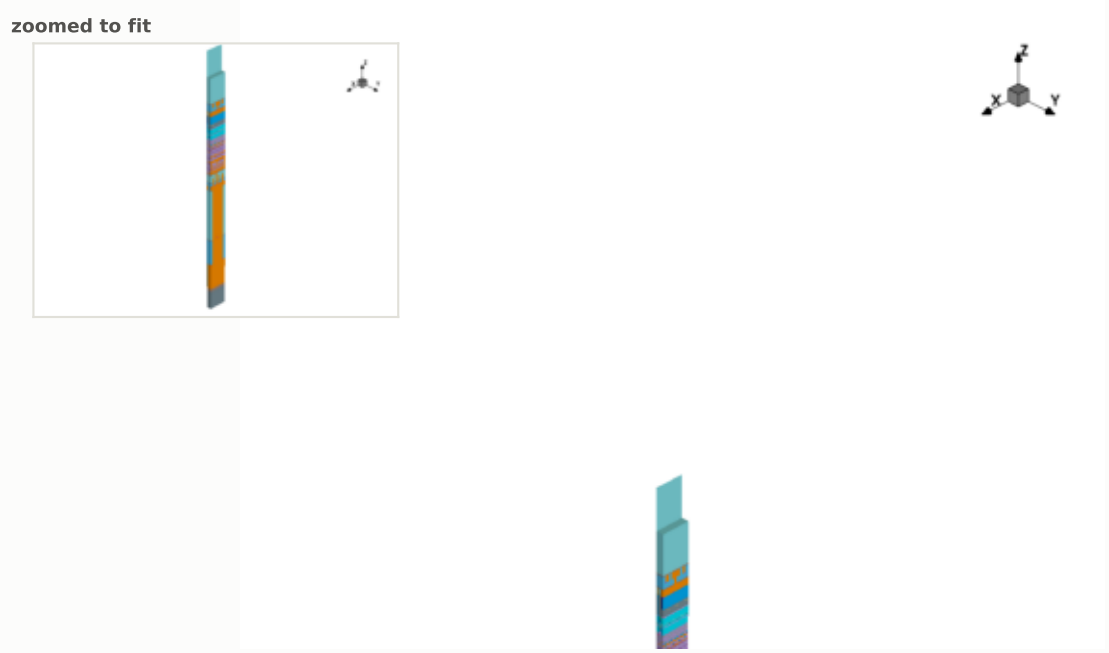

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

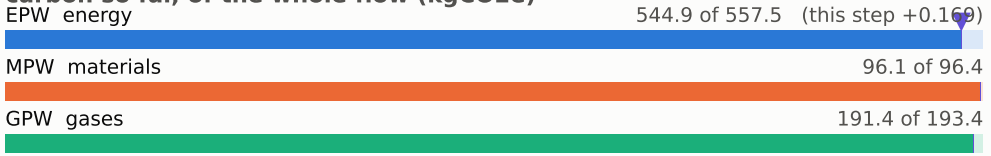

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

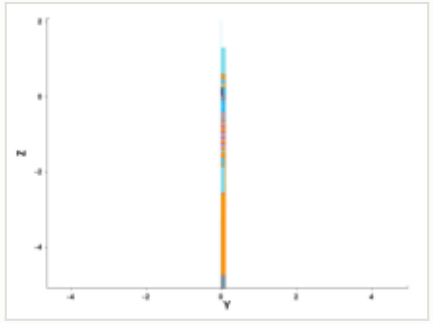

y cut at 0.049 µm

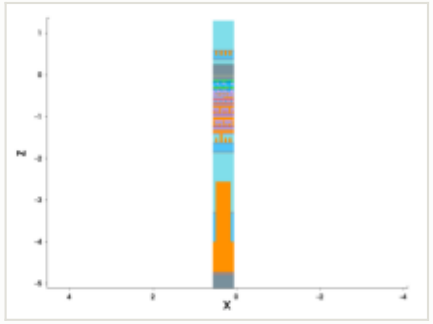

mask for this step

no mask for this step

steps by process area

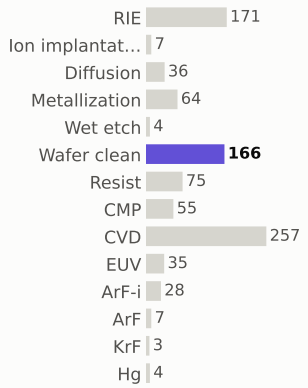

materials deposited (g)

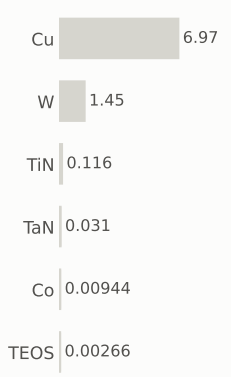

gases emitted (g)

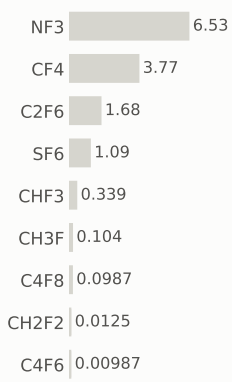

Step #9650: ArF

litho_patterning · ArF

0.199	832.6	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

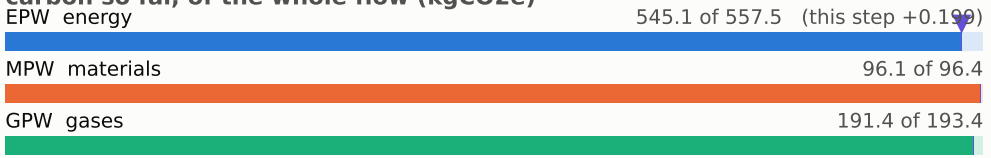

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

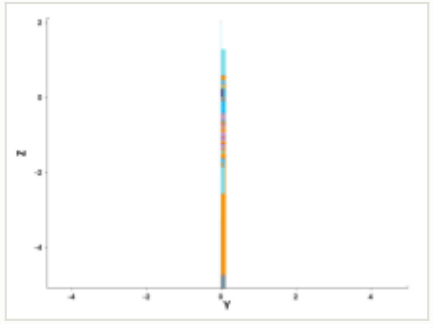

y cut at 0.049 µm

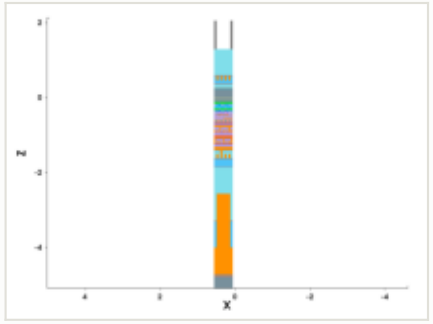

mask: layer 950:0 (GDSII)

steps by process area

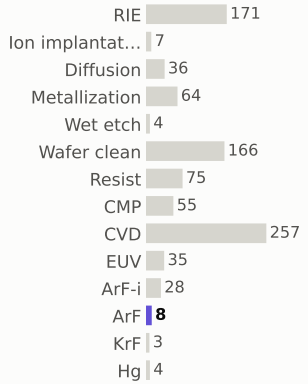

materials deposited (g)

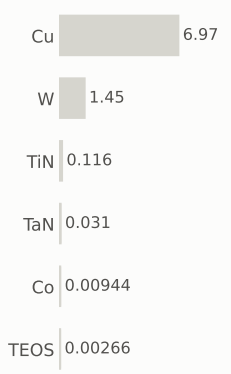

gases emitted (g)

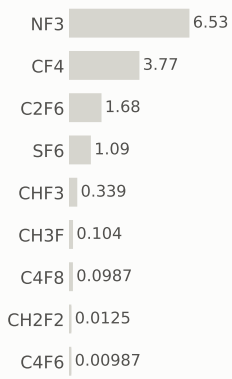

Step #9660: RIE

etch_anisotropic · RIE

1.04	833.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

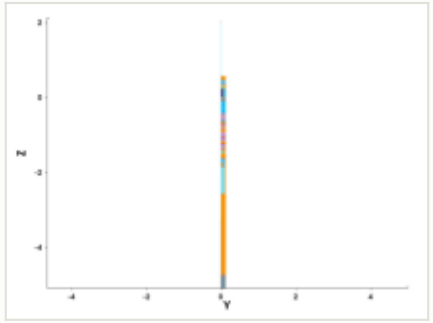

y cut at 0.049 µm

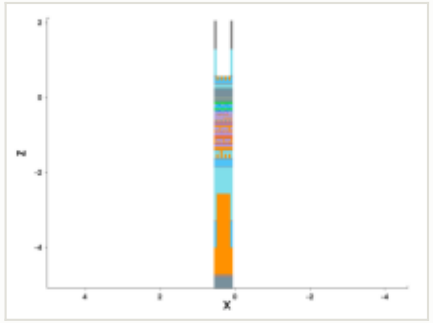

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

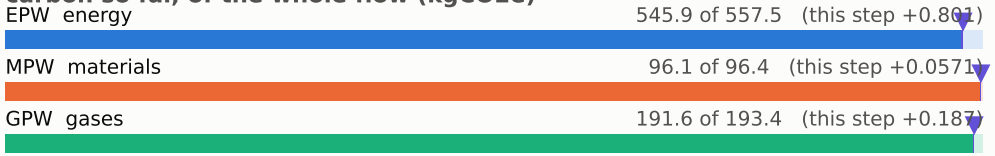

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

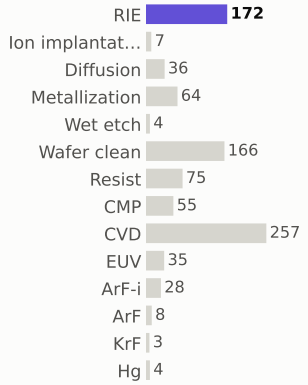

materials deposited (g)

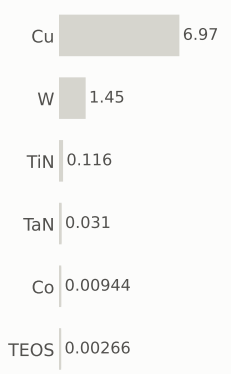

gases emitted (g)

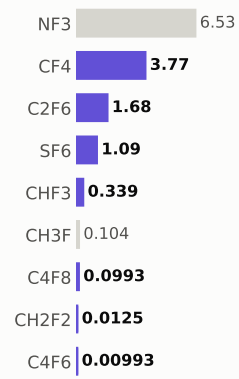

Step #9670: Wafer_clean

etch_strip · Wafer_clean

0.169	833.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

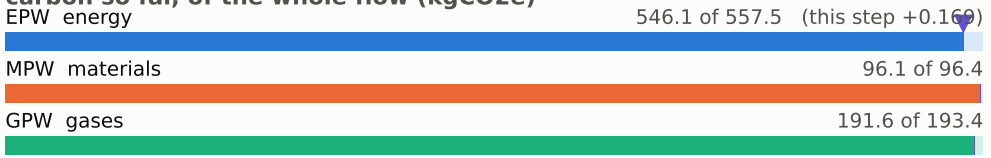

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

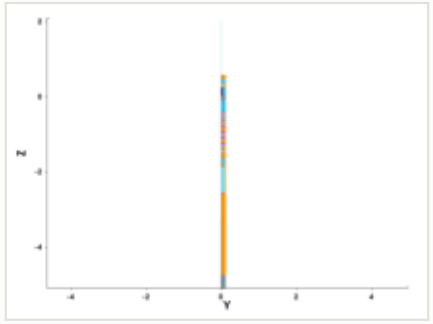

y cut at 0.049 µm

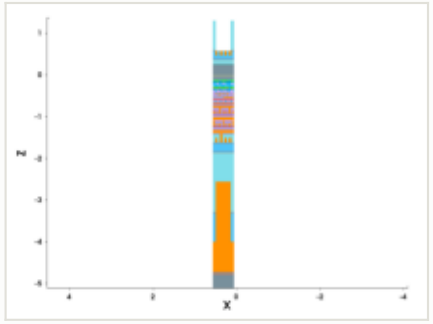

mask for this step

no mask for this step

steps by process area

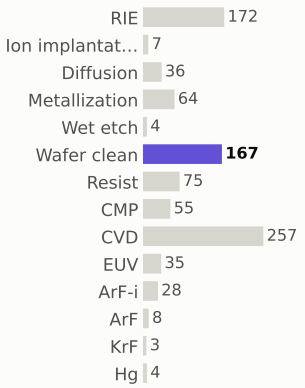

materials deposited (g)



gases emitted (g)

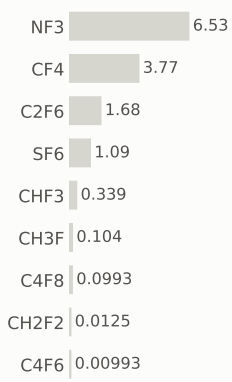

Step #9680: Metallization

depo_ellipsoidal · Metallization

1.2	835.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

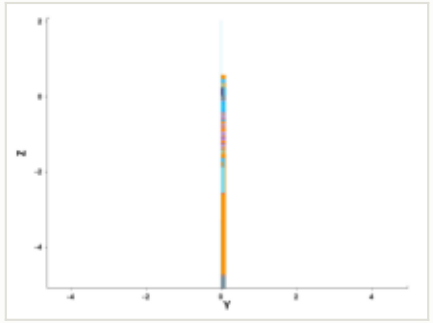

y cut at 0.049 µm

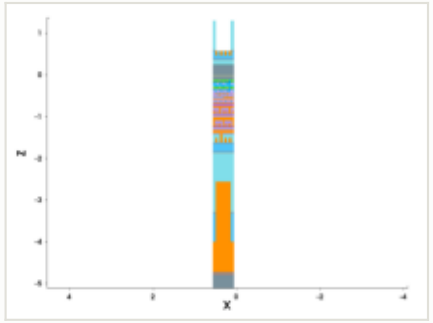

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

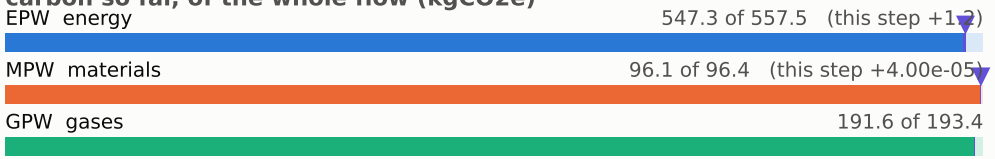

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

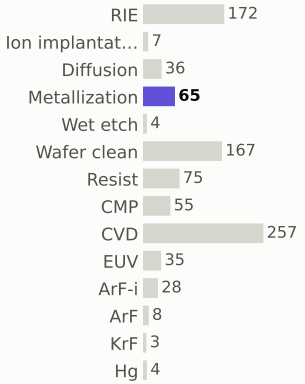

materials deposited (g)

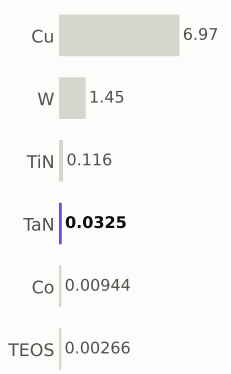

gases emitted (g)

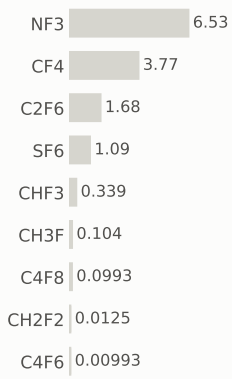

Step #9690: Metallization

depo_fill · Metallization

1.21	836.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

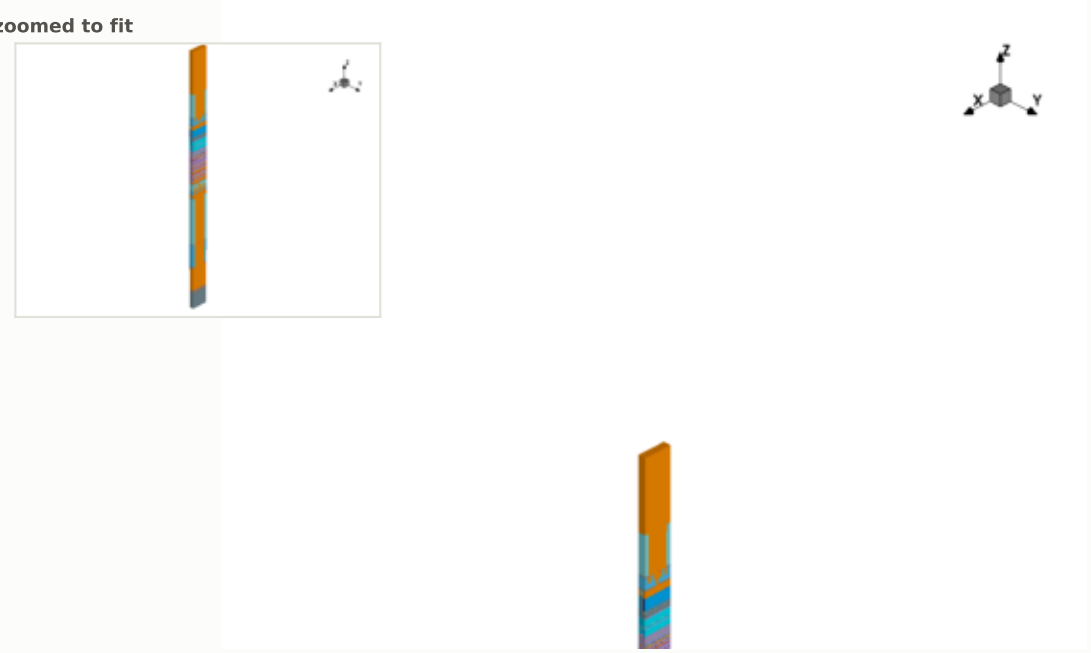

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

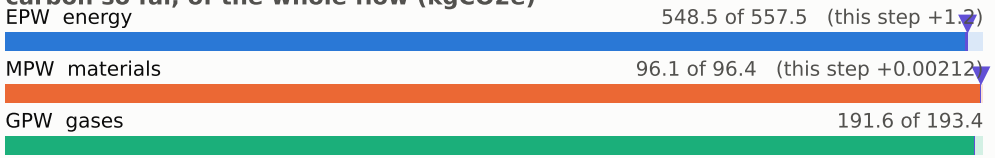

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

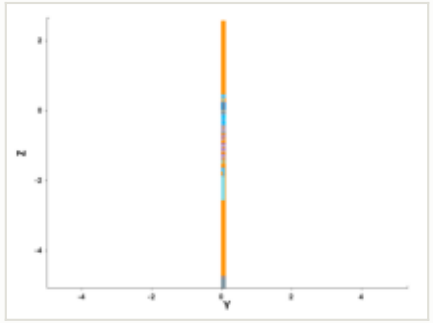

y cut at 0.049 µm

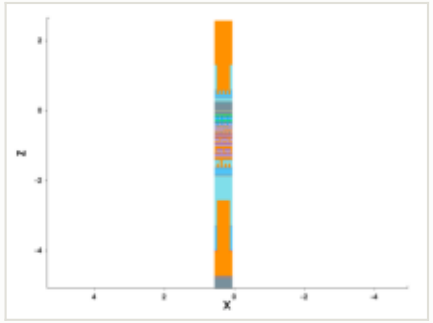

mask for this step

no mask for this step

steps by process area

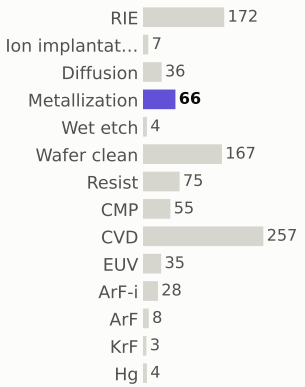

materials deposited (g)

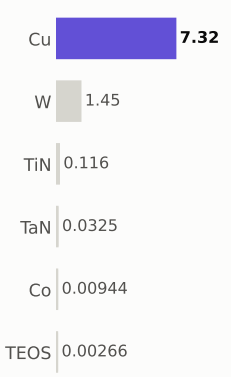

gases emitted (g)



Step #9700: Diffusion

treatment · Diffusion

0.801	837.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

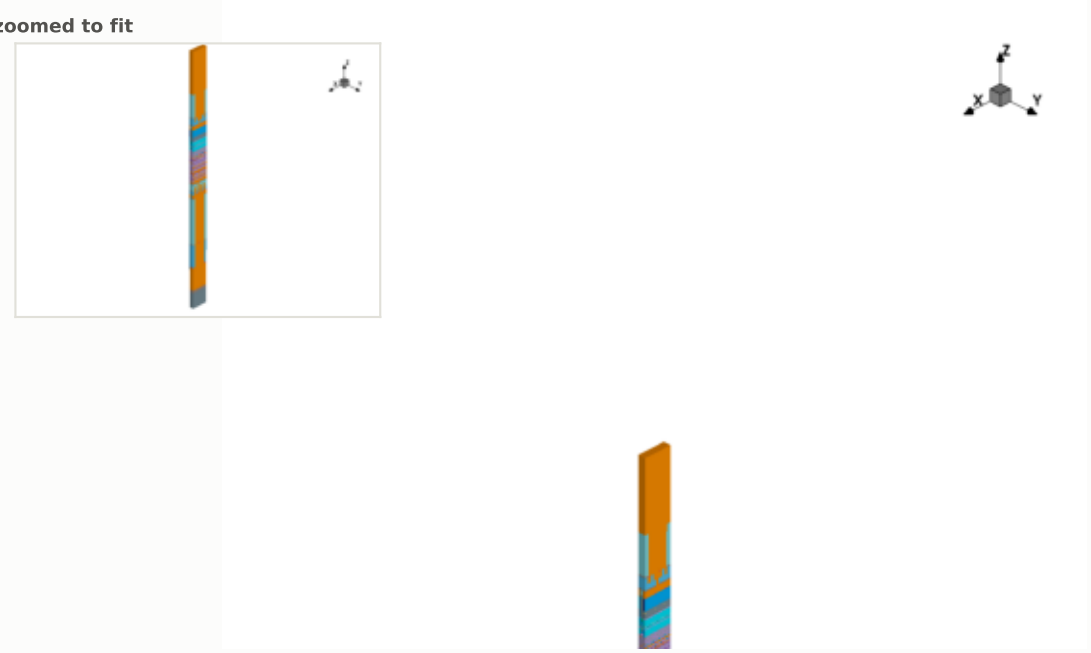

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

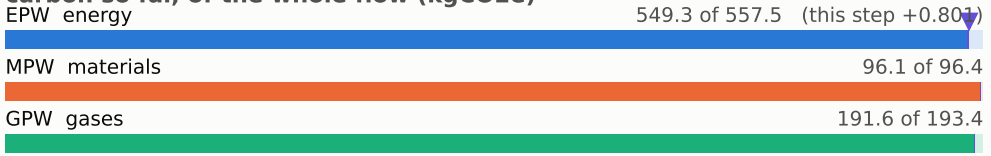

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

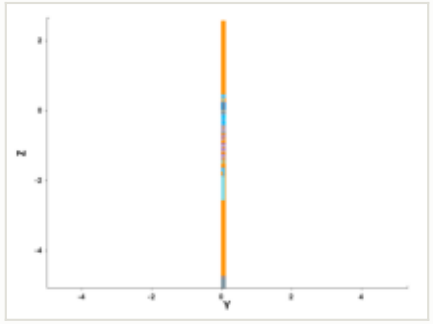

y cut at 0.049 µm

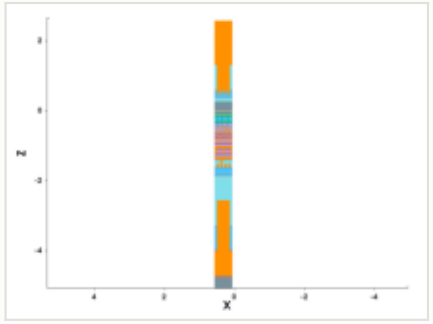

mask for this step

no mask for this step

steps by process area

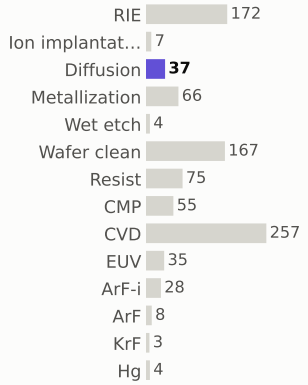

materials deposited (g)

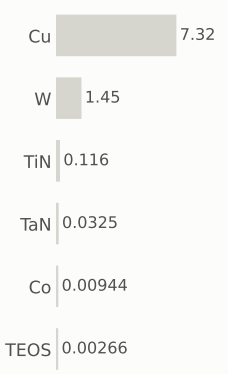

gases emitted (g)

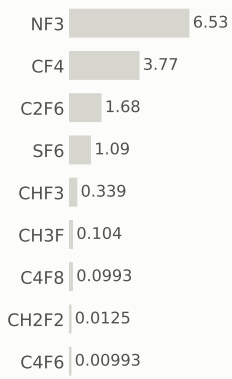

Step #9710: CMP

etch_cmp · CMP

0.169	837.2	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

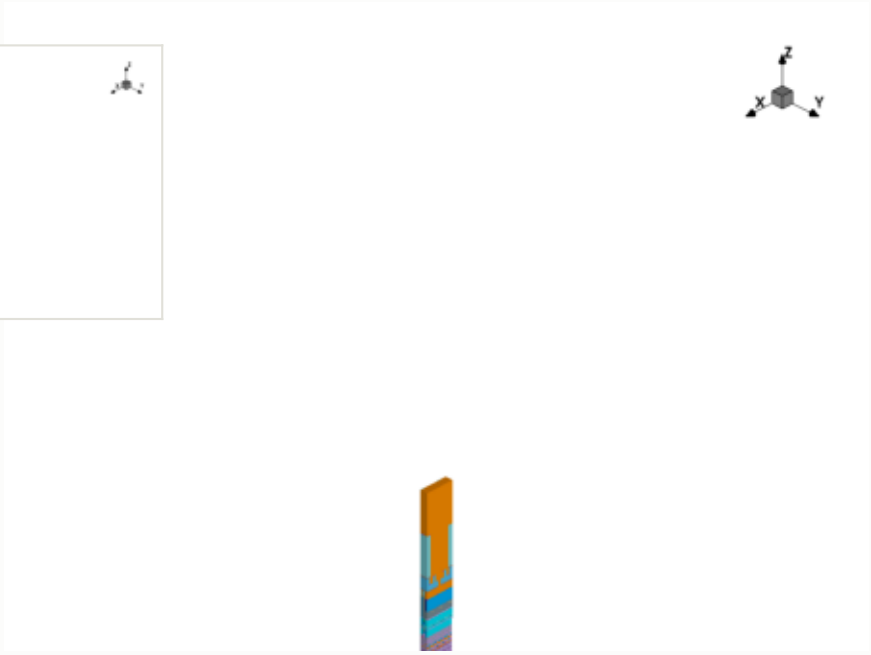

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

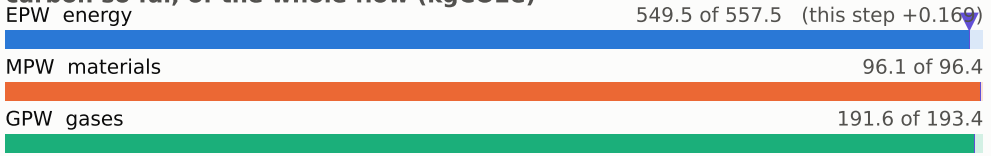

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

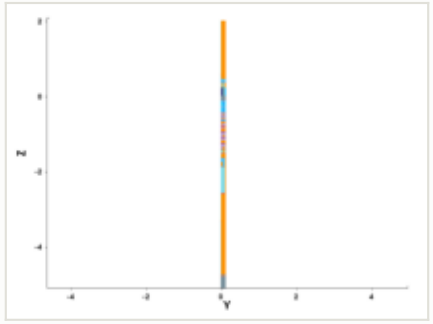

y cut at 0.049 µm

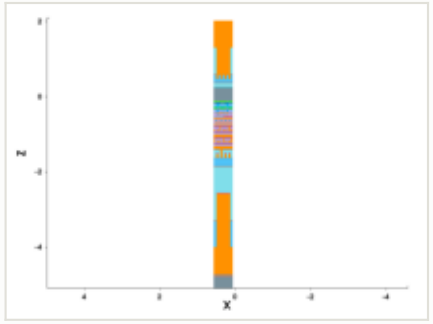

mask for this step

no mask for this step

steps by process area

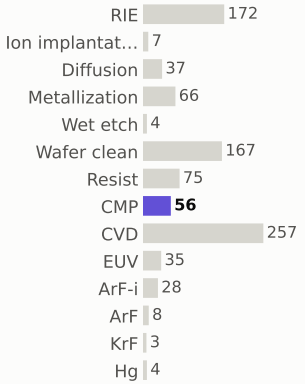

materials deposited (g)

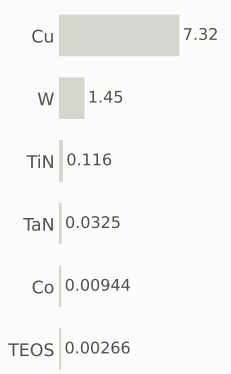

gases emitted (g)

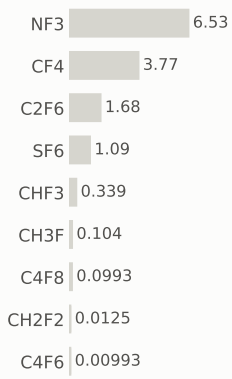

Step #9730: CVD

depo_fill · CVD

1.31	838.5	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at 0.385 µm

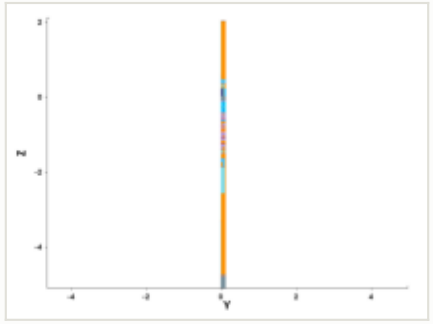

y cut at 0.049 µm

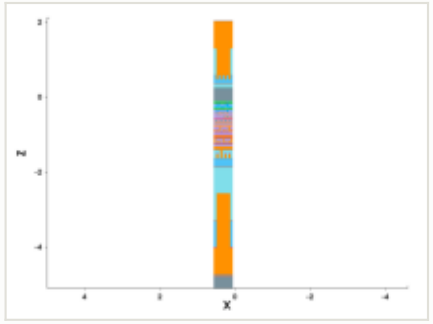

mask for this step

no mask for this step

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.02 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

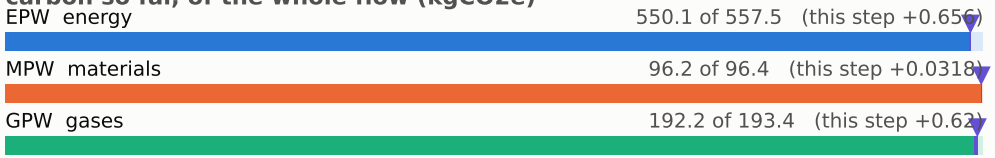

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

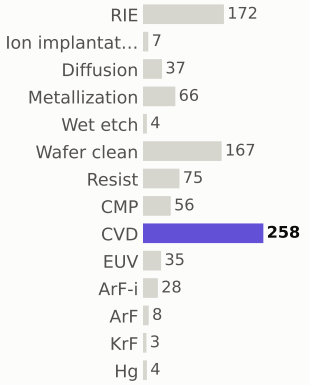

materials deposited (g)

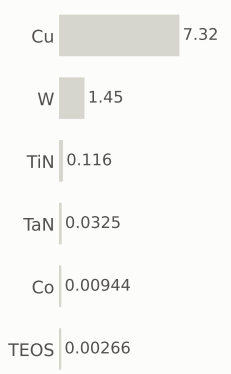

gases emitted (g)

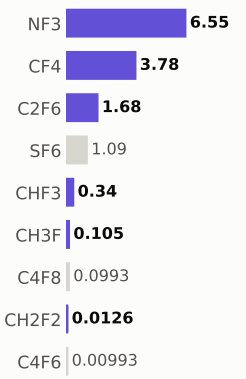

Step #9740: CVD

depo_fill · CVD

1.31	839.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

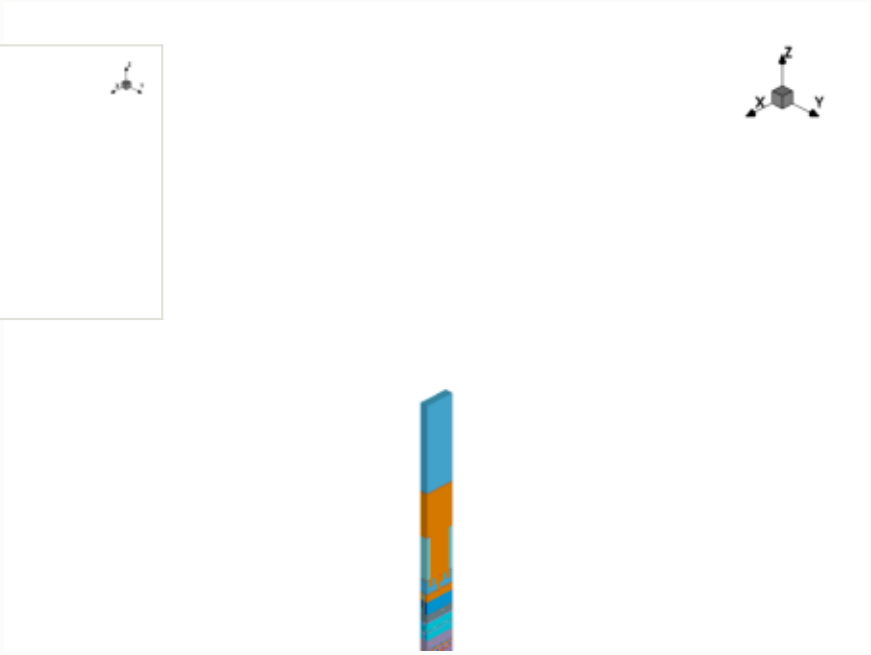

this step

process area	CVD
material	—
thickness	1.42 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

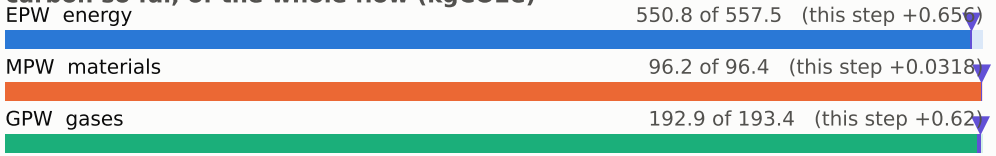

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

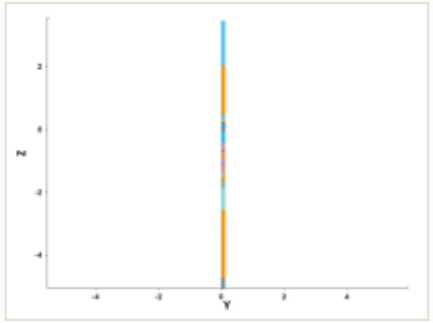

y cut at 0.049 µm

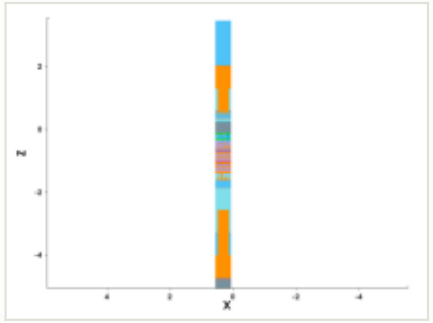

mask for this step

no mask for this step

steps by process area

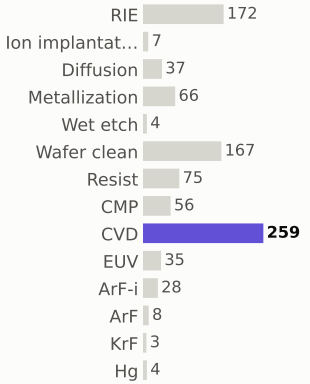

materials deposited (g)

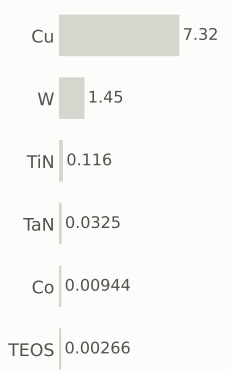

gases emitted (g)

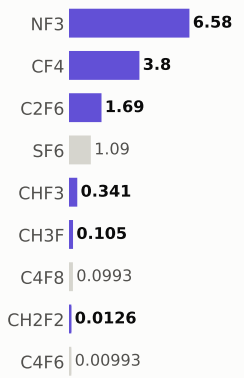

Step #9750: Hg

litho_patterning · Hg

0.199	840.1	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

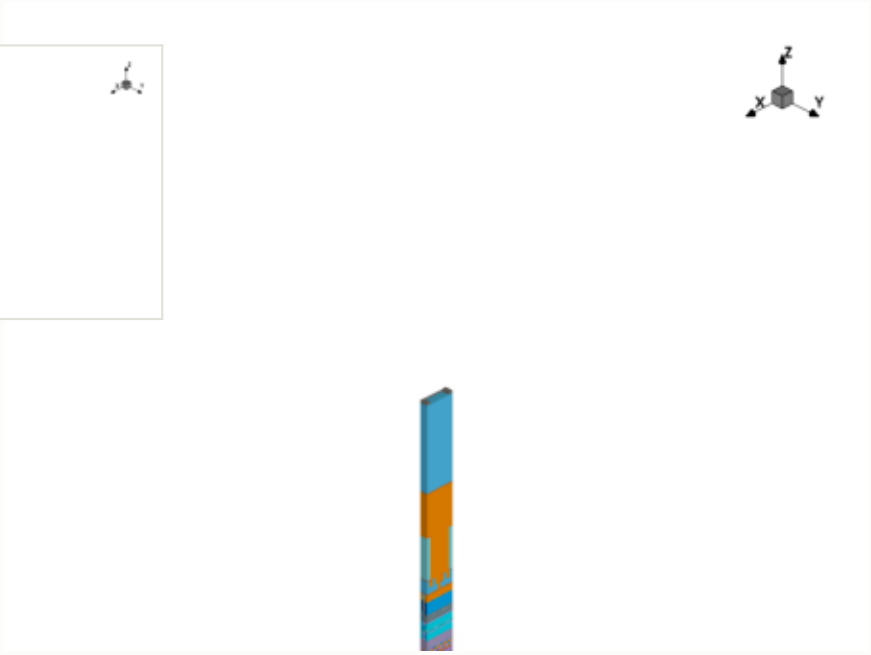

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

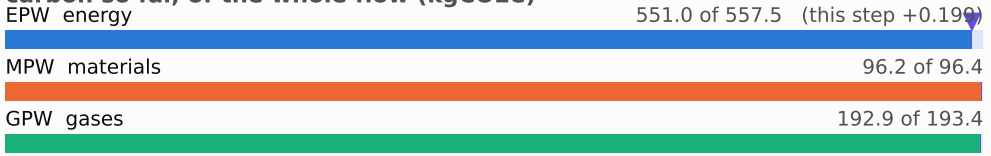

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

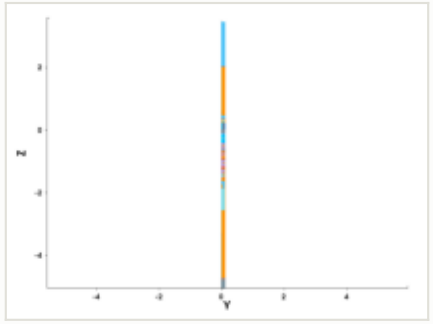

y cut at 0.049 µm

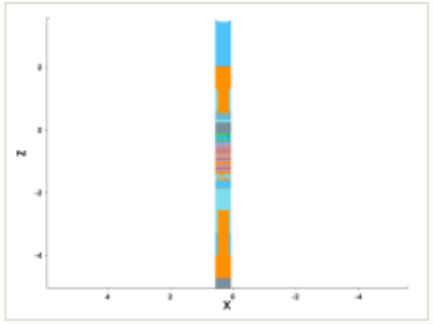

mask: layer 980:0 (GDSII)

steps by process area

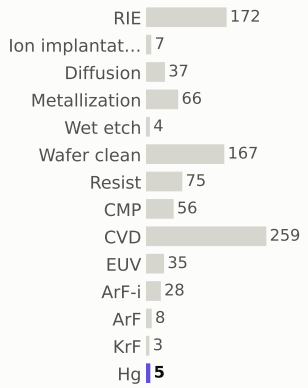

materials deposited (g)

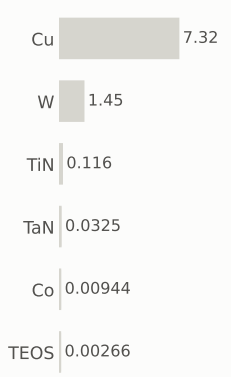

gases emitted (g)

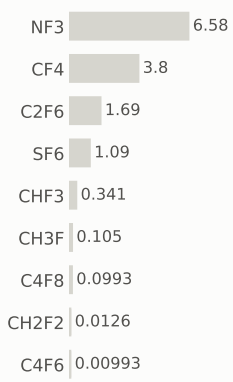

Step #9760: RIE

etch_anisotropic · RIE

1.04	841.1	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

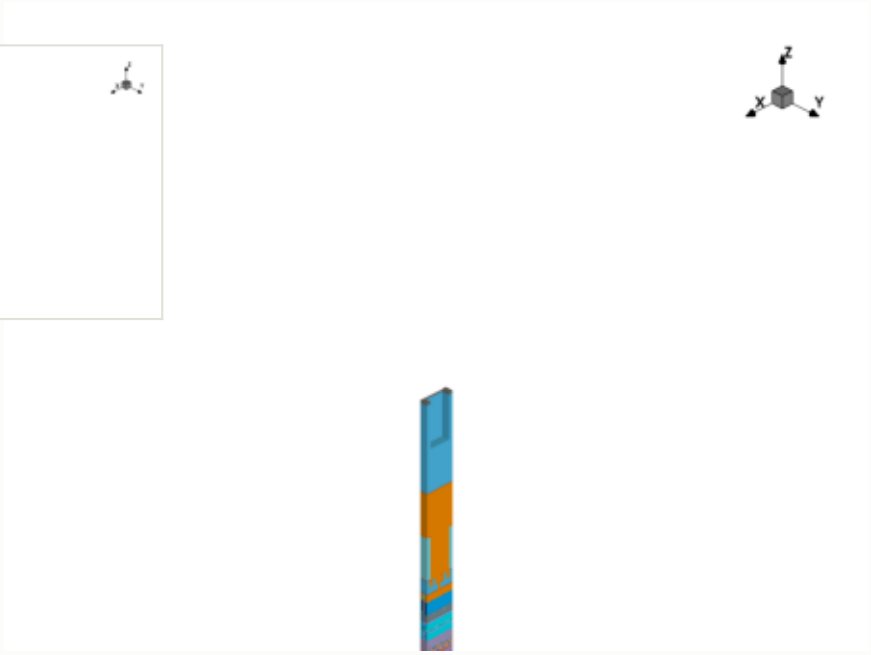

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

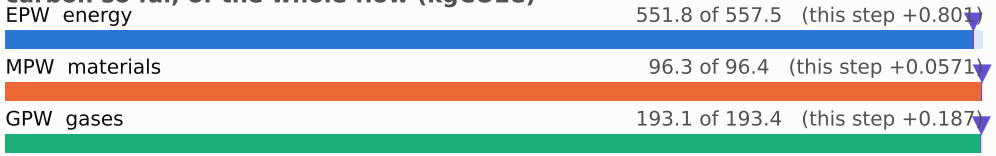

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

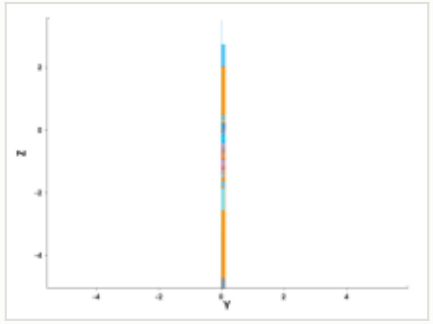

y cut at 0.049 µm

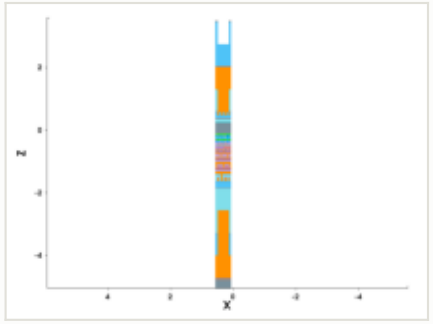

mask for this step

no mask for this step

steps by process area

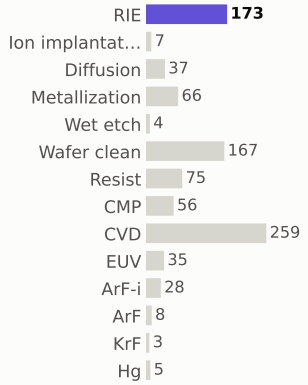

materials deposited (g)

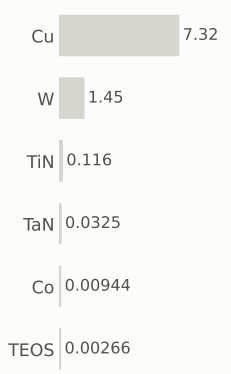

gases emitted (g)

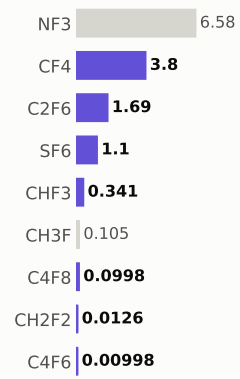

Step #9770: Wafer_clean

etch_strip · Wafer_clean

0.169	841.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

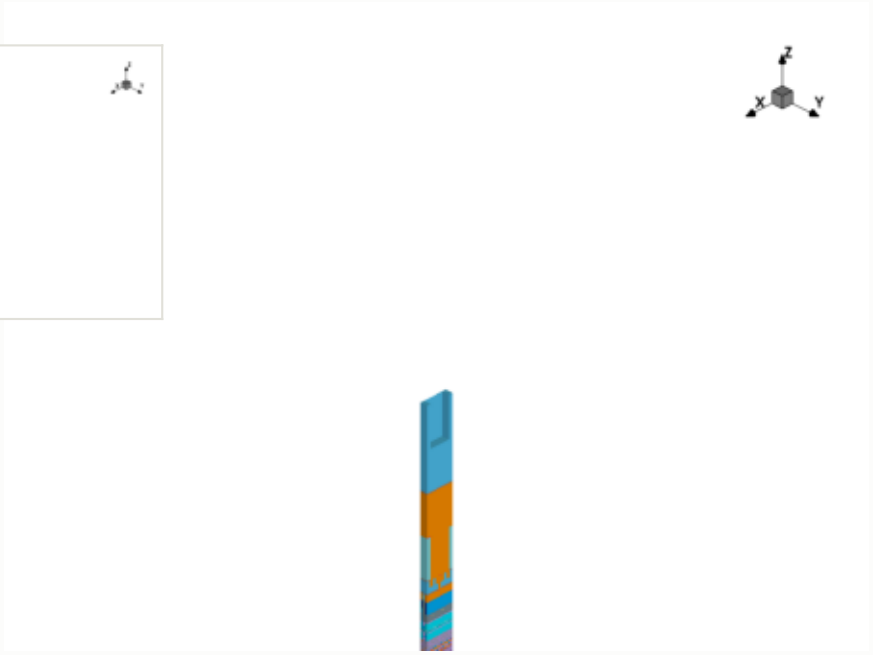

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

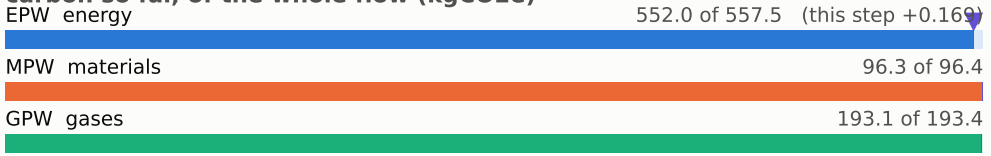

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

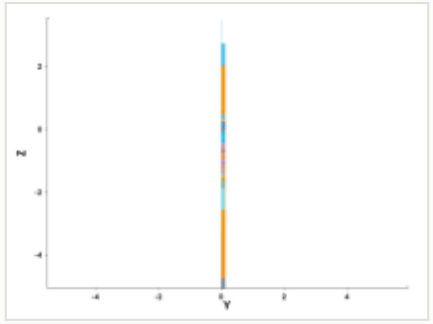

y cut at 0.049 µm

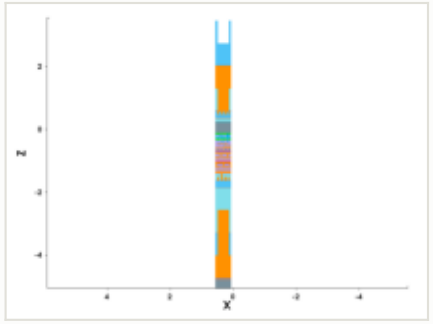

mask for this step

no mask for this step

steps by process area

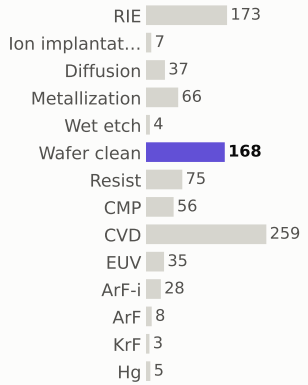

materials deposited (g)



gases emitted (g)

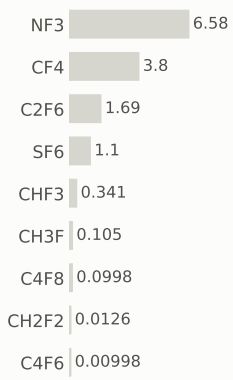

Step #9780: RIE

clean · RIE

1.04	842.3	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

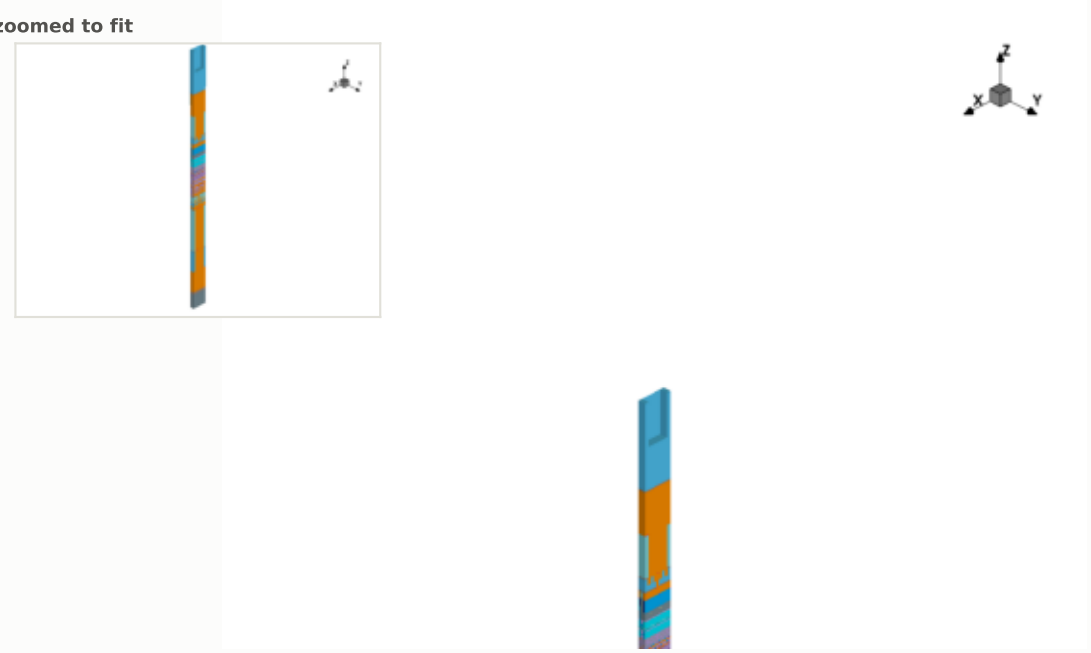

x cut at 0.385 µm

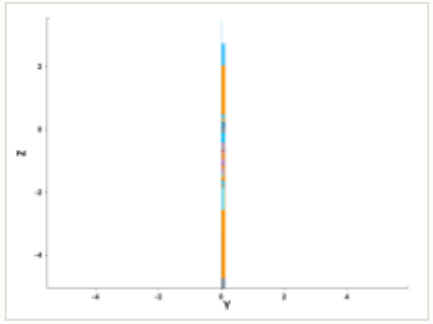

y cut at 0.049 µm

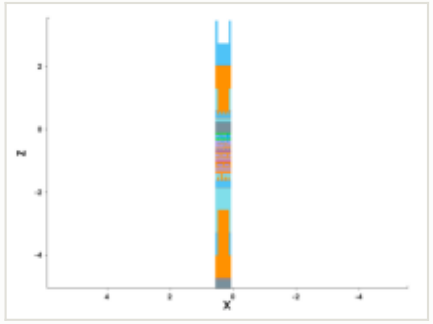

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

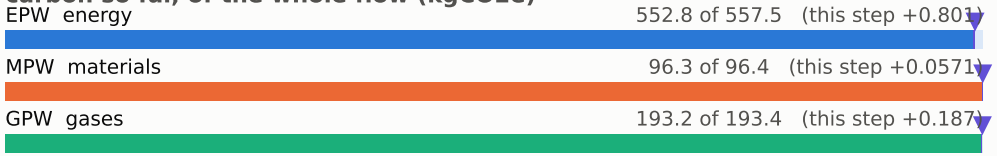

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

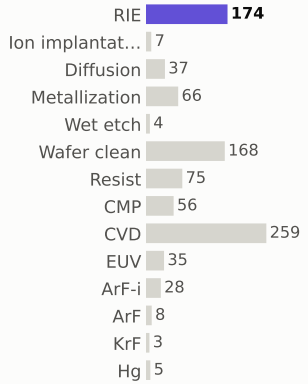

materials deposited (g)

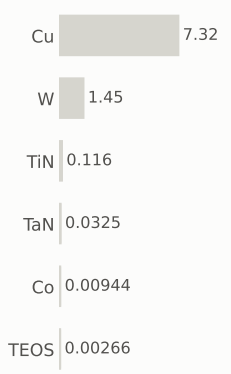

gases emitted (g)

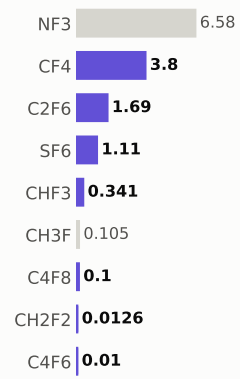

Step #9790: Wafer_clean

clean · Wafer_clean

0.169	842.5	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

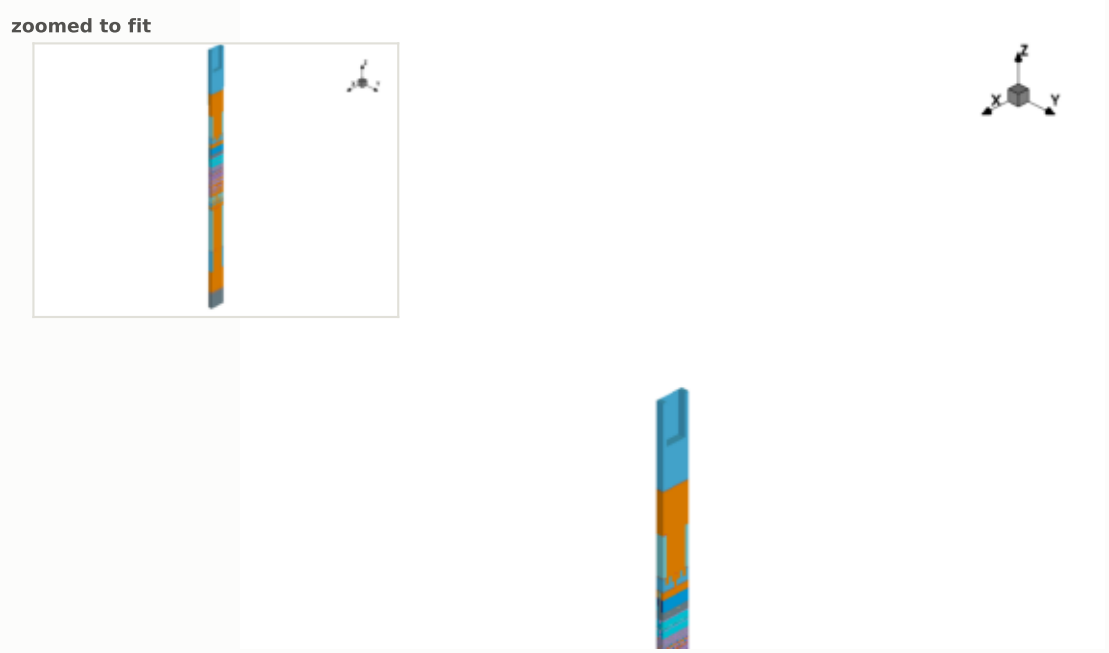

x cut at 0.385 µm

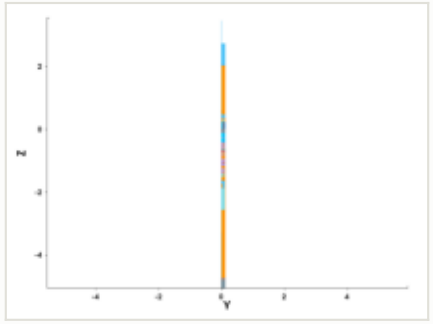

y cut at 0.049 µm

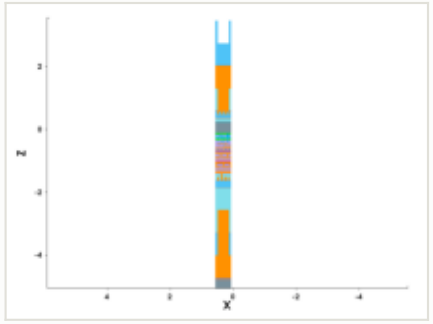

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

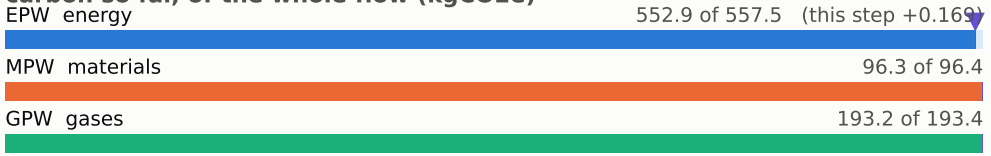

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

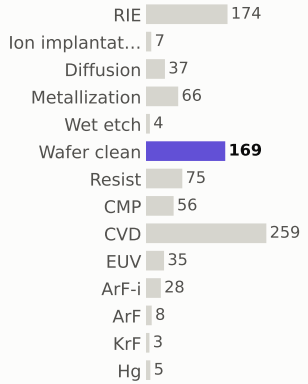

materials deposited (g)

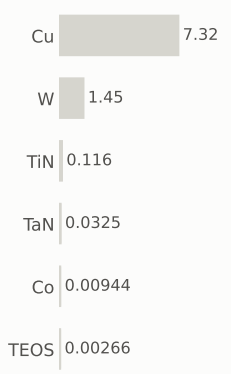

gases emitted (g)

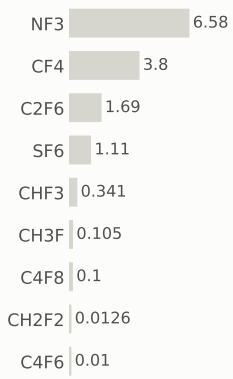

Step #9800: Hg

litho_patterning · Hg

0.199	842.7	0.023%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

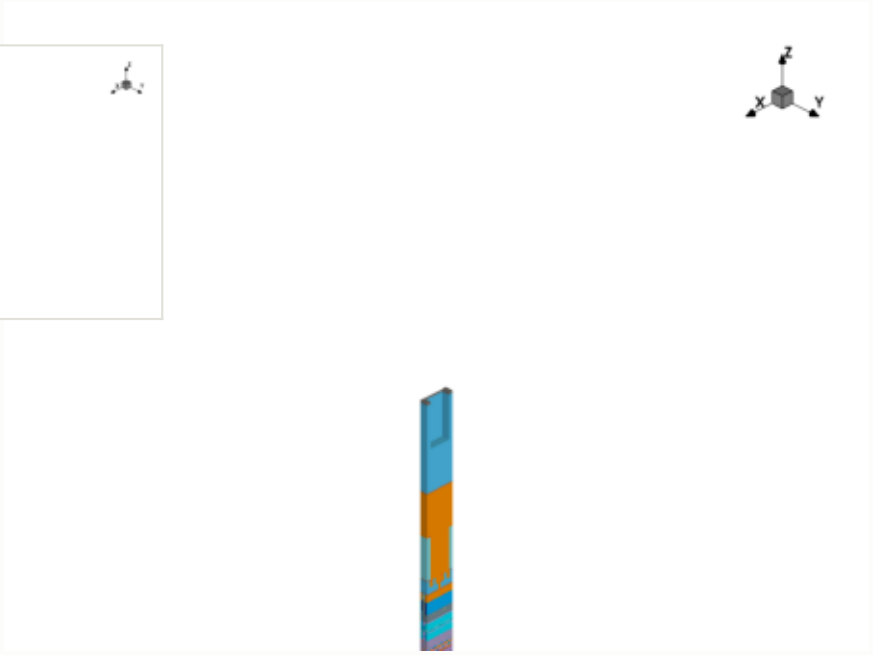

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

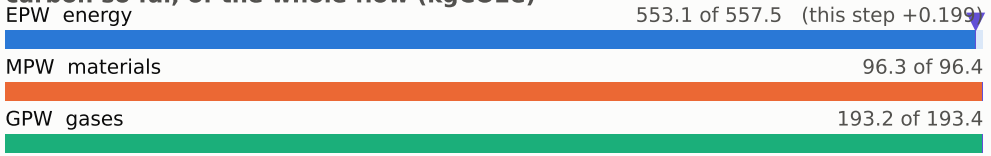

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

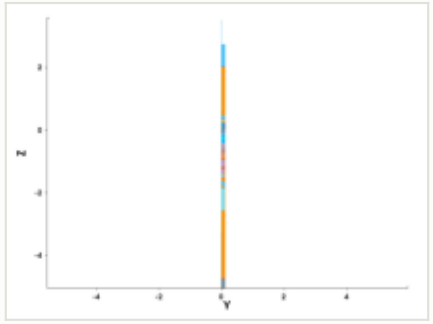

y cut at 0.049 µm

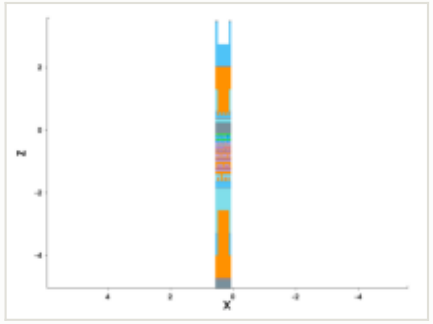

mask: layer 970:0 (GDSII)

steps by process area

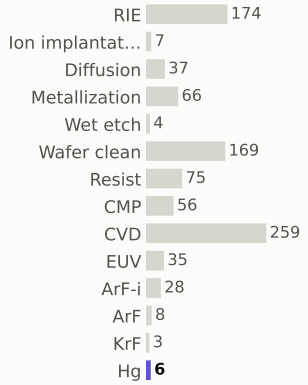

materials deposited (g)

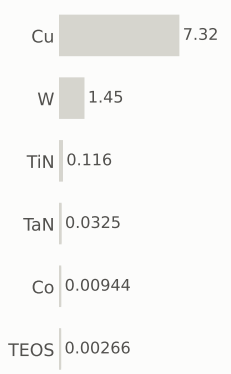

gases emitted (g)

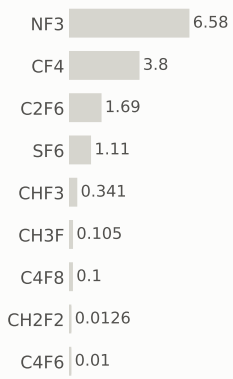

Step #9810: RIE

etch_anisotropic · RIE

1.04	843.7	0.12%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

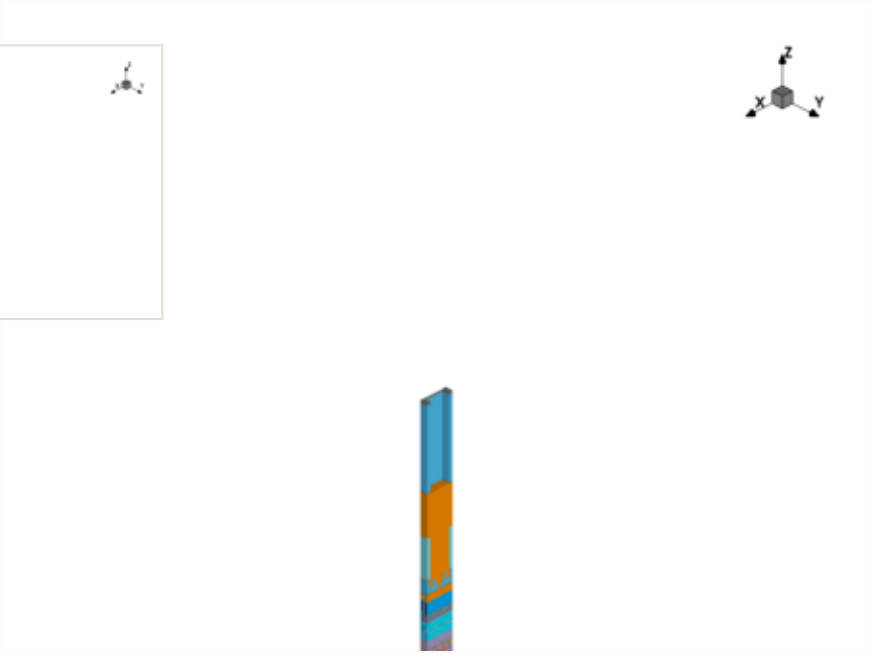

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

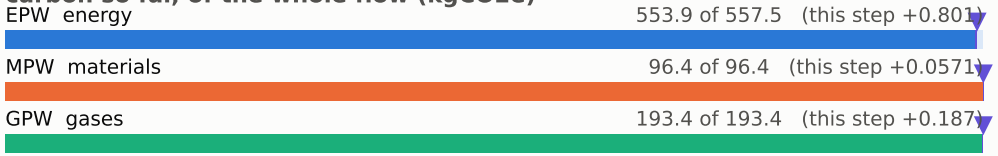

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

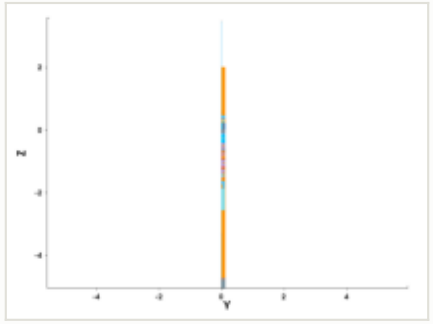

y cut at 0.049 µm

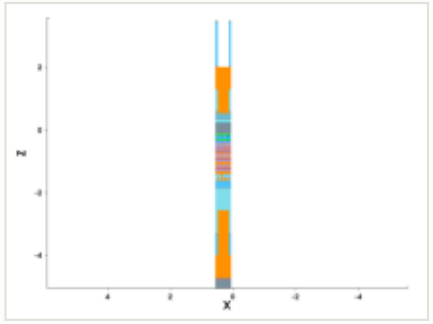

mask for this step

no mask for this step

steps by process area

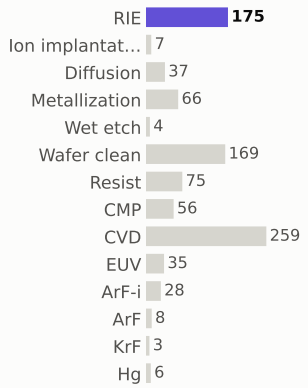

materials deposited (g)

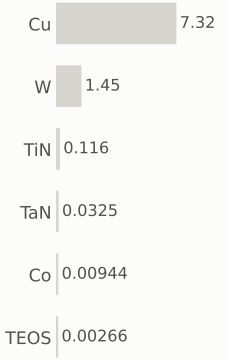

gases emitted (g)

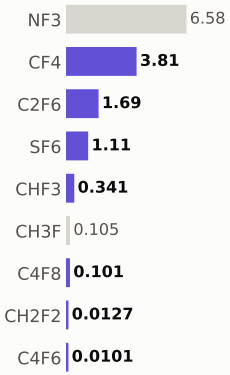

Step #9820: Wafer_clean

etch_strip · Wafer_clean

0.169	843.9	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

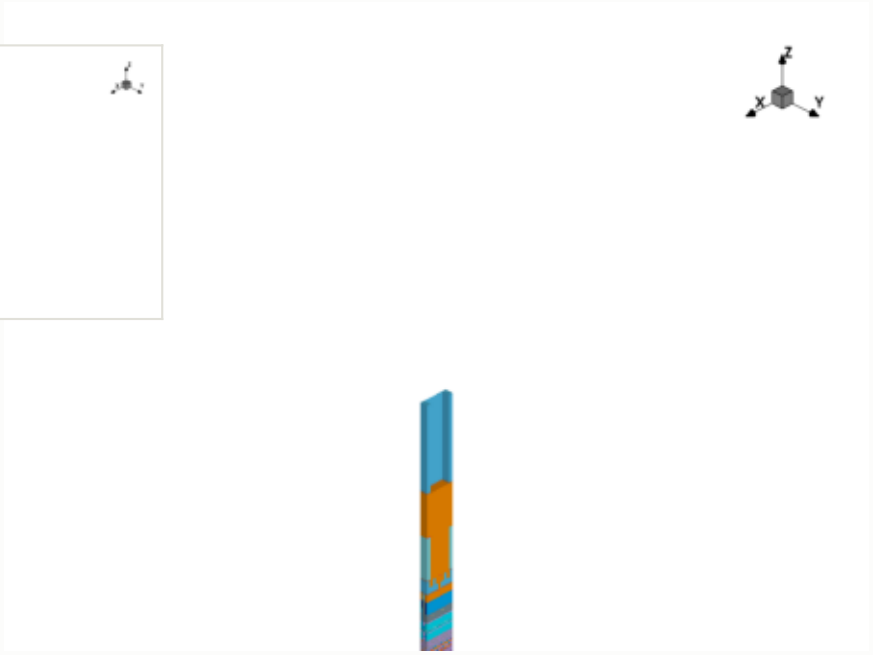

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

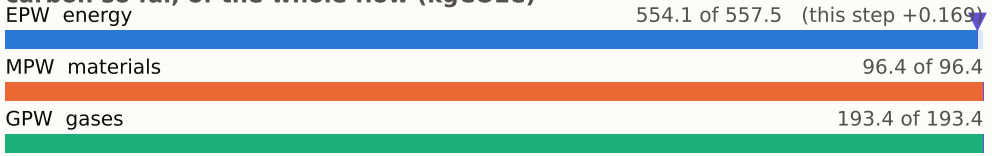

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

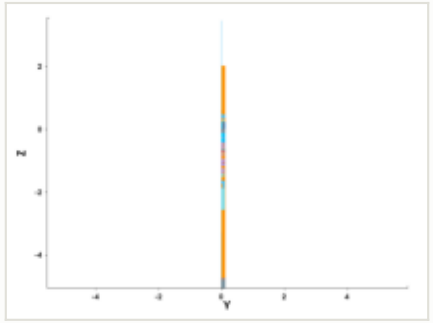

y cut at 0.049 µm

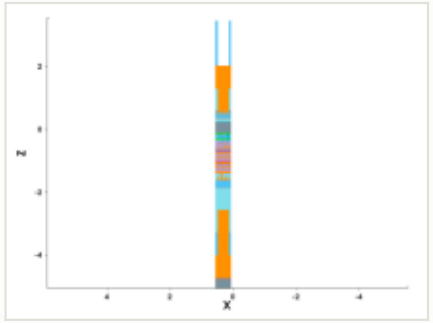

mask for this step

no mask for this step

steps by process area

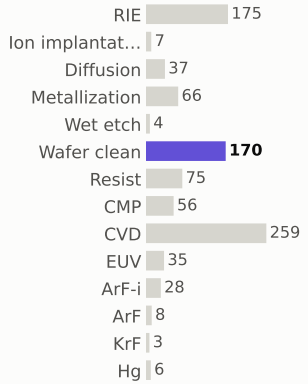

materials deposited (g)

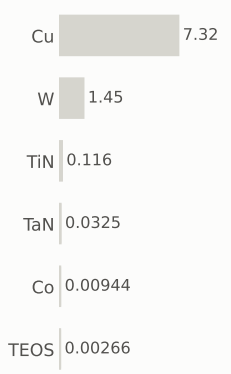

gases emitted (g)

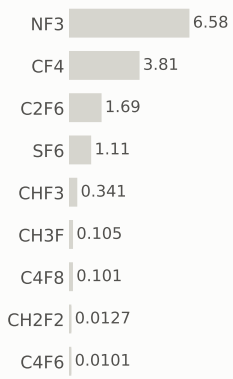

Step #9830: Metallization

depo_ellipsoidal · Metallization

1.2	845.1	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

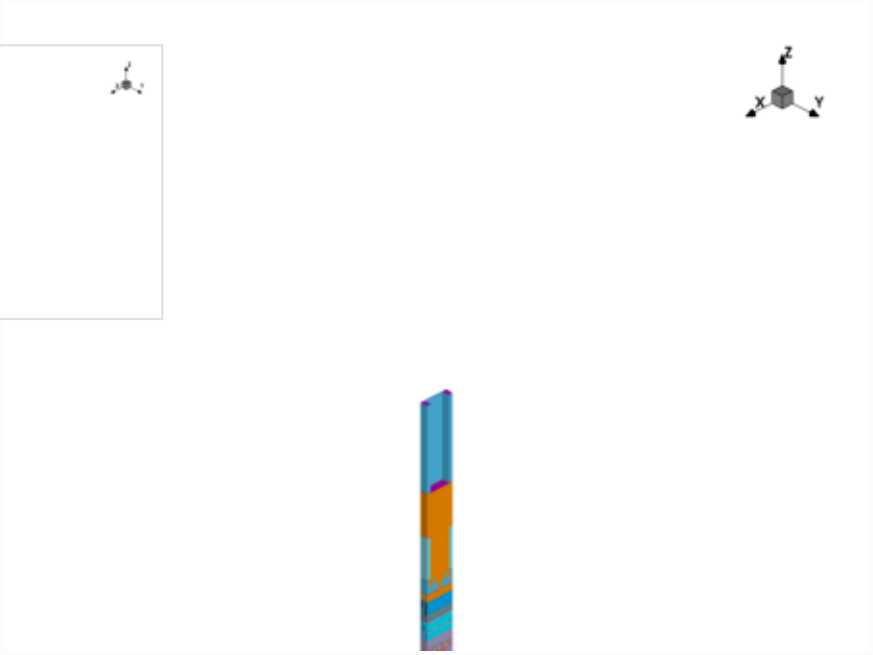

x cut at 0.385 µm

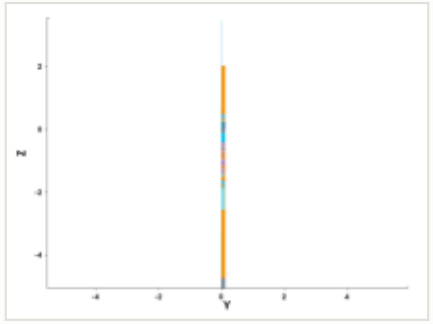

y cut at 0.049 µm

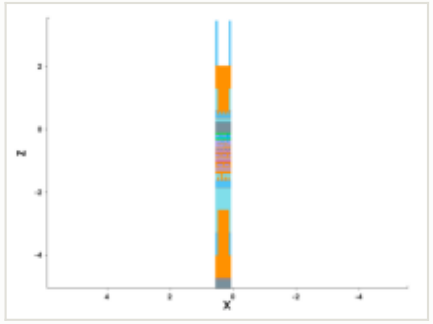

mask for this step

no mask for this step

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

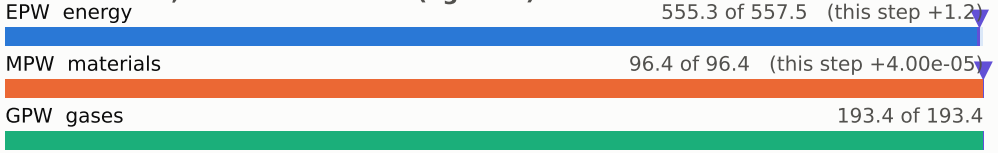

embodied carbon up to each step (kgCO2e per wafer)

steps by process area

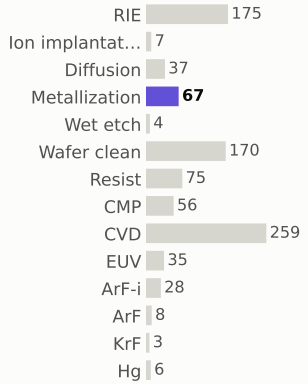

materials deposited (g)

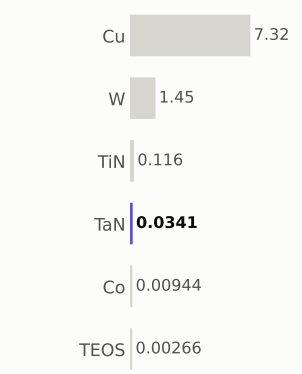

gases emitted (g)

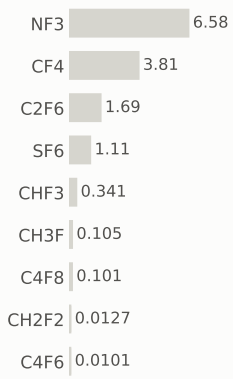

Step #9840: Metallization

depo_fill · Metallization

1.21	846.3	0.14%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

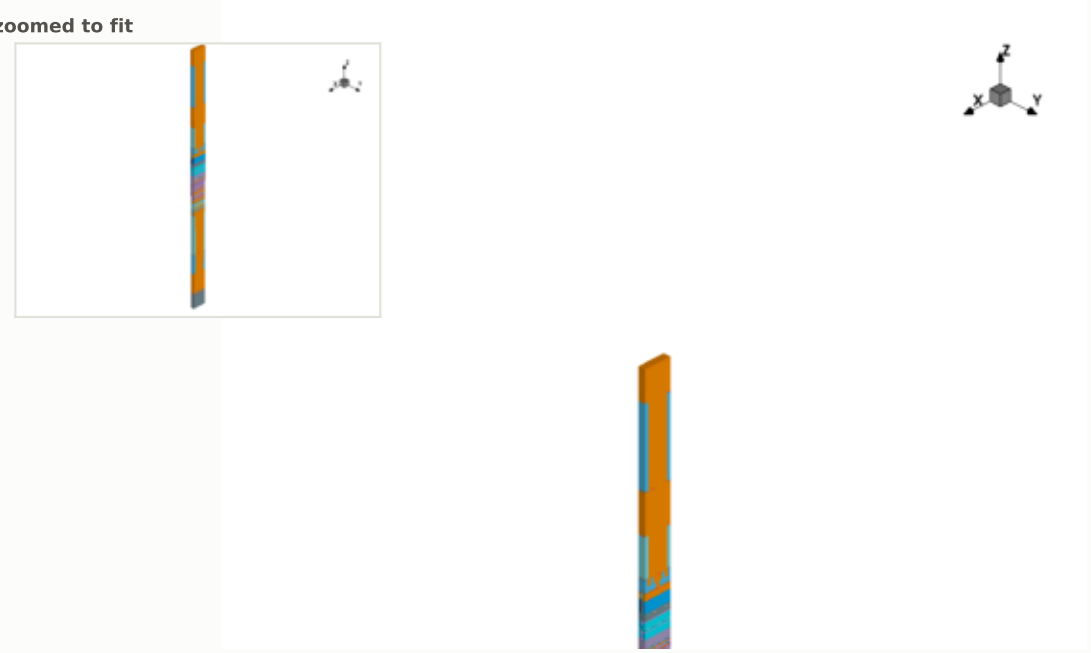

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

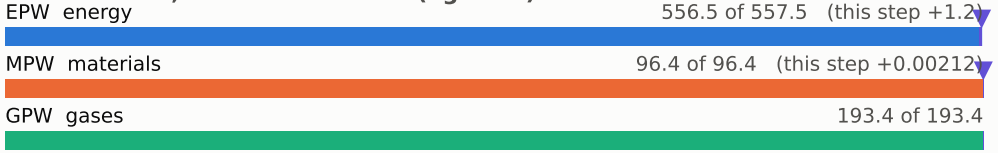

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

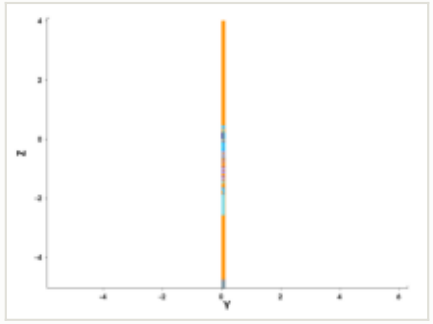

y cut at 0.049 µm

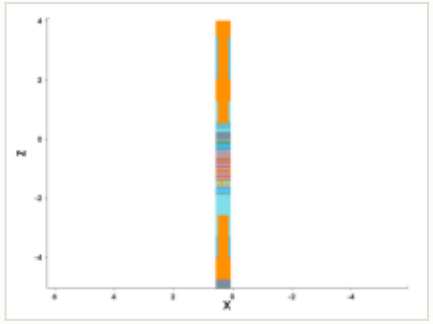

mask for this step

no mask for this step

steps by process area

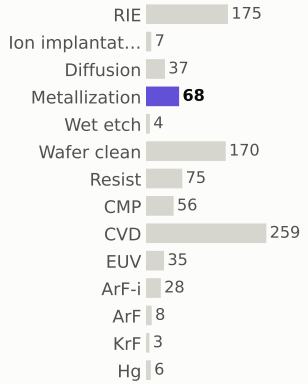

materials deposited (g)

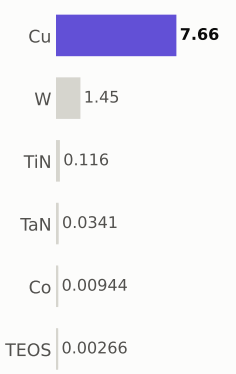

gases emitted (g)

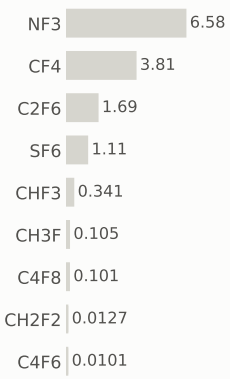

Step #9850: Diffusion

treatment · Diffusion

0.801	847.1	0.094%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

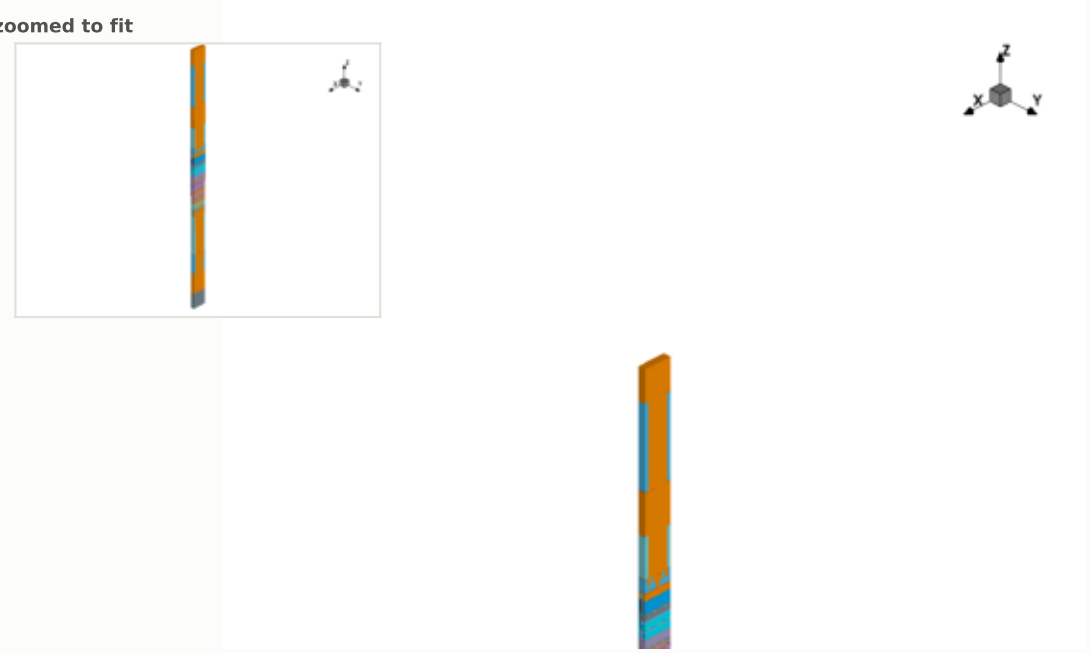

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

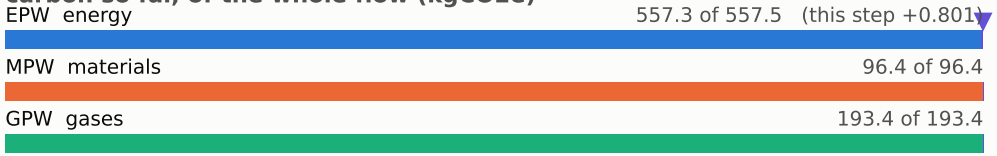

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

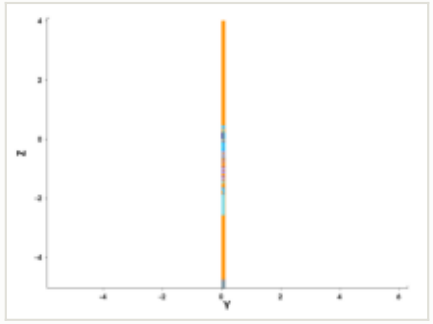

y cut at 0.049 µm

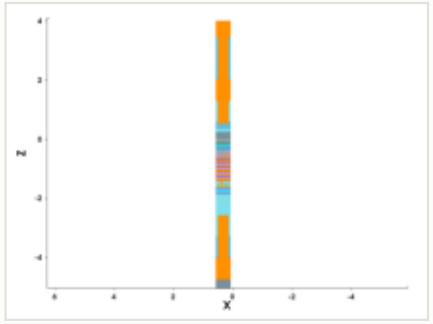

mask for this step

no mask for this step

steps by process area

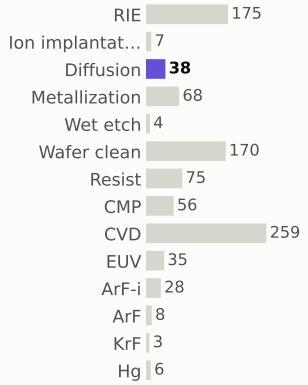

materials deposited (g)

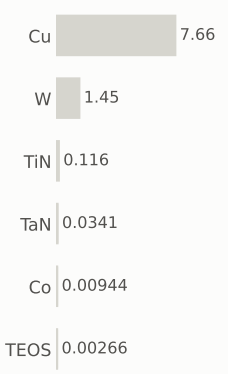

gases emitted (g)

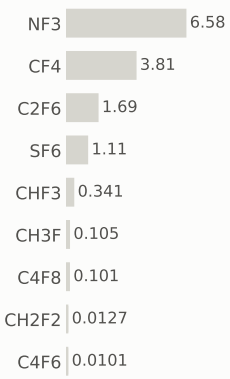

Step #9860: CMP

etch_cmp · CMP

0.169	847.3	0.02%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

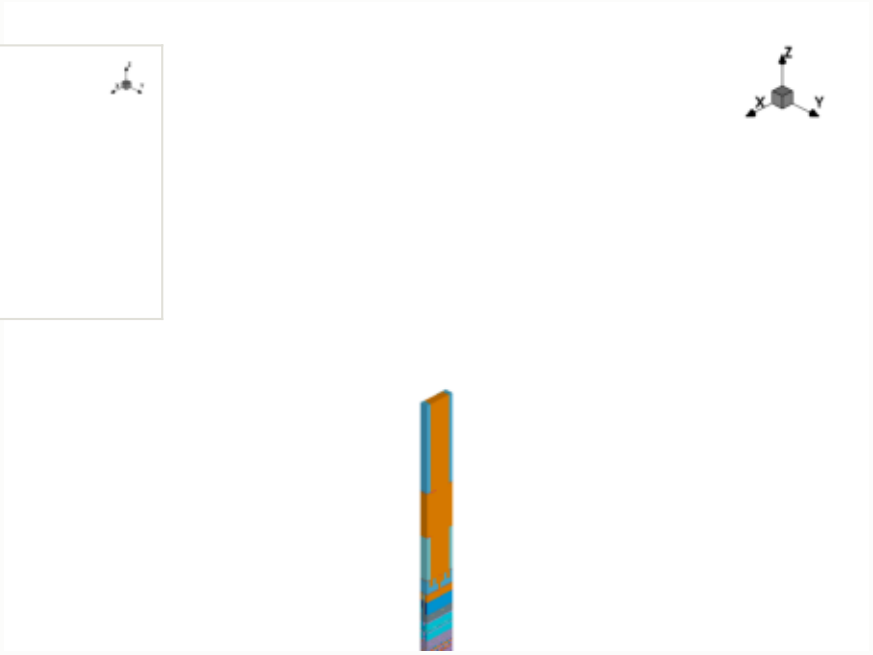

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

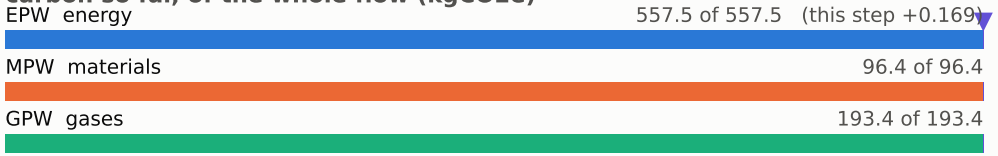

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

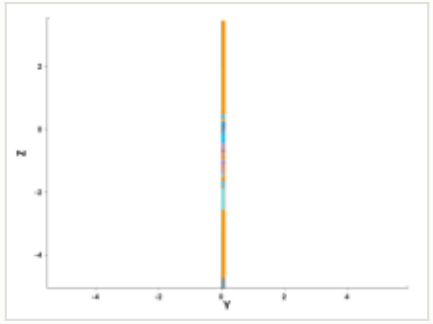

y cut at 0.049 µm

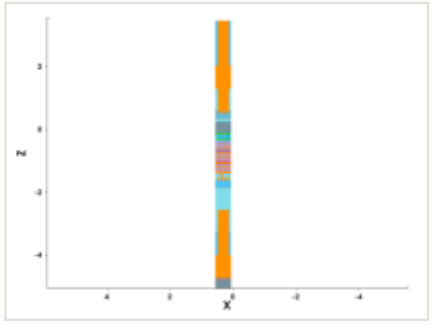

mask for this step

no mask for this step

steps by process area

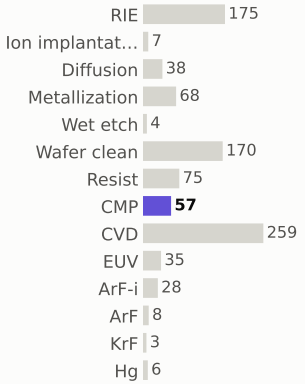

materials deposited (g)

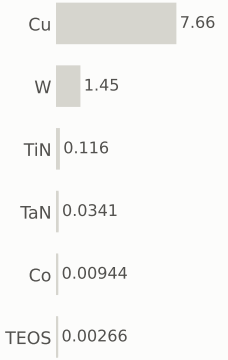

gases emitted (g)

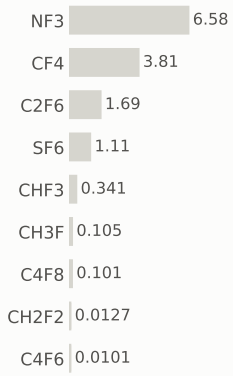

Step #9880: Wafer

flip_structure · Wafer

0	847.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

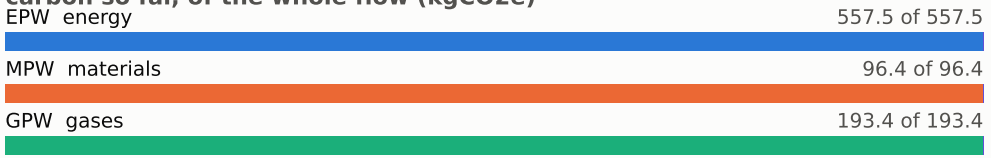

embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.385 µm

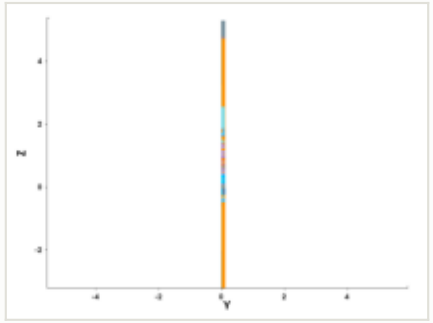

y cut at 0.049 µm

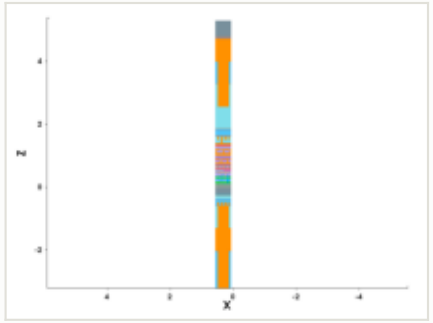

mask for this step

no mask for this step

steps by process area

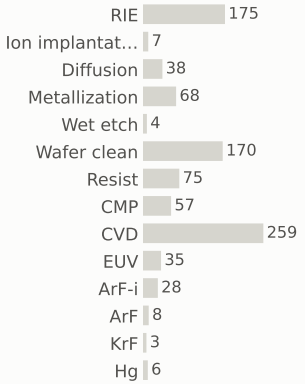

materials deposited (g)

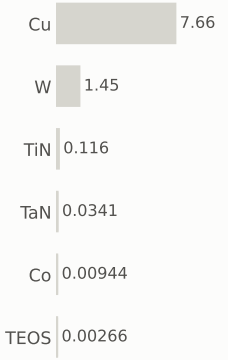

gases emitted (g)

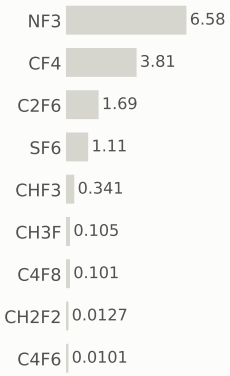

Carbon by module

kgCO2e per wafer, in flow order (steps in brackets)

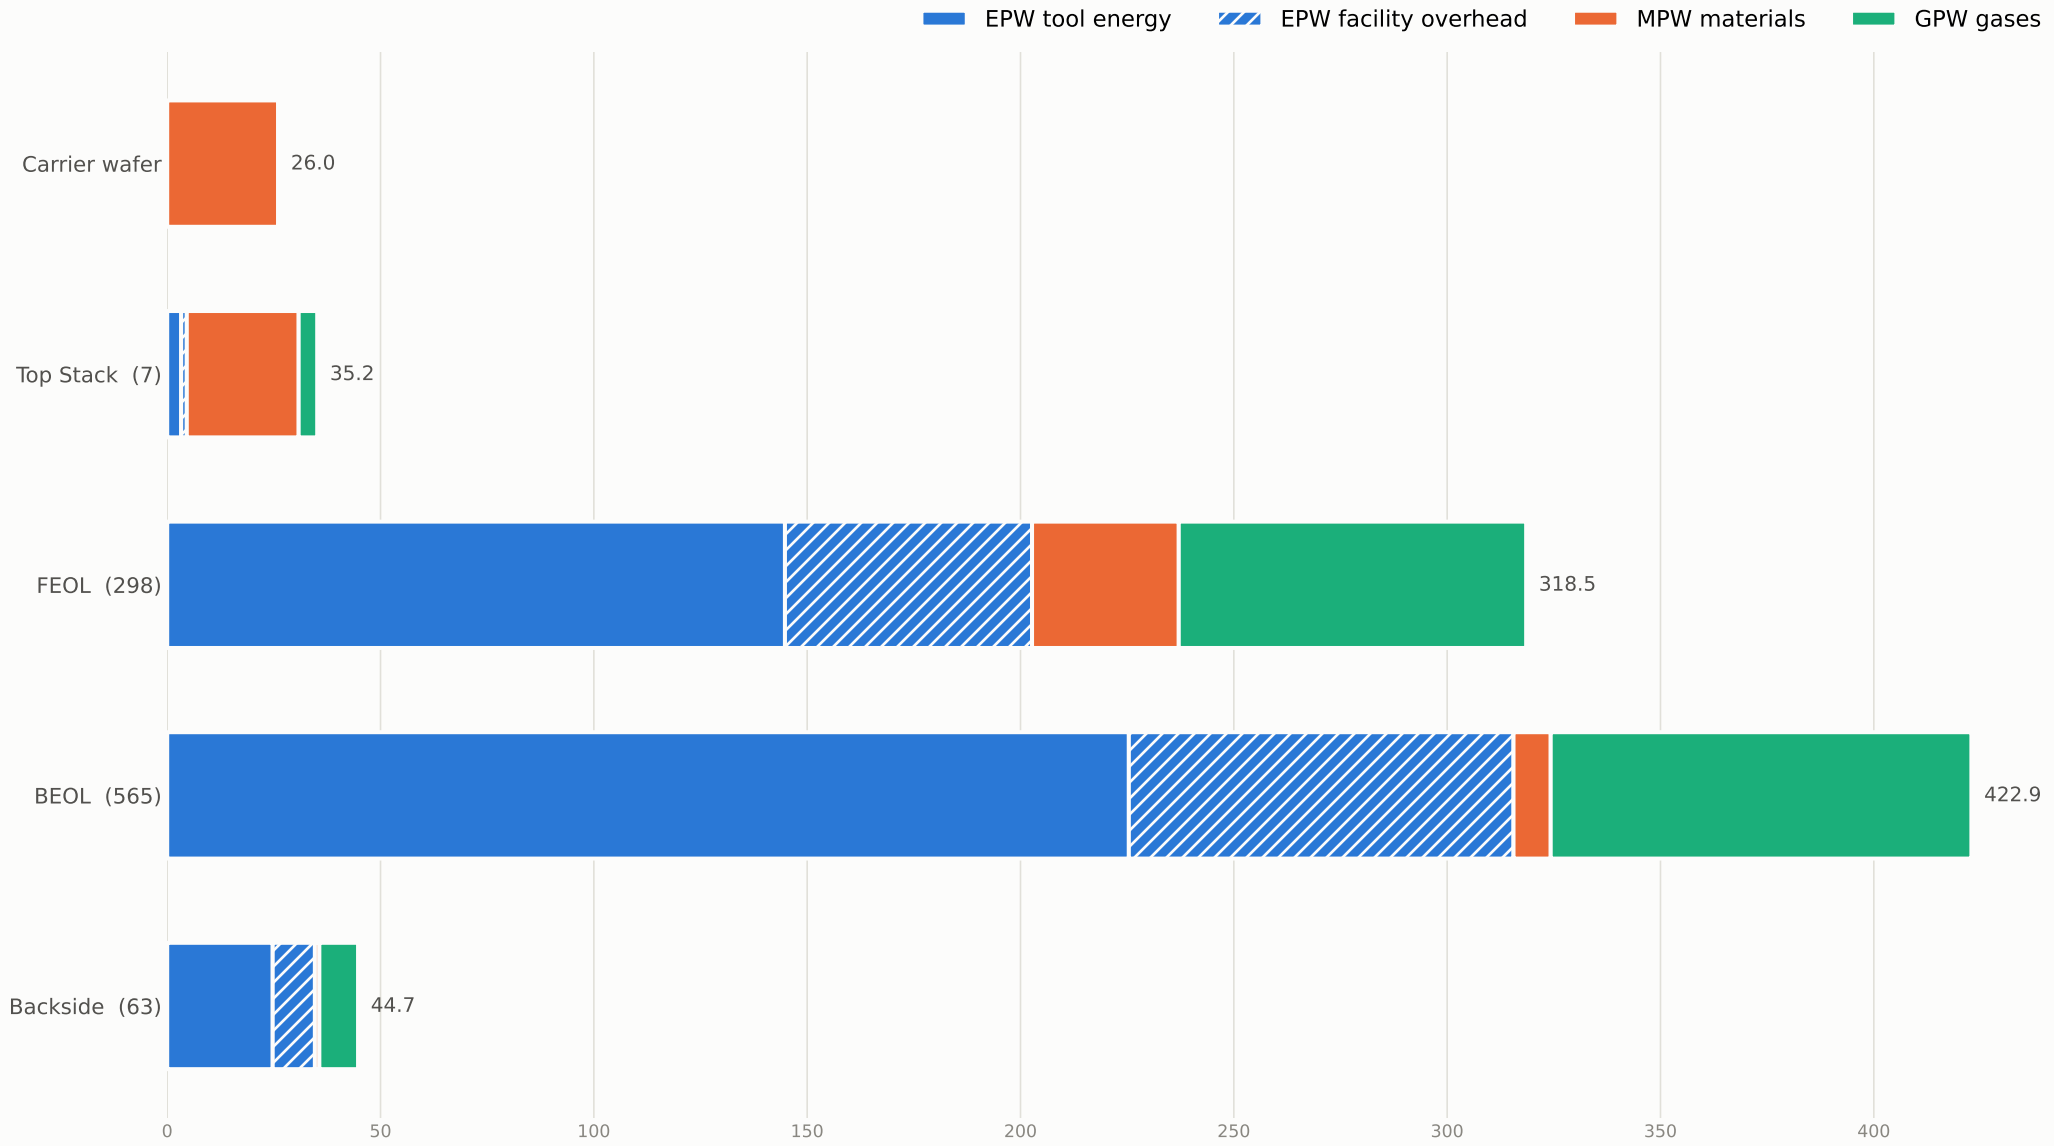

Totals by process area

kgCO2e per wafer; EPW = tool + facility overhead (overhead energy = tool energy x 0.4)

process area	steps	tool kWh	overhead kWh	EPW tool	EPW overhead	EPW	MPW	GPW	total
CVD	259	282.31	112.92	121.39	48.56	169.95	8.23	160.70	338.88
RIE	175	232.75	93.10	100.08	40.03	140.12	9.99	32.73	182.84
Metallization	68	136.00	54.40	58.48	23.39	81.87	0.16	0.00	82.03
EUV	35	113.75	45.50	48.91	19.56	68.48	0.00	0.00	68.48
Diffusion	38	50.54	20.22	21.73	8.69	30.43	0.00	0.00	30.43
Wafer_clean	170	47.60	19.04	20.47	8.19	28.66	0.00	0.00	28.66
Resist	75	21.00	8.40	9.03	3.61	12.64	0.00	0.00	12.64
CMP	57	15.96	6.38	6.86	2.75	9.61	0.00	0.00	9.61
ArF-i	28	10.08	4.03	4.33	1.73	6.07	0.00	0.00	6.07
Ion_implantation	7	9.31	3.72	4.00	1.60	5.60	0.00	0.00	5.60
ArF	8	2.64	1.06	1.14	0.45	1.59	0.00	0.00	1.59
Hg	6	1.98	0.79	0.85	0.34	1.19	0.00	0.00	1.19
Wet_etch	4	1.12	0.45	0.48	0.19	0.67	0.00	0.00	0.67
KrF	3	0.99	0.40	0.43	0.17	0.60	0.00	0.00	0.60
Wafer		0.00	0.00	0.00	0.00	0.00	78.00	0.00	78.00
all	933	926.03	370.41	398.19	159.28	557.47	96.37	193.43	847.27