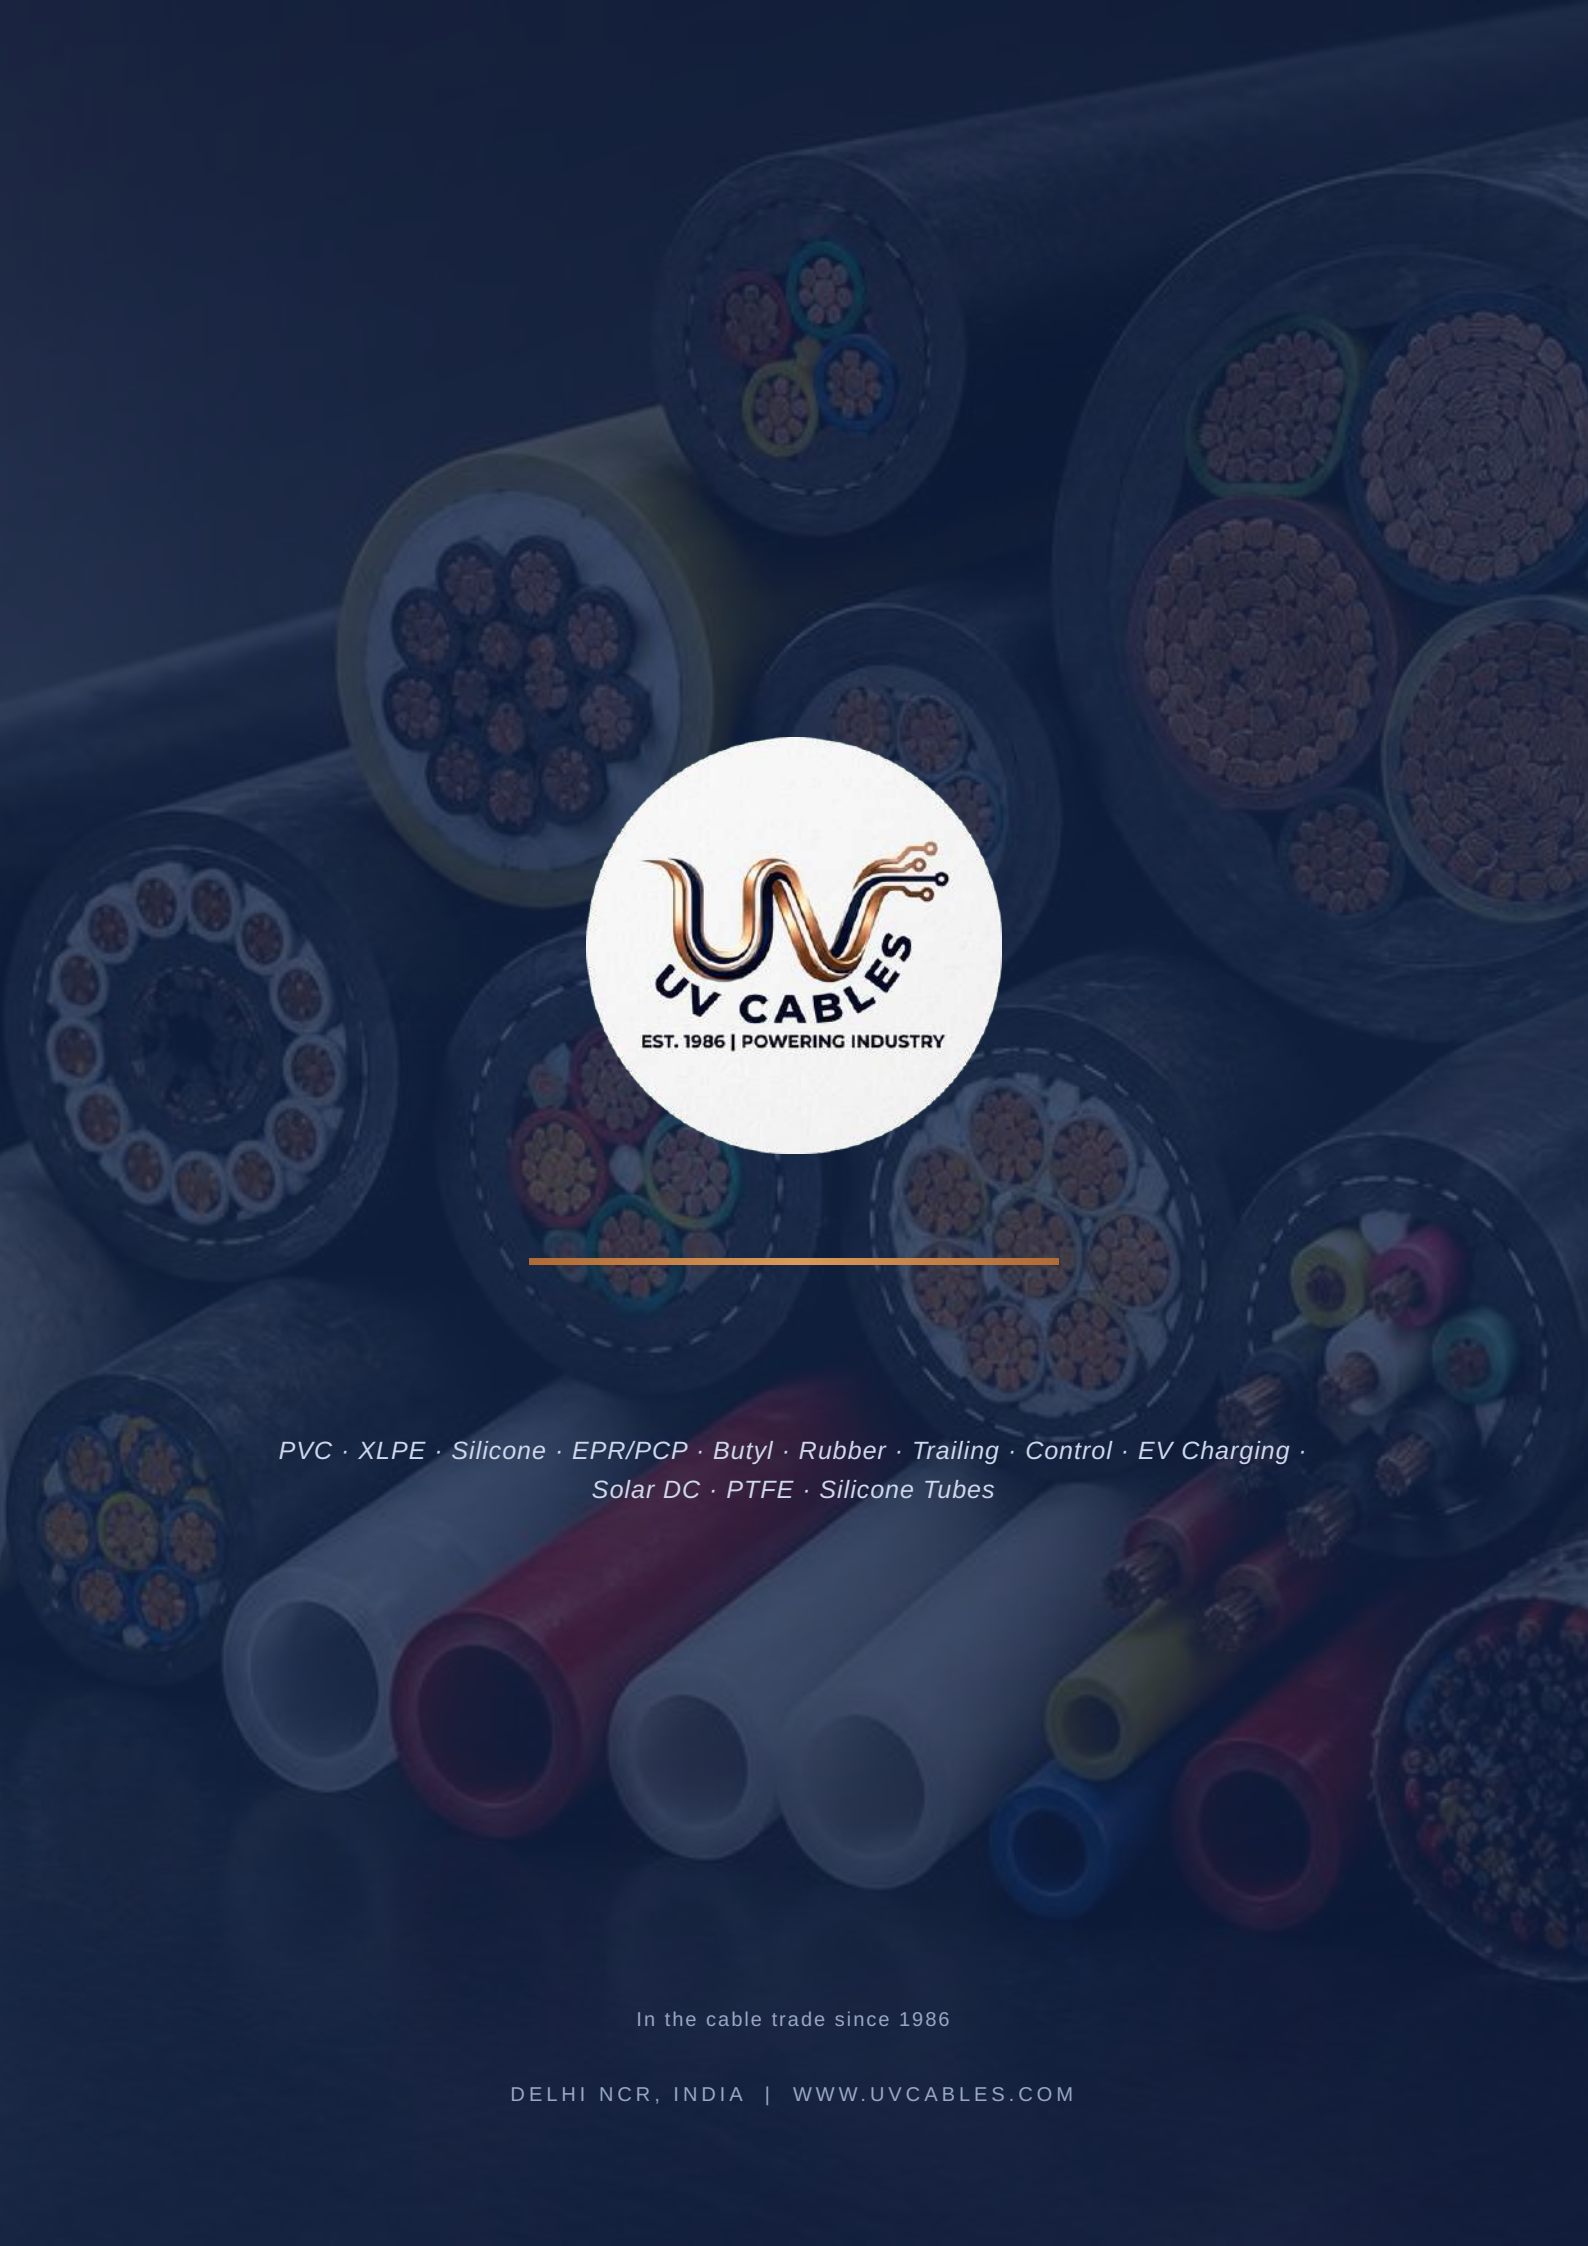


PVC · XLPE · Silicone · EPR/PCP · Butyl · Rubber · Trailing · Control · EV Charging · Solar DC · PTFE · Silicone Tubes

In the cable trade since 1986

DELHI NCR, INDIA | WWW.UVCABLES.COM

01 About Us

UV Cables is a Delhi NCR-based supplier and manufacturer of industrial cables, serving other manufacturers and retail distributors. Proprietor **Matloob Hasan** began working in the cable trade in 1986 — mostly trading and supplying — and has led the firm since.

Our focus is quality construction, quick turnaround, and competitive pricing — without the overhead of large-scale certification processes. We are a lean, focused manufacturer that keeps things simple: make a good product, deliver it on time, and stand behind it.

We produce cables across PVC, XLPE, Silicone, EPR/PCP, Butyl Rubber, Rubber, Trailing & Reeling, Control, EV Charging, Solar DC, PTFE (Teflon), and Silicone Tubes & Profiles — covering virtually every industrial wiring need in the market.

1986	1.1kV–33kV	-65°C to 260°C
IN THE TRADE SINCE	VOLTAGE RANGE	TEMP. RANGE ACROSS RANGE

Trading & Supply Since 1986
Started in the cable trade, mostly trading and supplying.

Custom Lengths & Specs
Any conductor size, any length — manufactured to order.

Pan-India Delivery
Reliable, prompt supply to manufacturers and retail trade.

B2B Manufacturer
Dedicated supply to other manufacturers and distributors.

Fast Order Processing
Agile manufacturing operations ensure rapid order processing and quick dispatch.

Full Spectrum
From PVC to EV charging — covering the industrial spectrum.

02 What We Stand For

Quality First
Every cable is manufactured to consistent quality standards, regardless of order size.

Transparency
We are upfront about our capabilities and limitations — no overselling, no false promises.


Long-Term Partnerships
We aim to be a reliable supply partner, not just a one-time vendor.

Responsiveness
Quick quotes, fast production, and prompt delivery — we respect your timelines.

info@uvcables.com | +91 98180 88873

03 Product Range

Each built and rated for a specific application — our twelve product lines span everyday building wiring through extreme-temperature and chemical-resistant duty.



PVC Cables

Up to 1.1kV · IS 694 / IS 1554



XLPE Cables

1.1kV–33kV · IS 7098



Silicone Cables

-60°C to +180°C



EPR / PCP Cables

Up to 3.3kV · IS 9968



Butyl Rubber Cables

Up to +110°C · Chemical/Radiation resistant



Rubber Cables

Up to 1.1kV · IS 9968 Pt.1



Trailing / Reeling Cables

Up to 3.3kV · IS 9968 Pt.2



Control Cables

2–61 Cores · IS 1554 Pt.2



EV Charging Cables

Up to 200A DC · IEC 62893



Solar DC Cables

Up to 1.8kV DC · IEC 62930



PTFE (Teflon) Cables

-65°C to +260°C



Silicone Tubes & Profiles

-60°C to +200°C · Custom profiles

info@uvcables.com | +91 98180 88873

04 Technical Specifications Summary

A quick-reference summary of voltage rating, temperature range, and typical uses for each product line.

PRODUCT	VOLTAGE RATING	TEMP. RANGE	TYPICAL USES
PVC Cables	Up to 1.1 kV	-15°C to +70°C	Industrial panels, building wiring
XLPE Cables	1.1 kV – 33 kV	Up to +90°C (cont.)	Power substations, underground distribution
Silicone Cables	Up to 1.1 kV	-60°C to +180°C	Furnaces & ovens, high-temp equipment
EPR / PCP Cables	Up to 3.3 kV	-40°C to +85°C	Mining, cranes, portable equipment
Butyl Rubber Cables	Up to 1.1 kV	Up to +110°C	Nuclear & chemical plants
Rubber Cables	Up to 1.1 kV	-25°C to +60°C	Welding machines, portable tools
Trailing / Reeling Cables	Up to 3.3 kV	-40°C to +85°C	EOT cranes, stackers & reclaimers
Control Cables	Up to 1.1 kV	Standard PVC/XLPE range	PLC/DCS systems, automation panels
EV Charging Cables	1 kV AC / 1.5 kV DC	-40°C to +90°C	EV charging stations, fleet charging
Solar DC Cables	Up to 1.8 kV DC	-40°C to +90°C	Rooftop & utility-scale solar
PTFE (Teflon) Cables	Up to 1.1 kV	-65°C to +260°C	Chemical/pharma plants, aerospace
Silicone Tubes & Profiles	N/A	-60°C to +200°C	Gaskets, sealing, OEM machine builders

Note: Products are manufactured as per the applicable IS/IEC standard for each category. UV Cables does not currently hold third-party certification against these standards; testing and certification can be arranged externally on customer request.

info@uvcables.com | +91 98180 88873

05 Guaranteed Technical Particulars — Reference

A quick reference for flexible copper conductor sizes (IS 8130 / IEC 60228 Class 5), applicable across our PVC, EPR/PCP, and Silicone product lines. For a full breakdown by product, see our Technical Datasheet.

SIZE (SQ MM)	CONDUCTOR CLASS	CONDUCTOR STRANDING	WALL THICKNESS (MM)	MAX. OUTER DIA (MM)	MAX. RESISTANCE @20°C (Ω/KM)
0.5	Fine Class 5	16/0.20	0.6	2.6	39.0
0.75	Fine Class 5	24/0.20	0.6	2.8	26.0
1.0	Fine Class 5	32/0.20	0.6	3.0	19.5
1.5	Fine Class 5	30/0.25	0.6	3.4	13.3
2.5	Fine Class 5	50/0.25	0.7	4.1	7.98
4	Fine Class 5	56/0.30	0.8	4.8	4.95
6	Fine Class 5	84/0.30	0.8	5.4	3.30
10	Class 5 Flexible	80/0.40	1.0	7.0	1.91
16	Class 5 Flexible	128/0.40	1.0	8.0	1.21
25	Class 5 Flexible	196/0.40	1.2	10.0	0.780
35	Class 5 Flexible	276/0.40	1.2	11.5	0.554
50	Class 5 Flexible	396/0.40	1.4	13.0	0.386
70	Class 5 Flexible	360/0.50	1.4	15.0	0.272
95	Class 5 Flexible	475/0.50	1.6	17.5	0.206
120	Class 5 Flexible	608/0.50	1.6	19.0	0.161
150	Rope-Lay Flex. Cu	760/0.50	1.8	21.0	0.129
185	Rope-Lay Flex. Cu	925/0.50	2.0	23.5	0.106
240	Rope-Lay Flex. Cu	1221/0.50	2.2	26.5	0.0801
300	Rope-Lay Flex. Cu	1525/0.50	2.4	29.5	0.0641
400	Rope-Lay Flex. Cu	2035/0.50	2.6	33.5	0.0486
500	Rope-Lay Flex. Cu	2546/0.50	2.8	37.5	0.0384
630	Rope-Lay Flex. Cu	3210/0.50	2.8	42.0	0.0287

Conductor stranding shown as No. of wires / max. wire diameter (mm), consistent with IS 8130 / IEC 60228 Class 5 flexible copper construction as commonly used across the industry for silicone, EPR/PCP, and welding cables. Resistance is maximum for plain (untinned) copper at 20°C. Values indicative and subject to tolerances; actual figures confirmed per order. For a full breakdown by product line, see our Technical Datasheet.

Premium Flexible Silicone (Extra-Flexible, on request): for silicone furnace leads, robotics, and other high-flex applications, finer-strand Class 6 construction is available — e.g. 10 sq mm: 320/0.20, 16 sq mm: 512/0.20, 25 sq mm: 798/0.20, 35 sq mm: 1120/0.20, 50 sq mm: 1596/0.20, 70 sq mm: 2233/0.20, 95 sq mm: 3025/0.20. Quoted separately from standard Class 5 construction above.

> **Note:** UV Cables does not hold any certification against these standards. If client wants third party testing can be arranged for the client on request.

info@uvcables.com | +91 98180 88873

06 Markets We Serve

Manufacturers & Distributors
Dedicated B2B supply to other manufacturers, contractors, and trade distributors across Delhi NCR and pan-India.

Institutional & PSU-Linked Supply
Working towards empanelment and vendor registration with public sector undertakings and government buyers.

B2B Trade Platforms
Active presence on IndiaMART, TradeIndia, and the Government e-Marketplace (GeM), enabling bulk and repeat B2B orders.

Export
IEC-registered, enabling the firm to undertake cross-border trade as opportunities arise.

07 Why Work With Us

- ✓ Promoter-led business with cable trading and supply experience dating back to 1986
- ✓ 12 product lines across PVC, XLPE, Silicone, EPR/PCP, Butyl, Rubber, EV, Solar, PTFE and more
- ✓ Custom lengths and cross-sections manufactured to order — not limited to fixed SKUs
- ✓ Formally registered entity — GST, Udyam (MSME), and IEC compliant
- ✓ Lean, agile operations enable quick quotes and fast turnaround on every order
- ✓ Upfront about capabilities and limitations — no overselling, no false promises

08 Infrastructure & Quality Process

UV Cables sources conductor and insulation raw materials conforming to standard Indian specifications. We maintain dimensional checks, conductor gauge verification, and visual sheath inspection on outgoing consignments. As a lean, agile manufacturer, we prioritise consistent construction quality and honest turnaround commitments over large-scale in-house certification overhead — and can coordinate third-party NABL-accredited lab testing (e.g. CPRI, ERDA) on client request for orders that require formal test reports.

09 Packing & Delivery

Cables are supplied on standard wooden/steel drums or in coil form depending on length and gauge, with end-sealing to prevent moisture ingress during transit. Dispatch is arranged pan-India, with invoice and e-way bill documentation provided with every consignment.

info@uvcables.com | +91 98180 88873

10 Registration & Compliance

UV Cables (legal name: United Values Cables) operates as a registered proprietorship with the following statutory registrations in place:

Brand Name	UV Cables
Legal Entity Name	United Values Cables
Nature of Concern	Proprietorship
Proprietor	Matloob Hasan
GSTIN	07AFUPH7105N1ZX
Udyam (MSME) Registration No.	UDYAM-DL-04-0036764
Importer-Exporter Code (IEC)	AFUPH7105N
PAN	AFUPH7105N
Registered Address	27/1/2, Street No. 10, Park Side, Sangam Vihar, Jharoda, North Delhi, Delhi – 110084



11 Get In Touch

Whether you need a regular supply of standard cables or a custom specification, we're happy to talk. When reaching out, it helps to include: cable type, voltage/current rating, conductor cross-section, number of cores, quantity, and the IS/IEC standard required.

PROPRIETOR

Matloob Hasan

PHONE / WHATSAPP

+91 98180 88873 / +91 98683 82155

EMAIL

info@uvcables.com

HOURS

Mon–Sat, 9AM–6PM IST

WEBSITE

www.uvcables.com

REGISTERED ADDRESS

27/1/2, Street No. 10, Park Side,
Sangam Vihar, Delhi – 110084, India

DELIVERY

Pan-India





POWERING INDUSTRY

27/1/2, Street No. 10, Park Side, Sangam Vihar, Delhi – 110084, India
+91 98180 88873 / +91 98683 82155 | info@uvcables.com | www.uvcables.com