


# ASSIGNMENT-1

## MAHENDRA ENGINEERING COLLEGE FOR WOMEN

NAME : HASEENA BANU J  
CLASS : 3 YEAR ECE  
SUBJECT : IBM  
REGISTER NO :611420106020

Build a smart home in wokwi with minimum 2  
sensors, Led, buzzer

### DESIGN PART

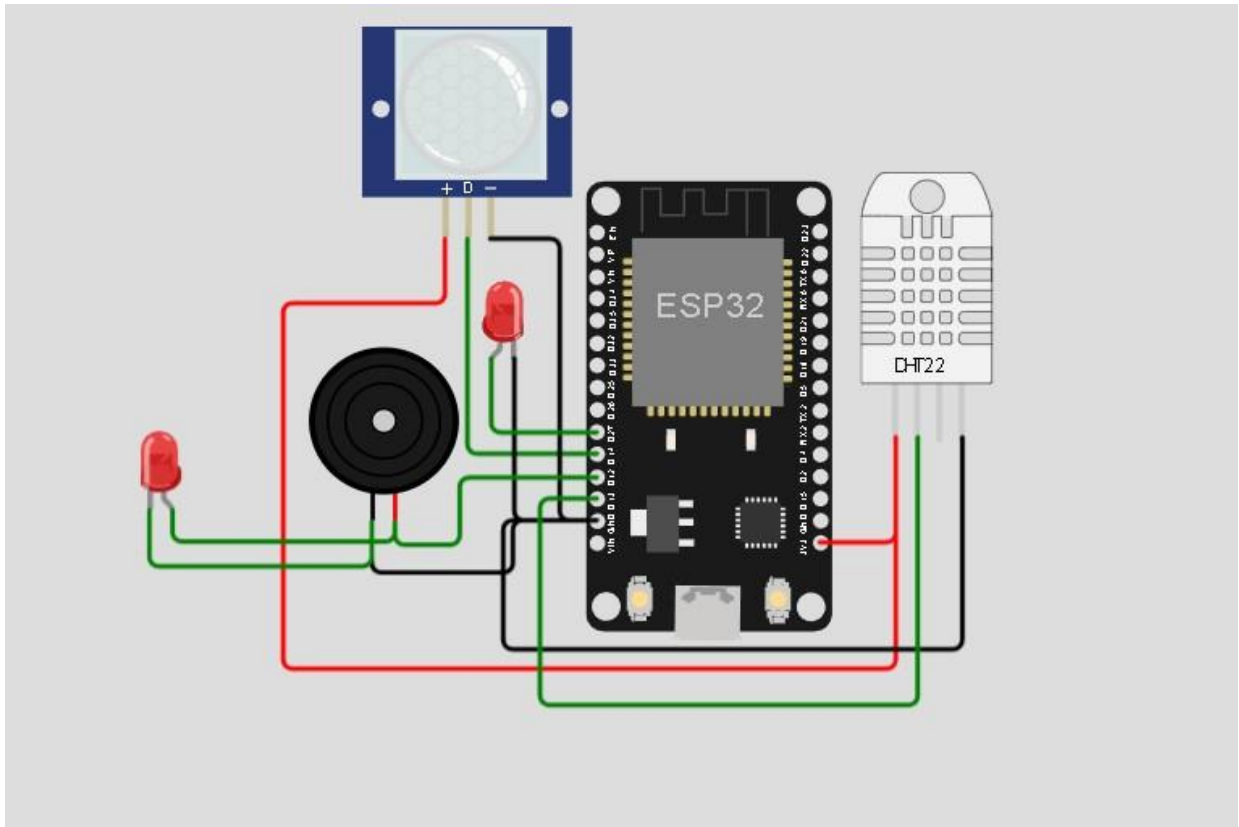

## CODING PART sketch.ino

```
#include <FirebaseESP32.h> //call library firebase esp32
#include <WiFi.h> //call library wifi
#include "DHT.h" //call library dht

#define FIREBASE_HOST "https://smart-home-7b44f-
defaulttrtdb.firebaseio.com" //declare variable as a firebase host
#define WIFI_SSID "Wokwi-GUEST" //declare variable as a
wifi_ssid
#define WIFI_PASSWORD "" //declare variable as a wifi
password
#define FIREBASE_Authorization_key
"oTRPje2my9ROlP2dIhJMzEd66sd3arqmtC4WG6cv"
```

```
//declare variable as a firebase auth key
FirebaseData firebaseData; //Define the FirebaseData object as
firebaseData
FirebaseJson json; //Define the FirebaseJson as json

int led = 27; //declare variable as a integer String
message = ""; //declare variable as a string
String message1 = ""; //declare variable as a string
String s_pir = ""; //declare variable as a string
String b = ""; //declare variable as a string
String c = ""; //declare variable as a string bool
a = 0; //declare variable as a boolean #define
pir 14 //declare variable as a pin pir
#define buzzer 12 //declare variable as a pin buzzer
#define DHTPIN 13 //declare variable as a pin dht #define
DHTTYPE DHT22 //declare variable as a dht11 DHT
dht(DHTPIN, DHTTYPE); //connect esp32 to dht void
setup() {
  pinMode(led, OUTPUT); //led as an output
  pinMode(pir, INPUT); //pir as an input
  pinMode(buzzer, OUTPUT); //buzzer as an output
  Serial.begin(115200); //open serial connection
  dht.begin(); //initiate the connection with the dht
  WiFi.begin (WIFI_SSID, WIFI_PASSWORD); //initiate the
connection with ap
  Serial.println("Connecting..."); //serial print monitor
connecting
```

```

//if wifi not connect serial print monitor not connected
while (WiFi.status() != WL_CONNECTED) {
Serial.println("NOT CONNECTED"); delay(300);
}
b = WIFI_SSID; //define variable b like variable wifi_ssid
Serial.println();
Serial.print("IP Address: "); //serial print monitor ip address:
Serial.println(WiFi.localIP()); //serial print monitor wifi local ip
Serial.println();

Firebase.begin(FIREBASE_HOST,FIREBASE_Authorization_
key); //initiate the connection with firebase
}

void loop() {
  bool state_pir = digitalRead(pir); //declare variable state_pir as
a digital read pir sensor (boolean)

  //get string firebase data led
  if (Firebase.getString(firebaseData, "/ESP32APP_LED/LED"))
  {
    String message_fb = firebaseData.stringData(); if
(message_fb != message) { message = message_fb;
if(message.indexOf("LED ON") != -1){digitalWrite(led,
HIGH);} if(message.indexOf("LED OFF") != -
1){digitalWrite(led, LOW);}
  }
}

```

```

//get string firebase data set status motion sensor
if (Firebase.getString(firebaseData,
"/ESP32APP_MOTION/ALARM_SET")) {
    String message1_fb = firebaseData.stringData();
    if (message1_fb != message1) {    message1 =
message1_fb;    if(message1.indexOf("ALARM
SET ON") != -1){        a=1;
        s_pir = "READY";
        }
        if(message1.indexOf("ALARM SET OFF") != -1){
            digitalWrite(buzzer, LOW);
            s_pir = "OFF";
            a=0;
            }
        }
    }
}

```

```

//condition pir sensor if detect object
if (state_pir==1 && a==1){
digitalWrite(buzzer, HIGH);
    s_pir = "THIEFFFF";
    }

```

```

//declare variable hum as a dht read humidity(%) and
temperature (c)
float hum = dht.readHumidity();
float temp = dht.readTemperature();

```

```

//condition dht sensor if not connect with esp32
if (isnan(hum) || isnan(temp) ){
    Serial.println(F("Failed to read from DHT sensor!"));
    c = "FAILED";
}
else {
    c= "READY";
}

Serial.print("Temperature: "); //serial print monitor
temperature:
Serial.print(temp); //serial print monitor value temperature
Serial.print("°C"); //serial print monitor °C
Serial.print(" Humidity: "); //serial print monitor humidity:
Serial.print(hum); //serial print monitor value humidity
Serial.print("%"); //serial print monitor %
Serial.print(" ");
Serial.print(message); //serial print monitor value message
Serial.print(" ");
Serial.print(message1); //serial print monitor value message1
Serial.print(" ");
Serial.print(s_pir); //serial print monitor value s_pir
Serial.println();

Firebase.setFloat(firebaseData,
"/ESP32APP_DHT11/TEMPERATURE", temp); //firebase
data
set float value temperature
Firebase.setFloat(firebaseData,

```

```
"/ESP32APP_DHT11/HUMIDITY", hum); //firebase data set  
float value humidity  
Firebase.setString(firebaseData,  
"/ESP32APP_DHT11/STATUS", c); //firebase data set string  
value c  
Firebase.setString(firebaseData,  
"/ESP32APP_MOTION/BUZZER", s_pir); //firebase data set  
string value s_pir  
Firebase.setString(firebaseData,  
"/ESP32APP_WIFI/STATUS", b); //firebase data set string  
value b  
delay(200); //delay 200 ms  
}
```

```
#include <FirebaseESP32.h> //call library firebase esp32  
#include <WiFi.h> //call library wifi  
#include "DHT.h" //call library dht
```

```
#define FIREBASE_HOST "https://smart-home-7b44f-  
default-rtdb.firebaseio.com" //declare variable as a firebase host  
#define WIFI_SSID "Wokwi-GUEST" //declare variable as a  
wifi_ssid  
#define WIFI_PASSWORD "" //declare variable as a wifi  
password  
#define FIREBASE_Authorization_key  
"oTRPje2my9ROIP2dIhJMzEd66sd3arqmtC4WG6cv"  
//declare variable as a firebase auth key
```

```
FirebaseData firebaseData; //Define the FirebaseData object as  
firebaseData
```

```
FirebaseJson json; //Define the FirebaseJson as json
```

```
int led = 27; //declare variable as a integer String
```

```
message = ""; //declare variable as a string
```

```
String message1 = ""; //declare variable as a string
```

```
String s_pir = ""; //declare variable as a string
```

```
String b = ""; //declare variable as a string
```

```
String c = ""; //declare variable as a string bool
```

```
a = 0; //declare variable as a boolean
```

```
#define pir 14 //declare variable as a pin pir
```

```
#define buzzer 12 //declare variable as a pin buzzer
```

```
#define DHTPIN 13 //declare variable as a pin dht
```

```
#define DHTTYPE DHT22 //declare variable as a dht11 DHT
```

```
dht(DHTPIN, DHTTYPE); //connect esp32 to dht
```

```
void setup() {
```

```
  pinMode(led, OUTPUT); //led as an output
```

```
  pinMode(pir, INPUT); //pir as an input
```

```
  pinMode(buzzer, OUTPUT); //buzzer as an output
```

```
  Serial.begin(115200); //open serial connection
```

```
  dht.begin(); //initiate the connection with the dht
```

```
  WiFi.begin (WIFI_SSID, WIFI_PASSWORD); //initiate the  
connection with ap
```

```
  Serial.println("Connecting..."); //serial print monitor  
connecting
```



```
//if wifi not connect serial print monitor not connected
while (WiFi.status() != WL_CONNECTED) {
  Serial.println("NOT CONNECTED");  delay(300);
}
b = WIFI_SSID; //define variable b like variable wifi_ssid
Serial.println();
Serial.print("IP Address: "); //serial print monitor ip address:
Serial.println(WiFi.localIP()); //serial print monitor wifi local ip
Serial.println();
```

```
Firebase.begin(FIREBASE_HOST,FIREBASE_Authorization_
key); //initiate the connection with firebase
}
```

```
void loop() {
  bool state_pir = digitalRead(pir); //declare variable state_pir as
  a digital read pir sensor (boolean)
```

```
//get string firebase data led
if (Firebase.getString(firebaseData, "/ESP32APP_LED/LED"))
{
  String message_fb = firebaseData.stringData();
  if (message_fb != message) {    message =
  message_fb;
    if(message.indexOf("LED ON") != -1){digitalWrite(led,
HIGH);}          if(message.indexOf("LED OFF") != -
1){digitalWrite(led, LOW);}
  }
}
```

```

//get string firebase data set status motion sensor
if (Firebase.getString(firebaseData,
"/ESP32APP_MOTION/ALARM_SET")) {
    String message1_fb = firebaseData.stringData();
    if (message1_fb != message1) {    message1 =
message1_fb;    if(message1.indexOf("ALARM
SET ON") != -1){        a=1;
        s_pir = "READY";
        }
    if(message1.indexOf("ALARM SET OFF") != -1){
        digitalWrite(buzzer, LOW);
        s_pir = "OFF";
        a=0;
        }
    }
}

```

```

//condition pir sensor if detect object
if (state_pir==1 && a==1){
digitalWrite(buzzer, HIGH);
    s_pir = "THIEFFFF";
}

```

```

//declare variable hum as a dht read humidity(%) and
temperature (c)
float hum = dht.readHumidity();
float temp = dht.readTemperature();

```

```
//condition dht sensor if not connect with esp32
if (isnan(hum) || isnan(temp) ){
    Serial.println(F("Failed to read from DHT sensor!"));
    c = "FAILED";
}
else {
    c= "READY";
}
Serial.
pri
nt(
"Te
mp
era
tur
e:
");
//se
rial
pri
nt
mo
nit
or
te
mp
era
```

tur

e:

```
Serial.print(temp); //serial print monitor value temperature
Serial.print("°C"); //serial print monitor °C
Serial.print(" Humidity: "); //serial print monitor humidity:
Serial.print(hum); //serial print monitor value humidity
Serial.print("% "); //serial print monitor %
Serial.print(" ");
Serial.print(message); //serial print monitor value message
Serial.print(" ");
Serial.print(message1); //serial print monitor value message1
Serial.print(" ");
Serial.print(s_pir); //serial print monitor value s_pir
Serial.println();
```

```
Firebase.setFloat(firebaseData,
"/ESP32APP_DHT11/TEMPERATURE", temp); //firebase
data
set float value temperature
Firebase.setFloat(firebaseData,
"/ESP32APP_DHT11/HUMIDITY", hum); //firebase data set
float value humidity
Firebase.setString(firebaseData,
"/ESP32APP_DHT11/STATUS", c); //firebase data set string
value c
Firebase.setString(firebaseData,
"/ESP32APP_MOTION/BUZZER", s_pir); //firebase data set
string value s_pir
Firebase.setString(firebaseData,
```

```
"/ESP32APP_WIFI/STATUS", b); //firebase data set  
string value b delay(200); //delay 200 ms  
}
```

## diagram.json

```
{  
  "version": 1,  
  "author": "chandra kirana",  
  "editor": "wokwi",  
  "parts": [  
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 0,  
      "left": 0, "attrs": { } },  
    {  
      "type": "wokwi-dht22",  
      "id": "dht1",  
      "top": -2.08,  
      "left": 119.41,  
      "attrs": { "temperature": "30.1", "humidity": "29" }  
    },  
    {  
      "type": "wokwi-led",  
      "id": "led1",  
      "top": 36.62,  
      "left": -55.84,  
      "attrs": { "color": "red", "flip": "1" }  
    }  
  ]  
}
```

```
},
{
  "type": "wokwi-pir-motion-sensor",
  "id": "pir1",
  "top": -65.32,
  "left": -97.06,
  "attrs": { }
},
{
  "type": "wokwi-buzzer",
  "id": "bz1",
  "top": 65.51,
  "left": -119.56,
  "attrs": { "volume": "0.1" }
},
{
  "type": "wokwi-led",
  "id": "led2",
  "top": 102.36,
  "left": -203.89,
  "attrs": { "color": "red", "flip": "" }
}
],
"connections": [
  [ "esp:TX0", "$serialMonitor:RX", "", [] ],
  [ "esp:RX0", "$serialMonitor:TX", "", [] ],
  [ "dht1:VCC", "esp:3V3", "red", [ "v0" ] ],
  [ "pir1:OUT", "esp:D14", "green", [ "v0" ] ],
  [ "pir1:GND", "esp:GND.2", "black", [ "h30.28", "v122.32" ] ]
```

```
],  
  [ "esp:GND.2", "led1:C", "black", [ "h0" ] ],  
  [ "pir1:VCC", "dht1:VCC", "red", [ "v27.99", "h-70.08",  
"v158.75", "h261.03" ] ],  
  [ "bz1:2", "esp:D12", "green", [ "v10.06", "h28.07", "v29.68"  
] ],  
  [ "esp:GND.2", "bz1:1", "black", [ "h-36.45", "v22.63",  
"h58.84" ] ],  
  [ "dht1:GND", "esp:GND.2", "black", [ "v92.14", "h198.86",  
"v-55.96" ] ],  
  [ "led1:A", "esp:D27", "green", [ "v0" ] ],  
  [ "dht1:SDA", "esp:D13", "green", [ "v116.37", "h-163.6",  
"v-91.7" ] ],  
  [ "bz1:1", "led2:C", "green", [ "v19.44", "h-99.3" ] ],  
  [ "led2:A", "bz1:2", "green", [ "v13.82", "h100.85" ] ]  
],  
"dependencies": {}  
}
```