ANTMINER

S21 Hyd.

Product Manual

Jul. 2024

BITMAIN

BITAMIN TECHNOLOGIES INC.
www.bitmain.com

1. Specification

Product Glance	Value		
Model	**S21 Hyd.**		
Version	**m0-10**		
Crypto algorithm/coins	**SHA256|BTC/BCH/BSV**		
Typical Hashrate, **TH/s**(1-1)	**335**	**319**	**302**
Power on wall @35℃(1-2), **Watt**(1-1)	**5360**	**5110**	**4840**
Power efficiency on wall@35℃(1-2), **J/TH**(1-1)	**16.0**		

Detailed Characteristics	Value
Power supply	
Phase	**3**
Input voltage, **Volt**(2-1)	**380~415**
Input frequency range, **Hz**	**50~60**
Input max current, **Amp**	**12**
Hardware configuration	
Network connection mode	**RJ45 Ethernet 10/100M**
Server size (Length*Width*Height, w/o package), **mm**	**339*163*207**
Server size (Length*Width*Height, with package), **mm**	**570*316*430**
Net weight, **kg**	**12.3**
Gross weight, k**g**	**13.6**
Environment requirements	
Inlet coolant temperature, **℃**	**20~50**
Coolant flow, **L/min**	**8.0~10.0**
Coolant pressure, **bar**	**≤3.5**
Working coolant(2-2)	**Antifreeze/ Pure water/Deionized water**
Coolant pH value	**Antifreeze: 7.0~9.0 Prue water: 6.5~7.5 Deionized water：8.5~9.5**
Diameter of coolant pipe connector, **mm**	**OD10**
Storage temperature, **℃**	**-20~70**
Operation humidity(non-condensing), **RH**	**10~90%**

Notes:

(1-1) The hashrate value, power on wall, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by ±3%, and the actual power on wall and power efficiency on wall fluctuate by ±5%.
(1-2) Inlet coolant temperature.
(2-1) Caution: Wrong input voltage may cause server damaged.
(2-2) For detailed working coolant use and maintenance instructions, please refer to "**ANTSPACE HK3 Water Cooling Container & Dry-Wet Tower Product Manual**", Chapter 9, Article 3, Point 6, "Maintenance of Coolant"!

2. Performance Curve

(1) Hashrate vs. Inlet Coolant Temperature

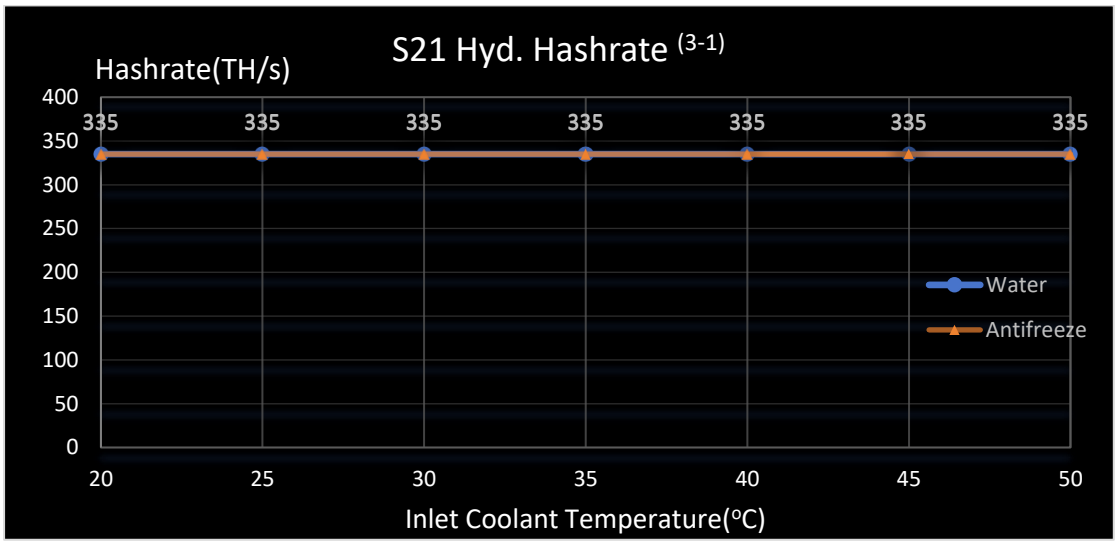

(2) Power Efficiency vs. Inlet Coolant Temperature

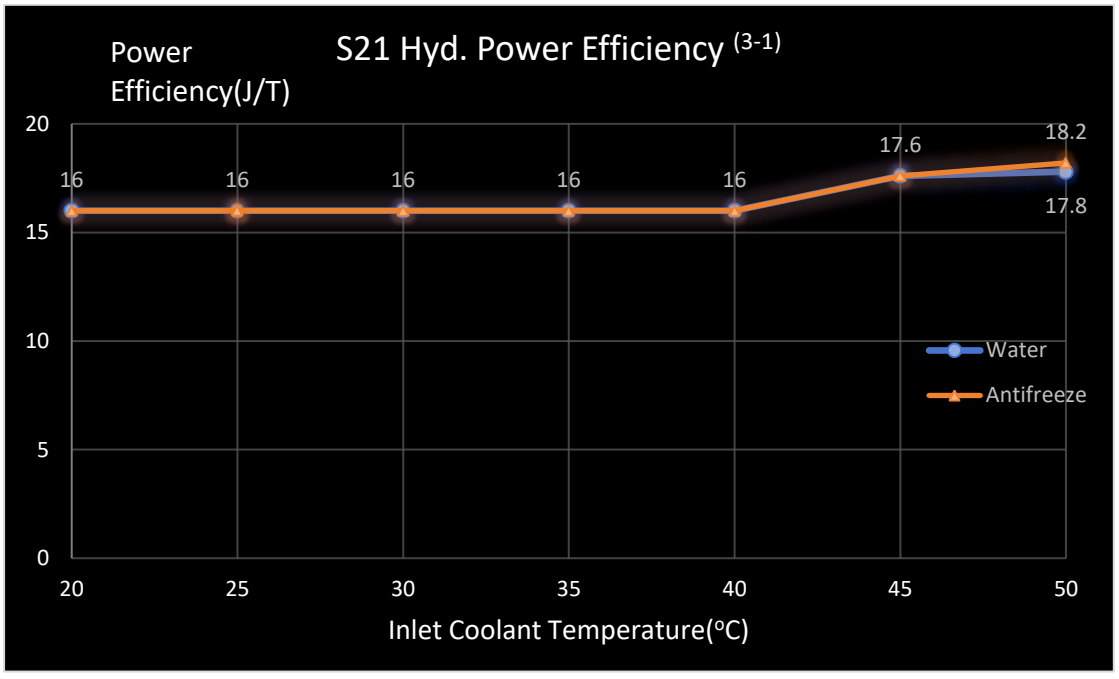

(3-1) The hashrate value, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by ±3%, and the actual power efficiency on wall fluctuate by ±5%.