

WALL / WINDOW EXTRACT FANS

Technical Data Sheet



PRODIGY VENTILATION SYSTEMS



PWF SERIES - PWF-150DC-AS / PWF-150DC-ES



Structural configuration for
models **PWF-150DC-AS**



Structural configuration for
models **PWF-150DC-ES**

Product Description

The Window Ventilation Fan Series is designed for efficient air extraction and fresh air circulation in residential and light commercial ventilation applications.

It features a brushless DC motor, delivering low power consumption, stable airflow, low noise operation, and long service life.

Its compact square structure is suitable for window and wall installation, helping remove stale air, humidity, and odors from bathrooms, kitchens, toilets, laundry rooms, and utility areas.

The fan is available with auto shutter or electrical front shutter with rear automatic shutter, providing effective backdraft protection and improved air sealing when the fan is not operating.

FEATURES

1. Energy Saving & High Efficiency

Equipped with a brushless DC motor for low power consumption and stable performance.

Provides efficient airflow with low-noise operation.

Designed to deliver reliable ventilation with only 5W rated power.

2. Effective Ventilation

Designed for efficient exhaust of humidity, odors, and stale air. Suitable for bathrooms, kitchens, toilets, laundry rooms, and similar indoor spaces.

Provides air volume up to 180 m³/h / 100 CFM.

3. Shutter Protection

Available with auto shutter or electrical front shutter with rear automatic shutter. Helps prevent backdraft, dust, insects, and outside air from entering when the fan is off. Electrical shutter model provides improved sealing and a more premium operating function.

4. Durable Construction PP/ABS housing and ABS impeller for reliable performance and durability.

Two ball bearing BLDC motor for long service life and dependable operation. IPX2 protection suitable for general indoor ventilation use.

5. Easy Installation & Maintenance Compact square design suitable for window and wall installation.

Mounting hole diameter Ø150–155mm for 150mm / 6 inch applications. Lightweight structure allows simple installation, wiring, and maintenance.






Performance Parameters

Verify that the unit's rated voltage, frequency, and power requirements correspond precisely to the site's electrical supply before operation. Ensure all electrical characteristics listed on the product nameplate are fully compatible with the available power source to maintain safe and stable performance.

Model	Power (W)	Airflow (m³/h)	Pressure (Pa)	Diameter	Noise (dB)	Motor/Bearing	Shutter Type
PWF-150DC-AS	5W	180 m³/h (100 CFM)	25 Pa	Ø150 mm	44.6 dB	BLDC /Two Ball Bearing	Auto Shutter
PWF-150DC-ES	5W	180 m³/h (100 CFM)	25 Pa	Ø150 mm	44.6 dB	BLDC /Two Ball Bearing	Electrical Front Shutter + Rear Auto Shutter

DIMENSIONS (mm)

For **PWF-150DC-AS / PWF-150DC-ES**

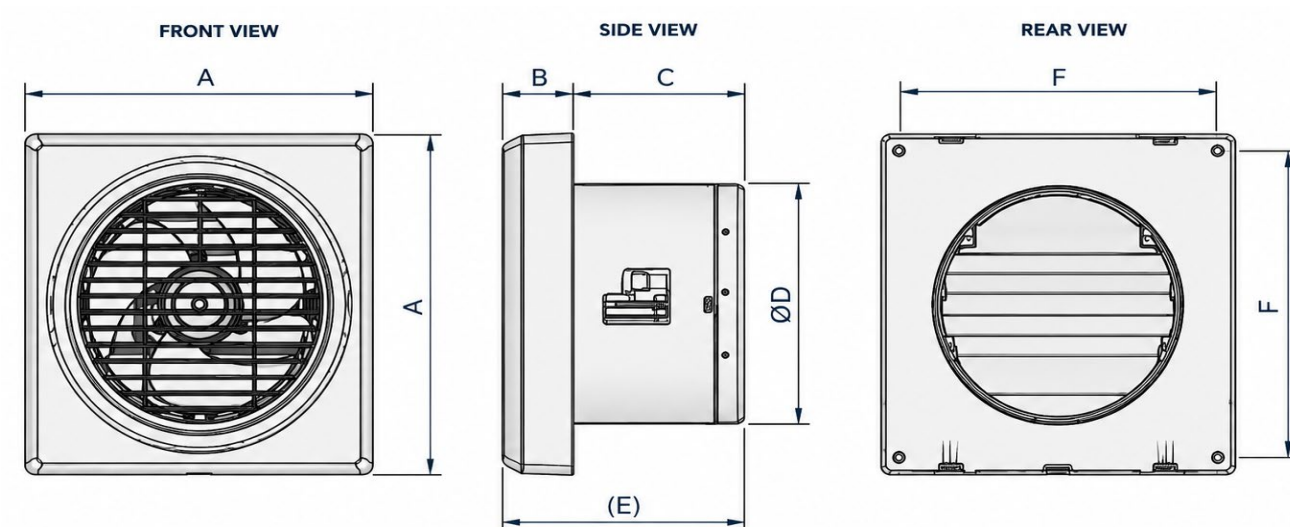


Prodigy Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
PWF-150DC-AS	210	44	95	148	139	189
PWF-150DC-ES	210	53	95	148	148	189



WIRING INSTRUCTION

PWF-150DC-ES

Electrical Schematic Diagram

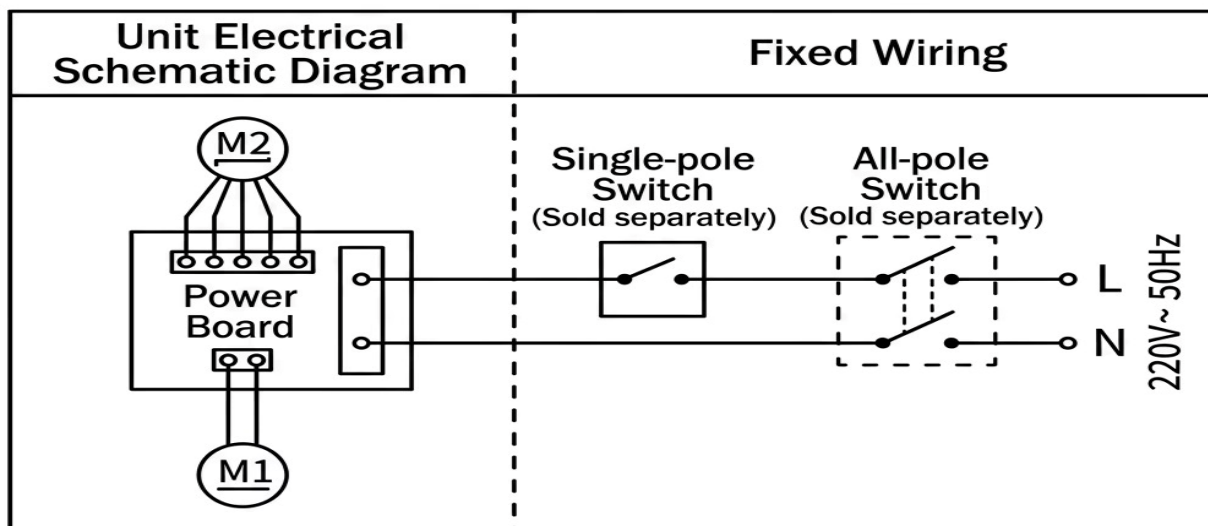

PWF-150DC-AS

Electrical Schematic Diagram

