



D & Q SERIES

AIR CURTAINS

Horizontal air curtains create a continuous barrier across open doorways, helping reduce indoor/outdoor air transfer and supporting environmental separation and flying-insect control.

D SERIES CURVED PROFILE



KEY FEATURES

Energy-efficient copper motor

Copper-wire design for stable operation.

Durable powder-coated casing

Aluminum housing for indoor commercial use.

Two-speed operation

High / low settings to suit airflow needs.

Adjustable air direction

Adjustable outlet discharge angle.

Multiple width options

Lengths to suit different entrance widths.

Flexible control options

Manual or remote control; optional door sensor.

Q SERIES CONTEMPORARY PROFILE



Product appearance illustrated; configuration varies by model.

APPLICATIONS

Commercial entrances, warehouses, stations and similar indoor door openings.


Recommended mounting height: 2.5-3.0 m. Select unit width to cover the entrance.



D & Q SERIES

CONSTRUCTION & KEY FEATURES

Horizontal cross-flow construction combines a powder-coated aluminum housing, a 100% copper-wire motor and ball bearings.

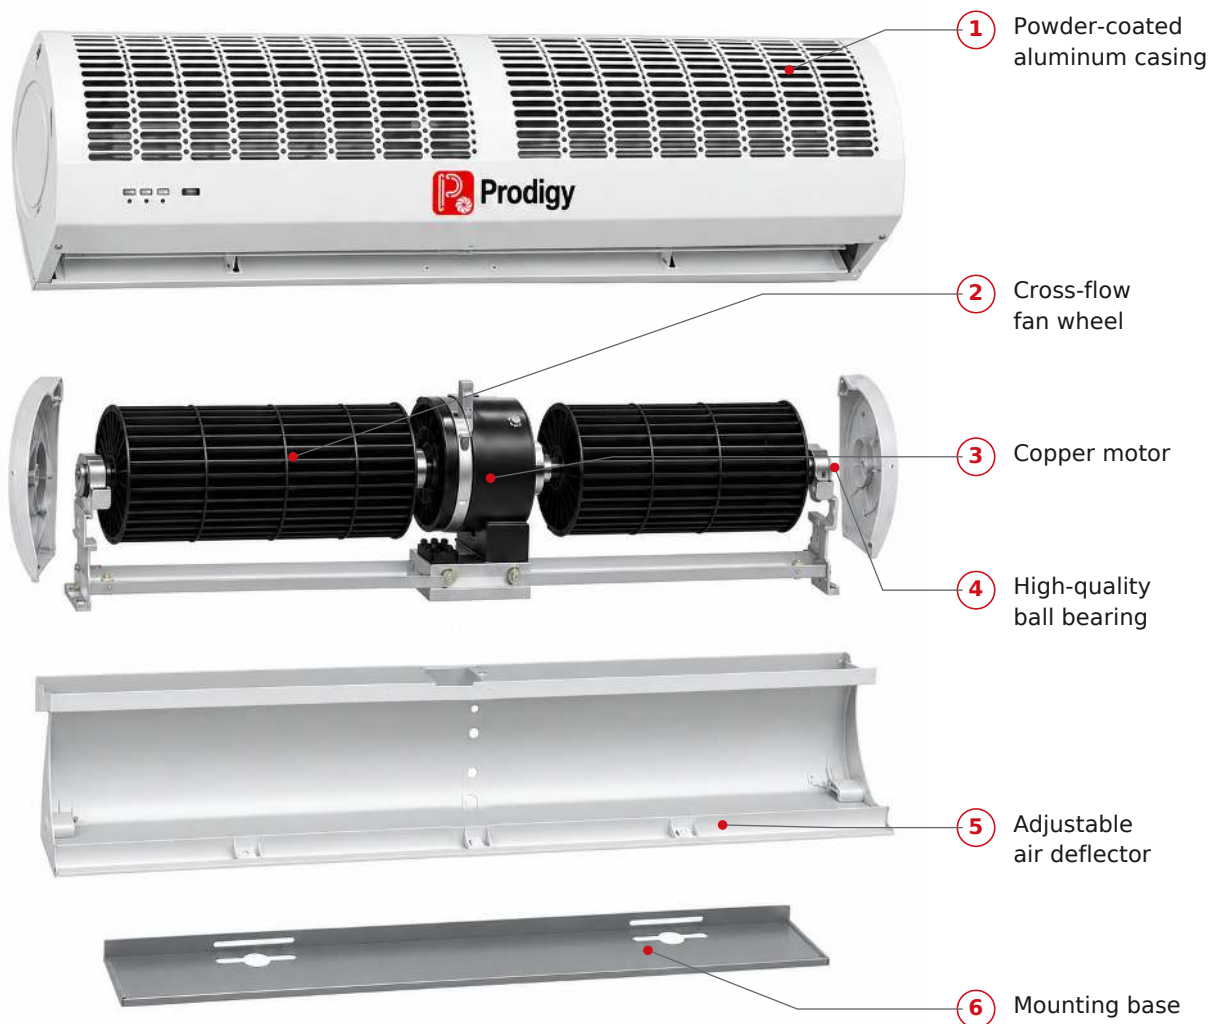

CONSTRUCTION NOTES

Airflow assembly

The multi-blade cross-flow wheel distributes discharge across the outlet. Ball bearings support smooth, low-noise operation.

Installation

The mounting base supports horizontal installation above the doorway; the deflector sets the discharge direction.

Illustrative construction concept. D and Q Series share the basic airflow and motor arrangement; external profiles differ.



D & Q SERIES


OPERATION, PERFORMANCE & APPLICATIONS

AIR CURTAIN PRINCIPLE

A downward air stream helps separate environments, retain conditioned air and support indoor comfort.

OUTDOOR

Heat
Cold air
Dust
Smoke / odour
Unconditioned air

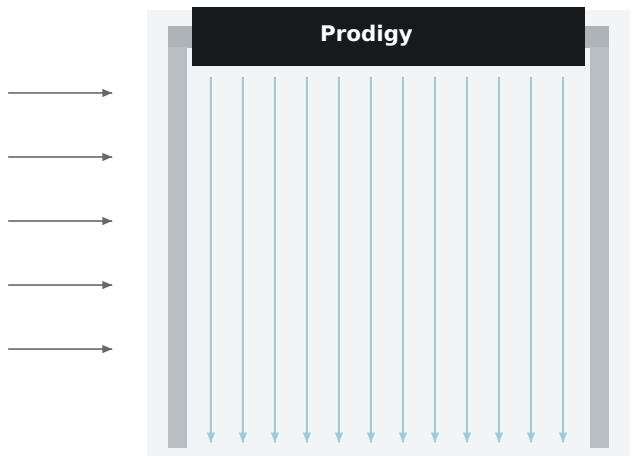

INDOOR

Conditioned air retained
Cleaner indoor environment
Improved comfort

CONTROL OPTIONS

01 Manual switch

I / O / II speed selection

02 Remote control

Wireless on/off and speed

03 Door sensor - optional

Opens: start. Closes: stop.

Availability depends on model configuration.

PERFORMANCE HIGHLIGHTS

Two-speed

High / low operation

11 m/s

Maximum air velocity

4800 m³/h

D Series maximum airflow

4000 m³/h

Q Series maximum airflow

APPLICATIONS



Shopping mall



Hospital



Hotel



Supermarket



Restaurant




Warehouse



D & Q SERIES

DIMENSIONS & INSTALLATION

D SERIES - INSTALLATION DIMENSIONS

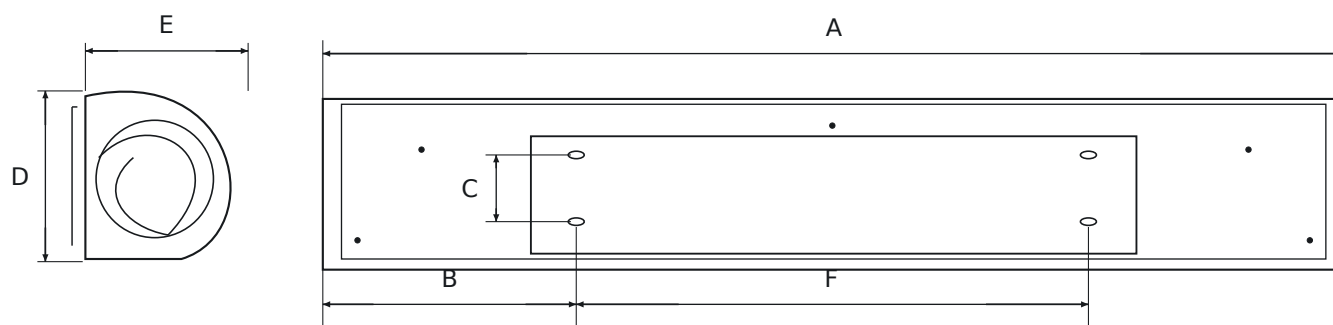

Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
AC-D900	900	226	60	185	175	448
AC-D1200	1200	225	60	185	175	750
AC-D1500	1500	375	60	185	175	750
AC-D1800	1800	297	60	185	175	1206
AC-D2000	2000	397	60	185	175	1206

Q SERIES - OVERALL UNIT SIZE

Model No.	Unit size (mm)
AC-Q600	600 × 150 × 185
AC-Q900	900 × 150 × 185
AC-Q1000	1000 × 150 × 185
AC-Q1200	1200 × 150 × 185
AC-Q1500	1500 × 150 × 185
AC-Q1800	1800 × 150 × 185
AC-Q2000	2000 × 150 × 185

INSTALLATION GUIDELINES

- 01** Install horizontally above the entrance.
- 02** Recommended mounting height: 2.5-3.0 m.
- 03** Unit width $\geq$ door opening width.
- 04** Gap between adjacent units $\leq$ 150 mm.
- 05** Position discharge close to the opening.



D & Q SERIES

TECHNICAL SPECIFICATIONS

COMMON RATINGS - ALL MODELS

Voltage

220-240 V

Frequency

50/60 Hz

Air velocity H/L

11 / 9 m/s

H = High speed / L = Low speed

D SERIES - TECHNICAL PARAMETERS

Model No.	Power (W)	Air volume H/L (m³/h)	Noise (dB)	Net wt. (kg)	Gross wt. (kg)	Carton size (mm)
AC-D900	115	1400 / 1100	49	8.2	8.8	950×230×250
AC-D1200	120	2000 / 1800	50	10.5	11.0	1250×230×250
AC-D1500	150	2800 / 2200	51	12.5	13.3	1550×230×250
AC-D1800	210	3600 / 2900	52	14.5	15.5	1850×230×250
AC-D2000	210	4800 / 3800	53	15.8	16.8	2050×230×250

Q SERIES - TECHNICAL PARAMETERS

Model No.	Power (W)	Air volume H/L (m³/h)	Noise (dB)	Net wt. (kg)	Gross wt. (kg)	Carton size (mm)
AC-Q600	95	900 / 700	49	5.0	5.6	650×190×235
AC-Q900	134	1400 / 1100	50	6.6	7.5	950×190×235
AC-Q1000	140	1700 / 1400	51	7.0	7.8	1050×190×235
AC-Q1200	151	2000 / 1800	51	8.4	9.2	1250×190×235
AC-Q1500	177	2800 / 2200	52	9.8	10.8	1550×190×235
AC-Q1800	293	3600 / 2900	53	10.8	11.8	1850×190×235
AC-Q2000	298	4000 / 3200	54	11.6	12.6	2050×190×235

SELECTION NOTES

Mounting height: 2.5-3.0 m. Select width for the actual opening and site conditions. Unit dimensions: page 4.



D & Q SERIES

ELECTRICAL, MAINTENANCE & SAFETY

SUPPLY

220-240 V~

FREQUENCY

50/60 Hz

PROTECTION

Class I

OPERATION

Two-speed


TYPICAL CONTROL / WIRING CONFIGURATIONS

Use the diagram supplied with the actual model for final connection.

01

Manual switch


Mechanical I / O / II control

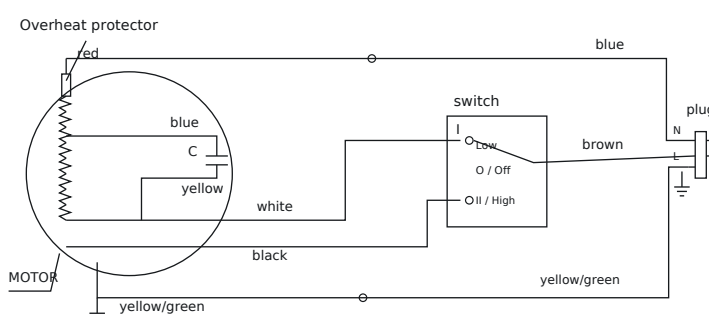

02

Remote control


Electronic / remote control

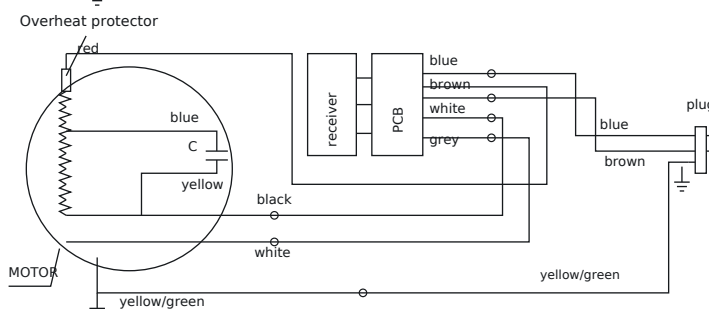

03

Magnetic door switch

Optional door-sensor control

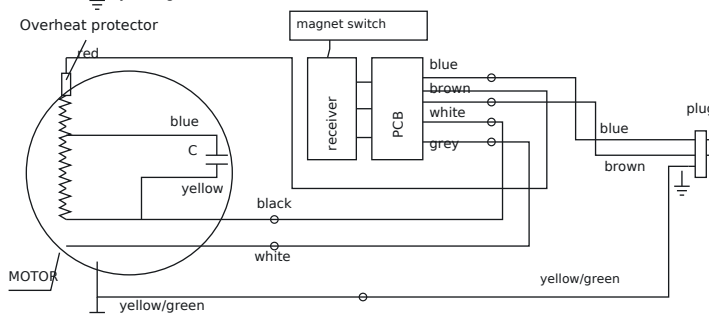

MAINTENANCE & SAFETY

Routine maintenance

Disconnect supply before service. Clean the intake grille and blower wheel periodically. Inspect motor, wiring and mounting points. Electrical service by qualified personnel.

Safe installation

Indoor fixed installation. Keep discharge clear and maintain mounting height. Protect wiring from sharp edges and moving parts. Green/yellow conductors are for protective earth.

MANUFACTURER TEST REFERENCES

IEC 60335-2-80 / IEC 60335-1; EN 60335-2-80 / EN 60335-1 / EN 62233.
IECEE CB Scheme and EU Low Voltage Directive test documentation.