



BS SERIES – BOX-TYPE INLINE DUCT FANS



BS Series Box-Type Inline Duct Fan



Circular inlet and outlet connections

Product Description

The Prodigy BS Series Box-Type Inline Duct Fans are designed for efficient two-speed ventilation in residential and commercial applications. The fan and copper motor assembly are enclosed within a durable metal box casing, while circular inlet and outlet connections allow easy integration with round duct systems. The straight-through airflow arrangement provides reliable air delivery, simple installation and convenient maintenance.

FEATURES

1. Energy Efficient

Copper motor with ball-bearing support provides stable operation, efficient power consumption and low-noise performance.

2. Durable Metal Construction

Powder-coated metal box casing offers robust protection and improved resistance to corrosion.

3. Two-Speed & Flexible Operation

High and low operating speeds allow the fan performance to be adapted to different ventilation requirements.

4. Circular Duct Connections

Round inlet and outlet connections provide easy integration with circular duct systems.

5. Effective Air Delivery

Optimized straight-through airflow design provides stable air volume and effective air supply through ductwork.

6. Integrated Backdraft Damper


Butterfly backdraft damper at the circular connection helps reduce reverse airflow when the fan is not operating.

Applications

Suitable for offices, libraries, bedrooms, meeting rooms, villas, hotels, restaurants, retail areas and general residential or commercial ventilation applications.



CONSTRUCTION & ACOUSTIC DESIGN

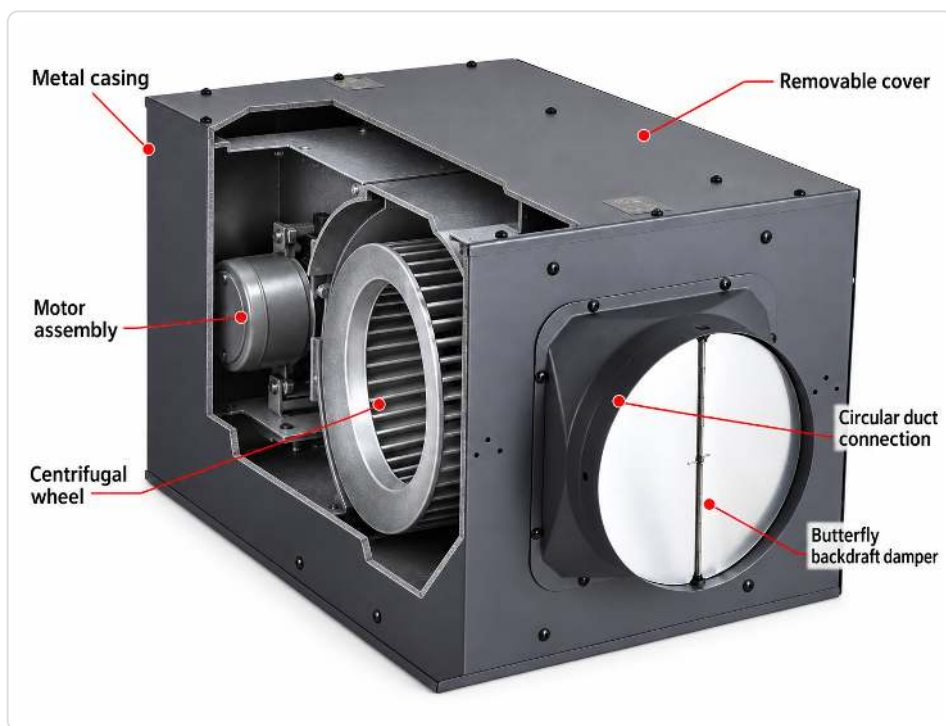

STRUCTURE

A galvanized steel centrifugal wheel guides the airflow path for efficient air delivery. The metal box casing encloses the fan and motor assembly, while the circular connection incorporates a butterfly backdraft damper to help prevent reverse airflow when the fan is off.

QUIET PERFORMANCE

120-4000

m³/h AIRFLOW RANGE

Designed to combine stable airflow with strong static-pressure capability for both compact and larger ducted ventilation applications, including longer duct runs.




CENTRIFUGAL WHEEL

Galvanized steel wheel arrangement optimizes the airflow path to support higher air volume and efficient fan performance.



COPPER MOTOR

High-efficiency copper motor is designed for stable speed and power output while helping reduce energy consumption.

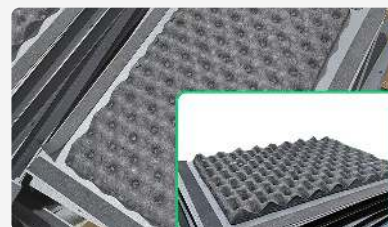

ACOUSTIC FABRIC

Soft, porous sound-absorbing lining helps attenuate vibration and airflow noise inside the casing for quieter operation.

Construction image is illustrative. Final internal details may vary by model.



Performance Parameters

H = High Speed / L = Low Speed. Performance ratings: 220 V / 50 Hz.

Model No.	Speed	Voltage / Frequency (V / Hz)	Power (W)	Airflow (m³/h)	Pressure (Pa)	Noise (dB)
BS-100M-120	H	220 / 50	22	120	120	20
	L		21	80	100	18
BS-100M-200	H	220 / 50	30	200	160	23
	L		24	150	110	20
BS-150M-360	H	220 / 50	68	360	160	27
	L		62	250	120	23
BS-150M-500	H	220 / 50	90	500	190	29
	L		78	400	165	27
BS-200M-770	H	220 / 50	116	770	210	35
	L		104	600	-	29
BS-200M-920	H	220 / 50	184	920	260	37
	L		161	800	220	35
BS-200M-1500	H	220 / 50	299	1500	380	43
	L		285	1200	340	39
BS-250M-1900	H	220 / 50	403	1900	430	45
	L		311	1700	420	43
BS-250M-2300	H	220 / 50	460	2300	490	46
	L		391	2100	480	45
BS-250M-2600	H	220 / 50	598	2600	530	47
	L		506	2400	510	45
BS-300M-4000	H	220 / 50	644	4000	550	49
	L		518	3200	470	47


Selection Notes

Airflow and pressure are separate ratings and do not represent a simultaneous duty point. Select the fan against the required airflow and system pressure.



DIMENSIONS (mm)

For BS-100M / BS-150M / BS-200M / BS-250M / BS-300M models

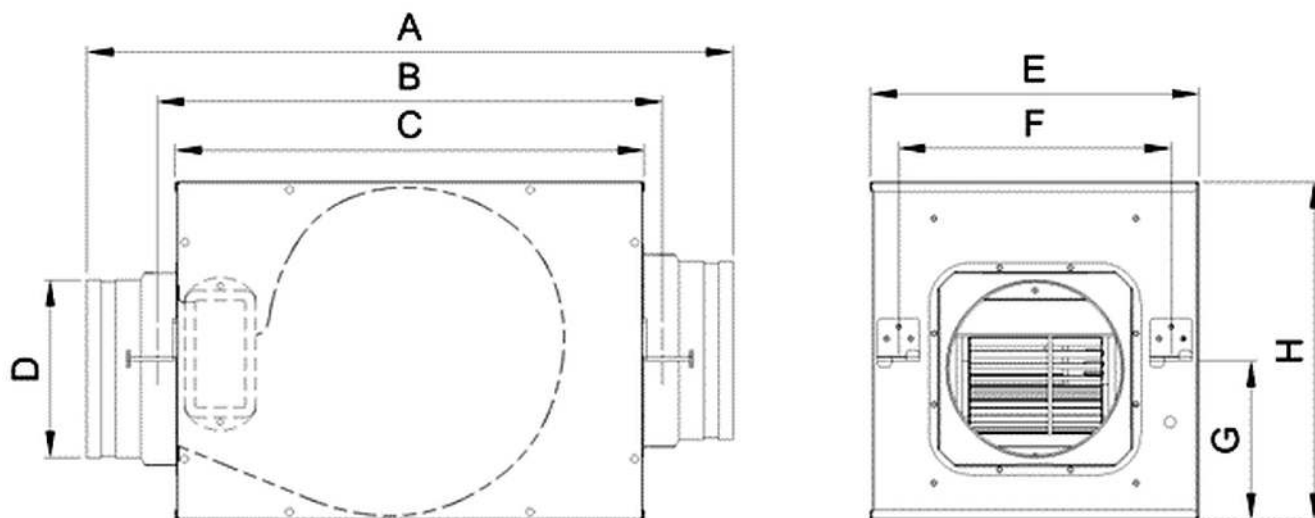

Model No.	A	B	C	ØD	E	F	G	H
BS-100M-120	461	386	340	95	241	200	92	201
BS-100M-200	461	386	340	95	241	200	92	201
BS-150M-360	537	436	390	147	273	232	112	241
BS-150M-500	537	436	390	147	273	232	132	241
BS-200M-770	559	466	420	197	343	302	213	281
BS-200M-920	629	536	490	197	371	331	152	281
BS-200M-1500	659	566	520	197	401	360	175	320
BS-250M-1900	758	641	595	247	405	364	183	366
BS-250M-2300	758	641	595	247	405	364	183	382
BS-250M-2600	758	641	595	247	405	364	183	382
BS-300M-4000	687	602	560	300	551	475	183	486

All dimensions in mm. Outline views are not to scale.


ØD is the actual connection diameter. Nominal duct sizes are listed in the model range.




PERFORMANCE CURVES

Airflow / static-pressure characteristics for BS Series models.

CURVE GROUP 1

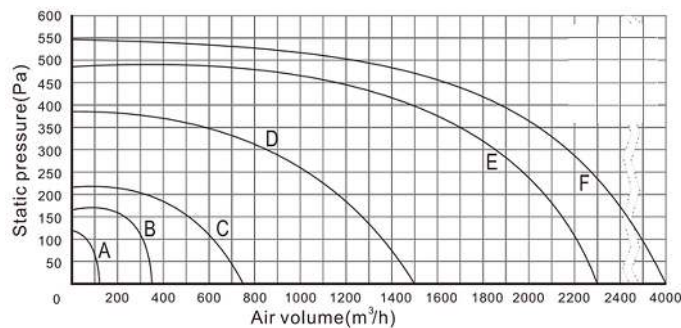

CURVE GROUP 2

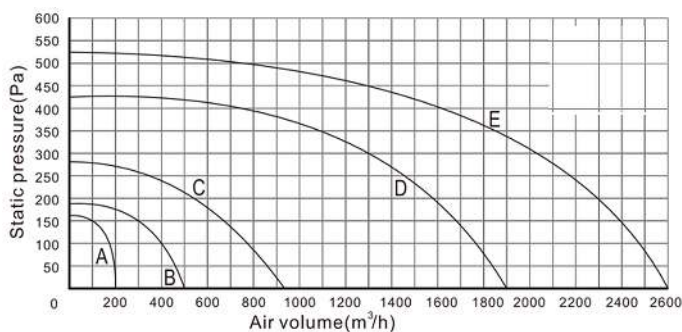

Prodigy Model No.	Curve Group	Curve
BS-100M-120	Group 1	A
BS-100M-200	Group 2	A
BS-150M-360	Group 1	B
BS-150M-500	Group 2	B
BS-200M-770	Group 1	C
BS-200M-920	Group 2	C
BS-200M-1500	Group 1	D
BS-250M-1900	Group 2	D
BS-250M-2300	Group 1	E
BS-250M-2600	Group 2	E
BS-300M-4000	Group 1	F

Curve references are aligned with the model performance ratings listed on page 3.

Curve Group 1 uses a broken airflow scale after 2400 m³/h; read the printed axis values when reviewing the curve.


Select the fan against the required airflow and system pressure.



WIRING INSTRUCTION

Two-Speed Motor Wiring

Connect the motor leads according to the wire colours and terminal designations shown below.

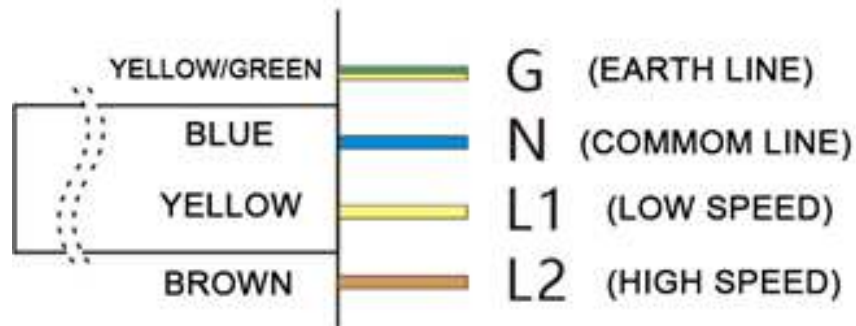

Note: L1 and L2 cannot be connected in parallel

Wire Identification

Wire Colour	Terminal	Function
Yellow / Green	G	Earth line
Blue	N	Common line
Yellow	L1	Low speed
Brown	L2	High speed

IMPORTANT L1 and L2 cannot be connected in parallel. Select only one speed input at a time.

Connection Instructions

1. Isolate the electrical supply before wiring or servicing the fan.
2. Connect Yellow / Green to G (earth) and Blue to N (common).
3. For LOW speed, connect the live supply to L1 (Yellow).
4. For HIGH speed, connect the live supply to L2 (Brown).
5. Do not connect L1 and L2 together or energize both speed inputs at the same time.
6. Verify the unit wiring label and rated voltage / frequency before energizing.
7. Electrical installation must be carried out by a qualified electrician.