




Project*

First Saved	Monday, January 5, 2026
Last Saved	Monday, January 5, 2026
Product Version	2023 R1
Save Project Before Solution	No
Save Project After Solution	No

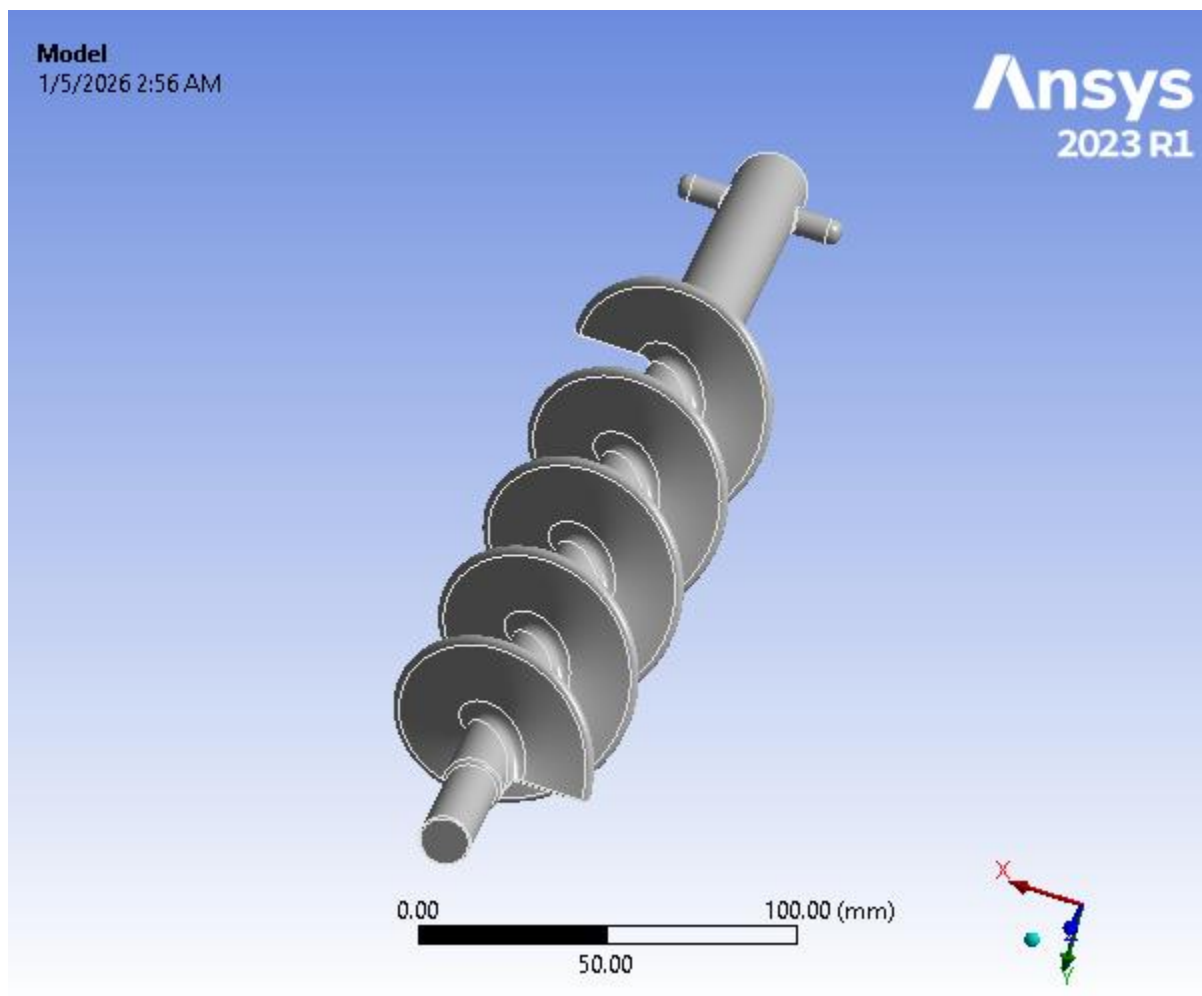

Contents

- [Units](#)
- [Model \(A4\)](#)
 - [Geometry Imports](#)
 - [Geometry Import \(A3\)](#)
 - [Geometry](#)
 - [Auger](#)
 - [Materials](#)
 - [Coordinate Systems](#)
 - [Mesh](#)
 - [Patch Independent](#)
 - [Static Structural \(A5\)](#)
 - [Analysis Settings](#)
 - [Loads](#)
 - [Solution \(A6\)](#)
 - [Solution Information](#)
 - [Results](#)
 - [Stress Tool](#)
 - [Safety Factor](#)
 - [Chart](#)
- [Material Data](#)
 - [Stainless Steel](#)

Units

TABLE 1

Unit System	Metric (mm, kg, N, s, mV, mA) Degrees rad/s Celsius
Angle	Degrees
Rotational Velocity	rad/s
Temperature	Celsius

Model (A4)

TABLE 2

Model (A4) > Geometry Imports

Object Name	<i>Geometry Imports</i>
State	Solved

TABLE 3

Model (A4) > Geometry Imports > Geometry Import (A3)

Object Name	<i>Geometry Import (A3)</i>
State	Solved
Definition	
Source	C:\Users\user1\Desktop\VFFS\Auger.SLDprt
Type	SOLIDWORKS
Basic Geometry Options	

Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	No
Parameters	Independent
Parameter Key	ANS;DS
Attributes	No
Named Selections	No
Material Properties	No
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	No
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

Geometry

TABLE 4
Model (A4) > Geometry

Object Name	<i>Geometry</i>
State	Fully Defined
Definition	
Source	C:\Users\user1\Desktop\VFFS\Auger.SLDPRT
Type	SOLIDWORKS
Length Unit	Meters
Element Control	Program Controlled
Display Style	Body Color
Bounding Box	
Length X	62.614 mm
Length Y	62.604 mm
Length Z	441. mm
Properties	
Volume	1.4702e+005 mm ³
Mass	1.1762 kg
Scale Factor Value	1.
Statistics	
Bodies	1
Active Bodies	1
Nodes	2917486
Elements	2069702

Mesh Metric	Skewness
Min	1.2068e-003
Max	0.58098
Average	0.12096
Standard Deviation	0.10332
Update Options	
Assign Default Material	No
Basic Geometry Options	
Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	No
Parameters	Independent
Parameter Key	ANS;DS
Attributes	No
Named Selections	No
Material Properties	No
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	No
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

TABLE 5
Model (A4) > Geometry > Parts

Object Name	<i>Auger</i>
State	Meshed
Graphics Properties	
Visible	Yes
Transparency	1
Definition	
Suppressed	No
Stiffness Behavior	Flexible
Coordinate System	Default Coordinate System
Reference Temperature	By Environment
Treatment	None
Material	
Assignment	Stainless Steel
Nonlinear Effects	Yes
Thermal Strain Effects	Yes
Bounding Box	

Length X	62.614 mm
Length Y	62.604 mm
Length Z	441. mm
Properties	
Volume	1.4702e+005 mm ³
Mass	1.1762 kg
Centroid X	-1.9829e-004 mm
Centroid Y	-0.46815 mm
Centroid Z	95.371 mm
Moment of Inertia Ip1	16722 kg·mm ²
Moment of Inertia Ip2	16724 kg·mm ²
Moment of Inertia Ip3	204.08 kg·mm ²
Statistics	
Nodes	2917486
Elements	2069702
Mesh Metric	Skewness
Min	1.2068e-003
Max	0.58098
Average	0.12096
Standard Deviation	0.10332

TABLE 6
Model (A4) > Materials

Object Name	<i>Materials</i>
State	Fully Defined
Statistics	
Materials	2
Material Assignments	0

Coordinate Systems

TABLE 7
Model (A4) > Coordinate Systems > Coordinate System

Object Name	<i>Global Coordinate System</i>
State	Fully Defined
Definition	
Type	Cartesian
Coordinate System ID	0.
Origin	
Origin X	0. mm
Origin Y	0. mm
Origin Z	0. mm
Directional Vectors	
X Axis Data	[1. 0. 0.]
Y Axis Data	[0. 1. 0.]
Z Axis Data	[0. 0. 1.]

Mesh

TABLE 8
Model (A4) > Mesh


Object Name	<i>Mesh</i>
State	Solved
Display	
Display Style	Use Geometry Setting
Defaults	
Physics Preference	Mechanical
Element Order	Program Controlled
Element Size	1.0 mm
Sizing	
Use Adaptive Sizing	Yes
Resolution	7
Mesh Defeaturing	Yes
Defeature Size	5. mm
Transition	Slow
Span Angle Center	Fine
Initial Size Seed	Assembly
Bounding Box Diagonal	449.8 mm
Average Surface Area	1313.7 mm ²
Minimum Edge Length	6.2658e-002 mm
Quality	
Check Mesh Quality	Yes, Errors
Error Limits	Aggressive Mechanical
Target Element Quality	Default (5.e-002)
Smoothing	High
Mesh Metric	Skewness
Min	1.2068e-003
Max	0.58098
Average	0.12096
Standard Deviation	0.10332
Inflation	
Use Automatic Inflation	None
Inflation Option	Smooth Transition
Transition Ratio	0.272
Maximum Layers	5
Growth Rate	1.2
Inflation Algorithm	Pre
View Advanced Options	No
Advanced	
Number of CPUs for Parallel Part Meshing	Program Controlled
Straight Sided Elements	No
Rigid Body Behavior	Dimensionally Reduced
Triangle Surface Mesher	Program Controlled
Topology Checking	Yes
Pinch Tolerance	Please Define
Generate Pinch on Refresh	No
Statistics	
Nodes	2917486

Elements	2069702
Show Detailed Statistics	No

TABLE 9
Model (A4) > Mesh > Mesh Controls

Object Name	<i>Patch Independent</i>
State	Fully Defined
Scope	
Scoping Method	Geometry Selection
Geometry	1 Body
Definition	
Suppressed	No
Method	Tetrahedrons
Algorithm	Patch Independent
Element Order	Use Global Setting
Advanced	
Defined By	Max Element Size
Max Element Size	Default (1.0 mm)
Feature Angle	30.0°
Mesh Based Defeaturing	Off
Refinement	Proximity and Curvature
Min Size Limit	1.0 mm
Num Cells Across Gap	Default
Curvature Normal Angle	Default
Smooth Transition	Off
Growth Rate	Default
Minimum Edge Length	6.2658e-002 mm
Write ICEM CFD Files	No

FIGURE 1
Model (A4) > Mesh > mesh

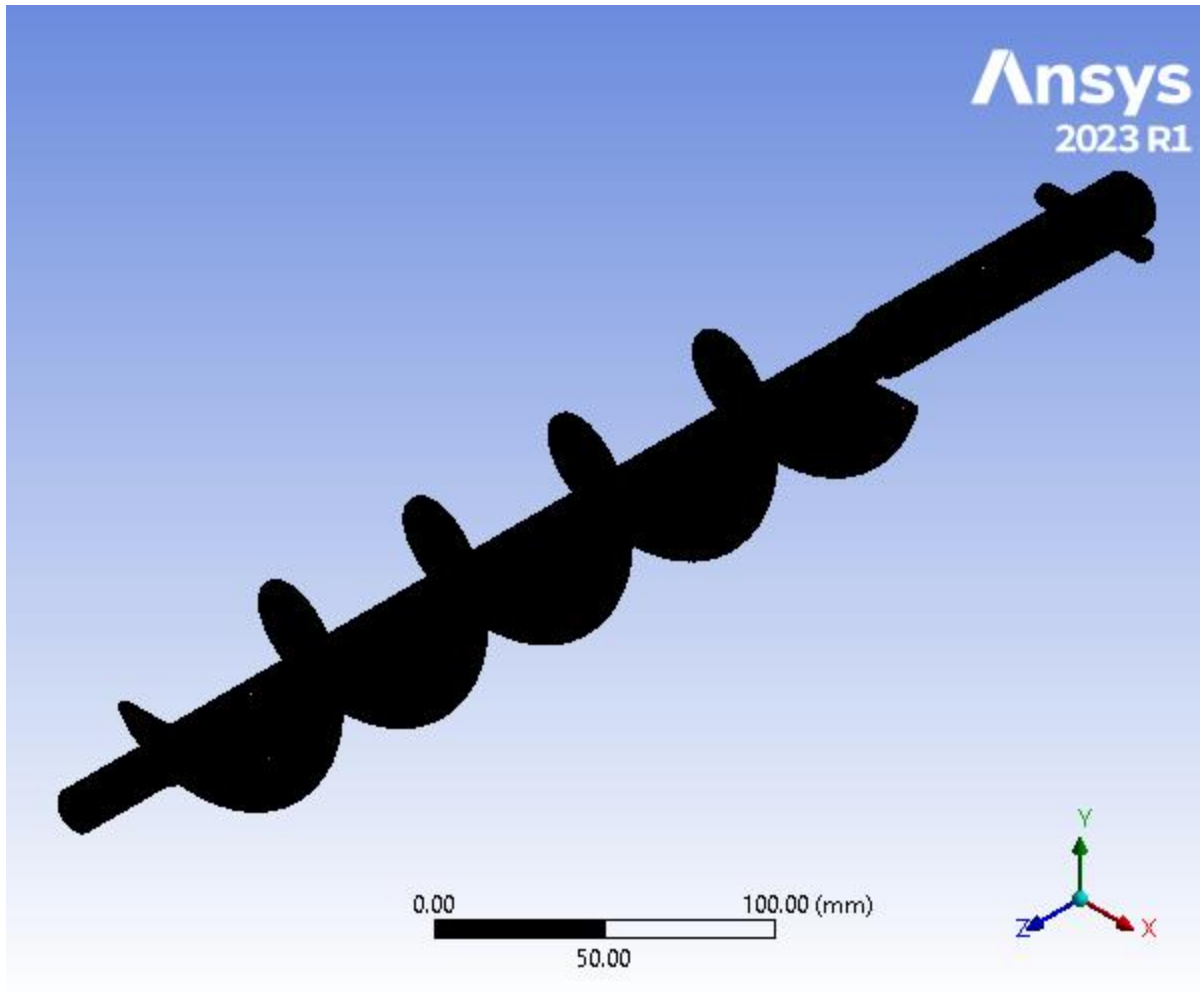

Static Structural (A5)

TABLE 10
Model (A4) > Analysis

Object Name	<i>Static Structural (A5)</i>
State	Solved
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Solver Target	Mechanical APDL
Options	
Environment Temperature	22. °C
Generate Input Only	No

TABLE 11
Model (A4) > Static Structural (A5) > Analysis Settings

Object Name	<i>Analysis Settings</i>
State	Fully Defined
Step Controls	

Number Of Steps	1.
Current Step Number	1.
Step End Time	1. s
Auto Time Stepping	Program Controlled
Solver Controls	
Solver Type	Program Controlled
Weak Springs	Off
Solver Pivot Checking	Program Controlled
Large Deflection	Off
Inertia Relief	Off
Quasi-Static Solution	Off
Rotordynamics Controls	
Coriolis Effect	Off
Restart Controls	
Generate Restart Points	Program Controlled
Retain Files After Full Solve	No
Combine Restart Files	Program Controlled
Nonlinear Controls	
Newton-Raphson Option	Program Controlled
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Stabilization	Program Controlled
Advanced	
Inverse Option	No
Contact Split (DMP)	Off
Output Controls	
Stress	Yes
Back Stress	No
Strain	Yes
Contact Data	Yes
Nonlinear Data	No
Nodal Forces	No
Volume and Energy	Yes
Euler Angles	Yes
General Miscellaneous	No
Contact Miscellaneous	No
Store Results At	All Time Points
Result File Compression	Program Controlled
Analysis Data Management	
Solver Files Directory	C:\Users\user1\Desktop\VFFS\auger ansys_files\dp0\SYS\MECH\
Future Analysis	None
Scratch Solver Files Directory	
Save MAPDL db	No
Contact Summary	Program Controlled
Delete Unneeded Files	Yes

Nonlinear Solution	No
Solver Units	Active System
Solver Unit System	nmm

TABLE 12
Model (A4) > Static Structural (A5) > Loads

Object Name	Moment	Fixed Support
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Geometry	3 Faces	2 Faces
Definition		
Type	Moment	Fixed Support
Define By	Components	
Coordinate System	Global Coordinate System	
X Component	0. N·mm (ramped)	
Y Component	0. N·mm (ramped)	
Z Component	19000 N·mm (ramped)	
Suppressed	No	
Behavior	Deformable	
Advanced		
Pinball Region	All	

FIGURE 2
Model (A4) > Static Structural (A5) > Moment


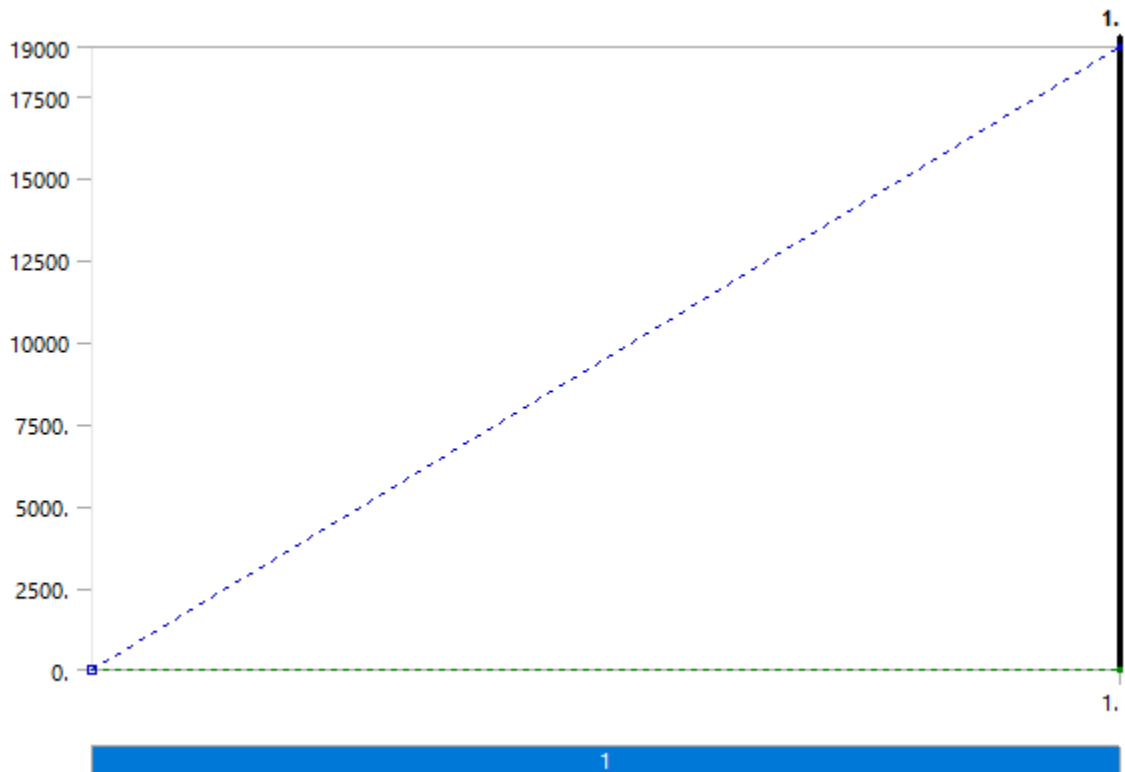


FIGURE 3
Model (A4) > Static Structural (A5) > Moment > moment

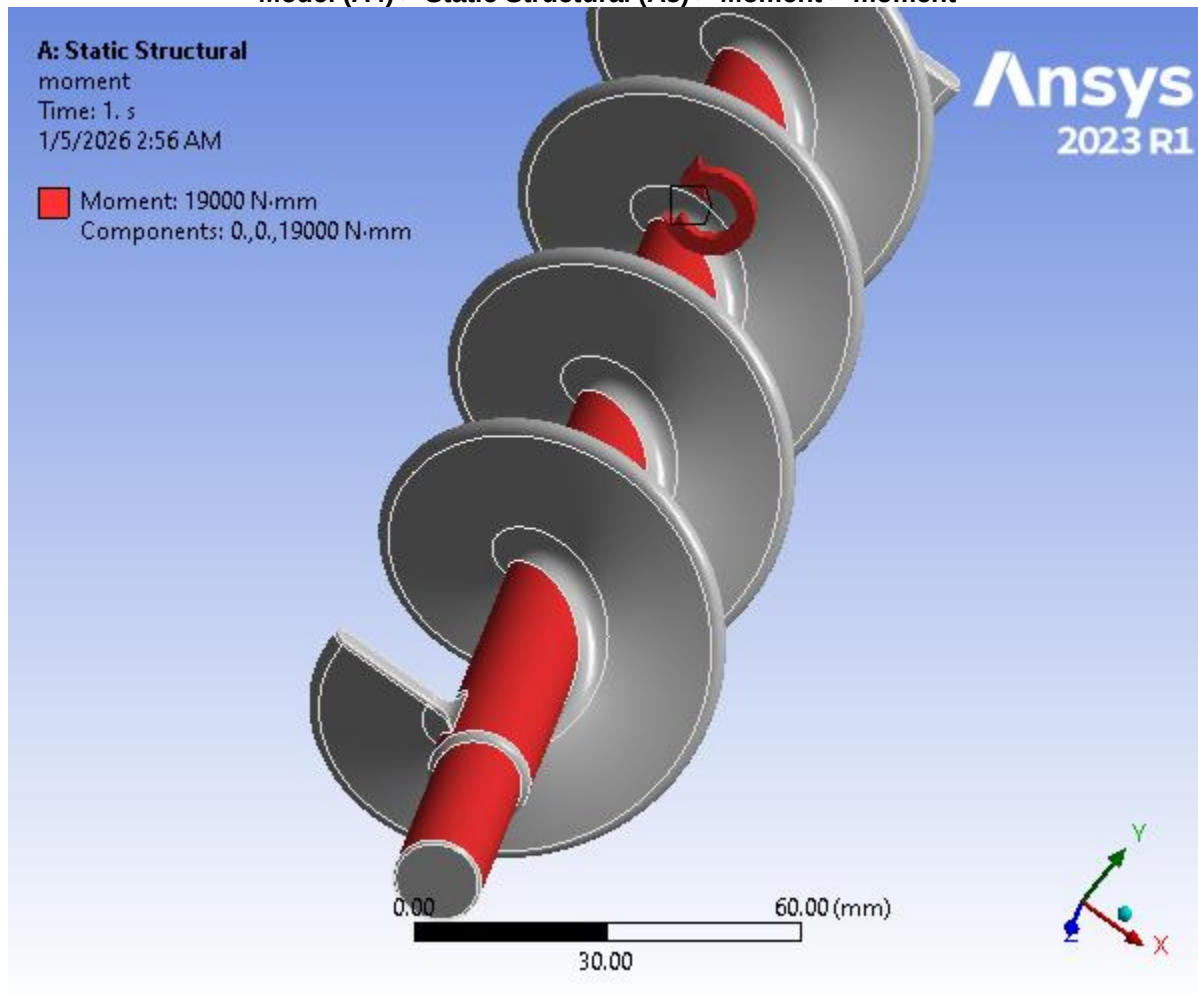

Solution (A6)

TABLE 13
Model (A4) > Static Structural (A5) > Solution

Object Name	<i>Solution (A6)</i>
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1.
Refinement Depth	2.
Information	
Status	Done
MAPDL Elapsed Time	11 m 0 s
MAPDL Memory Used	20.146 GB
MAPDL Result File Size	1.2305 GB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

TABLE 14
Model (A4) > Static Structural (A5) > Solution (A6) > Solution Information

Object Name	<i>Solution Information</i>
State	Solved
Solution Information	
Solution Output	Solver Output
Newton-Raphson Residuals	0
Identify Element Violations	0
Update Interval	2.5 s
Display Points	All
FE Connection Visibility	
Activate Visibility	Yes
Display	All FE Connectors
Draw Connections Attached To	All Nodes
Line Color	Connection Type
Visible on Results	No
Line Thickness	Single
Display Type	Lines

TABLE 15
Model (A4) > Static Structural (A5) > Solution (A6) > Results

Object Name	Total Deformation		Equivalent Stress	
State	Solved			
Scope				
Scoping Method	Geometry Selection			
Geometry	All Bodies			
Definition				
Type	Total Deformation	Equivalent (von-Mises) Stress		
By	Time			
Display Time	First	Last		
Separate Data by Entity	No			
Calculate Time History	Yes			
Identifier				
Suppressed	No			
Results				
Minimum	0. mm	7.6397e-005 MPa		
Maximum	9.5471e-002 mm	136.8 MPa		
Average	2.3477e-002 mm	5.1623 MPa		
Minimum Occurs On	Auger			
Maximum Occurs On	Auger			
Information				
Time	1. s			
Load Step	1			
Substep	1			
Iteration Number	1			
Integration Point Results				
Display Option			Averaged	
Average Across Bodies			No	

FIGURE 4
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

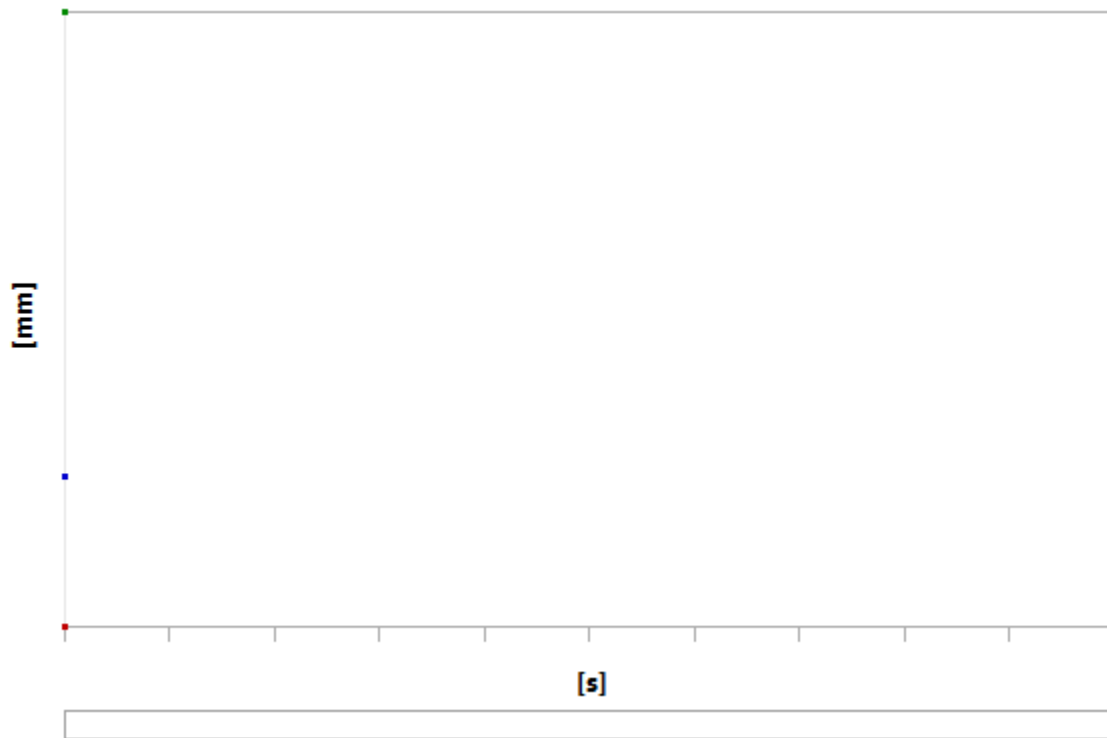


TABLE 16
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

Time [s]	Minimum [mm]	Maximum [mm]	Average [mm]
1.	0.	9.5471e-002	2.3477e-002

FIGURE 5
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation > total deformation

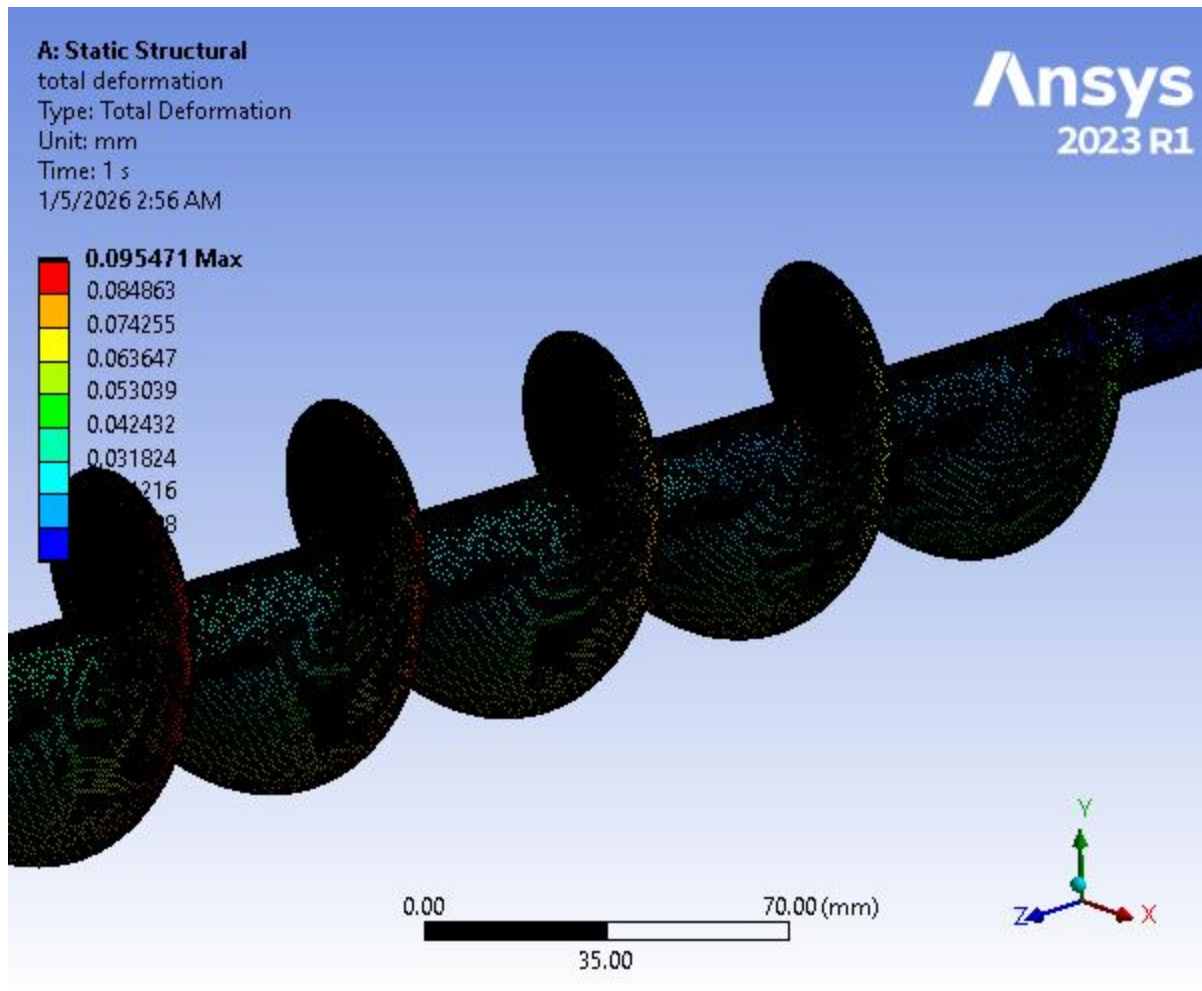


FIGURE 6
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress

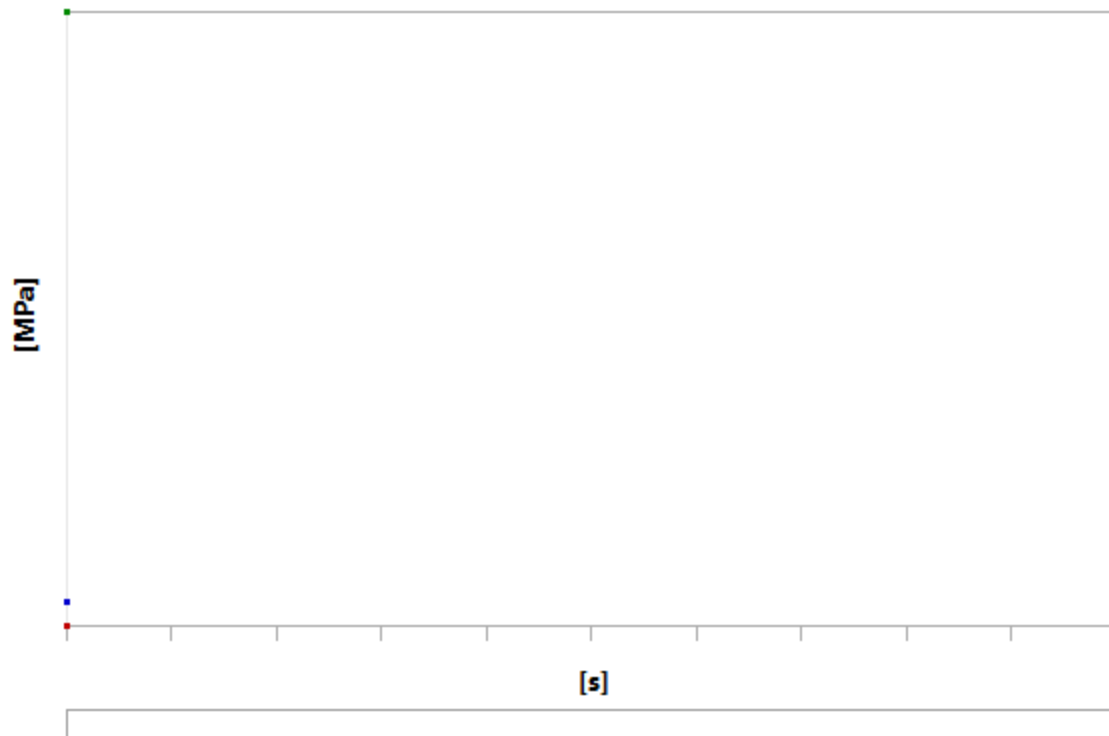


TABLE 17
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress

Time [s]	Minimum [MPa]	Maximum [MPa]	Average [MPa]
1.	7.6397e-005	136.8	5.1623

FIGURE 7
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress > equivalent stress

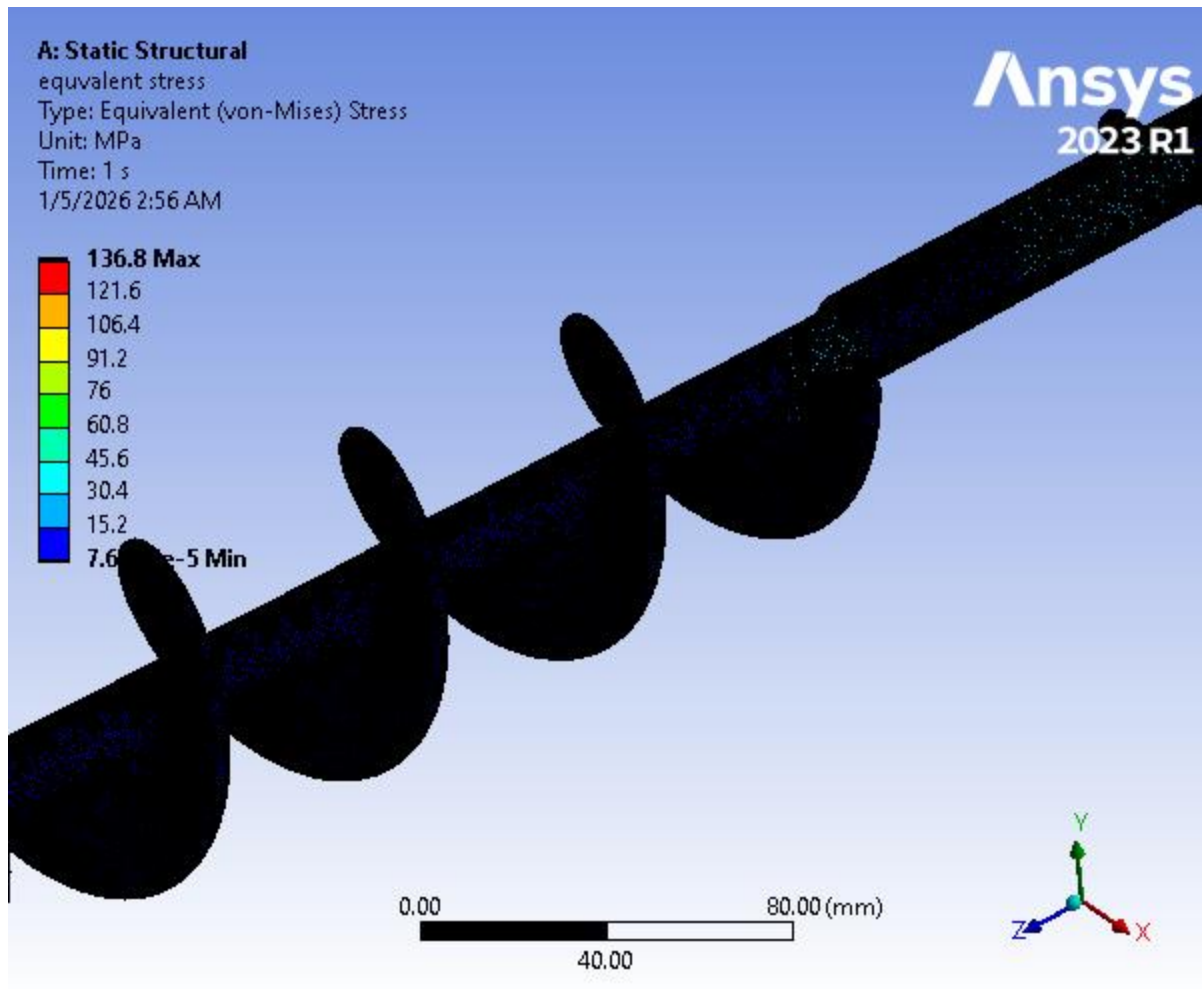


TABLE 18

Model (A4) > Static Structural (A5) > Solution (A6) > Stress Safety Tools

Object Name	<i>Stress Tool</i>
State	Solved
Definition	
Theory	Max Equivalent Stress
Stress Limit Type	Tensile Yield Per Material

TABLE 19

Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Results

Object Name	<i>Safety Factor</i>
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	
Type	Safety Factor
By	Time
Display Time	Last

Separate Data by Entity	No
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	
Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	1.5117
Minimum Occurs On	Auger
Information	
Time	1. s
Load Step	1
Substep	1
Iteration Number	1

FIGURE 8
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor





TABLE 20
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor

Time [s]	Minimum	Maximum	Average
1.	1.5117	15.	14.85

FIGURE 9
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor > static factor

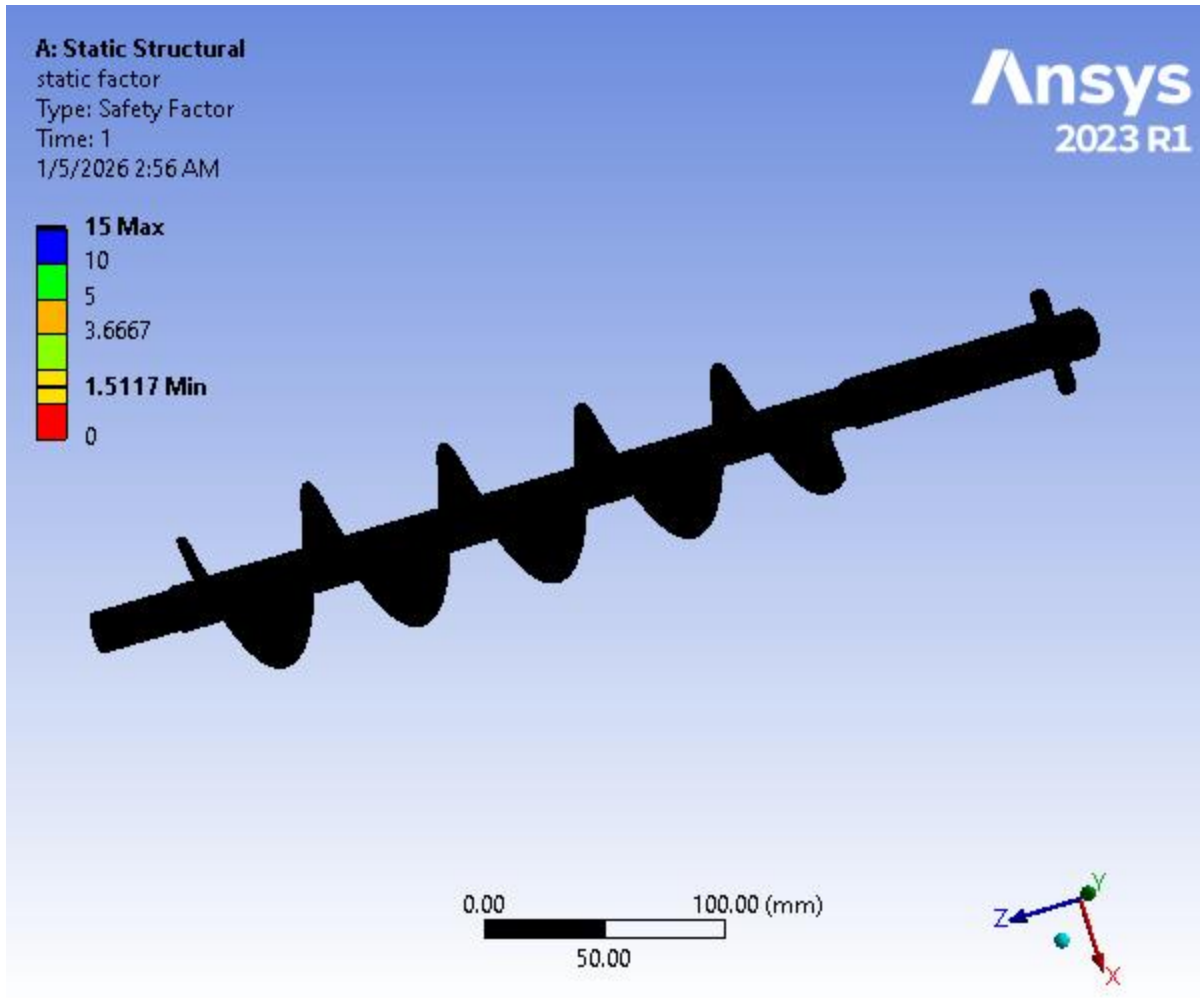

Chart

TABLE 21
Model (A4) > Chart

Steps	End Time [s]
1	1.

Material Data

Stainless Steel

TABLE 22
Stainless Steel > Constants

Density	8.e-006 kg mm ⁻³
Coefficient of Thermal Expansion	1.7e-005 C ⁻¹
Specific Heat	4.8e+005 mJ kg ⁻¹ C ⁻¹
Thermal Conductivity	1.51e-002 W mm ⁻¹ C ⁻¹
Resistivity	7.7e-004 ohm mm

TABLE 23
Stainless Steel > Color

Red	Green	Blue
176	154	176

TABLE 24
Stainless Steel > Compressive Ultimate Strength

Compressive Ultimate Strength MPa
0

TABLE 25
Stainless Steel > Compressive Yield Strength

Compressive Yield Strength MPa
207

TABLE 26
Stainless Steel > Tensile Yield Strength

Tensile Yield Strength MPa
206.8

TABLE 27
Stainless Steel > Tensile Ultimate Strength

Tensile Ultimate Strength MPa
517

TABLE 28
Stainless Steel > Isotropic Secant Coefficient of Thermal Expansion

Zero-Thermal-Strain Reference Temperature C
22

TABLE 29
Stainless Steel > Isotropic Elasticity

Young's Modulus MPa	Poisson's Ratio	Bulk Modulus MPa	Shear Modulus MPa	Temperature C
1.935e+005	0.29	1.5357e+005	75000	

TABLE 30
Stainless Steel > Isotropic Relative Permeability

Relative Permeability
1



Description
No Data

Simulation of auger and shaft


Date: Tuesday, January 6, 2026
Designer: Solidworks
Study name: auger and shaft analysis
Analysis type: Static
ENG name:Hassan Moqbel Morshed

Table of Contents

Description	1
Assumptions.....	2
Model Information	2
Study Properties.....	3
Units	3
Material Properties	4
Loads and Fixtures	4
Connector Definitions	5
Interaction Information	5
Mesh information.....	5
Sensor Details.....	5
Resultant Forces	6
Beams.....	6
Study Results	7
Conclusion.....	9

Assumptions

Model Information

 Model name: auger and shaft Current Configuration: Default			
Solid Bodies			
Document Name and Reference	Treated As	Volumetric Properties	Document Path/Date Modified
Combine1 	Solid Body	Mass:1.66362 kg Volume:0.000207953 m^3 Density:8,000.01 kg/m^3 Weight:16.3035 N	C:\Users\user1\Desktop\VFFS\auger and shaft analysis\auger and shaft.SLDPRT Jan 6 02:47:55 2026

Study Properties


Study name	auger and shaft analysis
Analysis type	Static
Mesh type	Solid Mesh
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	Automatic
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (C:\Users\user1\Desktop\VFFS\auger and shaft analysis)

Units


Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m ²




Material Properties

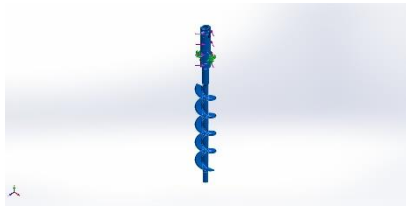Model Reference	Properties	Components
	Name: AISI 304 Model type: Linear Elastic Isotropic Default failure criterion: Max von Mises Stress Yield strength: 2.06807e+08 N/m ² Tensile strength: 5.17017e+08 N/m ² Elastic modulus: 1.9e+11 N/m ² Poisson's ratio: 0.29 Mass density: 8,000 kg/m ³ Shear modulus: 7.5e+10 N/m ² Thermal expansion coefficient: 1.8e-05 /Kelvin	SolidBody 1(Combine1)(auger and shaft)
Curve Data:N/A		

Loads and Fixtures

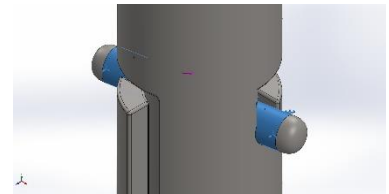Fixture name	Fixture Image	Fixture Details		
Fixed-1		Entities: 2 face(s) Type: Fixed Geometry		
Resultant Forces				
Components	X	Y	Z	Resultant
Reaction force(N)	-0.976147	-0.0241341	-0.00671291	0.976468
Reaction Moment(N.m)	0	0	0	0

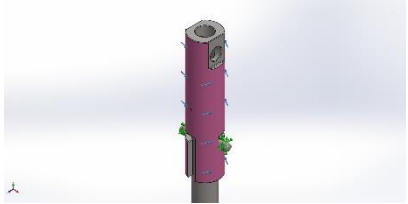Load name	Load Image	Load Details
Torque-1		Reference: Face< 1 > Type: Apply torque Value: -20 N.m



Connector Definitions

No Data

Interaction Information

No Data

Mesh information

Mesh type	Solid Mesh
Mesher Used:	Blended curvature-based mesh
Jacobian points for High quality mesh	16 Points
Maximum element size	6.22279 mm
Minimum element size	0.311139 mm
Mesh Quality	High

Mesh information - Details

Total Nodes	535005
Total Elements	351350
Maximum Aspect Ratio	64.285
% of elements with Aspect Ratio < 3	99.3
Percentage of elements with Aspect Ratio > 10	0.0111
Percentage of distorted elements	0
Time to complete mesh(hh:mm:ss):	00:00:39
Computer name:	

Sensor Details

No Data



Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	-0.976147	-0.0241341	-0.00671291	0.976468

Reaction Moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	0

Free body forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	-0.0741707	-0.142409	-0.307086	0.346531

Free body moments



Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33



Beams

No Data



Study Results

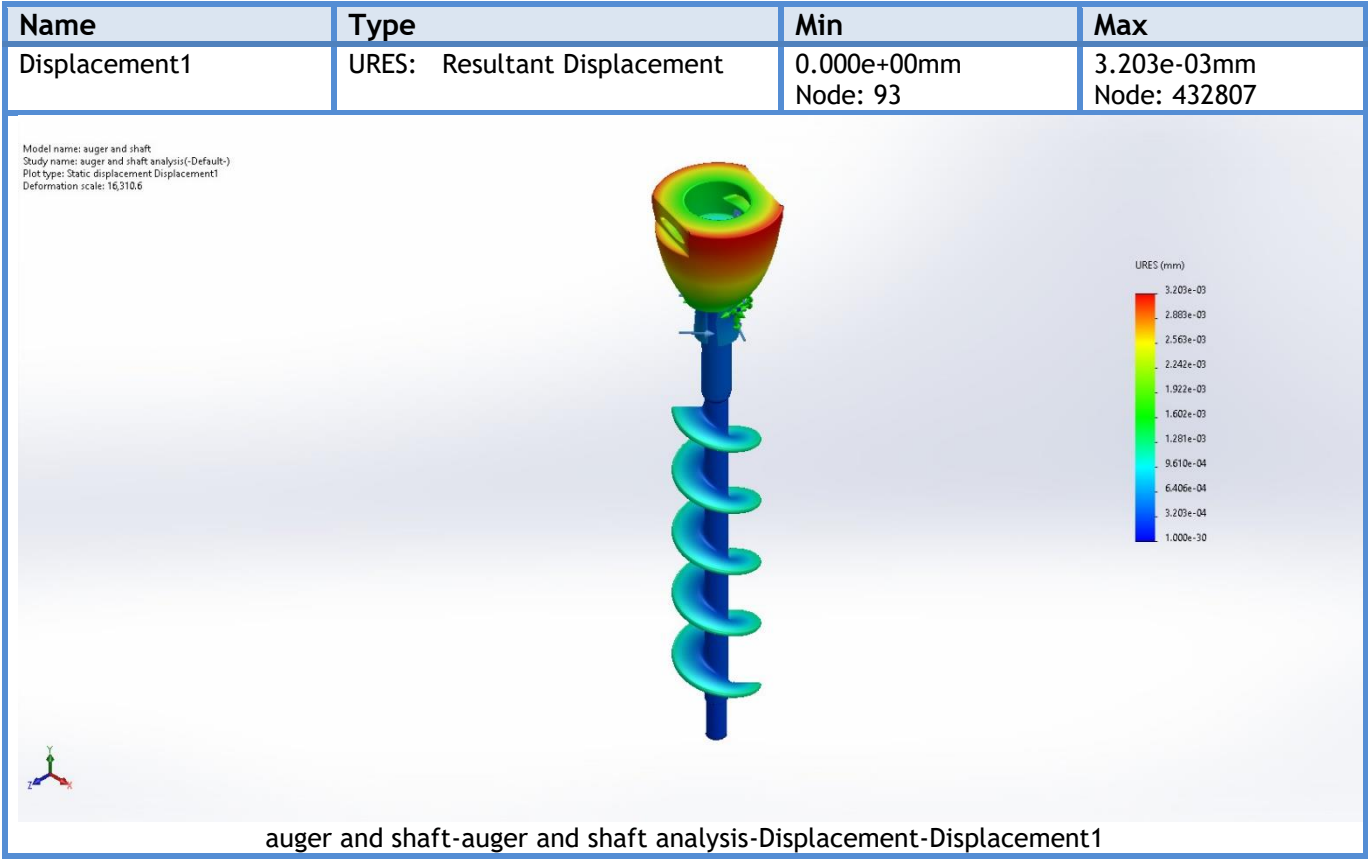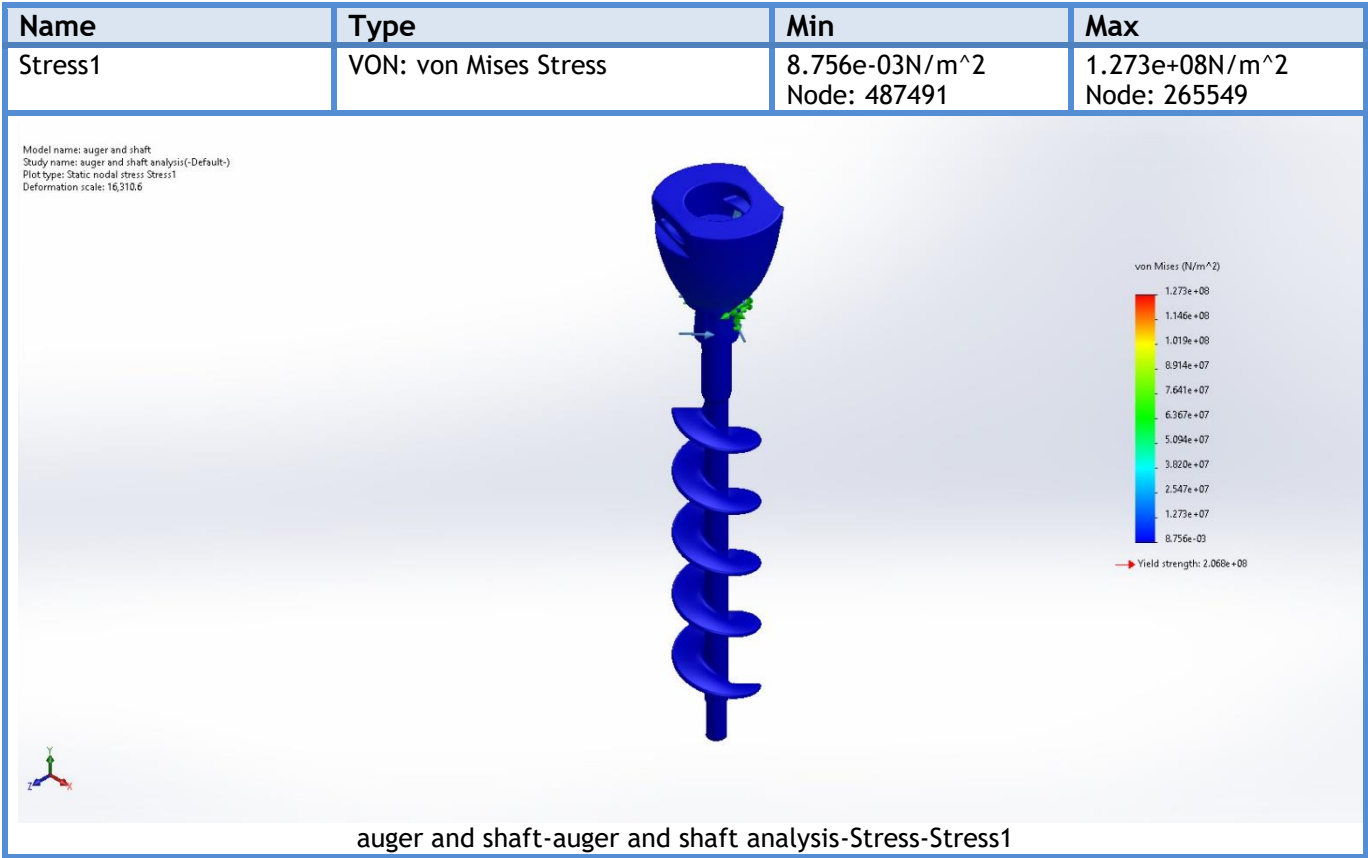

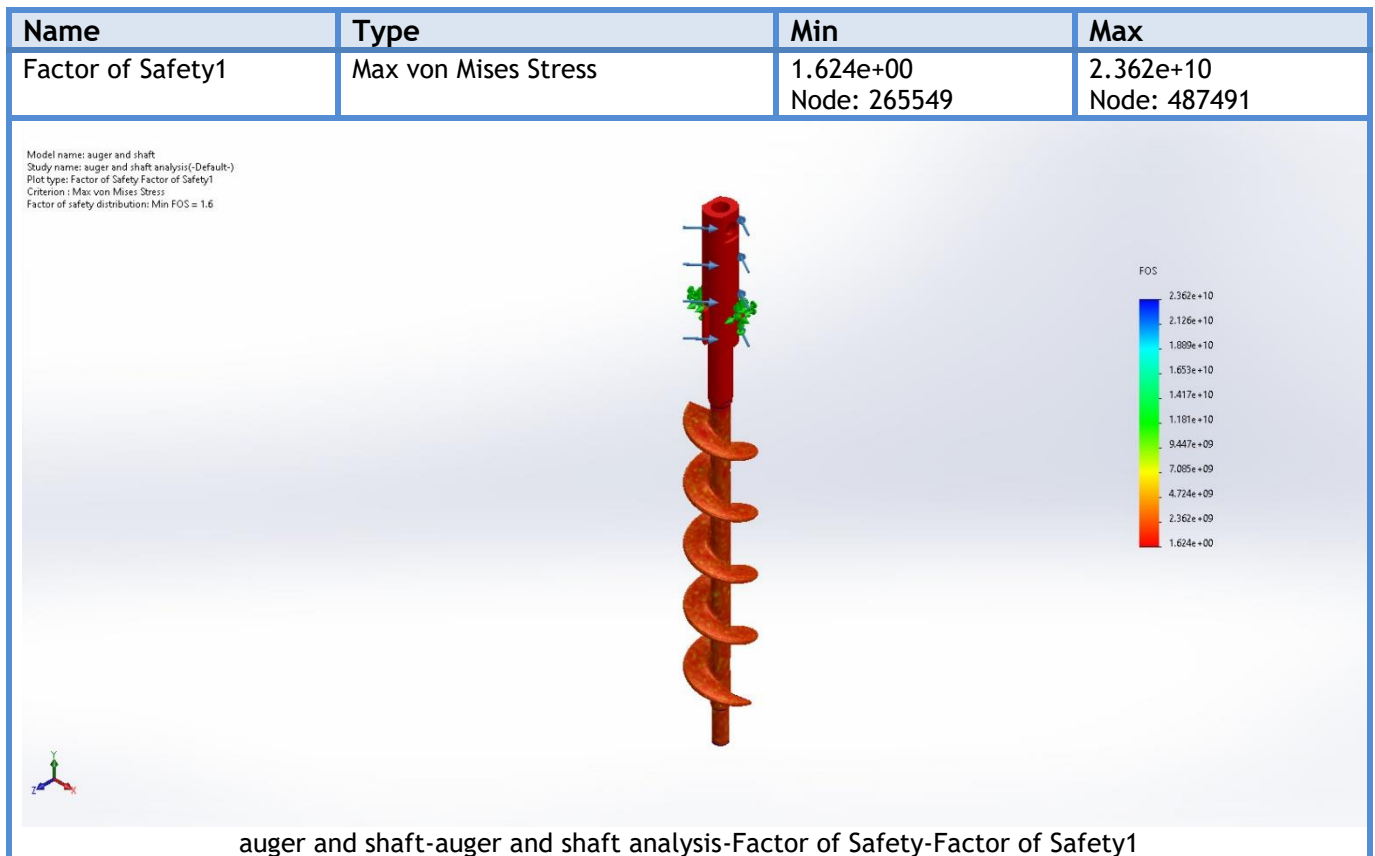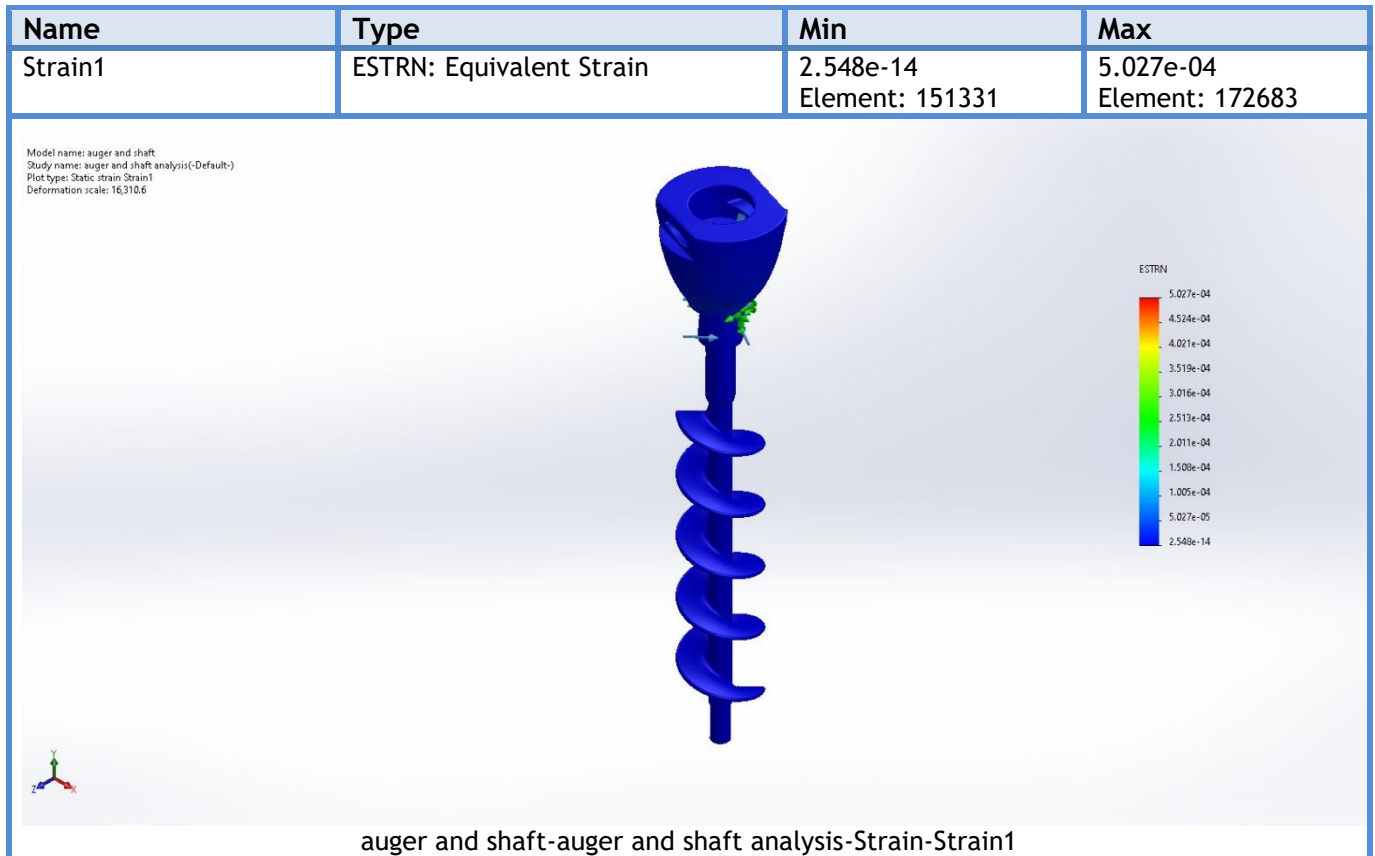

Conclusion





Description
No Data


Simulation of auger and shaft and plate

Date: Tuesday, January 6, 2026
Designer: Solidworks
Study name: auger and shaft and plate analysis
Analysis type: Static
ENG name: Hassan Moqbel


Table of Contents	
Description	1
Assumptions	2
Model Information	2
Study Properties	3
Units	3
Material Properties	4
Loads and Fixtures	4
Connector Definitions	5
Interaction Information	5
Mesh information	5
Sensor Details	5
Resultant Forces	6
Beams	6
Study Results	7
Conclusion	10

Assumptions

Model Information



Model name: auger and shaft and plate
Current Configuration: Default

Solid Bodies			
Document Name and Reference	Treated As	Volumetric Properties	Document Path/Date Modified
Combine1 	Solid Body	Mass:1.96918 kg Volume:0.000246147 m^3 Density:8,000.01 kg/m^3 Weight:19.2979 N	C:\Users\user1\Desktop\VFFS\analysis\solidworks analysis\auger and shaft and pannel\auger and shaft and plate.SLDPRT Jan 6 21:40:52 2026

Study Properties

Study name	auger and shaft and plate analysis
Analysis type	Static
Mesh type	Solid Mesh
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	Automatic
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (C:\Users\user1\Desktop\VFFS\analysis\solidworks analysis\auger and shaft and pannel)

Units


Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m ²



Material Properties

Model Reference	Properties	Components
	Name: AISI 304 Model type: Linear Elastic Isotropic Default failure criterion: Max von Mises Stress Yield strength: 2.06807e+08 N/m ² Tensile strength: 5.17017e+08 N/m ² Elastic modulus: 1.9e+11 N/m ² Poisson's ratio: 0.29 Mass density: 8,000 kg/m ³ Shear modulus: 7.5e+10 N/m ² Thermal expansion coefficient: 1.8e-05 /Kelvin	SolidBody 1(Combine1)(auger and shaft and plate)
Curve Data:N/A		

Loads and Fixtures

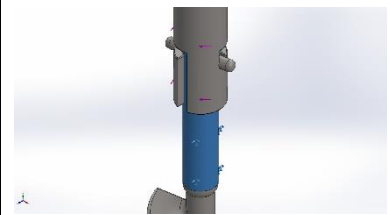Fixture name	Fixture Image	Fixture Details
Fixed-1		Entities: 1 face(s) Type: Fixed Geometry

Resultant Forces				
Components	X	Y	Z	Resultant
Reaction force(N)	0.999783	14.139	-0.000153375	14.1743
Reaction Moment(N.m)	0	0	0	0

<L_LdName/>	<Label_LoadImage/>	<Label_LoadDetails/>
<LoadName/>	<Image_Load/>	<Details_Load/>



Connector Definitions

No Data

Interaction Information

No Data

Mesh information

Mesh type	Solid Mesh
Mesher Used:	Blended curvature-based mesh
Jacobian points for High quality mesh	16 Points
Maximum element size	6.58288 mm
Minimum element size	0.329144 mm
Mesh Quality	High

Mesh information - Details

Total Nodes	570587
Total Elements	371941
Maximum Aspect Ratio	69.405
% of elements with Aspect Ratio < 3	99.2
Percentage of elements with Aspect Ratio > 10	0.0194
Percentage of distorted elements	0
Time to complete mesh(hh:mm:ss):	00:00:33
Computer name:	

Sensor Details

No Data



Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	0.999783	14.139	-0.000153375	14.1743

Reaction Moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	0

Free body forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	0.0879457	0.0406183	0.0510134	0.109484

Free body moments


Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Beams

No Data




Study Results

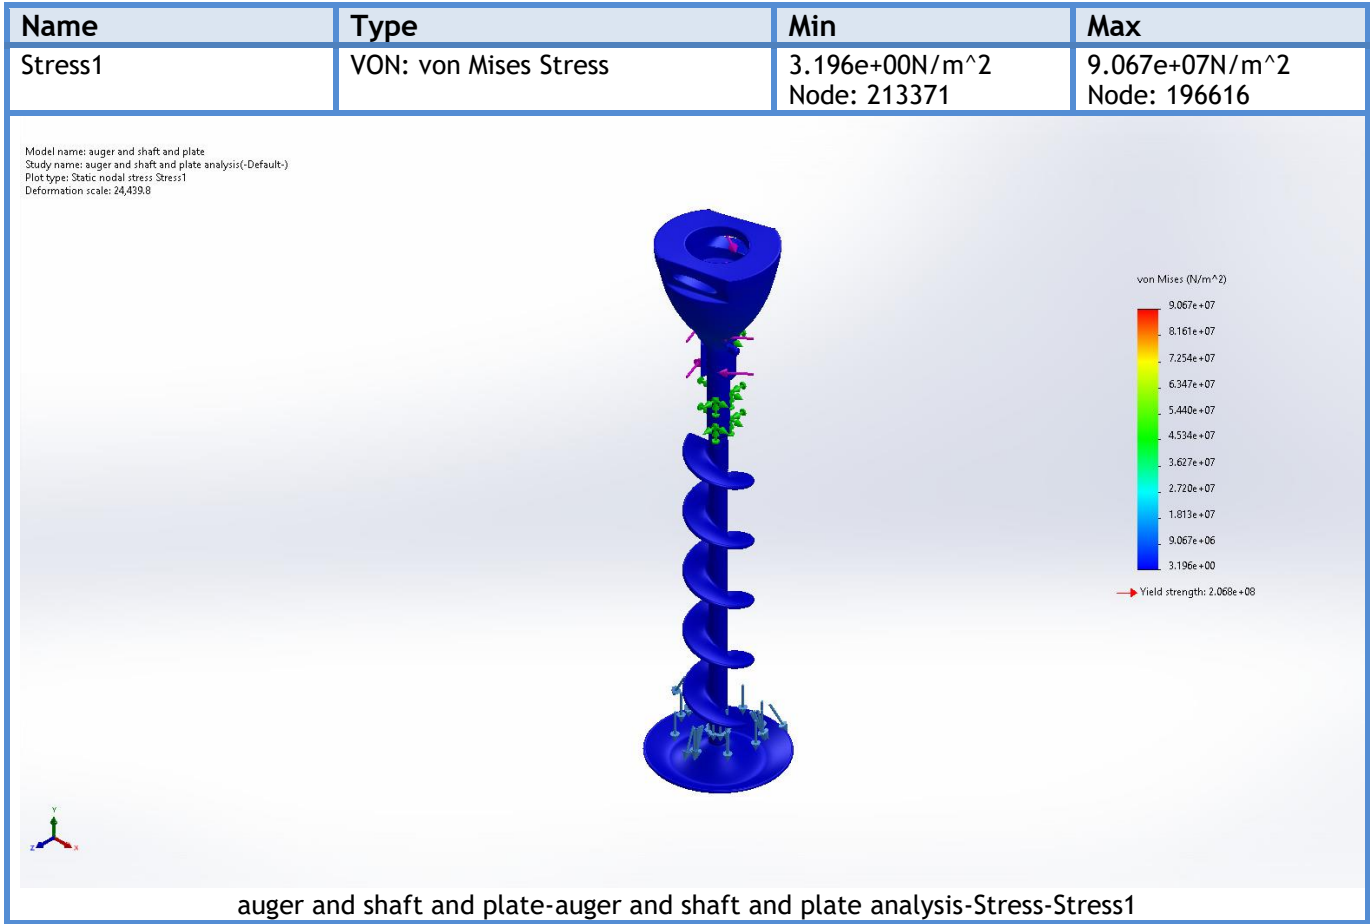

Name	Type	Min	Max
Displacement1	URES: Resultant Displacement	0.000e+00mm Node: 136	2.137e-03mm Node: 4337



Model name: auger and shaft and plate
 Study name: auger and shaft and plate analysis(-Default-)
 Plot type: Static displacement Displacement1
 Deformation scale: 24,439.8



auger and shaft and plate-auger and shaft and plate analysis-Displacement-Displacement1

Name	Type	Min	Max
Strain1	ESTRN: Equivalent Strain	9.260e-12 Element: 101310	7.580e-04 Element: 82398

Model name: auger and shaft and plate
 Study name: auger and shaft and plate analysis(-Default-)
 Plot type: Static strain Strain1
 Deformation scale: 24,439.8




auger and shaft and plate-auger and shaft and plate analysis-Strain-Strain1

Name	Type
Displacement1{1}	Deformed shape





Model name: auger and shaft and plate
 Study name: auger and shaft and plate analysis(-Default-)
 Plot type: Deformed shape Displacement1[1]
 Deformation scale: 24,439.8



auger and shaft and plate-auger and shaft and plate analysis-Displacement-Displacement1{1}

Name	Type	Min	Max
Factor of Safety1	Max von Mises Stress	2.281e+00 Node: 196616	6.471e+07 Node: 213371

Model name: auger and shaft and plate
 Study name: auger and shaft and plate analysis(-Default-)
 Plot type: Factor of Safety Factor of Safety1
 Criterion : Max von Mises Stress
 Factor of safety distribution: Min FOS = 2.3

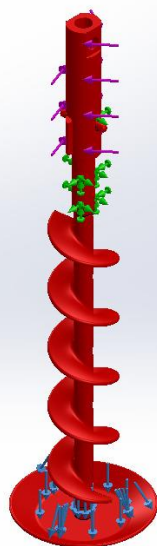

auger and shaft and plate-auger and shaft and plate analysis-Factor of Safety-Factor of Safety1



Conclusion

