




Project*

First Saved	Thursday, February 26, 2026
Last Saved	Thursday, February 26, 2026
Product Version	2023 R1
Save Project Before Solution	No
Save Project After Solution	No

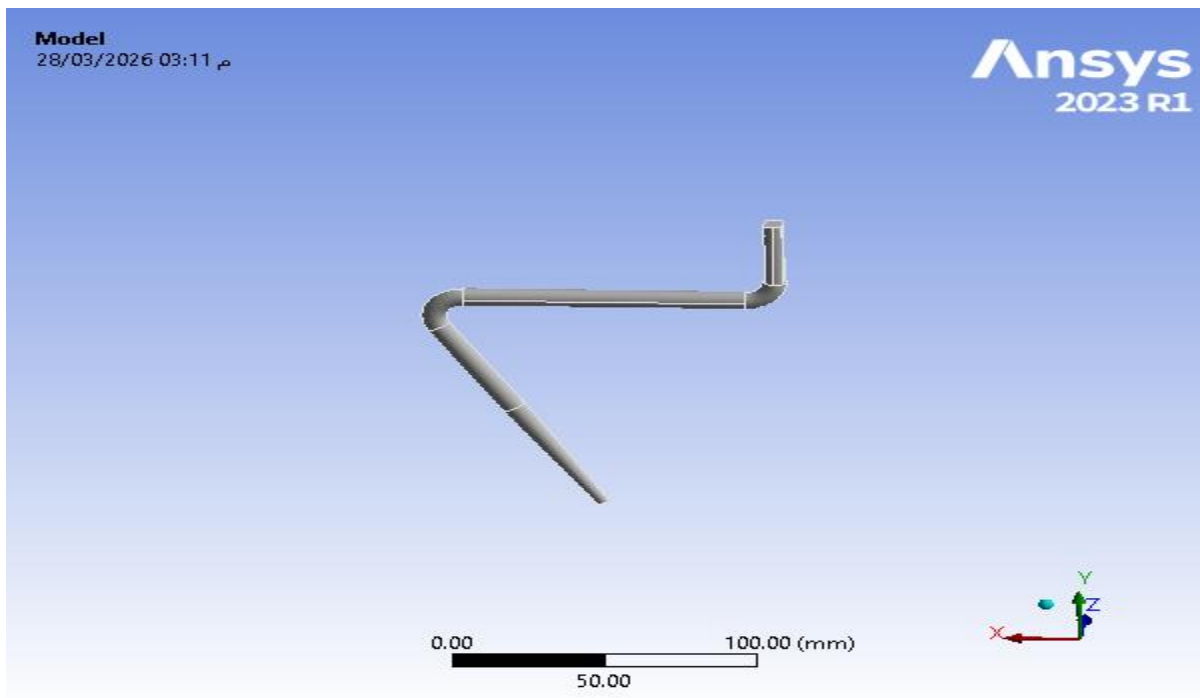

Contents

- [Units](#)
- [Model \(A4\)](#)
 - [Geometry Imports](#)
 - [Geometry Import \(A3\)](#)
 - [Geometry](#)
 - [blenderaugershortonly-FreeParts|M6 Tapped Hole1](#)
 - [Materials](#)
 - [Stainless steel, 304, annealed Assignment](#)
 - [Coordinate Systems](#)
 - [Mesh](#)
 - [Static Structural \(A5\)](#)
 - [Analysis Settings](#)
 - [Loads](#)
 - [Solution \(A6\)](#)
 - [Solution Information](#)
 - [Results](#)
 - [Stress Tool](#)
 - [Safety Factor](#)
 - [Stress Tool 2](#)
 - [Safety Factor](#)
 - [Fatigue Tool](#)
 - [Results](#)
- [Material Data](#)
 - [Stainless steel, 304, annealed](#)

Units

TABLE 1

Unit System	Metric (mm, kg, N, s, mV, mA) Degrees rad/s Celsius
Angle	Degrees
Rotational Velocity	rad/s
Temperature	Celsius

Model (A4)

TABLE 2

Model (A4) > Geometry Imports

Object Name	<i>Geometry Imports</i>
State	Solved

TABLE 3

Model (A4) > Geometry Imports > Geometry Import (A3)

Object Name	<i>Geometry Import (A3)</i>
State	Solved
Definition	
Source	C:\Users\user1\Desktop\blades\blenderaugershortonly.STEP

Type	Step
Basic Geometry Options	
Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	No
Parameters	Independent
Parameter Key	ANS;DS
Attributes	No
Named Selections	No
Material Properties	No
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	No
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

Geometry

TABLE 4
Model (A4) > Geometry

Object Name	Geometry
State	Fully Defined
Definition	
Source	C:\Users\user1\Desktop\blades\blenderaugershortonly.STEP
Type	Step
Length Unit	Millimeters
Element Control	Program Controlled
Display Style	Body Color
Bounding Box	
Length X	120.68 mm
Length Y	147.2 mm
Length Z	8. mm
Properties	
Volume	11526 mm ³
Mass	9.1674e-002 kg
Scale Factor Value	1.
Statistics	
Bodies	1
Active Bodies	1

Nodes	1232637
Elements	853265
Mesh Metric	Skewness
Min	2.4941e-005
Max	0.86271
Average	0.22411
Standard Deviation	0.11816
Update Options	
Assign Default Material	No
Basic Geometry Options	
Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	No
Parameters	Independent
Parameter Key	ANS;DS
Attributes	No
Named Selections	No
Material Properties	No
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	No
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

TABLE 5
Model (A4) > Geometry > Parts

Object Name	<i>blenderaugershortonly-FreeParts M6 Tapped Hole1</i>
State	Meshed
Graphics Properties	
Visible	Yes
Transparency	1
Definition	
Suppressed	No
Stiffness Behavior	Flexible
Coordinate System	Default Coordinate System
Reference Temperature	By Environment
Treatment	None
Material	
Assignment	Stainless steel, 304, annealed
Nonlinear Effects	Yes

Thermal Strain Effects	Yes
Bounding Box	
Length X	120.68 mm
Length Y	147.2 mm
Length Z	8. mm
Properties	
Volume	11526 mm ³
Mass	9.1674e-002 kg
Centroid X	64.218 mm
Centroid Y	-16.399 mm
Centroid Z	-1.3225e-004 mm
Moment of Inertia Ip1	55.183 kg·mm ²
Moment of Inertia Ip2	163.51 kg·mm ²
Moment of Inertia Ip3	217.99 kg·mm ²
Statistics	
Nodes	1232637
Elements	853265
Mesh Metric	Skewness
Min	2.4941e-005
Max	0.86271
Average	0.22411
Standard Deviation	0.11816

TABLE 6
Model (A4) > Materials

Object Name	<i>Materials</i>
State	Fully Defined
Statistics	
Materials	2
Material Assignments	1

TABLE 7
Model (A4) > Materials > Stainless steel, 304, annealed Assignment

Object Name	<i>Stainless steel, 304, annealed Assignment</i>
State	Fully Defined
General	
Scoping Method	Geometry Selection
Geometry	1 Body
Definition	
Material Name	Stainless steel, 304, annealed
Nonlinear Effects	Yes
Thermal Strain Effects	Yes
Reference Temperature	By Environment
Suppressed	No

Coordinate Systems

TABLE 8
Model (A4) > Coordinate Systems > Coordinate System

Object Name	<i>Global Coordinate System</i>
State	Fully Defined
Definition	
Type	Cartesian
Coordinate System ID	0.
Origin	
Origin X	0. mm
Origin Y	0. mm
Origin Z	0. mm
Directional Vectors	
X Axis Data	[1. 0. 0.]
Y Axis Data	[0. 1. 0.]
Z Axis Data	[0. 0. 1.]

Mesh

TABLE 9
Model (A4) > Mesh

Object Name	<i>Mesh</i>
State	Solved
Display	
Display Style	Use Geometry Setting
Defaults	
Physics Preference	Mechanical
Element Order	Program Controlled
Element Size	0.4 mm
Sizing	
Use Adaptive Sizing	Yes
Resolution	7
Mesh Defeaturing	Yes
Defeature Size	Default
Transition	Slow
Span Angle Center	Medium
Initial Size Seed	Part
Bounding Box Diagonal	190.51 mm
Average Surface Area	278.86 mm ²
Minimum Edge Length	2.8909 mm
Quality	
Check Mesh Quality	Yes, Errors
Error Limits	Aggressive Mechanical
Target Element Quality	0.2
Smoothing	High
Mesh Metric	Skewness
Min	2.4941e-005
Max	0.86271
Average	0.22411
Standard Deviation	0.11816
Inflation	

Use Automatic Inflation	None
Inflation Option	Smooth Transition
Transition Ratio	0.272
Maximum Layers	5
Growth Rate	1.2
Inflation Algorithm	Pre
View Advanced Options	No
Advanced	
Number of CPUs for Parallel Part Meshing	Program Controlled
Straight Sided Elements	No
Rigid Body Behavior	Dimensionally Reduced
Triangle Surface Mesher	Program Controlled
Topology Checking	Yes
Pinch Tolerance	Please Define
Generate Pinch on Refresh	No
Statistics	
Nodes	1232637
Elements	853265
Show Detailed Statistics	No

Static Structural (A5)

TABLE 10
Model (A4) > Analysis

Object Name	<i>Static Structural (A5)</i>
State	Solved
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Solver Target	Mechanical APDL
Options	
Environment Temperature	22. °C
Generate Input Only	No

TABLE 11
Model (A4) > Static Structural (A5) > Analysis Settings

Object Name	<i>Analysis Settings</i>
State	Fully Defined
Step Controls	
Number Of Steps	1.
Current Step Number	1.
Step End Time	1. s
Auto Time Stepping	Program Controlled
Solver Controls	
Solver Type	Program Controlled
Weak Springs	Off
Solver Pivot Checking	Program Controlled
Large Deflection	Off

Inertia Relief	Off
Quasi-Static Solution	Off
Rotordynamics Controls	
Coriolis Effect	Off
Restart Controls	
Generate Restart Points	Program Controlled
Retain Files After Full Solve	No
Combine Restart Files	Program Controlled
Nonlinear Controls	
Newton-Raphson Option	Program Controlled
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Stabilization	Program Controlled
Advanced	
Inverse Option	No
Contact Split (DMP)	Off
Output Controls	
Stress	Yes
Back Stress	No
Strain	Yes
Contact Data	Yes
Nonlinear Data	No
Nodal Forces	No
Volume and Energy	Yes
Euler Angles	Yes
General Miscellaneous	No
Contact Miscellaneous	No
Store Results At	All Time Points
Result File Compression	Program Controlled
Analysis Data Management	
Solver Files Directory	C:\Users\user1\Desktop\blades\shortblade_files\dp0\SYS\MECH\
Future Analysis	None
Scratch Solver Files Directory	
Save MAPDL db	No
Contact Summary	Program Controlled
Delete Unneeded Files	Yes
Nonlinear Solution	Yes
Solver Units	Active System
Solver Unit System	nmm

TABLE 12
Model (A4) > Static Structural (A5) > Loads

Object Name	Fixed Support	Pressure	Moment
State	Fully Defined		
Scope			
Scoping Method	Geometry Selection		

Geometry	5 Faces	23 Faces	10 Faces
Definition			
Type	Fixed Support	Pressure	Moment
Suppressed	No		
Define By		Components	
Applied By		Surface Effect	
Loaded Area		Deformed	
Coordinate System		Global Coordinate System	
X Component		0. MPa (ramped)	0. N·mm (ramped)
Y Component		-4.3e-003 MPa (ramped)	-740. N·mm (ramped)
Z Component		0. MPa (ramped)	0. N·mm (ramped)
Behavior			Deformable
Advanced			
Pinball Region			All

FIGURE 1
Model (A4) > Static Structural (A5) > Pressure


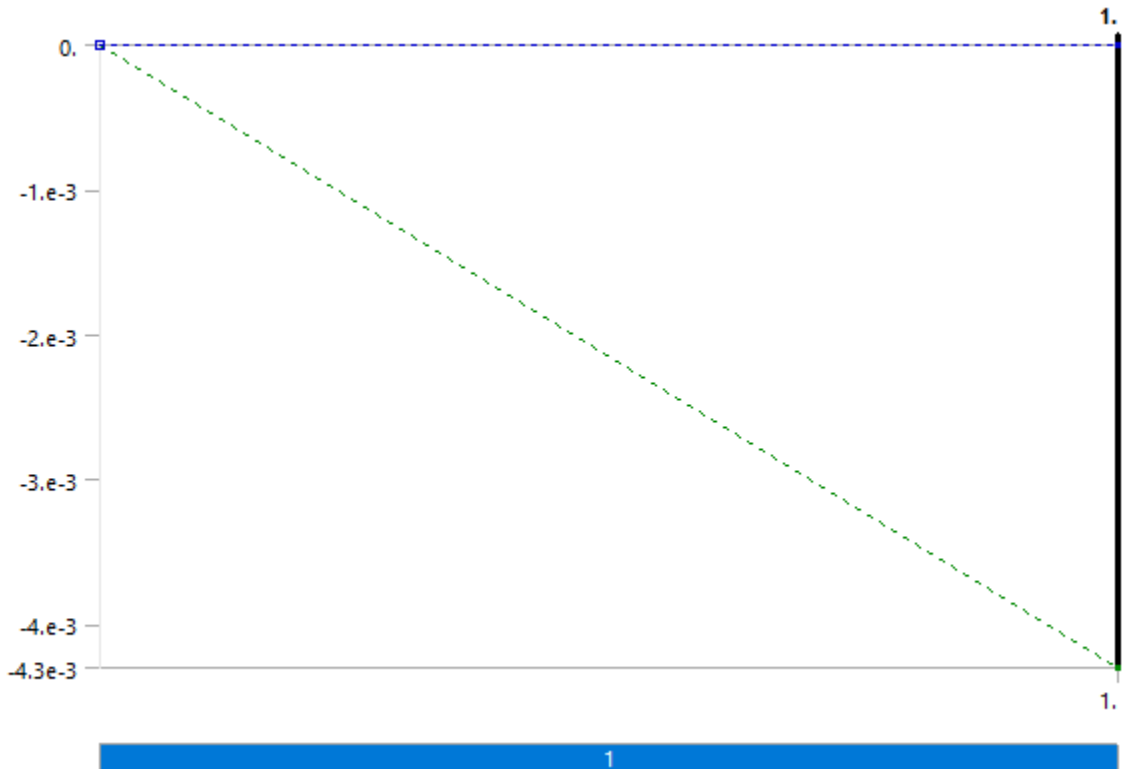


FIGURE 2
Model (A4) > Static Structural (A5) > Moment

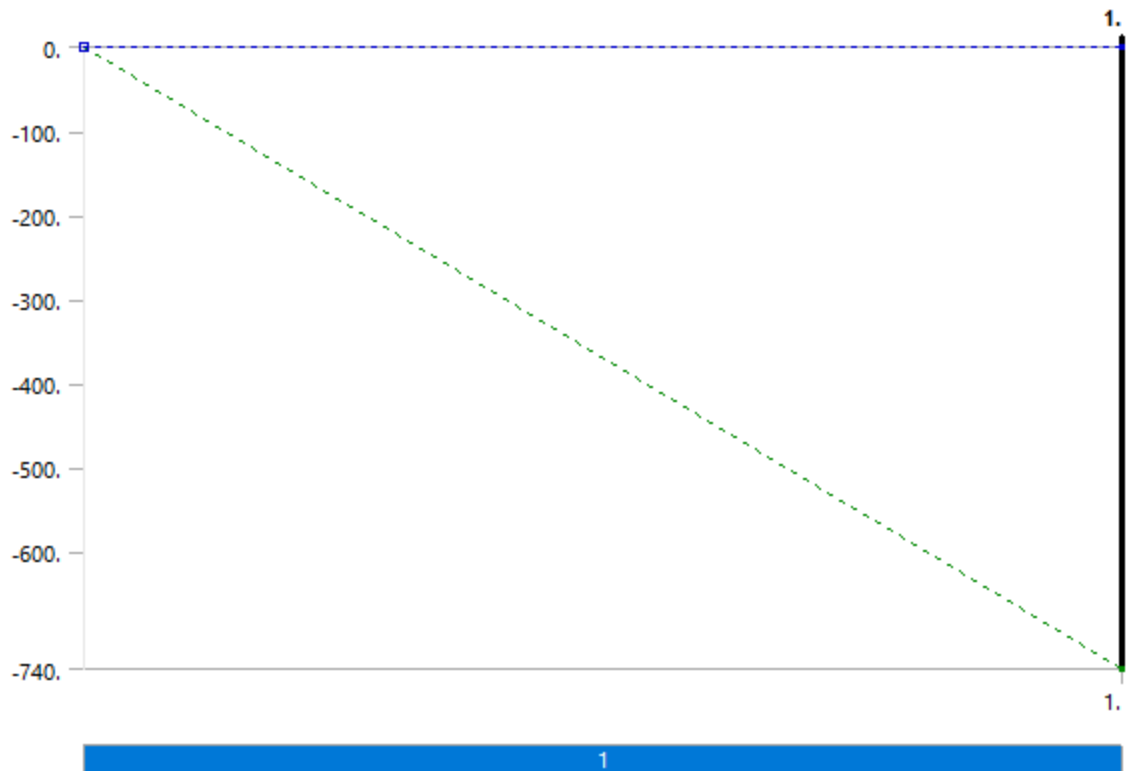

Solution (A6)

TABLE 13
Model (A4) > Static Structural (A5) > Solution

Object Name	<i>Solution (A6)</i>
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1.
Refinement Depth	2.
Information	
Status	Done
MAPDL Elapsed Time	9 m 56 s
MAPDL Memory Used	7.6201 GB
MAPDL Result File Size	1.5045 GB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

TABLE 14
Model (A4) > Static Structural (A5) > Solution (A6) > Solution Information

Object Name	<i>Solution Information</i>
State	Solved
Solution Information	
Solution Output	Solver Output
Newton-Raphson Residuals	0

Identify Element Violations	0
Update Interval	2.5 s
Display Points	All
FE Connection Visibility	
Activate Visibility	Yes
Display	All FE Connectors
Draw Connections Attached To	All Nodes
Line Color	Connection Type
Visible on Results	No
Line Thickness	Single
Display Type	Lines

TABLE 15
Model (A4) > Static Structural (A5) > Solution (A6) > Results

Object Name	Total Deformation	Maximum Shear Stress	Equivalent Stress
State	Solved		
Scope			
Scoping Method	Geometry Selection		
Geometry	All Bodies		
Definition			
Type	Total Deformation	Maximum Shear Stress	Equivalent (von-Mises) Stress
By	Time		
Display Time	Last		
Separate Data by Entity	No		
Calculate Time History	Yes		
Identifier			
Suppressed	No		
Results			
Minimum	0. mm	7.919e-004 MPa	1.3761e-003 MPa
Maximum	0.22878 mm	50.859 MPa	97.232 MPa
Average	0.114 mm	2.1839 MPa	4.2507 MPa
Minimum Occurs On	blenderaugershortonly-FreeParts M6 Tapped Hole1		
Maximum Occurs On	blenderaugershortonly-FreeParts M6 Tapped Hole1		
Minimum Value Over Time			
Minimum	0. mm	1.5838e-004 MPa	2.7523e-004 MPa
Maximum	0. mm	7.919e-004 MPa	1.3761e-003 MPa
Maximum Value Over Time			
Minimum	4.5755e-002 mm	10.172 MPa	19.446 MPa
Maximum	0.22878 mm	50.859 MPa	97.232 MPa
Information			
Time	1. s		
Load Step	1		
Substep	4		
Iteration Number	5		
Integration Point Results			
Display Option		Averaged	
Average Across Bodies		No	

FIGURE 3
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

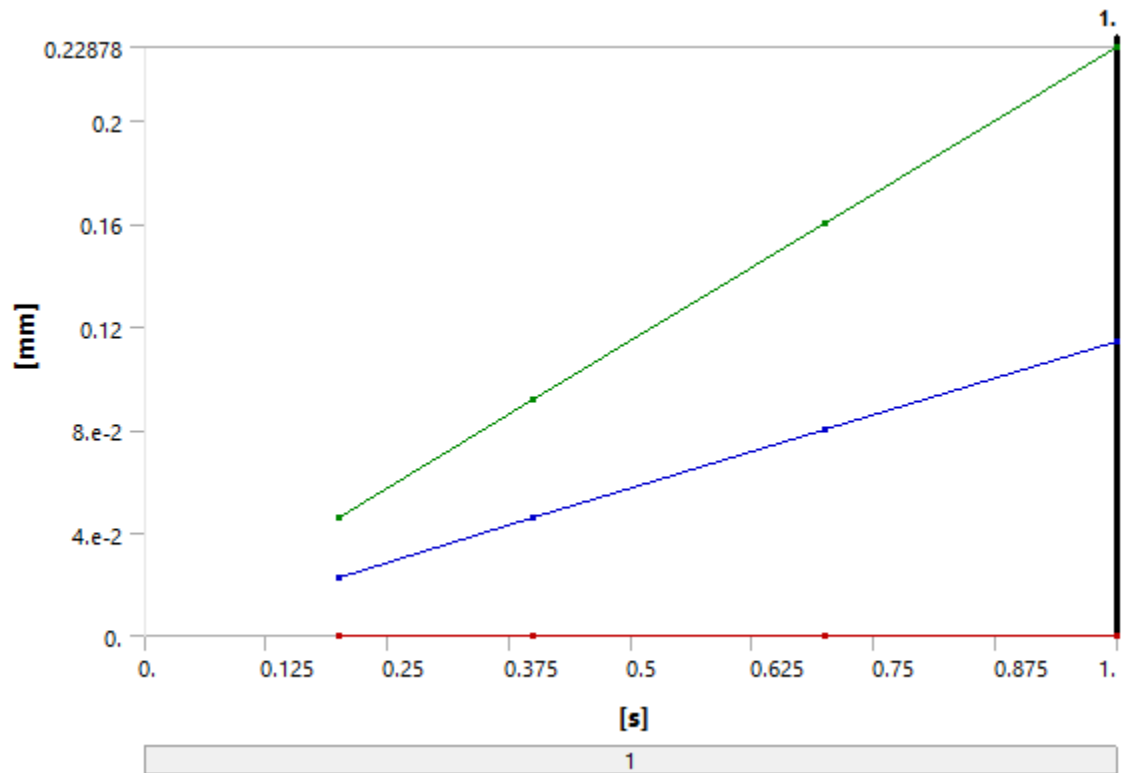


TABLE 16
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

Time [s]	Minimum [mm]	Maximum [mm]	Average [mm]
0.2	0.	4.5755e-002	2.28e-002
0.4		9.151e-002	4.5601e-002
0.7		0.16014	7.9802e-002
1.		0.22878	0.114

FIGURE 4
Model (A4) > Static Structural (A5) > Solution (A6) > Maximum Shear Stress

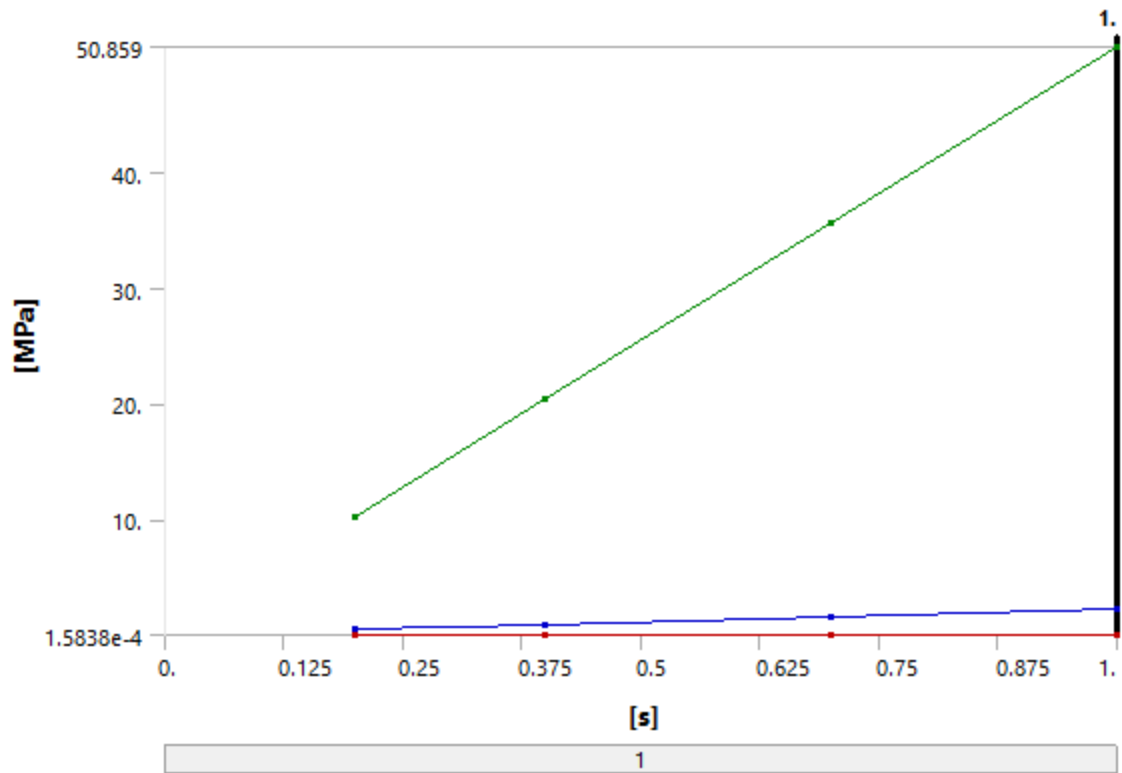


TABLE 17
Model (A4) > Static Structural (A5) > Solution (A6) > Maximum Shear Stress

Time [s]	Minimum [MPa]	Maximum [MPa]	Average [MPa]
0.2	1.5838e-004	10.172	0.43679
0.4	3.1676e-004	20.344	0.87357
0.7	5.5433e-004	35.601	1.5287
1.	7.919e-004	50.859	2.1839

FIGURE 5
Model (A4) > Static Structural (A5) > Solution (A6) > Maximum Shear Stress > Image


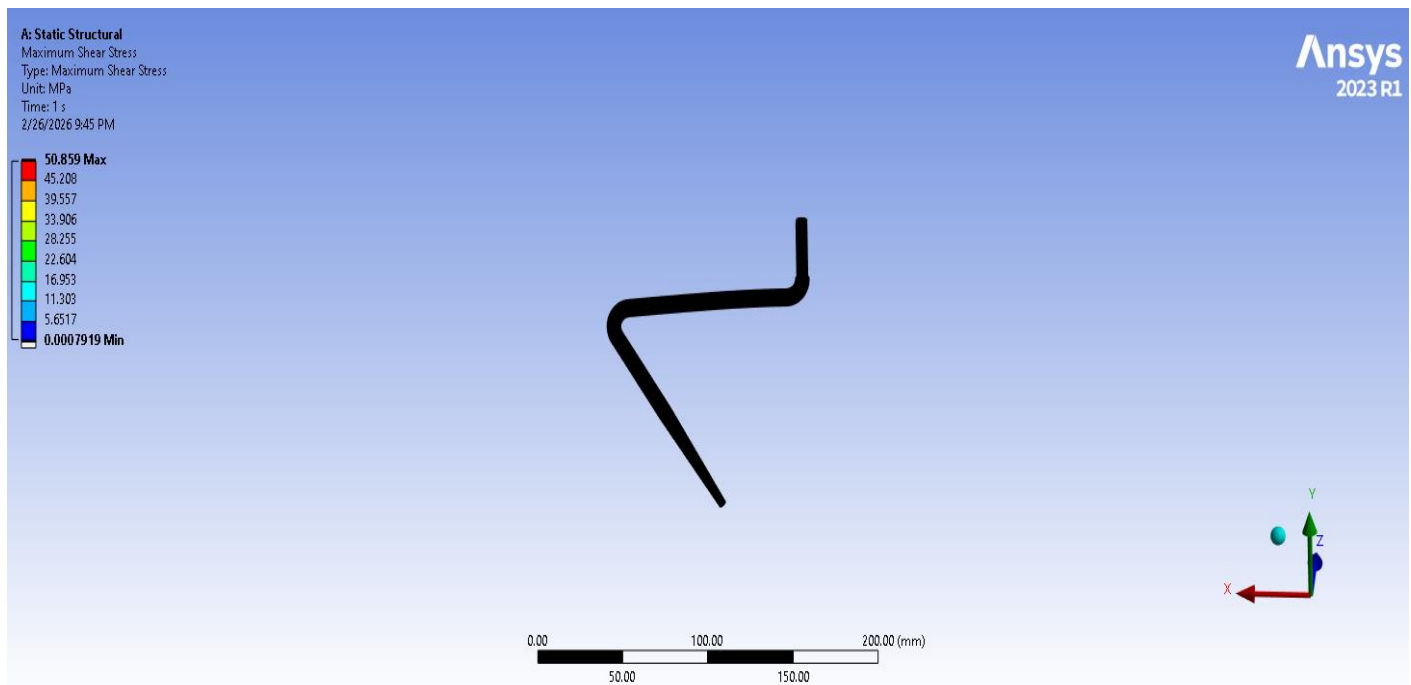


FIGURE 6

Model (A4) > Static Structural (A5) > Solution (A6) > Maximum Shear Stress > Figure

FIGURE 7

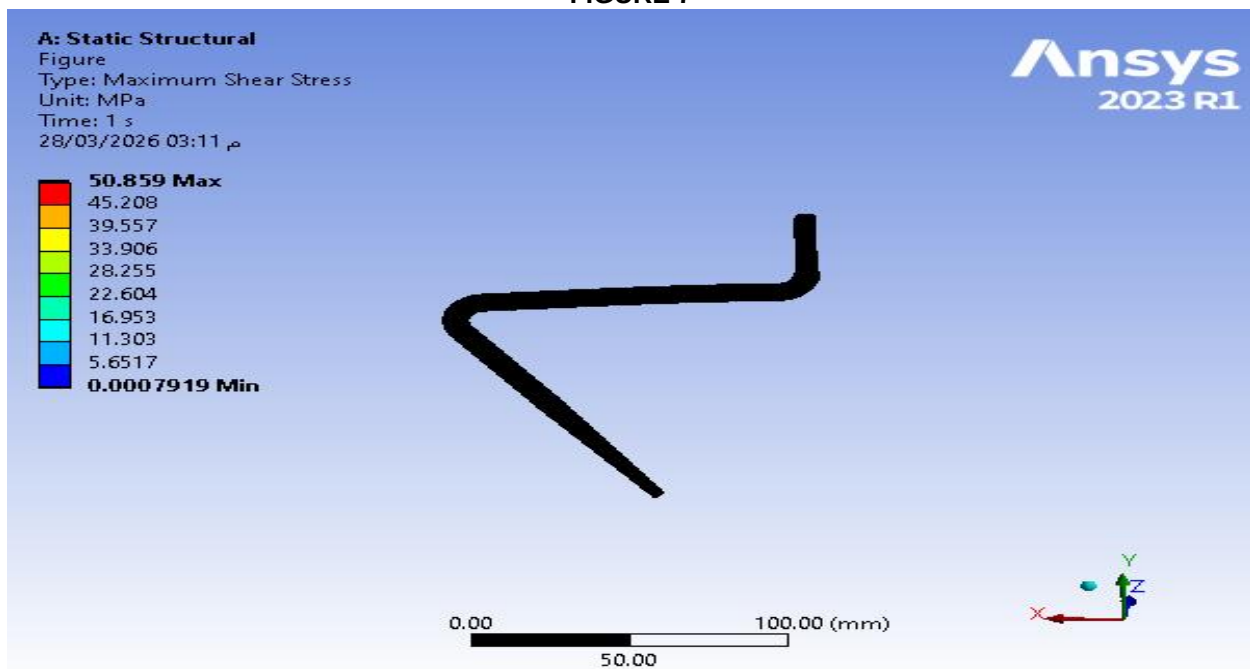

Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress

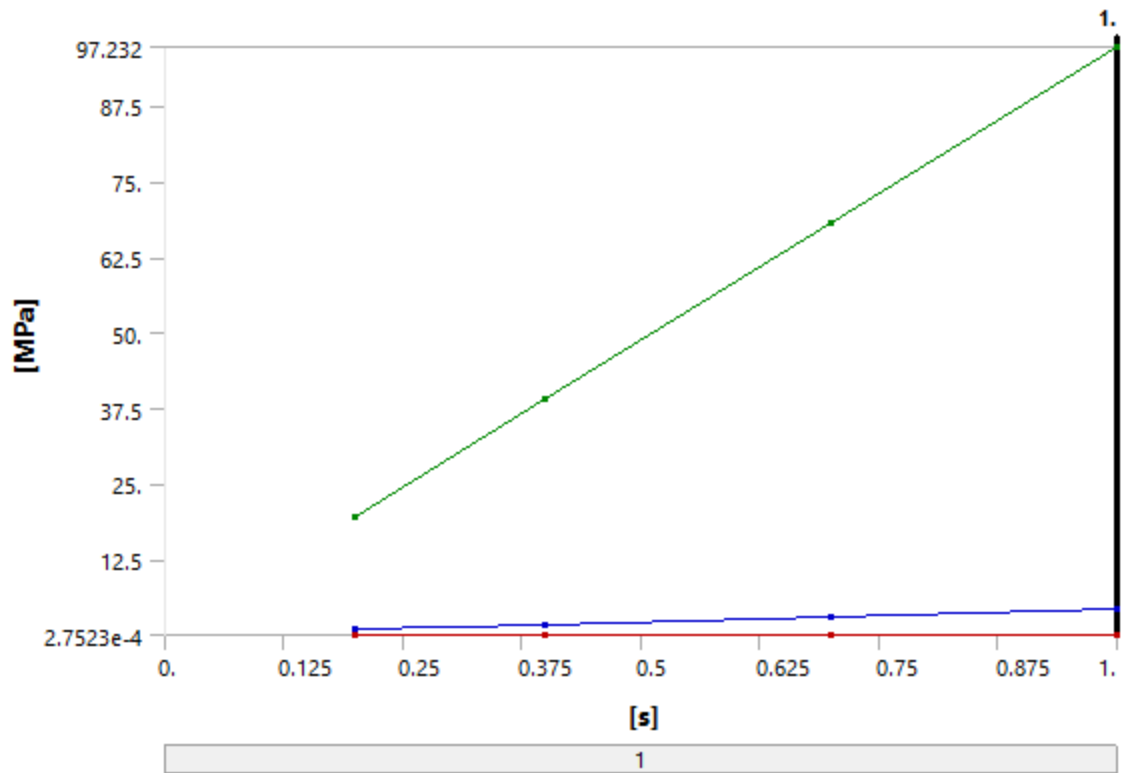


TABLE 18
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress

Time [s]	Minimum [MPa]	Maximum [MPa]	Average [MPa]
0.2	2.7523e-004	19.446	0.85014
0.4	5.5045e-004	38.893	1.7003
0.7	9.6329e-004	68.062	2.9755
1.	1.3761e-003	97.232	4.2507

FIGURE 8
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress > Image

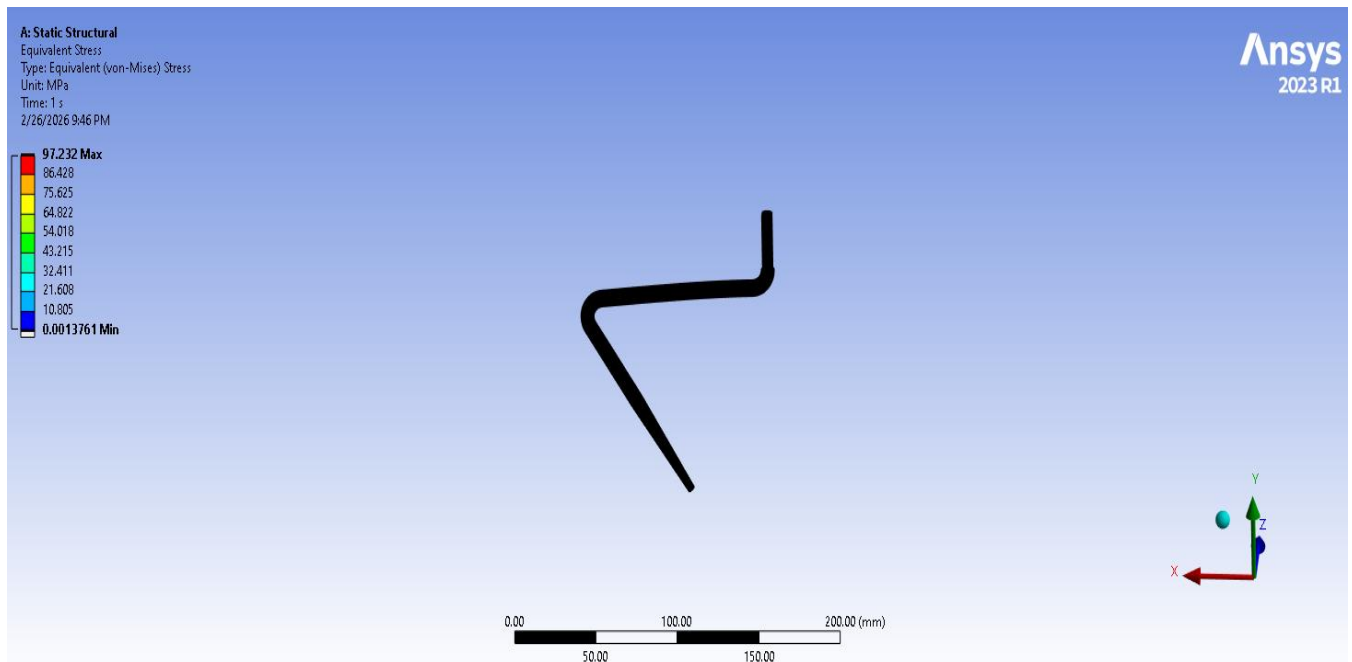


FIGURE 9

Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Stress > Figure

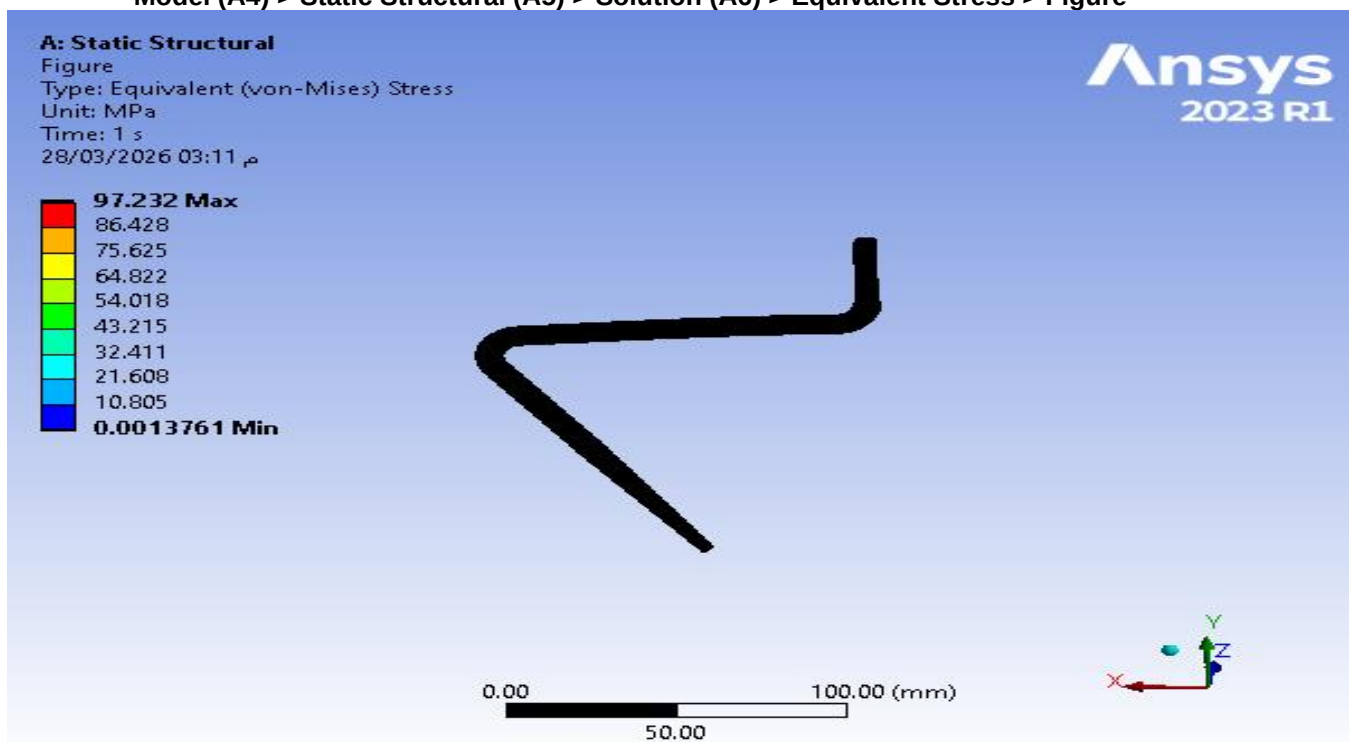


TABLE 19

Model (A4) > Static Structural (A5) > Solution (A6) > Stress Safety Tools

Object Name	<i>Stress Tool</i>
State	Solved

Definition	
Theory	Max Shear Stress
Factor	0.5
Stress Limit Type	Tensile Yield Per Material

TABLE 20
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Results

Object Name	<i>Safety Factor</i>
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	
Type	Safety Factor
By	Time
Display Time	Last
Separate Data by Entity	No
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	
Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	2.4784
Minimum Occurs On	blenderaugershorthandonly-FreeParts M6 Tapped Hole1
Minimum Value Over Time	
Minimum	2.4784
Maximum	12.392
Maximum Value Over Time	
Minimum	15.
Maximum	15.
Information	
Time	1. s
Load Step	1
Substep	4
Iteration Number	5

FIGURE 10
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor

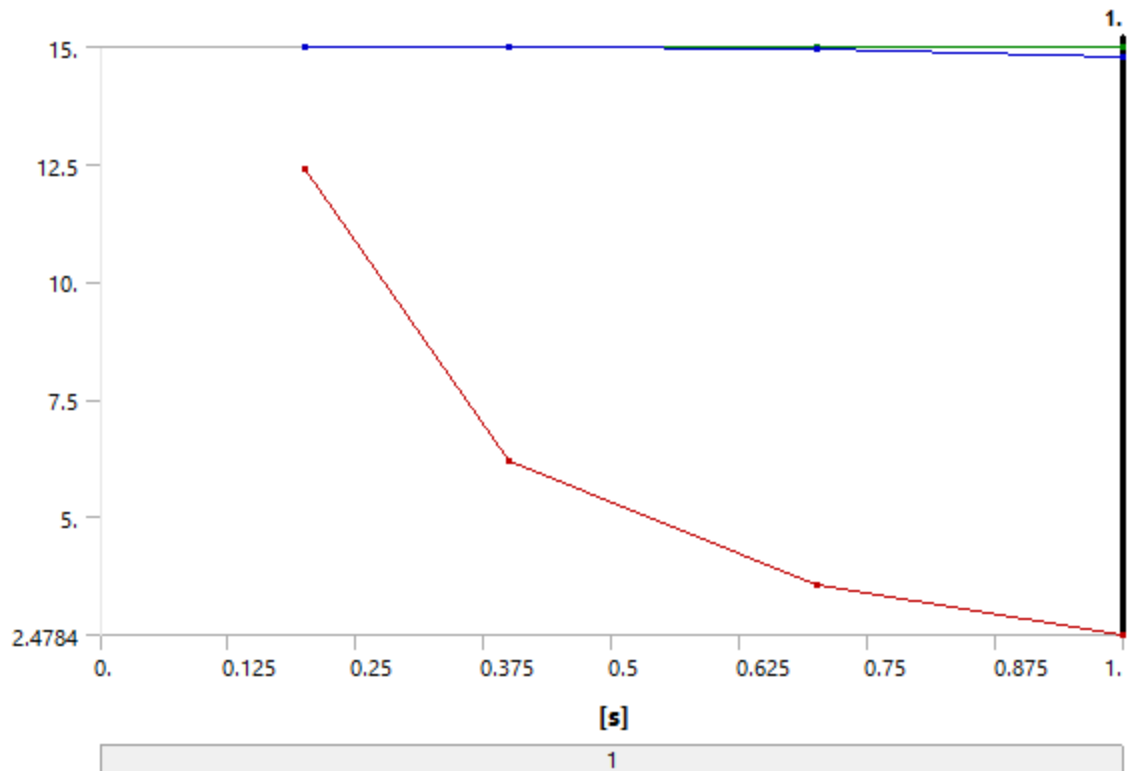


TABLE 21
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor

Time [s]	Minimum	Maximum	Average
0.2	12.392	15.	15.
0.4	6.1961		14.998
0.7	3.5406		14.958
1.	2.4784		14.773

FIGURE 11
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Image

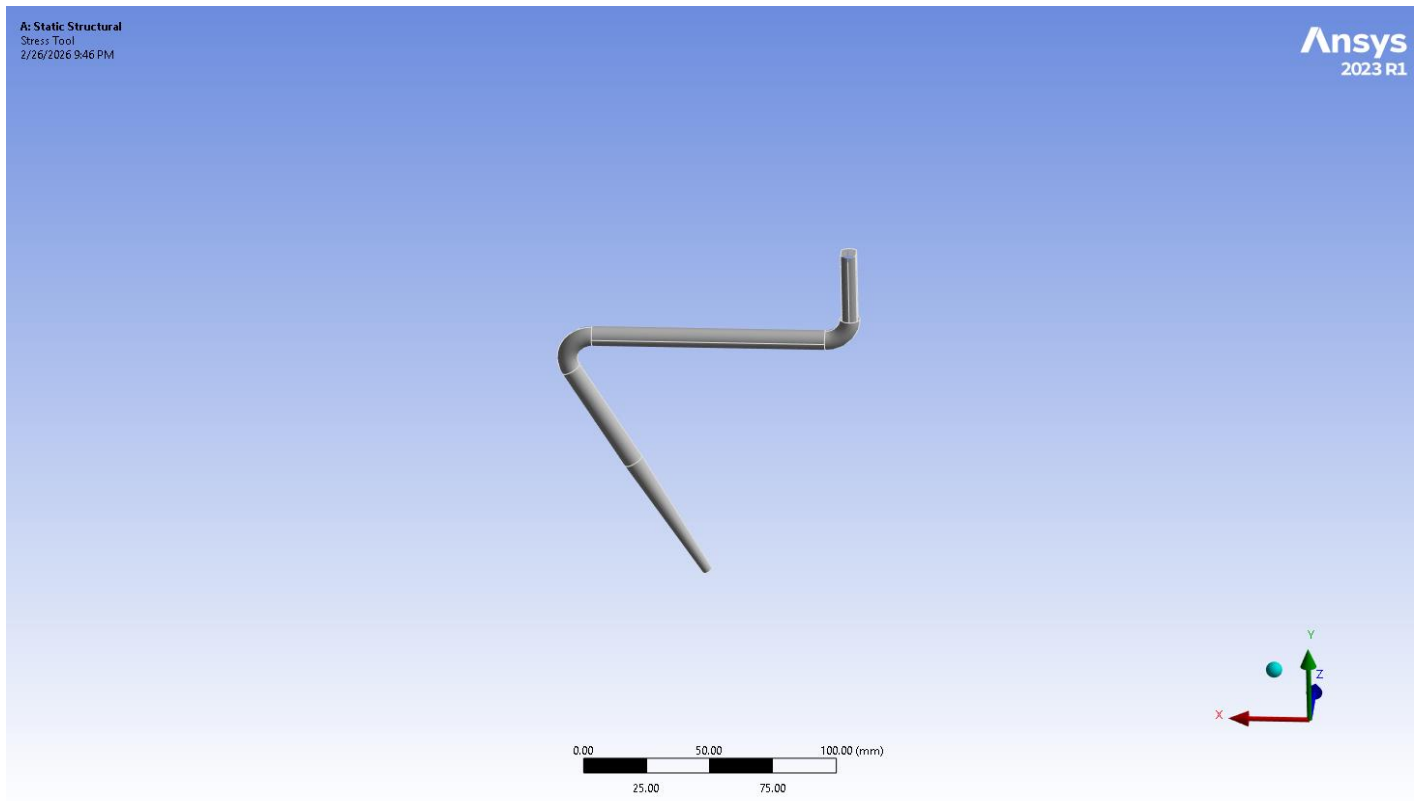


FIGURE 12
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Figure

A: Static Structural

Figure

28/03/2026 03:11 م

Ansys
2023 R1



TABLE 22

Model (A4) > Static Structural (A5) > Solution (A6) > Stress Safety Tools

Object Name	<i>Stress Tool 2</i>
State	Solved
Definition	
Theory	Max Shear Stress
Factor	0.5
Stress Limit Type	Tensile Yield Per Material

TABLE 23

Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool 2 > Results

Object Name	<i>Safety Factor</i>
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	
Type	Safety Factor
By	Time

Display Time	Last
Separate Data by Entity	No
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	
Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	2.4784
Minimum Occurs On	blenderaugershortonly-FreeParts M6 Tapped Hole1
Minimum Value Over Time	
Minimum	2.4784
Maximum	12.392
Maximum Value Over Time	
Minimum	15.
Maximum	15.
Information	
Time	1. s
Load Step	1
Substep	4
Iteration Number	5

FIGURE 13
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool 2 > Safety Factor

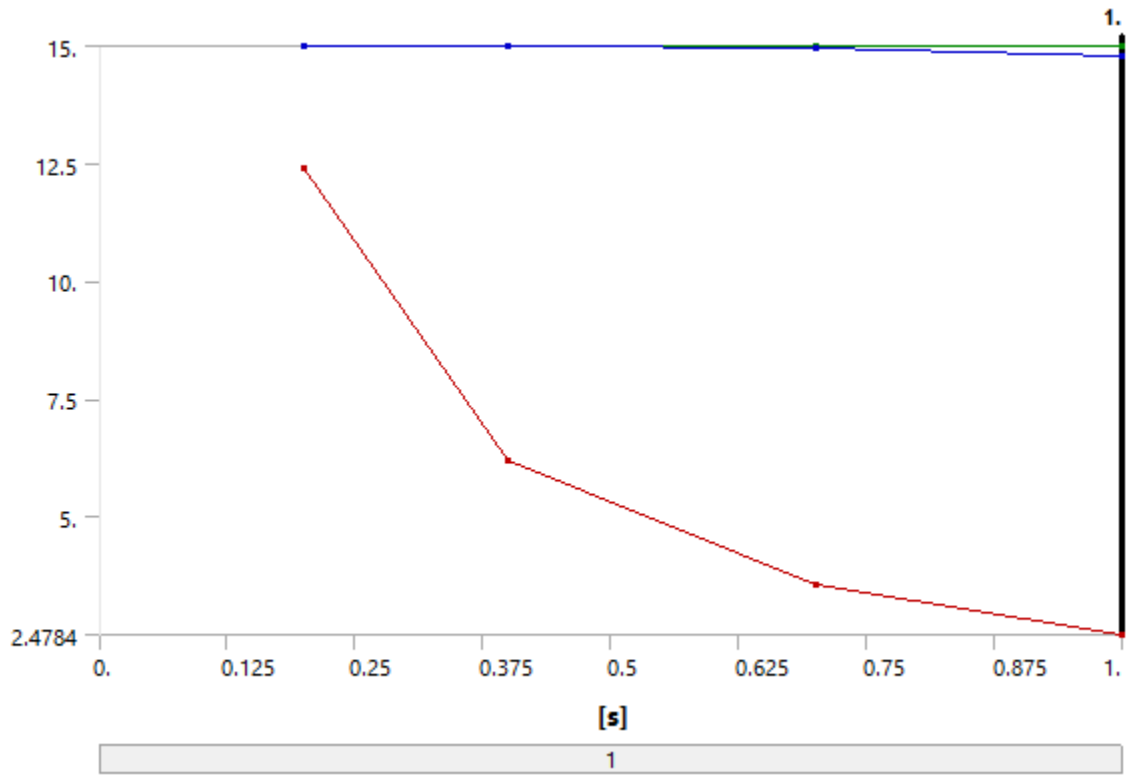


TABLE 24
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool 2 > Safety Factor

Time [s]	Minimum	Maximum	Average
0.2	12.392	15.	15.
0.4	6.1961		14.998
0.7	3.5406		14.958
1.	2.4784		14.773

FIGURE 14
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool 2 > Image

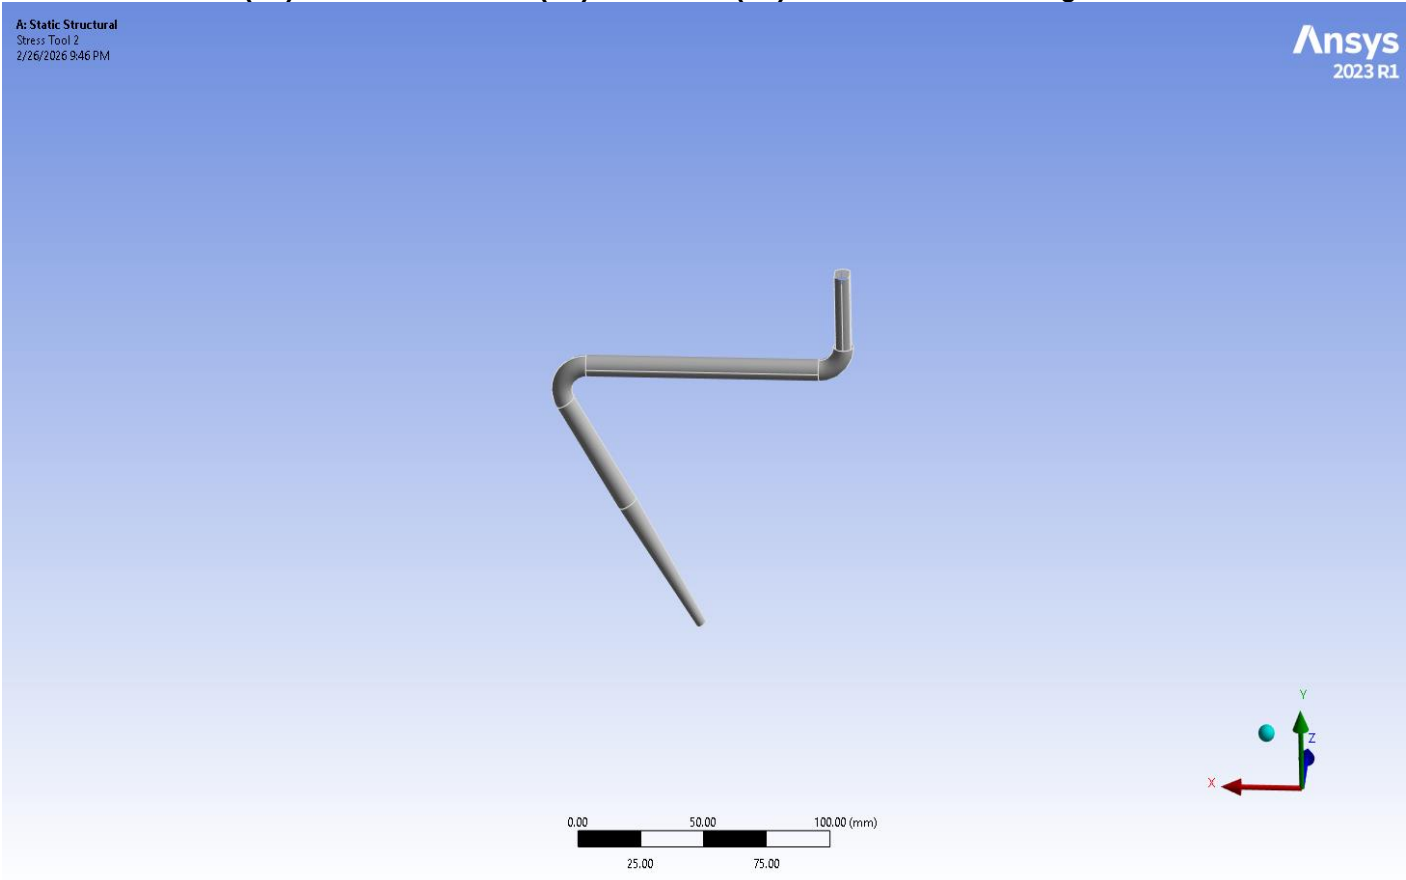


FIGURE 15
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool 2 > Figure

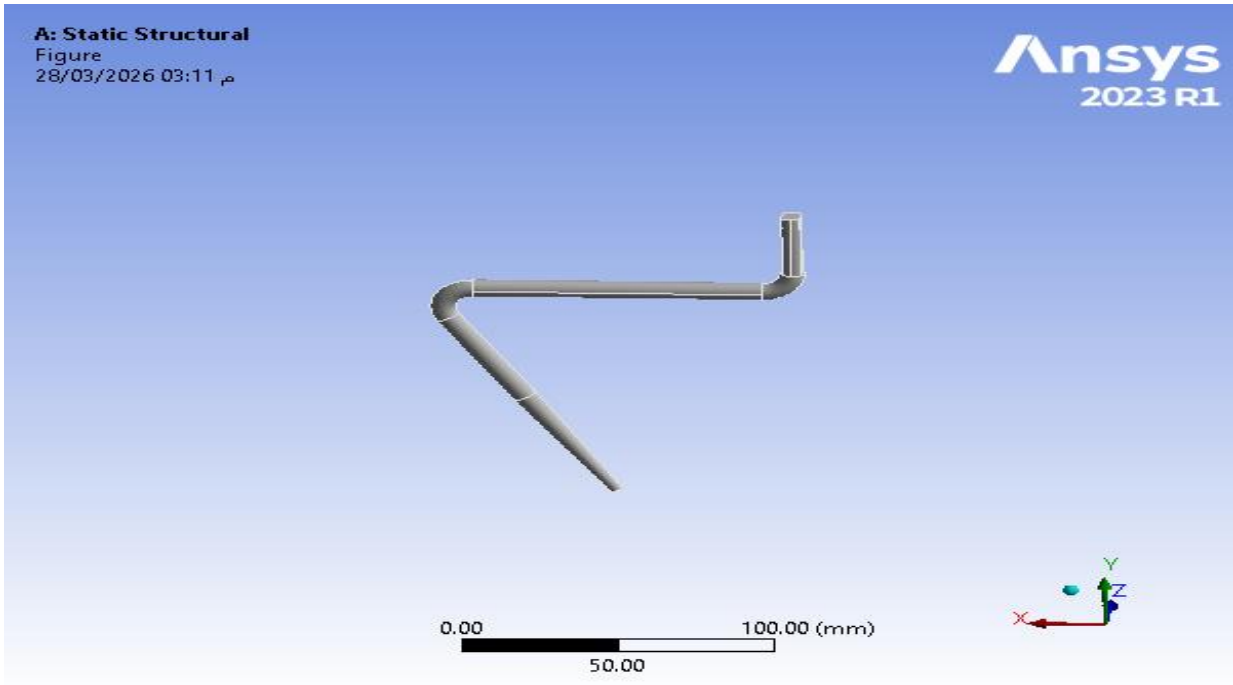


TABLE 25
Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tools

Object Name	<i>Fatigue Tool</i>
State	Solved
Domain	
Domain Type	Time
Materials	
Fatigue Strength Factor (Kf)	1.
Loading	
Type	Fully Reversed
Scale Factor	1.
Definition	
Display Time	End Time
Options	
Analysis Type	Stress Life
Mean Stress Theory	None
Stress Component	Equivalent (von-Mises)
Life Units	
Units Name	cycles
1 cycle is equal to	1. cycles

FIGURE 16
Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool

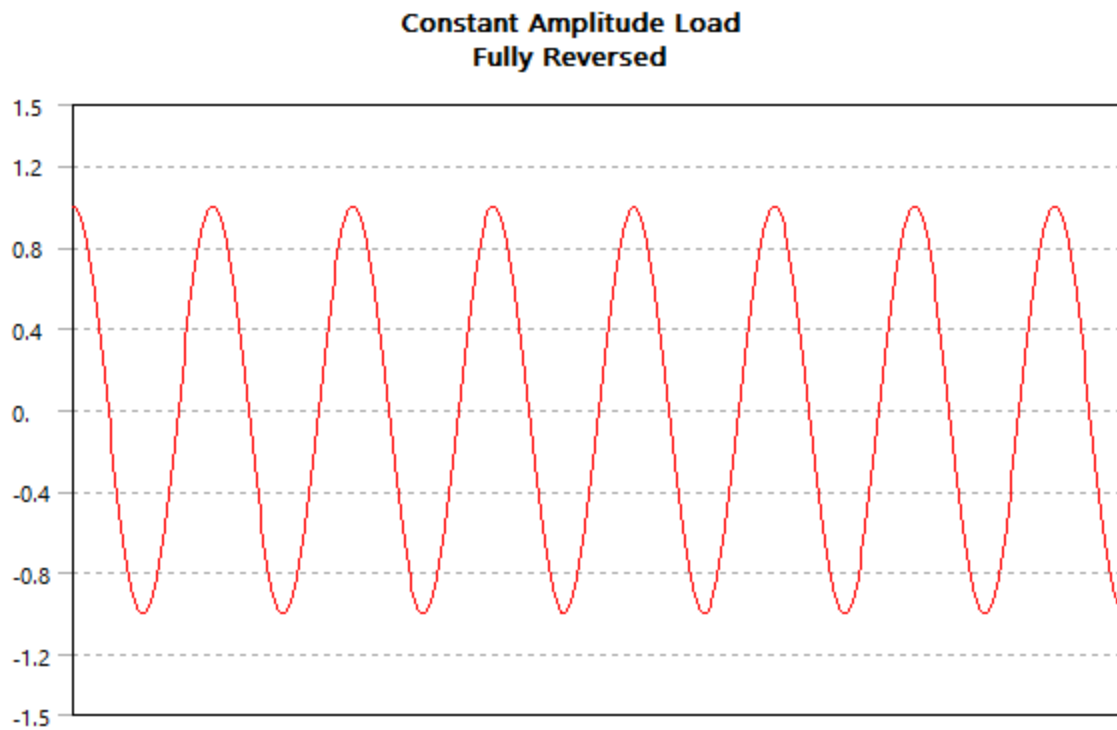


FIGURE 17
Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool
Mean Stress Correction Theory

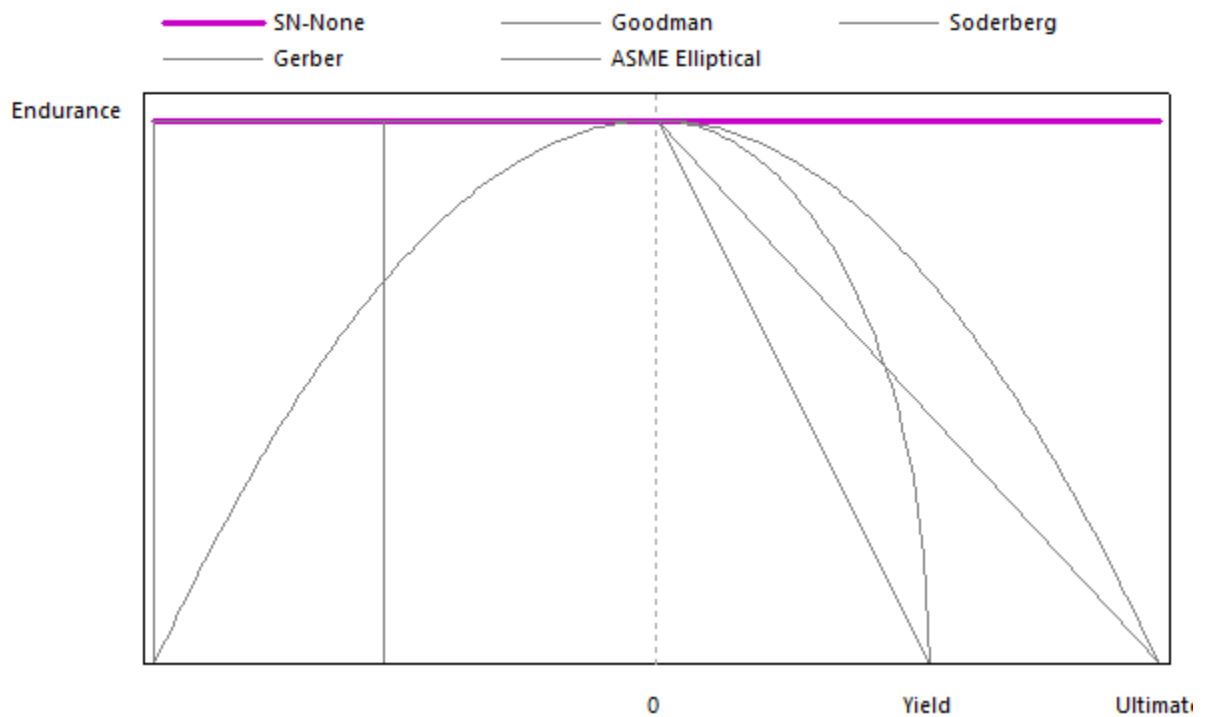


TABLE 26
Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool > Results

Object Name	Life	Damage	Safety Factor
State	Solved		
Scope			
Scoping Method	Geometry Selection		
Geometry	All Bodies		
Definition			
Type	Life	Damage	Safety Factor
Identifier			
Suppressed	No		
Design Life		1.e+009 cycles	
Results			
Minimum	1.e+008 cycles		2.0981
Minimum Occurs On	blenderaugershortonly-FreeParts M6 Tapped Hole1		blenderaugershortonly-FreeParts M6 Tapped Hole1
Maximum		10.	
Maximum Occurs On		blenderaugershortonly-FreeParts M6 Tapped Hole1	

FIGURE 18
Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool > Life > Image

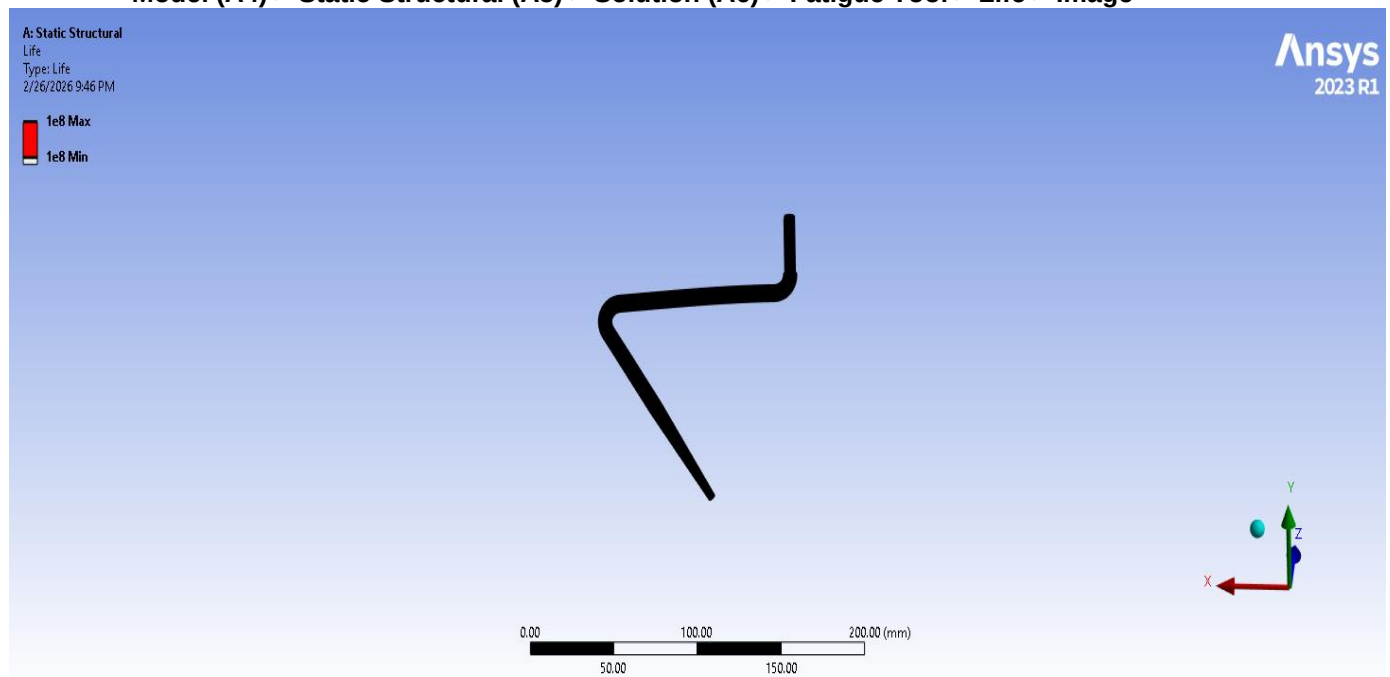


FIGURE 19
Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool > Life > Figure

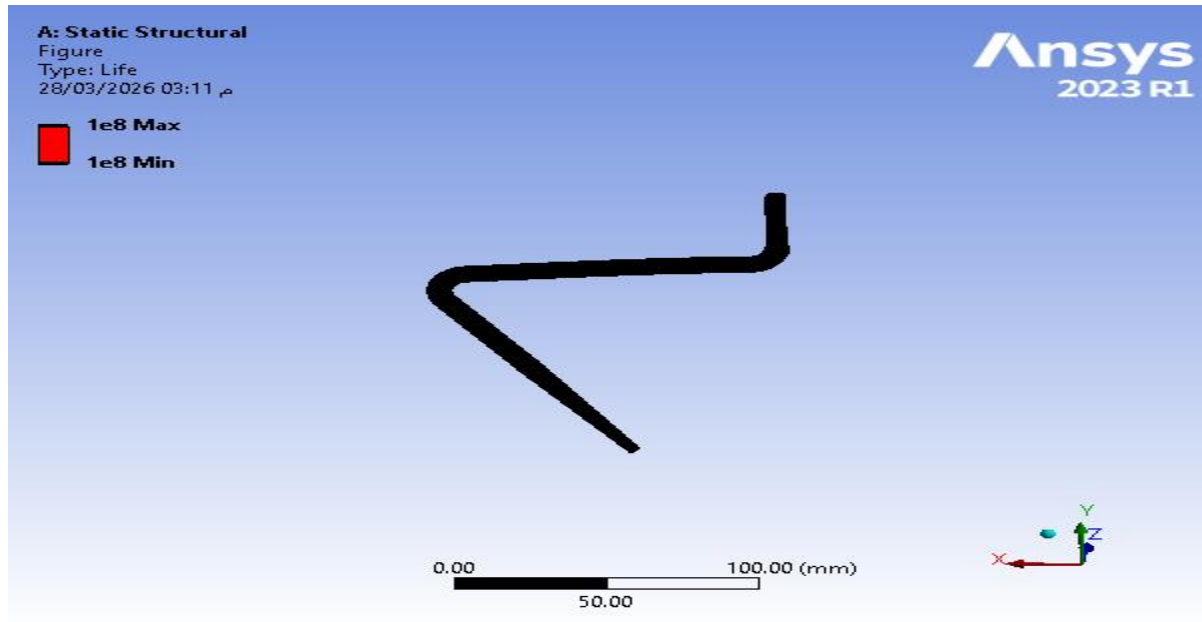


FIGURE 20

Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool > Damage > Image

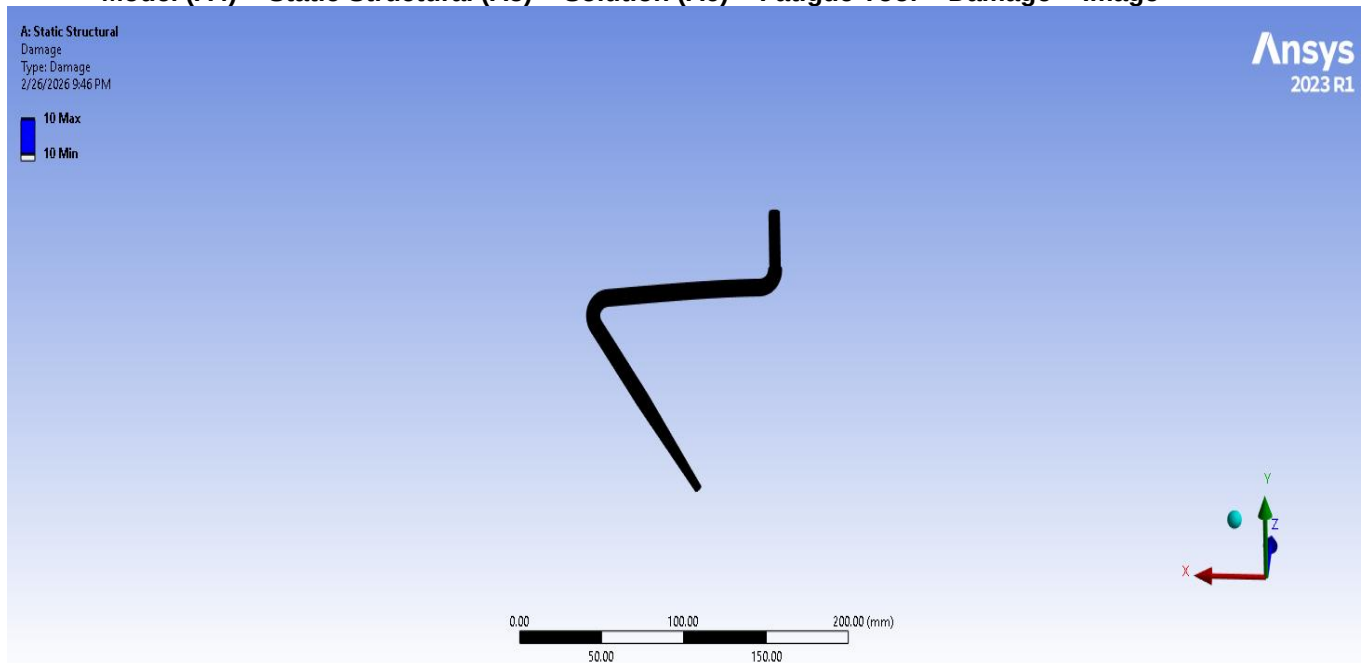


FIGURE 21

Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool > Damage > Figure


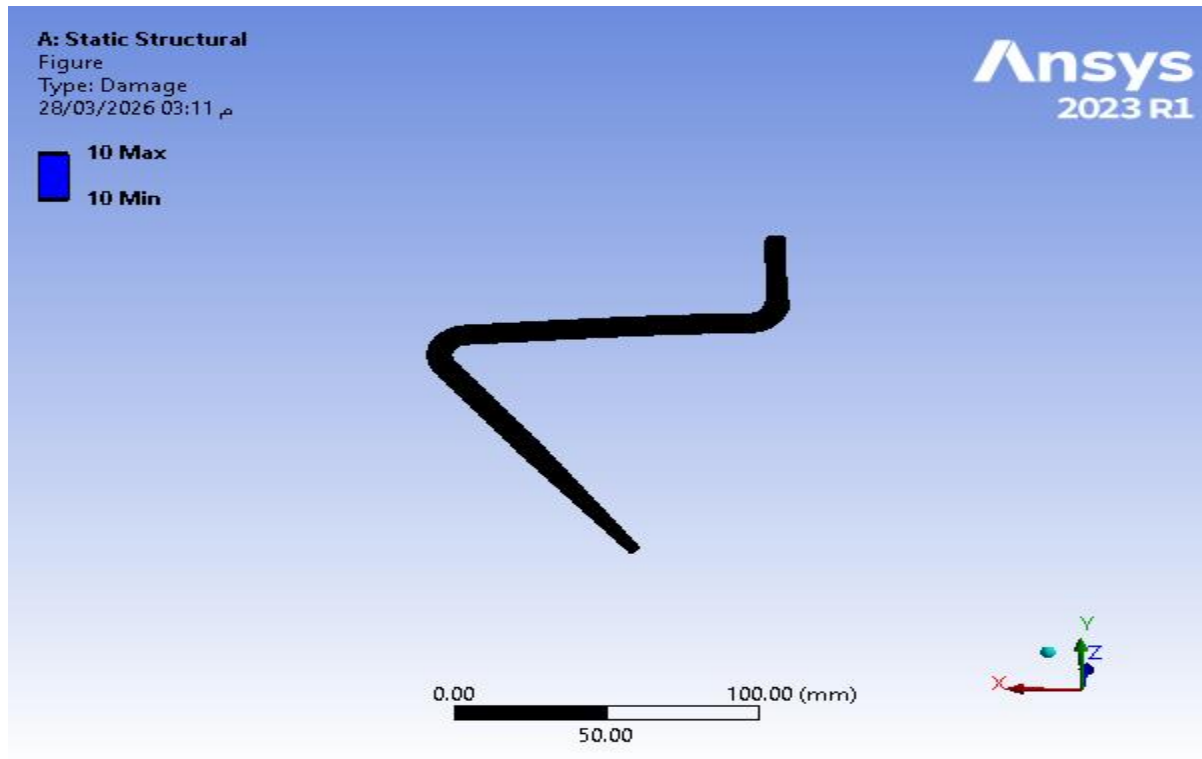


FIGURE 22

Model (A4) > Static Structural (A5) > Solution (A6) > Fatigue Tool > Safety Factor > Image

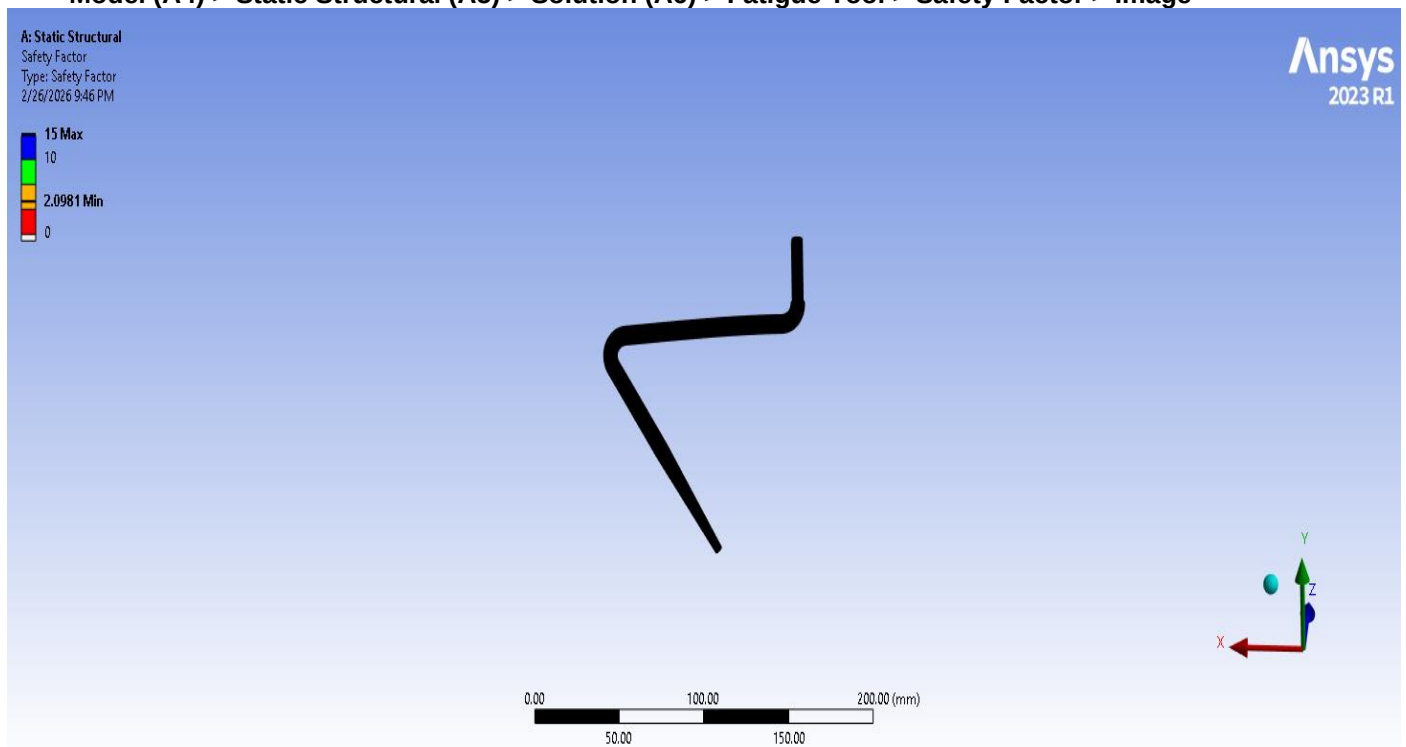

Material Data

Stainless steel, 304, annealed

TABLE 27
Stainless steel, 304, annealed > Constants

Density	7.954e-006 kg mm ⁻³
Tensile Yield Strength	252.1 MPa
Tensile Ultimate Strength	562.3 MPa

TABLE 28
Stainless steel, 304, annealed > Opacity

Red	Green	Blue
153	153	153
Opacity		
1		
Metallic Finish		
1		

TABLE 29
Stainless steel, 304, annealed > Isotropic Elasticity

Young's Modulus MPa	Poisson's Ratio	Bulk Modulus MPa	Shear Modulus MPa	Temperature C
2.089e+005	0.27	1.5138e+005	82244	-198.3
2.048e+005	0.27	1.4841e+005	80630	-128.9
2.013e+005	0.27	1.4587e+005	79252	-73.33
1.951e+005	0.27	1.4138e+005	76811	21.11
1.896e+005	0.27	1.3739e+005	74646	93.33
1.862e+005	0.27	1.3493e+005	73307	148.9
1.82e+005	0.27	1.3188e+005	71654	204.4
1.786e+005	0.27	1.2942e+005	70315	260
1.744e+005	0.27	1.2638e+005	68661	315.6
1.71e+005	0.27	1.2391e+005	67323	371.1
1.662e+005	0.27	1.2043e+005	65433	426.7
1.62e+005	0.27	1.1739e+005	63780	482.2
1.572e+005	0.27	1.1391e+005	61890	537.8
1.517e+005	0.27	1.0993e+005	59724	593.3
1.462e+005	0.27	1.0594e+005	57559	648.9
1.4e+005	0.27	1.0145e+005	55118	704.4
1.324e+005	0.27	95942	52126	760
1.248e+005	0.27	90435	49134	815.6

TABLE 30
Stainless steel, 304, annealed > Multilinear Isotropic Hardening

Stress MPa	Plastic Strain mm mm ⁻¹	Temperature C
264.5	0	20
376.2	4.444e-002	20
461.9	8.889e-002	20
530.8	0.1333	20
590.1	0.1778	20
644.8	0.2222	20
697.5	0.2667	20

748.9	0.3111	20
797.2	0.3556	20
838.6	0.4	20
158.8	0	430
276.2	6.667e-002	430
367.4	0.1333	430
438.4	0.2	430
494.4	0.2667	430
539.3	0.3333	430
575.5	0.4	430
604.5	0.4667	430
626.2	0.5333	430
639.5	0.6	430
147.6	0	650
212.6	5.e-002	650
265	0.1	650
306.4	0.15	650
338.7	0.2	650
363.6	0.25	650
382.7	0.3	650
397.7	0.35	650
410.4	0.4	650
422.4	0.45	650
107.2	0	816
146.9	5.556e-002	816
166	0.1111	816
176.2	0.1667	816
184	0.2222	816
191.6	0.2778	816
198.5	0.3333	816
203.6	0.3889	816
205.9	0.4444	816
207.1	0.5	816

TABLE 31
Stainless steel, 304, annealed > S-N Curve

Alternating Stress MPa	Cycles	R-Ratio
490.4	1000	-1
447.2	3162	-1
408.8	10000	-1
374.3	31620	-1
343	1.e+005	-1
314.4	3.162e+005	-1
288.3	1.e+006	-1
264.4	3.162e+006	-1
242.5	1.e+007	-1
222.4	3.162e+007	-1
204	1.e+008	-1
261.3	1000	0

248.4	3162	0
236.1	10000	0
224.1	31620	0
212.5	1.e+005	0
201.2	3.162e+005	0
190.1	1.e+006	0
179.4	3.162e+006	0
169	1.e+007	0
159	3.162e+007	0
149.4	1.e+008	0
135.3	1000	0.5
131.8	3162	0.5
128.2	10000	0.5
124.6	31620	0.5
120.9	1.e+005	0.5
117.1	3.162e+005	0.5
113.3	1.e+006	0.5
109.4	3.162e+006	0.5
105.4	1.e+007	0.5
101.4	3.162e+007	0.5
97.41	1.e+008	0.5

TABLE 32
Stainless steel, 304, annealed > Isotropic Secant Coefficient of Thermal Expansion

Coefficient of Thermal Expansion C ⁻¹	Temperature C
1.073e-005	-260.2
1.356e-005	-171.7
1.488e-005	-83.31
1.538e-005	5.113
1.592e-005	93.53
1.642e-005	182
1.691e-005	270.4
1.737e-005	358.8
1.782e-005	447.2
1.824e-005	535.6
1.863e-005	624.1
1.9e-005	712.5
1.936e-005	800.9
1.968e-005	889.3
1.999e-005	977.7
2.027e-005	1066
2.053e-005	1155
2.077e-005	1243
2.099e-005	1331
2.118e-005	1420
Zero-Thermal-Strain Reference Temperature C	
20	

TABLE 33
Stainless steel, 304, annealed > Isotropic Thermal Conductivity

Thermal Conductivity W mm ⁻¹ C ⁻¹	Temperature C
1.487e-002	20
1.488e-002	21.11
1.506e-002	37.78
1.558e-002	65.56
1.61e-002	93.33
1.662e-002	121.1
1.696e-002	148.9
1.748e-002	176.7
1.8e-002	204.4
1.835e-002	232.2
1.887e-002	260
1.921e-002	287.8
1.956e-002	315.6
2.008e-002	343.3
2.042e-002	371.1
2.077e-002	398.9
2.129e-002	426.7
2.163e-002	454.4
2.198e-002	482.2
2.233e-002	510
2.267e-002	537.8
2.319e-002	565.6
2.354e-002	593.3
2.388e-002	621.1
2.423e-002	648.9
2.475e-002	676.7
2.51e-002	704.4
2.544e-002	732.2
2.579e-002	760
2.613e-002	787.8
2.648e-002	815.6

TABLE 34
Stainless steel, 304, annealed > Specific Heat Constant Pressure

Specific Heat mJ kg ⁻¹ C ⁻¹	Temperature C
7111	-260.2
2.183e+005	-192.3
3.588e+005	-124.4
4.332e+005	-56.47
4.706e+005	11.43
4.857e+005	79.32
4.957e+005	147.2
5.007e+005	215.1
5.043e+005	283
5.089e+005	350.9
5.16e+005	418.8

5.263e+005	486.7
5.396e+005	554.6
5.553e+005	622.5
5.723e+005	690.4
5.894e+005	758.3
6.05e+005	826.2
6.176e+005	894.1
6.261e+005	962
6.292e+005	1030

TABLE 35
Stainless steel, 304, annealed > Isotropic Resistivity

Resistivity ohm mm	Temperature C
4.883e-004	-260.2
5.402e-004	-199.1
5.91e-004	-138
6.402e-004	-76.99
6.882e-004	-15.94
7.353e-004	45.11
7.806e-004	106.2
8.251e-004	167.2
8.681e-004	228.3
9.091e-004	289.3
9.497e-004	350.4
9.881e-004	411.4
1.026e-003	472.5
1.062e-003	533.5
1.097e-003	594.6
1.131e-003	655.6
1.164e-003	716.7
1.195e-003	777.7
1.225e-003	838.8
1.253e-003	899.9