





Customer' s Approval

Customer


Date

PIN DESCRIPTION

1	GND
2	RESET
3	SCL
4	RS
5	CS
6	SDA
7	SDO
8	GND
9	VCC
10	LEDA
11	LEDK
12	LEDK
13	LEDK
14	LEDK
15	XL
16	YU
17	XR
18	YD

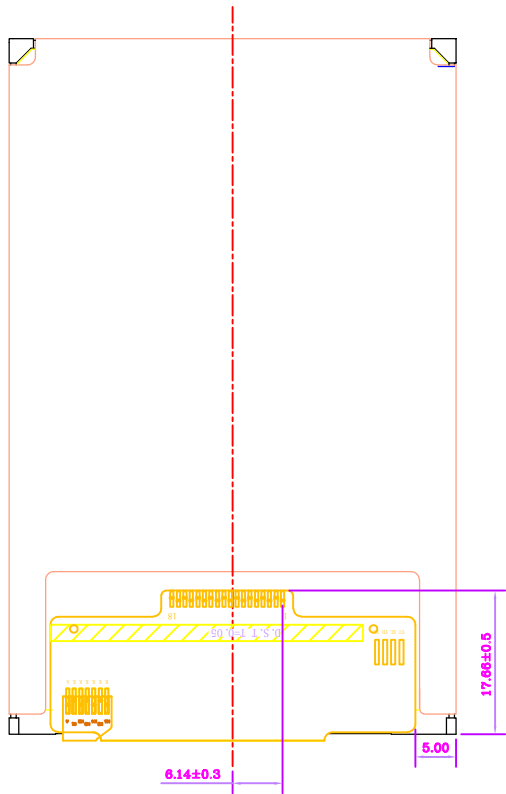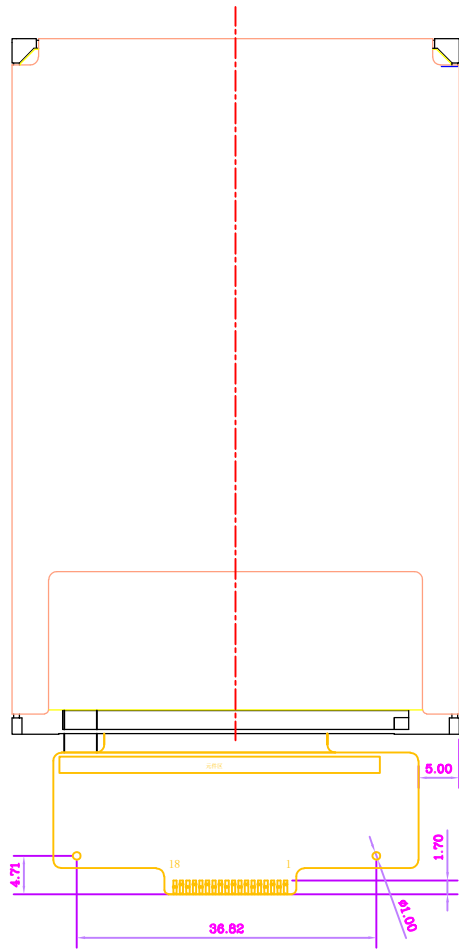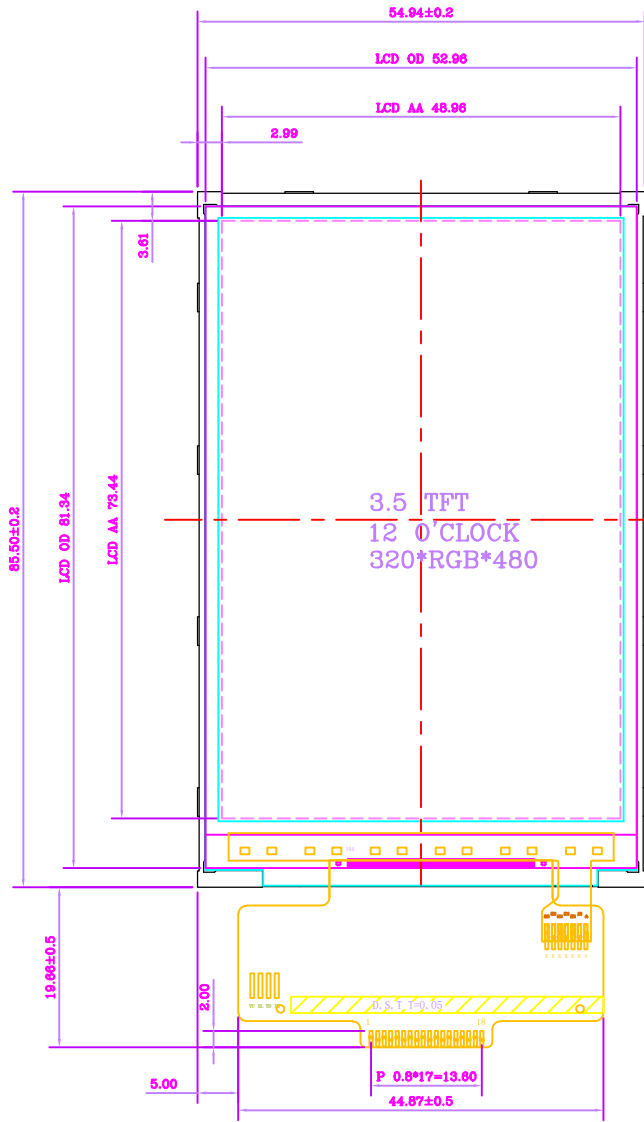

FPC弯折参考
FPC展开出货




Back Light Circuit

RoHS COMPLIANT

ITEM	ELECTRICAL & PHYSICAL DATA
LCD Type	3.5" TFT
Viewing Direction	12 O'CLOCK
Drive Method	DUTY
VDD	2.8 V
Display Mode	Transmissive
Operating Temp	-20° C ~ 70° C
Storage Temp	-30° C ~ 80° C
Connector (IC)	ILI9488

E			
D			
C			
B			
A			
REV	DESCRIPTION	DATE	REVISER



SCALE	FREE	TOLERANCE	±0.2
UNIT	mm	ORG DATE	2022/03/24
MATERIAL	DRAWN BY		
FINISH	CHECKED BY		
	APPROVED BY		

深圳市晶彩智能有限公司

PROJECT NO:

MODULE NO: H35028

DWG: H35028-A

DCN A4 EDITION
P 1 OF 1 A