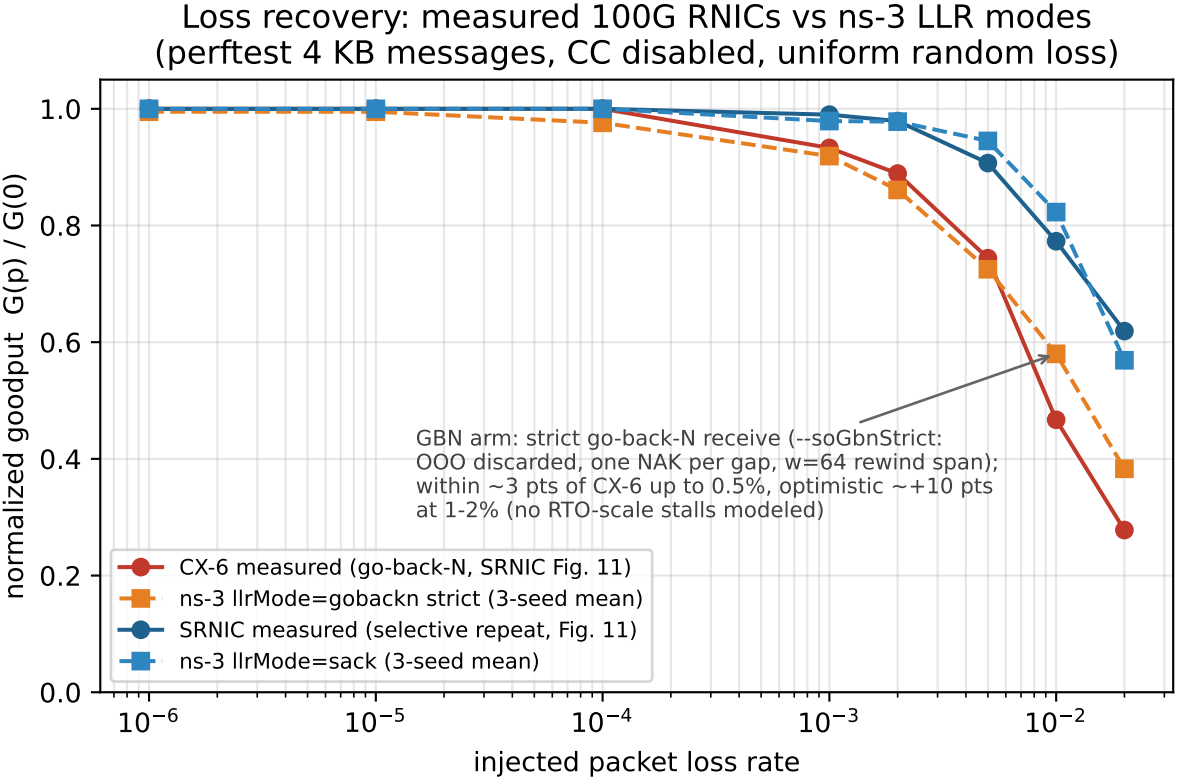
Loss recovery: measured 100G RNICs vs ns-3 LLR modes
(perftest 4 KB messages, CC disabled, uniform random loss)
normalized goodput G(p) / G(0)
injected packet loss rate
1.0
0.8
0.6
0.4
0.2
0.0
10^{-6}
10^{-5}
10^{-4}
10^{-3}
10^{-2}
GBN arm: strict go-back-N receive (--soGbnStrict:
OOO discarded, one NAK per gap, w=64 rewind span);
within ~3 pts of CX-6 up to 0.5%, optimistic ~+10 pts
at 1-2% (no RTO-scale stalls modeled)
CX-6 measured (go-back-N, SRNIC Fig. 11)
ns-3 llrMode=gobackn strict (3-seed mean)
SRNIC measured (selective repeat, Fig. 11)
ns-3 llrMode=sack (3-seed mean)