




Credit flow control across traffic patterns on the Su fabric (8-GPU, 256 MiB per flow, fullmesh + switched):
window × chunk vs bandwidth-delay product — dedicated (p2p/incast) vs shared (fanout/alltoall) credit windows

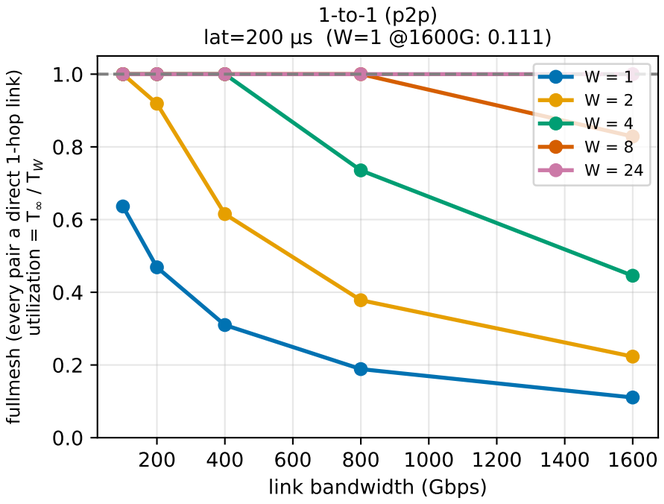


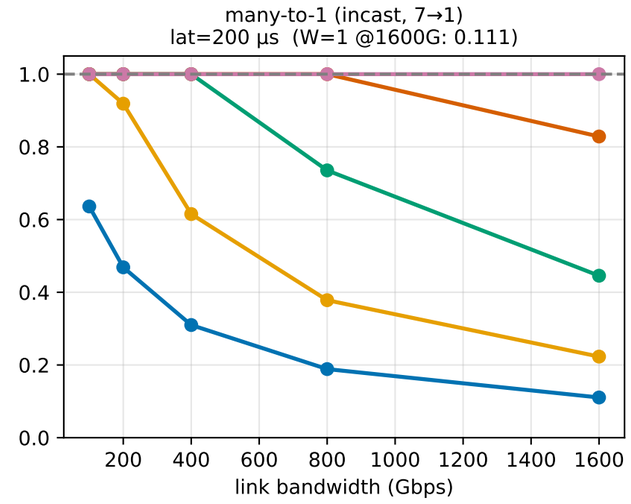


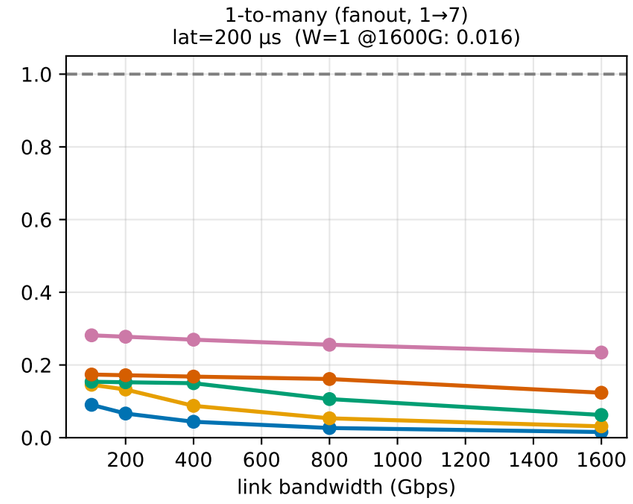


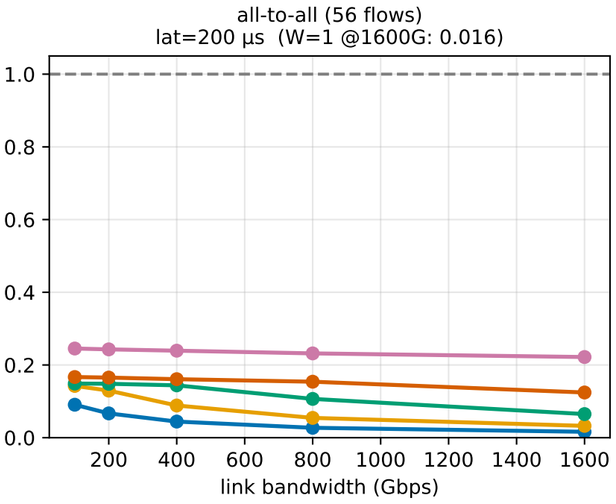


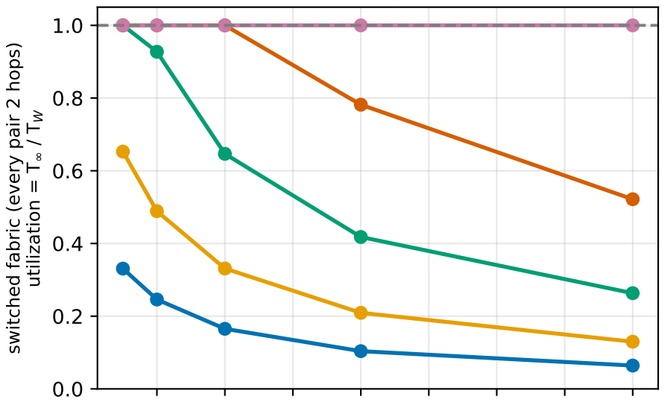


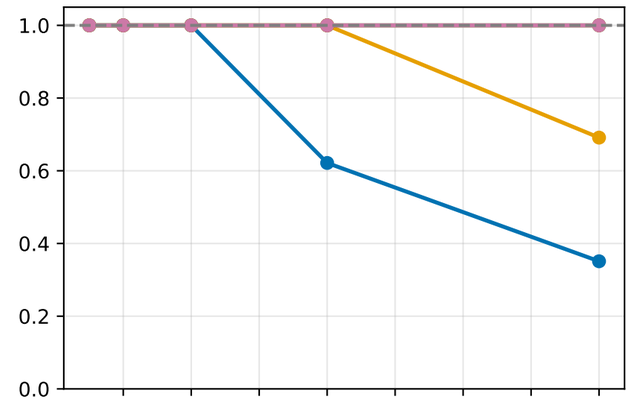


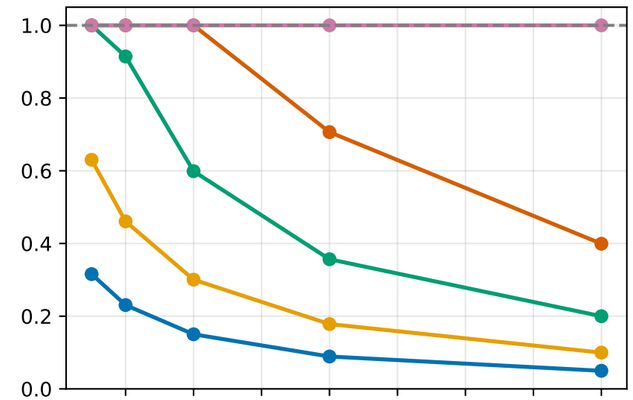

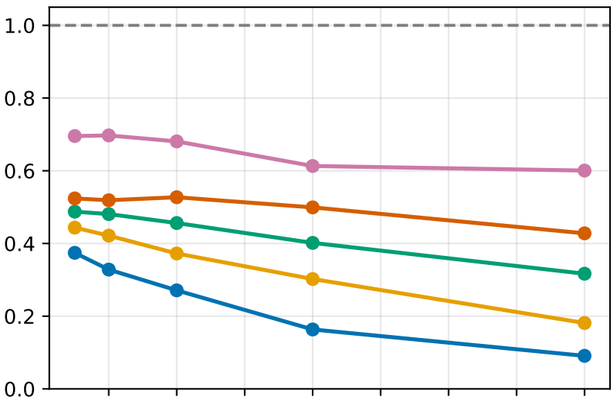

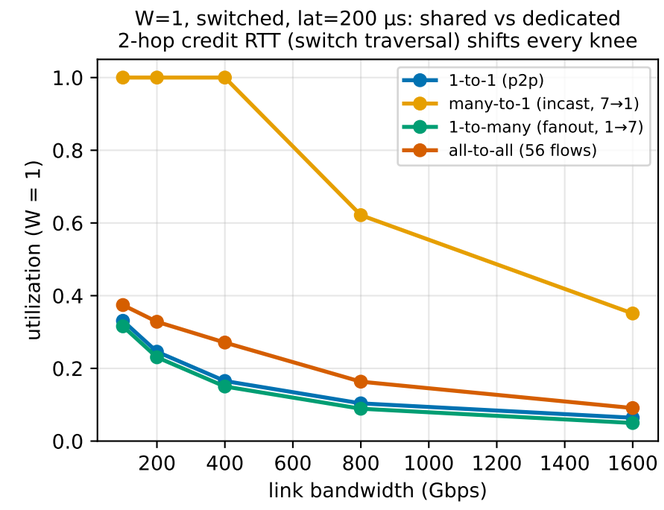

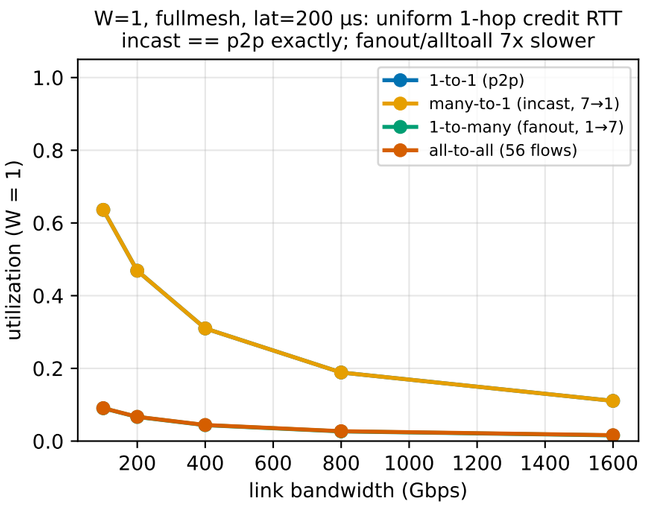

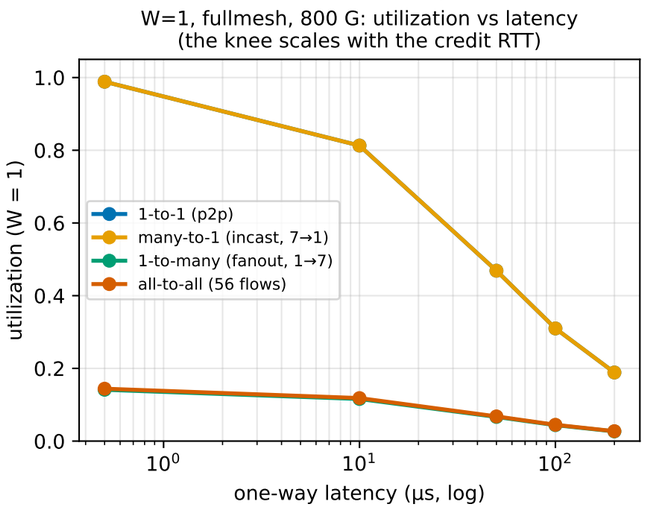


```
Raw times @800 G, lat=200 µs, W=1 (ms)

fullmesh p2p         15.28 (1.00x)
fullmesh incast      15.28 (1.00x)
fullmesh fanout     108.19 (7.08x)
fullmesh alltoall   108.26 (7.08x)
switched p2p         30.58
switched incast      31.09
switched fanout     216.47
switched alltoall   217.12

BDP law per FLOW: W·chunk/(ser+2·lat).
One VC per endpoint → fanout and
alltoall share ONE window: the sender
serializes 224 chunks through W.
W=1 fullmesh = 7.1x p2p (uniform
1-hop RTT; switched adds a switch
traversal to every credit RTT).
```