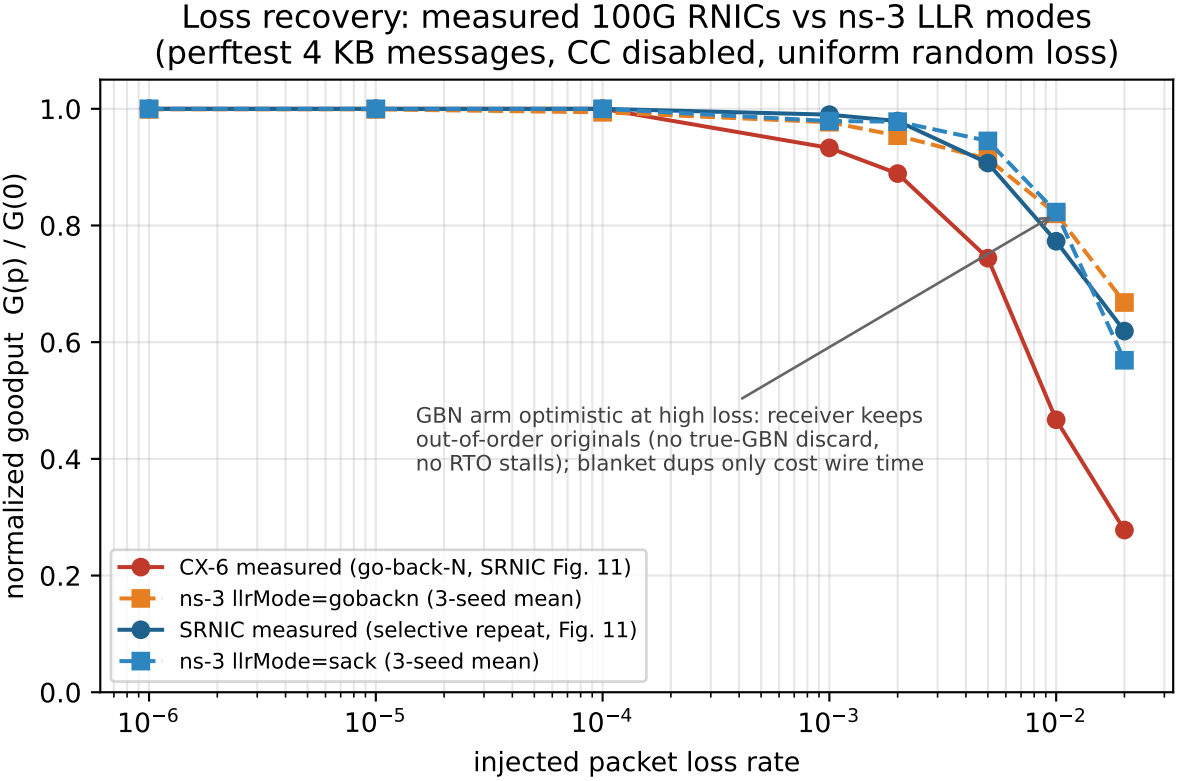
Loss recovery: measured 100G RNICs vs ns-3 LLR modes
(perftest 4 KB messages, CC disabled, uniform random loss)
normalized goodput G(p) / G(0)
1.0
0.8
0.6
0.4
0.2
0.0
10^{-6}
10^{-5}
10^{-4}
10^{-3}
10^{-2}
injected packet loss rate
GBN arm optimistic at high loss: receiver keeps
out-of-order originals (no true-GBN discard,
no RTO stalls); blanket dups only cost wire time
CX-6 measured (go-back-N, SRNIC Fig. 11)
ns-3 lIrMode=gobackn (3-seed mean)
SRNIC measured (selective repeat, Fig. 11)
ns-3 lIrMode=sack (3-seed mean)