
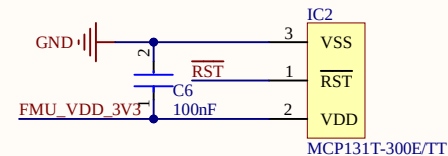
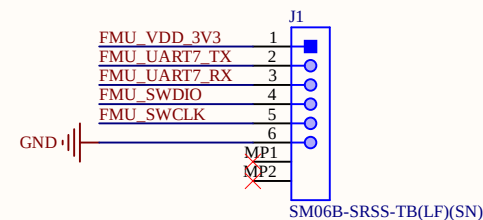
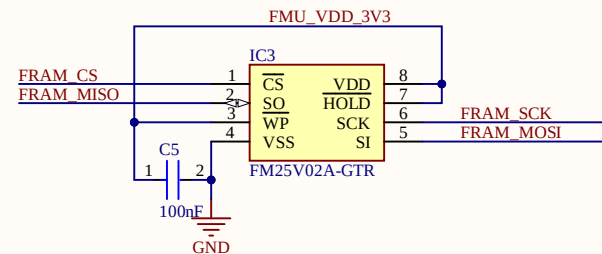
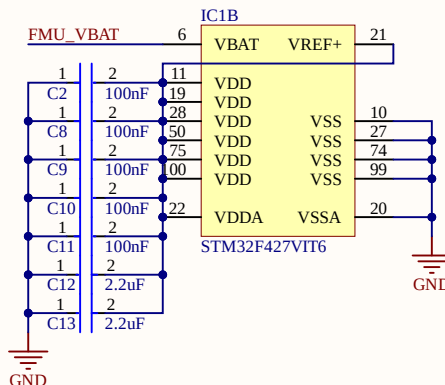





A

A


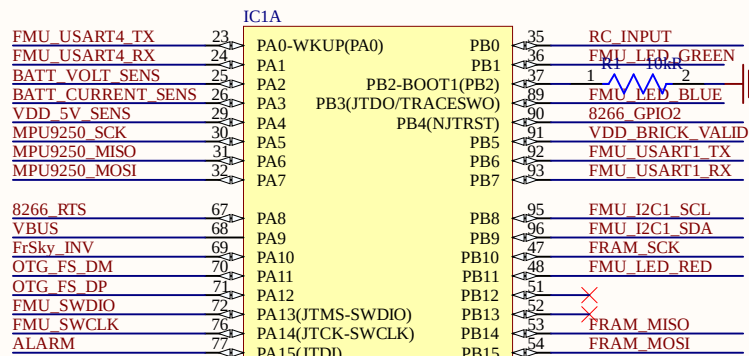


B

B

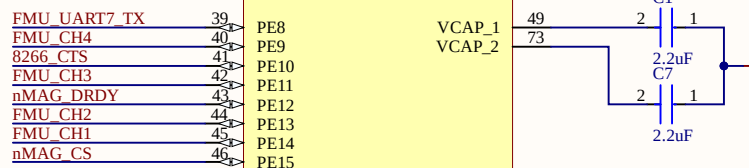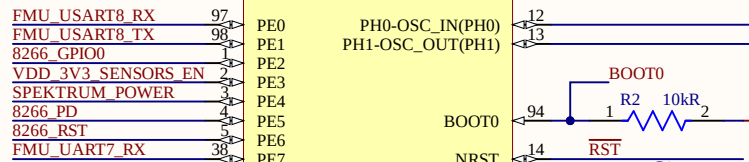
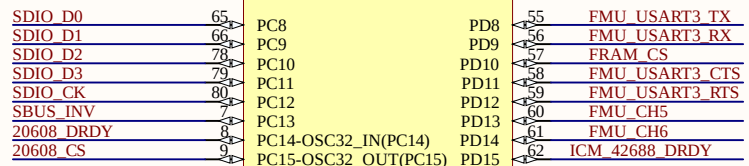


STM32F427VIT6

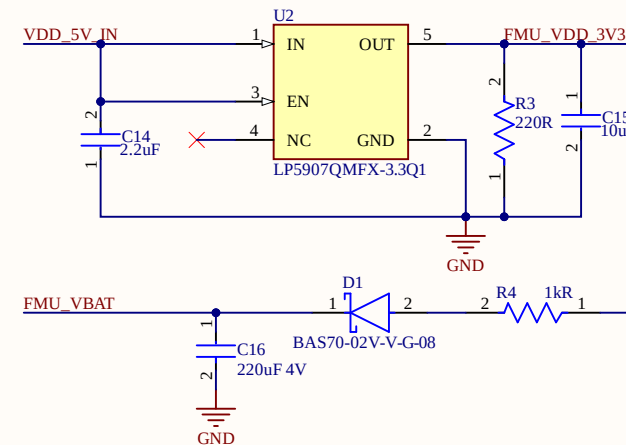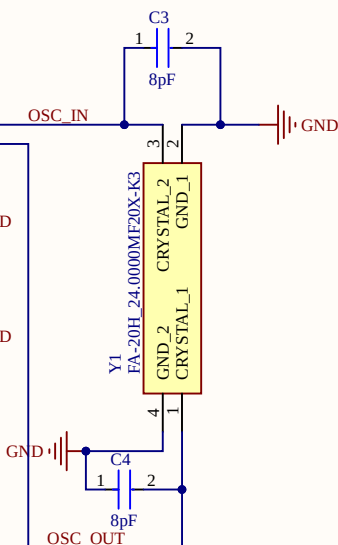


D






D















Title		
PIXRACER-FMU		
Size	Number	Revision
A4		
Date:	1/06/2026	Sheet of
File:	C:\Users\...\pixracer_fm_u.SchDoc	Drawn By:

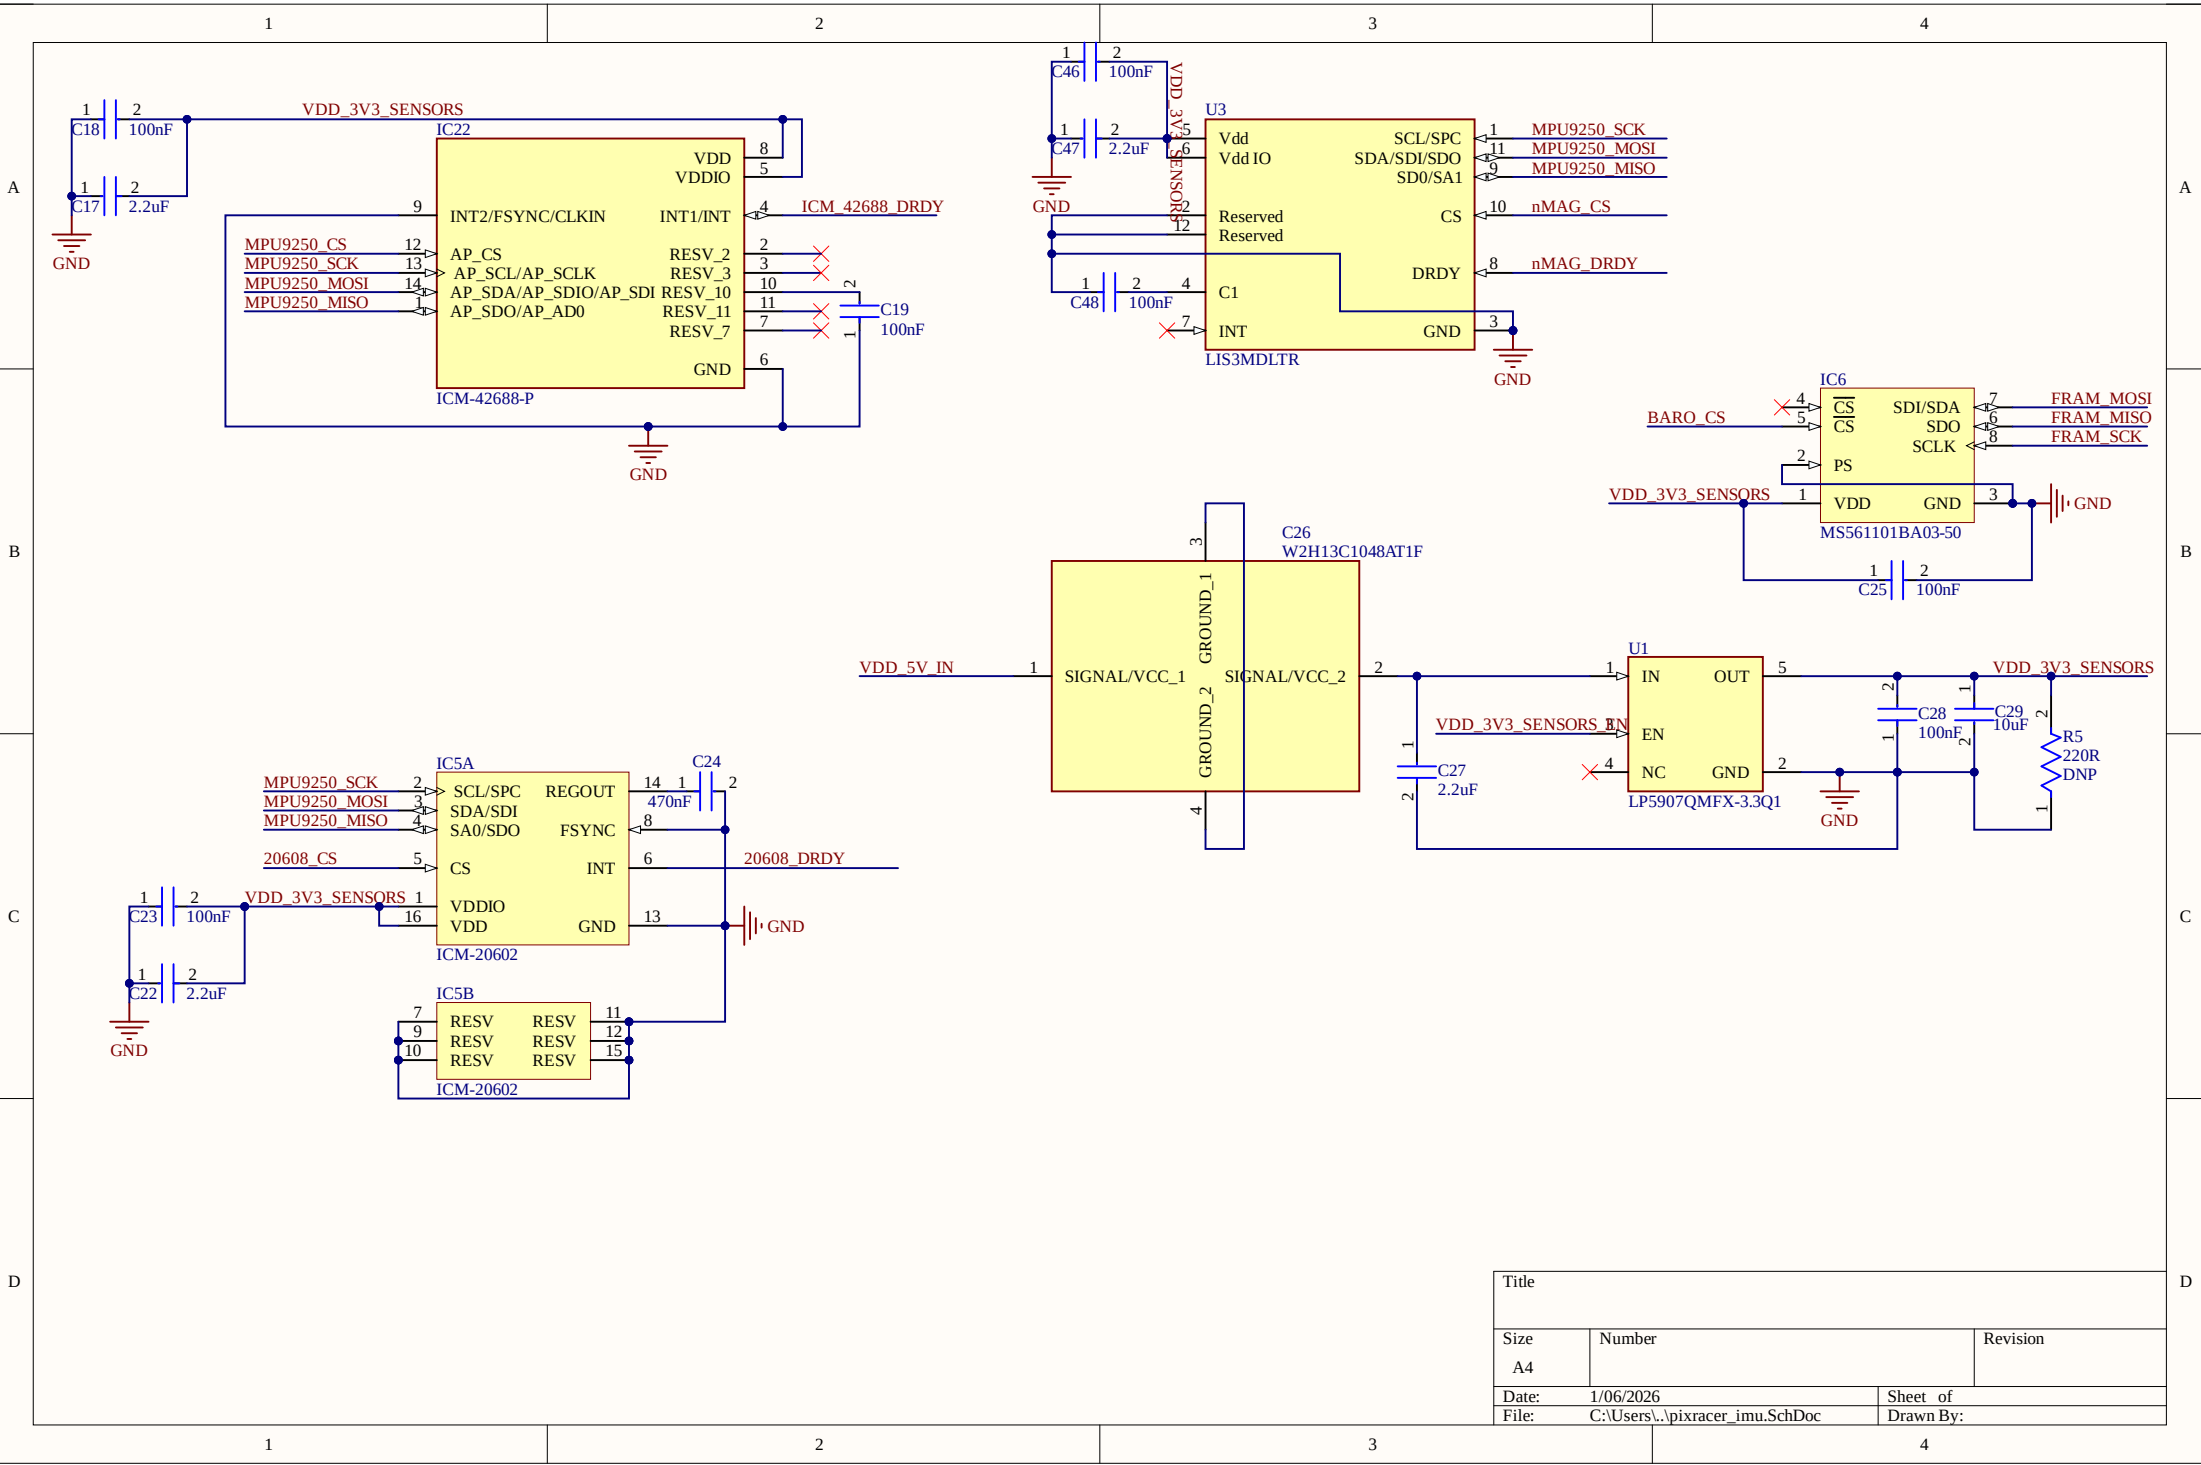


Title		
Size	Number	Revision
A4		
Date:	1/06/2026	Sheet of
File:	C:\Users\...\pixracer_imu.SchDoc	Drawn By:

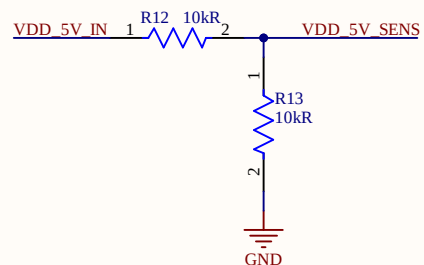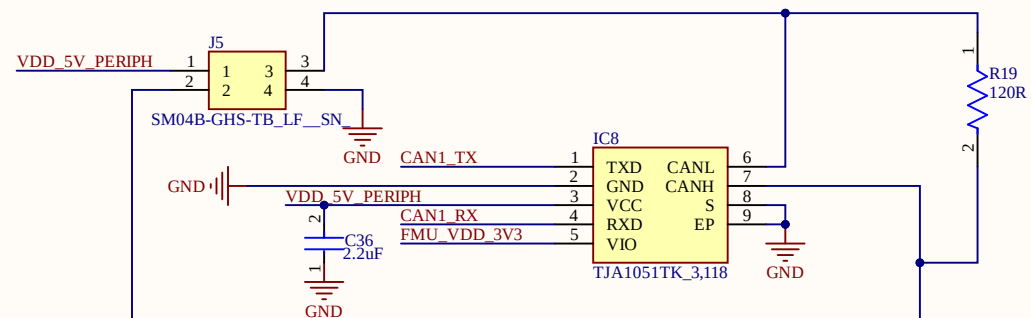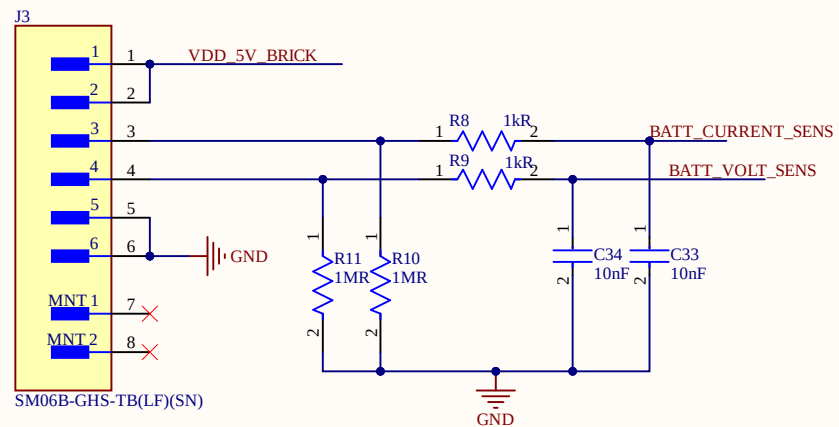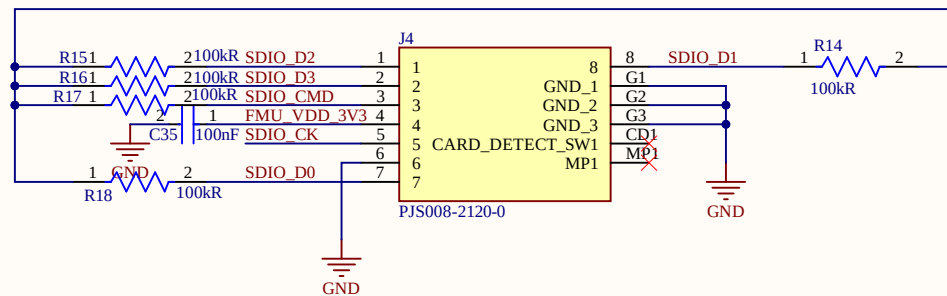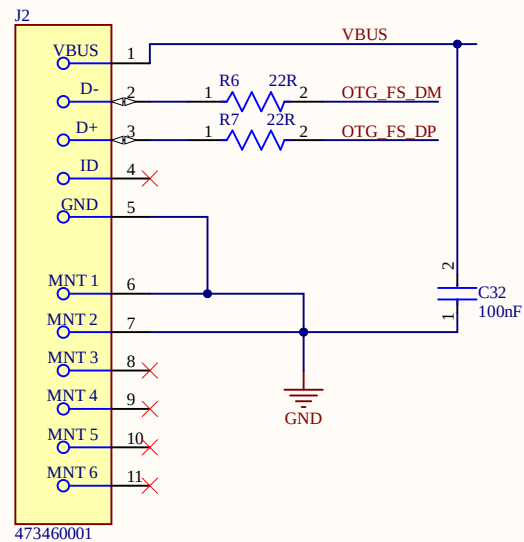


Title		
Size A4	Number	Revision
Date:	1/06/2026	Sheet of
File:	C:\Users\...\pixmaper_sd_usb_can_i2c.Sch	Drawn By:

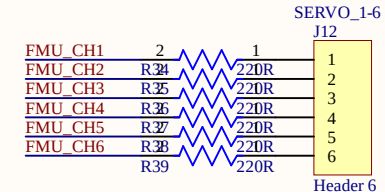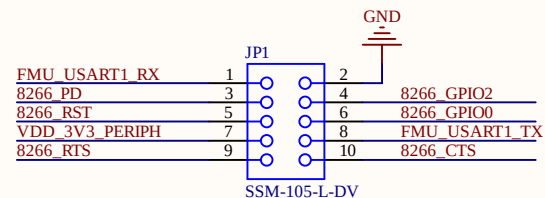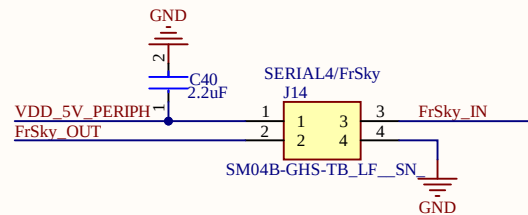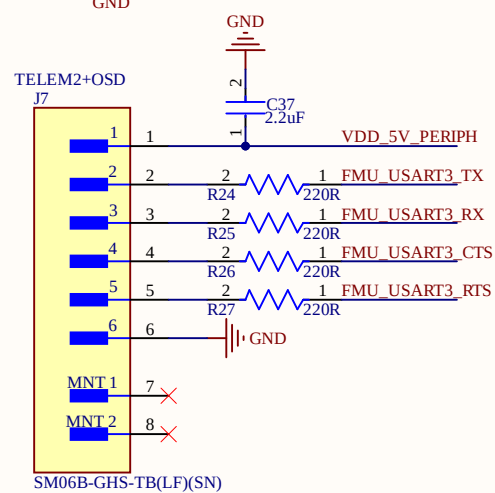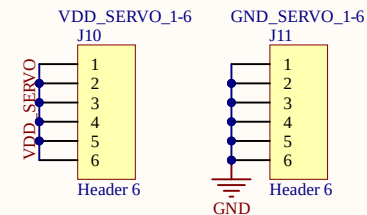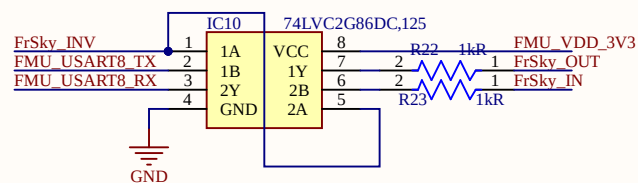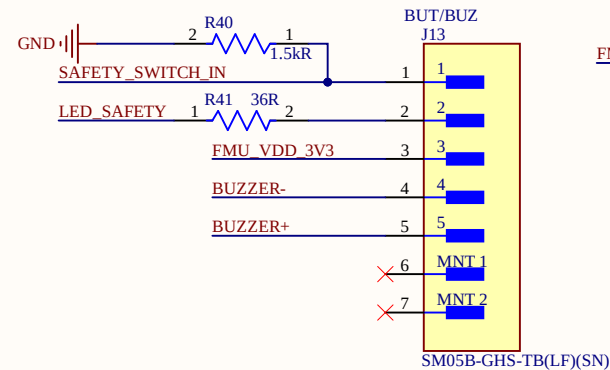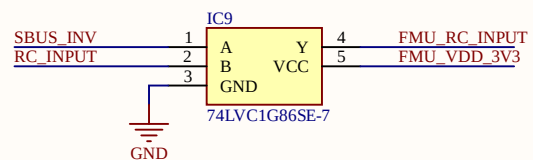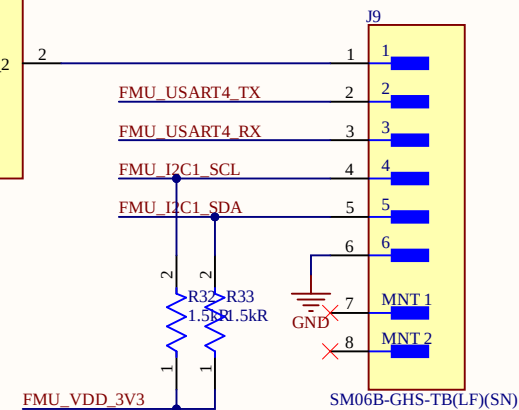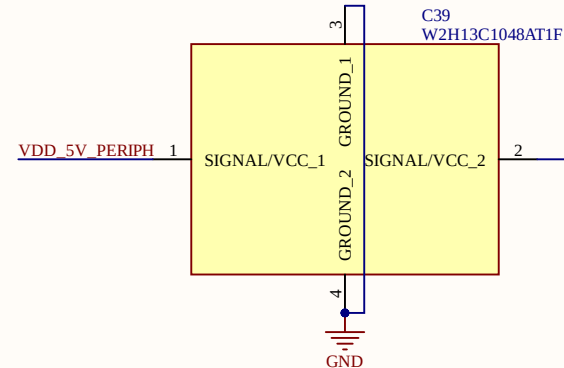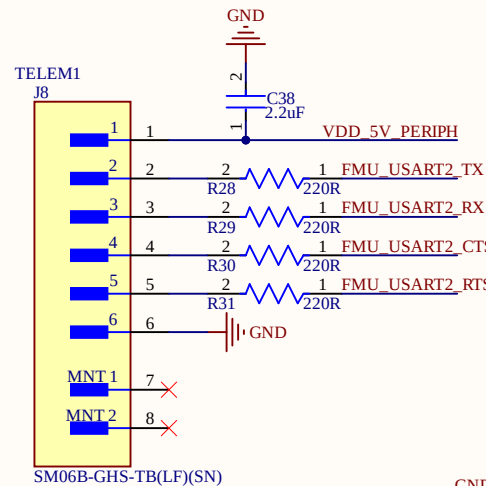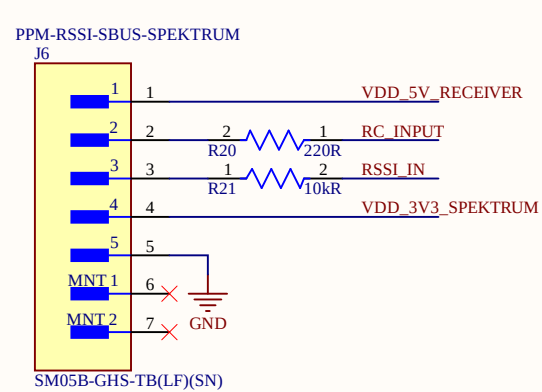

Title		
Size A4	Number	Revision
Date:	1/06/2026	Sheet of
File:	C:\Users\...\pixracer_serials.SchDoc	Drawn By:

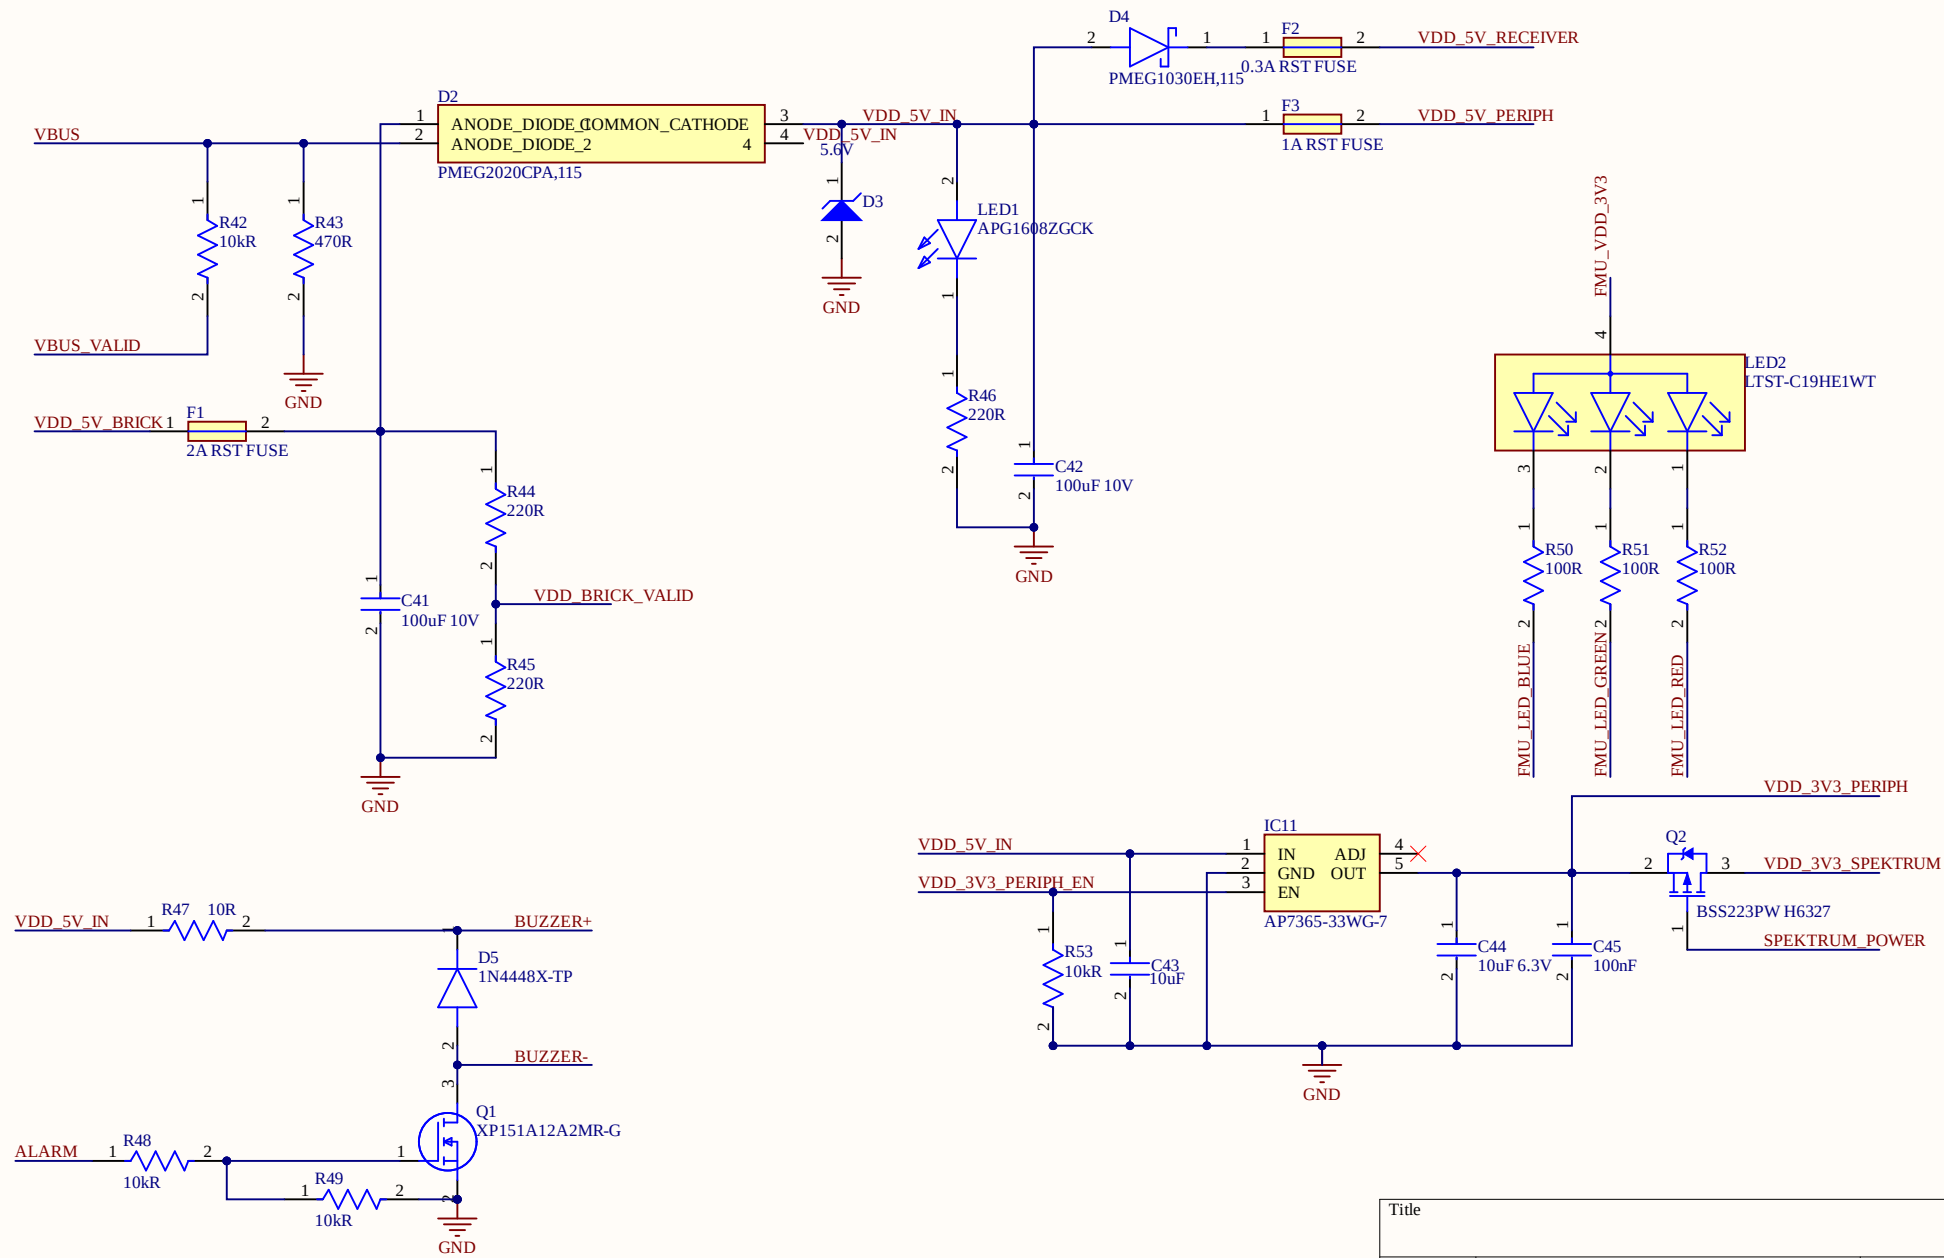

Title		
Size	Number	Revision
A4		
Date:	1/06/2026	Sheet of
File:	C:\Users\...\pixracer_power.SchDoc	Drawn By:

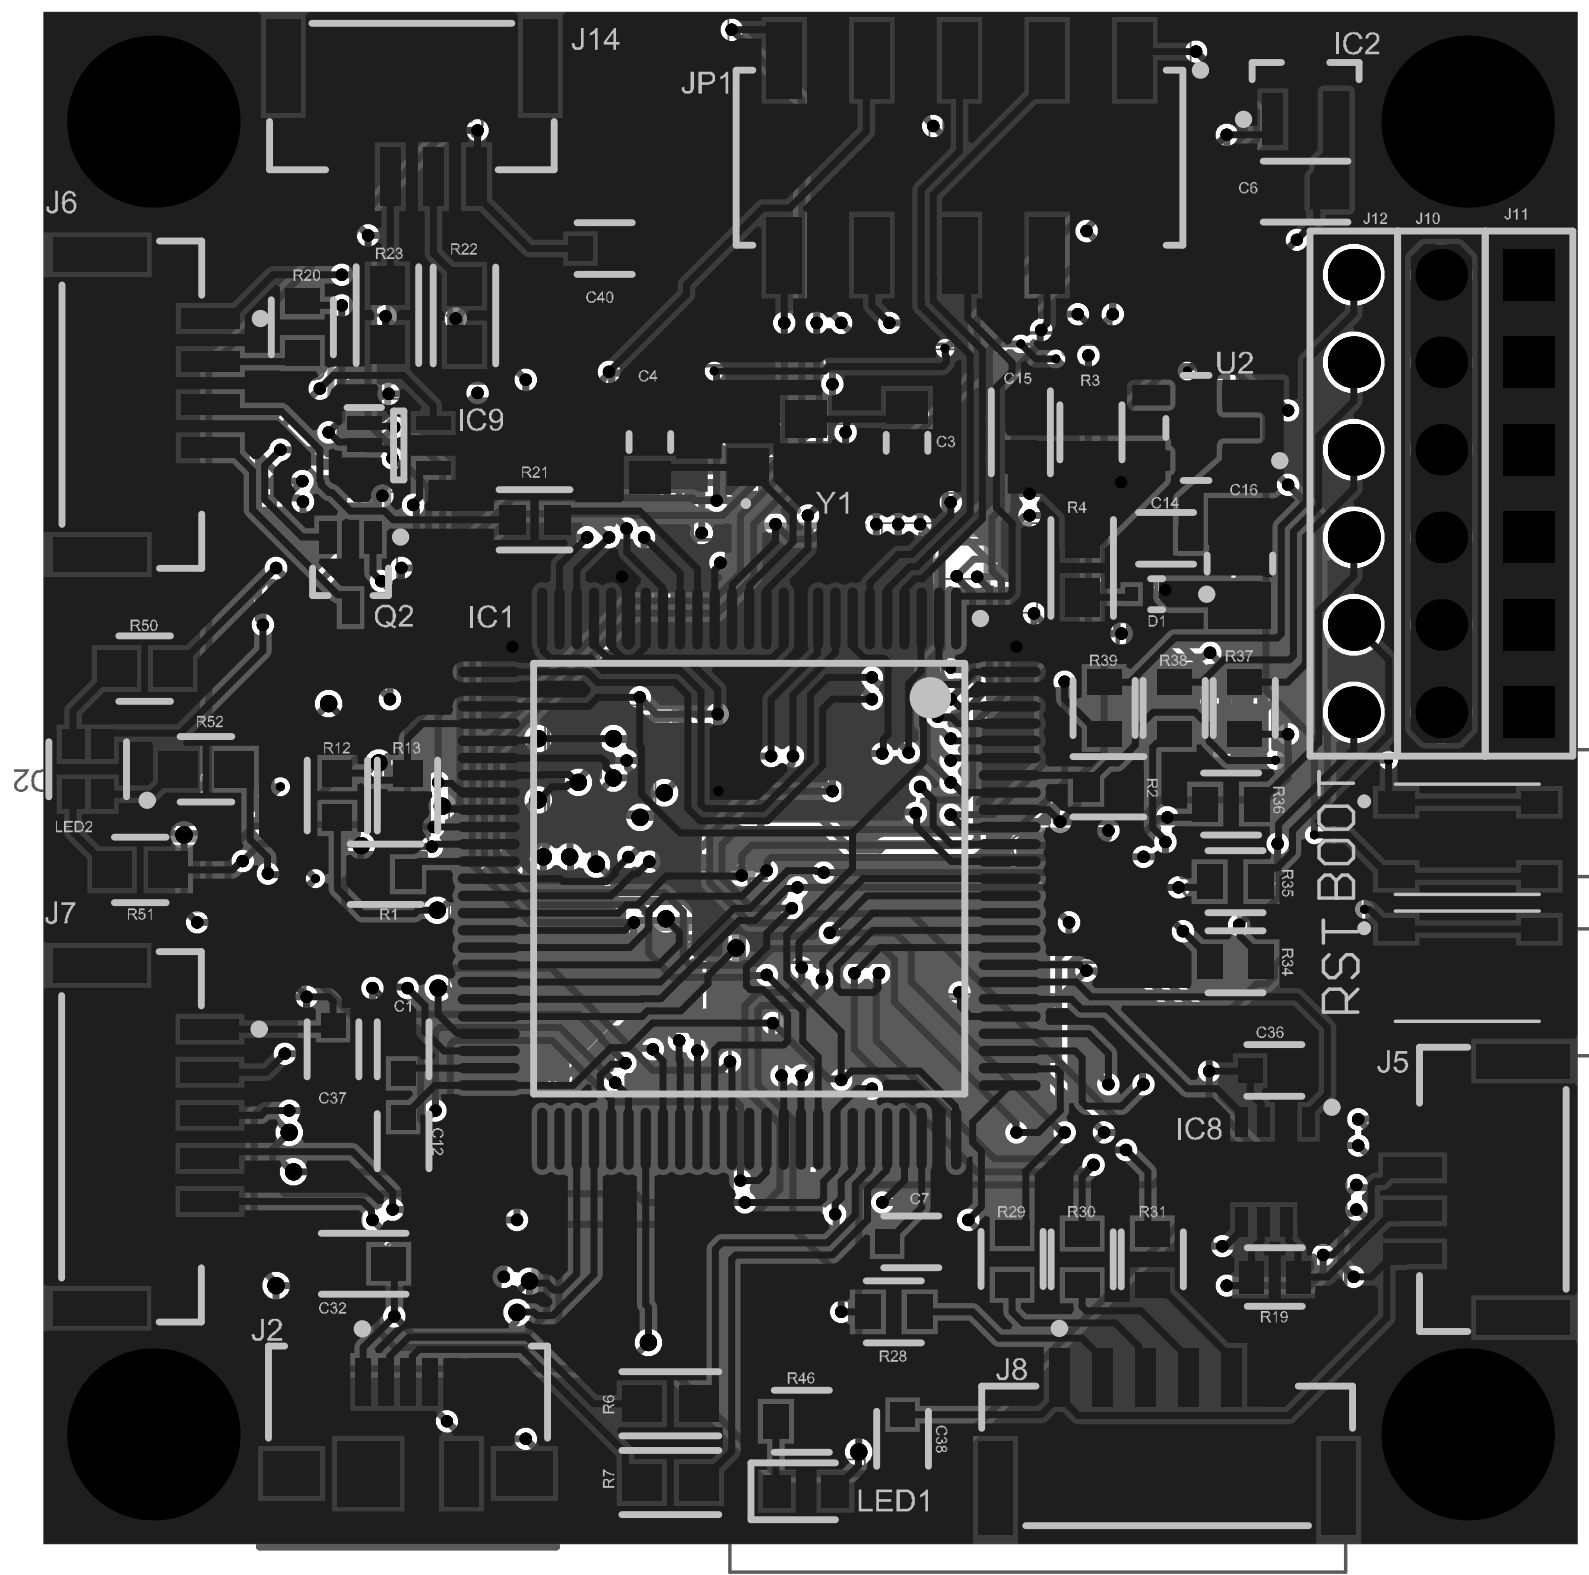

Altium
2175 Salk Avenue
Suite 200
Carlsbad, CA 92008
USA

Project Title: Bill of Materials for Project [QUT_Autopilot_Pixracer_v2.PrjPcb] (No PCB Document Selected)
Project File Name: QUT_Autopilot_Pixracer_v2.PrjPcb
Assembly Variant: None

Suite 200
Carlsbad, CA 92008
USA

[illegible]

Approved	Notes
----------	-------

Notes

Design Rules Verification Report

Filename : C:\Users\heckej\OneDrive - Queensland University of Technology\Desktop\

Warnings 0
Rule Violations 125

Warnings	
Total	0

Rule Violations	
Clearance Constraint (Gap=0.15mm) (All),(All)	0
Short-Circuit Constraint (Allowed=No) (All),(All)	0
Un-Routed Net Constraint (All)	0
Modified Polygon (Allow modified: No), (Allow shelved: No)	0
Width Constraint (Min=0.127mm) (Max=0.254mm) (Preferred=0.203mm) (All)	0
Width Constraint (Min=0.508mm) (Max=0.508mm) (Preferred=0.508mm) ((InNet("VDD_1V8_SENSORS") AND	0
Power Plane Connect Rule(Relief Connect)(Expansion=0.508mm) (Conductor Width=0.254mm) (Air Gap=0.254mm)	0
Hole Size Constraint (Min=0.16mm) (Max=4mm) (All)	0
Hole To Hole Clearance (Gap=0.3mm) (All),(All)	0
Minimum Solder Mask Sliver (Gap=0.1mm) (All),(All)	0
Silk To Solder Mask (Clearance=0.16mm) (IsPad),(All)	62
Silk to Silk (Clearance=0.254mm) (All),(All)	63
Net Antennae (Tolerance=0mm) (All)	0
Height Constraint (Min=0mm) (Max=25.4mm) (Preferred=12.7mm) (All)	0
Total	125

Silk To Solder Mask (Clearance=0.16mm) (IsPad),(All)

Silk To Solder Mask Clearance Constraint (0.124mm < 0.16mm) Between Arc (17.907mm,23.749mm) on Bottom Overlay And Pac
Silk To Solder Mask Clearance Constraint (Collision < 0.16mm) Between Arc (33.708mm,27.559mm) on Top Overlay And Pac
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad BOOT-1(39.2mm,21.522mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad BOOT-2(43.35mm,21.522mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad BOOT-3(39.2mm,19.372mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad BOOT-4(43.35mm,19.372mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.129mm < 0.16mm) Between Pad C10-1(15.113mm,7.402mm) on Bottom Layer And Text "C10"
Silk To Solder Mask Clearance Constraint (0.055mm < 0.16mm) Between Pad C1-1(10.414mm,15.051mm) on Top Layer And Text "C1"
Silk To Solder Mask Clearance Constraint (0.094mm < 0.16mm) Between Pad C14-2(33.231mm,29.182mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.091mm < 0.16mm) Between Pad C16-2(34.671mm,29.673mm) on Top Layer And Text "C16"
Silk To Solder Mask Clearance Constraint (0.129mm < 0.16mm) Between Pad C18-2(4.028mm,21.336mm) on Bottom Layer And Text "C18"
Silk To Solder Mask Clearance Constraint (0.137mm < 0.16mm) Between Pad C2-1(19.141mm,12.827mm) on Bottom Layer And Text "C2"
Silk To Solder Mask Clearance Constraint (0.129mm < 0.16mm) Between Pad C23-1(20.03mm,20.32mm) on Bottom Layer And Text "C23"
Silk To Solder Mask Clearance Constraint (0.152mm < 0.16mm) Between Pad C24-2(12.7mm,22.006mm) on Bottom Layer And Text "C24"
Silk To Solder Mask Clearance Constraint (0.129mm < 0.16mm) Between Pad C25-1(8.255mm,8.164mm) on Bottom Layer And Text "C25"
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C26-3(28.194mm,37.338mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C26-3(28.194mm,37.338mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C26-4(28.194mm,36.068mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C26-4(28.194mm,36.068mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.12mm < 0.16mm) Between Pad C27-1(24.257mm,37.719mm) on Bottom Layer And Text "C27"
Silk To Solder Mask Clearance Constraint (0.062mm < 0.16mm) Between Pad C29-2(11.557mm,25.471mm) on Bottom Layer And Text "C29"
Silk To Solder Mask Clearance Constraint (0.126mm < 0.16mm) Between Pad C34-2(34.863mm,19.939mm) on Bottom Layer And Text "R14"
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C39-3(4.826mm,15.748mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C39-3(4.826mm,15.748mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C39-4(4.826mm,14.478mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.095mm < 0.16mm) Between Pad C39-4(4.826mm,14.478mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.106mm < 0.16mm) Between Pad C44-1(11.998mm,32.322mm) on Bottom Layer And Text "C44"
Silk To Solder Mask Clearance Constraint (0.136mm < 0.16mm) Between Pad C45-1(14.05mm,32.343mm) on Bottom Layer And Text "C45"
Silk To Solder Mask Clearance Constraint (0.157mm < 0.16mm) Between Pad C6-2(35.85mm,39.243mm) on Top Layer And Text "C6"
Silk To Solder Mask Clearance Constraint (0.129mm < 0.16mm) Between Pad C8-1(19.177mm,7.402mm) on Bottom Layer And Text "C8"
Silk To Solder Mask Clearance Constraint (0.129mm < 0.16mm) Between Pad C9-1(17.145mm,7.402mm) on Bottom Layer And Text "C9"
Silk To Solder Mask Clearance Constraint (0.1mm < 0.16mm) Between Pad D2-1(29.733mm,33.943mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.1mm < 0.16mm) Between Pad D2-2(28.433mm,33.943mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad D2-3(29.083mm,32.893mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad D2-3(29.083mm,32.893mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad D2-3(29.083mm,32.893mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad D2-3(29.083mm,32.893mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad IC11-4(15.718mm,30.8mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad IC11-5(15.718mm,32.7mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad IC9-1(9.287mm,32.527mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad J14-5(14.393mm,42.878mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad J14-6(6.943mm,42.878mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad J4-G3(27.237mm,1.038mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad J5-5(42.878mm,6.562mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad J5-6(42.878mm,14.012mm) on Top Layer And Track
Silk To Solder Mask Clearance Constraint (0.15mm < 0.16mm) Between Pad Q1-1(17.084mm,41.913mm) on Bottom Layer And Track
Silk To Solder Mask Clearance Constraint (0.091mm < 0.16mm) Between Pad R2-2(31.512mm,21.971mm) on Top Layer And Text "R2"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R25-1(9.767mm,12.192mm) on Bottom Layer And Text "R25"
Silk To Solder Mask Clearance Constraint (0.097mm < 0.16mm) Between Pad R29-1(28.067mm,9.017mm) on Top Layer And Text "R29"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R30-1(30.099mm,9.005mm) on Top Layer And Text "R30"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R31-1(32.131mm,9.005mm) on Top Layer And Text "R31"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R36-1(35.167mm,21.471mm) on Top Layer And Text "R36"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R38-1(32.766mm,25.007mm) on Top Layer And Text "R38"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R39-1(30.734mm,25.007mm) on Top Layer And Text "R39"
Silk To Solder Mask Clearance Constraint (0.109mm < 0.16mm) Between Pad R45-2(34.798mm,27.063mm) on Bottom Layer And Text "R45"

Silk To Solder Mask (Clearance=0.16mm) (IsPad),(All)

Silk To Solder Mask Clearance Constraint: (0.109mm < 0.16mm) Between Pad R5-1(12.585mm,28.956mm) on Bottom Layer And Text "R5"

Silk To Solder Mask Clearance Constraint: (0.15mm < 0.16mm) Between Pad RST-1(39.2mm,17.839mm) on Top Layer And Track

Silk To Solder Mask Clearance Constraint: (0.15mm < 0.16mm) Between Pad RST-2(43.35mm,17.839mm) on Top Layer And Track

Silk To Solder Mask Clearance Constraint: (0.15mm < 0.16mm) Between Pad RST-3(39.2mm,15.689mm) on Top Layer And Track

Silk To Solder Mask Clearance Constraint: (0.15mm < 0.16mm) Between Pad RST-4(43.35mm,15.689mm) on Top Layer And Track

Silk To Solder Mask Clearance Constraint: (0.144mm < 0.16mm) Between Pad Y1-2(22.098mm,31.239mm) on Top Layer And Text "Y1"

Silk to Silk (Clearance=0.254mm) (All),(All)

Silk To Silk Clearance Constraint (0.033mm < 0.254mm) Between Arc (38.275mm,17.864mm) on Top Overlay And Text "RST"
Silk To Silk Clearance Constraint (Collision < 0.254mm) Between Arc (38.275mm,17.864mm) on Top Overlay And Text "RST" (38.092mm,15.431mm)
Silk To Silk Clearance Constraint (0.186mm < 0.254mm) Between Arc (38.275mm,21.547mm) on Top Overlay And Text "BOOT"
Silk To Silk Clearance Constraint (0.223mm < 0.254mm) Between Arc (38.275mm,21.547mm) on Top Overlay And Text "BOOT"
Silk To Silk Clearance Constraint (0.187mm < 0.254mm) Between Text "C11" (20.551mm,11.143mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.001mm < 0.254mm) Between Text "C12" (11.27mm,12.071mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.029mm < 0.254mm) Between Text "C14" (32.124mm,30.066mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.127mm < 0.254mm) Between Text "C22" (20.033mm,23.997mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.173mm < 0.254mm) Between Text "C3" (25.898mm,31.844mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.12mm < 0.254mm) Between Text "C32" (7.995mm,6.698mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.128mm < 0.254mm) Between Text "C33" (29.98mm,18.636mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.128mm < 0.254mm) Between Text "C34" (34.678mm,20.922mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.113mm < 0.254mm) Between Text "C34" (34.678mm,20.922mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.12mm < 0.254mm) Between Text "C35" (26.806mm,18.509mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.105mm < 0.254mm) Between Text "C36" (35.171mm,14.699mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.128mm < 0.254mm) Between Text "C38" (25.875mm,3.437mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.036mm < 0.254mm) Between Text "C42" (22.231mm,26.383mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.021mm < 0.254mm) Between Text "C43" (21.598mm,34.003mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.12mm < 0.254mm) Between Text "C48" (13.622mm,13.597mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.053mm < 0.254mm) Between Text "D1" (32.031mm,26.636mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.17mm < 0.254mm) Between Text "D3" (34.171mm,37.911mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.213mm < 0.254mm) Between Text "D3" (34.171mm,37.911mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.077mm < 0.254mm) Between Text "D5" (17.029mm,37.405mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.046mm < 0.254mm) Between Text "IC10" (27.329mm,26.534mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.036mm < 0.254mm) Between Text "IC10" (27.329mm,26.534mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.048mm < 0.254mm) Between Text "IC10" (27.329mm,26.534mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.184mm < 0.254mm) Between Text "IC11" (18.474mm,33.462mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.112mm < 0.254mm) Between Text "IC11" (18.474mm,33.462mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.112mm < 0.254mm) Between Text "IC11" (18.474mm,33.462mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.101mm < 0.254mm) Between Text "IC11" (18.474mm,33.462mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.139mm < 0.254mm) Between Text "IC2" (37.469mm,43.241mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.159mm < 0.254mm) Between Text "IC2" (37.469mm,43.241mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.118mm < 0.254mm) Between Text "J10" (39.788mm,38.323mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.245mm < 0.254mm) Between Text "J11" (42.358mm,38.45mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.118mm < 0.254mm) Between Text "J12" (38.265mm,38.323mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.197mm < 0.254mm) Between Text "J13" (7.675mm,38.927mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.179mm < 0.254mm) Between Text "J13" (7.675mm,38.927mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.068mm < 0.254mm) Between Text "J2" (6.039mm,5.907mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.068mm < 0.254mm) Between Text "J2" (6.039mm,5.907mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.179mm < 0.254mm) Between Text "J3" (37.398mm,38.927mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.182mm < 0.254mm) Between Text "J3" (37.398mm,38.927mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.221mm < 0.254mm) Between Text "J5" (38.673mm,13.691mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.077mm < 0.254mm) Between Text "J8" (27.626mm,4.764mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.193mm < 0.254mm) Between Text "J9" (5.775mm,36.895mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.116mm < 0.254mm) Between Text "JP1" (18.5mm,42.102mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.117mm < 0.254mm) Between Text "JP1" (18.5mm,42.102mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.145mm < 0.254mm) Between Text "Q2" (9.607mm,26.624mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.151mm < 0.254mm) Between Text "Q2" (9.607mm,26.624mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.007mm < 0.254mm) Between Text "R1" (9.763mm,18.127mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.118mm < 0.254mm) Between Text "R14" (35.942mm,19.143mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.026mm < 0.254mm) Between Text "R19" (35.304mm,6.446mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.107mm < 0.254mm) Between Text "R26" (12.32mm,10.51mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.107mm < 0.254mm) Between Text "R28" (24.255mm,5.303mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.216mm < 0.254mm) Between Text "R32" (7.998mm,29.856mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.007mm < 0.254mm) Between Text "R42" (31.496mm,25.112mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.057mm < 0.254mm) Between Text "R43" (31.497mm,29.687mm) on Bottom Overlay And Track

Silk to Silk (Clearance=0.254mm) (All),(All)
Silk To Silk Clearance Constraint (0.107mm < 0.254mm) Between Text "R46" (21.589mm,4.668mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.057mm < 0.254mm) Between Text "R50" (2.539mm,26.512mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.057mm < 0.254mm) Between Text "R51" (2.443mm,18.13mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.184mm < 0.254mm) Between Text "R52" (4.445mm,23.718mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.227mm < 0.254mm) Between Text "U2" (34.031mm,33.974mm) on Top Overlay And Track
Silk To Silk Clearance Constraint (0.131mm < 0.254mm) Between Text "U3" (20.797mm,18.127mm) on Bottom Overlay And Track
Silk To Silk Clearance Constraint (0.136mm < 0.254mm) Between Text "U3" (20.797mm,18.127mm) on Bottom Overlay And Track