



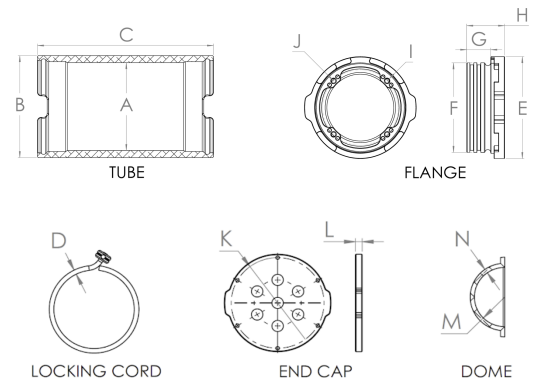
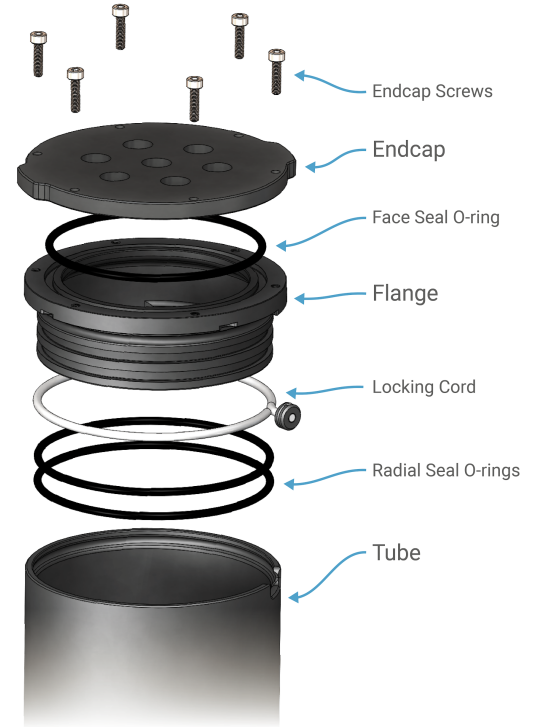


Tubes

Series Diameter [mm]	Tube Material / Finish	(A) Tube ID [mm]	(B) Tube OD [mm]	(C) Overall Length ¹ [mm]	Weight [g]	Depth Rating ² [msw]	Item Number
 50 (2")	6061-T6 Aluminum, Anodized	Ø50.0 ± 0.5	Ø58.0 ± 0.2	100	169	1000	BR-106277-100
				150	261		BR-106277-150
				300	536		BR-106277-300
	Cast Acrylic	Ø49.5 ± 1.5	Ø58.0 ± 1.0	100	75	225	BR-100230-101
				150	115	130	BR-100230-151
				300	238	100	BR-100230-301
 75 (3")	6061-T6 Aluminum, Anodized	Ø79.0 ± 0.5	Ø86.5 ± 0.3	150	328	1000	BR-106278-150
				240	530		BR-106278-240
				300	665		BR-106278-300
				400	890		BR-106278-400
	Cast Acrylic	Ø76.2 ± 2.0	Ø88.9 ± 0.7	150	264	275	BR-102649-150
				240	442	150	BR-102649-240
 100 (4")	6061-T6 Aluminum, Anodized	Ø103.0 ± 0.5	Ø112.0 ± 0.3	200	707	1000	BR-106279-200
				300	1066	1000	BR-106279-300
				400	1426	900	BR-106279-400
	Cast Acrylic	Ø101.6 ± 2.1	Ø114.3 ± 0.8	200	488	140	BR-101052-200
				300	746	100	BR-101052-300
				400	1004	60	BR-101052-400
 130 (5")	6061-T6 Aluminum, Anodized	Ø130 ± 0.5	Ø138.7 ± 0.3	300	1450	1000	BR-106280-300
				500	2441	650	BR-106280-500
 150 (6")	6061-T6 Aluminum, Anodized	Ø150 ± 0.5	Ø163.9 ± 0.3	300	2510	800	BR-106281-300
				500	4360	800	BR-106281-500
 200 (8")	6061-T6 Aluminum, Anodized	Ø200 ± 0.5	Ø214.2 ± 0.3	300	3420	800	BR-106282-300
				500	5915	800	BR-106282-500

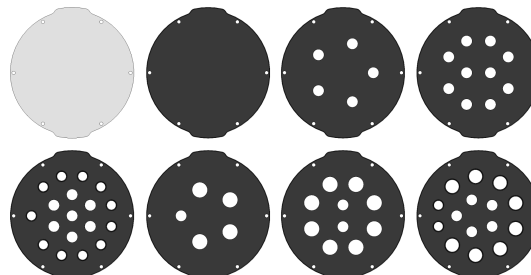
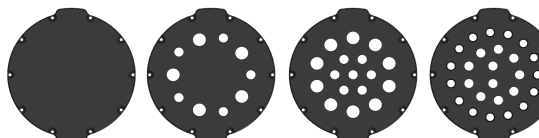
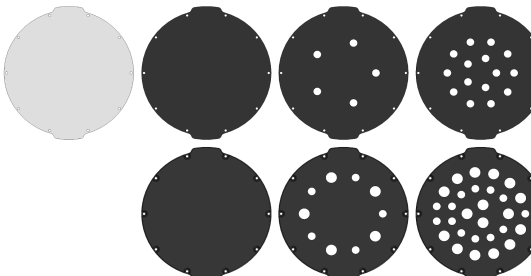
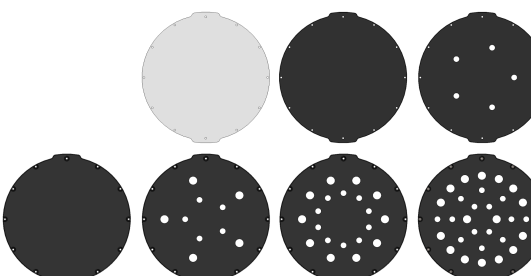

¹ Overall tube length tolerance ± 0.5 mm

² The depth ratings for cast acrylic components are applicable only for short-term submersions of less than two weeks. For longer submersion, use aluminum components only.

Flanges

Series Diameter [mm]	Face Seal O-ring	Radial Seal O-ring	Material / Finish	(D) Locking Cord Diameter [mm]	(E) Flange OD [mm]	(F) Piston Diameter [mm]	(G) Piston Length [mm]	(H) Overall Length [mm]	(I) Inner Mounting Holes	(J) Inner Mounting Hole Circle	Weight [g]	Item Number
 50 (2")	-030 Buna-N 70A	-031 Buna-N 70A	6061-T6 Aluminum, Anodized	2.8 ± 0.2	Ø58.0 ± 0.1	Ø50.93 ± 0.05	15.5 ± 0.1	21.5 ± 0.1	4x M3x0.5	Ø43.0 ± 0.1	41	BR-100276-998
 75 (3")	-148 Buna-N 70A	-150 Buna-N 70A			Ø88.9 ± 0.1	Ø79.93 ± 0.05				Ø68.6 ± 0.1	81	BR-100647
 100 (4")	-154 Buna-N 70A	-154 Buna-N 70A			Ø114.3 ± 0.1	Ø103.91 ± 0.05	19.1 ± 0.1	27.0 ± 0.1		Ø94.0 ± 0.1	107	BR-100665
 130 (5")	-157 Buna-N 70A	-248 Buna-N 70A			Ø137.7 ± 0.1	Ø130.89 ± 0.05	28.0 ± 0.1	34.0 ± 0.1	8x M3x0.5	Ø115.0 ± 0.1	238	BR-102200
 150 (6")	-162 Buna-N 70A	-255 Buna-N 70A			Ø165.4 ± 0.1	Ø156.40 ± 0.06	30.0 ± 0.1	36.0 ± 0.1		Ø142.0 ± 0.1	308	BR-102201
 200 (8")	-170 Buna-N 70A	-265 Buna-N 70A			Ø215.7 ± 0.1	Ø205.91 ± 0.07	36.0 ± 0.1	42.0 ± 0.1		Ø186.0 ± 0.1	540	BR-102202

End Caps

Series Diameter [mm]		Material	Hole Configuration	Endcap Screws (SS316 Socket Head Cap Screws)	(K) Endcap Screw Hole Circle	(L) Thickness [mm]	Weight [g]	Depth Rating ² [msw]	Item Number
Warning: Images not to scale									
	50 (2")	Cast Acrylic	Blank (No holes)	6x M2x0.4-10	Ø50.8 ± 0.1	6 4.85 min 6.63 max	17	500	BR-100094
		6061-T6 Aluminum, Anodized	Blank (No holes)				63	1000	BR-100276-999
			2x M10 Hole				59		BR-100276-002
			4x M10x1.5 Threaded				58		BR-100276-004
			1x M10 Hole 8x M6x1 Threaded				60		BR-100276-009
Note: Flange integral to endcap, does not require separate flange									
	75 (3")	Cast Acrylic	Blank (No holes)	6x M3x0.5-12	Ø82.6 ± 0.1	9 7.47 min 9.75 max	58	400	BR-100949-998
		6061-T6 Aluminum, Anodized	Blank (No holes)				102	1000	BR-100949-999
			4x M10 Hole				97		BR-100949-004
			7x M10 Hole				93		BR-100949-007
	100 (4")	Cast Acrylic	Blank (No holes)	6x M3x0.5-16	Ø108.0 ± 0.1	12.7 10.20 min 12.75 max	135	300	BR-102993-998
		6061-T6 Aluminum, Anodized	Blank (No holes)				234	1000	BR-102993-999
			5x M10 Hole				223		BR-102993-005
			10x M10 Hole				212		BR-102993-002
			7x M10 Hole 11x M10x1.5 Threaded				196		BR-102993-003
			4x M14 Hole 1x M10 Hole				215		BR-102993-004
			8x M14 Hole 2x M10 Hole				195		BR-102993-006
			8x M14x1.5 Threaded 5x M10 Hole 2x M10x1.5 Threaded				186		BR-102993-007
	130 (5")	7075-T6 Aluminum, Anodized	Blank (No holes)	10x M3x0.5-12	Ø133.0 ± 0.1	10 ± 0.1	427	1000	BR-102203-001
			5x M14 Hole 5x M10 Hole				393		BR-102203-002
			10x M14 Hole 7x M10 Hole				367		BR-102203-003
			11x M10 Hole				369		BR-102203-004
			15x M10x1.5 Threaded						
	150 (6")	Cast Acrylic	Blank (No holes)	10x M3x0.5-16	Ø158.7 ± 0.1	12.7 10.20 min 12.75 max	331	150	BR-100273-004
		6061-T6 Aluminum, Anodized	Blank (No holes)				359	150	BR-100273-003
			5x M10 Hole				353		BR-100273-002
			15x M10 Hole				339		BR-100273-001
		7075-T6 Aluminum, Anodized	Blank (No holes)				687	1000	BR-102205-001
			5x M10 Hole 5x M14 Hole				647	1000	BR-102205-002
			16x M14 Hole 13x M10 Hole				566	1000	BR-102205-003
	200 (8")	Cast Acrylic	Blank (No holes)	12x M3x0.5-16	Ø209.1 ± 0.1	12.7 10.20 min 12.75 max	564	75	BR-101065-003
		6061-T6 Aluminum, Anodized	Blank (No holes)				599	75	BR-101065-002
			5x M10 Hole				592		BR-101065-001
		7075-T6 Aluminum, Anodized	Blank (No holes)				1458	1000	BR-102206-001
			5x M10 Hole 5x M14 Hole				1370		BR-102206-002
			10x M10 Hole 10x M14 Hole				1283		BR-102206-003
			16x M14 Hole 14x M10 Hole				1191		BR-102206-004

Domes

Series Diameter [mm]	Material	(M) Dome Internal Radius [mm]	(N) Dome Wall Thickness [mm]	Weight [g]	Depth Rating [msw]	Item Number
	50 (2") Hardened PC Dome PC Retaining Ring	18.0 ± 0.1	2.50 ± 0.10	15	1000	BR-100859
	75 (3") Hardened PC Dome PC Retaining Ring	31.25 ± 0.10	3.1 ± 0.1	39	750	BR-101059
	100 (4") Hardened PC Dome PC Retaining Ring	43.5 ± 0.1	3.75 ± 0.10	81	500	BR-100495
	Hardened PC Dome Alum. Retaining Ring	44.0 ± 0.1	5.8 ± 0.10	160	1000	BR-107201
	130 (5") Hardened PC Dome PC Retaining Ring	53.5 ± 0.05	7.00 ± 0.05	195	600	BR-102597

