

65W Photovoltaic module

BP 365J

10 4092US-1 11/10



BP Solar has been pioneering photovoltaic (PV) solar for almost 40 years. This experience shows that the best way to optimize module life and electrical energy production is to attend to every detail in the design and manufacture of our products, our process controls and testing methods. BP Solar's latest generation of small area modules offers the following benefits:

Enhanced warranty

BP Solar provides an industry leading warranty, guaranteeing lower degradation rates on our modules manufactured beginning January 1st, 2010. Our superior long-term performance is proven by internal testing standards that go well beyond international requirements.



Accessible junction box for off grid connections

BP J-type junction box has accessible terminals for easier module interconnections in off grid applications, and it allows fitting cable glands for various cable sections.



Improved reliability with effective cooling

IntegraBus™

technology ensures high quality interconnections while positioning the bypass diodes in a printed circuit board for cooler operation and greater reliability.



Thick, durable, scratch resistant back sheet

Our new thicker back sheet provides extra insulation and increased resistance to protect your module against rough handling. It ensures longer term performance and increased energy production.

65W Photovoltaic module

BP 365J



Electrical characteristics


	(1) STC 1000W/m ²	(2) NOCT 800W/m ²
Maximum power (P _{max})	65W	46.8W
Voltage at P _{max} (V _{mpp})	17.6V	15.7V
Current at P _{max} (I _{mpp})	3.69A	2.95A
Short circuit current (I _{sc})	3.99A	3.23A
Open circuit voltage (V _{oc})	21.7V	19.7V
Module efficiency	12.1%	
Tolerance P _{max}	±10%	
Nominal voltage	12V	
Efficiency reduction at 200W/m ²	<5% reduction (efficiency 11.5%)	
Limiting reverse current	3.99A	
Temperature coefficient of I _{sc}	0.105%/ °C	
Temperature coefficient of V _{oc}	-0.360%/ °C	
Temperature coefficient of P _{max}	-0.45%/ °C	
(3) NOCT	47±2°C	
Maximum series fuse rating	10A	
Application class (according to IEC 61730:2007)	Class A	
Maximum system voltage	600V	

1: Values at Standard Test Conditions (STC): 1000W/m² irradiance, AM1.5 solar spectrum and 25°C module temperature

2: Values at 800W/m² irradiance, Nominal Operation Cell Temperature (NOCT) and AM1.5 solar spectrum

3: Nominal Operation Cell Temperature: Module operation temperature at 800W/m² irradiance, 20°C air temperature, 1m/s wind speed


All solar modules are individually tested prior to shipment; an allowance is made within our factory measurement to account for the typical power degradation (LID effect) which occurs during the first few days of deployment.

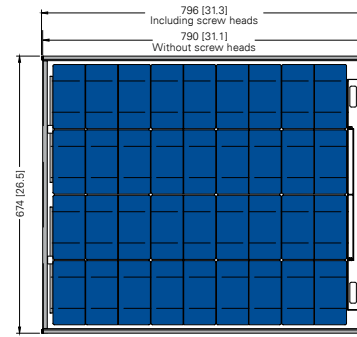

front view



side view

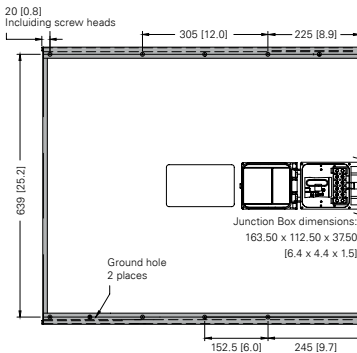

back view

Dimensions in mm [in].

Mechanical characteristics

Solar cells	36 polycrystalline silicon cells (156x78mm) in series
Front cover	High transmission 3.2mm (1/8th in) glass
Encapsulant	EVA
Back cover	White polyester
Frame	Silver anodized aluminum
Diodes	IntegraBus™ with Schottky diodes integrated
Junction box	IP65 with 4 terminal screw connection block; accepts PG 13.5, M20 13mm (1/2") conduit, or cable fittings accepting 6-12mm diameter cable. Terminals accept 2.5-10mm ² (8-14 AWG) wire
Dimensions	796x674x50mm / 31.3x26.5x1.97in
Weight	6.4kg / 14lbs

All dimensional tolerances within ±1% unless otherwise stated.

Warranty

- Free from defects in materials and workmanship for 5 years
- 93% min. power output over 12 years
- 85% min. power output over 25 years

Certification

Certified according to the extended version of the IEC 61215 (ed.2), EN 61215:2005-08 (Crystalline silicon terrestrial photovoltaic modules - Design qualification and type approval)

Certified according to IEC 61730-1 and IEC 61730-2 (ed.1), EN 61730-1:2007-05 and EN 61730-2:2007-05. (Photovoltaic module safety qualification, requirements for construction and testing).


Listed to UL 1703 & ULC ORD-C1703 Standard for Safety by Intertek ETL

Approved by Intertek ETL according to FM 3611, Dec 2004, and according to CAN/CSA C22.2 No. 213-M1987, 1st Edition, Reaffirmed 2004, for use in a Class I, Division 2, Group A, B, C, D Hazardous (Classified) Location.


This data sheet complies with the EN 50380 requirements.

This publication summarises product warranty and specifications which are subject to change without notice.

Dependence of the temperature

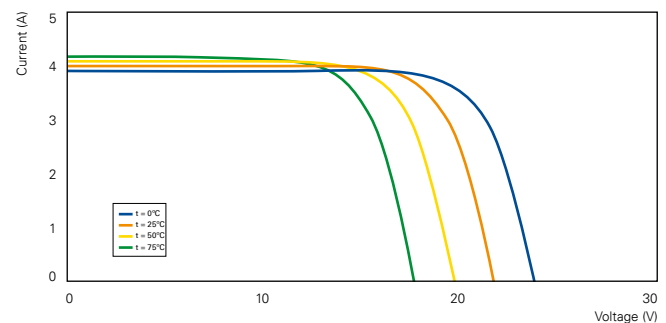

Dependence of the irradiance

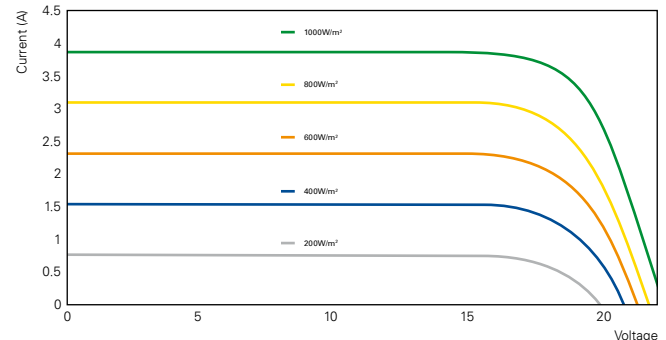

Contact:

Your BP Solar partner