Go2 SDK Development Guide

Search article titles

About Go2

Remote Controller

SDK Concepts 3

Architecture Description

Robot Dog Application 8

Basic Application

Motion Application

DDS Application

Image Application

Network Application

UWB Application

LiDAR Application

SLAM Application

FAULTS

Application Development 7

Obtain SDK

Quick Start

Creating Customer Application

App Binding

Payload

Expansion Dock Configuration

TouchScreen RC Supporting Instructio

Software Interface Services 19

Case reference 8

DDS Communication

High Motion Control

Basic Motion Control

Deployment Framework

Light Control

Get Remote Control Status

RL Control Routine

Exapmle of motor errors

Debugging Specification

FAQ

FAULTS

Last Updated On : 2023-11-17 17:53:30

This page contains content

Fault

Fault

The engineers of Go2 have put in a lot of effort in the design and manufacturing process, but they still inevitably encounter some un expected problems in practical use. When problems occur, operators, developers, and other devices will be notified through fault ala rms.

There are different types and sources of faults. The current fault information can be obtained through the APP or SDK.

System malfunction

A system malfunction indicates a hardware or software malfunction in the robot. They include fault source code and fault code, and can be notified to users through apps or SDKs, and recorded by cloud services in online mode. Resolving these faults requires a solut ion based on the specific fault code.

Behavioral malfunction

A behavioral fault indicates that the robot is unable to execute a certain instruction. This usually indicates that the current operating conditions of the robot do not allow the execution of the command or that the robot is currently in an occupied state.

Application failure

App failure, such as the dog not being bound, unable to connect, or network abnormality.

Fault recovery

Normal warning faults and other warning conditions will automatically disappear after they disappear.

Special faults such as motor protection, motherboard disconnection, etc. require a restart of the dog to recover.

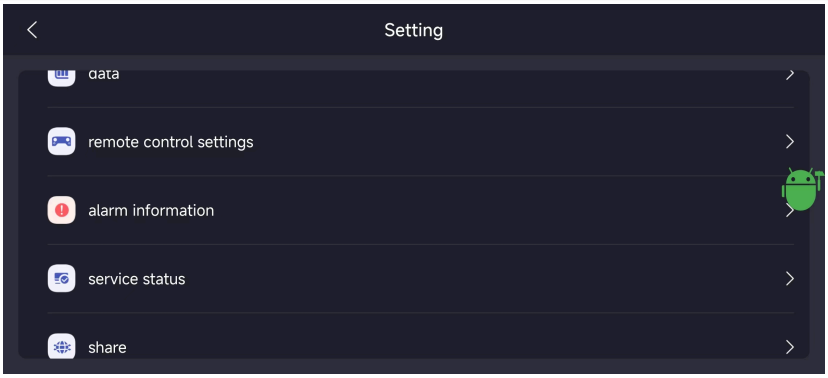

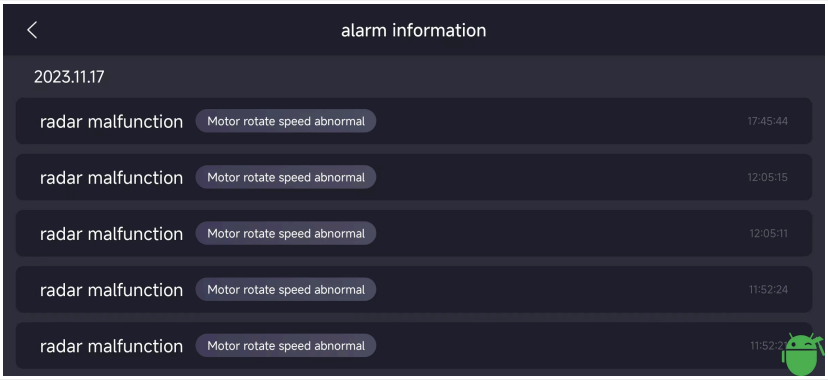

Helpful
Feedback