

Technical Specifications: PET / PP-HDPE STRAPPING LINE*

MODEL	STRAPEX 70-PP	STRAPEX 80-PP	STRAPEX 80-PET	STRAPEX 100-PET
Processing Materials	PP/HDPE	PP/HDPE	PET FLAKES/GRANULES	
Screw Dia (MM)	70	80	80	100
L/D Ratio	30:1	30:1	30:1	30:1
No. of Straps	Two	Four	Two	Four
Strap Size (MM)	9, 12, 15, 19	9, 12, 15, 19	9, 12, 15, 19	9, 12, 15, 19
Max. Output (Kg./Hr.)	75 to 80	150 to 160	100 to 120	200 to 250
Inline Printing	Single Colour	Single Colour	_	_
No. of Winders	3	5	3	5

^{*} Specifications subject to change without prior notice due to continuous developments. These are indicative and not binding.

Please refer quotation for technical details and scope of supply.

It is not possible to reach all maximum values at the same time.

An ISO 9001:2008 Certified Company



J P EXTRUSIONTECH LIMITED

(Formerly : J P Industries)

C1B - 1034 to 1037 GIDC Industrial Estate, Ankleshwar - 393 002, Gujarat - INDIA Phones: + 91 2646 221134, 222163, 251083, 250194 Fax: + 91 2646 250196 E-mail: info@jpel.in Web Site: www.jpel.in

Strapping Line **PP and PET**



www.jpel.in www.jpel.in

STRAPEX-PET




Features:

- Plant is suitable for both 100% PET Flakes or PET Virgin Granules
- Dehumidified Air Dryer With Crystallizer
- ❖ Bimetallic Screw & Barrel
- Melt Pump
- Special oven for stretching of PET strap
- Stabilizing oven

Applications:

- Cotton Industry
- Jute Industry
- Textile Industry
- Steel Industry
- Wooden Box Packing
- Aluminium Industry
- Fibre Industry

STRAPEX-PP

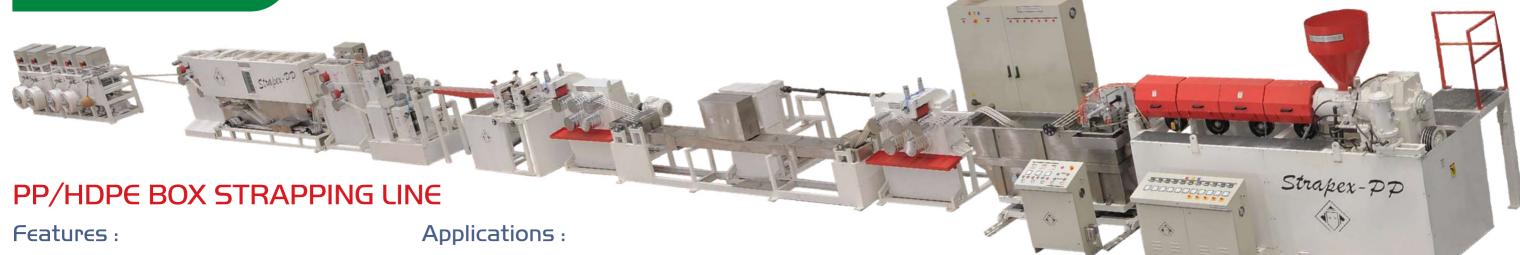

- Fully Automatic Heat Sealable Straps
- Inbuilt Single Colour Printing Unit
- Two Station Embossing Unit
- Specially designed Winder for Fully automatic application
- Digital Length Counting Meter

- Wooden Box Packing
- Corrugated Box Packing
- Textile Cloth Packing
- Paper Packing
- Baggage Packing
- Ceramic Industry

