


Aaron's Dshield Honeypot Setup

Simplified Home Network Diagram

Blue Lines are hardware devices and cable connections.

Same colour highlights are on respective vnet interfaces

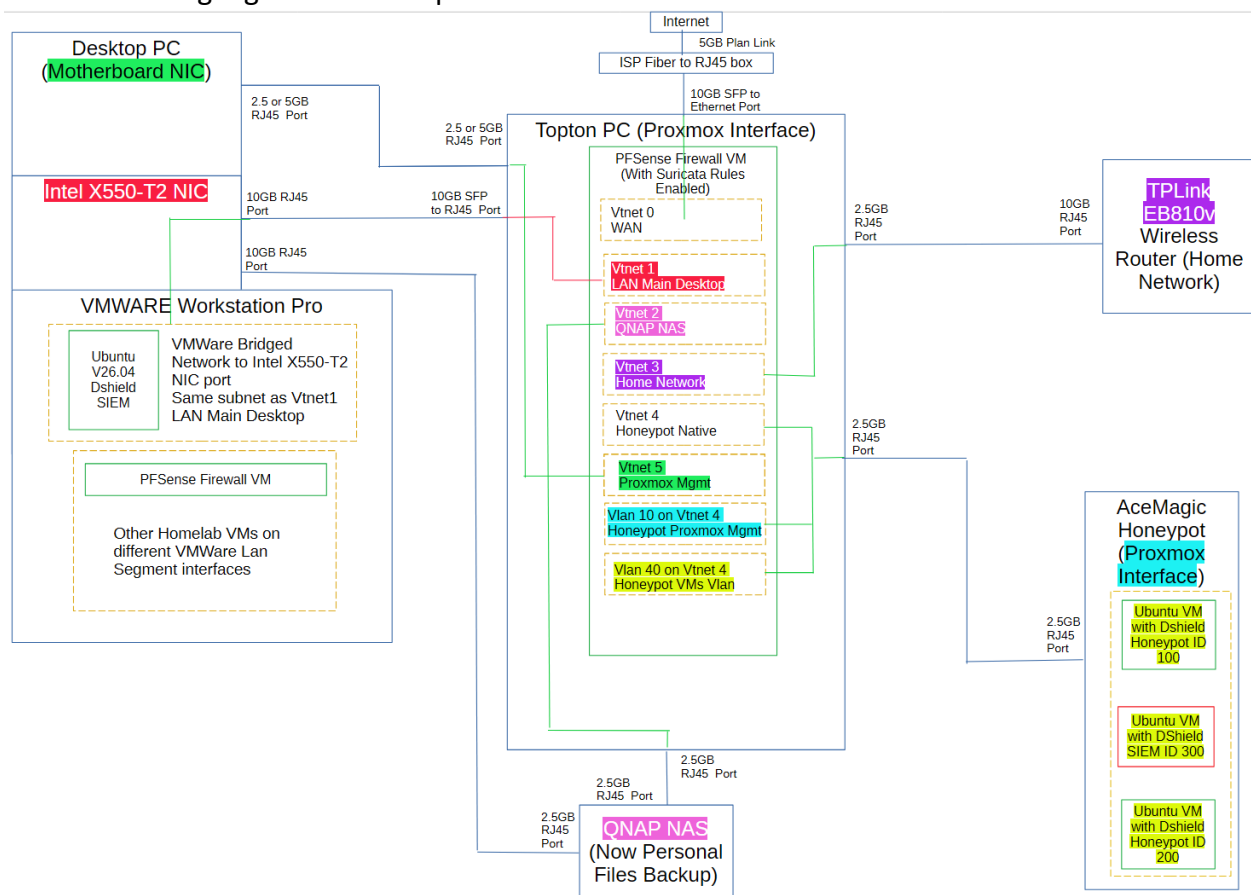

Hardware Specifications:

AceMagic Matrix Mini PC M1

Ryzen 7 6800H

Proxmox Interface

32GB RAM DDR5

512G PCIe SSD

X1 2.5G RJ45 Port

USB/HDMI Ports

Type ↑	Description	Disk usage...	Memory usage %	CPU usage	Uptime	Host CPU usage	Host Mem...
zone	localnetwork (hyper1-core)				-		
node	hyper1-core	10.8 %	70.5 %	2.1% of 16 CPUs	22 days 07:42:21		
qemu	100 (ubuntu2604)	0.0 %	33.0 %	0.4% of 4 CPUs	22 days 03:19:57	0.1% of 16 CPUs	5.8 %
qemu	150 (Ubuntu2604Baseline)				-		
qemu	200 (dshieldsensor-Desktop)	0.0 %	36.4 %	0.3% of 4 CPUs	03:01:42	0.1% of 16 CPUs	4.8 %
qemu	300 (dshield-siem)	0.0 %	95.5 %	5.0% of 6 CPUs	8 days 02:20:18	1.9% of 16 CPUs	49.6 %
storage	local (hyper1-core)	10.8 %			-		
storage	local-vm (hyper1-core)	27.2 %			-		

Software Layout for AceMagic Mini PC for Honeypot:

ID 100 (ubuntu2604) = DShield Honeypot Sensor running on Ubuntu 26.04 OS VM, Connected to Internet Storm Center and successfully feeding logs to ID 300 (dshield-siem) machine running on Ubuntu 24.04 OS installed on the same PC.

ID 200 (dshieldsensor-Desktop) = DShield Honeypot Sensor running on Ubuntu 26.04 OS, set up as a secondary sensor to try and continue to solve communication issue between the SIEM on my Desktop VMWare Workstation VM and Honeypot through the pfsense firewall interface. Currently not exposed to the internet. Troubleshooting details described below.

ID 300 (dshield-siem) = Initially, the DShield SIEM was supposed to be set up on my main desktop, however I faced issues with regards to getting the DShield SIEM to communicate with the DShield Honeypot Sensor over VMWare Workstation Pro and pfsense on different IPs. Hence I've set up a DShield SIEM locally on the same network and machine (AceMagic) as the DShield Honeypot Sensor to start parsing the network traffic captured on the network.

I followed the instructions on <https://isc.sans.edu/tools/honeypot/> to setup the Dshield Honeypot on ID 100 (ubuntu2604). I’ve added the HoneyPotVMs and LANMainDesktop networks to the Honeypot Exceptions IP during the installation process and kept the ports at default. This is the VM machine specifications I used to setup my honeypot.

Memory	4.00 GiB
Processors	4 (1 sockets, 4 cores) [x86-64-v2-AES]
BIOS	Default (SeaBIOS)
Display	Default
Machine	Default (i440fx)
SCSI Controller	VirtIO SCSI single
CD/DVD Drive (ide2)	none,media=cdrom
Hard Disk (scsi0)	local-lvm:vm-100-disk-0,iotthread=1,size=32G
Network Device (net0)	virtio=BC:24:11:B0:0D:DB,bridge=vmbro,tag=40
Serial Port (serial0)	socket

Screenshots of Internet Storm Center Logs to show successful DShield honeypot communications with the ISC account.

Firewall Log Summary

Firewall Log History

Download: [XML](#) | [JSON](#) | [TAB](#)

Show: 100 entries

Search:

Date	Time	Source	Source Port	Target	Target Port	Proto
2026-06-04	00:00:02	147.185.132.12	49602	192.168.50.4	8445	6
2026-06-04	00:00:09	216.25.89.99	50970	192.168.50.4	2869	6
2026-06-04	00:00:15	94.183.188.94	36166	192.168.50.4	2222	6
2026-06-04	00:00:22	147.185.133.103	51073	192.168.50.4	9879	6
2026-06-04	00:00:26	79.124.62.122	59722	192.168.50.4	25658	6
2026-06-04	00:00:26	79.124.62.122	59722	192.168.50.4	51781	6
2026-06-04	00:00:29	176.65.149.30	51582	192.168.50.4	60940	6
2026-06-04	00:00:32	79.124.62.122	59722	192.168.50.4	4021	6
2026-06-04	00:00:48	120.241.79.66	35651	192.168.50.4	2222	6
2026-06-04	00:00:48	120.241.79.66	35651	192.168.50.4	2222	6
2026-06-04	00:00:49	79.124.62.122	59722	192.168.50.4	38370	6

Web Honeypot Log Overview

Web Honeypot Log History

Download: [XML](#) | [JSON](#) | [TAB](#)

Last parsed submission: 2026-06-04 05:01:05 UTC (Submissions are parsed twice an hour).

Date	Time	URL	User Agent	Source
2026-06-04	00:14:08	/cgi-bin/uci?stok=locale		5.61.209.33
2026-06-04	01:45:50	/favicon.ico	Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.censys.io/)	66.132.195.60
2026-06-04	00:12:31	/	visionheight.com/scan Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) Chrome/126.0.0.0 Safari/537.36	18.220.198.91

Raw Data (instead of graphs)

Download Daily Report Summary

Download Daily Top Report Summary

Daily Report Summary

Your Top Submitted Sources Today

Top of page

DShield Honeypot Web Logs enabling logging locally.

In the /srv/dshield/etc/dshield.ini file, I changed the field for the local_logs_file and set the enable_local_logs to be true. I then changed the permissions for the folder containing the web-honeypot log files.

```
dshield@ubuntu0:/srv/log$ sudo nano /srv/dshield/etc/dshield.ini
dshield@ubuntu0:/srv/log$ sudo chgrp webhpot /srv/dshield/etc/dshield.ini
sudo chgrp webhpot /srv/log
sudo chmod 775 /srv/log
sudo systemctl restart web-honeypot
dshield@ubuntu0:/srv/log$ curl -v http://127.0.0.1:8000/
curl -v http://127.0.0.1:8000/wp-login.php
curl -v http://127.0.0.1:8000/.env
* Trying 127.0.0.1:8000...
* Established connection to 127.0.0.1 (127.0.0.1 port 8000) from 127.0.0.1 port 41684
* using HTTP/1.x
> GET / HTTP/1.1
> Host: 127.0.0.1:8000
> User-Agent: curl/8.18.0
> Accept: */*
```

```
[plugin:tcp:http]
http_ports=[8000]
https_ports=[8443]
submit_log_rate=900
queue_trigger=100
web_log_limit=1000
web_log_purgefactor=
debug=false
local_logs_file=/srv/log/webhoneypot-srvconfig.json
enable_local_logs=true
# this section may disappear in future versions
```

After that, I configured the filebeat.yml file to forward the webhoneypot logs to the DShield SIEM.

```
- type: filestream
  id: dshield-webhoneypot-local
  enabled: true
  paths:
    - /srv/log/webhoneypot*.json
  fields:
    log_type: cowrie-webhoneypot
    event.module: cowrie-webhoneypot
    fields_under_root: true
```

Issues encountered and solved:

1. Configuring my pfSense firewall rules to allow for external communication to the internet

I had to add the corresponding rules in my pfSense firewall to allow the Dshield sensor Honeypot access to the internet on my HONEYPOTVMS subnet Interface (VLAN 40 on vtnet4)

☐	☒	14/2 KiB	IPv4 TCP/UDP	HONEYPOTVMS subnets	*	*		53 (DNS)	*	none	HoneyPot VM to Internet	  
☐	☒	1/2.23 GiB	IPv4+6 TCP/UDP	HONEYPOTVMS subnets	*	*		443 (HTTPS)	*	none	HoneyPot VM to Internet	  
☐	☒	0/0 B	IPv4+6 TCP/UDP	HONEYPOTVMS subnets	*	*		22 (SSH)	*	none	HoneyPot VM to Internet	  
☐	☒	0/0 B	IPv4+6 TCP/UDP	HONEYPOTVMS subnets	*	*		123 (NTP)	*	none	HoneyPot VM to Internet	  
☐	☒	0/860.22 MiB	IPv4+6 TCP/UDP	HONEYPOTVMS subnets	*	*		80 (HTTP)	*	none	HoneyPot VM to Internet	  
☐	☒	0/0 B	IPv4 ICMP any	HONEYPOTVMS subnets	*	*		*	*	none	HoneyPot VM Ping test to Internet	  

I’ve also added a NAT Port Forward rule to allow the internet to access my DShield Honeypot on my WAN interface.

Port Forward 1:1 Outbound NPt											
Rules											
☐		Interface	Protocol	Source Address	Source Ports	Dest. Address	Dest. Ports	NAT IP	NAT Ports	Description	Actions
☐	☒	 WAN	TCP/UDP	*	*	WAN address	1 - 65535	192.168.50.4	1 - 65535	WAN all TCP UDP to DShield honeypot 192.168.50.4	  
☐	☒	9/12 KiB	IPv4 TCP/UDP	*	*	192.168.50.4	1 - 65535	*	none	NAT WAN all TCP UDP to DShield honeypot 192.168.50.4	  

I disabled my Suricata Firewall that was running as an add-on to pfSense for the HONEYPOTVMS subnet interface.

☐	HONEYPOTVMS (vtnet4.40)	☒	 	AUTO	DISABLED	HONEYPOTVMS	  
--------------------------	-------------------------	-------------------------------------	---	------	----------	-------------	---

I’ve also added a passlist on Suricata to allow traffic going to the honeypot to bypass the firewall on my WAN interface.

Configured Pass Lists			
☐	HoneypotPasslist	Yes	Dshield Passlist  

Networks Suricata Should Inspect and Protect

Home Net

default



Choose the Home Net you want this interface to use.

Default Home Net adds only local networks, WAN IPs, Gateways, VPNs and VIPs.

Create an Alias to hold a list of friendly IPs that the firewall cannot see or to customize the default Home Net.

External Net

HoneypotPasslist



Choose the External Net you want this interface to use.

External Net is networks that are not Home Net. Most users should leave this setting at default.

Create a Pass List and add an Alias to it, and then assign the Pass List here for custom External Net settings.

WAN Settings

WAN Categories

WAN Rules

WAN Flow/Stream

WAN App Parsers

WAN Variables

WAN IP Rep

General Settings

Enable

☒

Checking this box enables Suricata inspection on the interface.

Interface

WAN (vtnet0)

Choose which interface this Suricata instance applies to. In most cases, you will want to choose LAN here if this is the first Suricata-configured interface.

Description

WAN

Enter a meaningful description here for your reference. The default is the pfSense interface friendly description.

Before implementing the above pfsense rules, my web server exposed status had an ERROR. However, after the implementation of all the settings above, I managed to get it to work.

```
ERROR: webserver not exposed. check network firewall
OK: disk space ok
```

```
##### Are My Reports Received? #####
Last 404/Web Logs Received: 2026-06-03 09:15:51
Last SSH/Telnet Log Received: 2026-06-03 05:51:06
Last Firewall Log Received: 2026-06-03 09:00:46

##### Are the submit scripts running?

Last Firewall Log Processed: 2026-06-03 09:17:55
All Logs are processed. You are not sending too many logs

##### Checking various files
OK: /var/log/dshield.log
OK: /etc/cron.d/dshield
OK: /etc/dshield.ini
OK: /srv/cowrie/cowrie.cfg
OK: /etc/rsyslog.d/10-dshield.conf
OK: ip-firewall rules
OK: nf-firewall rules
OK: web honeypot running
OK: webserver exposed
OK: webserver configuration
OK: disk space ok
OK: correct interface

also check https://isc.sans.edu/myreports.html (after logging in)
to see that your reports arrive.
It may take an hour for new reports to show up.

In case you see errors, check
https://github.com/DShield-ISC/dshield/blob/main/STATUSERRORS.md
for help.
```

```
dshield@ubuntu0:~$ sudo filebeat test output
logstash: 192.168.50.15:5044...
connection...
parse host... OK
dns lookup... OK
addresses: 192.168.50.15
dial up... OK
TLS... WARN secure connection disabled
talk to server... OK
dshield@ubuntu0:~$ sudo filebeat test output
logstash: 192.168.50.15:5044...
connection...
parse host... OK
dns lookup... OK
addresses: 192.168.50.15
dial up... OK
TLS... WARN secure connection disabled
talk to server... OK
dshield@ubuntu0:~$
```

On my HONEYPOTVMS interface, I've also added block rules to the rest of my network.

☐	☒	0/252 B	IPv4+6 *	HONEYPOTVMS subnets	*	HONEYPOTPROXMOXMGMT subnets	*	*	none	Block All Honeypot Traffic to Proxmox Honeypot	
☐	☒	0/252 B	IPv4+6 *	HONEYPOTVMS subnets	*	MALWARELAB subnets	*	*	none	Block All Honeypot Traffic to Proxmox Honeypot	
☐	☒	0/0 B	IPv4+6 *	HONEYPOTVMS subnets	*	HONEYPOTNATIVE subnets	*	*	none	Block All Honeypot Traffic to Proxmox Honeypot	
☐	☒	0/4 KiB	IPv4+6 *	HONEYPOTVMS subnets	*	LANMAINDESKTOP subnets	*	*	none	Block All Honeypot Traffic to Desktop	
☐	☒	0/0 B	IPv4+6 *	HONEYPOTVMS subnets	*	NAS address	*	*	none	Block All Honeypot Traffic to NAS	
☐	☒	0/504 B	IPv4+6 *	HONEYPOTVMS subnets	*	HOMENETWORK address	*	*	none	Block All Honeypot Traffic to Home	
☐	☒	0/252 B	IPv4+6 *	HONEYPOTVMS subnets	*	MANAGEMENT subnets	*	*	none	Block All Honeypot Traffic to Management	

2. Elastic DShield Dashboards not loading.

After following the instructions on Guy's DShield SIEM Github page <https://github.com/bruneaug/DShield-SIEM> to setup the below DShield SIEM configuration, I had to run these commands to get the Dshield Dashboard to load manually.

```
sudo docker cp scripts/dshield_sensor_8.19.7.ndjson filebeat:/tmp/dshield_sensor_8.19.7.ndjson
sudo docker exec -it filebeat bash
curl -k -u elastic:student \
-X POST "https://kibana:5601/api/saved_objects/_import?overwrite=true" \
-H "kbn-xsrf: true" \
--form file=@/tmp/dshield_sensor_8.19.7.ndjson
```

3. Troubleshoot communication issue between the DShield SIEM on my Desktop VMWARE Workstation VM and Honeypot

Initially, I tried using Rocky Linux instead of Ubuntu V26.04 and placed my VM behind the pfsense firewall on my VMWare Workstation configuration setup. However, due to these communication issues, I decided to simplify the configuration and remove the VMWare pfsense firewall and directly bridge the VM to my Desktop Intel NIC port and installed the SIEM on the recommended Ubuntu 26.04 system.

After configuring these rules on pfsense, the ping and SSH communications are working between the machines and monitoring-beats is receiving input. However, nc and filebeat test output is still having issues connecting and cowrie logs are not forwarding.

```
dshielddesk@dshielddesk:~$ sudo filebeat test output
logstash: 192.168.10.40:5044...
connection...
parse host... OK
dns lookup... OK
addresses: 192.168.10.40
dial up... ERROR dial tcp 192.168.10.40:5044: i/o timeout
```

LANMainDesktop Interface

☐	☒	0/0 B	IPv4 ICMP	DShieldSensor	*	SIEM_IP	*	*	none	Allow Dshield Honeypot to SIEM communication	
☐	☒	0/3 KiB	IPv4 ICMP	SIEM_IP	*	DShieldSensor	*	*	none	Allow Dshield Honeypot to SIEM communication	
☐	☒	0/0 B	IPv4 TCP/UDP	DShieldSensor	*	SIEM_IP	5044	*	none	Allow Dshield Honeypot to SIEM communication	
☐	☒	0/0 B	IPv4 TCP/UDP	SIEM_IP	5044	DShieldSensor	*	*	none	Allow Dshield Honeypot to SIEM communication	
☐	☒	0/0 B	IPv4 TCP/UDP	SIEM_IP	12222	DShieldSensor	*	*	none	Allow Dshield Honeypot to SIEM communication	

Honeypot Vlan VM

☐	☒	0/1008 B	IPv4 ICMP	DShieldSensor	*	SIEM_IP	*	*	none	Dshield Honeypot Connection To Dshield SIEM	
☐	☒	0/0 B	IPv4 ICMP	SIEM_IP	*	DShieldSensor	*	*	none	Dshield Honeypot Connection To Dshield SIEM Ping	
☐	☒	0/2.64 MiB	IPv4 TCP/UDP	DShieldSensor	*	SIEM_IP	5044	*	none	Dshield Honeypot Connection To Dshield SIEM	
☐	☒	0/0 B	IPv4 TCP/UDP	SIEM_IP	5044	DShieldSensor	*	*	none	Dshield Honeypot Connection To Dshield SIEM	
☐	☒	0/0 B	IPv4 TCP/UDP	SIEM_IP	*	DShieldSensor	12222	*	none	Dshield Honeypot Connection To Dshield SIEM	
☐	☒	0/0 B	IPv4 TCP/UDP	DShieldSensor	12222	SIEM_IP	*	*	none	Dshield Honeypot Connection To Dshield SIEM	

```
dshieldsiem@dshieldsiem-Desktop-VMWare:~$ sudo ethtool -K ens33 tx off rx off tso off gso off
[sudo: authenticate] Password:
dshieldsiem@dshieldsiem-Desktop-VMWare:~$ nc -vz 192.168.10.40 5044
Connection to 192.168.10.40 5044 port [tcp/*] succeeded!
dshieldsiem@dshieldsiem-Desktop-VMWare:~$ nc -vz 192.168.50.6 5044
^C
dshieldsiem@dshieldsiem-Desktop-VMWare:~$ sudo ethtool -K ens33 tx off rx off tso off gso off g
ro off
dshieldsiem@dshieldsiem-Desktop-VMWare:~$ nc -vz 192.168.50.6 5044
^C
dshieldsiem@dshieldsiem-Desktop-VMWare:~$ sudo tcpdump -nn -l ens33 host 192.168.50.6 and port
5044
tcpdump: verbose output suppressed, use -v[v]... for full protocol decode
listening on ens33, link-type EN10MB (Ethernet), snapshot length 262144 bytes
13:07:23.332094 IP 192.168.50.6.39960 > 192.168.10.40.5044: Flags [S], seq 2280829295, win 6424
0, options [mss 1460,sackOK,TS val 1440544631,ecn 0,nop,wscale 9], length 0
13:07:23.332160 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580933763,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:24.334417 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580934766,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:24.334952 IP 192.168.50.6.39960 > 192.168.10.40.5044: Flags [S], seq 2280829295, win 6424
0, options [mss 1460,sackOK,TS val 1440544631,ecn 0,nop,wscale 9], length 0
13:07:24.334990 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580934766,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:25.359657 IP 192.168.50.6.39960 > 192.168.10.40.5044: Flags [S], seq 2280829295, win 6424
0, options [mss 1460,sackOK,TS val 1440545658,ecn 0,nop,wscale 9], length 0
13:07:25.359722 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580935791,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:26.383229 IP 192.168.50.6.39960 > 192.168.10.40.5044: Flags [S], seq 2280829295, win 6424
0, options [mss 1460,sackOK,TS val 1440546682,ecn 0,nop,wscale 9], length 0
13:07:26.383316 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580936815,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:28.430371 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580938862,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:32.462333 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580942894,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:40.910439 IP 192.168.10.40.5044 > 192.168.50.6.39960: Flags [S.], seq 3547620050, ack 220
8829296, win 65160, options [mss 1460,sackOK,TS val 580951342,ecn 1440543631,nop,wscale 10], le
ngth 0
13:07:55.662011 IP 192.168.50.6.52538 > 192.168.10.40.5044: Flags [S], seq 2756159739, win 6424
0, options [mss 1460,sackOK,TS val 629800506,ecn 0,nop,wscale 9], length 0
13:07:55.662100 IP 192.168.10.40.5044 > 192.168.50.6.52538: Flags [S.], seq 1111449170, ack 275
6159740, win 65160, options [mss 1460,sackOK,TS val 3632230506,ecn 629800506,nop,wscale 10], le
ngth 0
13:07:56.710488 IP 192.168.10.40.5044 > 192.168.50.6.52538: Flags [S.], seq 1111449170, ack 275
```

I began to run TCPDump on my SIEM while performing a netcat connection using the honeypot VM. I found that the SYN packets were reaching my SIEM and my SIEM was responding with the corresponding SYN-ACK.

However, the PFSense interface was not receiving the SYN-ACK that was supposed to be coming out from my Windows PC. This narrowed the problem down to either my VMWare Workstation Network Interface configuration issue, Pfsense return rules/routing was not configured correctly or the Norton 360 Firewall blocking the connection (Which I later found out was the root cause). I checked that the SIEM was listening on port 5044 for the logs. I also tried to change the pfsense firewall rule advanced settings state type from the default “Keep” to “Sloppy” to troubleshoot issues that might be caused by missing packets or asymmetric routing but it did not work. I created broad firewall rules for pfsense to allow network traffic communication in both directions but it still did not work.

```
dshielddesk@dshielddesk:~$ sudo ss -tnp | grep 5044
ESTAB 0      0      192.168.50.6:58616 192.168.10.40:5044 users:(("filebeat",pid=2377,fd=7))
```

Packet Capture Options

Capture Options

LANMAINDESKTOP (vtnet1)

Interface to capture packets on.

1000

Max number of packets to capture (default 1000). Enter 0 (zero) for no limit.

0

Max bytes per packet (default 0). Enter 0 (zero) for no limit.

Custom Filter

Filter preset.

Promiscuous Mode

Capture all traffic seen by the interface. Disable this option to only capture traffic to and from the interface, including broadcast and multicast traffic.

View Options

Normal

The level of detail shown when viewing the packet capture.

Default Type

Force the captured traffic to be interpreted as a specified type.

Name Lookup

Perform a name lookup for port, host, and MAC addresses when viewing the packet capture. This can cause significant delays due to reverse DNS lookups.

Custom Filter Options

Hint

All input is space-separated. When selecting a match that specifies "OR", at least two Types should be specified (such as Ethernets and Port). This will capture packets that match either Type instead of exclusively both.

Untagged Filter

Filter options for packets without any VLAN tags.

include any of

UNTAGGED PACKETS

all of

192.168.50.6

HOST IP ADDRESS OR SUBNET

any of

EXAMPLE: 17 tcp

PROTOCOL

any of

5044

PORT NUMBER

any of

EXAMPLE: 00:02:11:22:33:44:55:66

HOST MAC ADDRESS

any of

EXAMPLE: arp 8100 0x8200

ETHERTYPE

Tagged Filter

Filter options for packets that have a VLAN tag set. Specify a tag level to match stacked VLAN packets (such as QinQ).

exclude all

TAGGED PACKETS

all of

EXAMPLE: 10.1.1.0/24 192.168.1.1

HOST IP ADDRESS OR SUBNET

any of

EXAMPLE: 17 tcp

PROTOCOL

any of

EXAMPLE: 80 443

PORT NUMBER

any of

EXAMPLE: 100 200

VLAN TAG

any of

EXAMPLE: 00:02:11:22:33:44:55:66

HOST MAC ADDRESS

any of

EXAMPLE: arp 8100 0x8200

ETHERTYPE

1

LEVEL

Stop

Running packet capture:

/usr/sbin/tcpdump -ni vtnet1 -c 1000 -U -w - '(host 192.168.50.6) and (port 5044) and (not vlan)'

Packet Capture Output: /tmp/packetcapture-vtnet1-20260603130949.pcap

Auto-scroll

13:09:53.953570 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:09:54.968846 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:09:55.984802 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:09:57.009189 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:09:58.033249 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:09:59.056972 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:10:01.104994 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:10:05.136973 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0
13:10:13.456626 IP 192.168.50.6.55480 > 192.168.10.40.5044: tcp 0

No pfsync

Prevent states created by this rule to be sync'd over pfsync.

State Policy

Use global default

Optionally overrides the default state policy behavior to force a specific policy for connec state.
The global default policy option is located at System > Advanced, Firewall & NAT tab.

State type

Keep

Keep: works with all IP protocols

No XMLRPC Sync

Prevent the rule on Master from automatically syncing to other CARP members
This does NOT prevent the rule from being overwritten on Slave.

VLAN Prio

none

Choose 802.1p priority to match on.

VLAN Prio Set

none

After further troubleshooting, I disabled my Norton 360 smart firewall on my Desktop host machine, the communications were successful. Turning the smart firewall back on and trying to find the correct setting to configure to enable this connection, I found out this setting below had to be enabled on the Norton 360 suite for communications to take place between the two machines.

Additional settings

Customize other aspects of your firewall.

Allow internet connection sharing

I also added this firewall rule to the smart firewall to accept TCP communications from the honeypot over port 5044 as a precaution. Although it worked initially without it.

Allow DShield SIEM to Hon...

All

Allow

In/Out

TCP (6)

192.168.50.6 / Lo...

Localhost Public

Public

Allow

In/Out


TCP/UDP

192.168.50.6
Local port 5044

Screenshots of DShield SIEM Dashboards to check its working

Screenshot of SIEM ingesting monitoring beats logs, cowrie.dshield logs, cowrie.webhoneypot logs and additional elastic integrations threat intelligence from abuse.ch and Alien Vault OTX

☐ Name	Health	Status	Primaries	Replicas	Documents count	Storage size
☐ .monitoring-beats-7-2026.05.29	green	open	1	0	40,320	25.62mb
☐ .monitoring-beats-7-2026.05.30	green	open	1	0	40,320	25.46mb
☐ .monitoring-beats-7-2026.05.31	green	open	1	0	40,320	25.21mb
☐ .monitoring-beats-7-2026.06.01	green	open	1	0	40,320	25.28mb
☐ .monitoring-beats-7-2026.06.02	green	open	1	0	40,320	24.98mb
☐ .monitoring-beats-7-2026.06.03	green	open	1	0	40,320	25.16mb
☐ .monitoring-beats-7-2026.06.04	green	open	1	0	5,440	7.84mb
☐ cowrie-2026.05.26-000001	yellow	open	1	1	1,444,813	284.33mb
☐ cowrie.dshield-2026.05.26-000001	yellow	open	1	1	262,068	183.05mb
☐ cowrie.vt_data-2026.05.26-000001	green	open	1	0	0	249b
☐ cowrie.webhoneypot-2026.05.26-000001	yellow	open	1	1	1,570	3.34mb
☐ logs-ti_abusech_latest.dest_ja3_fingerprints-3	green	open	1	0	97	49.35kb
☐ logs-ti_abusech_latest.dest_malware-3	green	open	1	0	3,818	19.28mb
☐ logs-ti_abusech_latest.dest_malwarebazaar-3	green	open	1	0	1,601	5.2mb
☐ logs-ti_abusech_latest.dest_sslblacklist-3	green	open	1	0	9,835	4.79mb
☐ logs-ti_abusech_latest.dest_threatfox-3	green	open	1	0	4,300	1.68mb
☐ logs-ti_abusech_latest.dest_uri-3	green	open	1	0	3,867	7.77mb
☐ logs-ti_otx_latest.dest_pulses_subscribed-2	green	open	1	0	8,262	5.42mb
☐ metrics-endpoint.metadata_current_default	green	open	1	0	0	249b
☐ ti.iscintel-2026.05.26-000001	green	open	1	0	44,991	4.22mb
☐ ti.rostintel-2026.05.26-000001	green	open	1	0	2,438,690	339.6mb

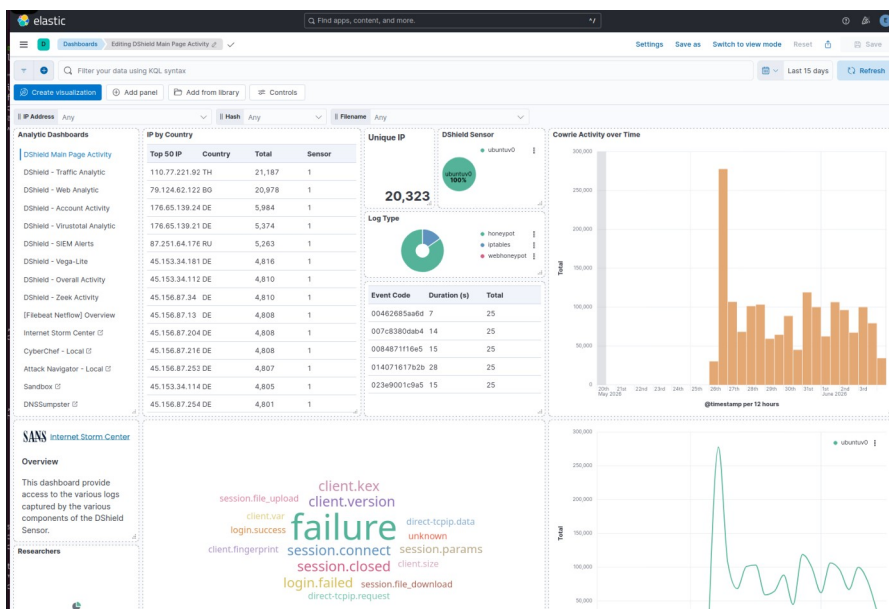

Next Steps after my 2 Weeks of Army National Re-service (8-19 June):

1. Migrate the DShield SIEM on my Honeypot AceMagic Mini PC to my MainDesktop PC VMWare VM.
2. Since I have more RAM and better processing power on my MainDesktop PC, download and enable more rules and integrations for Elastic.
3. Remove/Transfer the ID 300 Dshield SIEM and backup ID 200 Dshield Honeypot Sensor out of my AceMagic PC and use that memory/HDD space to setup a VM that has a full rotating packet capture with a lightweight Suricata and Zeek Sensor setup. Connect an external SSD for increased pcap and log retention.