





PAGE01
PAGE02 CONFIG
PAGE03 FPGA_BANK64_65
PAGE04 FPGA_BANK66_67 DDR4
PAGE05 FPGA_BANK84_86 87
PAGE06 FPGA_GTY_224~227_CFG
PAGE07 FPGA_POWER
PAGE08 FPGA_GND
PAGE09 DDR4
PAGE10 QSPI FLASH
PAGE11 PCIE x8
PAGE12 FMC1_HPC_LA
PAGE13 FMC1_HPC_HA_HB
PAGE14 FMC1_HPC_DP
PAGE15 ETHERNET
PAGE16 JTAG KEY LED
PAGE17 EXT IO
PAGE18 IIC SD Card
PAGE19 POWER1 0.85V VCCAUX
PAGE20 POWER2 1.2V 1.8V 3.3V
PAGE21 POWER3 MGT
PAGE22 FAN
PAGE23 Version

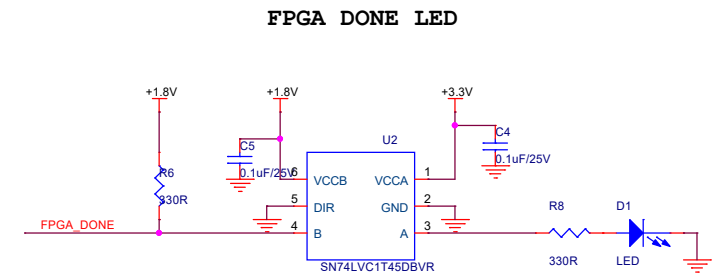

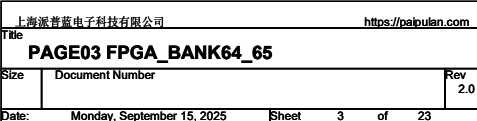


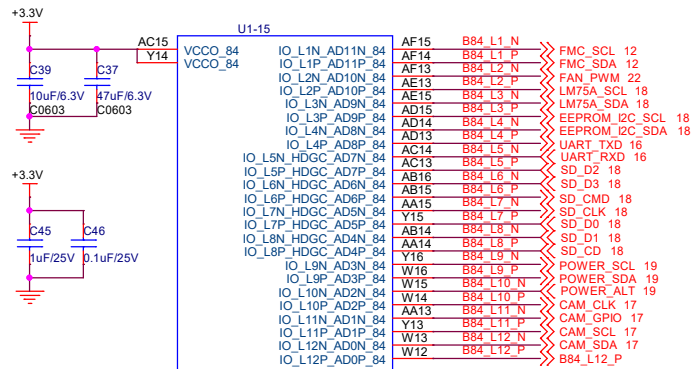

XCKU5PFFVB676

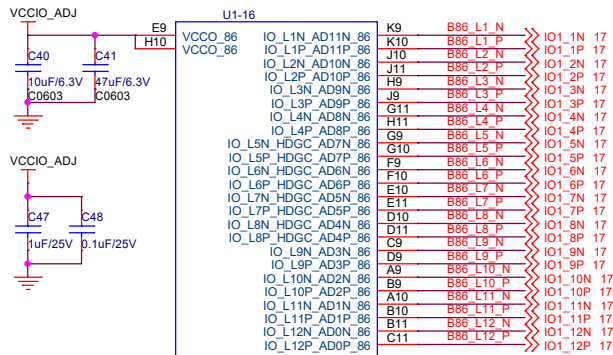


XCKU5PFFVB676

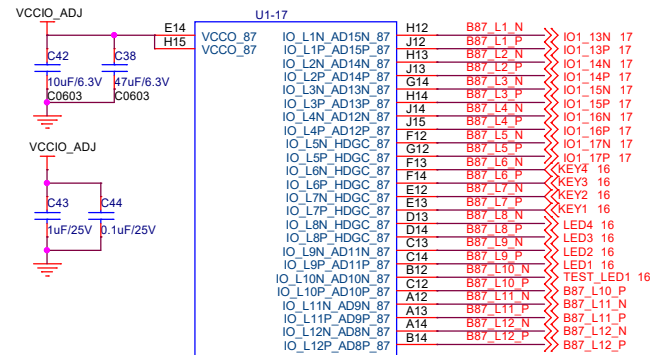


XCKU5PFFVB676

U1-18

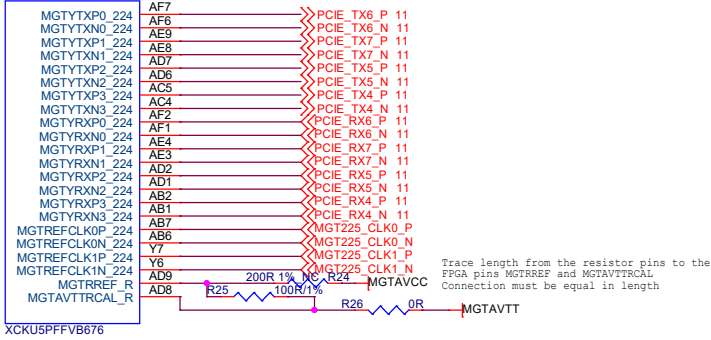


U1-19

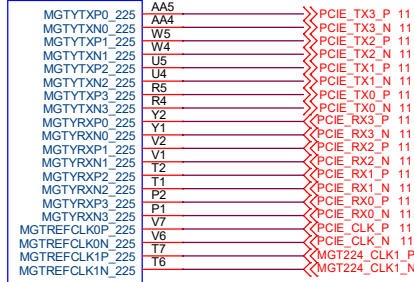


XCKU5PFFVB676

U1-21

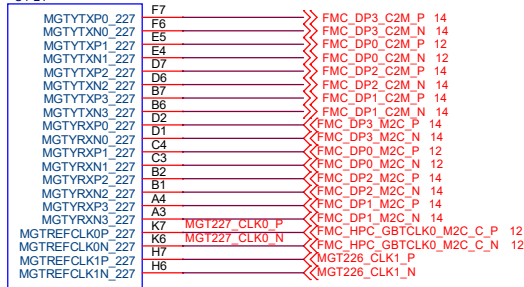



XCKU5PFFVB676


U1-20

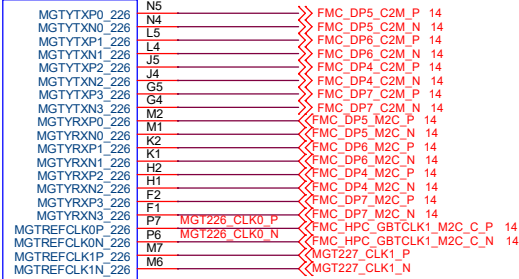


XCKU5PFFVB676

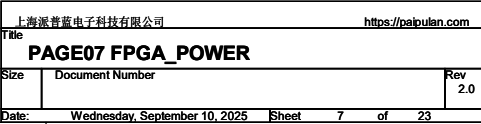

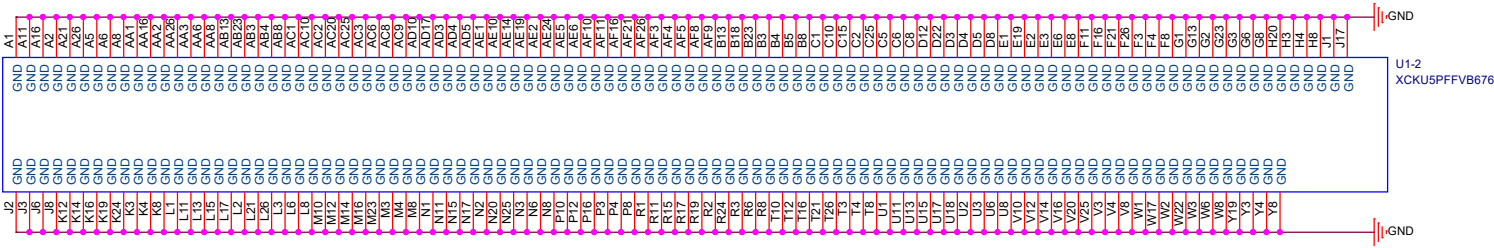








FPGA CONFIG SPI

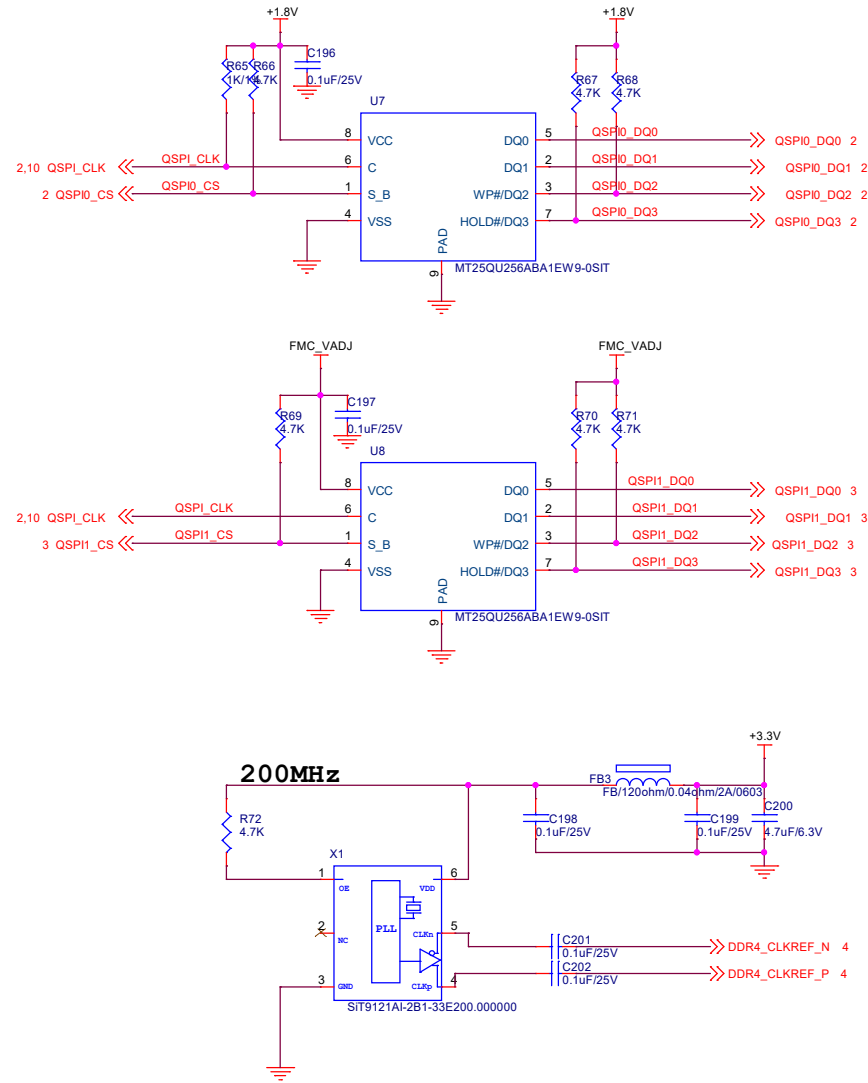


PCIe X8 SLOT

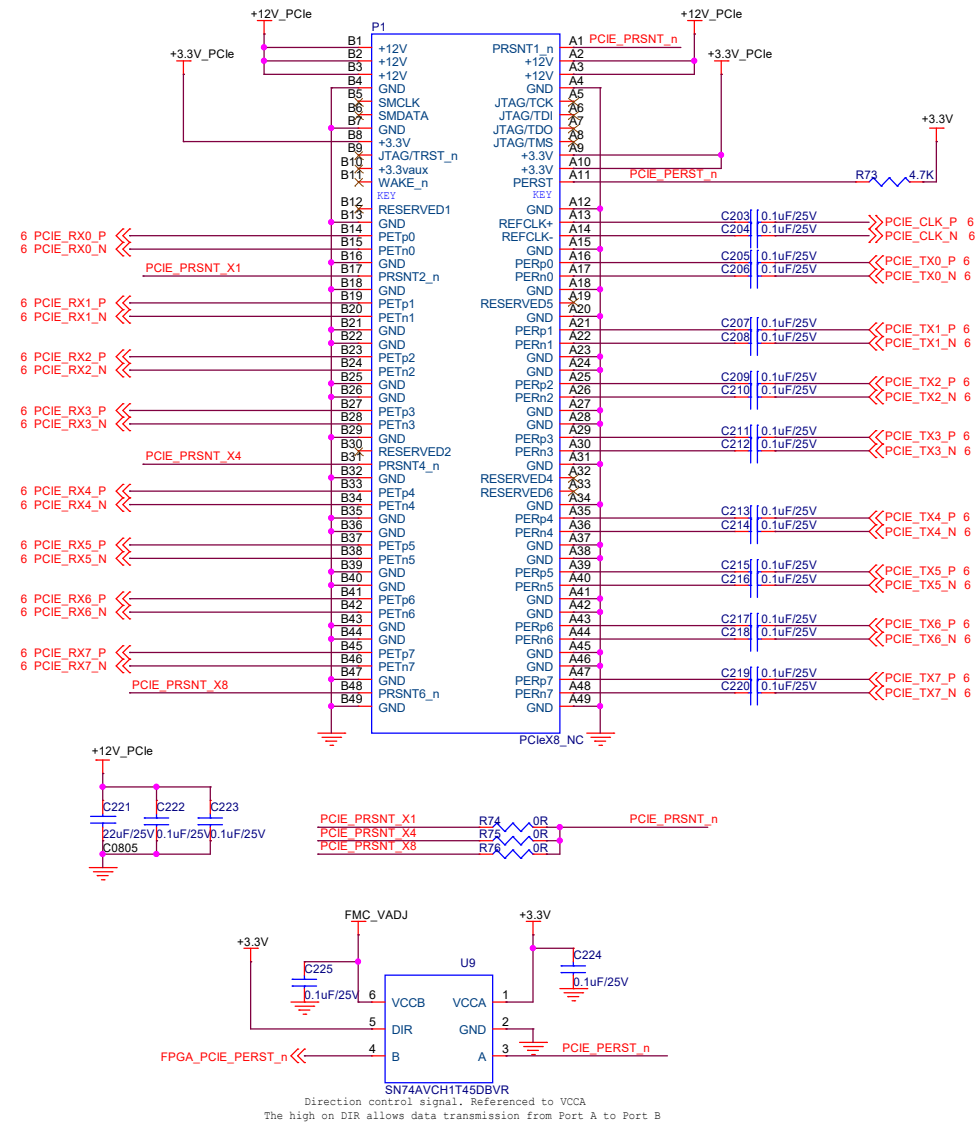


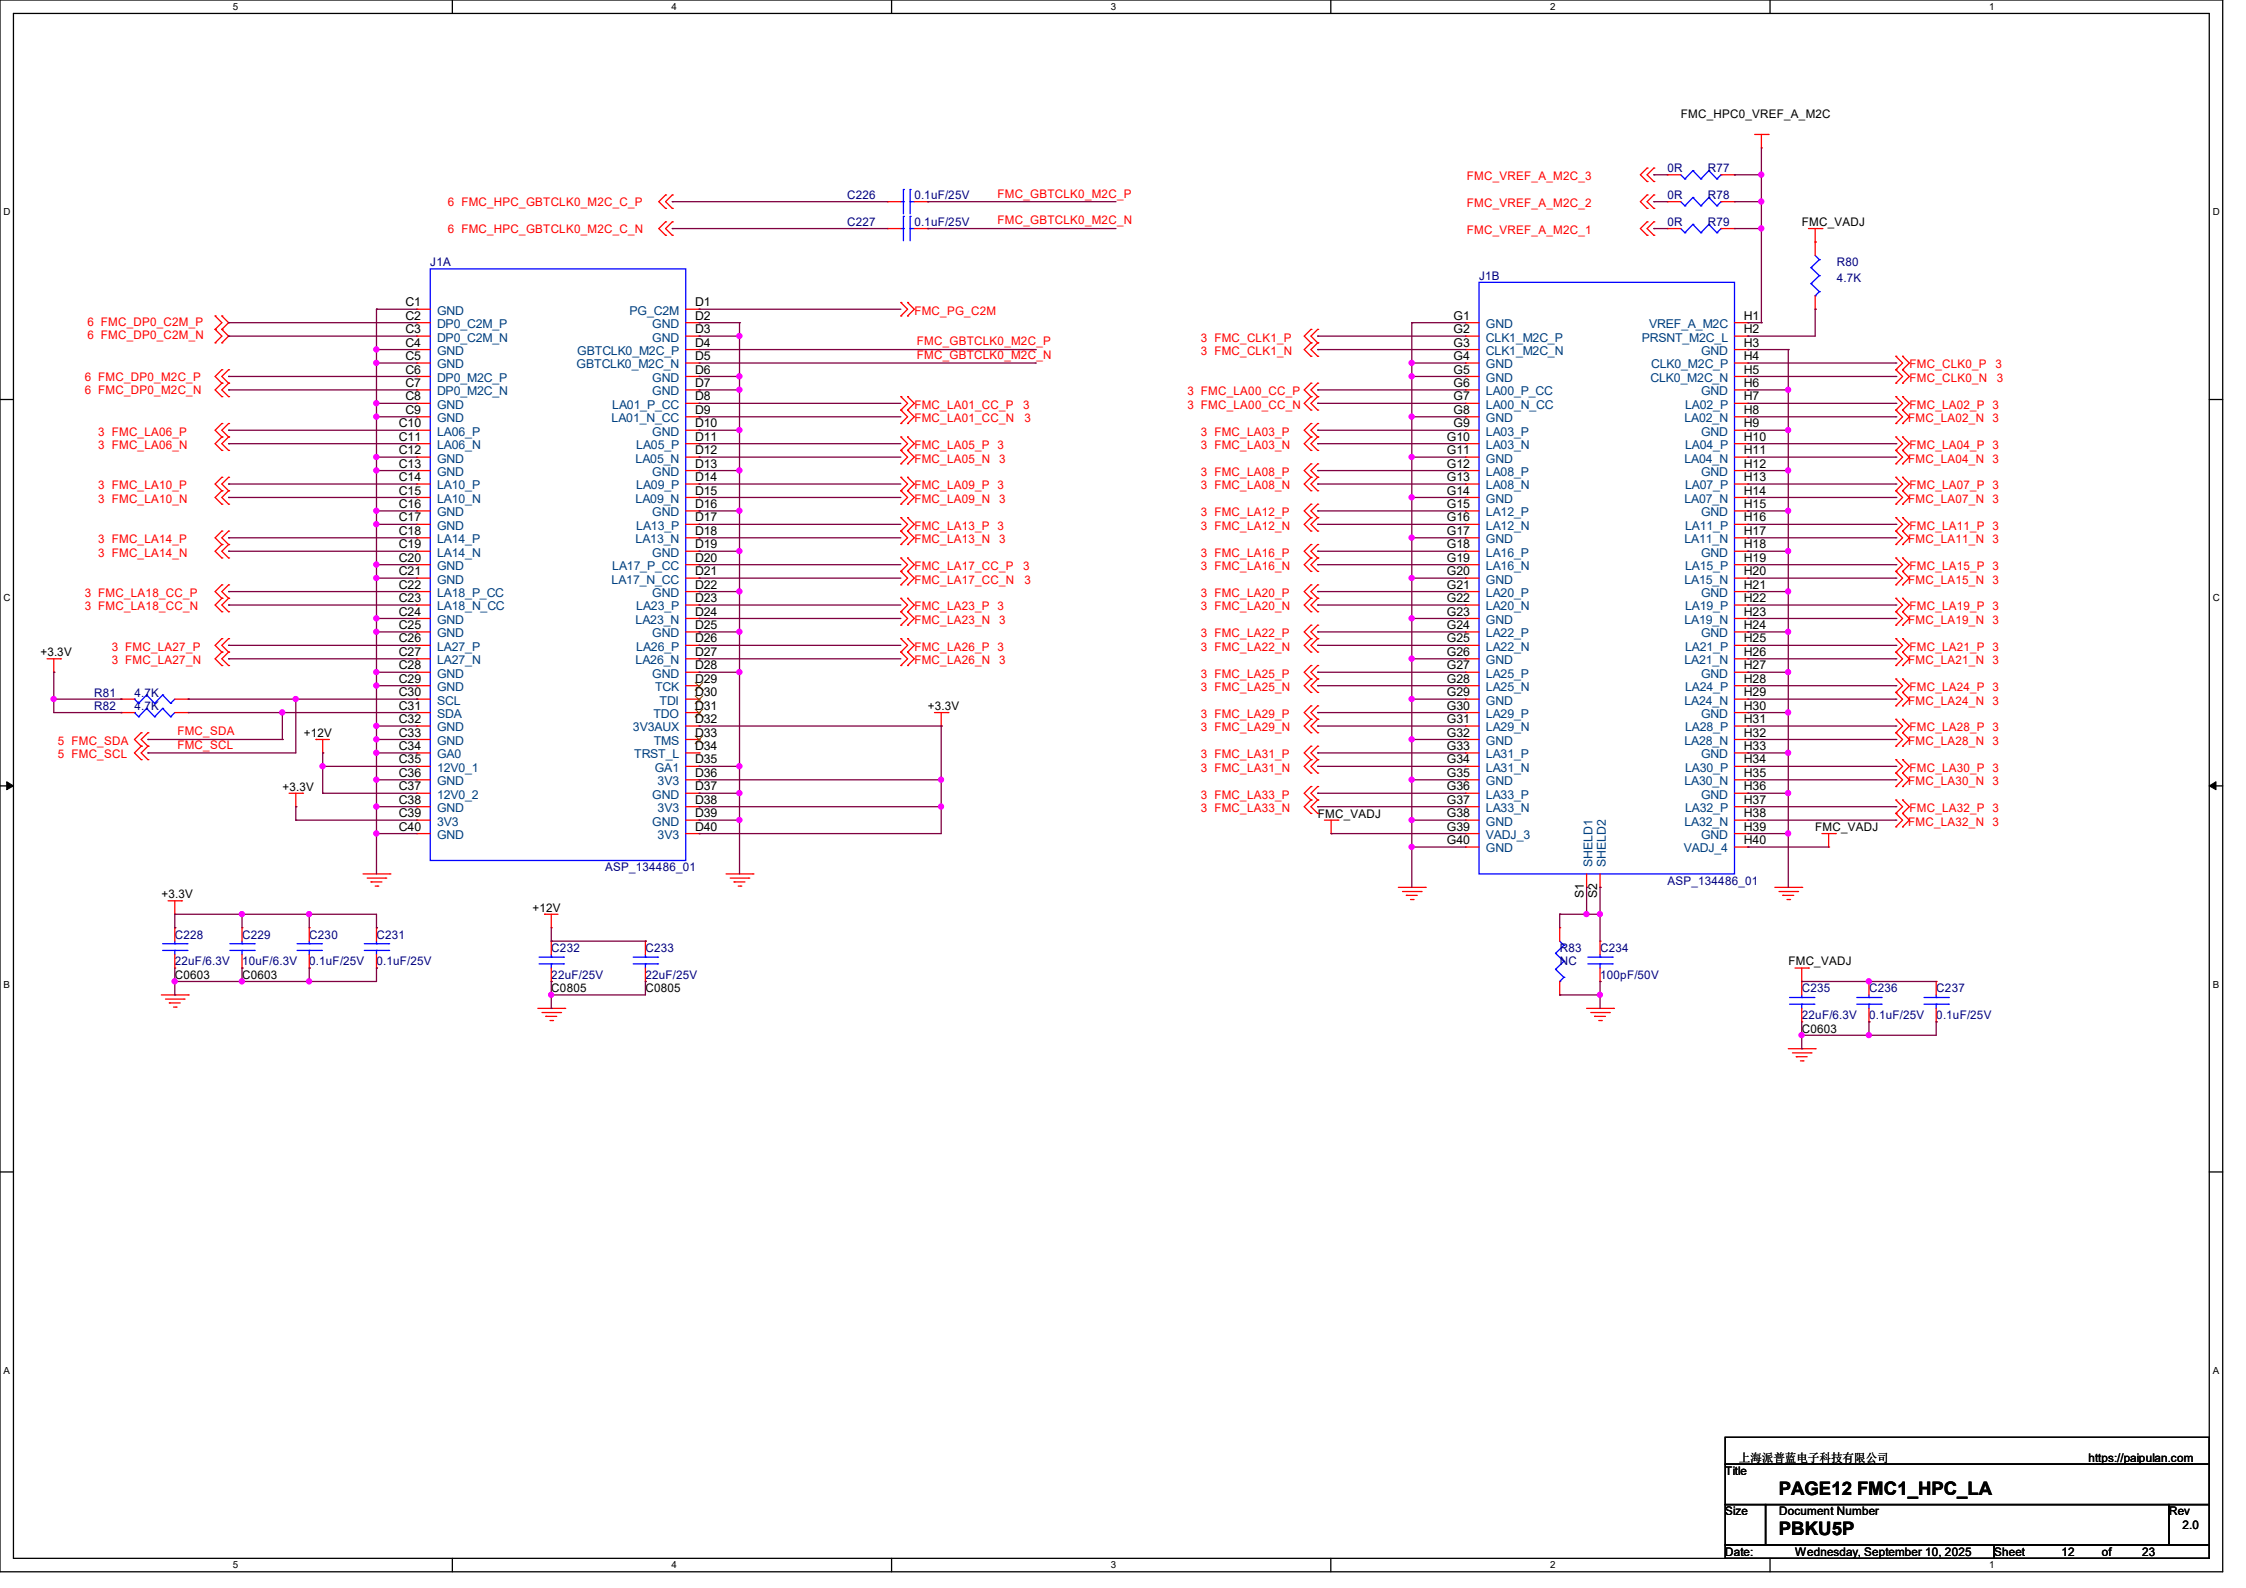

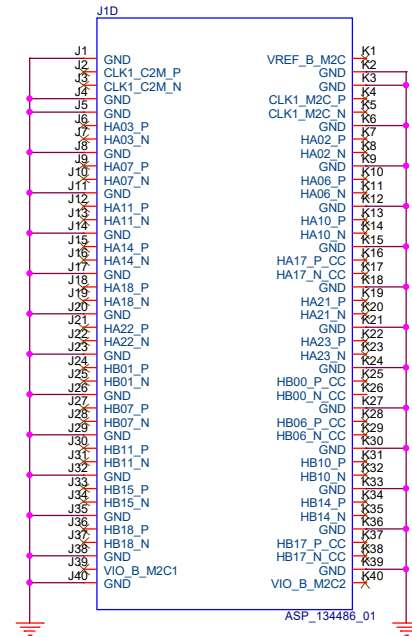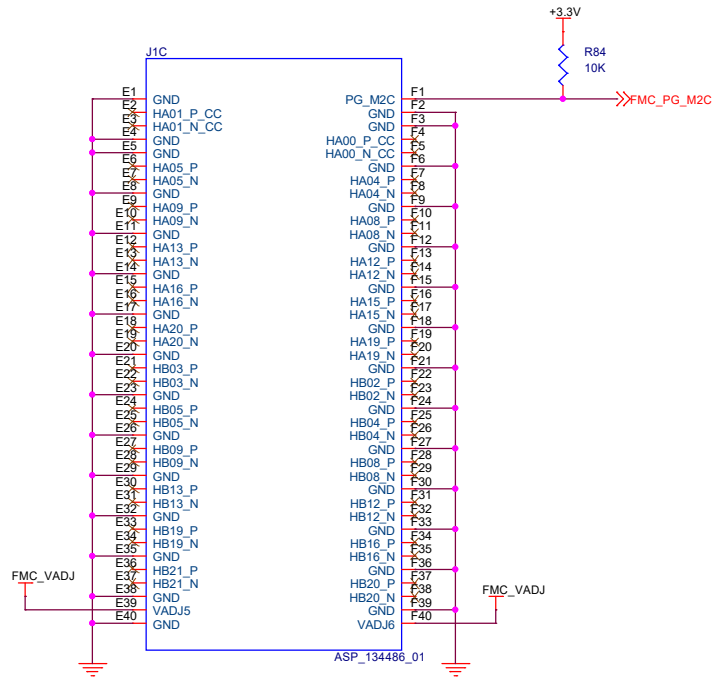


6 FMC_HPC_GBTCLK1_M2C_C_P << C242 | 0.1uF/25V FMC1_GBTCLK1_M2C_P
6 FMC_HPC_GBTCLK1_M2C_C_N << C243 | 0.1uF/25V FMC1_GBTCLK1_M2C_N

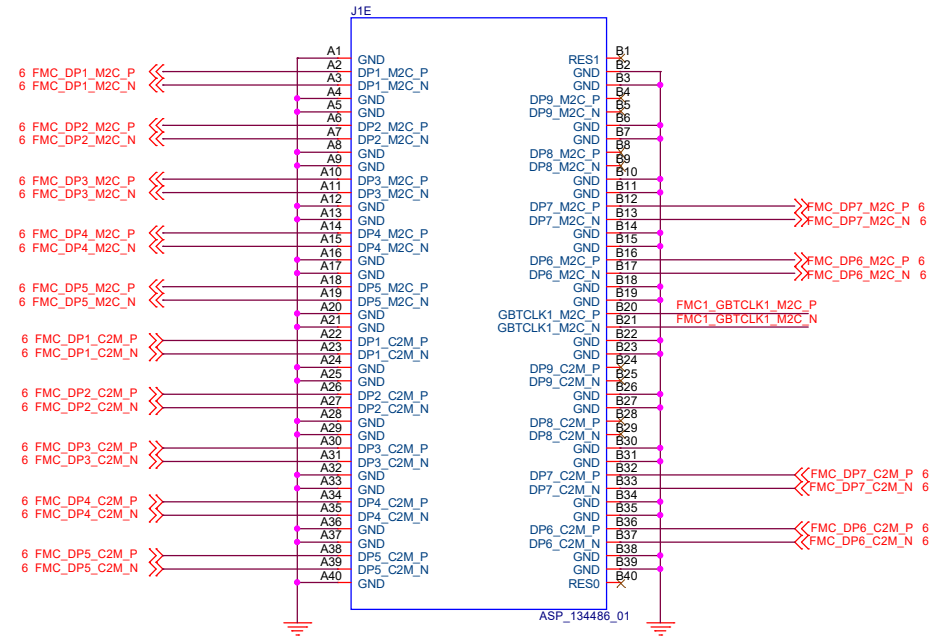








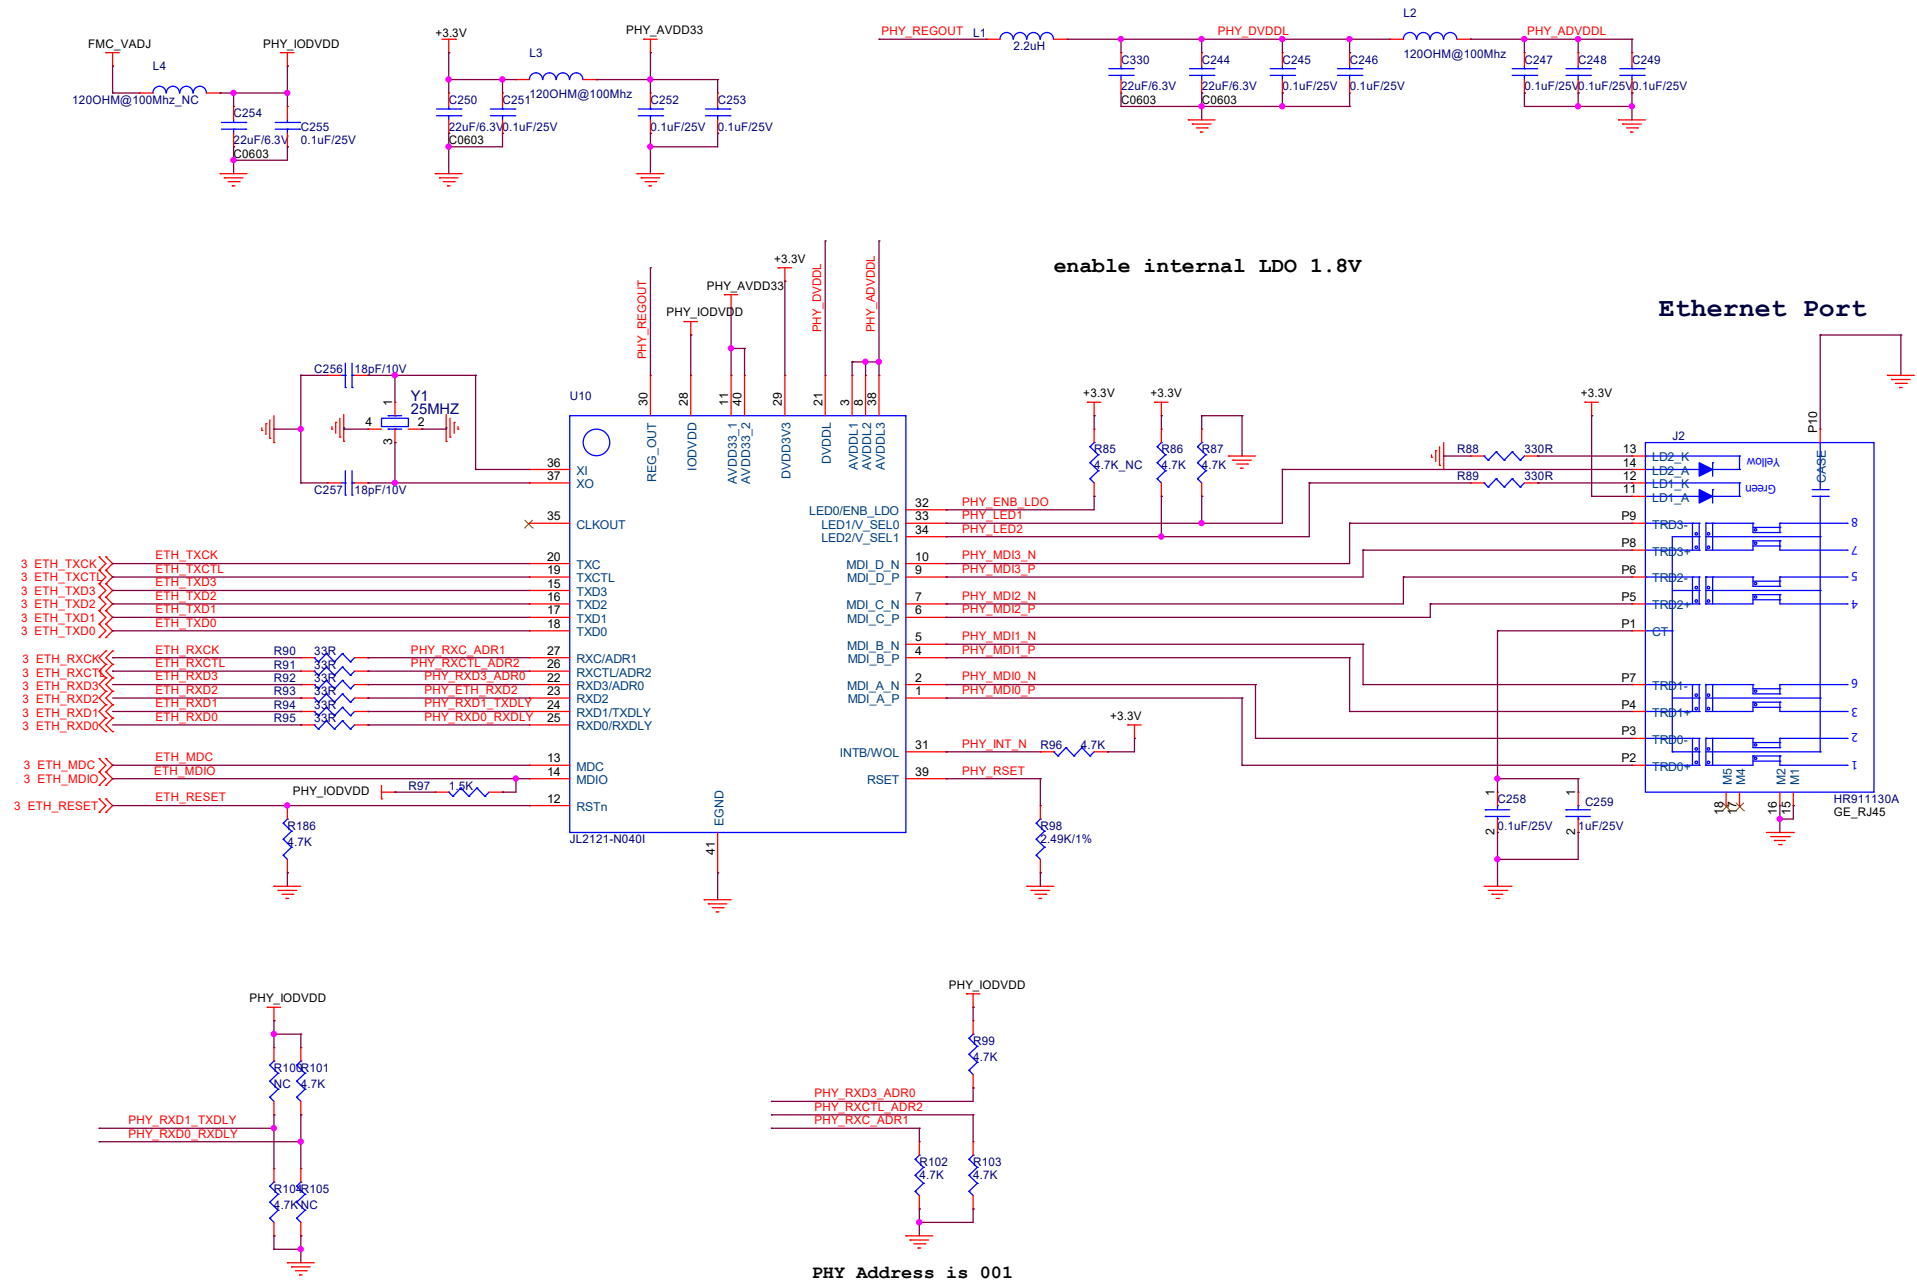




JTAG Connector

JTAG support 1.8V

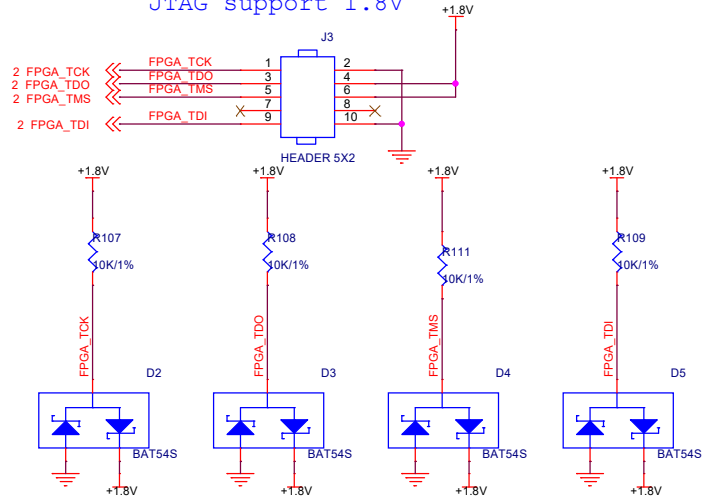





USB Uart

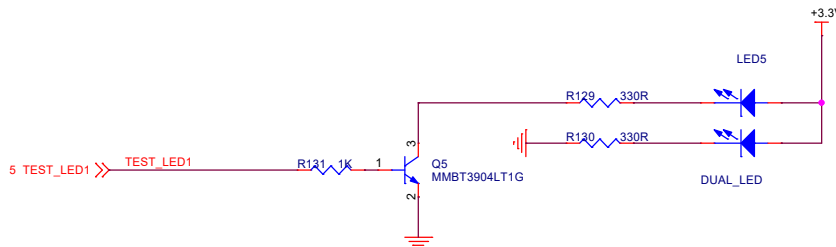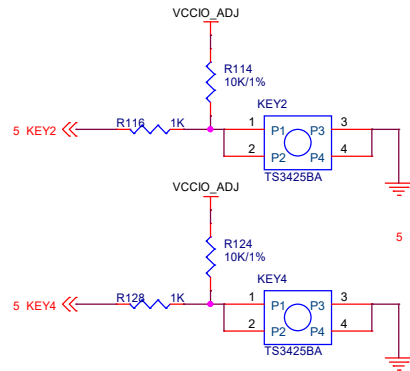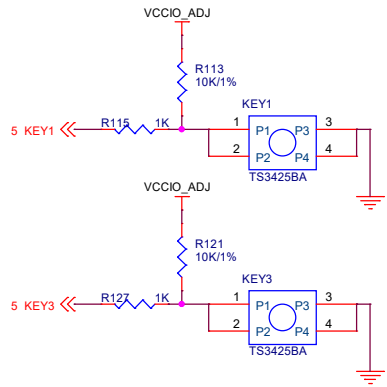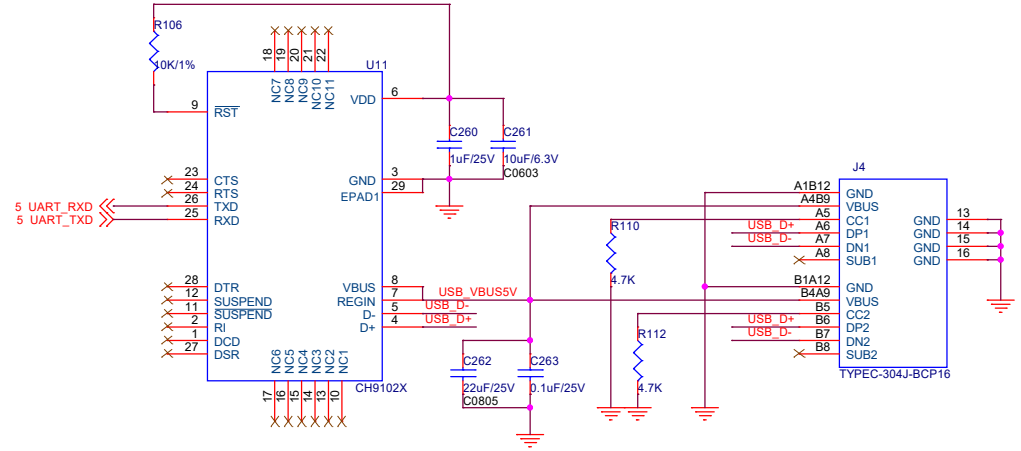


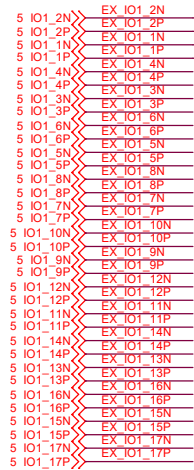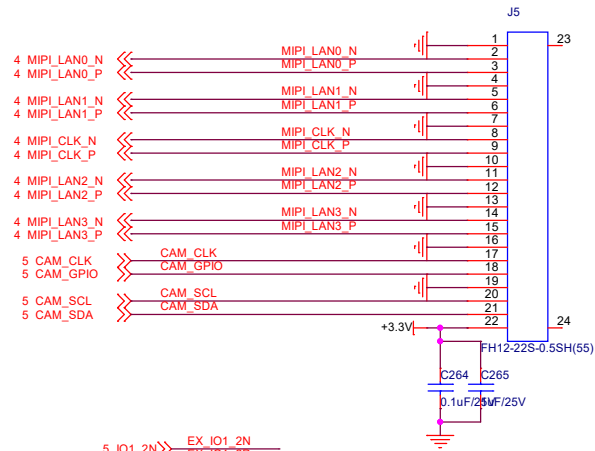

FPGA 40 PIN External IO

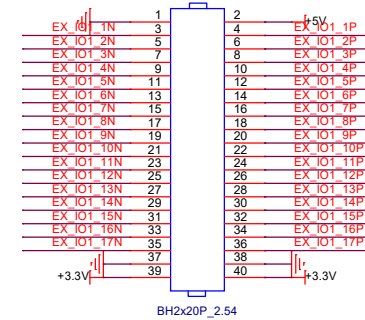


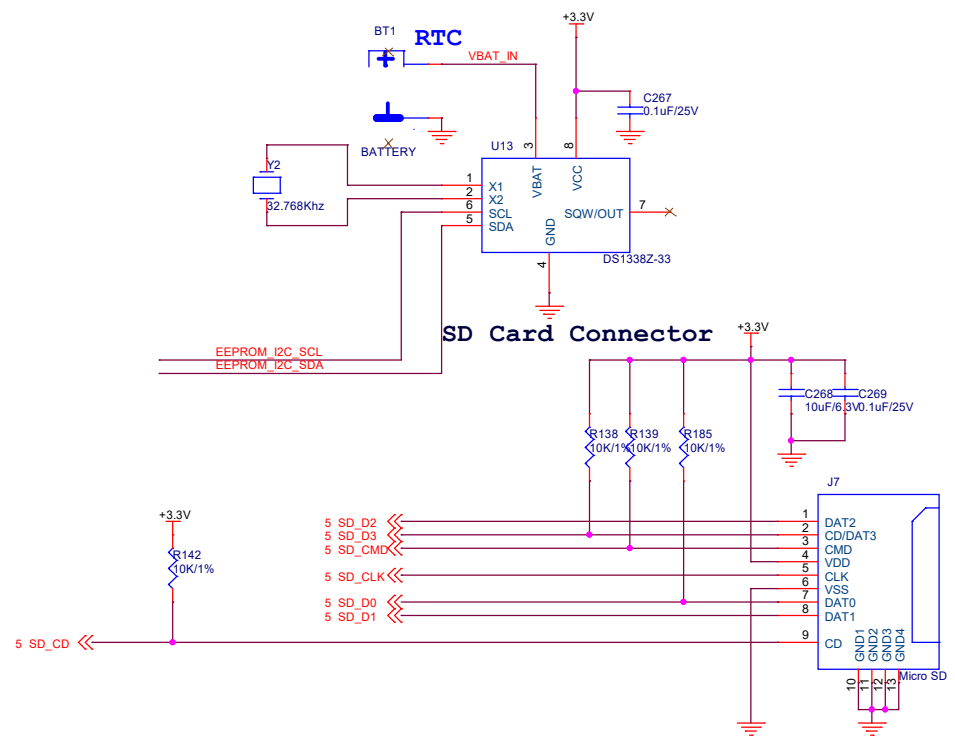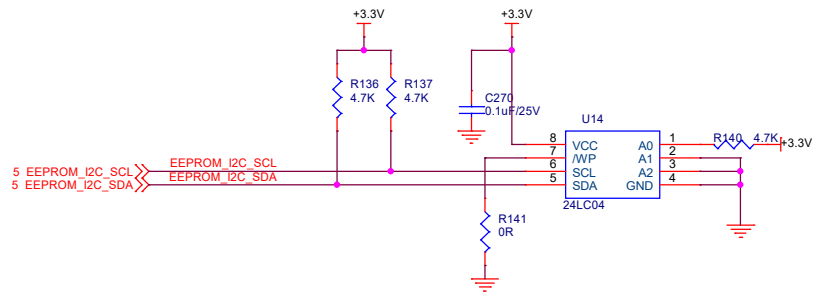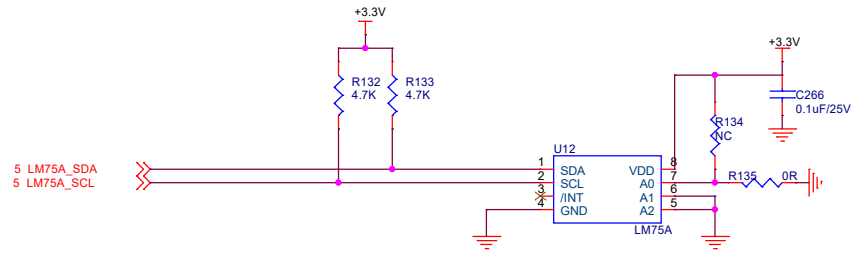


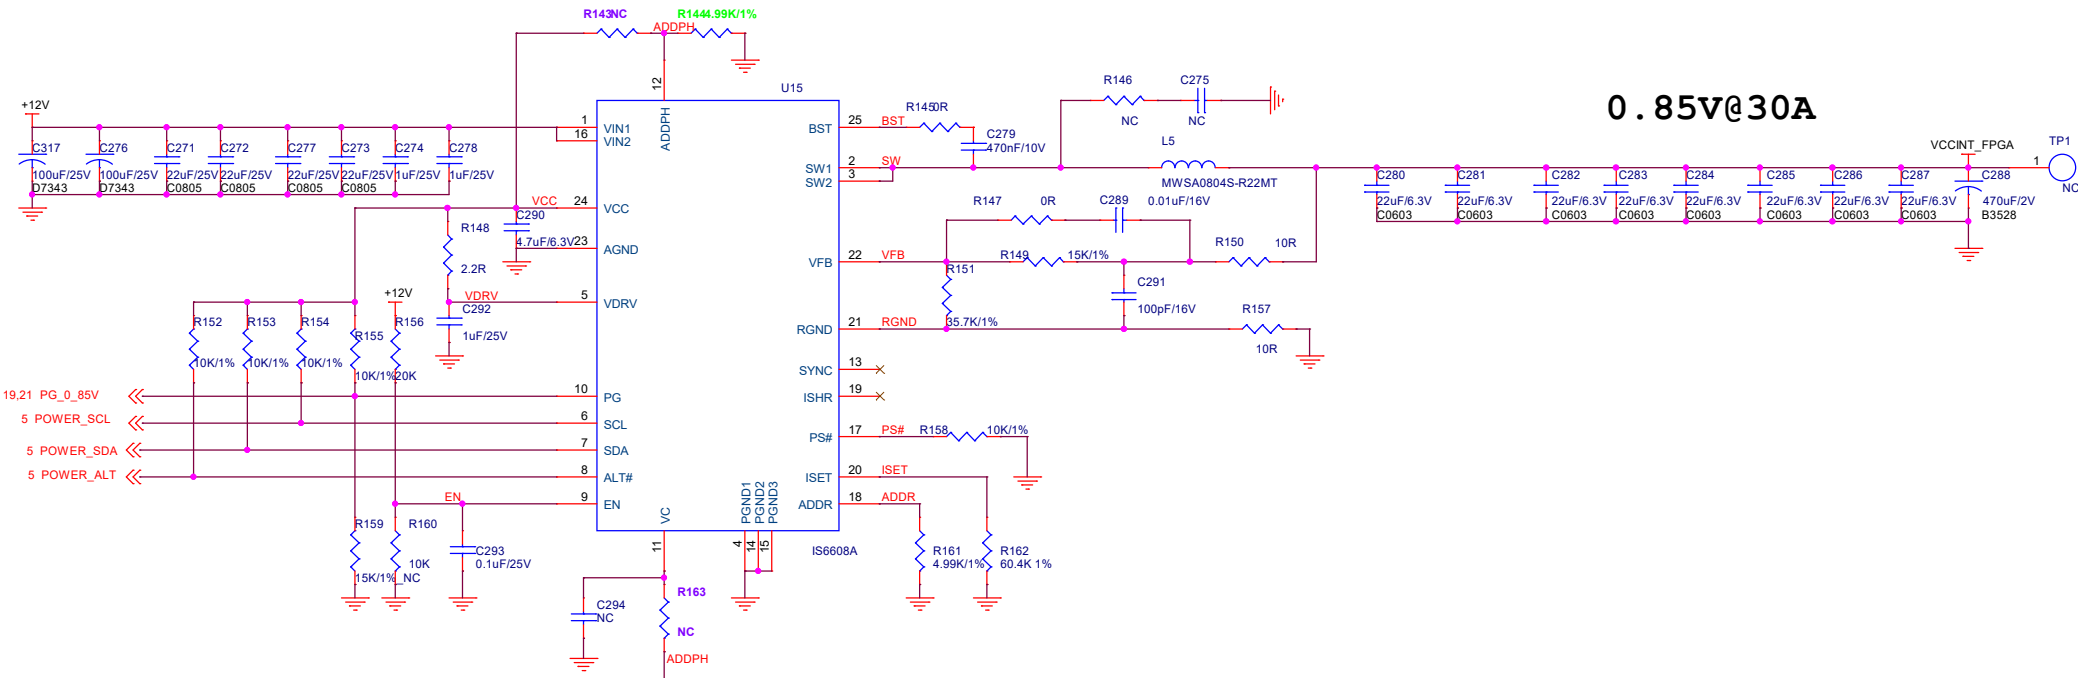


0.85V@30A

VCCAUX is 1.8V

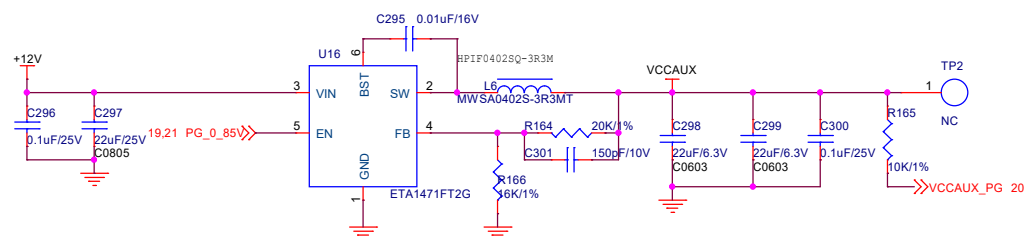


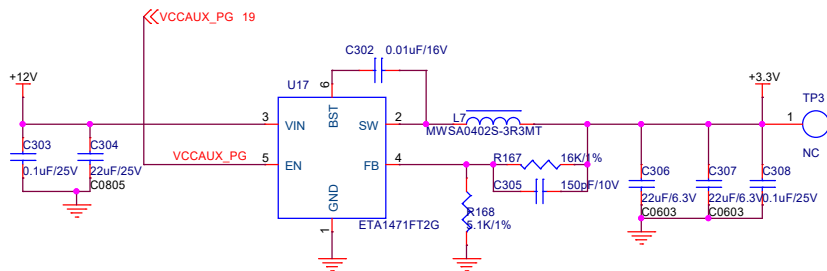


$$V_{out}=0.8 \times (1 + R1/R2)$$

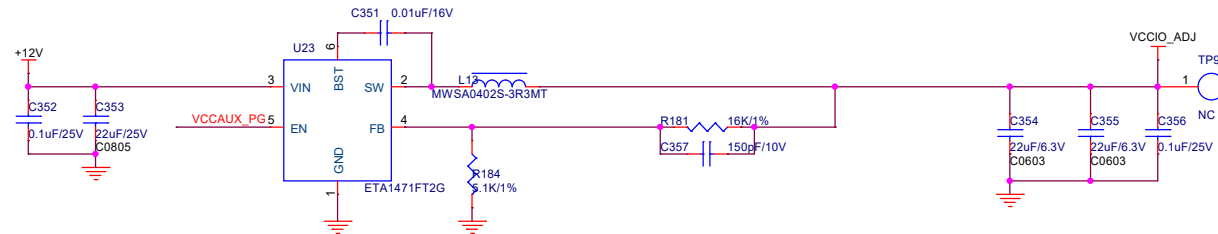



$$V_{out}=0.8 \times (1 + R1/R2)$$

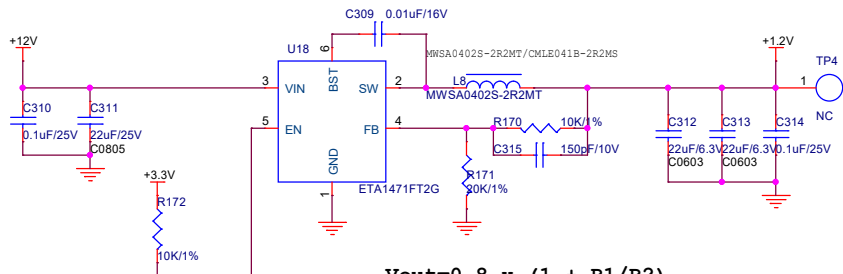




$$V_{out}=0.8 \times (1 + R1/R2)$$

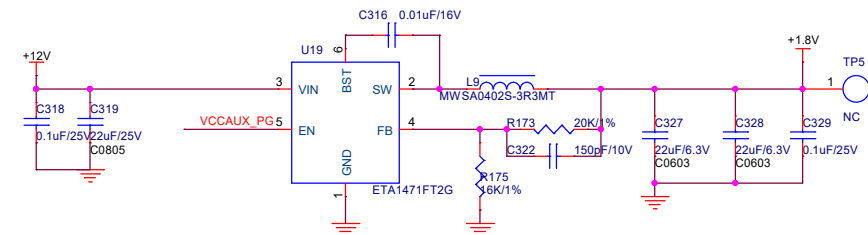


$$V_{out}=0.8 \times (1 + R1/R2)$$

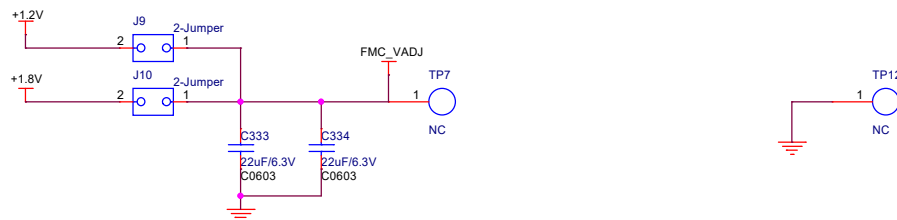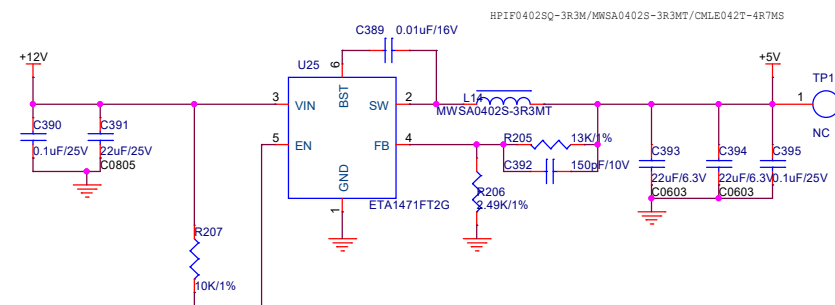

VCCINT>MGTAVCC (0.9V) >MGTAVTT (1.2V)

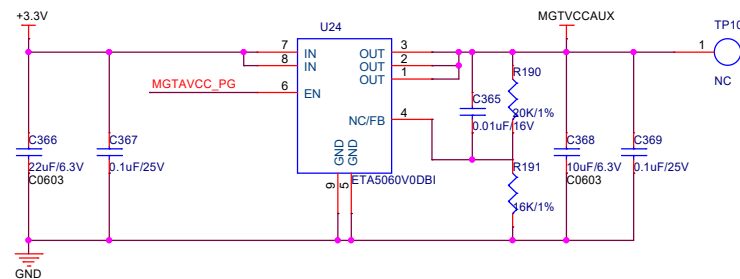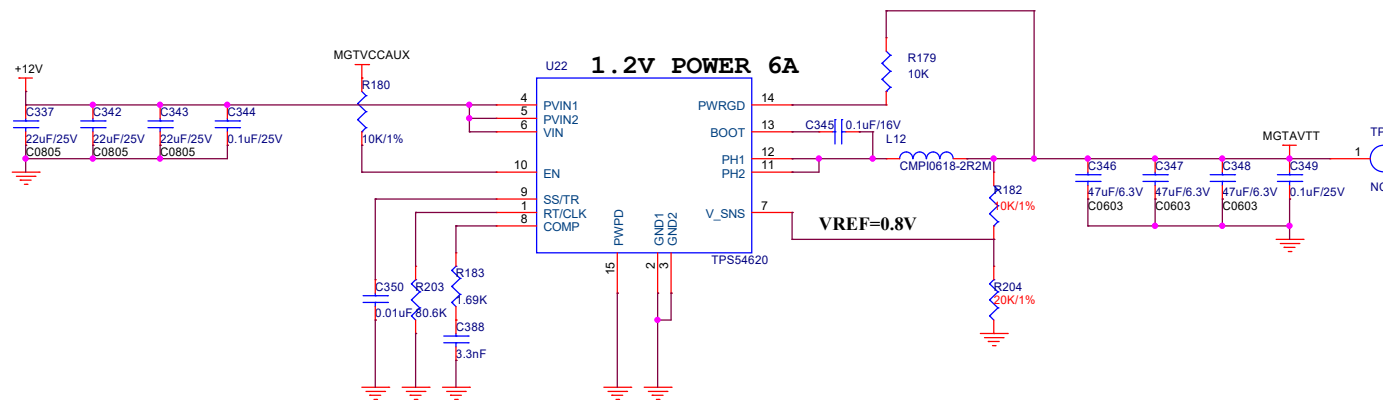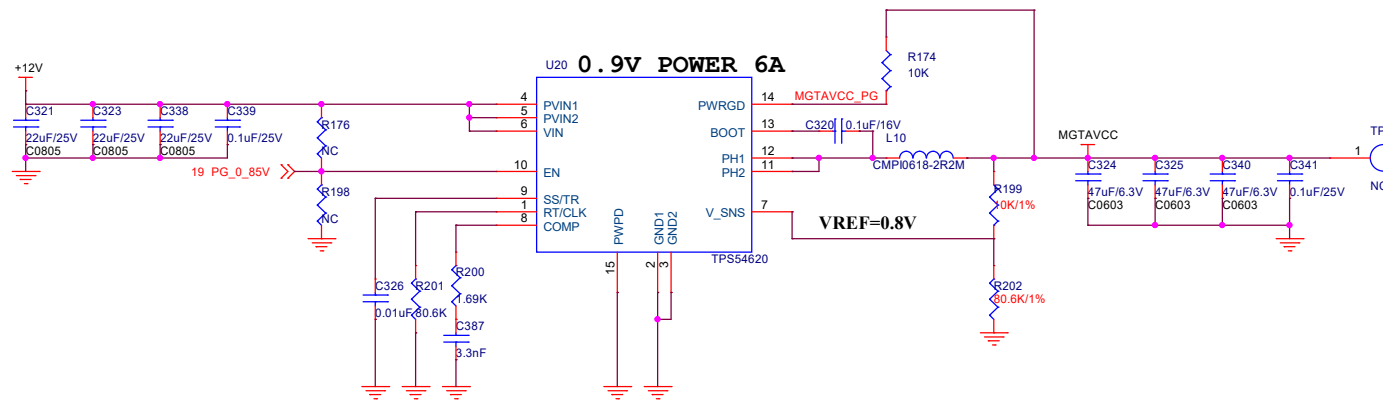

$$V_{out}=0.8 \times (1 + R1/R2)$$

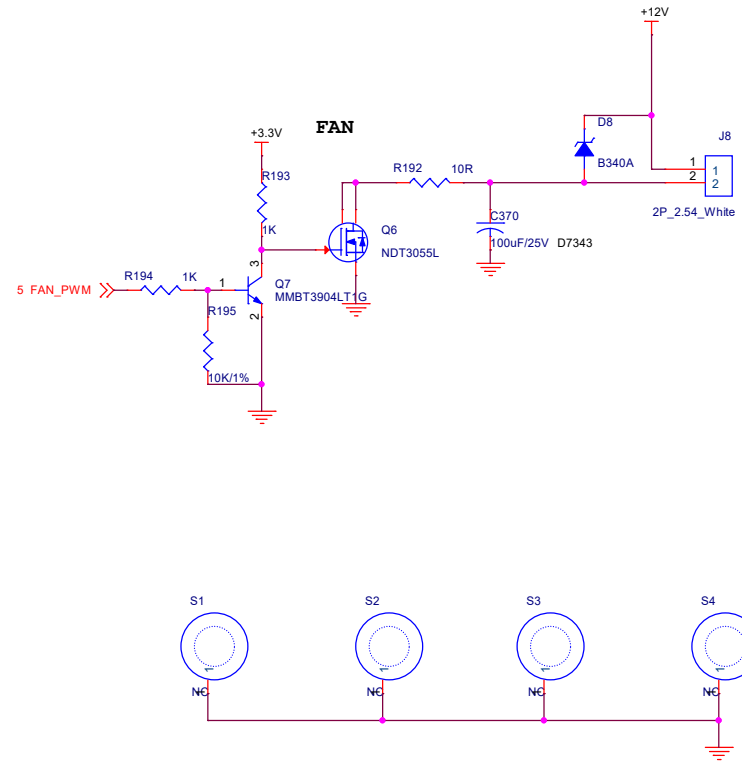

V2.0
1, 以太网换线, rx时钟换到专用时钟
2, FMC电压调节改为1.8和1.2V可选, 扩展口默认3.3V不可调节
3, 修改PCIE电平转换问题