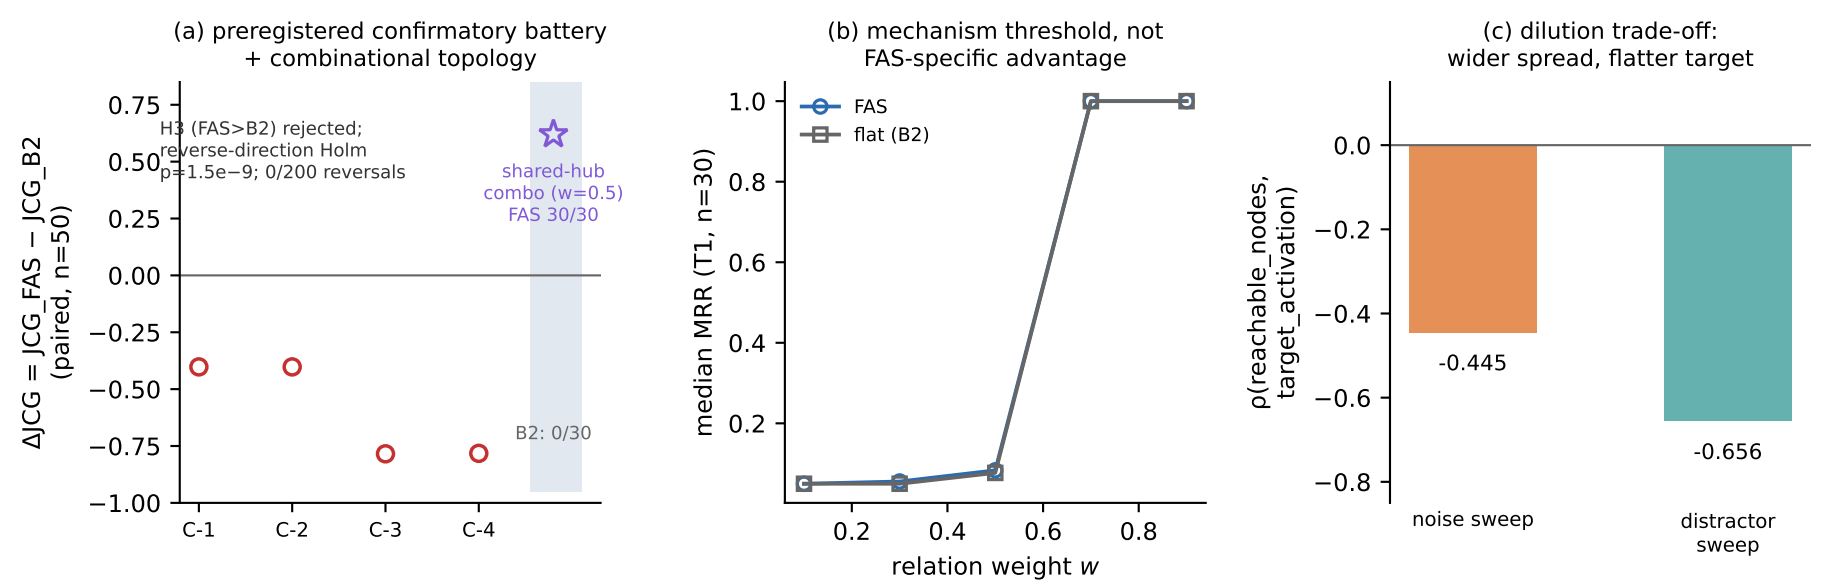
(a) preregistered confirmatory battery
+ combinational topology
ΔJCG = JCG_FAS − JCG_B2
(paired, n=50)
H3 (FAS>B2) rejected;
reverse-direction Holm
p=1.5e−9; 0/200 reversals
shared-hub
combo (w=0.5)
FAS 30/30
B2: 0/30
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
−1.00
C-1
C-2
C-3
C-4
(b) mechanism threshold, not
FAS-specific advantage
median MRR (T1, n=30)
FAS
flat (B2)
1.0
0.8
0.6
0.4
0.2
0.2
0.4
0.6
0.8
relation weight w
(c) dilution trade-off:
wider spread, flatter target
ρ(reachable_nodes,
target_activation)
0.0
−0.2
−0.4
−0.6
−0.8
-0.445
-0.656
noise sweep
distractor
sweep