

Project Name:

Projeto de Placa Multicanal de Leitura de Fotodiodos para Monitoramento

Released 01/05/2026

Page	Contents
1	Table of contents
2	System block diagram
3	Top level hierarchical connections
4	Power Management
5	Analog front-end channels 1 and 2 and 3 and 4
6	Analog front-end channels 5 and 6 and 7 and 8
7	ADC acquisition
8	I ² C control and isolation
9	Mechanical components

Design Notes

Example of informational notes.


Example of cautionary design notes.


Example of critical design notes.



ADDRESS
R. Aprígio Veloso, 882, Universitário
Campina Grande - PB
58429-900

PROJECT PCB_Project_MOPA_D.PrjPcb		VERSION	
TITLE [1] TableOfContents.SchDoc		SIZE A3	SCALE 1:1
DOCUMENT NAME: [1] TableOfContents.SchDoc		SHEET: 1 OF 8	
DOCUMENT REVISION:			
PROJECT REVISION:			

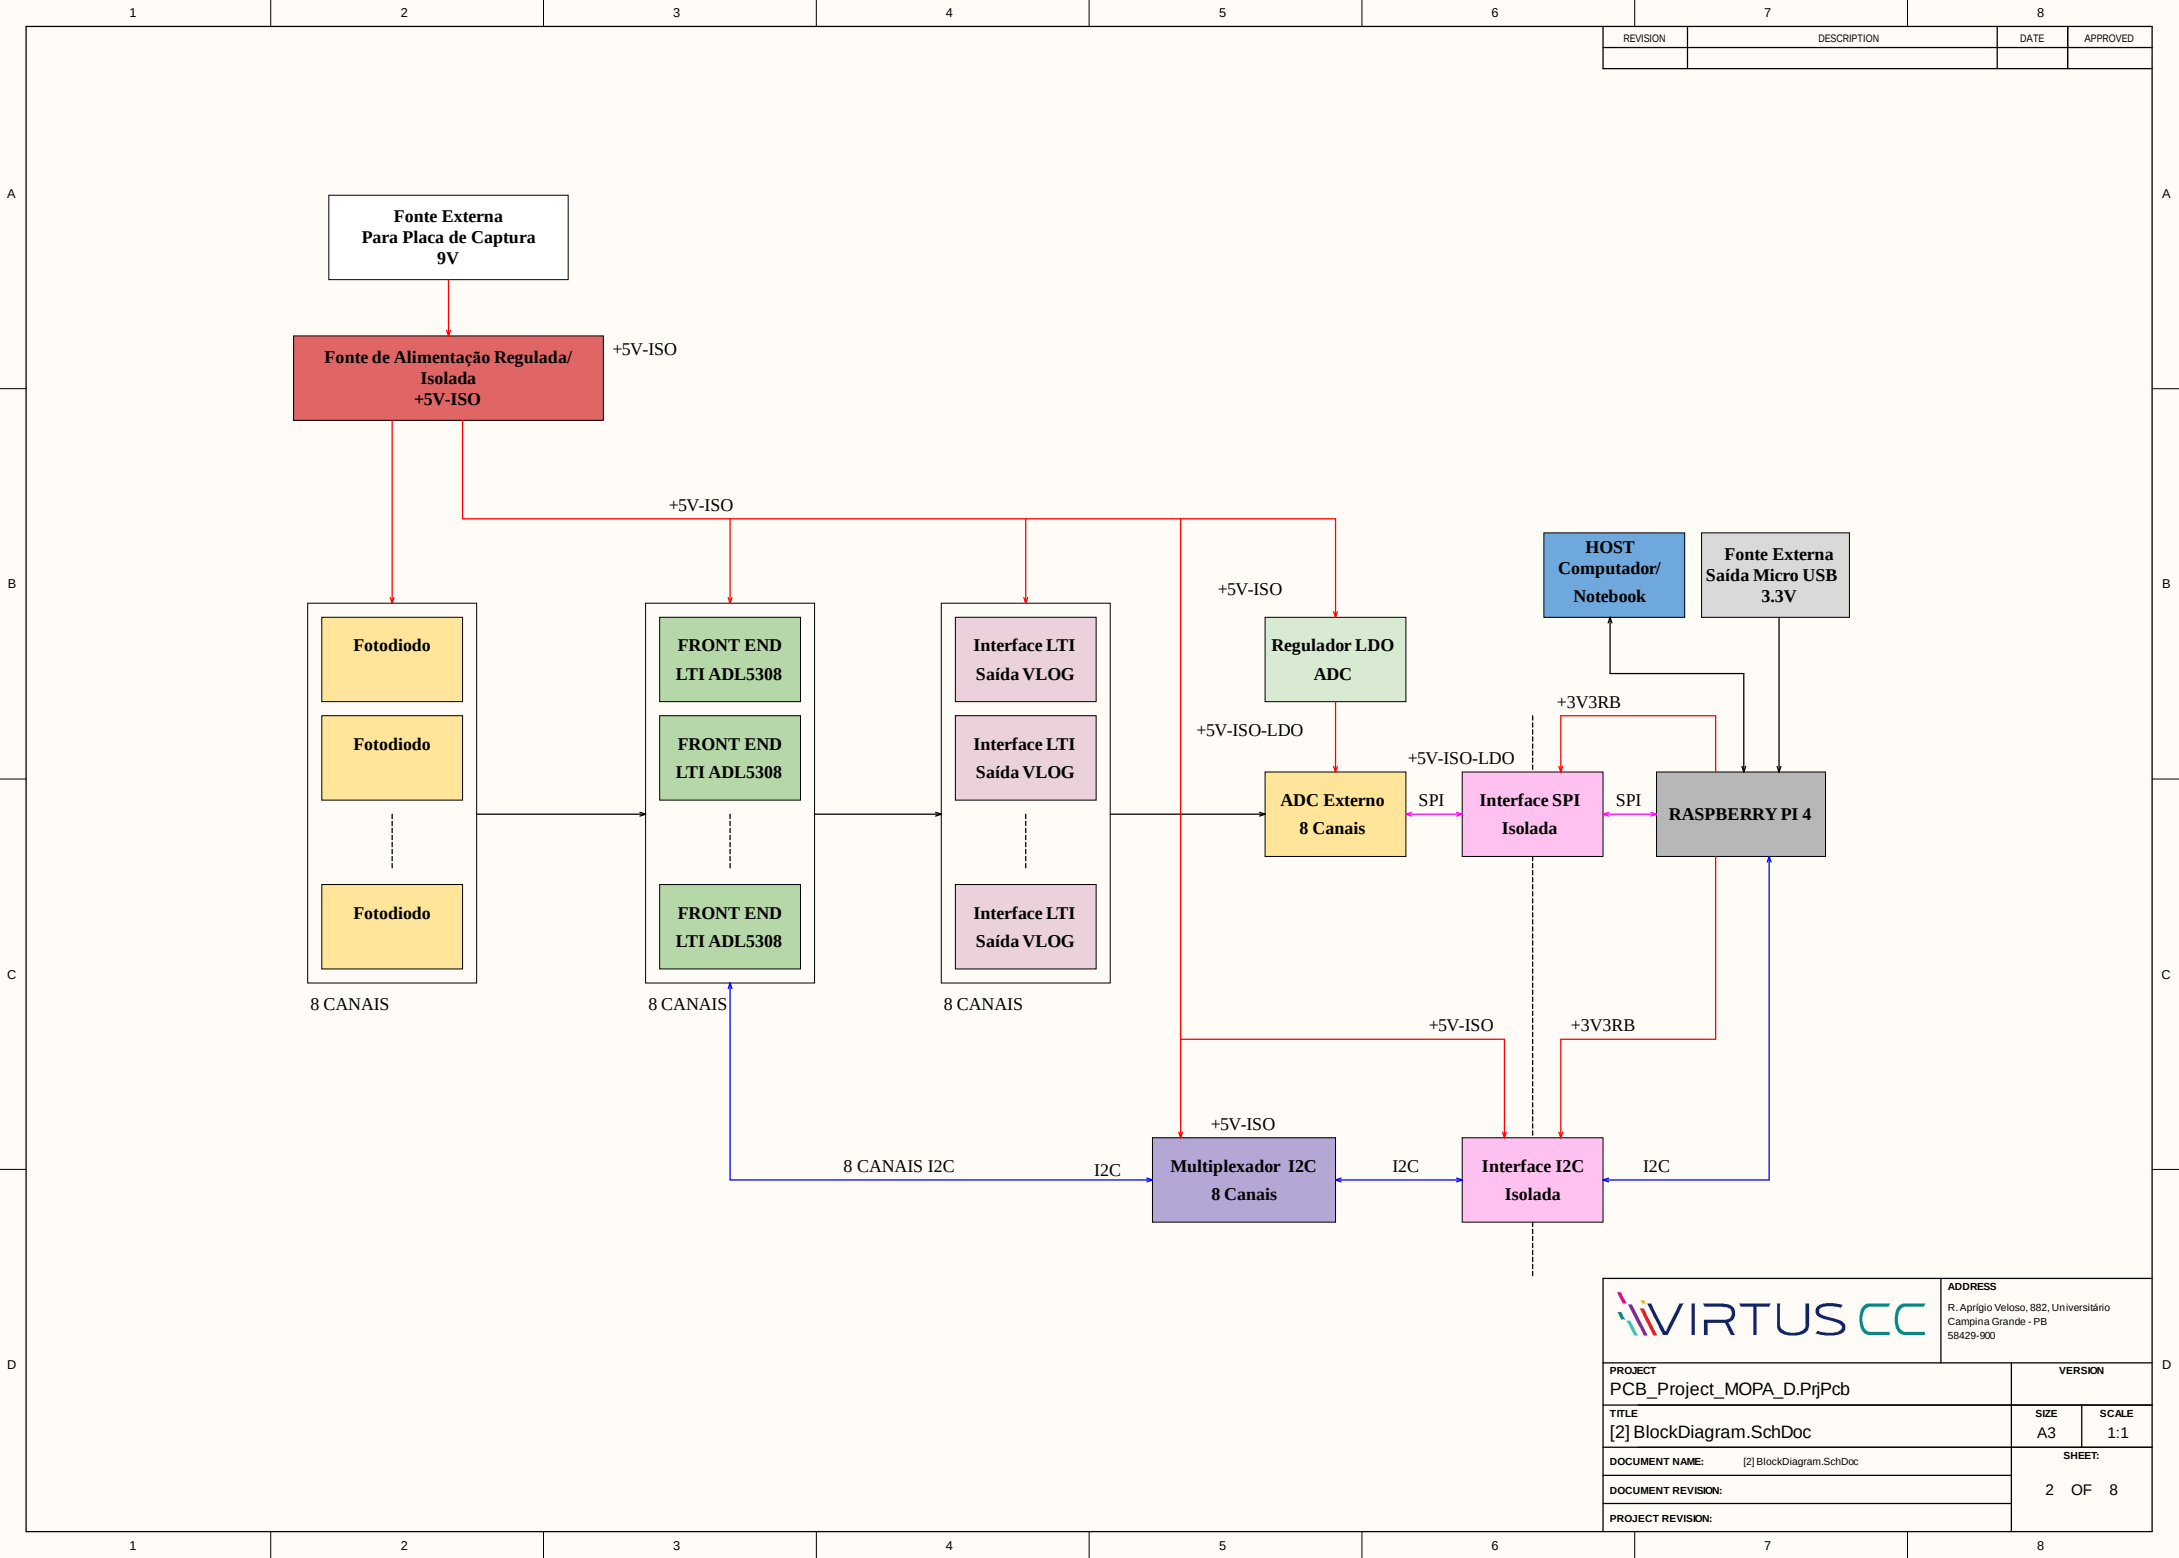

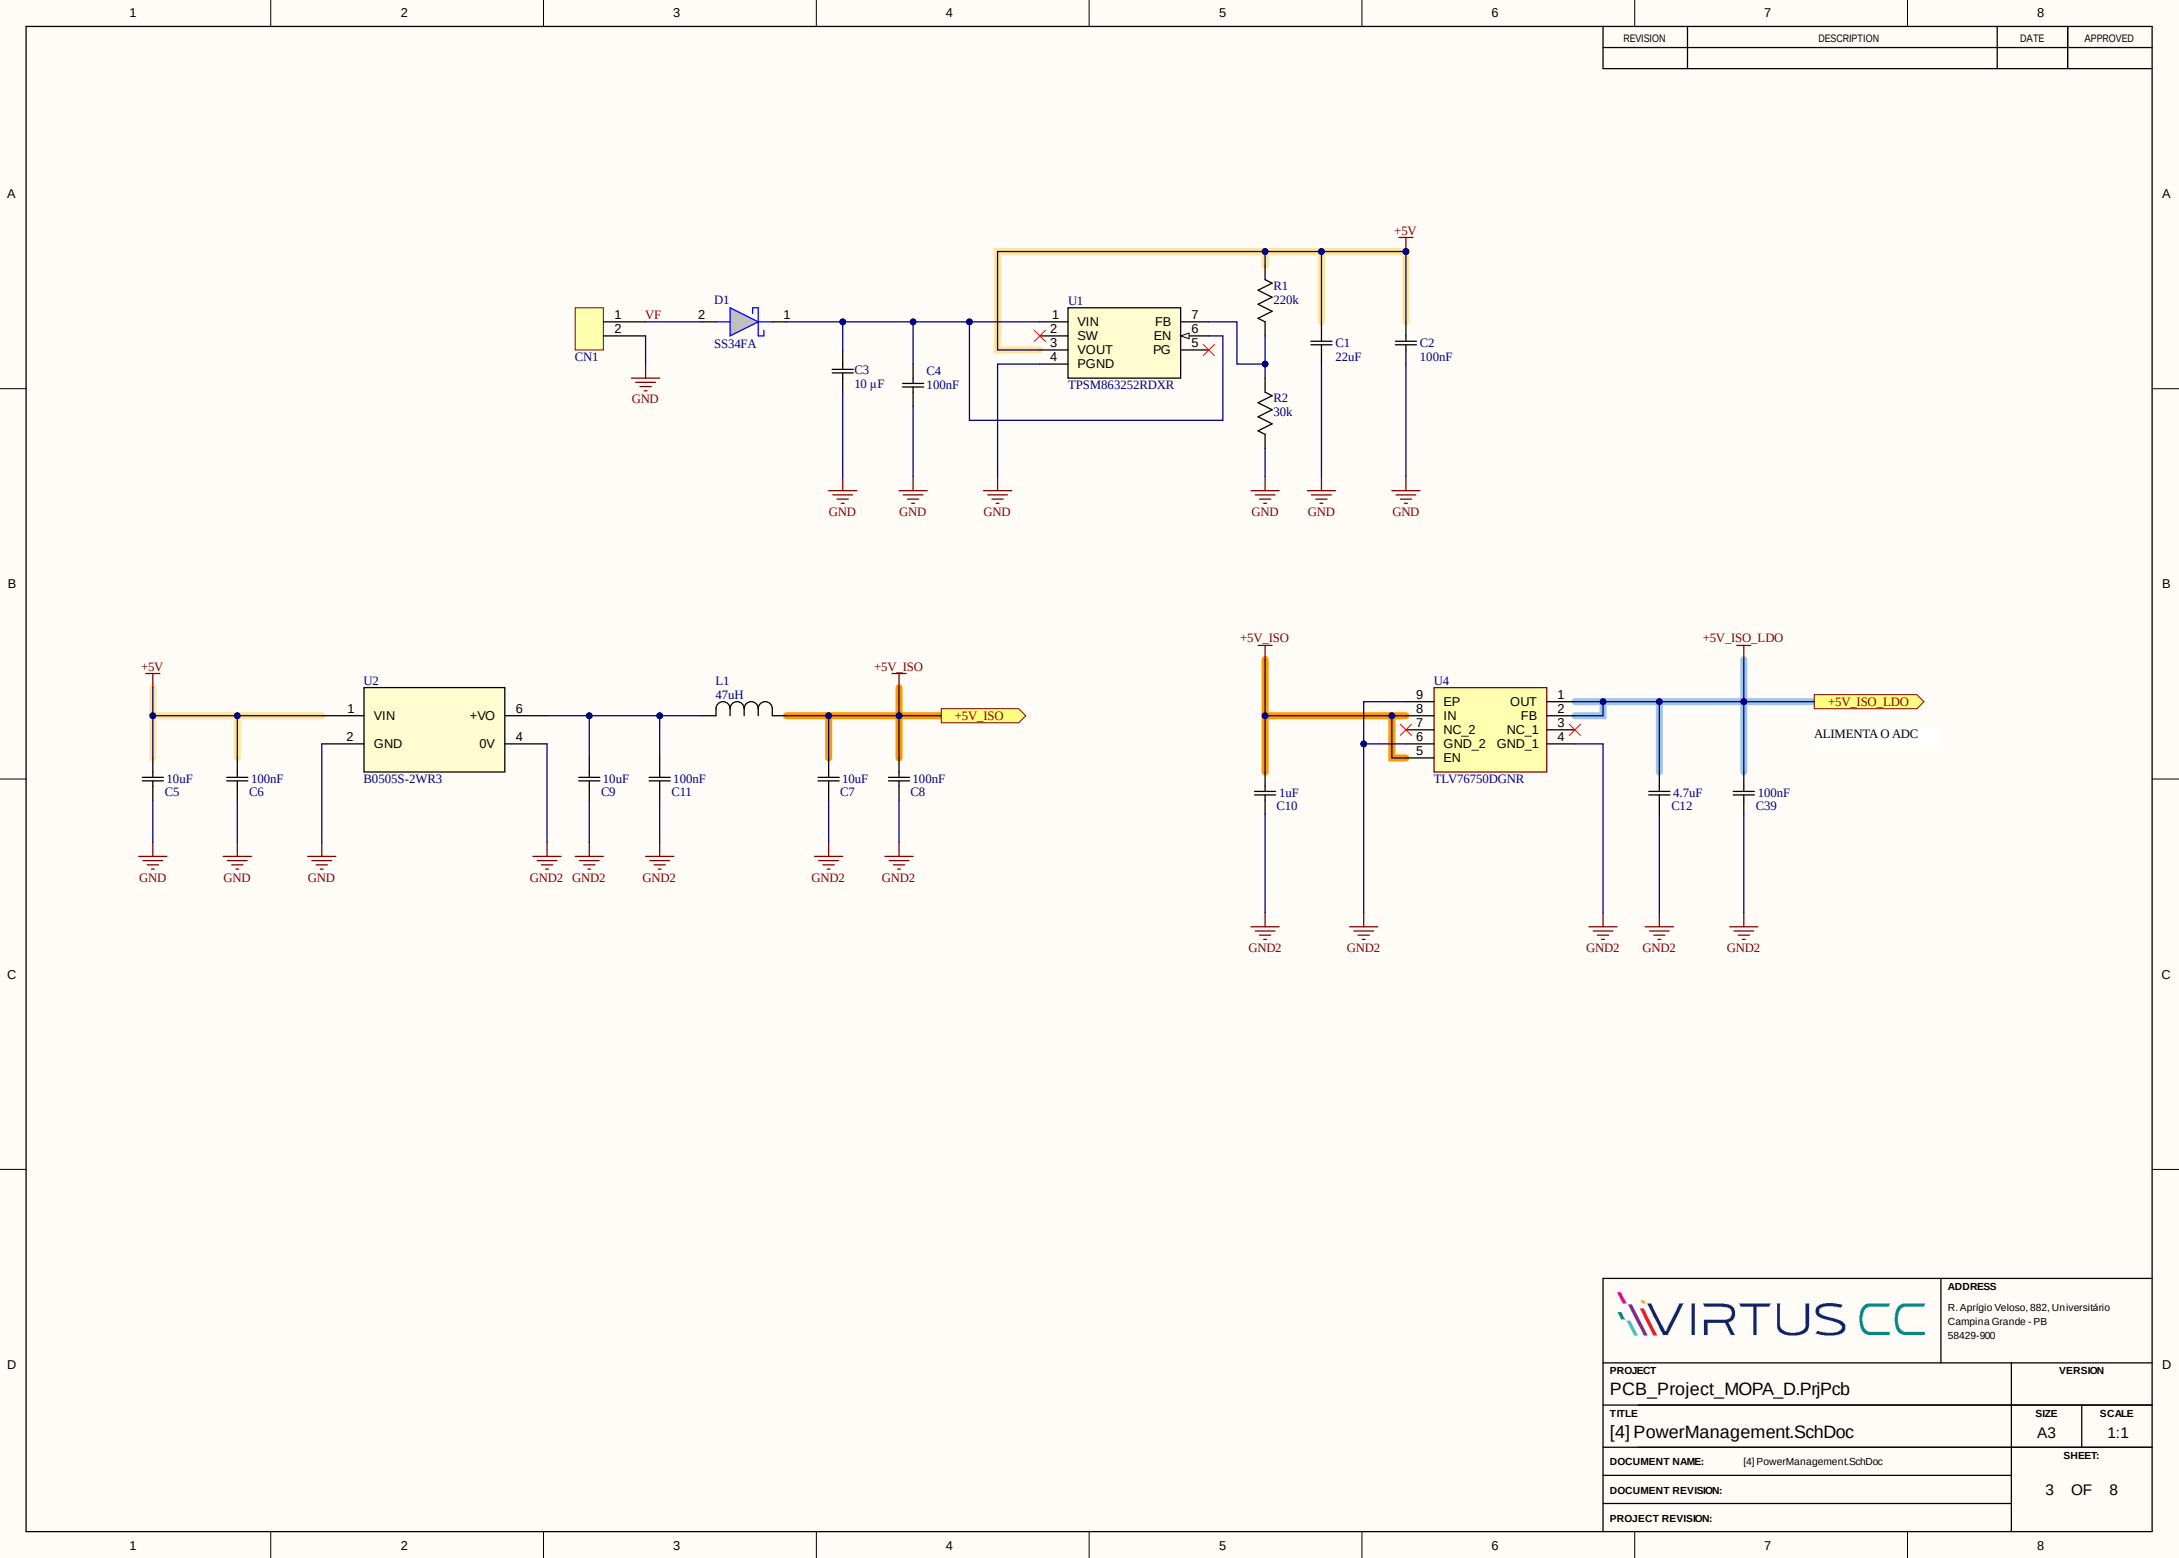


REVISION	DESCRIPTION	DATE	APPROVED



ADDRESS
R. Aprígio Veloso, 882, Universitário
Campina Grande - PB
58429-900

PROJECT PCB_Project_MOPA_D.PrjPcb		VERSION	
TITLE [4] PowerManagement.SchDoc		SIZE A3	SCALE 1:1
DOCUMENT NAME: [4] PowerManagement.SchDoc		SHEET:	
DOCUMENT REVISION:		3 OF 8	
PROJECT REVISION:			

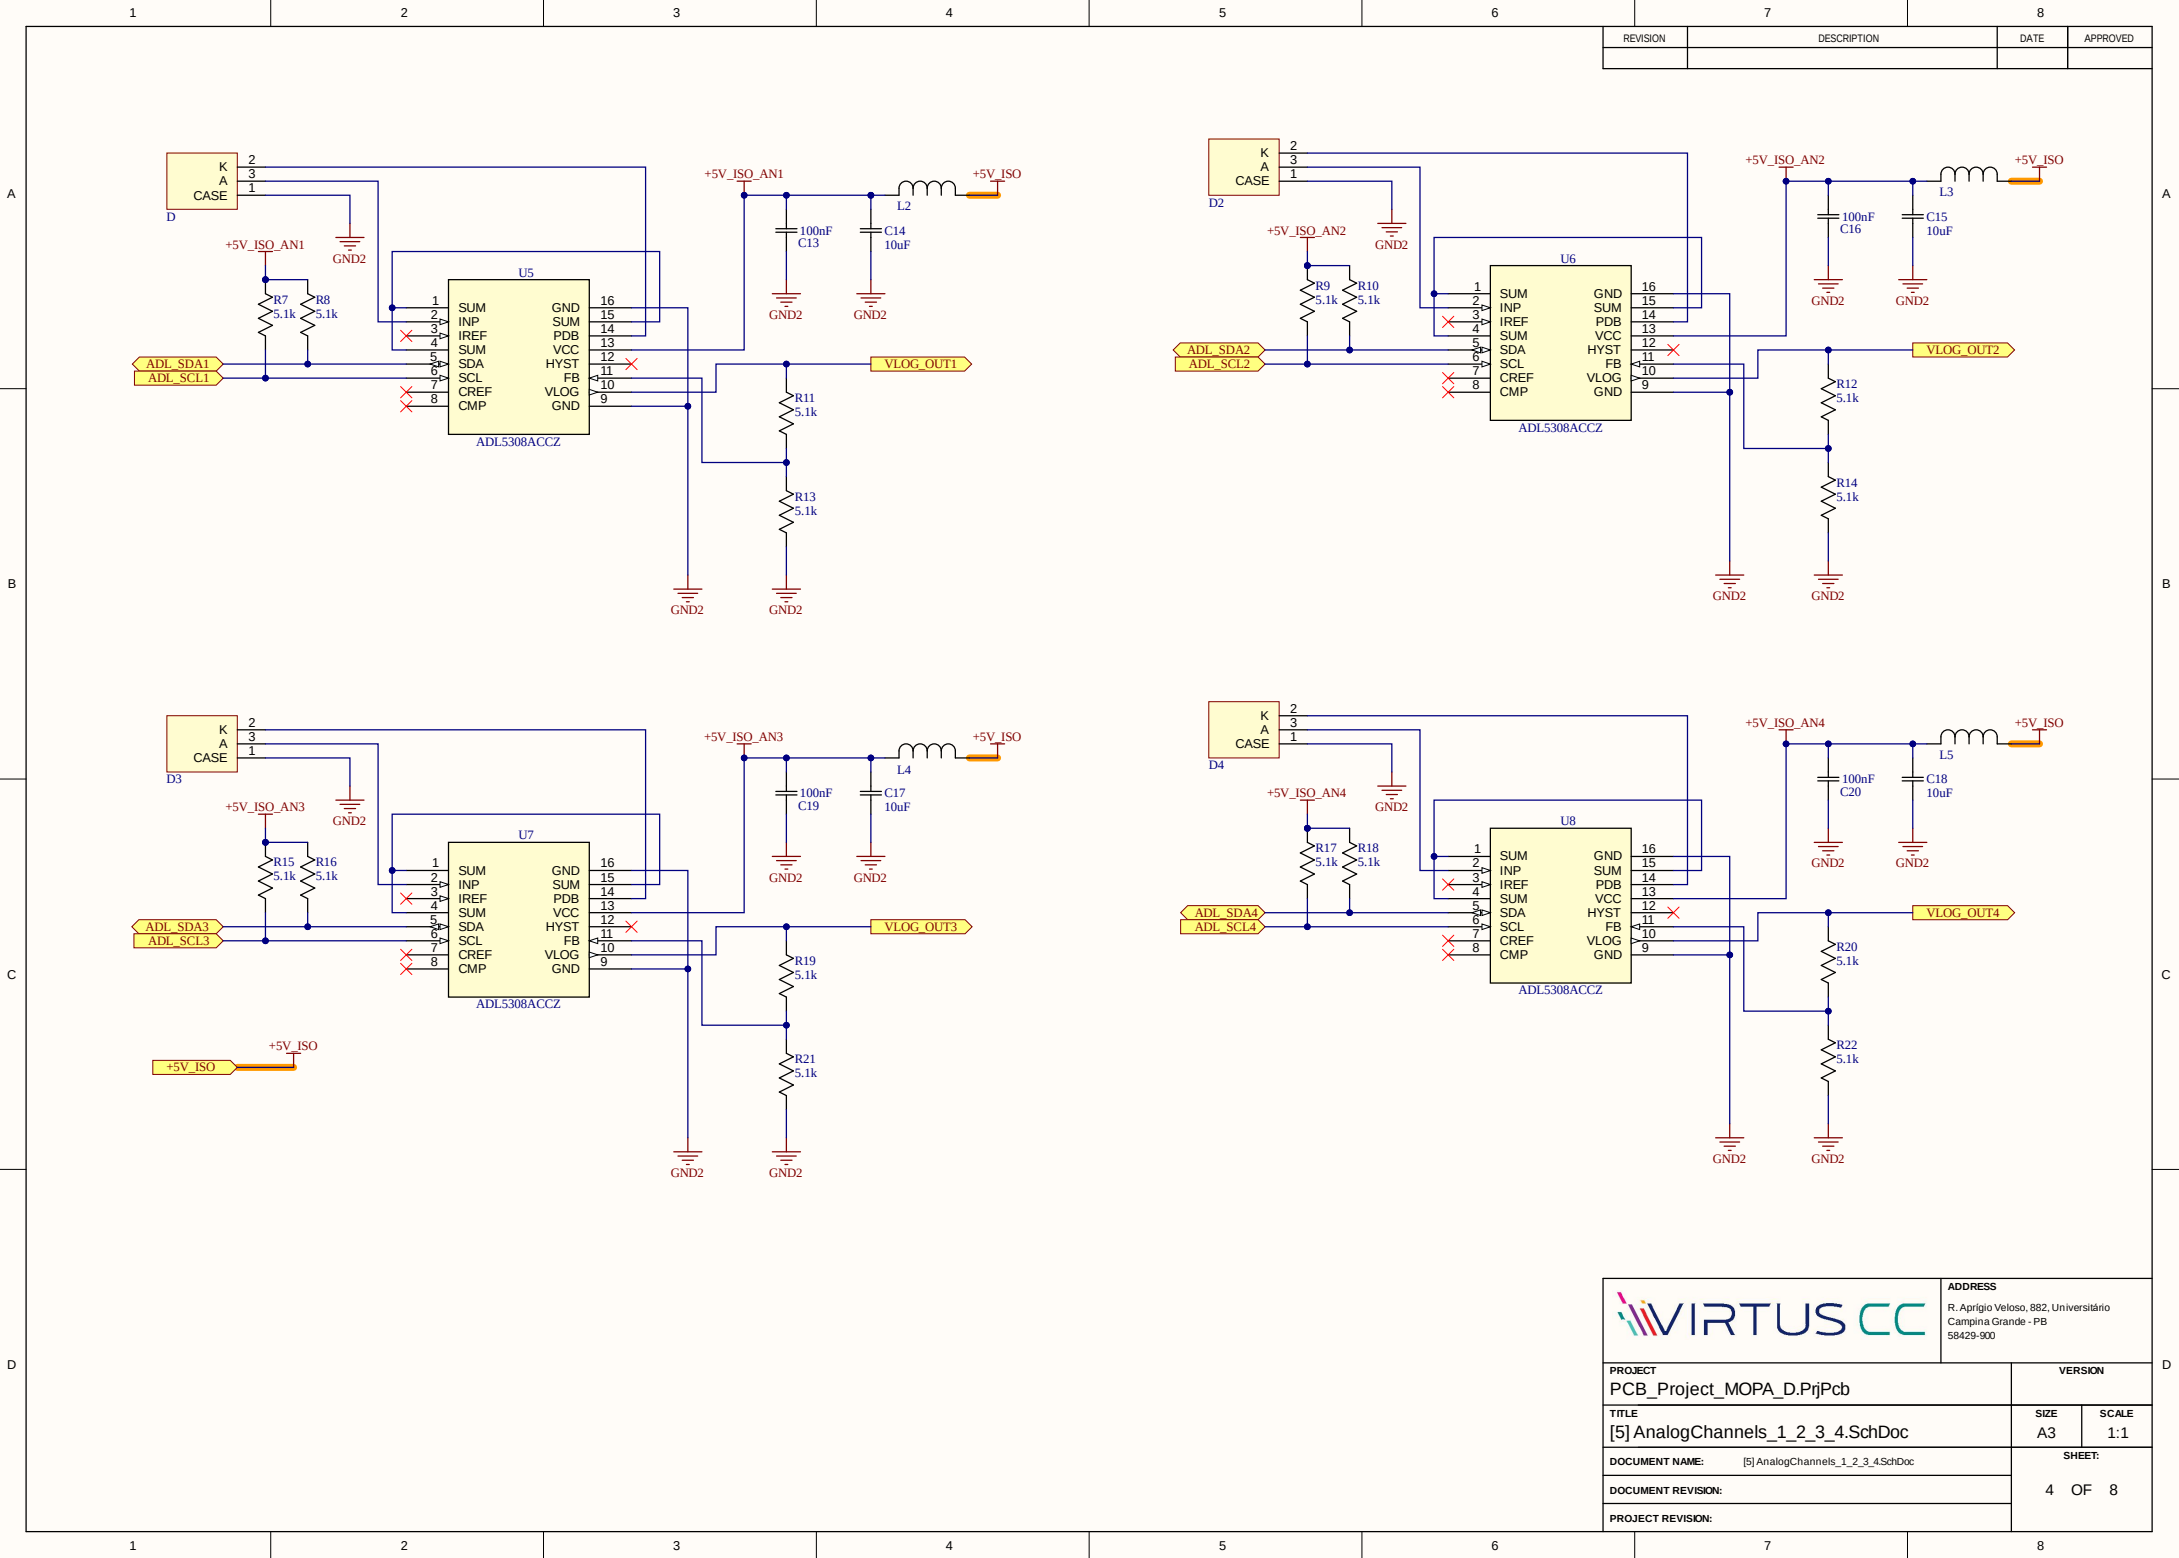


REVISION	DESCRIPTION	DATE	APPROVED




ADDRESS
R. Aprígio Veloso, 882, Universitário
Campina Grande - PB
58429-900

PROJECT PCB_Project_MOPA_D.PrjPcb		VERSION	
TITLE [5] AnalogChannels_1_2_3_4.SchDoc		SIZE A3	SCALE 1:1
DOCUMENT NAME: [5] AnalogChannels_1_2_3_4.SchDoc		SHEET:	
DOCUMENT REVISION:		4 OF 8	
PROJECT REVISION:			

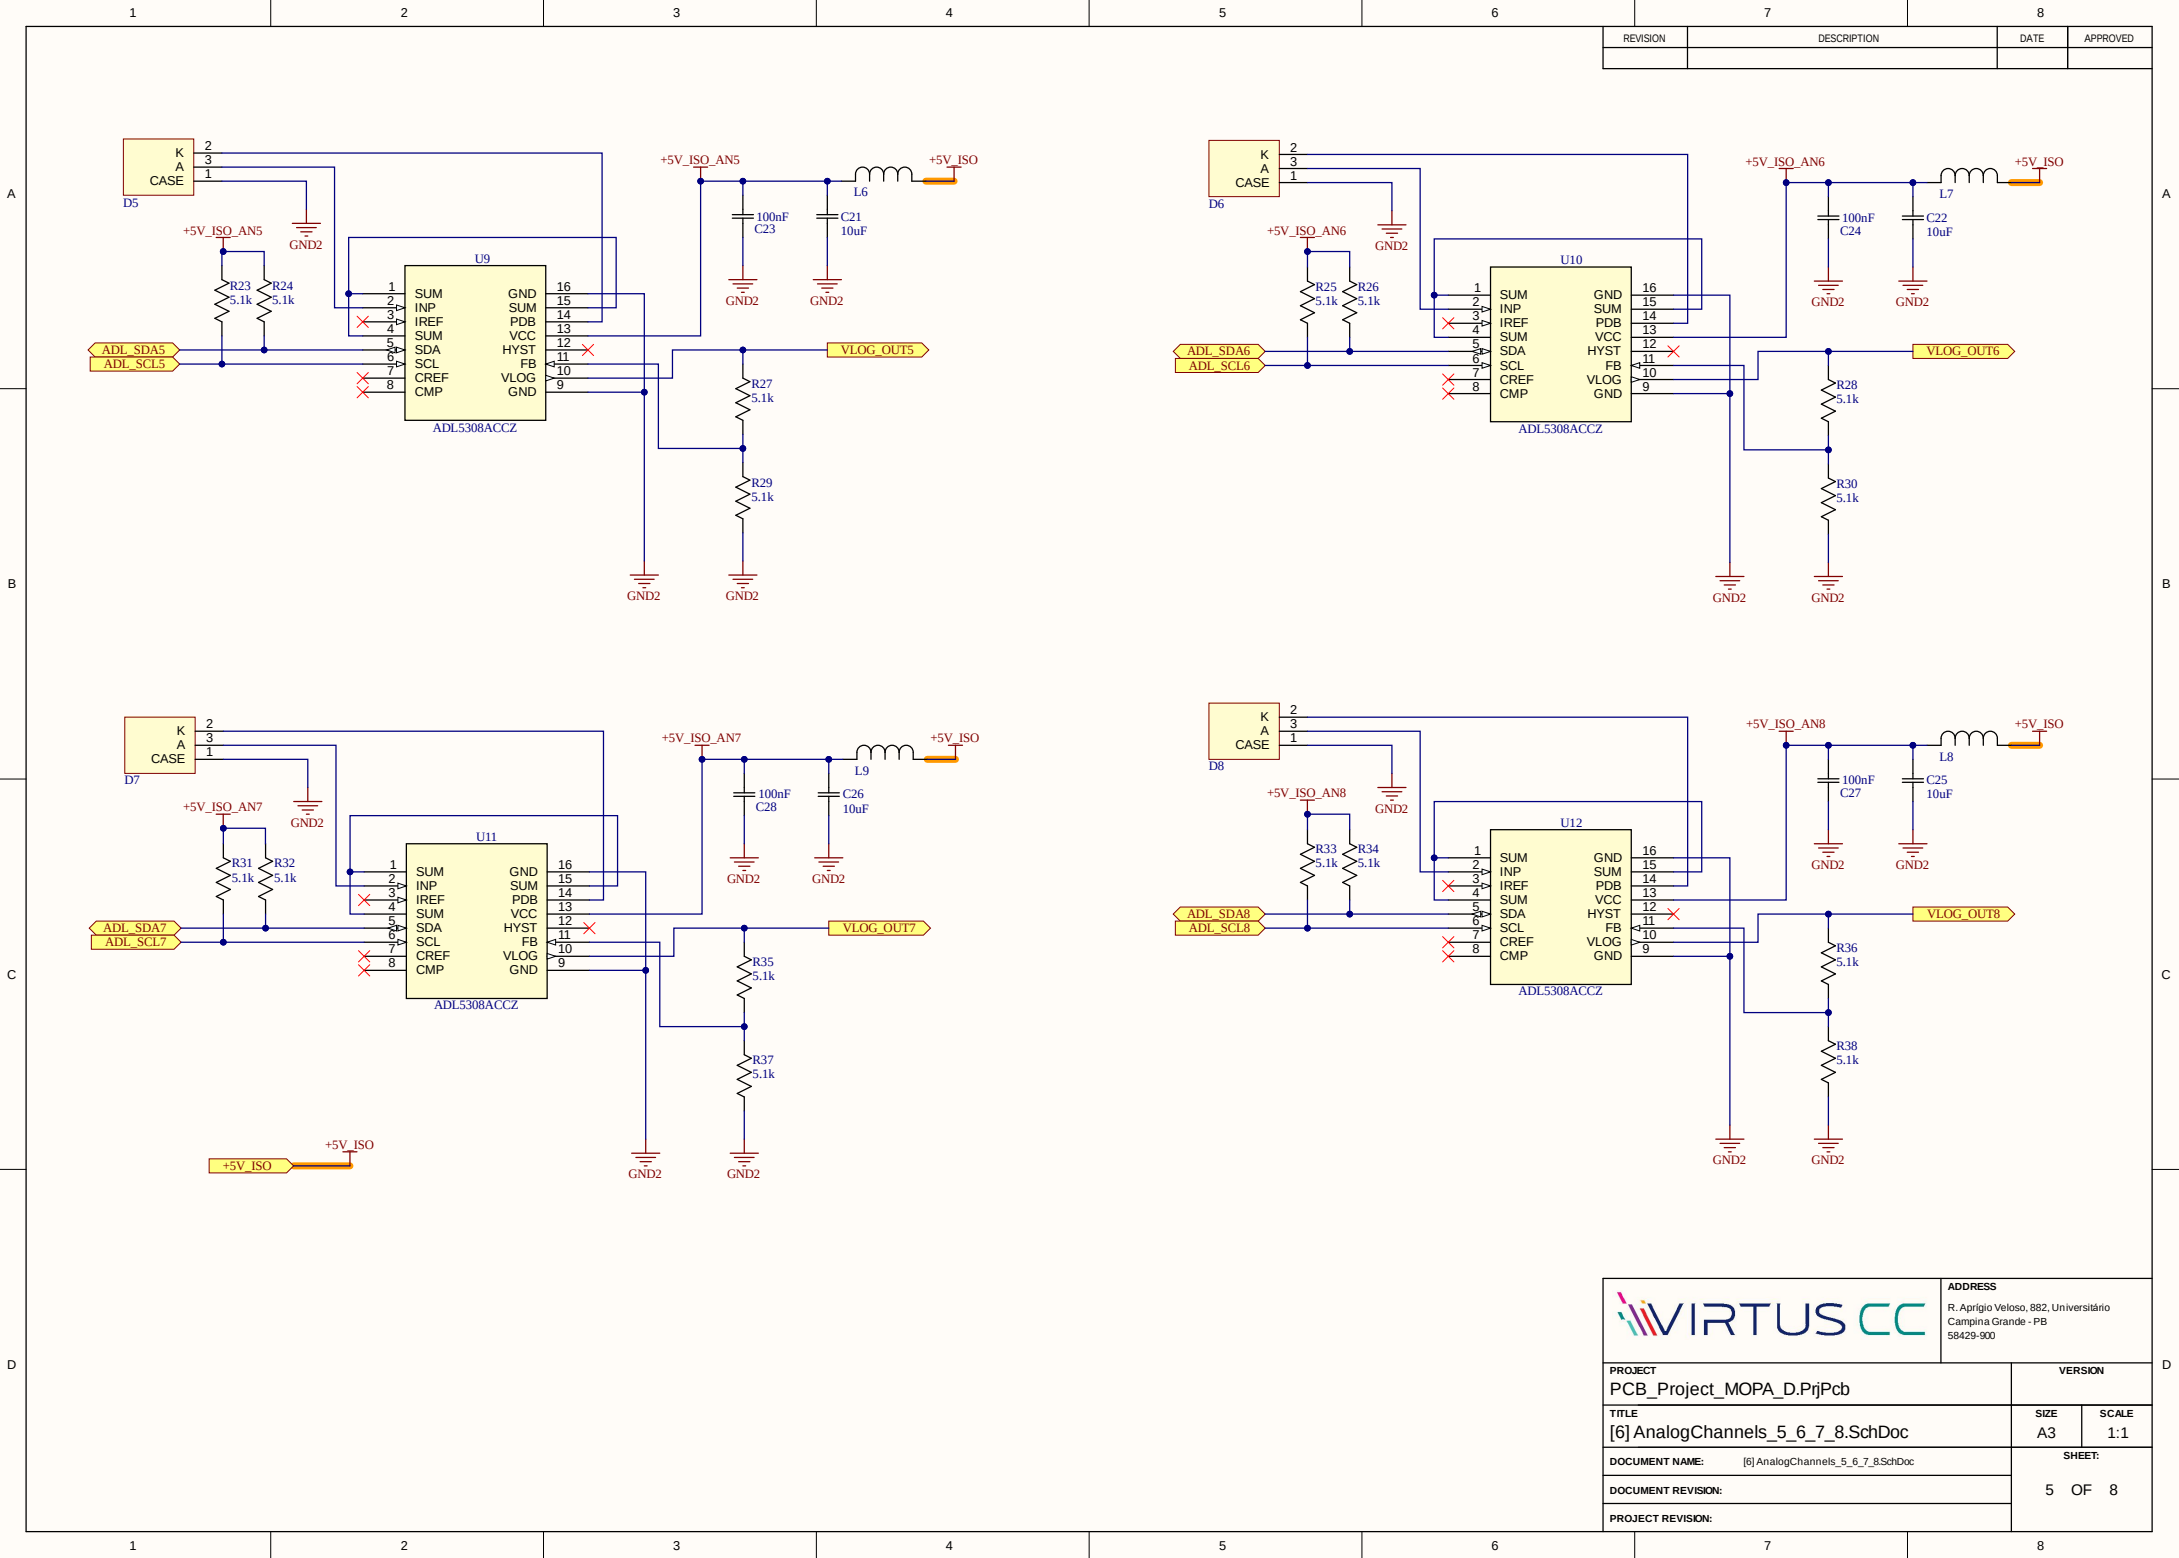


		ADDRESS R. Aprígio Veloso, 882, Universitário Campina Grande - PB 58429-900	
PROJECT PCB_Project_MOPA_D.PrjPcb		VERSION	
TITLE [6] AnalogChannels_5_6_7_8.SchDoc		SIZE A3	SCALE 1:1
DOCUMENT NAME: [6] AnalogChannels_5_6_7_8.SchDoc		SHEET:	
DOCUMENT REVISION:		5 OF 8	
PROJECT REVISION:			

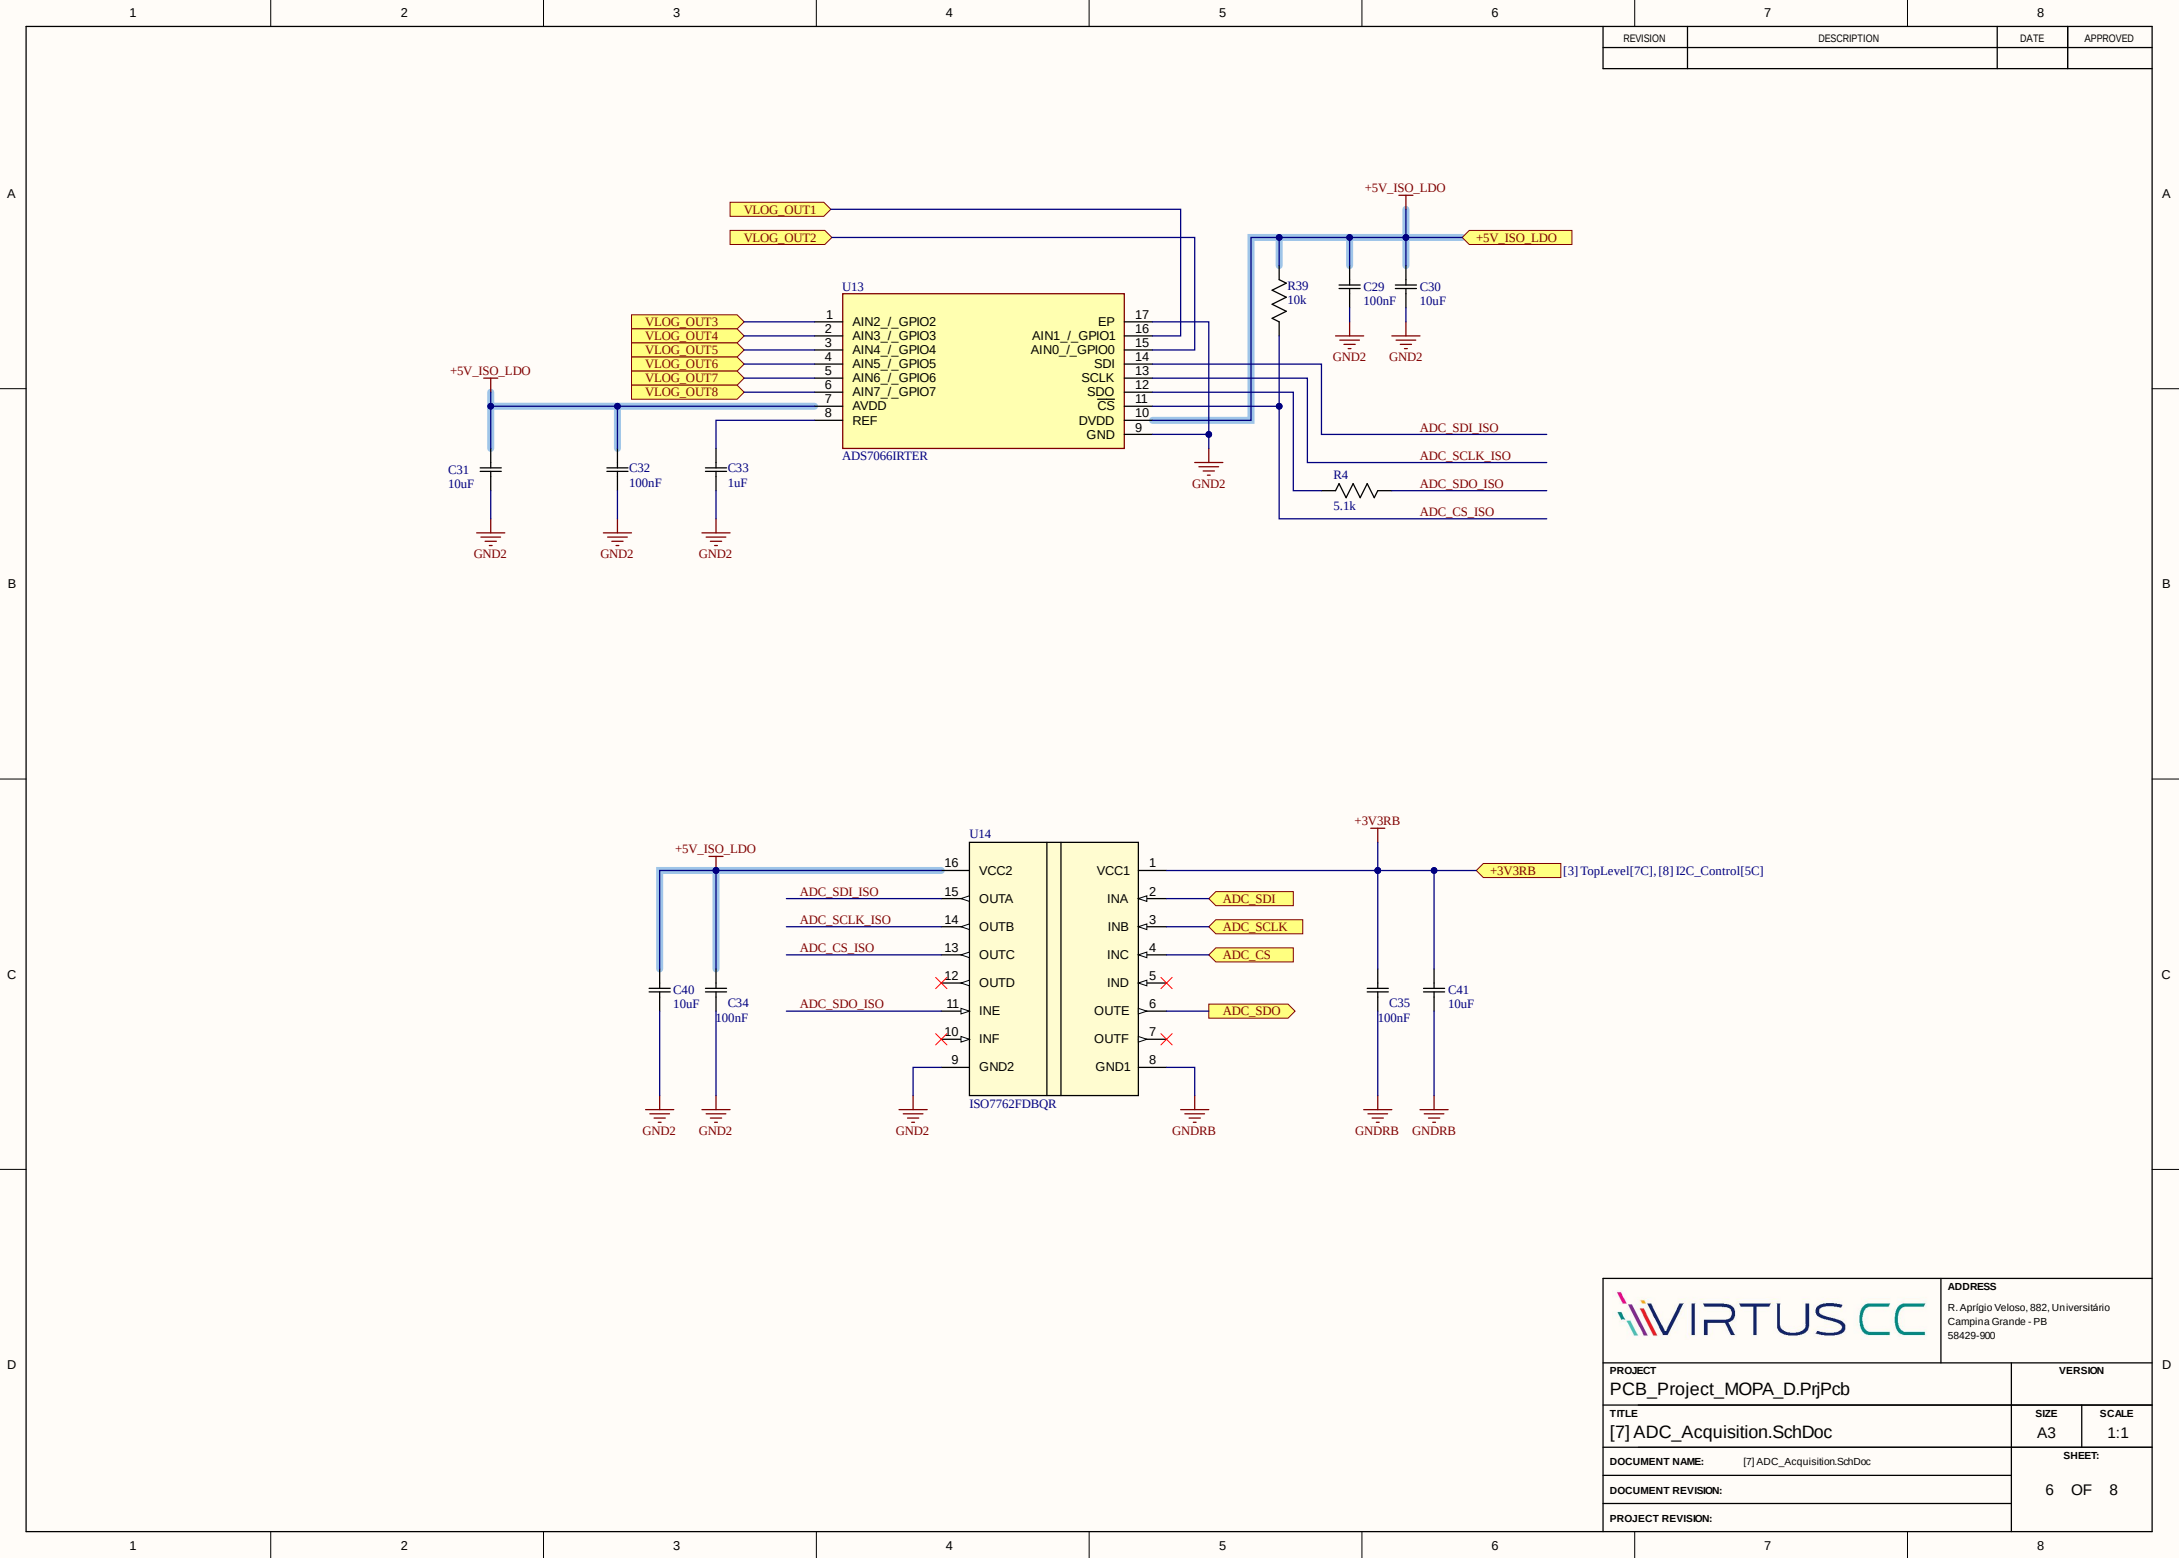

REVISION	DESCRIPTION	DATE	APPROVED

		ADDRESS R. Aprígio Veloso, 882, Universitário Campina Grande - PB 58429-900	
PROJECT PCB_Project_MOPA_D.PrjPcb		VERSION	
TITLE [7] ADC_Acquisition.SchDoc		SIZE A3	SCALE 1:1
DOCUMENT NAME: [7] ADC_Acquisition.SchDoc		SHEET:	
DOCUMENT REVISION:		6 OF 8	
PROJECT REVISION:			

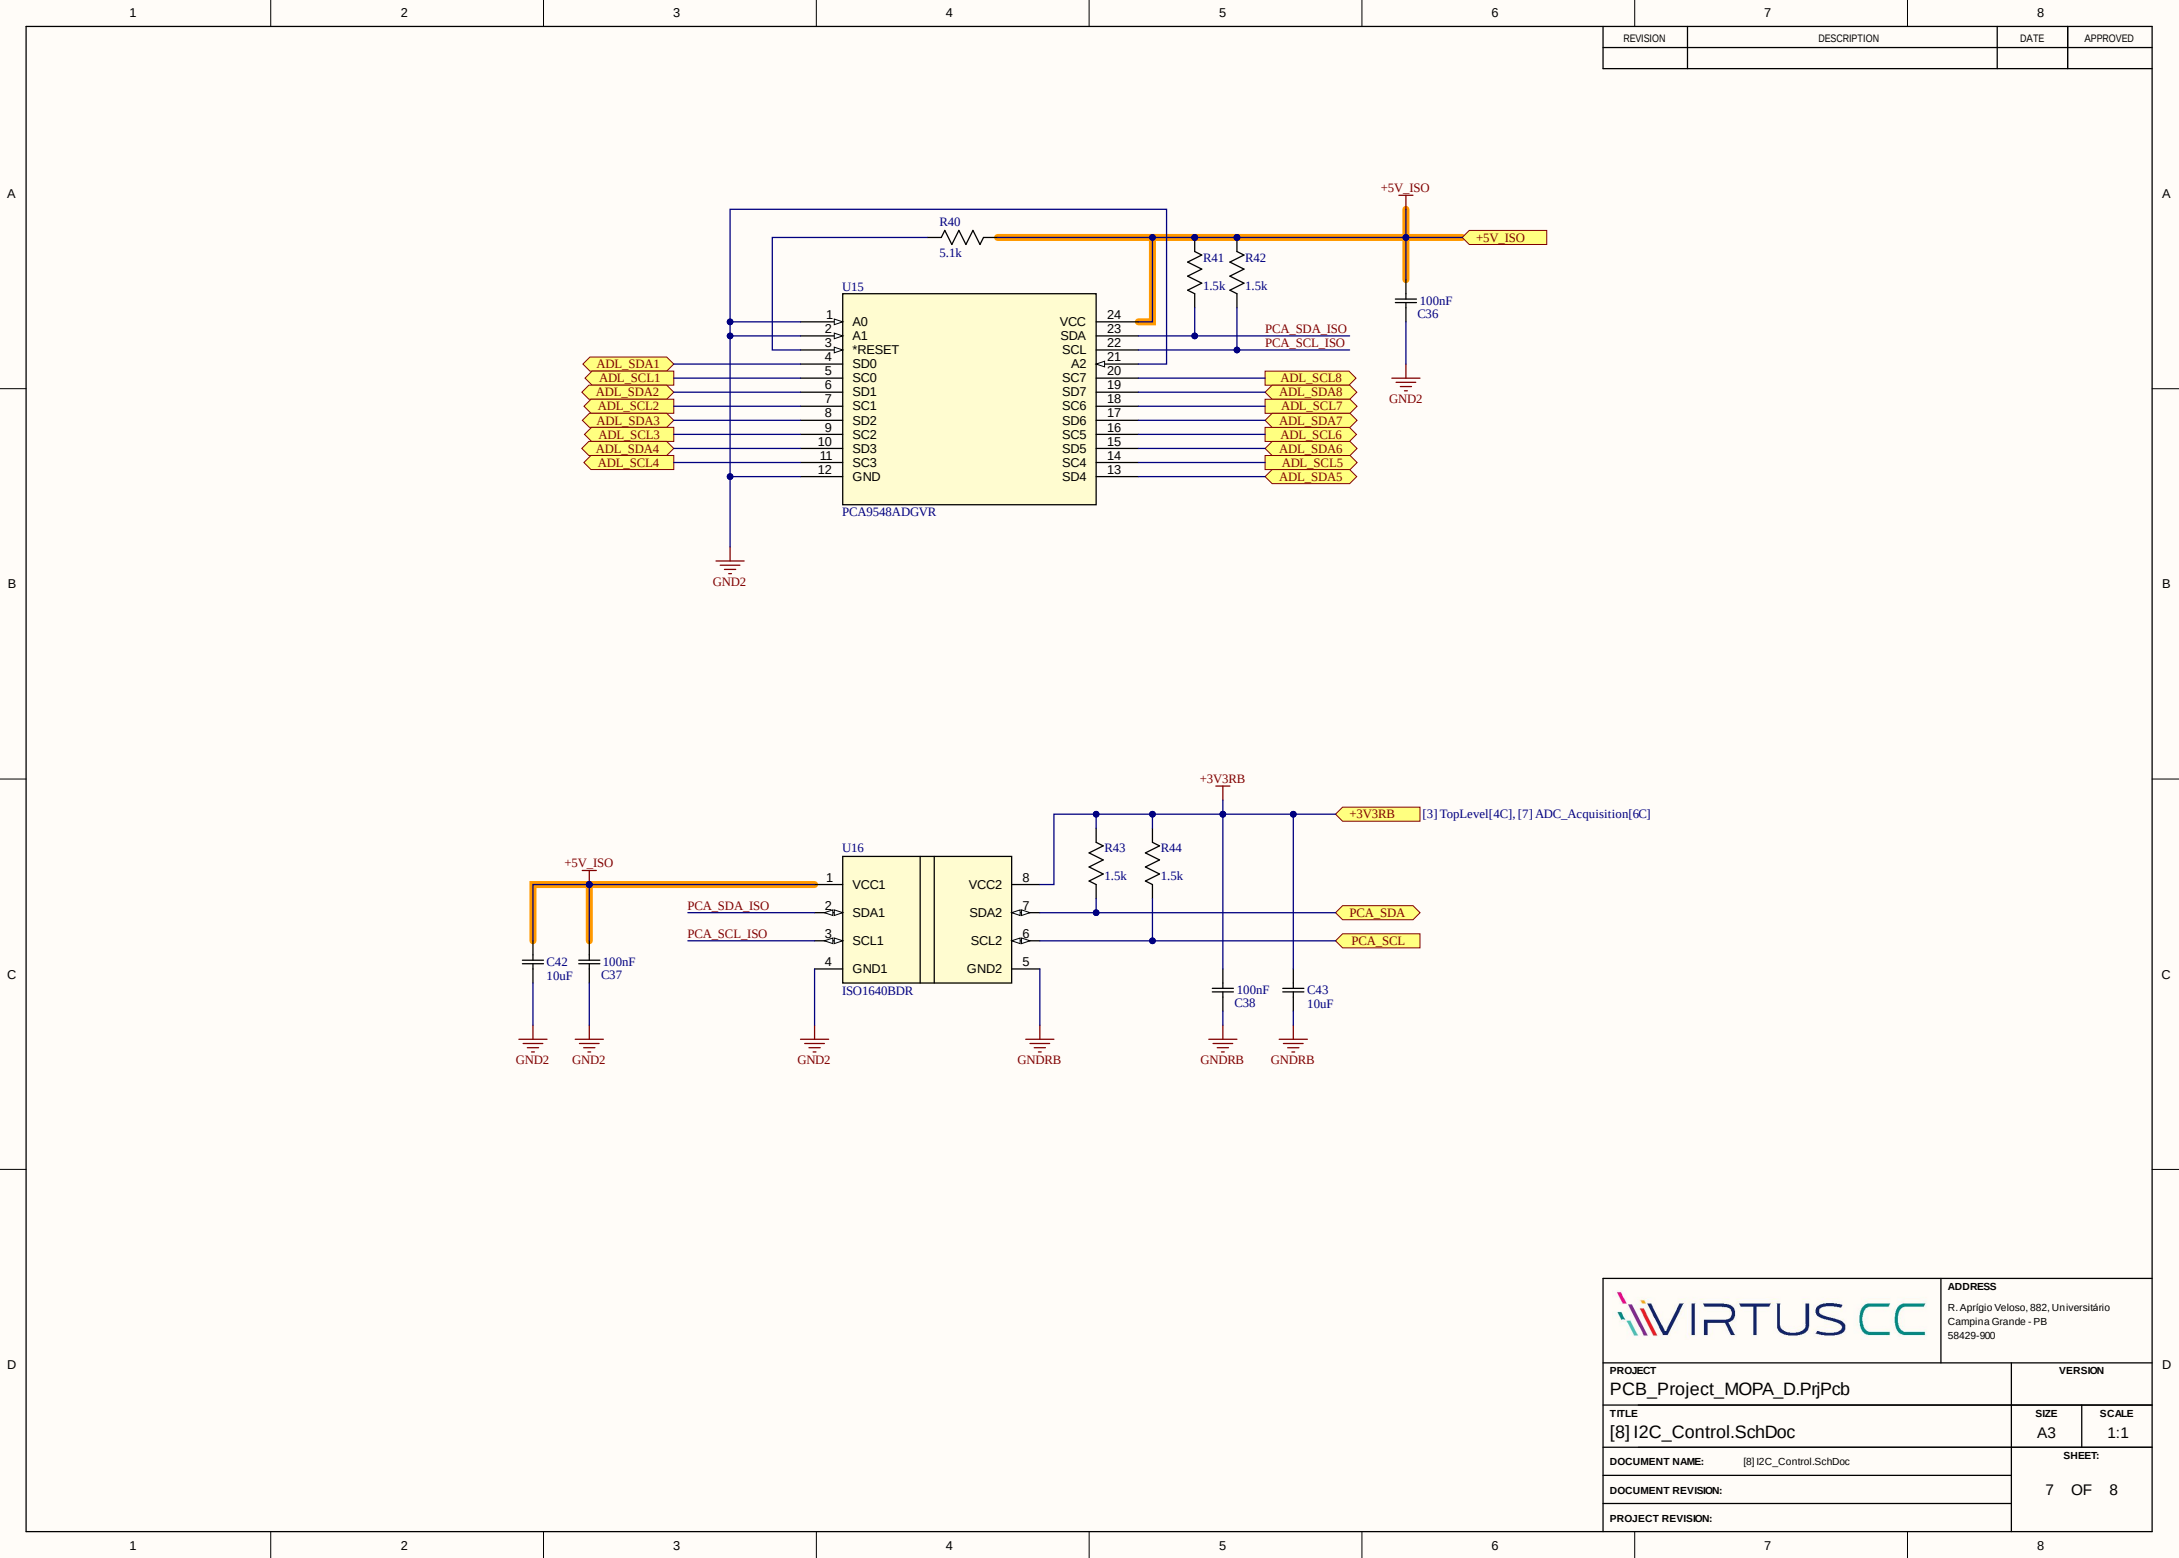

		ADDRESS R. Aprígio Veloso, 882, Universitário Campaína Grande - PB 58429-900	
PROJECT PCB_Project_MOPA_D.PrjPcb		VERSION	
TITLE [8] I2C_Control.SchDoc		SIZE A3	SCALE 1:1
DOCUMENT NAME: [8] I2C_Control.SchDoc		SHEET:	
DOCUMENT REVISION:		7 OF 8	
PROJECT REVISION:			

Comment	Description	Designator	Footprint	LibRef	Quantity
CL10A226M07J2NC	CAP: SMT (0603); 22uF; 20%; 16V; X5R; CERAMIC	C1	CAP_CL10_SAM	CL10A226M07J2NC	1
GCM155R71H104KE02 D	Description	C2, C4, C6, C8, C11, C13, C16, C19, C20, C23, C24, C27, C28, C29, C32, C34, C35, C36, C37, C38, C39	CAP_GCM15_MUR	GCM155R71H104KE02 D	21
CL10A106MA8NRNC	CAP: SMT (0603); 10uF; 20%; 25V; X5R; CERAMIC	C3	CAP_CL10_SAM	CL10A106MA8NRNC	1
GRM155R61A102KA01 D	Description	C5, C7, C9, C14, C15, C17, C18, C21, C22, C25, C26, C30, C31, C40, C41, C42, C43	G-155_MUR	GRM155R61A102KA01 D	17
GRM155C71A105KE01 D	Description	C10, C33	CAP_GRM155C_MUR	GRM155C71A105KE01 D	2
GRM155R61A475MEA AD	Description	C12	CAP_GRM155C_1XP5_MUR	GRM155R61A475MEA AD	1
JDCN2.0	Connector Fonte: ISO212.0	CN1	JACK - P4	JDCN2.0	1
SS34FA	UL Flammability 94V-0 Classification: MSL 1 per I-STD-883, Low Power Loss, High Efficiency, Guard Ring for Overvoltage Protection; RoHS Compliant / Green Molding Compound; High Surge Current Capability; NEPB Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AECQ101 Qualified and PPAP Capable	D1	SOOFL36L8K143N	SS34FA	1
MTPD1346D-150	Photodiode 1300nm TO-46-3 Lens Top Metal Can	D, D2, D3, D4, D5, D6, D7, D8	TO127P540X1680-3N	MTPD1346D-150	8
BRL3225T470K	Description	L1	IND_TAIYO_BRL3225_TAY	BRL3225T470K	1
MP2160B601ATA00	INDUCTOR: SMT (0603); FERRITE 60uH; 602; 12uV/-/-; 25%; 1A; -55 DEGC TO +125 DEGC	L2, L3, L4, L5, L6, L7, L8, L9	IND_1608_TDK	MP2160B601ATA00	8
RC0402FR-07220KL	No Description Available	R1	RC0402N_YAG	RC0402FR-07220KL	1
RC0402FR-0730KL	Description	R2	RC0402N_YAG	RC0402FR-0730KL	1
RC0402FR-075KL	Description	R4, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R40, R45	RC0402N_YAG	RC0402FR-075KL	36
RC0402FR-0710KL	RES: SMT (0402); 10K; 1%; +/-; 100PPM/DEGC; 0.0630W	R39	RC0402N_YAG	RC0402FR-0710KL	1
RC0402FR-071K5L	Description	R41, R42, R43, R44	RC0402N_YAG	RC0402FR-071K5L	4
TPSM8632S2R0XR	3-V to 1.7-V input voltage, 3-A Eco- mode synchronous buck module 7-QFN- FCM420 -40 to 125	U1	RD0007A-MFG	TPSM8632S2R0XR	1
B0605S-2WR3	Description	U2	B-5-2WR2_MNS	B0605S-2WR3	1
TLV76750DQNR	LDO Voltage Regulators Adjustable- and fixed output, 1-A, 16-V, positive-voltage low- dropout (LDO) linear regulator 8-HVSSOP - 40 to 125	U4	SOP6P480X110-9N	TLV76750DQNR	1
ADL5308ACCZ	Logan thmic Converter, 105deg C, Lga-Ep RoHS Compliant: Yes (Analog Devices, Inc. ADL5308ACCZ	U5, U6, U7, U8, U9, U10, U11, U12	CC-14-4_ADI	ADL5308ACCZ	8
AD57066RTER	Analog to Digital Converters - ADC, Eight-channel, 250- kSPS, 16-bit analog- to-digital converter with internal reference, GPIOs and SPI 16-WQFN -40 to 125	U13	QFN50P300X300R8D- 17N-D	AD57066RTER	1
ISO7762FDBQR	Robust EMC: six- channel, 4/2, reinforced digital isolator 16-SSOP -55 to 125	U14	DBQ0016A_N	ISO7762FDBQR	1
PCA9548ADGVR	8-channel 2.3- to 5.5- V I2C/SMBus switch with reset & voltage translation 24-TV5OP 40 to 85	U15	DGV24	PCA9548ADGVR	1
ISO16408DR	Not swappable, robust-EMC bidirectional I2C isolator with bidirectional clock 8- SOIC -40 to 125	U16	D0008B-IPC_A	ISO16408DR	1
SC0194(9)	The Raspberry Pi 4 Model B SC0194(9) single board computer features a Broadcom BCM2711 ARM Cortex-A72 quad-core processor operating at 1.5GHz, making it a powerful choice for embedded computing applications. Equipped with 4GB of RAM and a variety of conne	U17	MODULE_SC0194(9)	SC0194(9)	1