


ARES\_Mauer floor map - C wall A 5 / B 9 / C 5 stones, floor station

scale 1:10 on A3 - print at 100 % (check the 1 m bar). Map frame: origin O = outer start corner of leg A's guide strip, x along that leg, y towards ARES; mm. Grid 500 mm.  
stones pins up, first course on the 4 mm MDF ([wall] base\_z 4.0 mm), course pitch 121 mm; guides [guides], station [pickup\_station] - generated by tools/make\_guides.py from config/station.toml

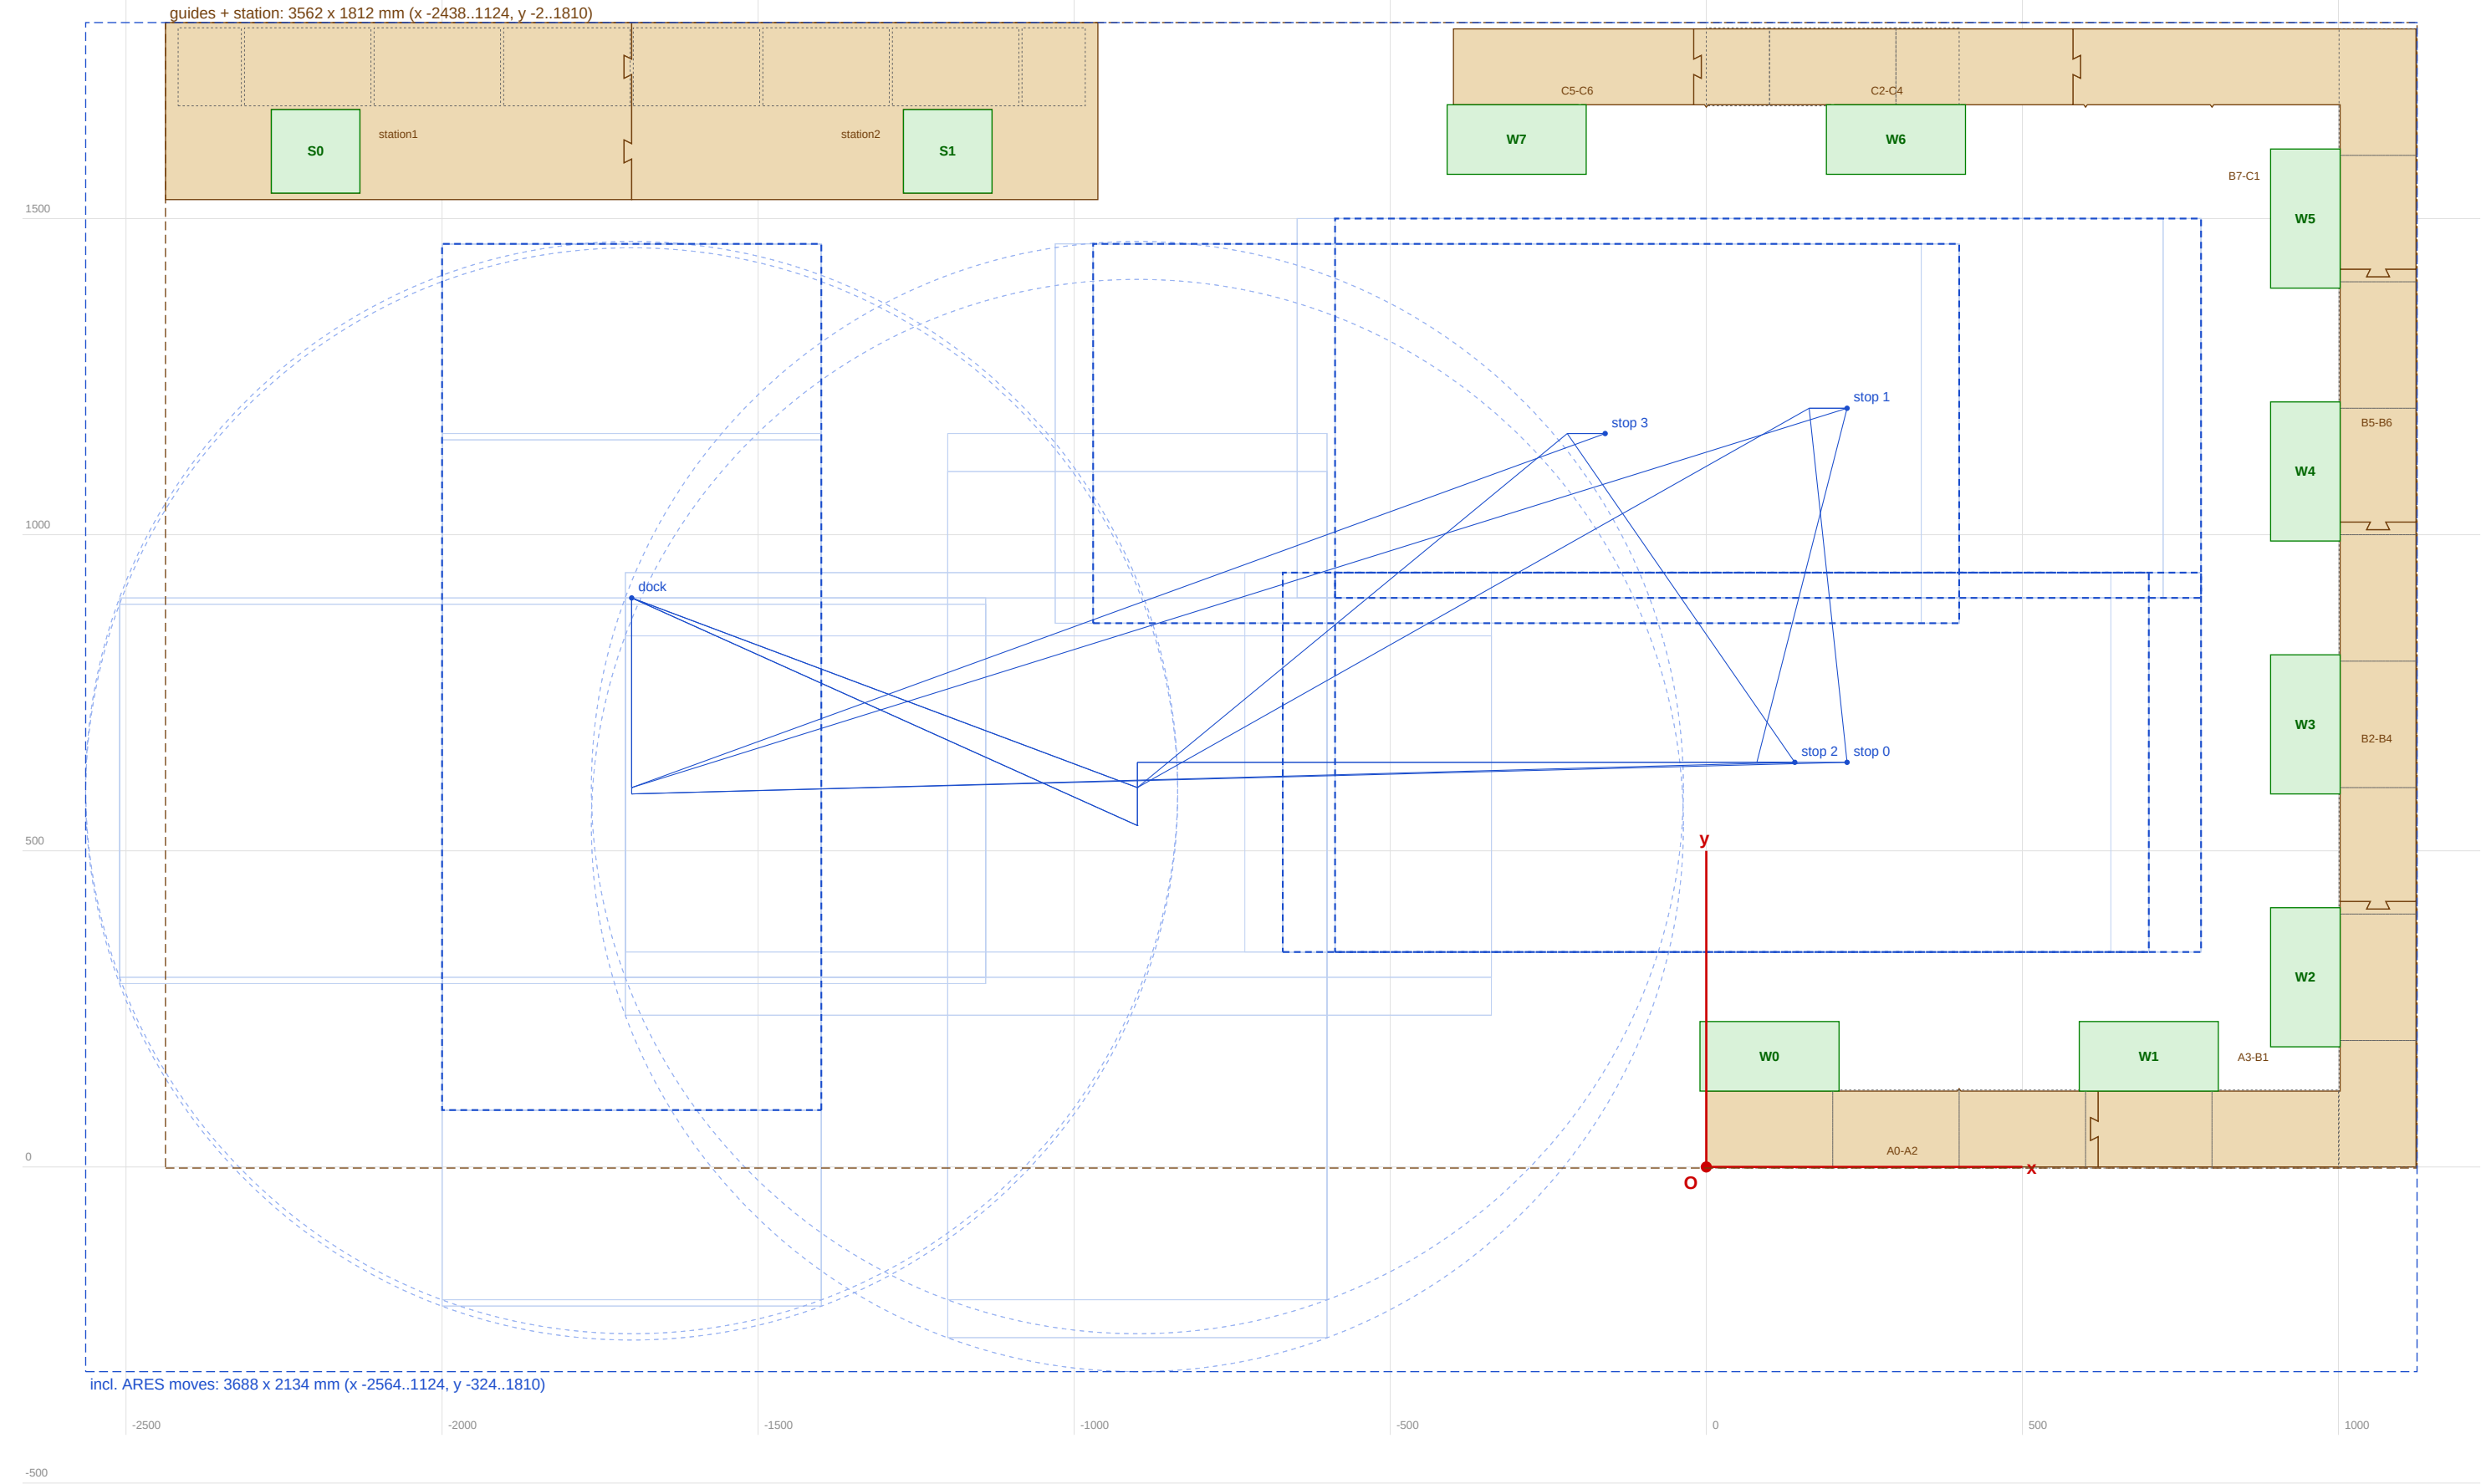

Marking points (map frame, mm) and checks

Marking points: lay out leg A's outer edge first (O -> A end), then place the others by x / y; check the diagonals.

|                                         |   |         |   |        |                  |
|-----------------------------------------|---|---------|---|--------|------------------|
| A start, outer corner                   | x | 0.0     | y | 0.0    |                  |
| A start, ARES-side corner               | x | 0.0     | y | 120.0  |                  |
| A end, outer corner                     | x | 1000.0  | y | 0.0    |                  |
| A end, ARES-side corner                 | x | 1000.0  | y | 120.0  |                  |
| B start, outer corner                   | x | 1122.7  | y | 0.0    |                  |
| B start, ARES-side corner               | x | 1002.7  | y | 0.0    |                  |
| B end, outer corner                     | x | 1122.7  | y | 1800.0 |                  |
| B end, ARES-side corner                 | x | 1002.7  | y | 1800.0 |                  |
| C start, outer corner                   | x | 1000.0  | y | 1800.0 |                  |
| C start, ARES-side corner               | x | 1000.0  | y | 1680.0 |                  |
| C end, outer corner                     | x | 0.0     | y | 1800.0 |                  |
| C end, ARES-side corner                 | x | 0.0     | y | 1680.0 |                  |
| station, front-left corner (ARES side)  | x | -2437.5 | y | 1530.0 |                  |
| station, front-right corner (ARES side) | x | -962.5  | y | 1530.0 |                  |
| station, back-right corner              | x | -962.5  | y | 1810.0 |                  |
| station, back-left corner               | x | -2437.5 | y | 1810.0 |                  |
| ARES base_link at the dock              | x | -1700.0 | y | 900.0  |                  |
| ARES dock                               | x | -1700.0 | y | 900.0  | heading 90.0 deg |
| ARES stop 0                             | x | 222.7   | y | 640.0  | heading 0.0 deg  |
| ARES stop 1                             | x | 222.7   | y | 1200.0 | heading 0.0 deg  |
| ARES stop 2                             | x | 140.0   | y | 640.0  | heading 0.0 deg  |
| ARES stop 3                             | x | -160.0  | y | 1160.0 | heading 0.0 deg  |

Diagonals (tape measure, mm):

- A start, outer corner -> A end, outer corner: 1000
- A start, outer corner -> B start, outer corner: 1123
- A start, outer corner -> B end, outer corner: 2121
- A start, outer corner -> C start, outer corner: 2059
- A start, outer corner -> C end, outer corner: 1800
- A start, outer corner -> station, front-left corner (ARES side): 2878
- A start, outer corner -> station, front-right corner (ARES side): 1808
- A start, outer corner -> station, back-right corner: 2050
- A start, outer corner -> station, back-left corner: 3036

Guides + station: 3562 x 1812 mm; including every ARES position, route and rotation circle: 3688 x 2134 mm (x -2564..1124, y -324..1810 in the map frame).

Parts: 4 MDF sheets 800 x 600 x 4 mm (7 guide pieces, 2 station pieces), 50 locating cones (2 per stone on the guides; print a few spares), carpet tape.