


ARES_Mauer floor map - C wall A 5 / B 9 / C 5 stones, floor station

scale 1:20 on A3 - print at 100 % (check the 1 m bar). Map frame: origin O = outer start corner of leg A's guide strip, x along that leg, y towards ARES; mm. Grid 500 mm.

stones pins up, first course on the 4 mm MDF ([wall] base_z 4.0 mm), course pitch 121 mm; guides [guides], station [pickup_station] - generated by tools/make_guides.py from config/station.toml

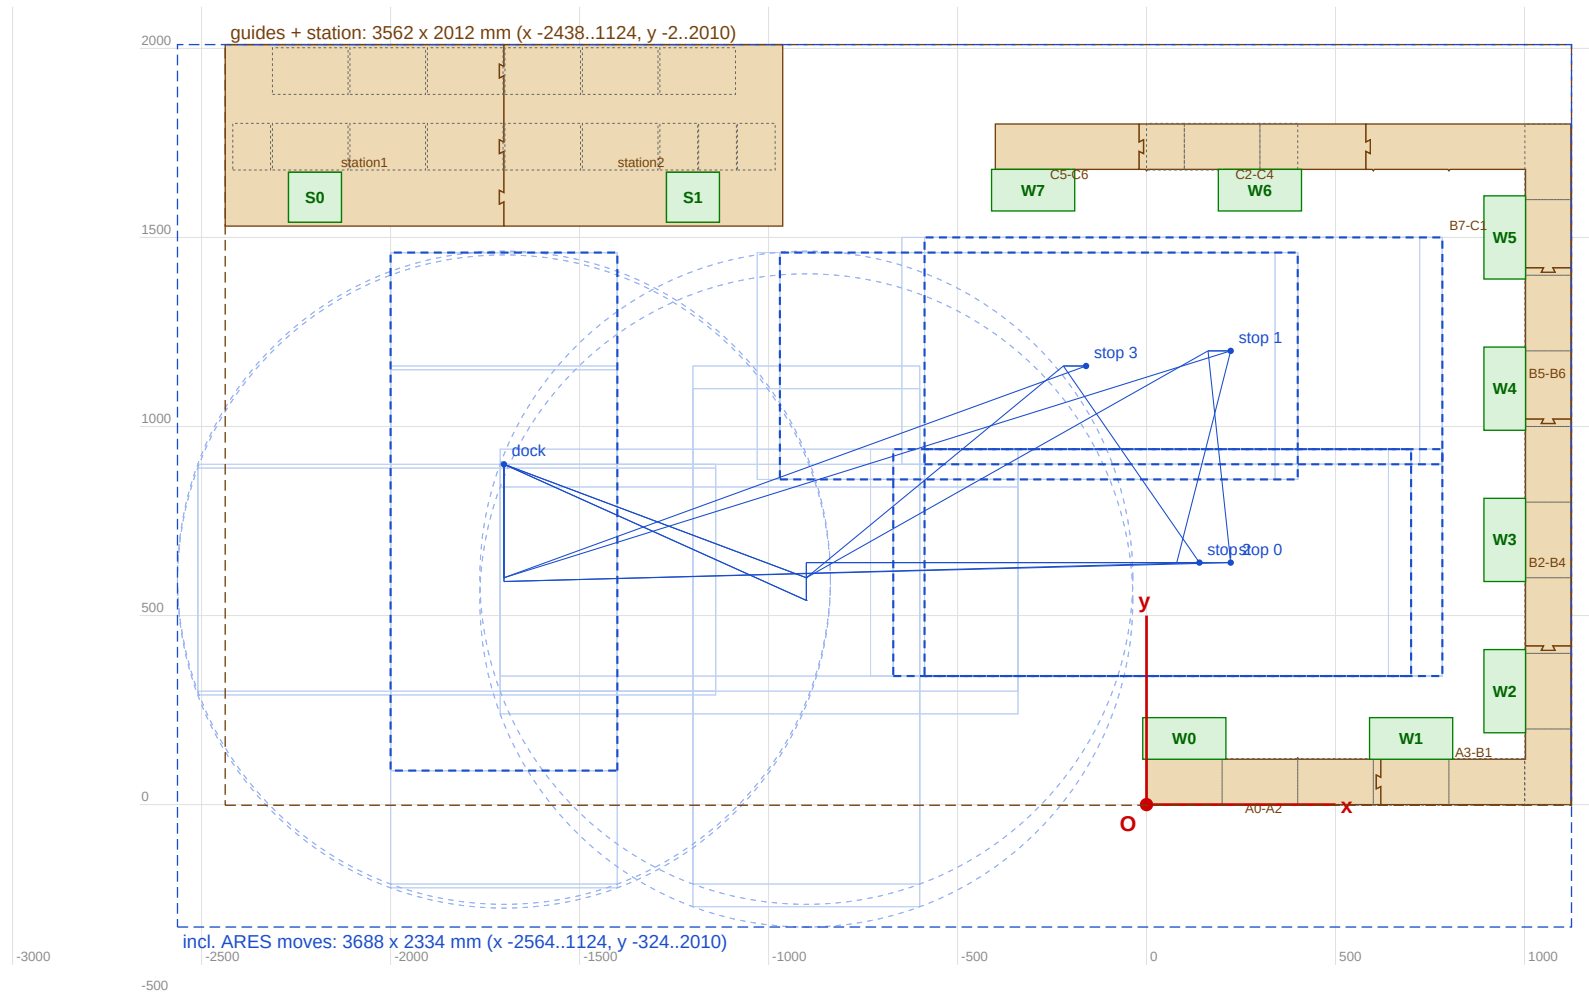

1 m

brown: MDF guide pieces (names = first-last stone) and the station piece with the S windows; grey dashed: first-course stones and station stacks; green: board plates; blue: ARES at the stops / dock (dashed), its footprints along the routes and rotation circles

Marking points (map frame, mm) and checks

Marking points: lay out leg A's outer edge first (O -> A end), then place the others by x / y; check the diagonals.

A start, outer corner	x	0.0	y	0.0		
A start, ARES-side corner	x	0.0	y	120.0		
A end, outer corner	x	1000.0	y	0.0		
A end, ARES-side corner	x	1000.0	y	120.0		
B start, outer corner	x	1122.7	y	0.0		
B start, ARES-side corner	x	1002.7	y	0.0		
B end, outer corner	x	1122.7	y	1800.0		
B end, ARES-side corner	x	1002.7	y	1800.0		
C start, outer corner	x	1000.0	y	1800.0		
C start, ARES-side corner	x	1000.0	y	1680.0		
C end, outer corner	x	0.0	y	1800.0		
C end, ARES-side corner	x	0.0	y	1680.0		
station, front-left corner (ARES side)	x	-2437.5	y	1530.0		
station, front-right corner (ARES side)	x	-962.5	y	1530.0		
station, back-right corner	x	-962.5	y	2010.0		
station, back-left corner	x	-2437.5	y	2010.0		
ARES base_link at the dock	x	-1700.0	y	900.0		
ARES dock	x	-1700.0	y	900.0	heading	90.0 deg
ARES stop 0	x	222.7	y	640.0	heading	0.0 deg
ARES stop 1	x	222.7	y	1200.0	heading	0.0 deg
ARES stop 2	x	140.0	y	640.0	heading	0.0 deg
ARES stop 3	x	-160.0	y	1160.0	heading	0.0 deg

Diagonals (tape measure, mm):

- A start, outer corner -> A end, outer corner: 1000
- A start, outer corner -> B start, outer corner: 1123
- A start, outer corner -> B end, outer corner: 2121
- A start, outer corner -> C start, outer corner: 2059
- A start, outer corner -> C end, outer corner: 1800
- A start, outer corner -> station, front-left corner (ARES side): 2878
- A start, outer corner -> station, front-right corner (ARES side): 1808
- A start, outer corner -> station, back-right corner: 2229
- A start, outer corner -> station, back-left corner: 3159

Guides + station: 3562 x 2012 mm; including every ARES position, route and rotation circle: 3688 x 2334 mm (x -2564..1124, y -324..2010 in the map frame).

Parts: 5 MDF sheets 800 x 600 x 4 mm (7 guide pieces, 2 station pieces), 64 locating cones (2 per stone on the guides; print a few spares), carpet tape.