



ARES_Mauer floor map - C wall A 10 / B 7 / C 5 stones, floor station

scale 1:20 on A3 - print at 100 % (check the 1 m bar). Map frame: origin O = outer start corner of leg A's guide strip, x along that leg, y towards ARES; mm. Grid 500 mm.
stones pins up, first course on the 4 mm MDF ([wall] base_z 4.0 mm), course pitch 121 mm; guides [guides], station [pickup_station] - generated by tools/make_guides.py from config/station.toml

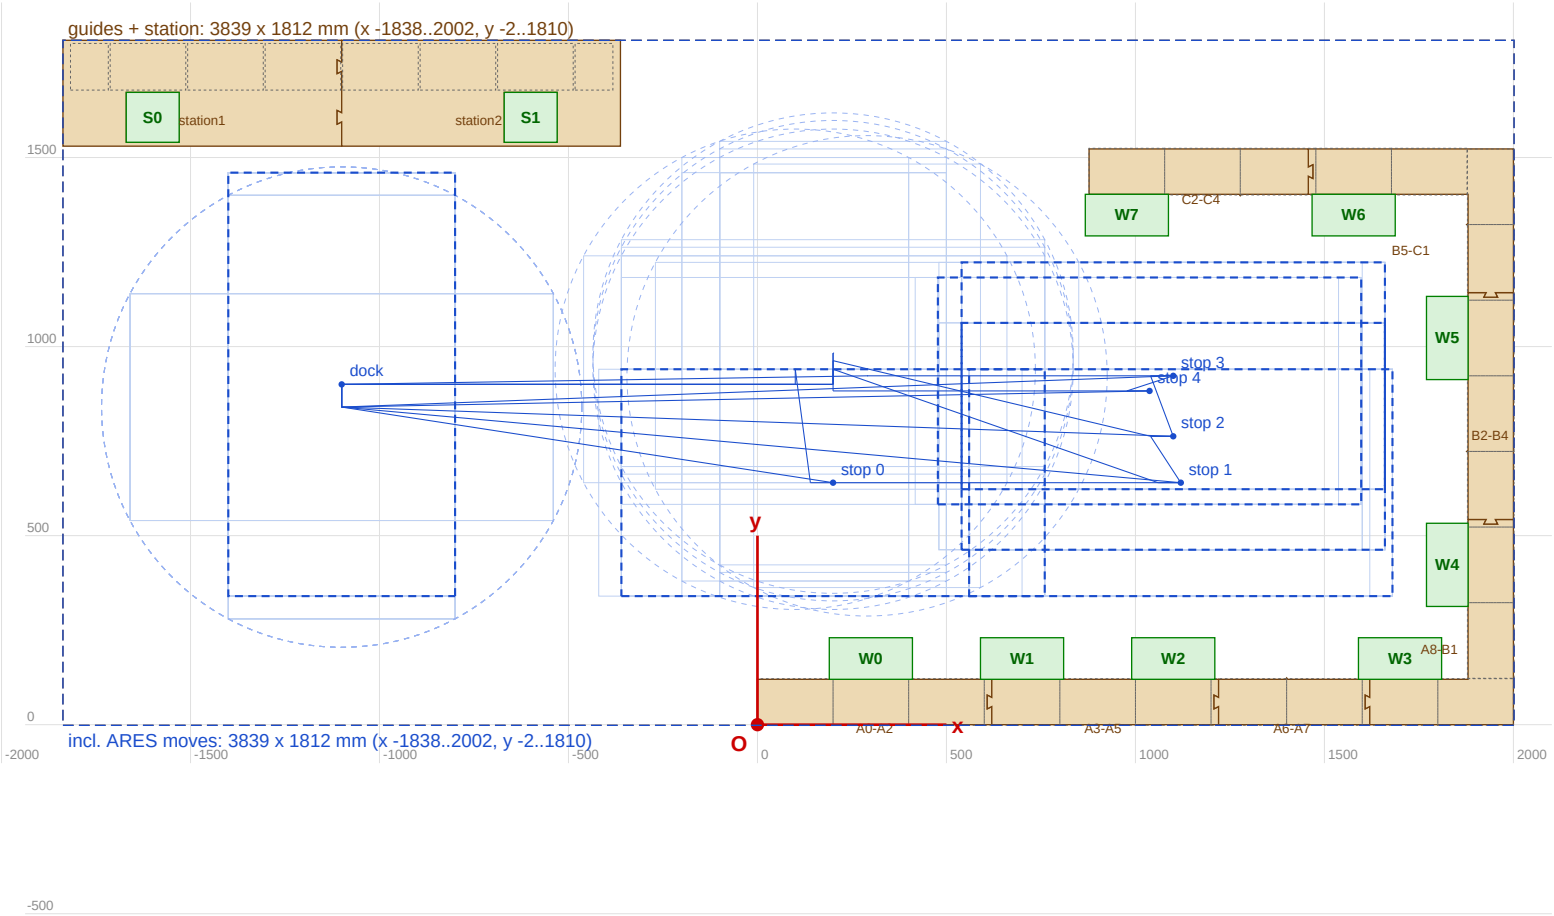

brown: MDF guide pieces (names = first-last stone) and the station piece with the S windows; grey dashed: first-course stones and station stacks; green: board plates; blue: ARES at the stops / dock (dashed), its footprints along the routes and rotation circles

Marking points (map frame, mm) and checks

Marking points: lay out leg A's outer edge first (O -> A end), then place the others by x / y; check the diagonals.

A start, outer corner	x	0.0	y	0.0	
A start, ARES-side corner	x	0.0	y	120.0	
A end, outer corner	x	2000.0	y	0.0	
A end, ARES-side corner	x	2000.0	y	120.0	
B start, outer corner	x	2000.0	y	122.7	
B start, ARES-side corner	x	1880.0	y	122.7	
B end, outer corner	x	2000.0	y	1522.7	
B end, ARES-side corner	x	1880.0	y	1522.7	
C start, outer corner	x	1877.3	y	1522.7	
C start, ARES-side corner	x	1877.3	y	1402.7	
C end, outer corner	x	877.3	y	1522.7	
C end, ARES-side corner	x	877.3	y	1402.7	
station, front-left corner (ARES side)	x	-1837.5	y	1530.0	
station, front-right corner (ARES side)	x	-362.5	y	1530.0	
station, back-right corner	x	-362.5	y	1810.0	
station, back-left corner	x	-1837.5	y	1810.0	
ARES base_link at the dock	x	-1100.0	y	900.0	
ARES dock	x	-1100.0	y	900.0	heading 90.0 deg
ARES stop 0	x	200.0	y	640.0	heading 0.0 deg
ARES stop 1	x	1120.0	y	640.0	heading 0.0 deg
ARES stop 2	x	1100.0	y	762.7	heading 0.0 deg
ARES stop 3	x	1100.0	y	922.7	heading 0.0 deg
ARES stop 4	x	1037.3	y	882.7	heading 0.0 deg

Diagonals (tape measure, mm):

- A start, outer corner -> A end, outer corner: 2000
- A start, outer corner -> B start, outer corner: 2004
- A start, outer corner -> B end, outer corner: 2514
- A start, outer corner -> C start, outer corner: 2417
- A start, outer corner -> C end, outer corner: 1757
- A start, outer corner -> station, front-left corner (ARES side): 2391
- A start, outer corner -> station, front-right corner (ARES side): 1572
- A start, outer corner -> station, back-right corner: 1846
- A start, outer corner -> station, back-left corner: 2579

Guides + station: 3839 x 1812 mm; including every ARES position, route and rotation circle: 3839 x 1812 mm (x -1838..2002, y -2..1810 in the map frame).

Parts: 4 MDF sheets 800 x 600 x 4 mm (7 guide pieces, 2 station pieces), 60 locating cones (2 per stone on the guides; print a few spares), carpet tape.