




8 Hem one long edge on each of the back flaps by folding it over twice, each time by 1cm ($\frac{1}{2}$ in). Pin in place as shown. Thread your sewing machine and bobbin with matching thread and re-set the machine to a straight stitch of normal width and length. Stitch close to the edge of the fold. Remove the pins. Repeat on the second flap. Next, cut a piece of wadding and a piece of thin, white cotton, each 42 x 42cm ($16\frac{1}{2}$ x $16\frac{1}{2}$ in) square.



9 Place the white cotton on your work surface and top it with the wadding. Top that with the cushion front, right side up. Place one of the back flaps on top, right side down, aligning its unhemmed edge with the bottom edge of the cushion. Place the other back flap on top, right side down, aligning its unhemmed edge with the top edge of the cushion. The back flaps will overlap. Pin the layers of fabric together around all four sides of the cushion, aligning the edges.

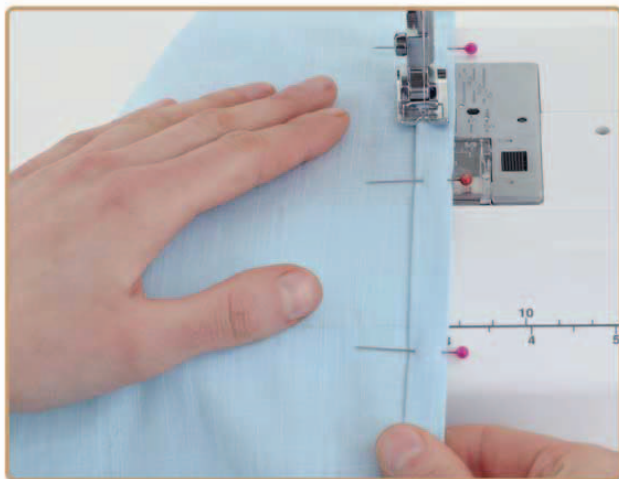

10 Machine along the four sides of the cushion cover using a 1cm ($\frac{1}{2}$ in) seam allowance. Snip diagonally across the four corners to remove the excess fabric, taking care not to cut through the stitches. Turn the cushion cover right side out and iron if needed. Insert the cushion pad through the back.