




Construction and mining

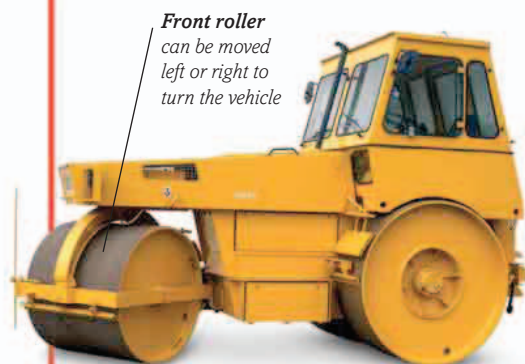

Front roller can be moved left or right to turn the vehicle

Hamm HW90/10 Germany 1987



Arm can move bucket to dig down to depths of more than 14ft 10in (4.5 m)

Steel bucket

Case Poclain 688B USA 1993



Vertical exhaust pipe

Steel loader can lift more than 2,200 lb (1,000 kg) in a single scoop

Caterpillar 950G USA 1998



BELAZ-75570

31 ft 10 in (9.7 m) tall



Liebherr LTM1500 Germany 2000

Outriggers stabilize the crane when it is raised

The **hopper** can hold **90 tons** of rock—as heavy as **20 monster trucks**.



Hopper can be tipped by hydraulic arms

Tire is 8 ft 11 in (2.7 m) tall and weighs more than 3,307 lb (1,500 kg)

Construction sites and mines have a lot of digging, leveling, and heavy lifting going on, and big, rugged machines do most of the work. They have to be strong to withstand the stresses of the tasks, and reliable to work all day long.

Excavators are digging machines usually fitted with a steel bucket that cuts into the earth. Some, such as the **Case Poclain 688B**, run on wheels, while others, such as the **John Deere 160DL C**, run on continuous tracks, which are ideal for crossing muddy ground. Front loaders, such as