



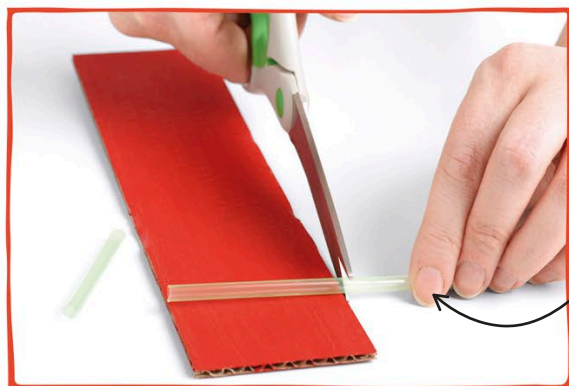

Hold the straw against the car base, so you cut it to the right length.

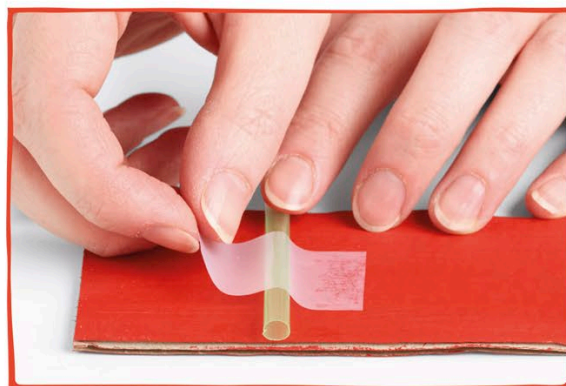


7 Using masking tape, stick down the straws on the base. Put each straw around $\frac{3}{4}$ – $1\frac{1}{4}$ in (2–3cm) in from each end, and try to make sure you stick the straws at 90 degrees to the edge.

6 Grab one of your straws and cut it into two pieces that are the same as the width of your car's base. These are to hold the axles in place, and allow the wheels to turn freely.




Watch your fingers! The end of the axle could be splintery.

Watch out, as sometimes the skewer can flip up as it breaks.

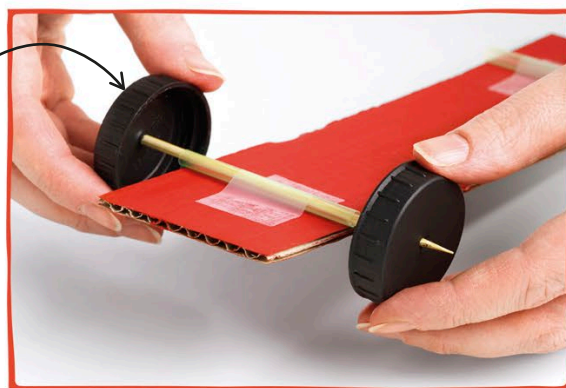

9 Push the point of one axle through one wheel, from the outside. Then push it right through the straw. After that, push the axle through the second wheel from the inside.

8 Cut two pieces of skewer, each about twice the length of the straw and with a point at one end. These are the axles. Of course, be careful when using scissors and don't rush this step.

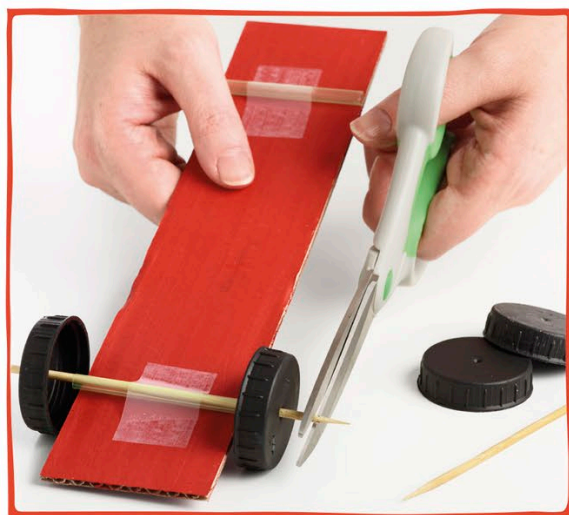

10 For safety, you can cut off the sharp point of the axle. Now repeat step 9 for the other axle and wheel, making sure to be careful when pushing the axle through the wheels. If you want, you can also add some masking tape to the tip of the axles to keep the wheels from falling off.

The base of a
Formula 1 car
is made of light
but strong
carbon fiber.