




2 ▶ The measurements of the painting form the inside lengths of the frame, so measure off the correct height and width on four pieces of molding and cut 45-degree angles at either end. You can use a special miter cutter, but this is an expensive piece of equipment, so a simple miter box is a good alternative (*right*). Fit a tenon saw into the prepared grooves of the miter box and cut the required angle.

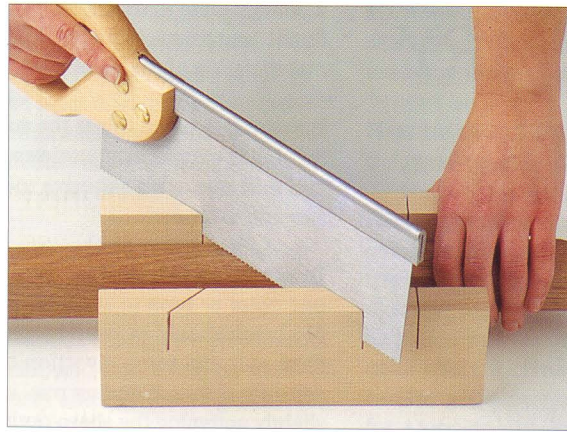


3 ▶ Spread a special wood glue over the sawned edges of two pieces of molding to form one corner of the frame. This must be held firmly in place until the glue has dried, so use a corner clamp to hold the pieces of wood in a rigid position.

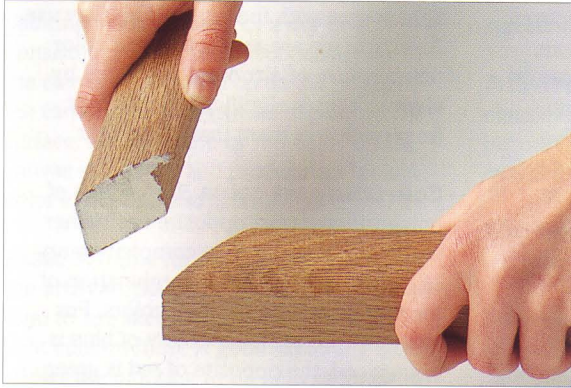

4 ▶ Tap in brads on either side of the corner with a hammer, and then drive the brads right into the wood using a nail punch.

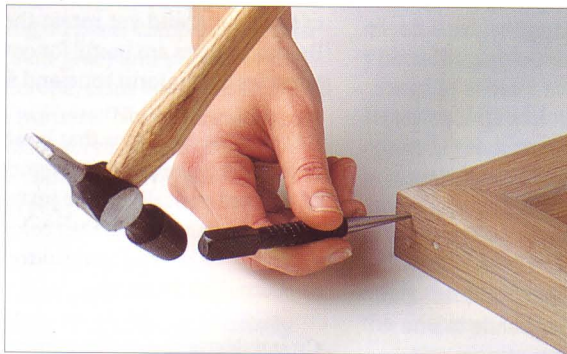

5 ▶ Once all four corners have been secured, place the painting in the frame, cut out a piece of hardboard the same size as the painting, and slot it in the back. Drive in some more brads to tighten the board.

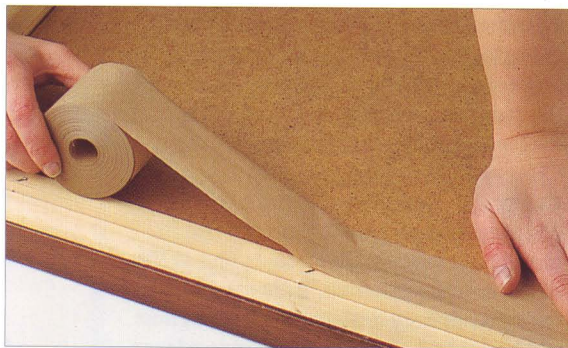

6 ▶ Finally, seal the back of the frame and cover all the brads using gum tape around the edges.




Changing the look of a painting

This work is shown with two different moldings to illustrate how a frame changes the shape and look of a painting. Choose certain colors or textures to enhance a painting. Avoid brightly colored frames for subtle, low-key paintings.



Materials




Miter box




Tenon saw



Wood glue

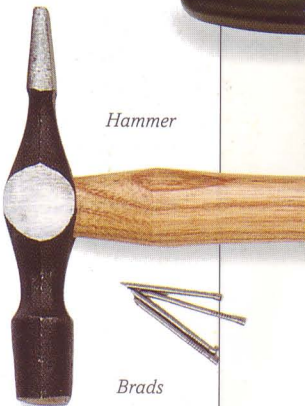

Hammer



Brads




Nail punch



Gum tape

Hardboard



Molding