


| ENGINE SPECIFICATIONS       |                            |
|-----------------------------|----------------------------|
| Dates produced              | 1955 to present            |
| Configuration               | Afterburning turbojet      |
| Fuel                        | Jet fuel                   |
| Power output                | 11,906 lb (52.9 kN) thrust |
| Weight                      | 3,850 lb (1,750 kg)        |
| Compressor                  | 17-stage axial             |
| Turbine                     | 3-stage                    |
| Combustors                  | Cannular                   |
| ▶ See Jet engines pp.304-05 |                            |



**Tailpipe**  
Fitted with a protective inner liner, this section of the engine supports the afterburner flame. Primary (hidden) and secondary (visible) nozzle flaps vary the throat area to suit afterburner (“wet”) or non-afterburner (“dry”) operation.

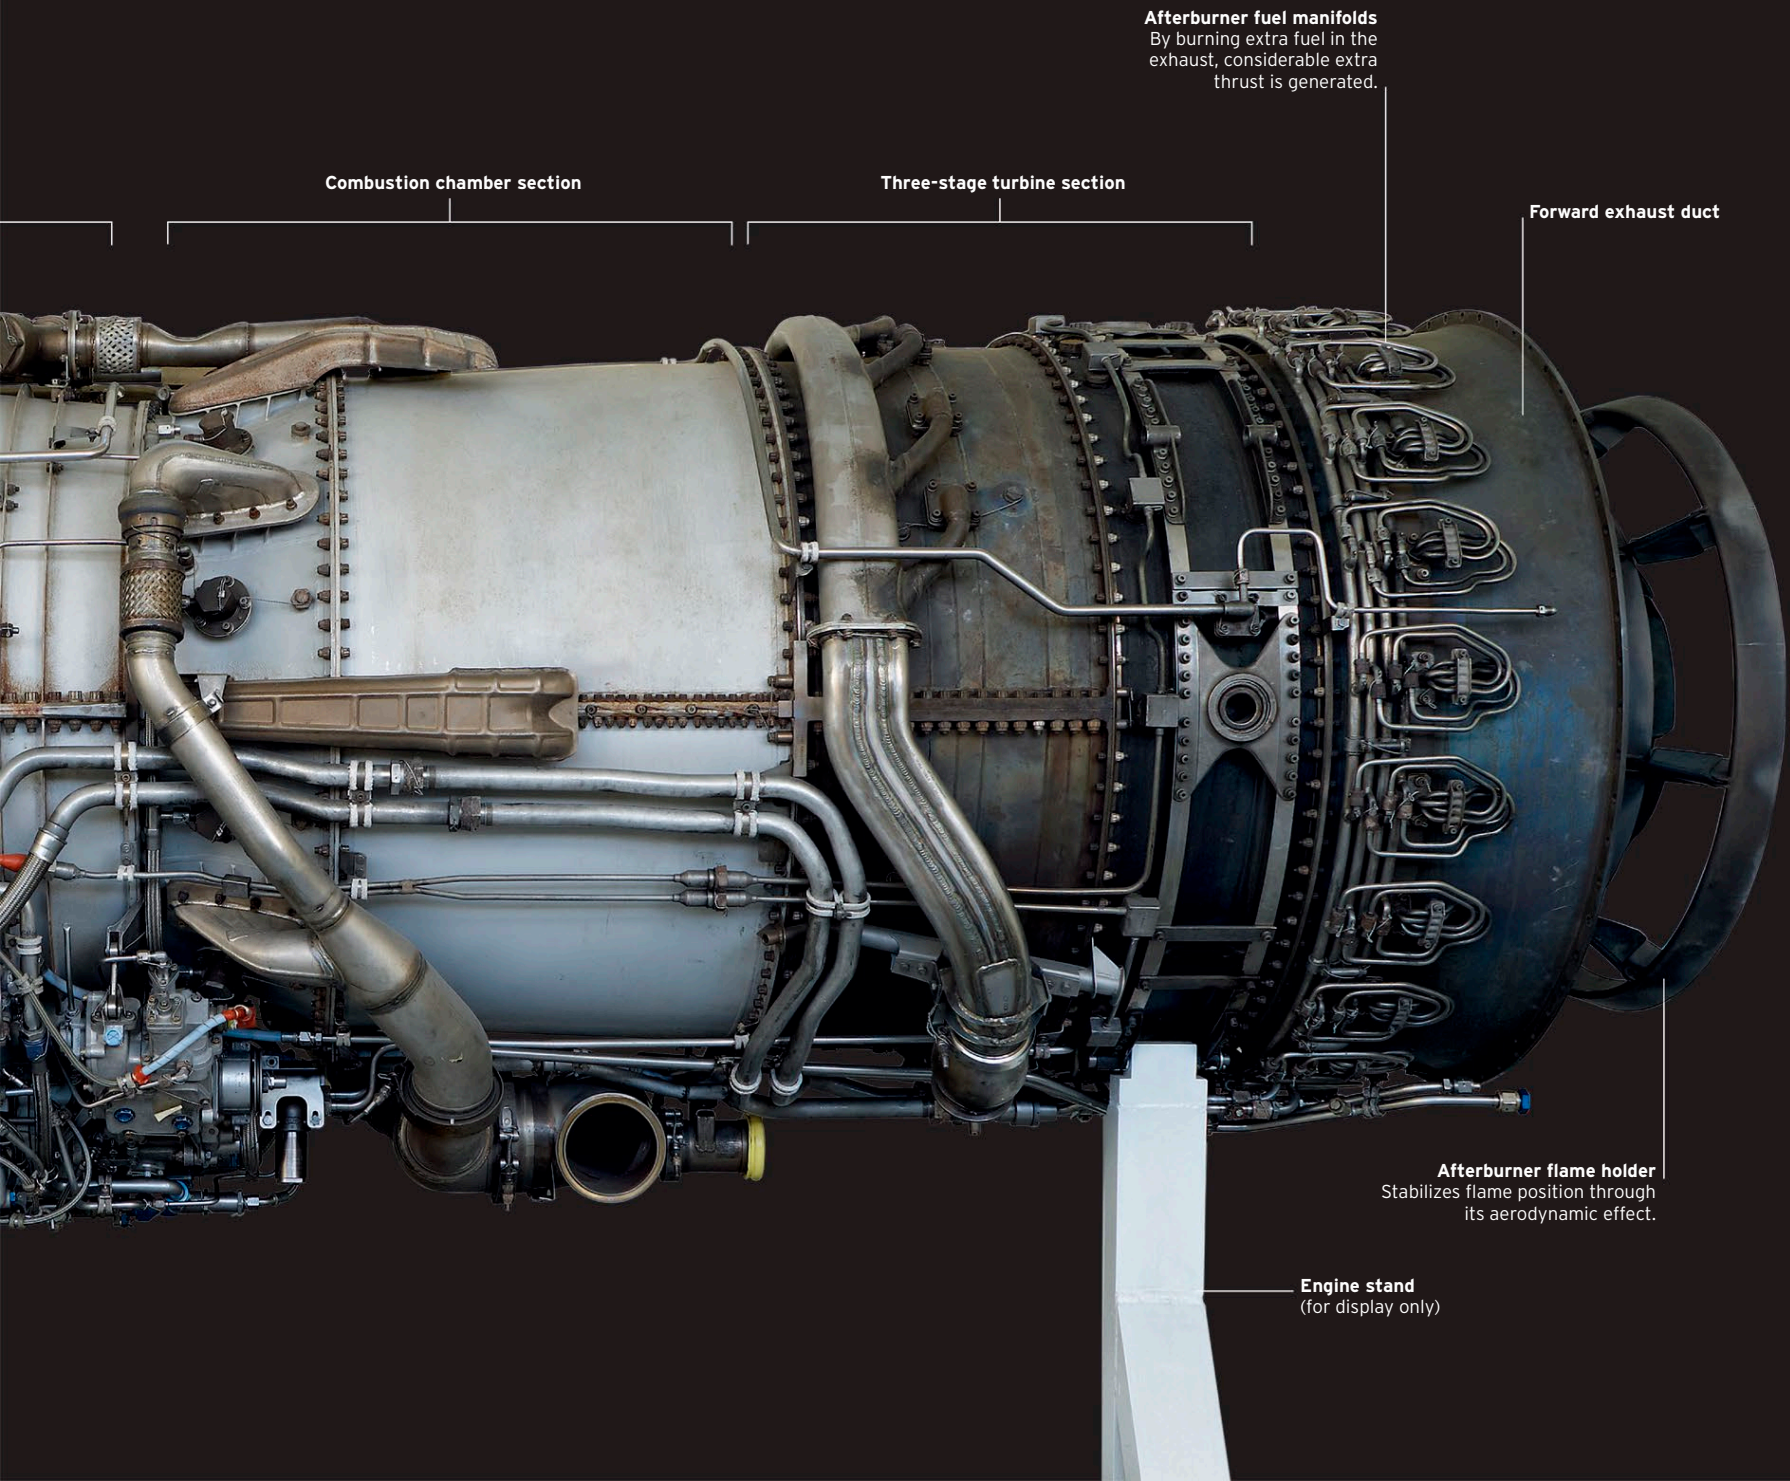

Combustion chamber section

Three-stage turbine section

Forward exhaust duct

**Afterburner fuel manifolds**  
By burning extra fuel in the exhaust, considerable extra thrust is generated.

**Afterburner flame holder**  
Stabilizes flame position through its aerodynamic effect.

**Engine stand**  
(for display only)