



ENGINE SPECIFICATIONS	
Dates produced	1908-1913
Configuration	Air-cooled 3-cylinder "fan"
Fuel	Gasoline
Power output	24 hp @ 1,600 rpm
Weight	143 lb (65 kg) dry
Displacement	206 cu in (3.375 liters)
Bore and stroke	3.9-4.1 in x 4.7-5.9 in (100-105 mm x 120-150 mm)
Compression ratio	4.5:1
▷ See Piston engines pp.302-03	

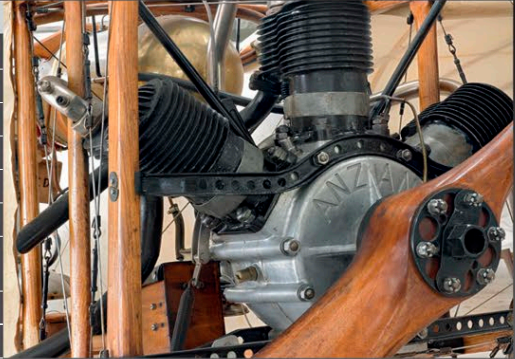

Cooling fins

Exhaust outlet
Inefficient cooling fins were supplemented by holes in the cylinders that let exhaust gases out early in the cycle, aiding cooling.

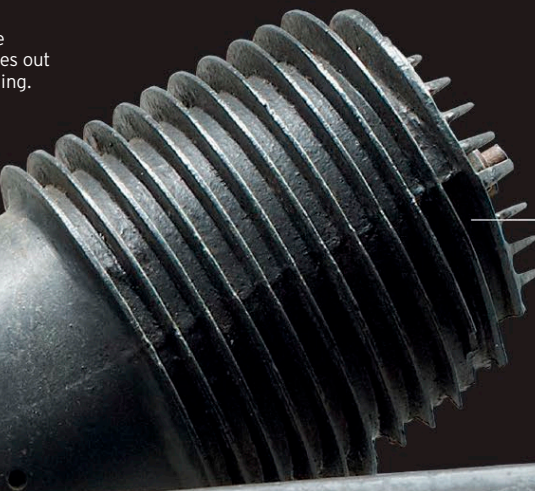

Cylinder head
Fitted with a mechanically operated exhaust valve (hidden behind the cylinder) and an automatic inlet valve that was sucked open on the intake stroke.



Propeller hub plate

Superb propeller
The key to the low-powered Anzani's success was its Chauvière propeller, said to be the first European propeller to rival those designed and made by the Wright brothers.

