


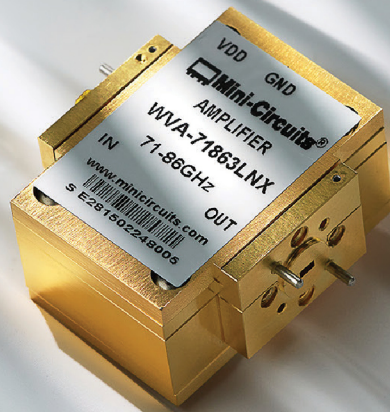

UP TO 110 GHz

High-Frequency Solutions


Amplifiers & Modules for mmWave Applications

WAVEGUIDE AMPLIFIERS



- Bandwidths from 40 to 110 GHz
- Low noise, high gain & medium power options
- WR10, WR12, WR15 & WR15 interfaces
- Ideal for TRP & TIS over-the-air testing

CONNECTORIZED AMPLIFIERS

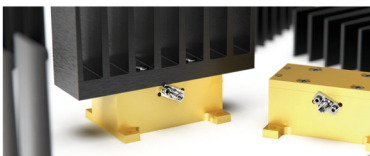

- Bandwidths from 50 kHz to 95 GHz
- 2.92, 2.4, 1.85 & 1.0mm connector options
- Gain up to 45 dB
- NF as low as 1.7 dB
- Power up to 1W

VARIABLE GAIN AMPLIFIERS



- Bandwidths from 18 to 54 GHz
- Gain up to 50 dB
- Calibrated 17 dB attenuation with analog or TTL control
- PSAT up to +1W
- Interactive GUI with telemetry