

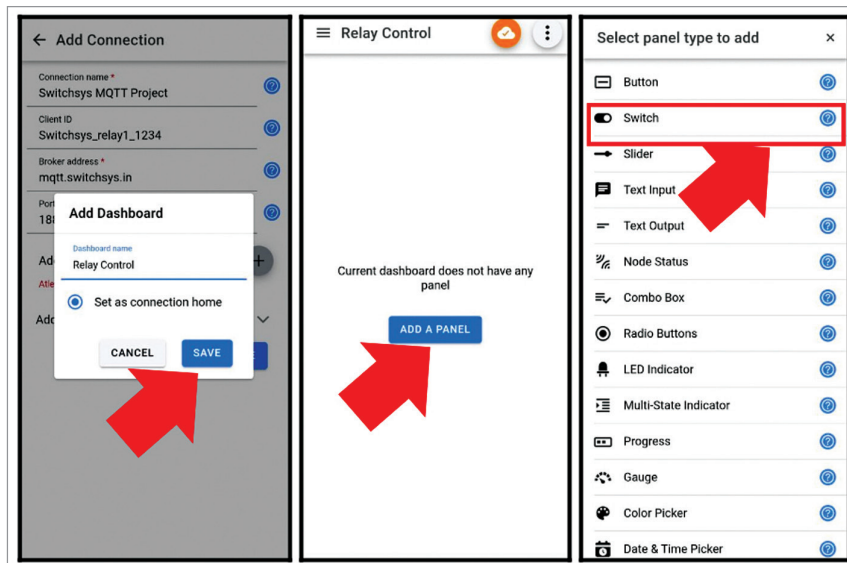


Fig. 10: MQTT dashboard preparation

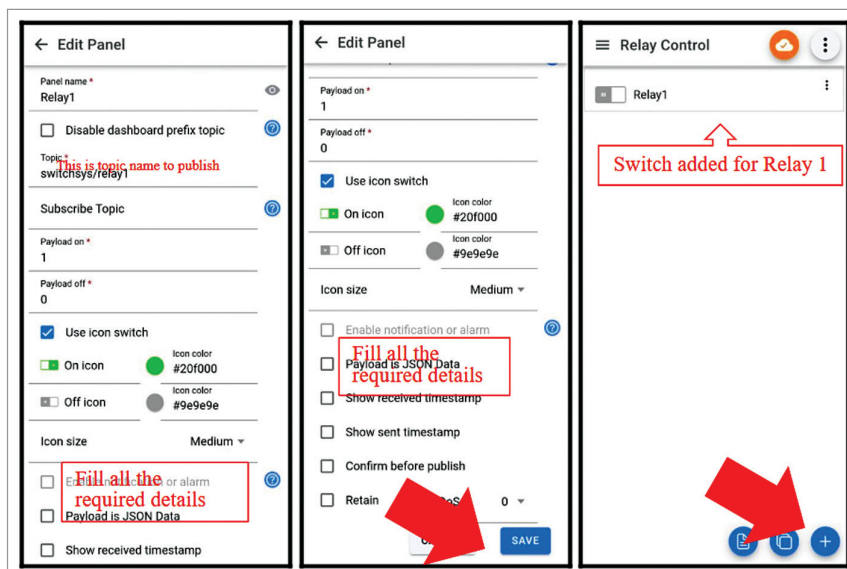


Fig. 11: MQTT panel settings

After configuring the Wi-Fi settings, the MQTT broker configuration must be updated. The MQTT server address, unique client ID, subscription topic, and publish topic are defined in the code, as shown in Fig. 5.

Unique client IDs, subscription topics, and publish topics should be used because this system relies on a public MQTT broker that may be accessed by multiple users simultaneously. Using unique topics helps prevent unwanted interference or accidental control by other users connected to the same broker.

The MQTT server connection is initialised in the code, as shown in Fig. 6.

Once the ESP-01 successfully connects to the Wi-Fi network and the MQTT broker, it continuously listens for incoming MQTT messages on the subscribed topic. When commands are received, the ESP-01 interprets the payload and controls the relay through the ULN2003A relay driver IC. If the payload contains 1, the relay is energised and switched on. If the payload contains 0, the relay is de-energised and switched off. At



Don't Be A Loser!

You don't know how much you don't know.

Read

electronics
FOR YOU

to keep up-to-date
with the tech world



To subscribe,
visit efy.in or
contact us at: 011-4059660
Email: support@efy.in

OR
Scan
This
Code



Also available at all leading magazine outlets