

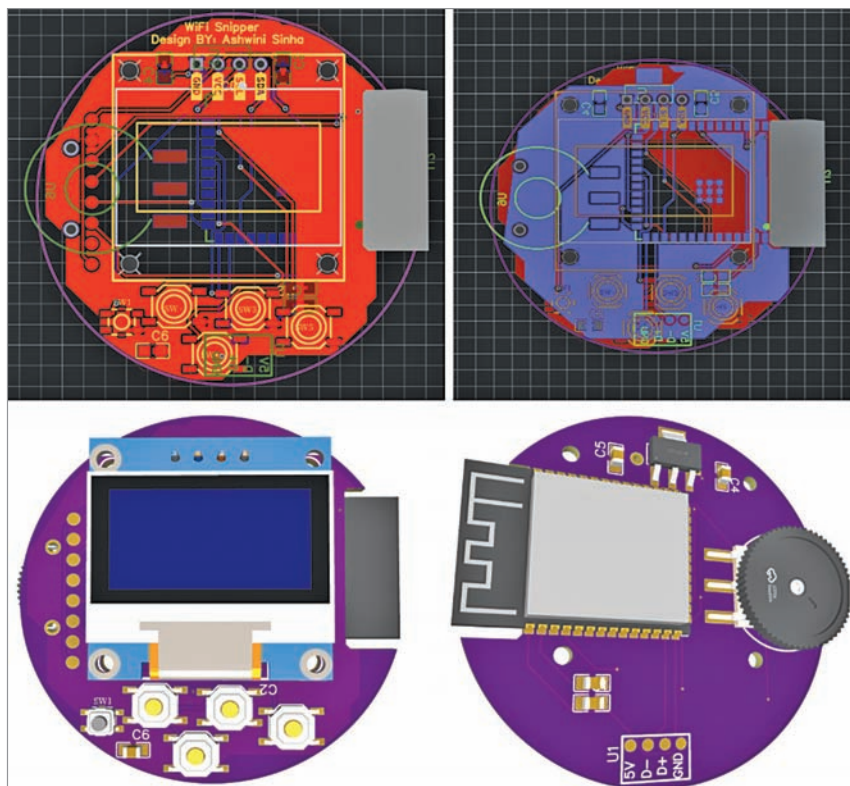


Fig. 3: PCB layout and 3D views

```

10 #include <ESPmDNS.h>
11 #include <WiFiUdp.h>
12 #include <ArduinoOTA.h>
13
14 #if defined(USE_OLED)
15 #include <U8g2lib.h>
16 #include <Wire.h>
17 // Uses board/SDK default I2C pins (SDA/SCL from schematic)
18 U8G2_SSD1306_128X64_NONAME_F_HW_I2C u8g2(U8G2_R0, /* reset= */ U8X8_PIN_NONE);
19 #elif defined(USE_TFT)
20 #include <TFT_eSPI.h> // Configure GC9A01 pins in TFT_eSPI User_Setup
21 TFT_eSPI tft = TFT_eSPI();
22 #else
23 #error "Please define either USE_OLED or USE_TFT"
24 #endif
25
26 // ===== CONFIG =====
27 #ifndef STASSID
28 #define STASSID "JioFiber-4G"
29 #define STAPSK "1234567890"
30 #endif
31
32 const char* ssid = STASSID;
33 const char* password = STAPSK;
34
35 // ----- Pins from schematic -----
36 #define BTN_UP 13 // SW2
37 #define BTN_DOWN 14 // SW3
38 #define BTN_SELECT 35 // SW4 (OK / Next)
39 #define BTN_BACK 36 // SW5
40 #define BTN_BOOT 0 // SW1 (optional)
41 #define POT_PIN 5 // 50 kΩ potentiometer (UI selection / analog control)
42 #define LED_PIN 48 // built-in LED (if present)
43
44 // Menu states

```

Fig. 4: Code snippet for configuring Wi-Fi

Anyone who stops learning is old, whether at twenty or eighty.

—Henry Ford

Amaze Yourself!

Read Electronics For You

You'll realise how much you didn't know, and didn't know that you didn't know!

To Subscribe:
<http://subscribe.efy.in>

Scan This Code

