

micromobility vehicles. It includes V2X firmware for functions such as intersection collision warning and rear collision warning, along with security features, V2X compatibility, and customisation options. The platform


allows bike manufacturers to add V2X functions without developing the technology from scratch.

Autotalks

<https://auto-talks.com>

Expanding server memory with a new chip

Montage Technology has started trial production of its CXL 3.2 memory eXpander controller (MXC), designed for memory expansion and resource pooling in AI systems, cloud computing, and data centres. The chip includes



two DDR5 memory controllers supporting speeds of up to 8000MT/s and con-

verts CXL memory requests from the host into DDR commands, allowing servers to access memory beyond their built-in capacity. The MXC integrates PCIe 6.x PHY, DDR5 PHY, two RISC-V processor subsystems, and management interfaces, and supports PCIe AIC cards and EDSFF modules for memory expansion, memory pooling, and tiered memory architectures.

Montage Technology

<https://www.montage-tech.com>

Lowest-power Bluetooth LE SoC

Silicon Labs has introduced the BG2B, a Series 2 Bluetooth Low Energy (LE) system-on-chip (SoC) for battery-powered IoT devices. A dual-output DC-DC power architecture and multi-core design reduce power consumption in active, receive, and sleep modes. Silicon Labs says the chip reduces MCU active current by 14% to 15% and has

lower Bluetooth LE receive current than its previous Bluetooth LE SoC. It provides 1.1µA EM2 sleep current with RAM retention. The SoC supports Bluetooth channel sounding features including Mode 3, normalised attack detector metric, and inline phase correction term. CAN-FD supports applications such as



vehicle diagnostics, fleet management, industrial equipment monitoring, and maintenance.

Silicon Labs

<https://www.silabs.com>

Wireless SoC for comprehensive in-vehicle connectivity

Telink has launched the TL3225 wireless SoC family for automotive applications such as digital key fobs, body domain control, and in-cabin communication. The SoC uses a dual-core RISC-V architecture with separate hardware and software partitions to run workloads in parallel. It includes two CAN-FD chan-



nels and two LIN interfaces for vehicle communication, with LIN supporting sleep and wake-up functions. Bluetooth Core 6.1 channel sounding supports ranging and positioning for applications such as passive entry and start (PEPS), cabin detection, and in-cabin device identification. The SoC targets key fobs, PEPS, TPMS, in-cabin Bluetooth sensing, wireless BMS, and body domain control units.

Telink

<https://www.telink-semi.com>

The future of memory and storage

Kioxia has introduced the KIOXIA GP1 Series PCIe 6.0 NVMe SSDs, the first product in its GP series of IOPS SSDs designed for direct GPU access. The SSDs use

KIOXIA XL-FLASH generation 2 memory and deliver up to 10 million random read IOPS with a 512-byte block size. They can




extend flash memory alongside high-bandwidth memory (HBM), allowing AI systems to handle larger datasets without adding more HBM. The GP1 series supports PCIe 6.0 and NVMe 2.2, with lower power consumption per I/O than TLC-based SSDs. Kioxia plans to scale the architecture from 10 million IOPS in the current generation to up to 100 million IOPS in future versions.

Kioxia

<https://www.kioxia.com>

Bluetooth LE module puts antenna on package

FDK Corporation has developed the HY0025, a Bluetooth low energy (LE) module for sensor data transmission in physical AI, healthcare, industrial, automotive, and IoT applications. It uses SASP technology developed by Toshiba, which allows the antenna to be formed

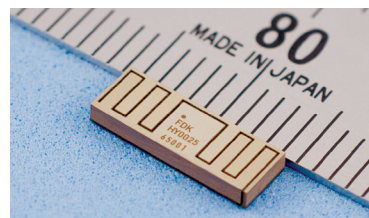

on top of the module's shielded package. This reduces the PCB area required around the antenna and helps reduce the board footprint. The module uses Nordic Semiconductor's nRF54L15 SoC and supports Bluetooth 6. Along with standard Bluetooth LE communication, it supports Coded PHY for longer-range communication and Channel Sounding for distance measurement between devices. These functions can be used in applications that need location or distance information.

FDK Corporation

<https://www.fdk.com>