


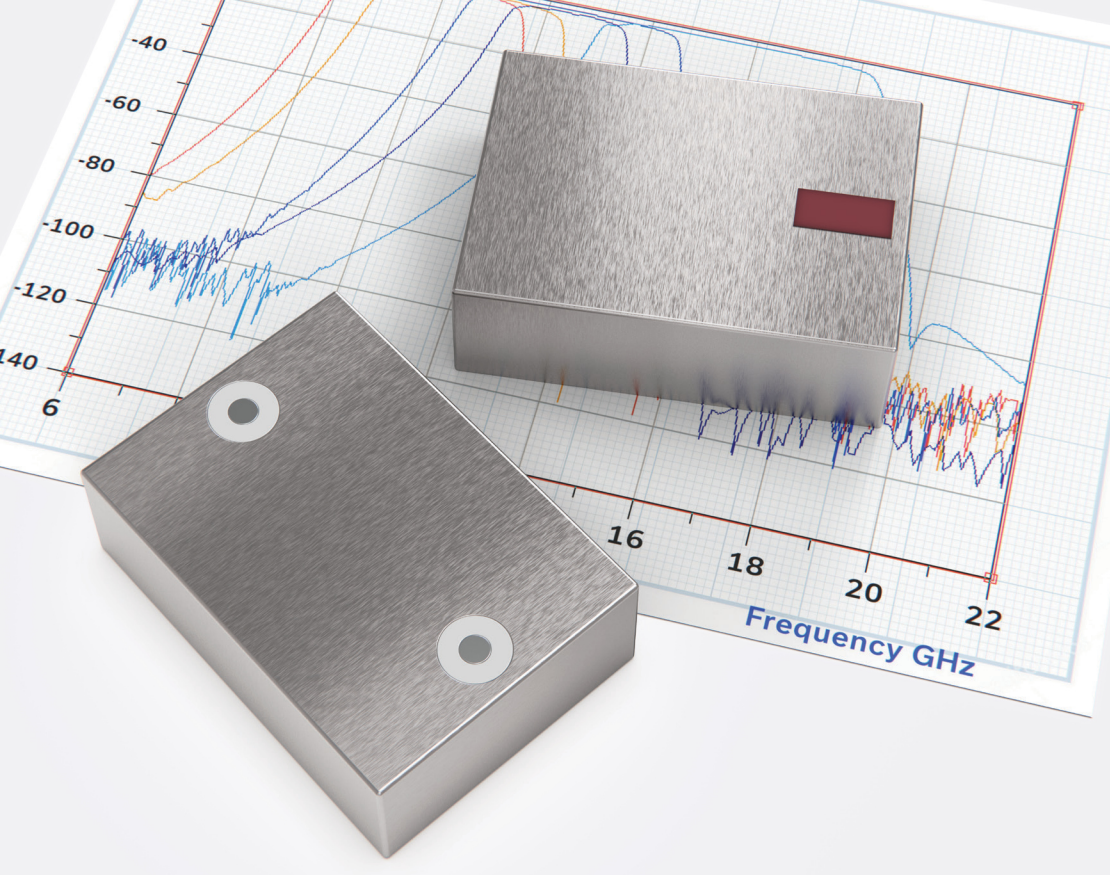

4 TO 50 GHz

High-Rejection LTCC Filters

Proprietary Technology

- 100+ dB rejection floor
- Internally shielded – no detuning
- 1812 surface-mount package style
- Best EMI & EMC performance on an SMD
- A fraction of the size and cost of other technologies with comparable performance



COMPANION PART
TPHK-3002+
1812 LTCC Thru-Line

- DC to 30 GHz
- <1 dB insertion loss
- Placeholder for BFHK-series filters
- Add design flexibility to your board layout

LEARN MORE

