10.0.0.0/16 represents all IP addresses in 10.0.0.0 and 10.0.255.255. It's using CIDR notation (explained earlier in the chapter).

Figure 5.10 shows the architecture of the VPC.

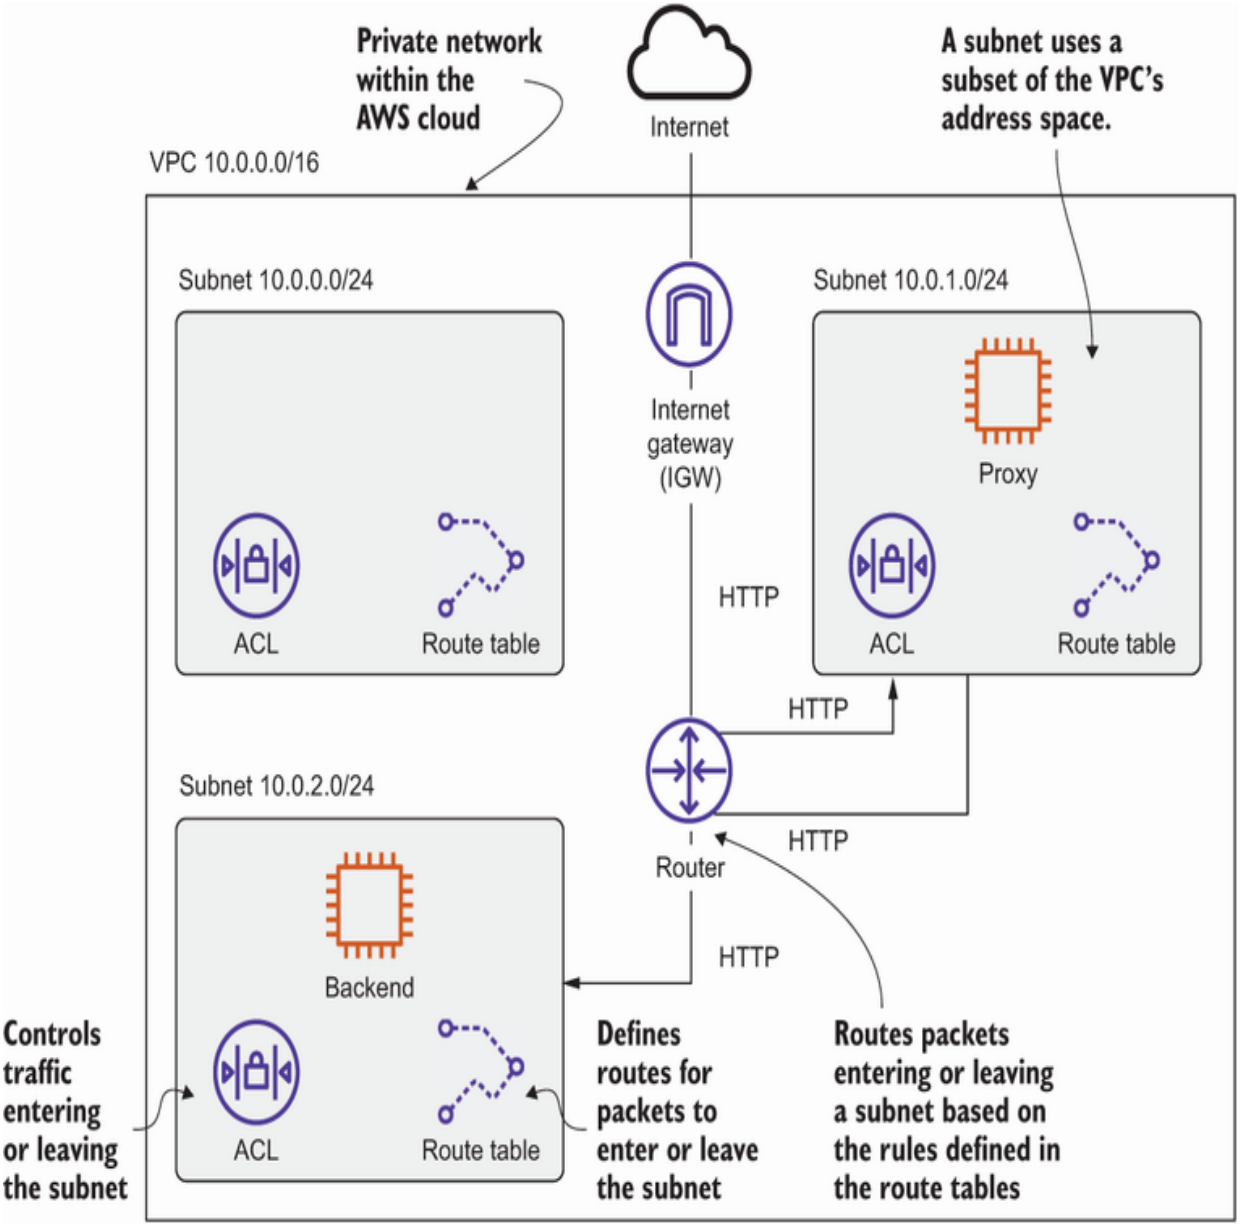


Figure 5.10 VPC with three subnets to secure a web application