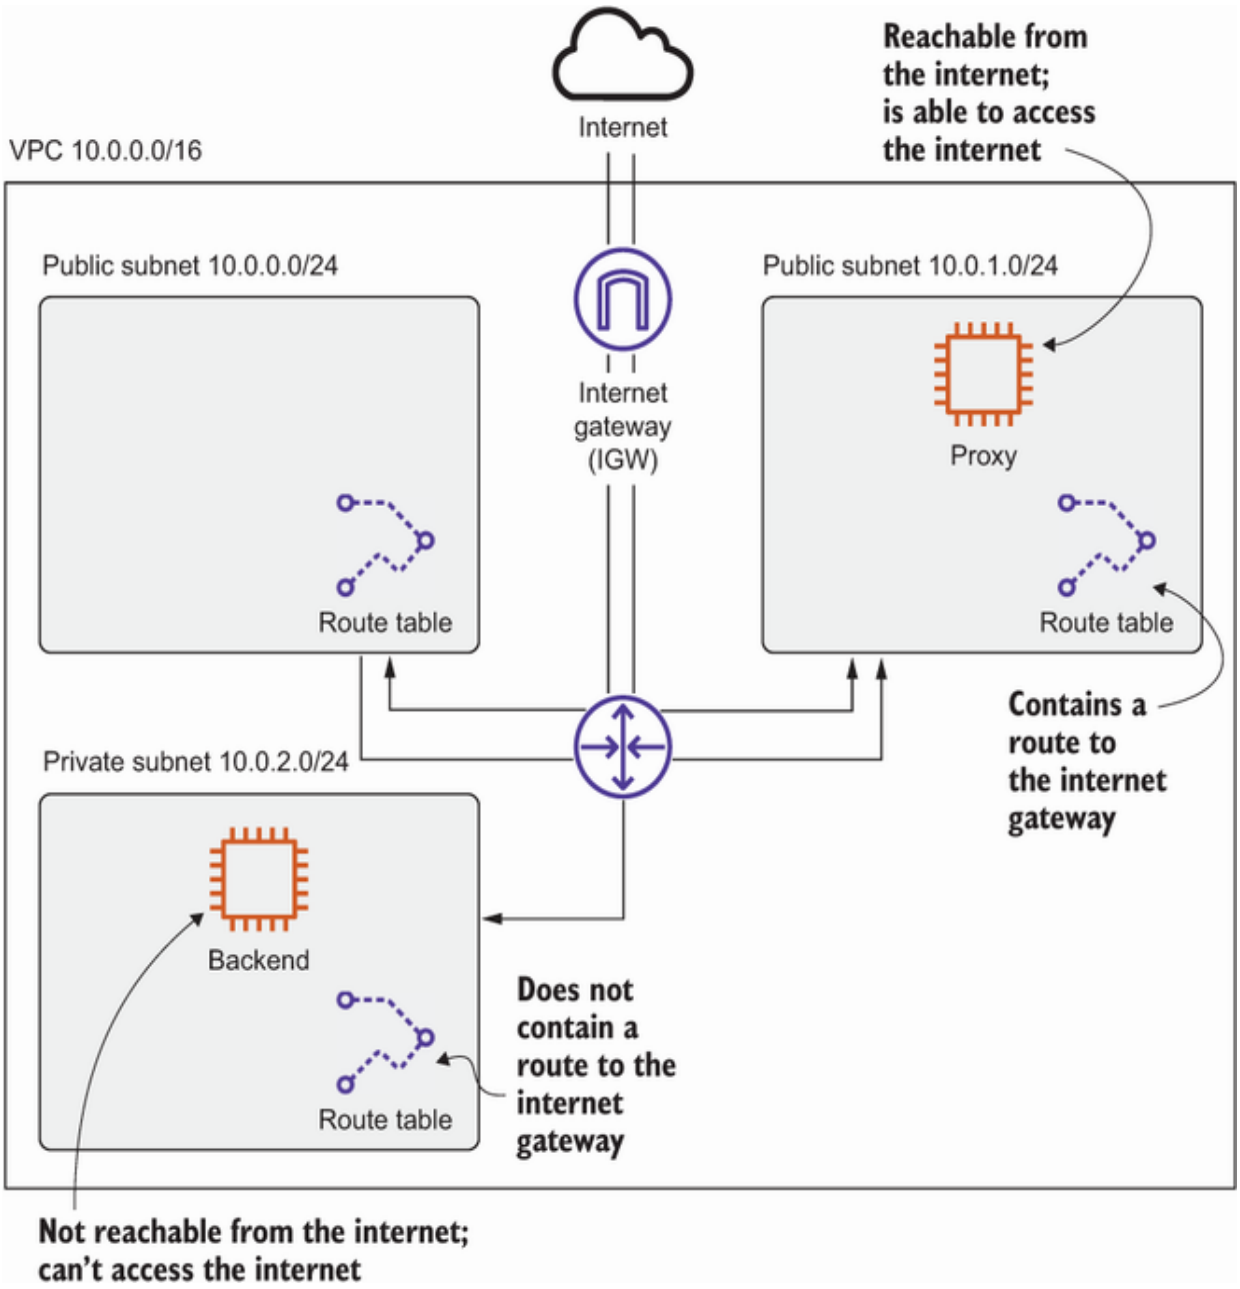


Figure 5.11 Private and public subnets

The backend subnet allows HTTP requests from the proxy subnet. The following NACLs are needed:

- Allow inbound port 80 (HTTP) from 10.0.1.0/24.
- Allow outbound ephemeral ports to 10.0.1.0/24.