
SYDNEY HARBOUR BRIDGE CAN GROW IN HEIGHT BY UP TO 7 IN (18 CM) ON HOT DAYS

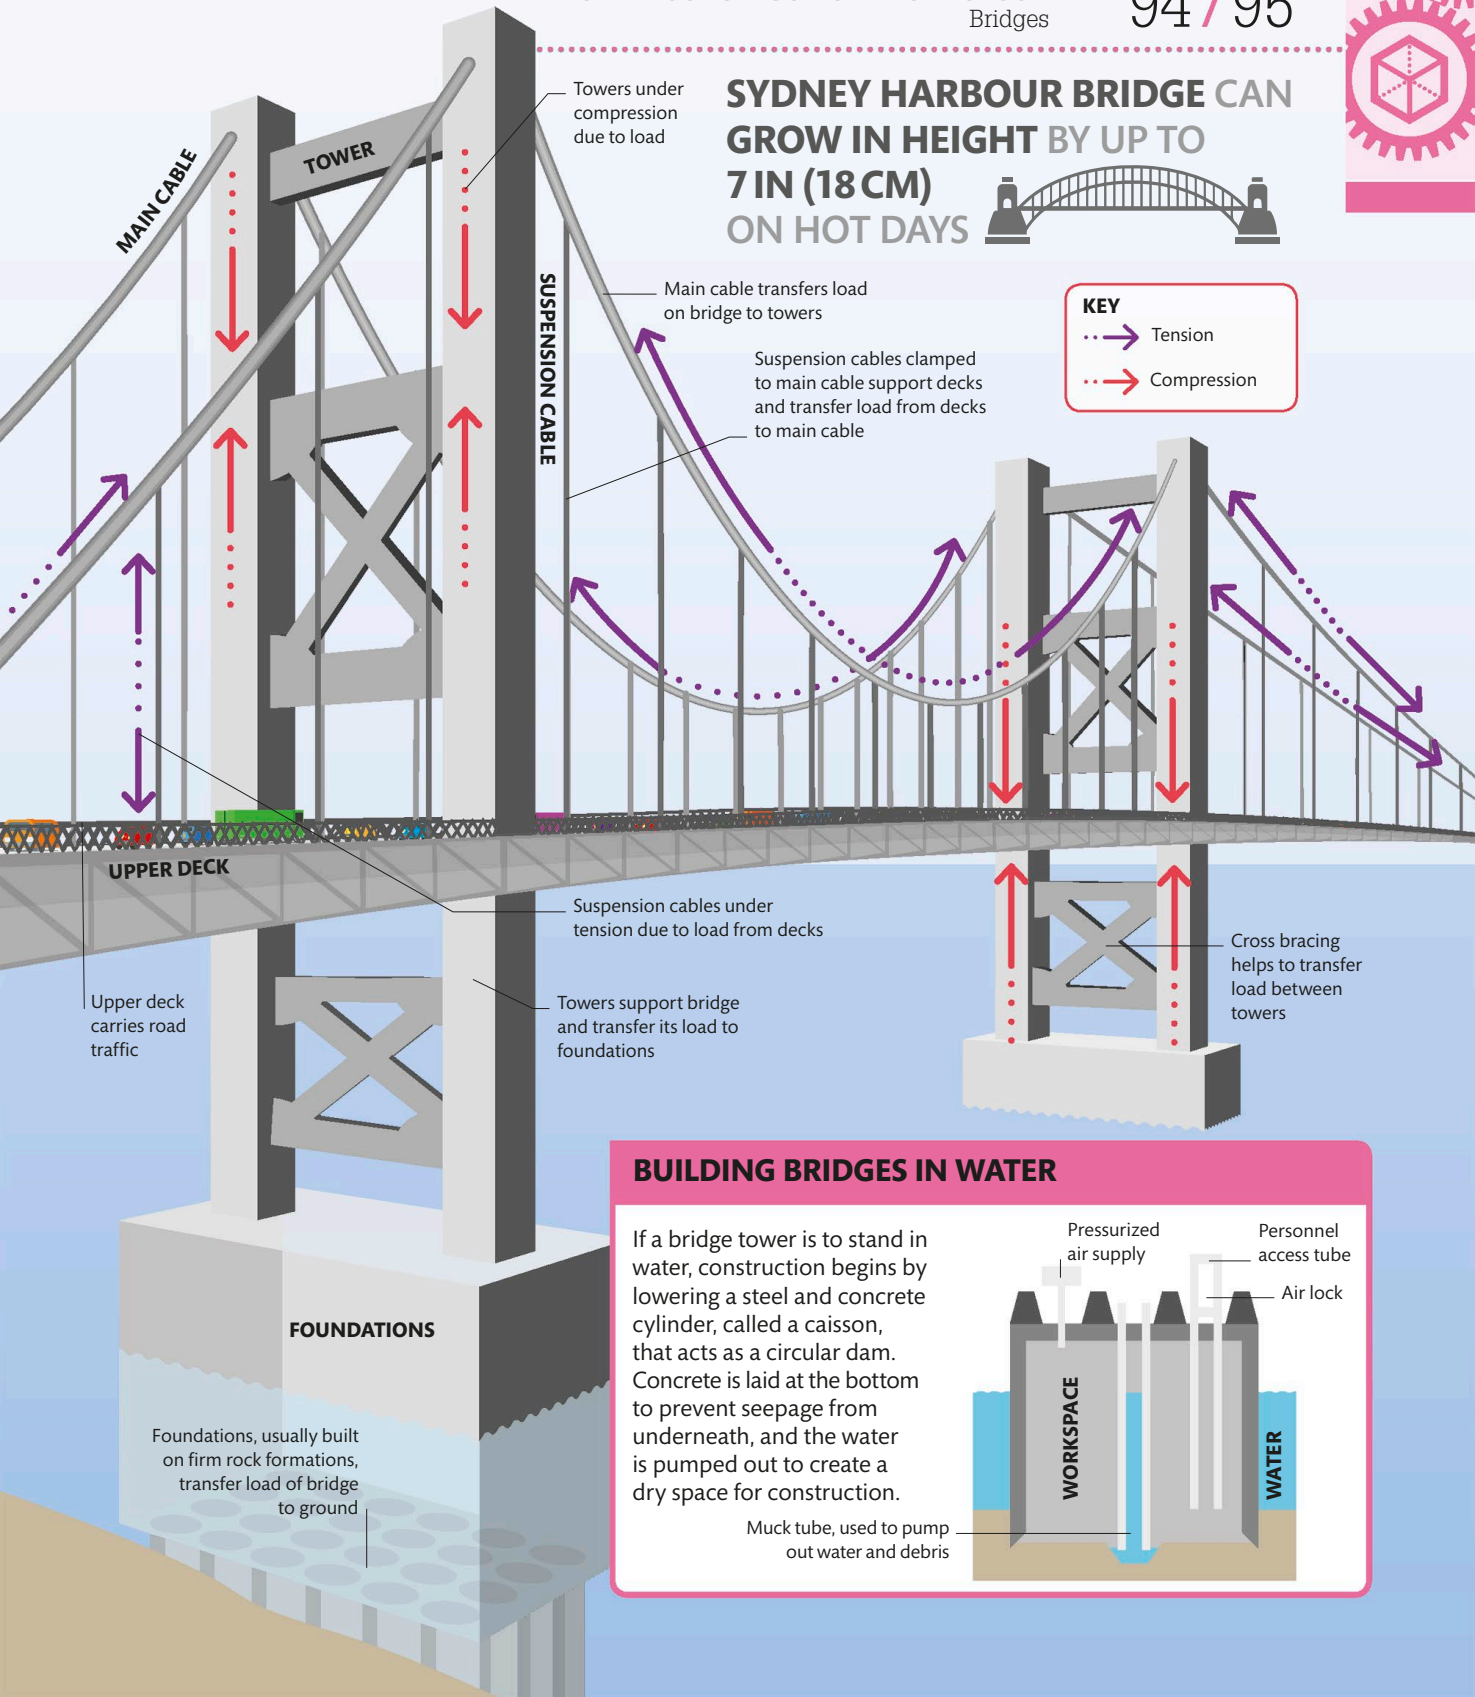

BUILDING BRIDGES IN WATER

If a bridge tower is to stand in water, construction begins by lowering a steel and concrete cylinder, called a caisson, that acts as a circular dam. Concrete is laid at the bottom to prevent seepage from underneath, and the water is pumped out to create a dry space for construction.