10.3. CATHODE RAY OSCILLOSCOPE (CRO)

Cathode Ray Oscilloscope is an electronic device in which various types of waveforms can be seen on the screen. In abbreviated form, it is called as CRO.

DO YOU KNOW?

CRO was invented by German Scientist Karl Ferdinand Braun in 1897.

Figure 10.20 shows Front panel of a Cathode Ray Oscilloscope.

Functions of important front panel controls of a CRO

Display controls

Intensity control

An intensity control is used to adjust the brightness of the screen.

Focus control

A focus control is used to adjust the sharpness of the waveform.

500 V AC MAX

It is the input socket, in which the waveform to be seen, should be connected through a CRO cable.

Vertical controls

- *Volts/div :* For selecting desired voltage sensitivity of the vertical amplifier to obtain the proper wave form on the screen i.e., to bring the waveform within the viewing area of the screen.
- *Vertical Position knob:* To move the waveform up or down on the screen.

Horizontal controls

Sec / division : To get distinct and stable waveform in the CRT display and correct horizontal synchronising waveform (in phase with the input waveform), this control is used.

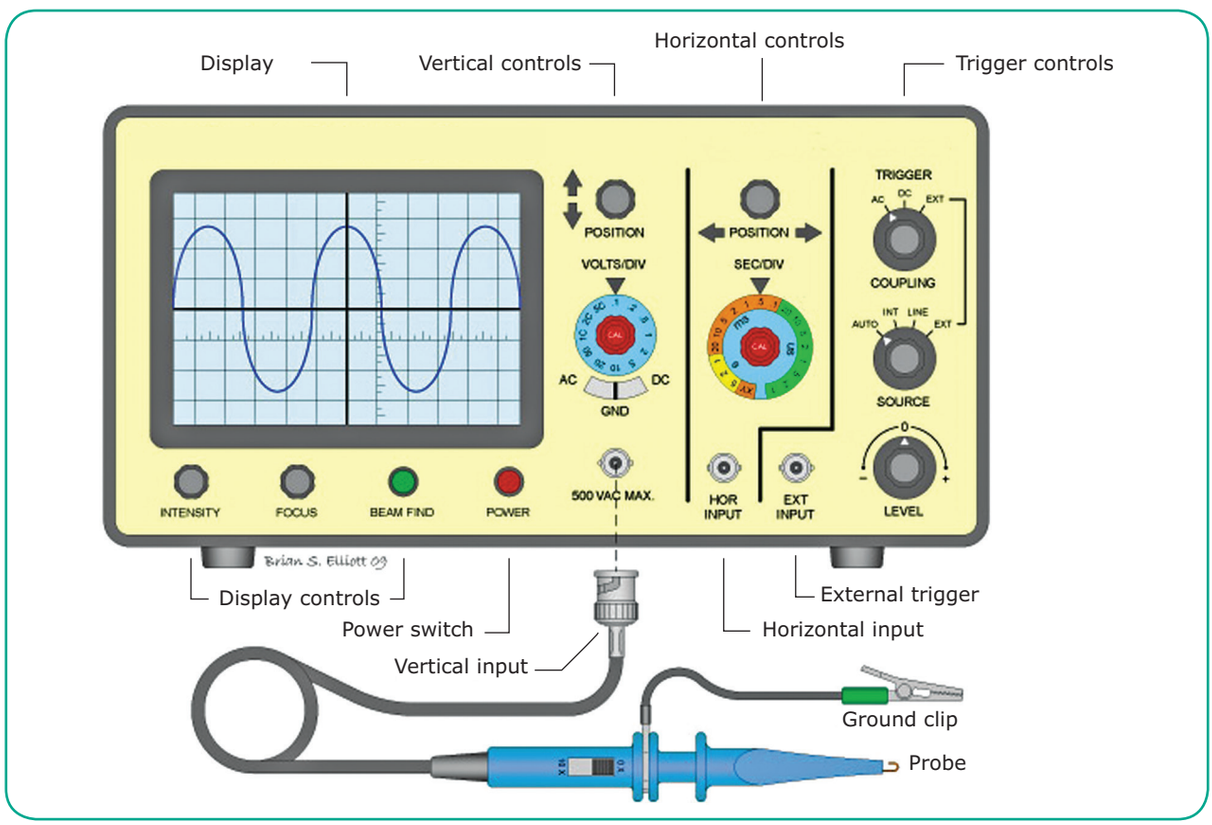


Figure 10.20 Front panel of a Cathode Ray Oscilloscope

ELEC_EQUIP_Chapter10.indd 213 11/10/2020 11:55:37 AM