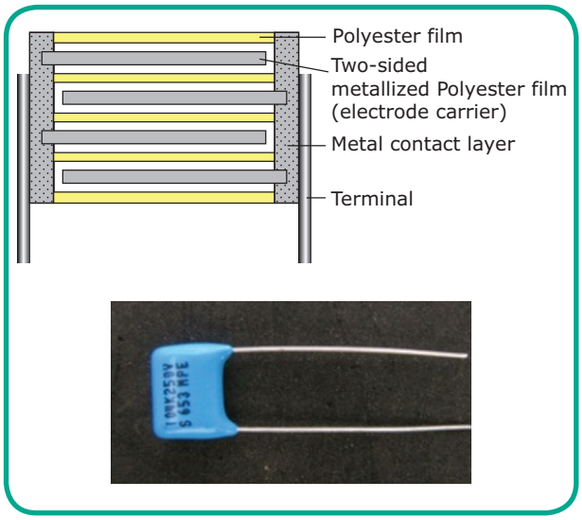


Figure 1.56 **Polyester Capacitor**

Advantage

It can be used in high voltage applications having voltage rating up to 2 kV.

Uses

1. Coupling
2. Decoupling

1.11.7.1.4 Ceramic capacitor

Figure 1.57 shows the Ceramic capacitor.

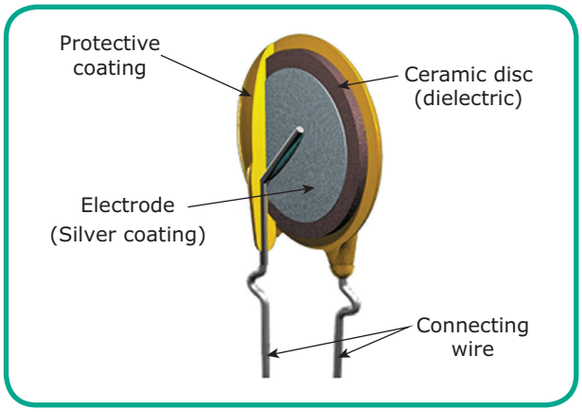


Figure 1.57 **Ceramic Capacitor**

In this, ceramic is used as dielectric medium. Silver coating is made on both sides of the ceramic. It is also called as Disc Capacitor, because it looks like a small disc.

Available capacitor values are from 100 pF to low value μF. Voltage rating from 16V to 200V.

Uses

1. Blocking.
2. Coupling.
3. Decoupling.
4. High frequency filtering.

Identifying the values



Figure 1.58

Figure 1.58 shows the values of capacitors as 102 and 103.

102 means 10 X 10^2= 1000pF

= 1kilo pico Farad = 1kpF

103 means 10×10^3=10,000pF

= 10 kilo pico Farad = 10kpF

1.11.7.1.5 Electrolytic capacitor

Figure 1.59 shows the electrolytic capacitor. In this, aluminium oxide is used as dielectric medium. Pure aluminium foils are used as anode (+). Aluminium paste is coated in the dielectric and it is used as cathode (-).

Precautions

Since it has polarities (+ and -), it has to be connected with DC supply only with correct polarities. Only –ve polarity is printed in the capacitor. The other terminal is taken as +ve terminal. Care must be taken while connecting an electrolytic capacitor in a circuit,

ELEC_EQUIP_Chapter01.indd 29 11/10/2020 12:22:46 PM