

Figure 2.33 SMD Fuse

2.5.2.4 Axial Type Fuse

In this type of fuses, the fuse element is enclosed in a glass chamber directly soldered in the PCB board and available in low-voltage and current ratings. These are used in robotics, power supplies etc. The axial type fuse is shown in Figure 2.34.



Figure 2.34 Axial Fuse

2.5.2.5 Thermal Type Fuse

The thermal type fuse is used to protect electrical appliances from the damages caused due to over-heating. Thermal fuses are used in coffee makers, refrigerators etc., in the form of thermostats. Figure 2.35 shows the thermal fuse.

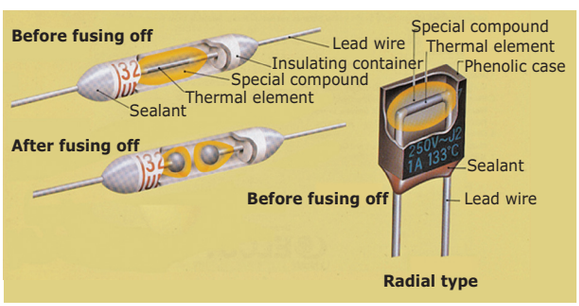


Figure 2.35 Thermal Fuse

2.5.2.6 HRC (High Rupturing Capacity) Type Fuse

This type of fuse is available in the current rating of 2 A to 800 A as shown in Figure 2.36. An HRC fuse is a type of cartridge fuse, in which the fuse element is enclosed with in a transparent ceramic material. These are used for protection of power transformers, motors, automobiles etc.

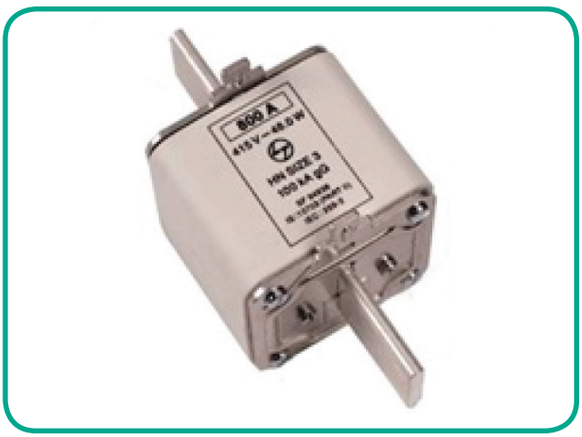


Figure 2.36 HRC

2.5.2.7 Resettable Type Fuse

A resettable fuse is a polymeric positive temperature co-efficient (PPTC) device that is used to protect against over-current faults in electronic circuits. This device is also known as poly-fuse or poly-switch. It is used in audio-amplifier, computer power supplies etc. It is shown in Figure 2.37.



Figure 2.37 Resettable Fuse

ELEC_EQUIP_Chapter02.indd 53 11/10/2020 12:23:51 PM