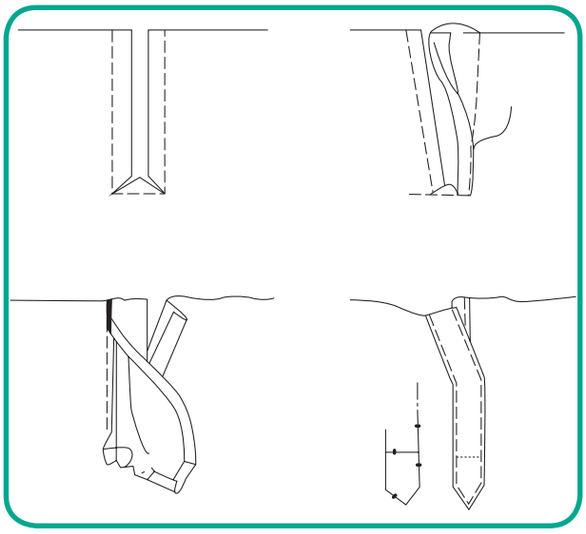


Figure 12.26 Miter Placket

of the slit which is normally 12-15 cm for the under lap.

- Place the strip right side facing to match the end of the slit and with right side facing, sew about 5 cm to join the strip.
- Fold and machine along the stitching line over the folded edge (0.25 cm) along the strip.
- Point the strip to about 2.5 cm wide.
- A strip measuring 5.5 cm wide and 3 cm longer than slit is cut for the overlap and this is placed on the seam line about 0.25 cm.
- Keep the right sides of the strip facing the wrong side of garment and tack the short side of the strip to the free side of the placket opening on the seam line.
- Machine stitch and bring the overlap on the right side of the garment.
- Turn under the seam allowance and adjust the position of the strip so that overlap and under lap are together, sew it.
- Make a rows of top stitch on the strips and garment together turn around the point and downward till the opening.
- Then sew twice keeping the overlap and under lap in position on the garment to form a square shape.

12.4.2.4 Zipper Placket

Zippers are plastic or metal rows with teeth like structures, which can be looped or unlooped by a runner. This is used to open or close the garment. It is attached on the placket. The market is filled with different types of zippers which can be matched based upon the side of placket opening and colour of the garment. Zippers are available in different colour and length (Figure 12.27).

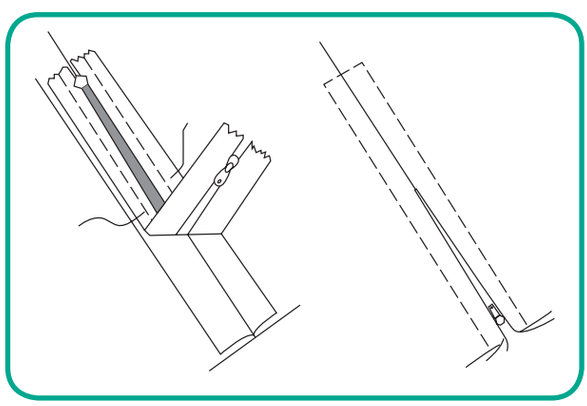


Figure 12.27 Zipper Placket

Method of Sewing Zipper Plackets

- Cut the opening in the garment where the zipper has to be attached.
- Select the zipper according to the opening size.
- Towards the end of the cut make a short slit 0.25 cm wide diagonally on both sides (an inverted 'V' shape).
- Turn all the three raw edges to the wrong side and tack them.

TDD_Final_Chapter12.indd 135 21-02-2019 12.35.49 PM