13.2.3 Drafting and Construction of a Basic Skirt Pattern

The basic skirt is also called plain or straight skirt.

Draw a rectangle ABCD,

AB = CD = ¼ hip round + 5 cm for ease or required measurement for flare

BC = AD = skirt length (add required hem allowances of 5-8 cm.)

Mark AG=BF = Waist to hip (15 to 20 cm)

Join GF

AE = ¼ waist + 2.5 cm for dart and 1 cm for ease

Dart = 1.25 cm

Curve line to E.

Mark ¼ seat + 1.25 cm for ease on line GF

Mark CC_1 = 1 cm.

Mark points (1.2 cm) on either side of O.

Connect them to P (Figure 13.19).

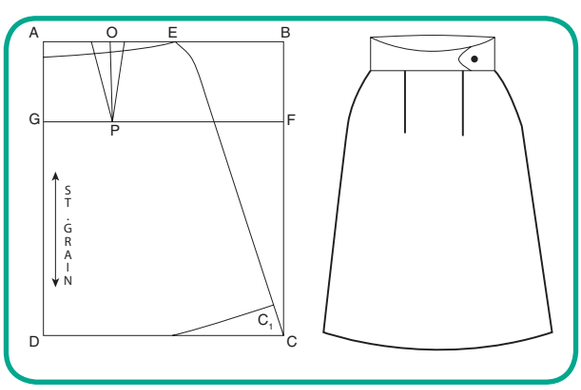


Figure 13.19 Basic Skirt Pattern

Method of Sewing a Basic Skirt

- Join the side seams
- Finish one side with 15 cm long-one piece placket
- Join waist band
- Finish hem line
- Attach fasteners and iron

13.2.4 Drafting and Construction of a Panel Skirt / Four Gore Skirt

Draw a rectangle ABCD

AB = DC = ½ waist round + 2.5 cm

AD = BC = Skirt length + hem allowance (8 to 10 cm) – Band or belt width (10 cm) Band is cut separately and attached after the sides are attached

AE and CF = 1/8 waist + 1.25 cm for ease

Join EF

Mark points below A and C along the lines AD and BC as shown in the figure = 2.5 cm

Mark points below E and F as shown in the figure = 3.5 cm

Curve the lines as shown in the figure

Number of pieces cut will be 4 side panel and 2 central panels (Figure 13.20).

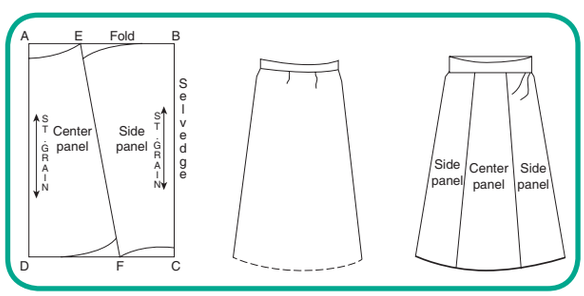


Figure 13.20 Panel Skirt Pattern

Method of Sewing a Panel Skirt

- Join the two side panels on either side of the center panels.
- Join the side seams
  - Finish one side with 15 cms one piece placket.
  - Join waist band.
  - Finish hem line.
  - Attach fasteners and iron.

TDD_Final_Chapter13.indd 153 21-02-2019 12.48.02 PM