
Yarn Manufacturing System Diagram

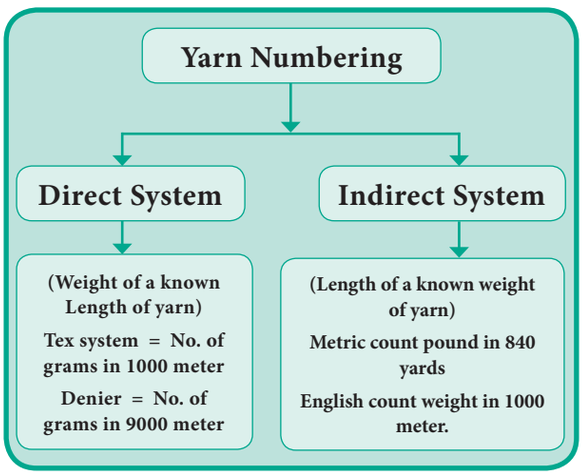

4.7 YARN MANUFACTURING PROCESS

Fibres are twisted together to form a yarn. This process is called as spinning. Spinning process includes all process from cleaning the fibres to opening the bale for twisting of yarn.

U6KMY8

4.7.1 Opening and Picking

The fibres are collected from various bales which are mixed together and finally the yarn is produced. Simultaneously, impurities such as lint, dirt, seeds, leaves and stems are removed by the machines (picker, breakers and intermediates). After cleaning, the fibres are loosen and are formed like a lap.

DO YOU KNOW?

Who discovered Cotton Ginning?

Eli Whitney

Cotton is the most widely used clothing material, but it became common only in mid-1800s, when Eli Whitney's discovered cotton gin. This made the removal of cotton fibers from the seeds easily.

4.7.2 Carding

The lap is unrolled and drawn into a revolving cylinder, which contains fine hooks or wide bristles. These will pull the fibres in one direction and form them into a thin film. It is known as carding. This film is drawn into a funnel shaped opening. The yarn comes out in the form of round rope like strand called sliver (Figure 4.3).



Figure 4.3 Carding

4.7.3 Combing

It is a process of straightening the fibre. Short fibres are combed out. The long fibres are again formed into a sliver called comb sliver (Figure 4.4).



Figure 4.4 Combing

TDD_Final_Chapter04.indd 36 21-02-2019 11.18.01 AM