4.7.4 Drawing

In drawing process, several slivers are drawn together. Slivers are drawn to form a single sliver of the same diameter (Figure 4.5).

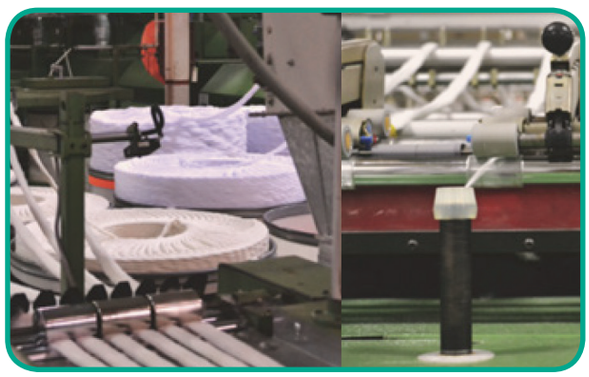


Figure 4.5 Drawing and Roving

4.7.5 Roving

The combined sliver or condensed combined sliver is taken to the slubber of a series of machines called Roving frames. A slack twist is given to the yarn sliver (Figure 4.5).

4.7.6 Spinning

Spinning is the next process after roving. Spinning frame is made up with a number of spools. The roving passes through the ring spinning mechanism, which is drawn again and twisted. Required size and twist of yarn are obtained and wound on bobbins properly. Now bobbin is ready to be used for weaving (Figure 4.6).

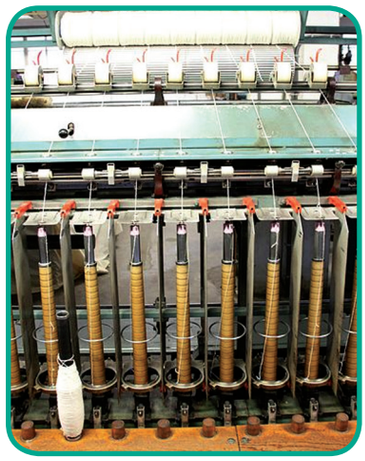


Figure 4.6 Spinning

4.8 SUMMARY

Yarns are necessary for fabric construction. They can be knitted, woven or knotted. Spinning is the process in which fibres are twisted into yarns. Yarns influence the texture, appearance and performance of fabric. Different types of yarn are manufactured and used for various end applications.

POINTS TO REMEMBER:

- Yarns are strands of fibres, filament and other material used for construction of fabric.
- Fibres can be twisted together or grouped together.
- Yarns are made from natural or man made or blended fibre.
- Opening and picking, carding, combing, drawing, roving and spinning are the process involved in yarn manufacturing.

TDD_Final_Chapter04.indd 37 21-02-2019 11.18.01 AM