S.No.	Warp	Weft
6.	Filamentous yarns are preferred as warps.	Spun yarns are used.
7.	These are parallel to the selvedge.	Weft is perpendicular to selvedge.
8.	Yarns are finer in warp-wise direction as they have higher twist.	Yarns may be thicker or finer with medium twist.
9.	Most garments are cut in lengthwise direction.	Some garment parts such as collars are cut in this grain for decoration.

5. 3 WEAVING

Weaving is the simple technique of making a fabric. The lengthwise and crosswise yarns are overlapped (interlaced) one above the other in an alternative manner. This process of interlacing is done on loom. Loom is a wooden / metal machine, which holds the warp yarns and facilitates the weft yarn to pass up and below the warp to form the woven structure.

U6Y6NS

The technique of fabric construction by weaving was probably known as spinning during the ancient times. In the course of time, looms were made which were simple and hand operated. The fabric woven in these looms is called hand loom fabric. Today power loom has taken place of the hand operated loom which can weave fabric faster and with fewer defects in comparison to hand looms (Figure 5.1).

Looms can be classified into various categories. This classification is based upon the picking operations used by the loom. The looms which use shuttles for weft insertion are called conventional shuttle or fly shuttle looms. The fabric woven in this loom has more defects as it used large wooden shuttle which causes abrasion resulting in more broken yarns. These looms are also very noisy and PPM (Picks per Minute) is also low.



Figure 5.1 Shuttle Loom

The looms which use other devices to bring the filling yarn through the fabric are called shuttleless looms. These looms have high productivity with fewer fabric faults (Figure 5.2).

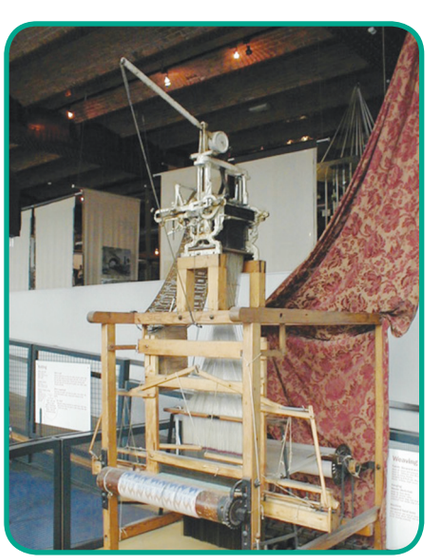


Figure 5.2 Jacquard Loom

TDD_Final_Chapter05.indd 41 21-02-2019 11.26.37 AM