7.2 TEMPORARY STITCHES

7.2.1 Even Tacking

Description

- It holds two or more fabric layers together.
- It is used for tacking seams and other edges before stitching.
- Stitches are made in equal lengths.

Method

- Work the stitches from right to left.
- Bring needle on the right side of the fabric at 1.
- Take down needle at 2 to the wrong side of the fabric.
- Again bring needle up at 3 leaving blank space in between (Figure 7.1) .

7.2.2 Uneven Tacking

Description

- This stitch is stronger than even tacking.
- It is used as guideline prior to machine stitching.
- It is also used to catch long folds.

Method

- Work the stitches from right to left.
- Bring needle on the right side of the fabric at 1.
- Take down needle at 2 to the wrong side of the fabric.
- Again bring needle up at 3 leaving half of the stitch length in between 2 and 3 (Figure 7.1).

7.2.3 Diagonal Tacking

Description

- It is used for holding two or three layers of fabric before sewing.
- Slanting stitch is done on the wrong side and vertical stitch on the upper side.

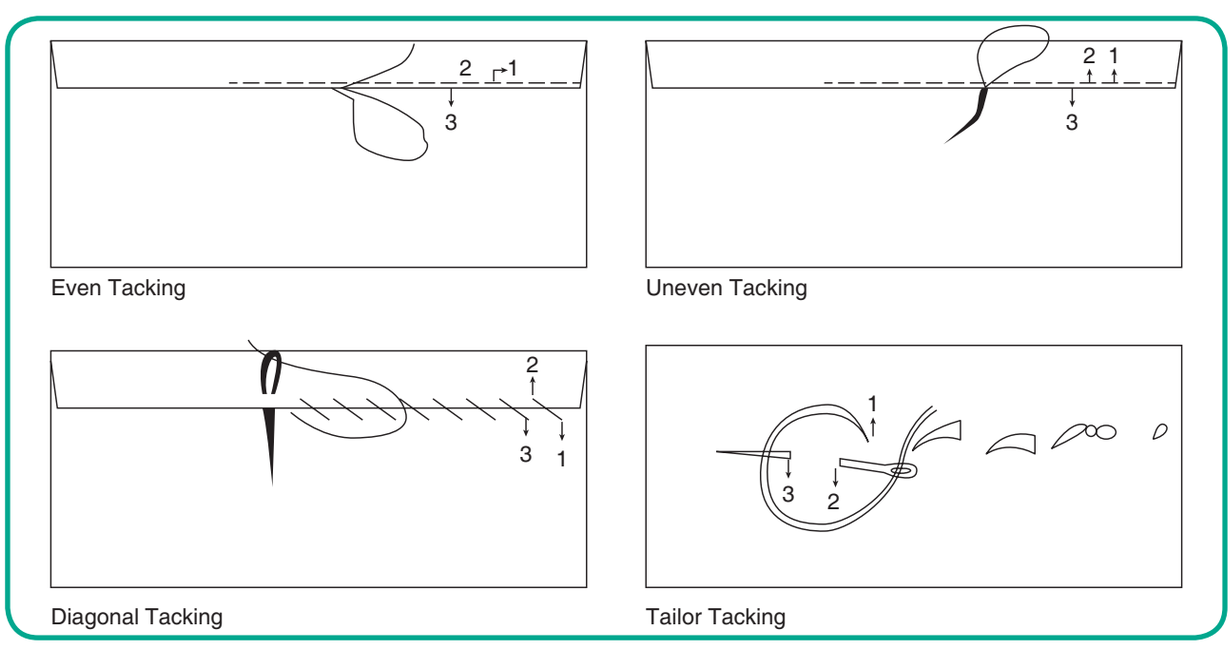


Figure 7.1 Temporary Stitches

TDD_Final_Chapter07.indd 63 21-02-2019 11.35.39 AM