Stitch Regulator

Stitch regulator is a small vertical bar with markings and has a knob. It controls the length of the stitch on the fabric.

Bobbin Winder

Bobbin winder is a small rod in the front side of the wheel. It is used to wind thread and it controls the bobbin while winding thread. Bobbin winding should be carried out in medium speed. Increase in speed will result in stretching of the sewing thread which may result into breakage (Figure 8.6).



Figure 8.6 Bobbin Winder

Fly Wheel

Fly wheel is a circular metal ring which helps the movement of the machine. It can be rotated manually or by power. It lowers and raises the sewing machine needle (Figure 8.7).



Figure 8.7 Fly Wheel

Clutch / Thumb Screw

Clutch or thumb screw is attached in the middle of fly wheel. If the screw is removed, the machine will not work. Thumb screw controls stitching.

Slide Plate

This is a rectangular metal plate. It can be moved to insert and remove the bobbin.

Needle Plate

It is a semi -circular metal plate with a small hole through which the needle passes through. The needle enters inside the hole and picks the bobbin thread (Figure 8.8).

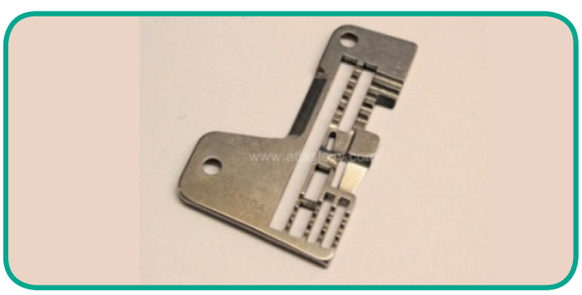


Figure 8.8 Needle Plate

Feed Dog

The feed dog is a set of metal teeth. The feed dog helps the fabric to move after each stitch (Figure 8.9).

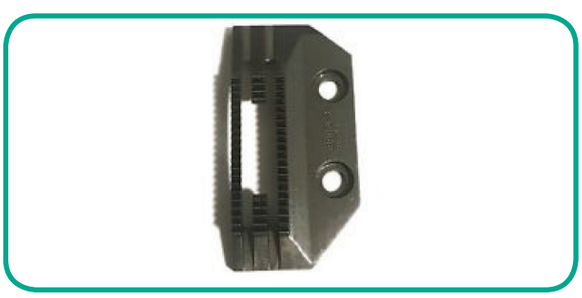


Figure 8.9 Feed Dog

Face Plate

Face plate is a metal plate covering the needle bar, presser bar and take up lever.

TDD_Final_Chapter08.indd 75 21-02-2019 11.40.54 AM